



SIDE PLAN


TOP PLAN

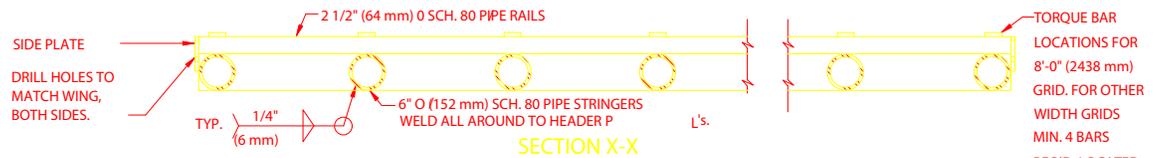


SECTION X-X

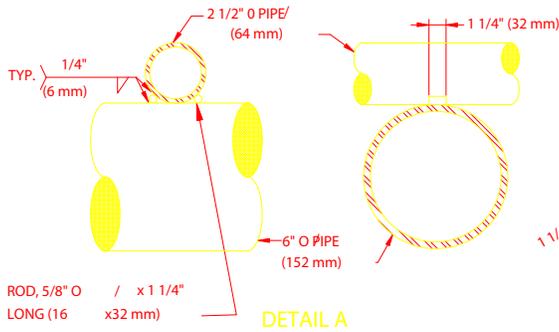


DETAIL A

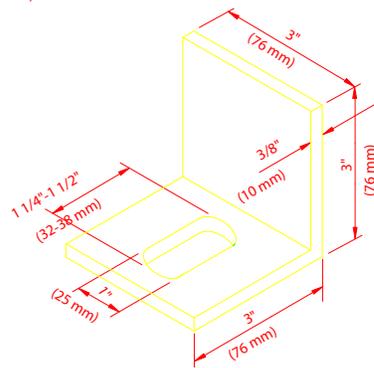

ANCHOR CLIP DETAIL
DETAIL B

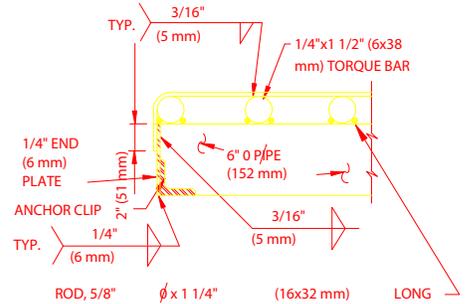

TORQUE ROD CONNECTION DETAIL C

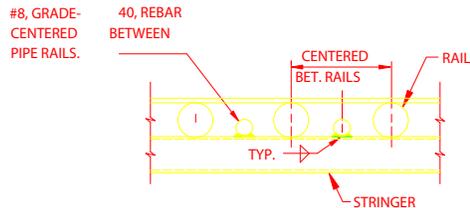

MODIFICATION FOR WILD HORSES

NOTES:

1. DESIGN LOADING OF GRID CONFORMS TO AASHTO H-20-44.
2. PROVIDE 4-1 1/2"x1/4" (38x6 mm) TORQUE BARS, FULL LENGTH, SPACED AS SHOWN, AND WELDED WITH 3/16" (5 mm) FILLET WELDS TO TOP OF RAILS AS REQUIRED ON WORK DATA SHEET. SEE DETAIL C.
3. END PLAT FLUSH WITH, AND WELDED TO, RAILS.
4. THE METRIC CONVERSIONS ARE PROVIDED IN PARENTHESIS FOLLOWING THE ENGLISH UNITS.