


TOQUOP


ENERGY PROJECT

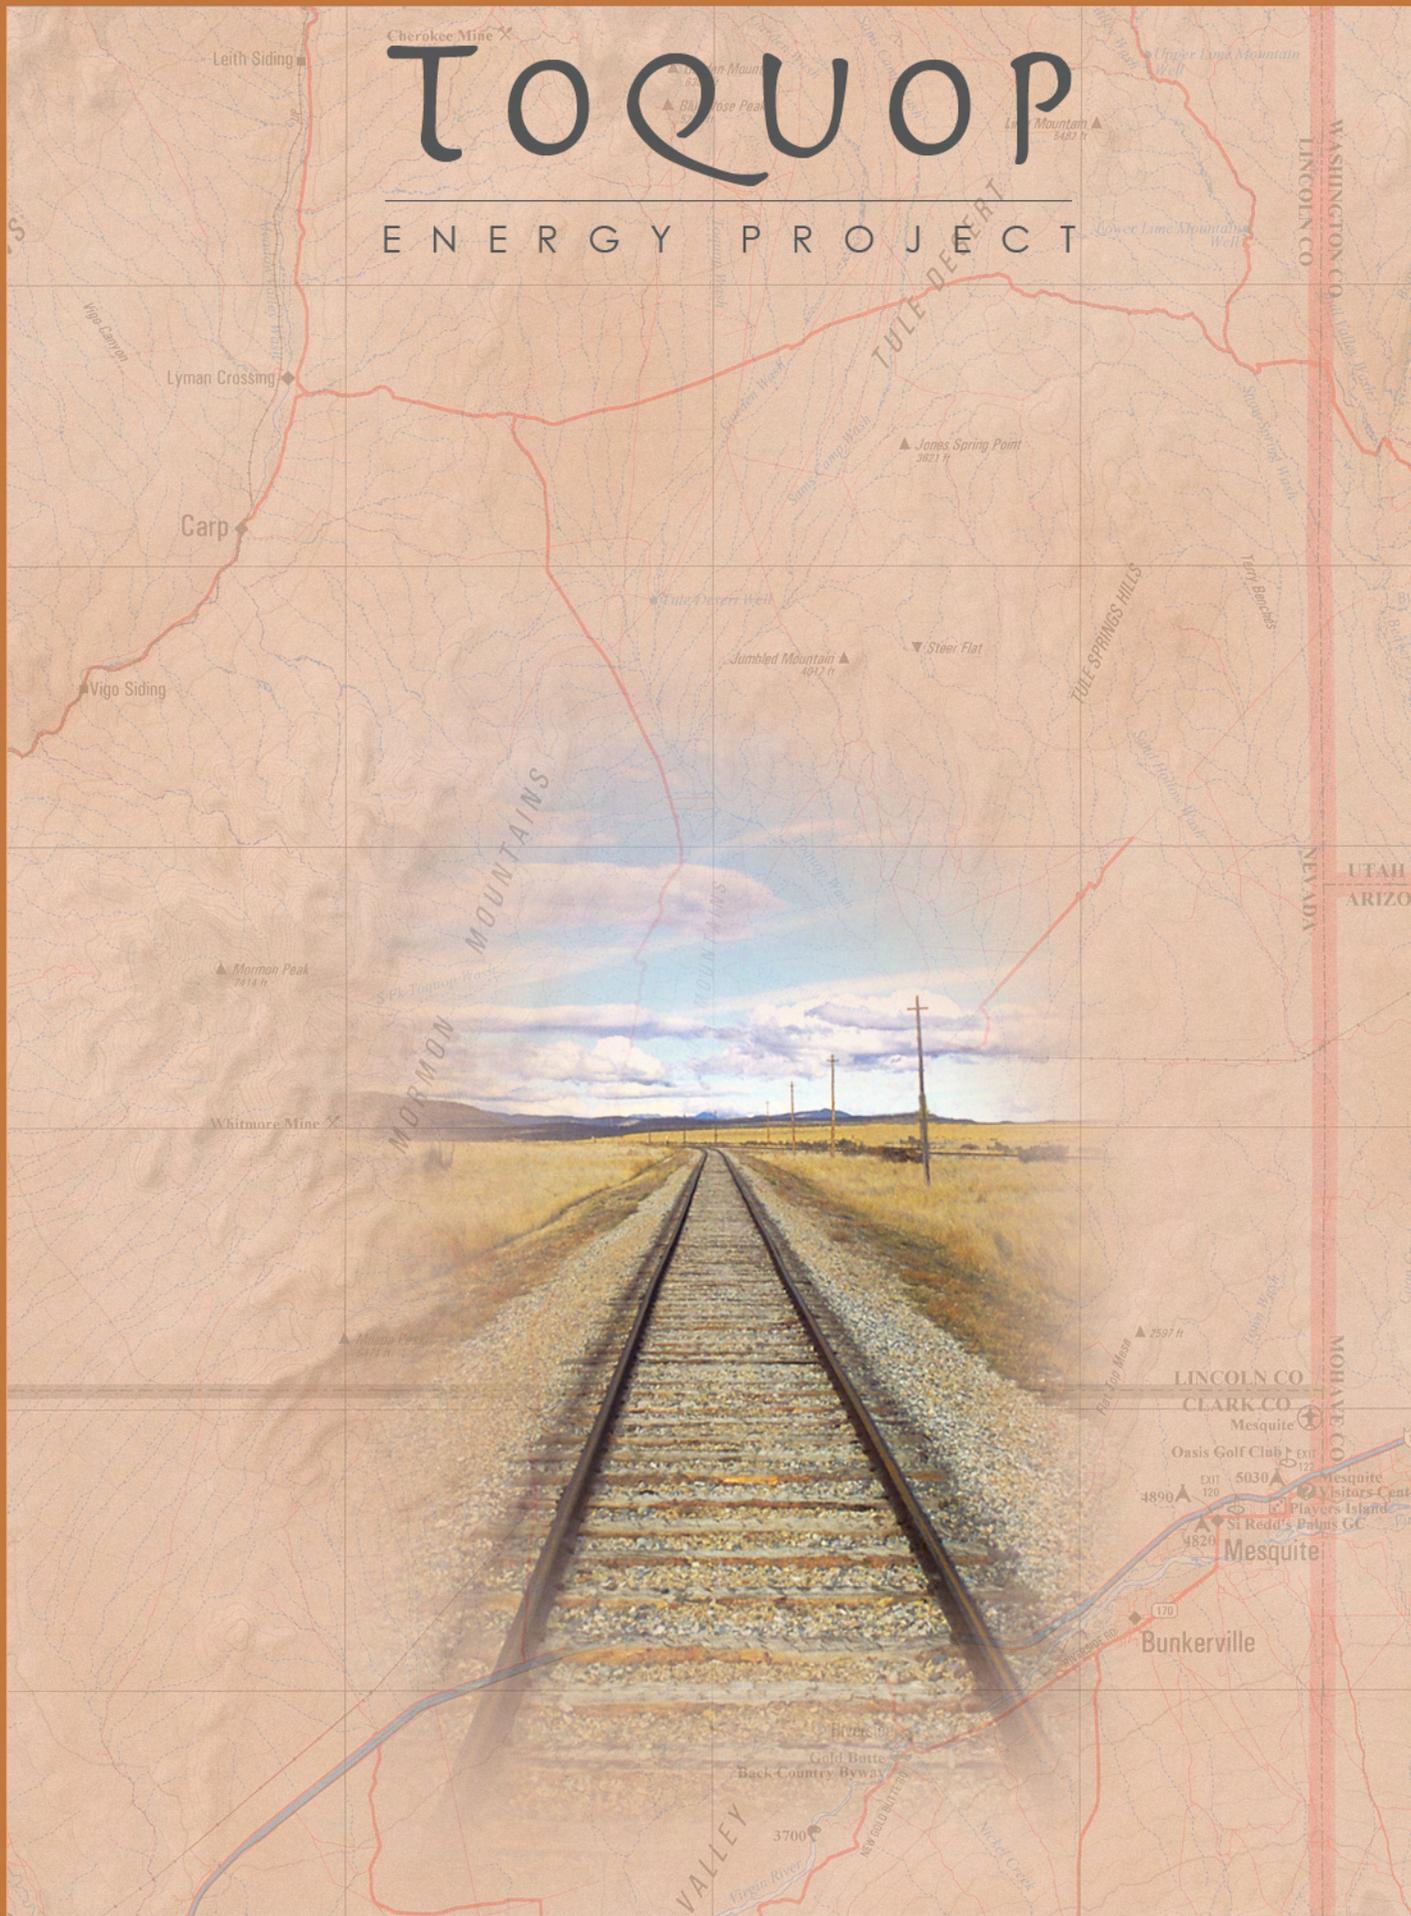

APPENDIX F - RAIL LINE FENCE

APPENDIX F

Fencing – Impact Minimization Measure

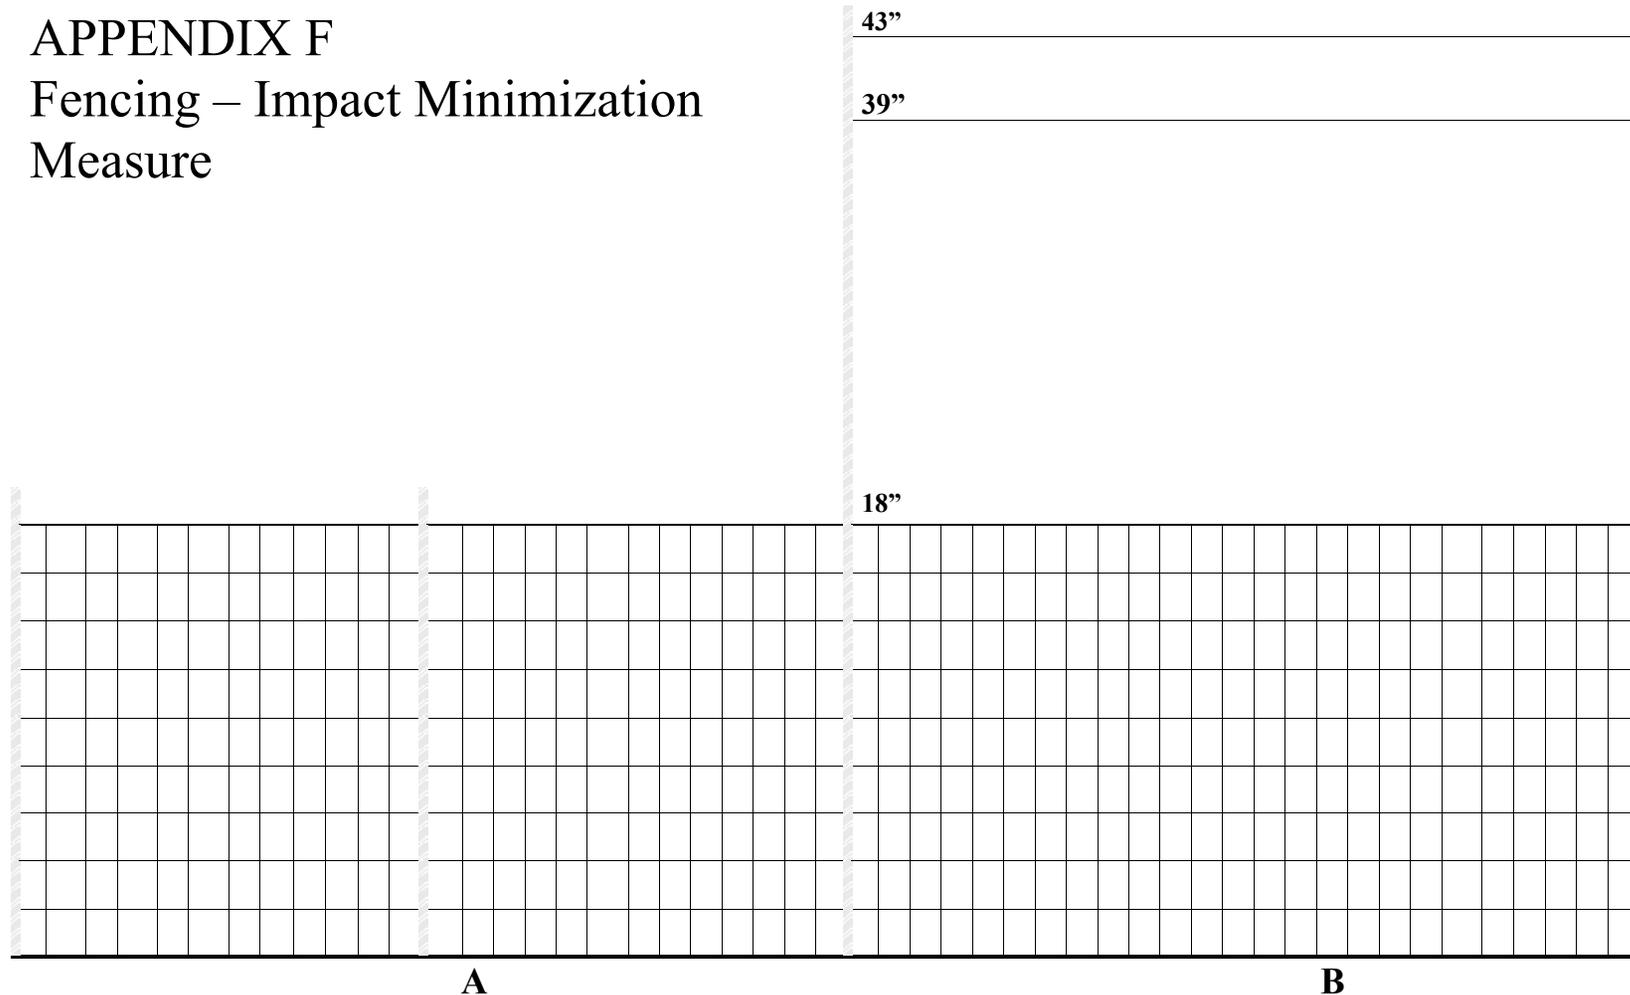

A – Preferred short fence for desert tortoise along rail line and access road from Interstate 15, and around power plant site

- 1-inch by 2-inch metal mesh, at least 18 inches high

B – Tall fence for livestock along rail line that allows safe access for bighorn sheep

- All wire strands are smooth, no barbs
- Space between top of tortoise mesh and first smooth wire (39 inches) is no less than 21 inches
- Space between top two strands (39 inches and 43 inches) is no more than 4 inches.
- Fence posts, stays, or H-braces are spaced no more than 10 feet apart.

SOURCES: Helvie 1971; Sizer 1967; Bureau of Land Management 1985

NOTE: Heights described are from ground level