

1 51

BOOK 3062

FIELD NOTES

OF THE SURVEY OF

Portions of the East, West, and South bars & Subdivision lines

and RESURVEY of

Part of Subdivision Lines of

TOWNSHIP 27 NORTH, RANGE 3 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

John F. Hesse.

In the capacity of U. S. Surveyor, under instructions dated March 4, 1915, issued by the United States Surveyor General to govern surveys included in Group No. 53, which were approved by the Commissioner of the General Land Office, December 14, 1915.

Survey & Re Survey commenced November 1, 1916

Survey & Re Survey completed November 24, 1916

Executed under Assignment
Instructions dated September 28, 1916 and December 18, 1916.

3062

3062

1A

3062


Book "B"

BOOK 3062

Group 53, ---Arizona.

Two sets of cons. Cons. for area W. set under this group.
" " " E. " " group no. 54.

INDEX DIAGRAM.

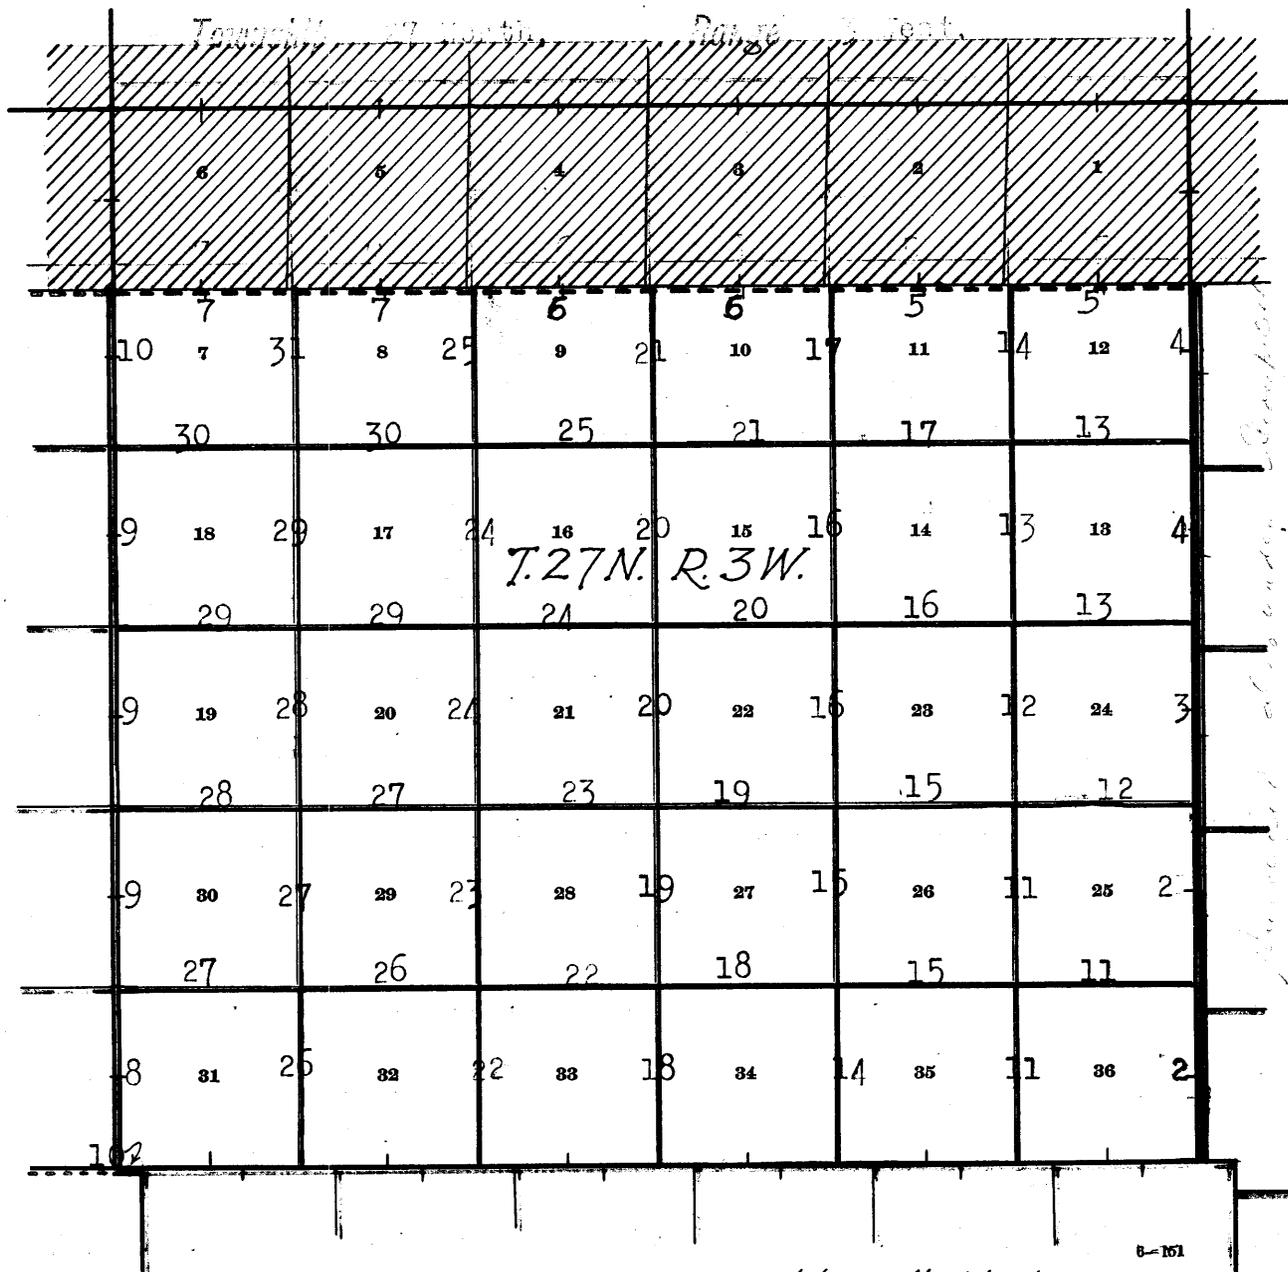

- Lines surveyed under this group. Notes in this book. (3062)
- Lines resurveyed under this group. Notes in this book. (3062)
- Lines surveyed under this group. Notes in book "A." (3061)
- Lines surveyed under this group Notes in book "C." (3063)
- Lines resurveyed under this group. Notes in book "C." (3063)
- Lines surveyed under this group Notes in book "D." (3064)
- Lines surveyed under current group N^o 54
- Accepted surveys.
- Area surveyed as per accepted plats on file.

Survey of parts of the E. and W. Bdrs. of T. 27 N., R. 3 W.
 Resurvey of N. Bdrs. of Secs. 12, 11, 10, 9, 8 & 7, T. 27 N., R. 3 W.
 Portion of S. Bdy. of sec. 31, T. 27 N., R. 3 W.
 2. Subdivision of Unsurveyed Portion of T. 27 N., R. 3 W.

Chains.

Survey executed by John F. Hesse, U. S. Surveyor.

For description of instrument and record of approval, see beginning of notes of Book "A".

From recent and repeated field tests of the transit and solar attachment, on a meridian established by observations on Polaris, they are known to be in satisfactory adjustment. (See test of Polaris meridian at the beginning of notes of book "A".)

Clinometers and five chain steel tapes were the instruments employed in the measurement of all lines.

--oOo--

East Boundary of T. 27 N., R. 3 W.

From the closing cor. of Ts. 27 N., Rs. 2 and 3 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54,

North on E. bdy. of sec. 36.

- 27.50 Over rolling land, through scattering undergrowth. The $\frac{1}{4}$ sec. cor. of sec. 31, T. 27 N., R. 2 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36, marked on brass cap

$\frac{1}{4}$ |
 S36 |
 1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

- 67.50 The cor. of secs. 30 and 31, T. 27 N., R. 2 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25 and 36, marked on brass cap

T27N |
 R3W |
 S25 |
 S36 |
 1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist. Land, rolling.

Soil, sandy loam, mixed with rocks, gravelly surface, 2nd rate.

No timber

Undergrowth, sage and rabbit brush.

- 27.50 North on E. bdy. of sec. 25. Over rolling land, through scattering undergrowth. The $\frac{1}{4}$ sec. cor. of sec. 30, T. 27 N., R. 2 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54.

East Boundary of T. 27 N., R. 3 W.

3.

Chains.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 25, marked on brass cap

$\frac{1}{4}$
S25

1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

67.50 The cor. of secs. 19 and 30, T. 27 N., R. 2 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54.

70.86 Road, brs. E. to Grand Canyon and W. to Ash Fork.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 24 and 25, marked on brass cap

T27N
R3W
S24
S25

1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist. Land, rolling.

Soil, sandy loam, mixed with rocks, gravelly surface, 2nd rate.

No timber.

Undergrowth, sage and rabbit brush.

Fair grass.

15.00 North on E. bdy. of sec. 24. Over nearly level land, through scattering undergrowth. Asc. S. slope, 120 ft.

27.50 The $\frac{1}{4}$ sec. cor. of sec. 19, T. 27 N., R. 2 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor. of sec. 24, marked on brass cap

$\frac{1}{4}$
S24

1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

51.00 Top of ascent. Thence over rolling land.

67.50 The cor. of secs. 18 and 19, T. 27 N., R. 2 W., which is an iron post, properly set, marked and witnessed as described in the field notes of current Group No. 54.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13 and 24, marked on brass cap

T27N
R3W
S13
S24

1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist. Land, rolling.

Soil, sandy loam, gravelly surface, 18 ins. deep, with

4.

East Boundary of T. 27 N., R. 3 W.

Chains.

limestone subsoil, 2nd rate.
 No timber.
 Undergrowth, sage and rabbit brush.
 Fair grass.

27.50 North on E. bdy. of sec. 13.
 Over rolling land, through scattering undergrowth.
 The $\frac{1}{4}$ sec. cor. of sec. 18, T. 27 N., R. 2 W., which is an
 iron post, properly set, marked and witnessed as de-
 scribed in the field notes of current Group No. 54.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the
 ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec.
 cor. of sec. 13, marked on brass cap.

$\frac{1}{4}$
 S13

1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.

67.50 The cor. of secs. 7 and 18, T. 27 N., R. 2 W., which is an
 iron post, properly set, marked and witnessed as de-
 scribed in the field notes of current Group No. 54.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 12 and 13, marked on brass cap

T27N
 R3W
 S12
 S13

1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist.
 Land, rolling.

Soil, sandy loam, gravelly surface, 18 ins. deep, on sub-
 soil of limestone, 2nd rate.

No timber.
 Undergrowth, sage and rabbit brush.
 Fair grass.

27.50 North on E. bdy. of sec. 12.
 Over rolling land, through scattering undergrowth.
 The $\frac{1}{4}$ sec. cor. of sec. 7, T. 27 N., R. 2 W., which is an
 iron post, properly set, marked and witnessed as de-
 scribed in the field notes of current Group No. 54.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor. of sec. 12, marked on brass cap

$\frac{1}{4}$
 S12

1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.

69.38 The original cor. of secs. 1, 6, 7 and 12, which is a lime-
 stone, 10 X 8 X 8 ins. above ground, firmly set, marked
 and witnessed as described by the Surveyor-General.

Land, rolling.

Soil, sandy loam, gravelly surface, 18 ins. deep, caliche
 subsoil, 2nd rate.

No timber. Undergrowth, sage and rabbit brush.
 Fair grass.

Resurvey of N. bdy. of secs. 1, 2, 11, 10, 9, 8, 7. 5

Chains

From the cor. of secs. 1, 6, 7 and 12, hereinbefore described,

S. 89° 45' W. on N. bdy. of sec. 12.

Over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 12
1916

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.

40.28 The original 1/4 sec. cor., which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General

Thence continue measurement

S. 89° 52' W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11 and 12, mkd. on brass cap

T27N R 3W
S11|S12

1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist. Land, rolling.

Soil, sandy loam, gravelly surface, 2nd rate.

No timber.

Undergrowth, sage and rabbit brush.

Fair grass.

S. 89° 52' W. on N. bdy. of sec. 11.

Over rolling land.

.42 The original cor. of secs. 1, 2, 11 and 12, which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.

Redig pits, 24 X 24 X 12 ins., NE. and NW. of cor., 6 ft. dist.,

Thence continue measurement

S. 89° 59' W.

40.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 11
1916

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.

40.57 The original 1/4 sec. cor., which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.

Thence continue measurement

N. 89° 57' W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10 and 11, mkd. on brass cap

T27N R 3W
S10|S11

1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist. Land, rolling.

Soil, sandy loam, gravelly surface, 2nd rate.

No timber.

Undergrowth, sagebrush.

Fair grass.

6 Resurvey of N. bdy. of secs. 10, 11, 10, 9, 8 & 7.

Chains

N. 89° 57' W. on N. bdy. of sec. 10.
Over rolling land.

.78 The original cor. of secs. 2, 3, 10 and 11, which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.
Redig pits, 24 X 24 X 12 ins., NE. and NW. of cor., 6 ft. dist.
Thence continue measurement
S. 89° 58' W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 10
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

40.91 The original $\frac{1}{4}$ sec. cor., which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.
Thence continue measurement
S. 89° 51' W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 9 and 10, mkd. on brass cap
T27N R 3W

S 9 | S 10
1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

S. 89° 51' W. on N. bdy. of sec. 9.
Over rolling land.

1.10 The original cor. of secs, 3, 4, 9 and 10, which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.
Change mound of stone, from W. to N. of stone.
Thence continue measurement
S. 89° 49' W.

25.70 Road brs. N. to Grand Canyon and S. to Ash Fork.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 9
1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

41.25 The original $\frac{1}{4}$ sec. cor., which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.
Thence continue measurement
S. 89° 51' W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 8 and 9, mkd. on brass cap
T27N R 3W

S 8 | S 9
1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist.

Resurvey of N. bds. of secs. 12, 11, 10, 9, 8, 7, 7

Chains

Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

S. 89° 51' W. on N. bdy. of sec. 8.
Over rolling land.
1.66 The original cor. of secs. 4, 5, 8 and 9, which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.
Redig pits, 24 X 24 X 12 ins., NE. and NW. of stone, 6 ft. dist, and destroy mound of earth.
Thence continue measurement
N. 89° 56' W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 8
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.
41.82 The original $\frac{1}{4}$ sec. cor., which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.
Thence continue measurement
S. 89° 51' W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7 and 8, mkd. on brass cap

T27N R 3W
S 7 | S 8
1916

dig pits, 24 X 24 X 12 ins., in each sec., 6 ft. dist.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sage brush.
Fair grass.

S. 89° 51' W. on N. bdy. of sec. 7.
Over rolling land.
1.40 The original cor. of secs. 5, 6, 7 and 8, which is a limestone, properly set, mkd and witnessed as described by the Surveyor General.
Thence continue measurement
N. 89° 55' W.
10.00 Through scattering cedar.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 7
1916

from which,
A cedar, 14 ins. diam., brs. S. 26° E.
554 lks. dist. mkd. $\frac{1}{4}$ S 7 B T.
A cedar, 5 ins. diam., brs. S. 26° W.
349 lks. dist. mkd. $\frac{1}{4}$ S 7 B T.
41.54 The original $\frac{1}{4}$ sec. cor., which is a limestone, properly set, mkd. and witnessed as described by the Surveyor General.

8 Resurvey of N. bdy. of secs. 1, 6, 7, 12, 11, 10, 9, 8, 7.

Chains

Thence continue measurement
 N. 89° 58' W.
 Leave scattering cedar.
 The original cor. of secs. 1, 6, 7 and 12, W. bdy. of Tp.,
 which is a limestone, properly set, mkd. and witnessed
 as described by the Surveyor General.
 Land, rolling. Soil, 2nd rate. Timber, scattering cedar.
 Undergrowth, sagebrush. Fair grass.

50.00
80.51

Unsurveyed portion of
West Bdy. of T. 27 N., R. 3 W.

From the cor. of secs. 1, 6, 7 and 12, which is a lime-
 stone, hereinbefore described,
 South on a random line, setting temp. $\frac{1}{4}$ sec. and sec.
 cors. at intervals of 40 and 80 chs. and at 3 miles,
 69.52 chs. intersect N. bdy. of T. 26 N., R. 4 W.,
 8.52 chs. West 50' of the cor. of Ts. 26 N., Rs.
 3 and 4 W., as established by Heber P. Purington, and
 described in Book "A".
 At the point of intersection
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for closing cor. of Ts. 27 N., Rs. 3 and 4
 W., mkd. on brass cap

C C
 T27N
 R 4W R 3W
 S36 | S31
 1916

40.00

Thence
 North bet. secs. 31 and 36.
 Over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the
 ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd.
 on brass cap

$\frac{1}{4}$
 S36 | S31
 1916

80.00

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 25, 30, 31 and 36, mkd. on
 brass cap

T27N
 R 4W R 3W
 S25 | S30
 S36 | S31
 1916

dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

Unsurveyed portion of west half of T. 27 N. R. 3 W. 9

Chains
 North bet. secs. 25 and 30.
 Over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S25 | S30
 1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, mkd. on brass cap

T27N
 R 4W R 3W
 S24 | S19
 S25 | S30
 1916

dig pits, 18 X 18 X 12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist.
 Land, rolling.
 Soil, sandy loam, mixed with rocks, 3rd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

North bet. secs. 19 and 24.
 Over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S24 | S19
 1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, mkd. on brass cap

T27N
 R 4W R 3W
 S13 | S18
 S24 | S19
 1916

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, rocky, 3rd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

North bet. secs. 13 and 18.
 Over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S13 | S18
 1916

10. Unsurveyed portion of west bdy. of T. 27 N., R. 3 W.

Chains

80.00 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, mkd. on brass cap

T27N
R 4W R 3W
S12 | S 7
S13 | S18
1916

dig pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.
Land, rolling.
Soil, rocky, 3rd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

30.00 North bet. secs. 7 and 12.
Over rolling land.
Draw, 200 lks. wide, course SE. Asc. rolling S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4
S12 | S 7
1916

69.52 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.
The cor. of secs. 1, 6, 7 and 12, hereinbefore described.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

Portion of S. bdy. of sec. 31, T. 27 N., R. 3 W.

8.52 From the cor. of Ts. 26 N., Rs. 3 and 4 W., described in book "A",
West along S. bdy. of sec. 31.
Over rolling land.
The closing cor. of Ts. 27 N., Rs. 3 and 4 W. hereinbefore described.
Land, rolling.
Soil, rocky, 3rd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.
Note: For complete N. bdy. of sec. 1, T. 26 N., R. 4 W., see book "C".

Subdivision of portion of T. 27 N. R. 3 W. 11

Chains

From the cor. of secs. 35 and 36, described in book "A",
N. 0° 1' W. bet. secs. 35 and 36.

Over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S35 | S36
1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 25, 26, 35 and 36, mkd. on
brass cap

T27N R 3W
S26 | S25
S35 | S36
1916

dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.
Land, rolling.

Soil, sandy loam, mixed with rocks, gravelly surface,
2nd rate.

No timber.

Undergrowth, sagebrush.

Fair grass.

East on a random line bet. secs. 25 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.98 Intersect E. bdy. of Tp., 14 lks. S. of cor. of secs.
25 and 36, hereinbefore described.

Thence

S. 89° 54' W. on a true line bet. secs. 25 and 36.

Over rolling land.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 25
S 36
1916

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
dist.

79.98 The cor. of secs. 25, 26, 35 and 36.

Land, rolling.

Soil, sandy loam, mixed with rocks, gravelly surface, 2nd
rate.

No timber.

Undergrowth, sage and rabbit brush.

Fair grass.

N. 0° 1' W. bet. secs. 25 and 26.

Over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S26 | S25
1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
dist.

12. Completion of subdivision of T. 27 N., R. 3 W.

Chains 80.00	<p>Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, mkd. on brass cap</p> <p style="text-align: center;">T27N R 3W S23 S24 S26 S25 1916</p> <p>dig pits, 18 X 18 X 12 ins., in each sec., 5½ ft. dist. Land, rolling. Soil, sandy loam, gravelly surface, 2nd rate. No timber. Sage and rabbit brush. Fair grass.</p>
40.00 79.96	<p>East on a random line bet. secs. 24 and 25. Set temp. ¼ sec. cor. Intersect E. bdy. of Tp., 7 lks. S. of cor. of secs. 24 and 25, hereinbefore described. Thence S. 89° 57' W. on a true line bet. secs. 24 and 25. Over rolling land.</p>
39.98	<p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., mkd. on brass cap</p> <p style="text-align: center;">¼ S 24 ¼ S 25 1916</p> <p>dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.</p>
42.00 79.96	<p>Road brs. NW. and SE. The cor. of secs. 23, 24, 25 and 26. Land, nearly level. Soil, sandy loam, gravelly surface, 2nd rate. No timber. Good grass.</p>
7.60 40.00	<p>N.0°1'W., bet. secs. 23 and 24. Over nearly level land. Road brs. E. and W. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., mkd. on brass cap</p> <p style="text-align: center;">¼ S23 S24 1916</p> <p>dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.</p>
80.00	<p>Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, mkd. on brass cap</p> <p style="text-align: center;">T27N R 3W S14 S13 S23 S24 1916</p> <p>dig pits, 18 X 18 X 12 ins., in each sec., 5½ ft. dist. Land, gently rolling. Soil, sandy loam, gravelly surface, 2nd rate. No timber. Undergrowth, sage and rabbit brush. Fair grass.</p>

Completion of subdivision of T. 27 N., R. 3 W. 13

Chains
 40.00 East on a random line bet. secs. 13 and 24.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect E. bdy. of Tp., 7 lks. S. of cor. of secs. 13 and 24, hereinbefore described.
 Thence
 S. $89^{\circ} 57'$ W. on a true line bet. secs. 13 and 24.
 Over rolling land.
 30.00 Desc. SW. slope, 60 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 13
 S 24
 1916

dig pits, 18 X 18 X 12 ins. E. and W. of post, 3 ft. dist.
 65.00 Foot of descent. Thence over nearly level land.
 80.00 The cor. of secs. 13, 14, 23 and 24.
 Land, rolling and level.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sage and rabbit brush.
 Fair grass.

N. $0^{\circ} 1'$ W. bet. secs. 13 and 14.
 Over nearly level land.
 10.00 Asc. SW. slope, 80 ft. to
 35.00 Top of slope, thence over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S14 | S13
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, mkd. on brass cap

T27N R 3W
 S11 | S12
 S14 | S13
 1916

dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.
 Land, rolling.
 Soil, rocky, 4th rate except N. and S. 10 chs. which is sandy loam, 1st rate.
 No timber.
 Undergrowth, sage and rabbit brush.
 Fair grass.

40.00 East on a random line bet. secs. 12 and 13.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect E. bdy. of Tp., 12 lks. S. of cor. of secs. 12, and 13, hereinbefore described.
 Thence
 S. $89^{\circ} 55'$ W. on a true line bet. secs. 12 and 13.
 Over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

14 . Completion of subdivision of T. 27 N., R. 3 W.

Chains

$\frac{1}{4}$ S 12
 $\frac{1}{4}$ S 13
1916

80.00 dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.
The cor. of secs. 11, 12, 13 and 14.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

40.00 N. 0° 1' W. on a random line bet. secs. 11 and 12.
Set temp. $\frac{1}{4}$ sec. cor.

69.20 Intersect E. and W. line, 4 lks. E. of the cor. of secs. 11 and 12, hereinbefore described.

Thence
S. 0° 3' E. on a true line bet. secs. 11 and 12.
Over rolling land.

29.20 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S11 | S12
1916

69.20 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.
The cor. of secs. 11, 12, 13 and 14.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sage and rabbit brush.
Fair grass.

From the cor. of secs. 34 and 35, S. bdy. Tp., described in book "A",
N. 0° 1' W. bet. secs. 34 and 35.
Over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S34 | S35
1916

80.00 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, mkd. on brass cap

T27N R 3W
S27 | S26
S34 | S35
1916

dig pits, 18 X 18 X 12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

Completion of subdivision of T. 27 N. R. 3 W. 15

Chains
 40.00 East on a random line bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line, 10 lks. S. of cor. of secs.
 25, 26, 35 and 36.
 Thence
 S. $89^{\circ} 56'$ W. on a true line bet. secs. 26 and 35.
 Over rolling land.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} S 26 \\ \frac{1}{4} S 35 \\ \hline 1916 \end{array}$$

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
 dist.
 80.06 The cor. of secs. 26, 27, 34 and 35.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

40.00 N. $0^{\circ} 1'$ W. bet. secs. 26 and 27.
 Over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} \\ S27 | S26 \\ \hline 1916 \end{array}$$

80.00 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 22, 23, 26 and 27, mkd. on
 brass cap

$$\begin{array}{r} T27N R 3W \\ S22 | S23 \\ S27 | S26 \\ \hline 1916 \end{array}$$

dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sage and rabbit brush.
 Fair grass.

40.00 East on a random line bet. secs. 23 and 26.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.12 Intersect N. and S. line, 16 lks. S. of cor. of secs.
 23, 24, 25 and 26.
 Thence
 S. $89^{\circ} 53'$ W. on a true line bet. secs. 23 and 26.
 Over rolling land.
 40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} S 23 \\ \frac{1}{4} S 26 \\ \hline 1916 \end{array}$$


dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
 dist.

16 Completion of subdivision of T. 27 N. R. 3 W.


Chains

80.12 The cor. of secs. 22, 23, 26 and 27.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sage and rabbit brush.
Fair grass.

20.35 N. 0° 1' W. bet secs. 22 and 23.
Over rolling land.
Road brs. E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., mkd. on brass cap




80.00 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
dist.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 14, 15, 22 and 23, mkd. on
brass cap



dig pits, 18 X 18 X 12 ins., in each sec., 5 1/2 ft. dist.
From this cor. well drilling derrick brs. N. 40° 52' W.
Land, rolling.
Soil, sandy loam, gravelly surface, and rate.
No timber.
Undergrowth, sagebrush.
Fair grass.


40.00 East on a random line bet. secs. 14 and 23.
Set temp. 1/4 sec. cor.
80.12 Intersect N. and S. line, 14 lks. S. of cor. of secs.
13, 14, 23 and 24.

Thence
S. 89° 54' W. on a true line bet. secs. 14 and 23.
40.06 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., mkd. on brass cap



80.12 dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
dist.
The cor. of secs. 14, 15, 22 and 23.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

40.00 N. 0° 1' W. bet. secs. 14 and 15.
Over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., mkd. on brass cap



Completion of subdivision of T. 27 N. R. 3 W. 17

Chains
 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.
 48.10 Well drill derrick brs. S. 23° 45' W.
 65.00 Asc. S. slope, 52 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, mkd. on brass cap

T27N R 3W
 S10|S11
 S15|S14
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

40.00 East on a random line bet. secs. 11 and 14.
 Set temp. ¼ sec. cor.
 80.14 Intersect N. and S. line, 16 lks. S. of cor. of secs. 11, 12, 13 and 14.

Thence
 S. 89° 53' W. on a true line bet. secs. 11 and 14.
 Over rolling land.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for ¼ sec. cor., mkd. on brass cap

¼ S 11
 S 14
 1916

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

55.00 Desc. gentle W. slope, 40 ft. to
 70.00 Asc. gentle SE. slope, 15 ft. to
 80.14 The cor. of secs. 10, 11, 14 and 15.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

40.00 N. 0° 1' W. on a random line bet. secs 10 and 11.
 Set temp. ¼ sec. cor.
 69.44 Intersect E. and W. line, 18 lks. W. of cor. of secs. 10 and 11, hereinbefore described.

Thence
 S. 0° 8' W. on a true line bet. secs. 10 and 11.
 Over rolling land.

29.44 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., mkd. on brass cap

¼
 S10|S11
 1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft dist.

60.00 Desc. gentle slope, 23 ft. to
 69.44 The cor. of secs. 10, 11, 14 and 15.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.

18 Completion of subdivision of T. 27 N., R. 3 W.

Chains

No timber.
Undergrowth, sagebrush.
Fair grass..

From the cor. of secs. 33 and 34, S. bdy. of Tp., described in book "A",

N. 0° 2' W. bet. secs. 33 and 34.

Along E. slope, through dense cedar timber and brush, gradually descending.

- 8.99 Wash, 20 lks. wide, course E.
- 16.95 Wash, 10 lks. wide, course SE. 69 ft. below sec. cor.
- Asc. 34 ft. to
- 19.86 Spur slopes E. Desc. 87 ft. to road.
- 25.86 Wash, 10 lks. wide, course E.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{c} \frac{1}{4} \\ \hline S33 | S34 \\ \hline 1916 \end{array}$$

from which,

A cedar, 24 ins. diam., brs. S. 19° E.
39 lks. dist. mkd. $\frac{1}{4}$ S 34 B T.

A cedar, 10 ins. diam., brs. S. 73° W.
18 lks. dist. mkd. $\frac{1}{4}$ S 33 B T.

- 48.25 Road brs. E. and W. in center of draw 5 chs. wide, course E.
- Asc. 330 ft to
- 80.00 Top of ascent.
- Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 27, 28, 33 and 34, mkd. on brass cap

$$\begin{array}{c} T27N R 3W \\ \hline S28 | S27 \\ \hline S33 | S34 \\ \hline 1916 \end{array}$$

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and mountainous.

Soil, rocky 4th rate, across draw, sandy loam, 1st rate.

Timber, cedar.

Undergrowth, cedar.

- 40.00 East on a random line bet. secs. 27 and 34.
- 79.98 Set. temp. $\frac{1}{4}$ sec. cor.
- Intersect N. and S. line, 4 lks. S. of cor. of secs. 26, 27, 34 and 35.

Thence

S. 89° 58' W. on a true line bet. secs. 27 and 35.

Over rolling land.

- 29.30 Road brs. N. and S.
- 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{c} \frac{1}{4} S 27 \\ \hline \frac{1}{4} S 34 \\ \hline 1916 \end{array}$$

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.

- 44.00 Asc. rough E. slope, 379 ft. to
- 67.70 Top of ascent. Thence over rolling mesa.
- 79.98 The cor. of secs. 27, 28, 33 and 34.

Completion of subdivision of T. 27 N., R. 3 W. 19

Chains

Land, rolling mountainous.
Soil, E. 1/4 mile, sandy loam, gravelly surface, 2nd rate;
remainder, rocky, 4th rate.
No timber.
Undergrowth, scattering sagebrush.
Fair grass in E. portion and on top of mesa.

26.40 N. 0° 2' W. bet. secs. 27 and 28.
Over rolling mesa.
Desc. steep N. slope, through dense timber and brush, 299
ft. to
37.82 Wash, 20 lks. wide, course NE. Thence along SE. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
ground, in a mound of stone, for 1/4 sec. cor., mkd. on
brass cap

S28 | S27
1916

from which,
A cedar, 8 ins. diam., brs. N. 62° E.
186 lks. dist. mkd. 1/4 S 27 B T.
A cedar, 5 ins. diam., brs. S. 44° W.
209 lks. dist. mkd. 1/4 S 28 B T.

45.00 Spur slopes NE. Desc. 132 ft. to
60.00 Foot of descent. Thence over rolling land.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 21, 22, 27 and 28, mkd.
on brass cap.

T27N R 3W
S21 | S22
S28 | S27
1916

dig pits, 18 X 18 X 12 ins, in each sec., 5 1/2 ft. dist.
Land, rolling and mountainous.
Soil, sandy loam, gravelly surface, 2nd rate, except on
N. slope, which is rocky, 4th rate.
Timber, cedar and pinion.
Undergrowth, cedar.
Fair grass on mesa and from 60 to 80 chs.

40.00 East on a random line bet. secs. 22 and 27.
79.96 Set temp. 1/4 sec. cor.
Intersect N. and S. line, 4 lks. S. of cor. of secs. 22,
23, 26 and 27.
Thence
S. 89° 58' W. on a true line bet. secs. 22 and 27.
Over rolling land.
37.20 Road brs. N. and S.
39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for 1/4 sec. cor., mkd. on brass cap.

1/4 S 22
1/4 S 27
1916

79.96 dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
dist.
The cor. of secs. 21, 22, 27 and 28.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sage and rabbit brush.
Fair grass.

20 Completion of subdivision of T. 27 N., R. 3 W.

Chains

N. 0° 2' W. bet. secs. 21 and 22.

Over rolling land.

18.15

Road brs. E. and W.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4
S21 | S22
1916

dig pits, 18 X 18 X 12 ins., N. and S. of cor., 3 ft. dist.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs, 15, 16, 21 and 22, mkd. on brass cap

T27N R 3W
S16 | S15
S21 | S22
1916

dig pits, 18 X 18 X 12 ins., in each sec. 5 1/2 ft. dist. Land, rolling.

Soil, sandy loam, gravelly surface, 2nd rate.

No timber.

Undergrowth, sage and rabbit brush.

Fair grass.

40.00

East on a random line bet. secs. 15 and 22.

Set temp. 1/4 sec. cor.

80.02

Intersect N. and S. line, 4 lks. S. of cor. of secs. 14, 15, 22 and 23.

Thence

S. 89° 58' W. on a true line bet. secs. 15 and 22.

Over rolling land.

40.01

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 15
1/4 S 22
1916

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.

62.75

Road brs. NW. and SE.

80.02

The cor. of secs. 15, 16, 21 and 22.

Land, rolling.

Soil, sandy loam, gravelly surface, 2nd rate.

No timber.

Undergrowth, sage and rabbit brush.

Fair grass.

N. 0° 2' W. bet. secs. 15 and 16.

Over rolling land.

23.70

Road brs. NE. and SW.

33.70

Road, brs. NW. and SE.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4
S16 | S15
1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

Completion of subdivision of T. 27 N., R. 3 W. 21

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, in a mound of stone, for cor. of secs. 9, 10, 15 and 16, mkd. on brass cap.

T27N R 3W
S 9 | S10
S16 | S15
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

40.00

East on a random line bet. secs. 10 and 15.

80.10

Set temp. 1/4 sec. cor.
Intersect N. and S. line, 7 lks. S. of cor. of secs. 10, 11, 14 and 15.

Thence
S. 89° 57' W. on a true line bet. secs. 10 and 15.
Over gently rolling S. slope.

40.05

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

1/4 S 10
S 15
1916

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

42.00

Wash, 5 lks. wide, course S.

77.80

Wash, 20 lks. wide, course S.

80.10

The cor. of secs. 9, 10, 15 and 16.

Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

40.00

N. 0° 2' W. on a random line bet. secs. 9 and 10.

69.41

Set temp. 1/4 sec. cor.
Intersect E. and W. line, 28 lks. W. of cor. of secs. 9 and 10, hereinbefore described.

Thence
S. 0° 12' W. on a true line bet. secs. 9 and 10.
Over rolling land.

17.50

Desc. gradually along rolling W. side of draw.

29.41

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4
S 9 | S10
1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

69.41

The cor. of secs. 9, 10, 15 and 16, 77 ft. below 17.50 ch. point.

Land, rolling.
Soil, sandy loam, 2nd rate.
No timber.
Fair grass.

22

Completion of subdivision of T. 27 N., R. 3 W.

Chains

	From the cor. of secs. 32 and 33, S. bdy. of Tp., described in book "A", N. $0^{\circ} 3' W.$ bet. secs. 32 and 33. Over rolling mesa, through scattering timber.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap
	$\begin{array}{c} \frac{1}{4} \\ S32 S33 \\ 1916 \end{array}$
	from which, A cedar, 10 ins. diam., brs. S. $87\frac{3}{4}^{\circ} E.$ 96 lks. dist. mkd. $\frac{1}{4} S 33 B T.$ A cedar, 10 ins. diam., brs. S. $58\frac{1}{2}^{\circ} W.$ 75 lks. dist. mkd. $\frac{1}{4} S 32 B T.$
45.00	N. edge of mesa. Desc. NW. slope, rough and broken, through dense timber and undergrowth, 430 ft. to sec. cor.
69.52	Wash, 20 lks. wide, course NW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 28, 29, 32 and 33, mkd. on brass cap
	$\begin{array}{c} T27N R 3W \\ S29 S28 \\ S32 S33 \\ 1916 \end{array}$
	from which, A cedar, 10 ins. diam., brs. N. $34^{\circ} E.$ 46 lks. dist. mkd. T. 27 N R 3 W S 28 B T. A pinion, 10 ins. diam., brs. S. $38^{\circ} E.$ 61 lks. dist. mkd. T 27 N R 3 W S 33 B T. A pinion, 10 ins. diam., brs. S. $38^{\circ} W.$ 67 lks. dist. mkd. T 27 N R 3 W S 32 B T. A pinion, 10 ins. diam., brs. N. $51^{\circ} W.$ 100 lks. dist., marked T27N R3W S29 BT. Soil, on top of mesa, sandy loam, 2nd rate, remainder, rocky, 4th rate. Timber, cedar and pinion. Undergrowth, cedar. Land, rolling and mountainous. Fair grass on top of mesa.
	East on a random line bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.,
79.98	Intersect. N. and S. line, 5 lks. S. of the cor. of secs. 27, 28, 33 and 34.
	Thence S. $89^{\circ} 58' W.$ on a true line bet. secs. 28 and 33. Desc. SW. slope from edge of mesa, 74 ft. to
9.90	Wash, 10 lks. wide, course S. Asc. SE. slope, through dense timber, 91 ft. to
19.75	Rim of mesa; thence over rolling mesa to
34.00	Rim of mesa, desc. 57 ft. to
39.00	Wash, 20 lks. wide, course N. Asc. 64 ft.
39.99	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap
	$\begin{array}{c} \frac{1}{4} S 28 \\ S 33 \\ 1916 \end{array}$
	from which, A pinion, 10 ins. diam., brs. N. $39^{\circ} E.$ 32 lks. dist. mkd. $\frac{1}{4} S 28 B T.$ A cedar, 12 ins. diam., brs. S. $48\frac{1}{2}^{\circ} E.$ 54 lks. dist. mkd. $\frac{1}{4} S 33 B T.$
41.50	Top of ascent. Spur slopes N. Thence along N. slope, gradually descending.

Completion of subdivision of T. 27 N., R. 3 W. 23


Chains

61.30 Desc. 130 ft. to
 76.06 Desc. steep NW. slope, 252 ft. to
 79.99 Wash, 10 lks. wide, course N. Asc. NE. slope, 35 ft. to
 The cor. of secs. 28, 29, 32 and 33.
 Land, mountainous and rough.
 Soil, rocky, 4th rate.
 Timber, cedar and pinion.
 Undergrowth, cedar.

13.50 N. 0° 3' W. bet. secs. 28 and 29.
 Desc. rough N. slope, through dense timber and brush, 166
 ft. to
 Leave timber and brush, brs. NE. and SW.
 Thence over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap




80.00 dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 20, 21, 28 and 29, mkd. on
 brass cap



dig pits, 18 X 18 X 12 ins., in each sec., $5\frac{1}{2}$ ft. dist.
 Land, mountainous, and rolling.
 Soil, sandy loam, gravelly surface, 2nd rate, except on
 slopes, which is rocky, 4th rate.
 Timber, cedar and pinion.
 Undergrowth, cedar and sagebrush.
 Fair grass except on slopes.

40.00 East on a random line, bet. secs. 21 and 28.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. and S. line, 2 lks. S. of cor. of secs. 21,
 22, 27 and 28.

Thence
 S. 89° 59' W. on a true line bet. secs. 21 and 28.
 Over rolling land.
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



79.98 dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
 dist.
 The cor. of secs. 20, 21, 28 and 29.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sage and rabbit brush.
 Fair grass.

Chains
40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S17 | S16
1916

from which,

A cedar, 10 ins. diam., brs. N. $61\frac{1}{2}^{\circ}$ E.
380 lks. dist. mkd. $\frac{3}{4}$ S 16 B T.

A cedar, 5 ins. diam., brs. S. 25° W.
250 lks. dist. mkd. $\frac{1}{4}$ S 17 B T.

Thence along E. slope of draw.

53.00

Draw, 4 chs. wide, course SE. Asc. along W. slope.

77.80

Draw, 2 chs. wide, course SW. Asc. to .

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 8, 9, 16 and 17, mkd. on brass cap

T27 N R 3W
S 8 | S 9
S17 | S16
1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, level and rolling.

Soil, sandy loam, gravelly surface, 3rd rate.

Timber, a few scattering cedars near $\frac{1}{4}$ sec. cor.

Undergrowth, sagebrush.

Fair grass.

40.00

East on a random line bet. secs. 9 and 16.

79:96

Set temp. $\frac{1}{4}$ sec. cor.

Intersect N. and S. line, 12 lks. S. of cor. of secs. 9, 10, 15 and 16.

Thence

S. $89^{\circ} 55'$ W. on a true line bet. secs. 9 and 16.

Over gentle rolling S. slope.

25.00

Wash, 10 lks. wide, course SE.

25.30

Road brs. NW. and SE.

39.98

Set an iron post, 3 ft. long, 12 ins. in the ground, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 9
S 16
1916

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.

44.00

Draw, 200 lks. wide, course S.

78.30

Draw, 200 lks. wide, course SW.

79.96

The cor. of secs. 8, 9, 16 and 17.

Land, rolling along S. slope.

Soil, sandy loam, gravelly surface, 3rd rate.

No timber.

Undergrowth, sagebrush.

Fair grass.

40.00

N. $0^{\circ} 3'$ W. on a random line bet. secs. 8 and 9.

69.28

Set temp. $\frac{1}{4}$ sec. cor.,

Intersect E. and W. line, 14 lks. W. of cor. of secs. 8 and 9, hereinbefore described.

Thence

S. $0^{\circ} 4'$ W. on a true line bet. secs. 8 and 9.

Over rolling land.

26 . . . Completion of subdivision of T. 27 N., R. 3 W.

Chains
29.28

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S 8 | S 9
1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

64.00
69.28

Desc. to
The cor. of secs. 8, 9, 16 and 17.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Undergrowth, sagebrush.
Fair grass.

From the cor. of secs. 31 and 32, S. bdy. of Tp., described in book "A",
N. 0° 3' W. bet. secs. 31 and 32.
Over rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
S31 | S32
1916

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

58.25
80.00

Road brs. NE. and SW.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, mkd. on brass cap.

T27N R 3W
S30 | S29
S31 | S32
1916

dig pits, 18 X 18 X 12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist.
Land, rolling.
Soil, sandy loam, gravelly surface, 2nd rate.
No timber.
Sagebrush.
Fair grass.

40.00
80.06

East on a random line bet. secs. 29 and 32.
Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 16 lks. S. of cor. of secs. 28, 29, 32 and 33.

Thence
S. 89° 53' W. on a true line bet. secs. 29 and 32.
Desc. NW. slope, through dense timber and brush, 142 ft. to
Leave timber and brush brs. NE. and SW. Thence over rolling land.

10.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap


$\frac{1}{4}$ S 29
S 32
1916

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.

Completion of subdivision of T. 27 N. R. 3 W. 27

Chains
 68.50 Road brs. NE. and SW.
 80.06 The cor. of secs. 29, 30, 31 and 32.
 Land, rolling and mountainous.
 Soil, sandy loam, gravelly surface, 2nd rate, except from
 0 to 15 chs. rocky, 4th rate.
 Timber scattering and dense cedar and pinion.
 Undergrowth, cedar and sagebrush.
 Fair grass.


40.00 West on a random line bet. secs. 30 and 31.
 80.74 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect W. bdy. of Tp., 10 lks. N. of cor. of secs.
 25, 30, 31 and 36, hereinbefore described.
 Thence
 N. 89° 56' E. on a true line bet. secs. 30 and 31.
 Over rolling land.
 40.74 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist.


44.60 Wash, 20 lks. wide, course NE.
 80.74 The cor. of secs. 29, 30, 31 and 32.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd and 3rd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

40.00 N. 0° 3' W. bet. secs. 29 and 30.
 Over rolling land.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap



dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 19, 20, 29 and 30, mkd. on
 brass cap



dig pits, 18 X 18 X 12 ins., in each sec., 5 $\frac{1}{2}$ ft. dist.

Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.

40.00 East on a random line bet. secs. 20 and 29.
 80.04 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 16 lks. S. of cor. of secs.
 20, 21, 28 and 29.

Chains

Thence
 S. 89° 53' W. on a true line bet. secs. 20 and 29.
 Over rolling land.
 6.10 Wash, 10 lks. wide, course N.
 30.85 Road brs. NE. and SW.
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} \text{ S } 20 \\ \frac{1}{4} \text{ S } 29 \\ \hline 1916 \end{array}$$

dig pits, 18 X 18 X 12 ins., E. and W. of cor. 3 ft.
 dist.
 80.04 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

West on a random line bet. secs. 19 and 30.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.64 Intersect W. bdy. of Tp., 12 lks. N. of cor. of secs.
 19, 24, 25 and 30, hereinbefore described.

Thence
 N. 89° 55' W. on a true line bet. secs. 19 and 30.
 Over rolling land.
 20.60 Wash, 20 lks. wide, course N.
 40.64 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} \text{ S } 19 \\ \frac{1}{4} \text{ S } 30 \\ \hline 1916 \end{array}$$

dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft.
 dist.
 80.64 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling.
 Soil, sandy loam, gravelly surface, 2nd rate.
 No timber.
 Undergrowth, sagebrush.
 Fair grass.

N. 0° 3' W. bet. secs. 19 and 20.
 Over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{r} \frac{1}{4} \\ \text{S19} \uparrow \text{S20} \\ \hline 1916 \end{array}$$

dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft.
 dist.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs, 17, 18, 19 and 20, mkd. on
 brass cap

$$\begin{array}{r} \text{T27 N R 3W} \\ \text{S18} \mid \text{S17} \\ \text{S19} \mid \text{S20} \\ \hline 1916 \end{array}$$

Completion of subdivision of T. 27 N., R 3 W. 29

Chains	<p>dig pits, 18 X 18 X 12 ins , in each sec. 5½ ft. dist. Land, rolling. Soil, sandy loam, gravelly surface, 2nd rate. No timber. Undergrowth, sagebrush. Fair grass.</p>
40.00	East on a random line bet. secs. 17 and 20.
80.04	Set temp. ¼ sec. cor. Intersect N, and S. line, 12 lks. S. of cor. of secs. 16, 17, 20 and 21.
13.00	Thence S. 89° 55' W. on a true line bet. secs. 17 and 20. Over rolling land, nearly level.
20.00	Wire fence brs. NE. and SW.
40.02	Over rolling land. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., mkd. on brass cap
	$\frac{1}{4} \frac{S \ 17}{S \ 20}$ 1916
80.04	<p>dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist. The cor. of secs. 17, 18, 19 and 20. Land, rolling and level. Soil, sandy loam, gravelly surface, 2nd rate. No timber. Undergrowth, sagebrush. Fair grass.</p>
40.00	West on a random line bet. secs. 18 and 19.
80.52	Set temp. ¼ sec. cor. Intersect W. bdy. of Tp., 9 lks. N. of cor. of secs. 13, 18, 19 and 24, hereinbefore described.
.90	Thence N. 89° 56' E. on a true line bet. secs. 18 and 19. Over rolling land.
40.52	Wash, 25 lks. wide, course N. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., mkd. on brass cap
	$\frac{1}{4} \frac{S \ 18}{S \ 19}$ 1916
80.52	<p>dig pits, 18 X 18 X 12 ins., E. and W. of post, 3 ft. dist. The cor. of secs. 17, 18, 19 and 20. Land, rolling. Soil, sandy loam, gravelly surface, 2nd rate. No timber. Undergrowth, sagebrush. Fair grass.</p>
32.05	N. 0° 3' W. bet. secs. 17 and 18. Over rolling land. Draw, 300 lks. wide, course SE. Asc. gentle S. slope, through scattering timber 107 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., mkd. on brass cap

30 Completion of subdivision of T. 27 N., R. 3 W.

Chains

S18 | S17
1916

from which,

A cedar, 8 ins. diam., brs. N. 73 1/2° E.
174 lks. dist. mkd. 1/4 S 17 B T.

No other trees within limits.

Dig pits, 18 X 18 X 12 ins., N. and S. of post, 3 ft. dist.

55.00

Timber becomes dense.

64.00

Top of ascent. Thence along slight W. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in a mound of stone, for cor. of secs. 7, 8, 17 and 18, mkd. on brass cap

T27N R 3W
S 7 | S 8
S18 | S17
1916

from which,

A cedar, 8 ins. diam., brs. N. 33 1/4° E.
335 lks. dist. mkd. T 27 N R 3 W S 8 B T.

A cedar, 10 ins. diam., brs. S. 80 1/2° E.
38 lks. dist. mkd. T 27 N R 3 W S 17 B T.

A cedar, 10 ins. diam., brs. S. 56° W.
11 lks. dist. mkd. T 27 N R 3 W S 18 B T.

A cedar, 5 ins. diam., brs. N. 13 1/2° W.
112 lks. dist. mkd. T 27 N R 3 W S 7 B T.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, cedar.

Undergrowth, cedar and sagebrush.

Poor grass.

40.00

East on a random line bet. secs. 8 and 17.

80.04

Set temp. 1/4 sec. cor.

Intersect N. and S. line, 9 lks. S. of cor. of secs. 8, 9, 16 and 17.

Thence

S. 89° 56' W. on a true line bet. secs. 8 and 17.

Over gentle rolling S. slope, gradually ascending 46 ft. to 45 chs.

40.02

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

1/4 S 8
S 17
1916

from which,

A cedar, 6 ins. diam., brs. N. 81° W.
8 1/2 lks. dist. mkd. 1/4 S 8 B T.

A cedar, 10 ins. diam., brs. S. 3° E.
94 lks. dist. mkd. 1/4 S 17 B T.

45.00

Top of ascent; thence over rolling land.

65.00

Desc. gradual W. slope.

80.04

The cor. of secs, 7, 8, 17 and 18.

Land, rolling.

Soil, rocky and gravelly, 3rd and 4th rate.

Timber, cedar.

Undergrowth, sage and cedar brush.

Fair grass.

40.00

West on a random line bet. secs. 7 and 18.

Set temp. 1/4 sec. cor.

Completion of subdivision of T. 27 N. R. 3 W. 31

Chains
 80.37 Intersect W. bdy. of Tp., 12 lks. N. of cor. of secs. 7, 12, 13 and 18, hereinbefore described.
 Thence
 N. 89° 55' E. on a true line bet. secs. 7 and 18.
 Over rolling land.
 18.35 Draw, 200 lks. wide, course SW. Asc. gentle SW. slope.
 30.00 Through scattering cedar.
 40.37 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$ S 7
 S 18
 1916

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 51.25 Wash, 50 lks. wide, course SW.; thence along wash to
 54.40 Leave wash, course W., from NE. Timber becomes dense.
 80.37 The cor. of secs. 7, 8, 17 and 18.
 Land, rolling.
 Soil, rocky, 4th rate; W. 20 chs. sandy loam, gravelly surface, 2nd rate.
 Timber, cedar.
 Fair grass.

40.00 N. 0° 3' W. on a random line bet. secs. 7 and 8.
 Set temp. $\frac{1}{4}$ sec. cor.
 69.34 Intersect E. and W. line, 16 lks. W. of the cor. of secs. 7 and 8, hereinbefore described.
 Thence
 S. 0° 5' W. on a true line bet. secs. 7 and 8.
 Over rolling land, through scattering timber.
 24.30 Desc. S. slope 29 ft. to
 29.34 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

$\frac{1}{4}$
 S 7 | S 8
 1916

from which,
 A cedar, 10 ins diam., brs. N. 88 $\frac{1}{4}$ ° E.
 91 lks. dist. mkd. $\frac{1}{4}$ S 8 B T.
 A cedar, 12 ins. diam., brs. S. 52° W.
 245 lks. dist. mkd. $\frac{1}{4}$ S 7 B T.

32.60 Wash, 20 lks. wide, course SW. Thence along gentle W. slope.
 54.85 Wash, 25 lks. wide, course W.
 69.34 The cor. of secs. 7, 8, 17 and 18.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, cedar.
 Undergrowth, cedar and sagebrush.
 Poor grass.

32 General Description of T. 27 N., R. 3 W.

Chains

GENERAL DESCRIPTION

This township is rolling, except for the mesa in secs. 27, 28, 29, 32, 33 and 34. There is scattering cedar on top of the mesa, and on the slopes a dense growth of cedars and some pinion, except on the slopes in secs. 27 and 34. There is a grove of cedars in secs. 7, 8, 17 and 18. The rest of the township is devoid of timber and is covered with a scattering growth of sage brush.

There is a fair growth of grass in all parts of the townshp.

The soil is generally a sandy loam, with a gravelly surface, from 18 to 24 ins. deep, with caliche or limestone subsoil. On the slopes of the mesa the soil is rocky.

There are no settlers in the township and no natural water. There is a well in sec. 15 and a reservoir or tank in sec. 16.

--oOo--

Boundaries of Subdivided Portion of T. 27 N., R. 3 W.

Latitudes, departures and closing errors.

Line designated.	True bearing.	Dist. chs.	Latitudes.		Departures.	
			N. chs.	S. chs.	E. chs.	W. chs.
South Boundary	S. 89° 56' W West.	472.31 8.52		.54		472.31 8.52
West Boundary.	North.	389.52	389.52			
Subdivisional Boundary.	S. 89° 58' E.	38.97		.02	38.97	
	S. 89° 55' E.	40.14		.06	40.14	
	N. 89° 51' E.	39.58	.10		39.58	
	S. 89° 56' E.	40.16		.05	40.16	
	N. 89° 51' E.	40.41	.10		40.41	
	N. 89° 49' E.	40.15	.13		40.15	
	N. 89° 51' E.	40.19	.10		40.19	
	N. 89° 58' E.	40.13	.02		40.13	
	S. 89° 57' E.	40.21		.04	40.21	
	N. 89° 59' E.	40.15	.01		40.15	
	N. 89° 52' E.	40.14	.09		40.14	
N. 89° 45' E.	40.28	.17		40.28		
East Boundary.	South	389.38		389.38		
Convergency.					.42	
Totals			390.24	390.09	480.93	480.83
Error in latitude			.15			
Error in departure					.10	

Book "B"
Group 53 - - - - Arizona.
Township 27 North, Range 3 West.

DATE DIAGRAM.

PARCELS.						CAPACITY.					
6		5		4		3		2		1	
<i>RESURVEYED</i>											
11-14-16	11-6-16	11-16-16	11-6-16	11-13-16	11-6-16	11-11-16	11-6-16	11-8-16	11-6-16	11-8-16	11-6-16
11-24-16	7	11-16-16	8	11-13-16	9	11-11-16	10	11-8-16	11	11-8-16	12
11-24-16	11-24-16	11-16-16	11-16-16	11-13-16	11-13-16	11-11-16	11-11-16	11-8-16	11-8-16	11-8-16	11-8-16
11-24-16	18	11-16-16	17	11-13-16	16	11-11-16	15	11-8-16	14	11-8-16	13
11-16-16	11-16-16	11-16-16	11-16-16	11-13-16	11-11-16	11-9-16	11-9-16	11-8-16	11-7-16	11-7-16	11-4-16
11-15-16	19	11-15-16	20	11-11-16	21	11-9-16	22	11-7-16	23	11-4-16	24
11-15-16	11-15-16	11-15-16	11-15-16	11-11-16	11-11-16	11-9-16	11-9-16	11-7-16	11-7-16	11-4-16	11-4-16
11-14-16	30	11-15-16	29	11-11-16	28	11-9-16	27	11-7-16	26	11-4-16	25
11-15-16	11-15-16	11-15-16	11-15-16	11-11-16	11-10-16	11-9-16	11-9-16	11-7-16	11-7-16	11-4-16	11-4-16
11-14-16	31	11-15-16	32	11-10-16	33	11-9-16	34	11-7-16	35	11-4-16	36
10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16	10-31-16

Surveys and resurveys executed on dates shown on above diagram by John F. Hesse, U. S. Surveyor.

For names and duties of assistants to John F. Hesse, U. S. Surveyor, see Book "A".

CERTIFICATE OF UNITED STATES SURVEYOR.

I, John F. Hesse, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 53, Arizona, bearing date of the 4th day of March, 1915, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East, West, and South boundaries and Subdivision lines, and Resurveyed all those parts or portions of the Subdivision lines of TOWNSHIP 27 NORTH, RANGE 3 WEST, of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on reverse hereof} as having been executed by me, and under my direction; and that all the corners of said survey ^{and resurvey} have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 53, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey. ^{and resurvey.}

John F. Hesse
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, October 25, 1918.

The foregoing field notes of the survey of portions of the East, West, and South boundaries and Subdivision lines, and Resurvey of part of the Subdivision lines of TOWNSHIP 27 NORTH, RANGE 3 WEST, of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by John F. Hesse, U. S. Surveyor, under ~~his~~ special instructions dated March 4, 1915, for Group 53, Arizona, having been critically examined, ^{& resurveys} and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

James O. Smith
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in

, has been correctly copied from the original notes on file in this office.