

3174

Book "C"

4-679

Dist withheld from filing

orig 79

(1)

Commissioner of the General Land Office
Case - 1000 - 58 - 1000

FIELD NOTES

BOOK 3174

OF THE SURVEY OF THE

PART OF SOUTH BOUNDARY OF TOWNSHIP 2 SOUTH, RANGE 23 WEST,

SOUTH and EAST BDRS. and PART of the SUBDIVISION LINES

and the

MEANDERS OF LEFT BANK OF COLORADO RIVER, Tail of

TOWNSHIP 3 SOUTH, RANGE 23 WEST,

RESURVEY OF THE

WEST BOUNDARY, and

PART OF THE SUBDIVISION LINES OF TOWNSHIP 3 SOUTH, RANGE 23 WEST,

and

PART OF THE SOUTH BOUNDARY, OF TOWNSHIP 2, SOUTH, RANGE 23 WEST,

and

RETRACEMENT OF PART OF SOUTH BOUNDARY OF

TOWNSHIP 2 SOUTH, RANGE 23 WEST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

William B. Kimmel,

In the capacity of U. S. Surveyor, under instructions dated February 5, 1915,

issued by the United States Surveyor General to govern surveys included in

Group No. 47, which were approved by the Commissioner of the General Land

Office, February 23, 1915.

Surveyment,

Resurvey & Retracement commenced May 7, 1915

Surveyment,

Resurvey & Retracement completed June 18, 1915.

Executed under Assignment
Instructions dated Feb. 27, 1915.

3174

3174

80
11


3174
Book "C."

Group 47 - - Arizona.

BOOK 3174

See Appendix for Diagram.

INDEX DIAGRAM.

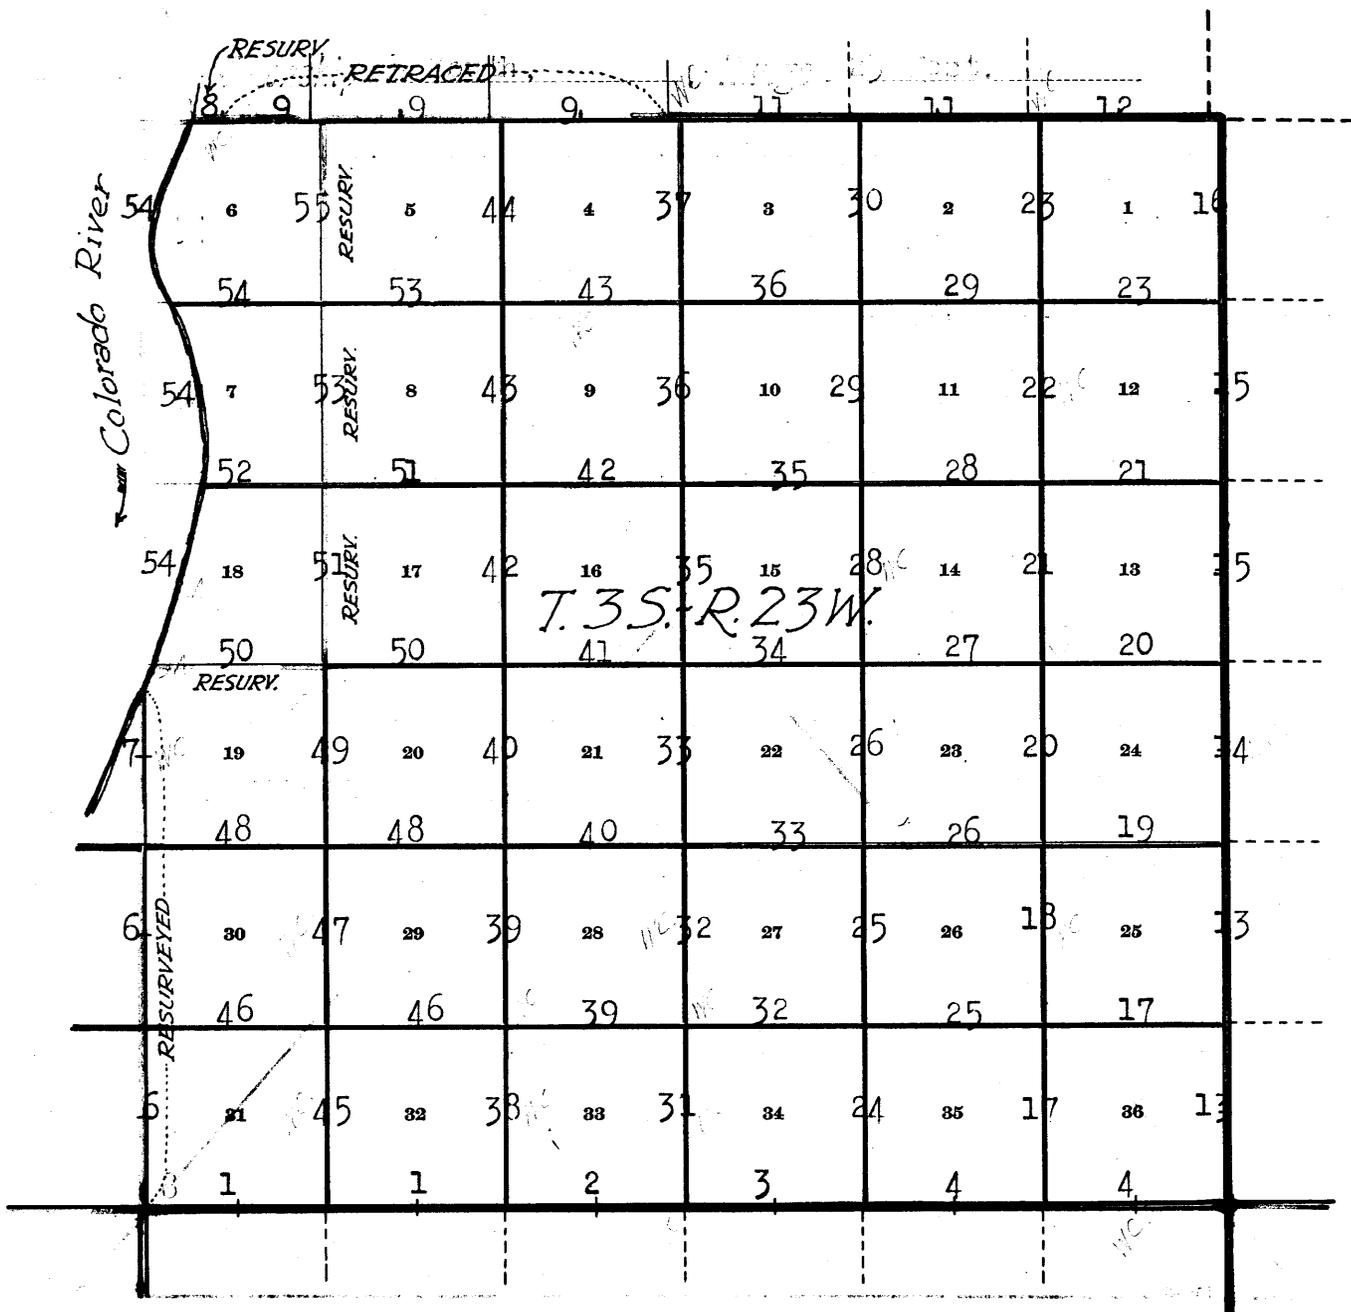

- Surveyed under this Group. Notes in this Book. 3174
- Retraced or Resurveyed under this Group. Notes in this Book. 3174
- Surveyed under this Group. Notes in Book "B." 3173
- Surveyed under this Group. Notes in Book "D." 3175
- Resurveyed under this Group. Notes in Book "D." 3175
- Surveyed under this Group. Notes in Book "E." 3176
- Accepted surveys.
- Unsurveyed.

Survey of the South bdy. of T. 3 S. R. 23 W.

13

Chains Surveys & resurveys hereinafter described, were executed by
 W. Williams B. Kimmel, U.S. Surveyor, on dates shown on diagram
 on page 57 of this book using a Young & Son's light moun-
 tain transit #8523, with solar attachment, desc. in Book "A."
 From recent and repeated field tests of the transit and
 solar attachment on a meridian established by ob-
 servations on Polaris, during a.m. and p.m. hours,
 they are known to be in satisfactory adjustment.
 From the cor. of Ts. 3 and 4 S. R. 22W. $\frac{1}{4}$ S. $\frac{1}{4}$ R. 23W. $\frac{1}{4}$ S. R. 23W.
 W. described in book "B".
 West on a random line along S. bdy. of Tp., setting temp.
 $\frac{1}{4}$ sec. and sec. cors. at intervals of 40.00 chs. and
 at 482.52 chs., fall 259 lks. N. of the reestablished
 cor. of $\frac{1}{4}$ S. $\frac{1}{4}$ R. 23W. $\frac{1}{4}$ S. R. 24W. & $\frac{1}{4}$ S. R. 23W. & 24W. described
 in Book "D." This falling answers to a correction of
 18' or $43 \frac{1}{6}$ lks. S. per mile counting from the
 SE. cor. of the Tp.

Thence
 N. 89° 42' E. on a true line bet. secs. 6 and 31.
 Over rolling mountainous land through scattering under-
 growth.
 Desc. gradual slope, to
 11.46 Gulch, course SW. Asc. gradual slope 80 ft. to
 34.76 Desc. 43 ft. to
 42.52 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 31
 $\frac{1}{4}$
 S 6
 1915

and raise a mound of stone, 2 ft. base, $1 \frac{1}{2}$ ft. high,
 N. of cor.
 Asc. over rolling NW. slope, 335 ft. to
 61.00 Asc. steep NW. slope 32 ft. to
 65.36 Foot of bluff Asc. 97 ft. to
 66.05 Top of bluff brs. NE. and SW. about 90 ft. high. Thence
 asc. 57 ft. to
 73.38 Rocky ridge brs. NE. and SW. Desc. along S. slope, 95 ft.
 to
 82.52 Set an iron post, 3 ft. long, 3 ins. diam., 18 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 5, 6, 31 and 32, mkd. on brass cap.

T3S
 S31 | S32
 S 6 | S 5 R23W
 1915

and raise a mound of stone, 2 ft. base, $1 \frac{1}{2}$ ft. high,
 W. of cor.
 Land, rolling and hilly.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

N. 89° 42' E. bet. secs. 5 and 32.
 Over rolling hilly land, through scattering undergrowth.
 Desc. along S. slope, 116 ft. to
 11.25 Head of ravine, course SW. Asc. 124 ft. over W. slope to
 15.89 Spur slopes N. Desc. 210 ft. over broken E. slope, to
 35.10 Ravine, course NE.
 37.44 Gulch, course NW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

2 South bdy. of ~~Sec. 1~~ T. 3 S. R. 23 W.

Chains

S 32
 $\frac{1}{4}$
S 5
1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Asc. over rolling land, 115 ft. to Rocky butte and spur ridge brs. NW. and SE. slopes NW.
50.95 Desc. NE. slope, 101 ft. to
57.13 Ravine, course NW. Asc. 13 ft. to
58.92 Same ravine, course SW. Asc. 130 ft. to
69.60 Ridge brs. NE. and SW. Desc. E. slope, 154 ft. to
80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 4, 5, 32 and 33, mkd. on brass cap

T3S
S32 | S33
S 5 | S 4 R23W
T4S
1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, rolling and hilly.
Soil, rocky, 4th rate.
Timber, none.
Scattering undergrowth.
No grass.


N. $89^{\circ} 42'$ E. bet. secs. 4 and 33.
Over rolling and hilly land, throughs scattering undergrowth h.
Desc. gradual E. slope, to
3.20 Ravine, course S. Asc. W. slope, 244 ft. to
11.50 Ridge brs. N. and S. Asc. rough broken E. slope, 308 ft. to
21.45 Ravine course SE. Asc. W. slope, 56 ft. to
23.80 Desc. E. slope, 68 ft. to
34.15 Ravine, course SW. Asc. W. slope, 46 ft. to
37.80 Ridge brs. N. and S. Desc. 56 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 33
 $\frac{1}{4}$
S 4
1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
Desc. 52 ft. to
46.15 Ravine, course S. Asc. W. slope, 75 ft. to
48.28 Spur slopes SE. Thence over rolling land. Desc. 100 ft. to
71.44 Ravine, course SE. Asc. W. slope, 92 ft. to
80.00 True point ^{for sec. cor.} falls on insecure place, therefore at
79.70 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for W. C. to cor. of secs. 3, 4, 33 and 34, mkd. on brass cap

South bdy. of Sec. 2. T. 3 S. R. 23 W.

Chains




and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling and hilly.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

From true point for cor. of secs. 3, 4, 33 and 34,
 N. 89° 42' E. bet. secs. 3 and 34.
 Over rolling and hilly land, through scattering undergrowth.


- 3.84
- 8.23
- 15.90
- 17.19
- 23.39
- 26.07
- 34.70
- 38.36
- 40.00

Asc. rolling W. slope, 110 ft. to
 Ridge brs. N. and S. Desc. E. slope, 51 ft. to
 Ravine, course NW. Asc. SW. slope, 121 ft. to
 Ridge brs. NW. and SE. Desc. 10 ft. to
 Rocky point slopes NE. Desc. 226 ft. to
 Ravine, course S. Asc. 54 ft. to
 Spur slopes S. Desc. 50 ft. to
 Spur slopes S. Desc. gradual E. slope to
 Ravine, course SW. Asc. 51 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground, to solid rock, in a mound of stone,
 for ¼ sec. cor., mkd. on brass cap



and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor.
 Asc. SW. slope, 54 ft. to
 Rocky point of spur slopes S. Desc. E. slope, 84 ft. to
 Ravine, course S. Asc. 27 ft. to
 Spur slopes S. Desc. 17 ft. to
 Ravine, course SW. Asc. over broken W. slope, 254 ft. to
 Spur ridge slopes NE. Desc. SE. slope, 123 ft. to
 Ravine, course NE. Asc. 34 ft. to
 Spur slopes NE. Desc. 150 ft. to
 Wagon road brs. N. & S. extends N. to Parker & S. to Yuma. Desc. gradual
 slope to
 Gulch, course S. Asc. 17 ft. to
 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in
 the ground, for cor. of secs. 2, 3, 34 and 35, mkd.
 on brass cap

- 42.84
- 44.60
- 46.76
- 48.24
- 61.50
- 65.37
- 67.30
- 73.80
- 76.53
- 80.00



and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling and hilly.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

4

South bdy. of Tract T. 3 S. R. 23 W.

Chains

N. 89° 42' E. bet. secs. 2 and 35.
 Over rolling hilly land, through scattering undergrowth.
 4.82 Gulch, course SW. Asc. NW. slope, 139 ft. to
 19.00 Spur slopes SW. Desc. SE. slope, 169 ft. to
 28.33 Gulch, course SW. Asc. gradual slope, 43 ft. to
 35.00 Desc. 20 ft. to
 37.55 Ravine, course SW. Asc. 34 ft. to
 39.20 Ridge brs. N. and S.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 35

 $\frac{1}{4}$

S 2

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 Desc. gradual slope, to
 42.07 Ravine, course SE, Asc. 25 ft. to
 43.00 Spur slopes S. Desc. SE. slope, 143 ft. to
 44.44 Ravine; course SW. Asc. SW. slope, 420 ft. to
 68.62 Ridge brs. N. and S. Desc. E. slope, 262 ft. to
 77.94 Ravine, course S. Asc. 27 ft. to
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in
 the ground, for cor. of secs. 1, 2, 35 and 36, mkd.
 on brass cap

T3S

S35 | S36

S 2 | S 1 R23W

T4S

1915

from which, An iron
 wood, 10 ins. diam., brs. N. 86 $\frac{1}{2}$ ° W. mkd. T3SR23WS35BT.
 and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

N. 89° 42' E. bet. secs. 1 and 36.
 Over rolling mountainous land, through scattering under-
 growth.
 Asc. 57 ft. to
 1.60 Point of spur slopes S. Desc. SE. slope, 87 ft. to
 6.53 Foot of mountains brs. NE. and SW. Asc. 69 ft. to
 10.00 Desc. 15 ft. to
 10.95 Gulch, course SW. Asc. W. slope, 114 ft. to
 15.06 Spur slopes NE. Desc. 74 ft. to
 18.50 Desc. 17 ft. to
 20.50 Ravine, course NE. Thence over rolling land.
 22.70 Ravine, course NW. Asc. 281 ft. to
 39.00 Desc. 35 ft. to
 40.00 True point for $\frac{1}{4}$ sec. cor., falls on insecure place, there-
 fore at
 39.70 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground, to solid rock, in a mound of stone, for
 W. C. to $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 36

S 1 WC $\frac{1}{4}$

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor. 8 ft. dist.

South hdy. of Tract, T. 3 S. R. 23 W.

Chains

Asc. 120 ft. to
 45.64 Ridge hrs. NW. and SE. Desc. 96 ft. to
 59.06 Asc. 41 ft. to
 55.65 Spur slopes NE. Desc. 144 ft. to
 68.20 Ravine, course N. Asc. NW. slope, 164 ft. to
 80.00 The cor. of Ts. 3 and 4 S., R. 23 W., and frac. T.
 4 S. R. 23 W. described in Book "B."
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

Independent Resurvey of
W. bdy. of T. 3 S., R. 23 W.

Chains

From the reestablished cor. of T3S., R. 23W., fracs. T. 3S., R. 24W., & fracs. T. 4S., R. 23 & 24 W. described in Book "D." North bet. sec. 31, and fragl. sec. 36.

Over rolling hills, through scattering timber and undergrowth.

- 5.00 Asc. 51 ft. to
- 22.86 Desc. 63 ft. to
- 25.00 Ravine, course W. Asc. 34 ft. to
- 32.20 Thence over gently rolling land to
- 35.12 Desc. 41 ft. to
- 40.00 Gulch, course W. Asc. 56 ft. to

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap,

S36 $\frac{1}{4}$ | S31
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

- 41.47 Mound of stone, but no sign of original $\frac{1}{4}$ sec. cor., brs. W. 33 lks. dist.

- 48.33 Desc. 69 ft. over rolling land to Ravine, course W. Asc. 54 ft. to
- 53.14 Desc. 25 ft. to
- 55.10 Ravine, course W. Asc. 58 ft. to
- 58.13 Desc. 40 ft. to
- 63.09 Asc. 13 ft. to
- 64.58 Desc. 89 ft. to
- 73.14 Ravine, course SW. Asc. broken S. slope, 140 ft. to
- 79.34 Spur slopes SW. Desc. NW. slope, 13 ft. to
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 10 ins. in

the ground, to solid rock, in a mound of stone, for reestab. cor. of secs. 30, 31, and fragl. secs. 25 and 36, marked on brass cap,

T3S
R24W R23W
S25 | S30
S36 | S31
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

From this cor. the original cor. of secs. 25, 30, 31 and 36, which is a malpais stone, 8 X 16 X 7 ins. above ground, firmly set, mkd. and witnessed as described by the Surveyor General, brs. N. 20° 2' W. 187 lks. dist. Destroy this cor.

Land, rolling hills.
Soil, rocky, 4th rate.
Timber, scattering iron wood.
Undergrowth, greasewood.
No grass.

North bet. sec. 30, and fragl. sec. 25.

Over rolling land, through scattering timber and undergrowth.

- 4.85 Desc. NW. slope, 80 ft. to
 - 14.68 Ravine, course SW. Asc. SE. slope, 85 ft. to
 - 24.64 Desc. along E. slope, 99 ft. to
 - 33.61 Gulch, course NW. Thence over rolling W. slope, to
 - 40.00 Gulch, course NW. Asc. 35 ft. to
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap


S25 $\frac{1}{4}$ | S30
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, NW. of cor., 8 ft. dist. (Could not raise mound on W.)

Independant Resurvey of West bdy. of T.3 S., R.23 W.

Chains.
41.43
45.26
55.06
60.92
67.58
74.00
80.00

Ascend 30 ft. to
Spur, slopes NW. Descend NE. slope, 73 ft. to
Gulch, course W. Ascend SW. slope, 123 ft. to
Spur, slopes NW. Descend NW. slope, 110 ft. to
Gulch, course SW. Ascend S. slope, 95 ft. to
Rocky spur, slopes SW. Descend NW. slope, 142 ft. to
Ravine, course SW. Ascend SE. slope, 149 ft. to
Set an iron post 3 ft. long, 3 ins. diam., on bed rock, in a mound of stone, for reestablished cor. of secs. 19, 30, and fracl. secs. 24 and 25, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling;
Soil, rocky, 4th rate.
Timber, scattering palo verde and ironwood.
Undergrowth, greasewood.
No grass.

13.60
30.70
35.70
37.93
39.45
40.00
39.30


North, between fracl. secs. 19 and 24.
Over rolling land, through scattering timber and undergrowth.
Ascend, along broken E. slope, 147 ft. to
Ridge, brs. NE. and SW. Descend NW. slope, 291 ft. to
Ascend 30 ft. to
Descend 29 ft. to
Foot of mountains, brs. NE. and SW. Enter river bottom, through dense undergrowth.
Enter wash, 2 ft. deep, course NW. Thence across wash.
True point for 1/4 sec. cor., falls in wash; therefore, at
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for witness cor. to reestablished 1/4 sec. cor., marked on brass cap,



from which,
An ironwood, 8 ins. diam., brs. N. 79 1/2° E., 42 lks. dist., marked W C 1/4 S 19 B T.
An ironwood, 10 ins. diam., brs. N. 38 1/2° W., 88 lks. dist., marked W C 1/4 S 24 B T.

41.45
42.70
70.40

Wagon road brs. NE & SW. extends N. to Parker & S. to Yuma.
Leave wash.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for meander cor. of fracl. secs. 19 and 24, marked on brass cap,



from which,
A willow, 6 ins. diam., brs. N. 81° E., 34 lks. dist., marked T 3 S R 23 W S 19 M C B T.
A willow, 7 ins. diam., brs. S. 5° W., 126 lks. dist., marked T 3 S R 24 W S 24 M C B T.

76.47

Water's edge, Colorado river, brs. NE. and SW.
Land, gently rolling along Colorado River.
Soil, gravelly and rocky, 3rd and 4th rate.
Timber, scattering willow,
Undergrowth, dense arrow weed and mesquite.
No grass.

8 Resurvey of a portion of S. bdy. of Township 2 South, Range 23 W.

Chains

S. of fracl. sec. 31 (W. 1/2)

From true point for 1/4 sec. cor. of fracl. sec. 31, witnessed 1.00 chain, N. 89° 54' E. as hereinafter described.

S. 89° 51' W. on bdy. of fracl. sec. 31 (W. 1/2)

Descend gradual S. slope, 34 ft. to

1.75 Foot of gently rolling hills, brs. NW. and SE. Enter river bottom.

Descend gradual slope to


4.00 Wagon road brs. SE. & SW. extends N. to Parker and S. to Yuma.

6.66 The original meander cor. of fractional secs. 6 and 31, which is a mesquite post, 4x4 ins. square, 12 ins. above ground, marked as described by the surveyor general.

7.60 Dry slough, 100 lks. wide, brs. N. and S.

11.34 Intersect left bank of Colorado river, brs. NE. and SW. At point of intersection,

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished meander cor. of fracl. secs. 6 and 31, marked on brass cap,



from which,

A cottonwood, 14 ins. in diam., brs. N. 39 1/2° E., 15 lks. dist., marked T 2 S R 23 W S 31 M C B T.

A cottonwood, 12 ins. diam., brs. S. 75 1/2° E., 64 lks. dist., marked T 3 S R 23 W S 6 M C B T.

Land, level river bottom.

Soil, 2nd rate.

Timber, cottonwood and mesquite.

Undergrowth, arrow weed.

Retracement of part of S. bdy. of Township 2 South, Range 23 West. 9

Chains.

From cor. of sec. 32, and fracl. sec. 31, T. 2 S., R. 23 W.,
 originally the cor. of secs. 5, 32, and fracl. secs. 6
 and 31, which is a stone 6x10x8 ins. above ground,
 firmly set. and marked, as described by the surveyor
 general.

Thence, fracl.
 S. 89° 54' W. on S. bdy. of sec. 31 (E. 1/2).
 Over level river bottomland, through dense undergrowth.
 Along wash, course W.
 21.97 Leave wash, course SW.
 29.27 Old road brs. NE. and SW.
 34.87 Same road brs. NW. and SE.
 36.47 Same road brs. SW. and NE.
 37.07 Wagon road brs. N. & S. Extends N. to Parker and S. to Yuma.
 39.13 The original witness cor. to 1/4 sec. cor., which is a mal-
 pais stone, 6x15x7 ins. above ground, firmly set,
 marked and witnessed as described by surveyor general.

40.13 True point for 1/4 sec. cor. of fracl. sec. 31 only.
 Land, level and gently rolling.
 Soil, sandy silt, 2nd rate.
 Timber, scattering mesquite.
 Undergrowth, dense arrow weed.
 No grass.

From cor. of sec. 32 & fracl. sec. 3, T. 2 S., R. 23 W.,
 originally cor. of secs. 5, 32, and fracl. secs. 6 and 31
 hereinbefore described,
 N. 89° 56' E. on S. bdy. of sec. 32 (W. 1/2).
 In wash, course W.

35.43 Leave wash, course W. from SE.
 Enter rolling land, and scattering undergrowth.

40.03 The original 1/4 sec. cor., which is a malpais stone, 7x9x7
 ins. above ground, marked and witnessed as described by
 the surveyor general. (Now refers to sec. 32 only).
 Thence N. 89° 56' E. on S. bdy. of sec. 32 (E. 1/2)
 Descend rolling slope, 23 ft. to
 12.70 Gulch, course SW. Ascend NW. slope, 186 ft. to
 23.60 Spur, slopes N. Descend N. slope, 164 ft. to
 34.50 Canyon, course N. Ascend steep W. slope, 199 ft. to
 40.36 The original cor. of secs. 4, 5, 32 and 33, which is a mal-
 pais stone, 6x8x6 ins. above ground, marked and witness-
 ed as described by the surveyor general, now refers to
 sec. 32 and 33 only. 40.36
 Land, gently rolling. Soil, rocky, 4th rate.
 No timber.
 Undergrowth, greasewood.
 No grass.

East, on S. bdy. of sec. 33 (W. 1/2)
 Over rolling land, through scattering undergrowth.
 Ascend 138 ft. to
 2.64 Spur, slopes SW. Descend steep SE. slope, 116 ft. to
 7.64 Ravine, course SW. Ascend NW. slope, 70 ft. to
 10.71 Spur, slopes SW. Ascend over rolling SW. slope, 52 ft. to
 15.41 Spur, slopes SW. Descend 52 ft. to
 17.05 Ravine, course SW. Ascend SW. slope, 40 ft. to
 22.07 Ridge, brs. NW. and SE. Descend rough NE. slope, 144 ft. to
 36.68 Rocky point slopes SW. Descend rolling S. slope, 54 ft. to
 39.47 The original 1/4 sec. cor., which is a malpais stone, 6x10x6
 ins. above ground, marked and witnessed, as described
 by the surveyor general. (Now refers to sec. 33 only).
 Thence East, on south bdy. of sec. 33 (E. 1/2).
 Descend gradual, slope to
 27.15 North edge of gulch, course SW. Ascend steep SW. slope, 289
 ft. to

10. Retracement of part of S bdy. of Township 2 S., R. 23 W.

Chains

38.70 Witness cor. to cor. of secs. 33 and 34 only,
originally witness cor. to cor. of secs. 3, 4, 33 and 34,
which is a malpais stone, 5x8x6 ins. above ground,
marked as described by the surveyor general.

39.40 True point for cor. of secs. 33 and 34, T. 2 S., R. 23 W.
Land, rolling and hilly.
Soil, rocky, 4th rate.
Timber, scattering palo verde.
Undergrowth, greasewood.
No grass.

Faint, illegible text, possibly bleed-through from the reverse side of the page.

Survey of part of S. bdy. of T. 2 S., R. 23 W.

Chains From orig. sec. cor. point of secs. 3, 4, 33 & 34, which is 70
 1/2 mls. E. of witness cor. hereinbefore described, now
 true point for cor. of secs. 33 and 34 only,
 East on S. bdy. of sec. 34.
 Over rolling and hilly land, through scattering under-
 growth.
 Desc. E. slope, 198 ft. to
 Asc. 36 ft. to
 Rocky ledge slopes S. Desc. 52 ft. to
 Gulch, course S. Asc. SW. slope, 385 ft. to
 Ridge brs. N. and S. Desc. SE. slope, 340 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., on bed rock, in
 a mound of stone, for 1/4 sec. cor. of sec. 34 only, marked
 on brass cap,

9.22
 15.00
 17.25
 33.56
 40.00

S 34
 1/4
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 N. of cor.
 Desc. 45 ft. to
 Gulch, course SW. Asc. W. slope over rolling hills 65
 ft. to
 Asc. over rolling land, 45 ft. to
 Spur slopes N. Desc. 66 ft. to
 Ravine, course SW. Asc. 35 ft. to
 Point of spur slopes N. Desc. 29 ft. to
 Same ravine, course NW. Asc. gradual slope to
 Point of spur slopes S. Desc. 21 ft. to
 Head of same ravine, course SW. Asc. W. slope, 75 ft. to
 Rocky spur slopes NW. Desc. NE. slope, 87 ft. to
 Gulch, course N. Thence over rolling land, to
 Gulch, course NW. Asc. W. slope to
 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 34 and 35, mkd. on
 brass cap

44.00
 47.13
 55.54
 61.46
 62.66
 63.51
 65.14
 66.00
 69.57
 72.37
 79.03
 80.00

T2S
 S34 | S35 R23W
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 N. of cor.
 Land, rolling and hilly.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.
 No grass.

East along S. bdy. of sec. 35,
 Asc. rocky SW. slope, 102 ft. to
 Ridge brs. NW. and SE. Desc. NE. slope, 73 ft. to
 Ravine, course S. Asc. SW. slope, 52 ft. to
 Spur slopes SW. Desc. SE. slope, 36 ft. to
 Ravine, course SW. Asc. W. slope, 145 ft. to
 Spur slopes NW. Desc. NE. slope, 97 ft. to
 Head of gulch, course NW. Thence over rolling land to
 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in
 the ground, to solid rock, in a mound of stone, for 1/4
 sec. cor. of sec. 35 only, marked on brass cap,

7.82
 17.80
 22.44
 24.36
 30.34
 34.18
 40.00


S 35
 1/4
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 N. of cor.

12 Part of South bdy. of T. 2 S., R. 23 W.

Chains

- 44.50 Desc. 23 ft. to Gulch, course SE. Asc. SW. slope, 110 ft. to
- 54.00 Rocky spur slopes SE. Desc. NE. slope, 45 ft. to
- 56.00 Head of ravine, course SE. Asc. SW. slope, 200 ft. to
- 62.74 Rocky ridge brs. NW. and SE. Desc. gradual slope to
- 66.24 Canyon course N. Asc. gradual slope to
- 69.75 Rocky point slopes N. Desc. NE. slope, 247 ft. to
- 80.00 True point for cor. of secs. 35 and 36, falls in gulch, course N. therefore at
- 80.75 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for W. C. to cor. of secs. 35 and 36, mkd. on brass cap



1915

from which,

An iron wood, 10 ins. diam., brs. N. 48° W.

117 lks. dist. mkd. W C T 2 S R 23 W S 35 B T.

No other trees within limits.

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

No grass.

- 0.75 From true point for cor. of secs. 35 and 36, East along S. bdy. of sec. 36. Over rolling and hilly land, thru scattering undergrowth. Witness cor. to cor. of secs. 35 & 36, hereinbefore described. Asc. 143 ft. to
- 12.60 Rocky spur slopes SE. Desc. NE. slope, 166 ft. to
- 19.74 Ravine, course SE. Asc. along SE. slope, 213 ft. to
- 33.08 Sharp rocky spur slopes SE. Desc. NE. slope, 178 ft. to
- 39.22 Ravine, course SE. Asc. SW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground, to solid rock, in a mound of stone, for ¼ sec. cor. of sec. 36 only, marked on brass cap,




1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Asc. 59 ft. to

- 44.30 Spur slopes SE. Desc. 90 ft. to
- 54.50 Ravine, course N. Asc. 75 ft. to
- 57.50 Spur slopes NW. Desc. SE. slope, 114 ft. to
- 65.91 Ravine, course N. Asc. 138 ft. to
- 70.85 Ridge brs. N. and S. Desc. 102 ft. over rolling land to
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 16 ins. in the ground, to solid rock, in a mound of stone, for cor. of Ts. 2 S., Rs. 22 and 23 W., mkd. on brass cap



1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Land rolling. Soil, rocky, 4th rate. No timber.

Scattering undergrowth. No grass.

Chains

From the cor. of T_s. 3 and 4 S., R. 22 W., T₃S., R. 23 W., and fract. T₄S., R. 23 W., described in Book "B,"

North bet. secs. 31 and 36.
 Over rolling land, through scattering undergrowth.
 Asc. SW. slope, 46 ft. to
 4.70 Rocky point slopes NW. Thence along broken W. slope to
 10.31 Rocky point slopes W. Desc. NW. slope, 272 ft. to
 20.00 Thence over rolling land to
 21.00 Desc. 60 ft. to
 25.37 Gulch, course NE. Asc. rolling SE. slope, 92 ft. to
 33.25 Spur slopes E. Desc. NE. slope, 102 ft. to
 37.50 Gulch, course SE. Asc. SW. slope, 63 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S36 $\frac{1}{4}$ |S31
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Asc. 105 ft. to
 43.20 Rocky point slopes W. Desc. NW. slope, 31 ft. to
 49.50 Desc. NW. slope, 52 ft. to
 53.89 Ravine, course SW. Asc. SE. slope, 104 ft. to
 57.00 Rocky point slopes SW. Desc. N. slope, 196 ft. to
 61.40 Gulch, course SW. Asc. rocky SE. slope, 151 ft. to
 67.25 Rocky point slopes SW. Thence along rocky W. slope to
 69.00 Rocky point slopes W.
 74.00 Rocky point slopes W. Desc. 159 ft. to
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 14 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 25, 30, 31 and 36, mkd. on brass cap

T3S
R23W R22W
S25|S30
S36|S31
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, NE. of cor. 5 ft. dist. (Could not raise mound to W).

Land, rolling and hilly.
Soil, rocky, 4th rate.
No timber.
Scattering undergrowth.
No grass.

North bet. secs. 25 and 30
Over rolling land, through scattering undergrowth.
Asc. 85 ft. to

2.70 Desc. 139 ft. to
 7.48 Gulch, course E. Asc. W. slope, 41 ft. to
 10.75 Spur slopes E. Desc. E. slope, 59 ft. to
 13.61 Gulch, course E. Asc. 31 ft. to
 14.39 Spur slopes E.
 14.66 Enter gulch, course SE. from N.
 23.35 Leave gulch, course S. from NW. Asc. S. slope, 60 ft. to
 27.90 Rocky knoll. Desc. N. slope 30 ft. to
 29.100 Draw, course W. Asc. SW. slope to
 31.50 Spur slopes E. Desc. 46 ft. to
 35.00 Gulch, course NE. Thence over rolling E. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
 ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S25 $\frac{1}{4}$ |S30
1915

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 42.00 Gulch, course SE. Asc. 71 ft. to
 52.50 Spur slopes SE. Desc. E. slope, 17 ft. to
 66.20 Asc. 23 ft. to
 69.90 Desc. 51 ft. to
 72.60 Gulch, course E.
 75.49 Gulch, course SE. Asc. 56 ft. to
 77.00 Old trail brs. NW. and SE.
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, mkd. on brass cap

T3S
 R23W R22W
 S24 | S19
 S25 | S30
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling and hilly.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

North bet. secs. 19 and 24.
 Over rolling land, through scattering undergrowth.
 Asc. SW. slope, 36 ft. to
 1.92 Spur slopes SE. Desc. NE. slope, 59 ft. to
 7.04 Gulch, course SE. Asc. 36 ft. to
 15.00 Over rolling land to
 23.70 Enter gulch, course SE. Asc. gradual slope along gulch, to
 40.00 True point for ¼ sec. cor., falls in gulch, therefore at
 40.25 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to solid rock, in a mound of stone, for W. C. to ¼ sec. cor., mkd. on brass cap

S24 | S29
 WC ¼
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Note: this cor. is set at foot of rock, 10 ft. high.
 41.50 Leave gulch, course S. from NE.
 Asc. 91 ft. to
 44.81 Spur slopes SE. Thence asc. 34 ft. along SE. slope to
 51.36 Asc. steep rocky S. slope, 657 ft. to
 70.25 Top of mountain. Thence over rolling top to
 78.71 Desc. steep rocky NE. slope of mountain 18 ft. to
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 13, 18, 19 and 24, mkd. on brass cap

T3S
 R23W R22W
 S13 | S18
 S24 | S19
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

East bdy. of T. 3 S., R. 23 W.

Chains

Land, hilly and mountainous.
Soil, rocky 4th rate, volcanic formation.
No timber.
Scattering undergrowth.
No grass.

North bet. secs. 13 and 18.
Over rolling mountainous land, through scattering undergrowth.

13.76 Desc. steep rocky NE. slope, 292 ft. to
 22.70 Head of ravine, course NW. Asc. SW. slope, 34 ft. to
 26.00 Desc. 69 ft. to
 27.87 Asc. 17 ft. to
 Spur ridge brs. NW. Desc. NW. slope,
 95 ft. to
 31.98 Ravine, course NW. Asc. along W. slope, 101 ft. to
 36.31 Rocky point slopes W. Desc. NW. slope, 28 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
 the ground, to solid rock, in a mound of stone, for
 1/4 sec. cor., mkd. on brass cap

S13 1/4 | S18
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

44.14 Desc. 46 ft. to
 63.08 Ravine course NW. Asc. rolling SE. slope, 210 ft. to
 69.00 Ridge brs. NE. and SW. Desc. over rolling hills 89 ft. to
 75.20 Asc. 53 ft. to
 80.00 Along top of ridge brs. N. and S. Desc. 29 ft. to
 Set an iron post, 3 ft. long, 3 ins. diam., 10 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 7, 12, 13 and 18, mkd. on brass cap

T3S
R23W R22W
S12 | S 7
S13 | S18
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

Land, hilly and mountainous.
Soil, rocky 4th rate, volcanic formation.
No timber.
Scattering undergrowth.
No grass.

North bet. secs. 7 and 12.
Over rolling land, through scattering undergrowth.

2.00 Desc. NW. slope, 95 ft. to
 5.90 Gulch, course NE. Thence over rolling land to
 14.22 Gulch, course NE. Asc. SE. slope 63 ft. to
 18.00 Spur slopes E. Desc. 33 ft. to
 18.94 Gulch, course E. Asc. S. slope, 47 ft. to
 24.60 Ridge brs. E. and W. Desc. NW. slope, 147 ft. to
 31.00 Ravine, course NE. Asc. SE. slope, 61 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground, to solid rock, in a mound of stone, for
 1/4 sec. cor., mkd. on brass cap

S12 1/4 | S 7
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

Chains

Asc. 22 ft. to
 41.50 Spur slopes NE. Thence along W. slope to
 46.45 Spur slopes W. Desc. N. slope, 116 ft. to
 53.50 Head of gulch, course NW. Asc. SW. slope, 31 ft. to
 59.24 Ridge brs. NW. and SE. Desc. NE. slope, 92 ft. to
 70.15 Gulch, course NW. Thence over rolling land to
 73.80 Gulch, course SW. Asc. SE. slope to
 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 10 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 1, 6, 7 and 12, mkd. on brass cap

T3S
 R23W R22W
 S 1 | S 6
 S12 | S 7
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, scrub palo verde, iron wood and greasewood.
 No grass.

North bet. secs. 1 and 6.
 Over rolling mountainous land, through scattering under-
 growth.
 16.85 Asc. SE. slope, 123 ft. to
 24.57 Desc. NE. slope, 74 ft. to
 28.66 Gulch, course SE. Asc. S. slope, 45 ft. to
 35.72 Spur ridge brs. NE. and SW. Desc. NW. slope, 75 ft. to
 40.00 Head of gulch, course NW. Asc. SW. slope, 51 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for ¼ sec. cor., mkd. on brass cap

S 1¼ | S 6
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 40.40 Spur ridge brs. NW. and SE. Thence over rolling E. slope
 to
 46.25 Gulch, course NW. Thence over rolling land to
 79.78 Fall 4.40 chs. E. of the cor. of Ts. 2 S., Rs. 22 and 23
 W., hereinbefore described. At point of intersection,
 Set an iron post, 3 ft. long, 3 ins. diam., 16 ins. in the
 ground, to solid rock, in a mound of stone, for C.C.
 of Ts. 3 S., Rs. 22 and 23 W. mkd. on brass cap

T2S
 R23W R22W
 S36 | S31
 C C
 S 1 | S 6
 R23W R22W.
 T3S
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 S. of cor.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Scattering undergrowth.
 No grass.

Chains

From the cor. of secs. 1, 2, 35 and 36, cons. bdy. of Tp., hereinbefore described,

N. 0° 1' W. bet. secs. 35 and 36.

Asc. SW. slope, 111 ft. to

12.82 Ridge brs. NW. and SE. Desc. 105 ft. to

25.72 Ravine, course SE. Asc. Rolling SW. slope, 52 ft. to

34.17 Ridge brs. NW. and SE. Desc. along broken W. slope, 25 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

S35 1/4 | S36
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.20 Ravine, course SW. Ascend cliffy, SW. slope, 227 ft. to

49.38 Rocky point slopes W. Desc. broken W. slope, 52 ft. to

54.20 Asc. 59 ft. to

59.30 Ridge brs. NW. and SE. Desc. SE. slope, 140 ft. to

61.98 Gulch, course NE. Asc. along SE. slope, 84 ft. to

69.31 Desc. 46 ft. to

74.26 Asc. 93 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 25, 26, 35 and 36, mkd. on brass cap

T 3S R23W
S26 | S25
S35 | S36
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, rocky, volcanic formation, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

No grass.

40.00 N. 89° 42' E. on a random line bet. secs. 25 and 36.

Set temp. 1/4 sec. cor.

79.81 Intersect E. bdy. of Tp., 3 lks. S. of cor. of secs. 25, 30, 31 and 36, hereinbefore described.

Thence

S. 89° 41' W. on a true line bet. secs. 25 and 36.

Over rolling land, through scattering timber and undergrowth.

Asc. gradual slope, 22 ft. to

1.18 Ravine, course NW. Desc. 24 ft. to

2.95 Ravine, course N. Asc. NE. slope, 154 ft. to

10.46 Ridge brs. NW. and SE. Desc. NW. slope, 114 ft. to

18.08 Ravine, course NW. Asc. NE. slope, 52 ft. to

22.60 Spur ridge slopes NW. Desc. SW. slope, 51 ft. to

25.90 Ravine, course NW. Asc. NE. slope, 168 ft. to

32.50 Spur slopes NE. Asc. 38 ft. to

35.00 Spur slopes NW. Asc. gradual slope to

37.30 Ridge brs. NW. and SE. Desc. 33 ft. to

39.90 1/2 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

18

Subdivision of T. 3 S. R. 23 W.

Chains

- 43.95
- 54.97
- 61.92
- 69.28
- 70.65
- 74.37
- 78.00
- 79.81

S 25
S 36
1915

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Desc. gradual slope to
Asc. SE. slope, 145 ft. across slope of old mine.
Ridge brs. N. and S. Thence over rolling slope to
Ridge brs. NW. and SE. Desc. W. slope, 256 ft. to
Ravine, course SW. Asc. E. slope, 144 ft. to
Rocky spur slopes S. Desc. SW. slope, 139 mft. to
Ravine, course SE. Asc. along SE. slope, 144 ft. to
Desc. 17 ft. to
The cor. of secs. 25, 26, 35 and 36.
Land, rolling and hilly.
Soil, rocky, volcanic formation, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, scattering greasewood.
No grass.

- 2.50
- 7.45
- 17.23
- 22.47
- 29.44
- 29.45
- 40.00
- 40.50

N. 0° 1' W. bet. secs. 25 and 26.
Over rolling land, through scattering timber and undergrowth.
Asc. SE. slope, 82 ft. to
Ridge brs. NE. and SW. Desc. 57 ft. to
Asc. 128 ft. to
Ridge brs. NE. and SW. Desc. NW. slope, 121 ft. to
Ravine, course NE. Asc. SW. slope, 95 ft. to
Ridge brs. NE. and SW. Desc. gradual slope.
U. S. L. M. No. 1258A which is a post mkd. and witnessed as described by the Surveyor General, brs. N. 76° 50' E. Desc. along W. slope, 165 ft. to
True point for ¼ sec. cor., falls on steep slope insecure for cor. therefore at
Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, to solid rock, in a mound of stone, for W. C. to ¼ sec. cor., mkd. on brass cap

S 26 | S 25
W ¼
1915

- 42.65
- 49.67
- 53.58
- 55.00
- 58.59
- 61.19
- 65.00
- 67.20
- 68.83

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Asc. 32 ft. to
Ridge brs. NW. and SE. Desc. NE. slope, 105 ft. to
Ravine, course NW.
Ravine, course SW. Asc. 64 ft. on broken SW. slope, to
Old road brs. NE. & SW. Extends N. to Parker & S. to Yuma; course NW. to
Spur slopes SW. Desc. gradual slope to
Ravine, course SW. Asc. SE. slope, 83 ft. to
Spur slopes SE. Thence over rolling land, to
Spur slopes NE. Desc. 21 ft. to
Ravine, course NE. Asc. SE. slope, 193 ft.

Subdivision of T. 3 S., R. 23 W.

Chains

77.61 Sharp rocky ridge brs. NE. and SW. Desc. 38 ft. to
 78.65 Top of cliff 150 ft. high, brs. NE. and SW. Desc. 190 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 2 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 23, 24, 25 and 26, mkd. on brass cap

T 3S R23W
 S23 | S24
 S26 | S25
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling mountainous.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Scattering undergrowth.

40.00 N. 89° 42' E. on a random line bet. secs. 24 and 25. Set temp. 1/4 sec. cor.
 79.92 Intersect E. bdy. of Tp. 7 lks. S. of the cor. of secs. 19, 24, 25 and 30, hereinbefore described.
 Thence
 S. 89° 39' W. on a true line bet. secs. 24 and 25.
 Over rolling land, through scattering undergrowth.
 Desc. 27 ft. to
 4.67 Ravine, course SE.
 10.92 Ravine, course SE. Asc. SE. slope, 275 ft. to
 25.75 Ridge brs. NE. and SW.
 USLM. No. 1258A brs. S. 8° 25' W. Desc. gradual slope to
 27.85 Prospect hole brs. S. 15 lks. dist. Asc. 35 ft. to
 30.36 Spur slopes NW. Desc. SW. slope, 100 ft. to
 34.08 Old prospect hole brs. S. 25 lks. dist. Desc. 16 ft. to
 34.48 Head of ravine, course NW. Asc. 16 ft. to
 36.16 Spur slopes NW. Desc. SW. slope, 70 ft. to
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

S 24
 1/4
 S 25
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

42.07 Old prospect hole brs. S. 150 lks. dist. Desc. 19 ft. to
 42.59 Ravine, course NW. Asc. 19 ft. to
 46.79 Desc. 27 ft. to
 51.75 Old road brs. NW. and SE. Asc. 41 ft. to
 56.03 Desc. NW. slope, 39 ft. to
 58.42 Old road brs. N. and S. Extends N. to Parker and S. to Yuma
 Gulch, course N. Asc. SE. slope, 45 ft. to
 69.20 Rocky point slopes SW. Asc. SE. slope, over rolling land 208 ft. to
 76.58 Rocky ridge brs. NE. and SW. Desc. 139 ft. to
 79.17 Foot of cliff brs. NE. and SW.
 79.92 The cor. of secs. 23, 24, 25 and 26.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde.
 Scattering undergrowth.

Subdivision of Sec. 1, T. 3 S., R. 23 W.

Chains

N. 0° 1' W. bet. secs. 23 and 24.
 Over rolling land, through scattering undergrowth.
 Desc. NW. slope, 133 ft. to
 7.46 Ravine, course SW. Asc. 11 ft. to
 10.00 Desc. 36 ft. to
 12.16 Ravine, course NW. Asc. 46 ft. to
 14.02 Ridge brs. NW. and SE. Desc. 30 ft. to
 15.45 Ravine, course NW. Asc. 73 ft. to
 18.27 Rocky point slopes NW. Desc. NE. slope, 46 ft. to
 22.69 Ravine, course SE. Asc. SW. slope, 176 ft. to
 36.41 Spur slopes SE. Asc. 23 ft. to
 38.25 Spur slopes E. Flag on top of mountain bet. secs. 13 and
 24 brs. N. 59° 29' E.
 U. S. L. M. brs. S. 31° 48' E. Desc. NE. slope, 59 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in
 the ground, to solid rock, in a mound of stone, for
 1/4 sec. cor., mkd. on brass cap

S23 1/4 | S24
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Desc. 97 ft. to
 43.38 Ravine, course SE. Asc. along SE. slope, 109 ft. to
 49.76 Spur slopes NE. Desc. NW. slope, 105 ft. to
 52.76 Ravine, course E. Asc. SW. slope, 208 ft. to
 55.92 Spur slopes E. Desc. NW. slope, 93 ft. to
 58.46 Ravine, course NE. Asc. SW. slope, 160 ft. to
 62.49 Spur slopes E. Desc. NE. slope, 218 ft. to
 78.05 Ravine, course NW
 79.60 Same ravine, course N.
 80.00 True point for sec. cor., falls on edge of wash, course
 NW., therefore at a point 10 lks. W. of true point
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
 the ground, for W. C. to cor. of secs. 13, 14, 23
 and 24, mkd. on brass cap

T 3S R23W
 S14 | S13
 WC
 S23 | S24
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Timber, palo verde and iron wood.
 Undergrowth, greasewood.

From true point for cor. of secs. 13, 14, 23 and 24,
 N. 89° 42' E. on a random line bet. secs. 13 and 24.
 40.00 Set temp. 1/4 sec. cor.,
 80.04 Intersect E. bdy. of Tp., 7 lks. S. of cor. of secs.
 13, 18, 19 and 24, hereinbefore described.
 Thence
 S. 89° 39' W. on a true line bet. secs. 13 and 24.
 Over NE slope of mountain, thru scattering timber & undergrowth.
 8.38 Top of mountain. Descend steep SW. slope.
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
 the ground, to solid rock, in a mound of stone, for
 1/4 sec. cor., mkd. on brass cap

S 13
 1/4
 S 24
 1915

Subdivision of Tract T. 3 S., R. 23 W.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor. on spur which brs. NE. and SW. sloping SW.
 Desc. SW. slope, 221 ft. to
 44.20 Ravine, course SW. Desc. 11 ft. to
 49.50 Ravine, course S. Asc. SE. slope, 63 ft. to
 54.04 Spur slopes SE. Desc. over rolling slope 123 ft. to
 77.27 Wash, 50 lks. wide, 4 ft. deep, course NW. Road in wash brs.
 NW. & SE. Extends N. to Parker & S. to Yuma. Ascend 17 ft. to.
 79.25 Desc. 21 ft. to
 80.04 The true point for cor. of secs. 13, 14, 23 and 24.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, scattering greasewood.

From true point for cor. of secs. 13, 14, 23 and 24,
 N. 0° 1' W. bet. secs. 13 and 14.
 Over rolling land, through scattering timber and under-
 growth.

2.20 Wash, 50 lks. wide, 4 ft. deep, course NW.
 Old wagon road brs. NW. and SE. in wash. Extends N. to Par-
 ker and S. to Yuma. Descend 23 ft. to
 8.48 Ravine, course W. Asc. 34 ft. to
 10.70 Rocky point slopes SW. Desc. 104 ft. to
 13.99 Wash, 25 lks. wide, 3 ft. deep, course NW. Asc. S. slope,
 149 ft. to
 21.25 Rocky spur slopes W. Desc. 63 ft. to
 26.25 Asc. 34 ft. to
 29.00 Spur slopes SW. Desc. 67 ft. to
 33.90 Ravine, course SW. Asc. 111 ft. to
 38.26 Rocky point slopes NW. Desc. 34 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 5 ins. in
 the ground, to solid rock, in a mound of stone, for
 ¼ sec. cor., mkd. on brass cap

S14 ¼ | S13
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.

50.50 Desc. 64 ft. to
 55.00 Asc. 20 ft. to
 57.31 Desc. 22 ft. to
 67.53 Ravine, course NW. Thence over gently rolling land.
 80.00 Ravine, course SW.
 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 11, 12, 13 and 14, mkd. on brass cap

T 3S R23W
 S11 | S12
 S14 | S13
 1915

and raise a mound of stone, 3 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 12 and 13.
 79.88 Set temp. ¼ sec. cor.
 Intersect E. bdy. of Tp. 12 lks. S. of cor. of secs.
 7, 12, 13 and 18, hereinbefore described.
 Thence

22.

Subdivision of T. 3 S. R. 23 W.

Chains

S. 89° 37' W. on a true line bet. secs. 12 and 13.
 Over rolling land, through scattering timber and undergrowth.
 Desc. 81 ft. to
 2.88 Ravine, course NE. Asc. 113 ft. to
 7.30 Over rolling land to
 12.00 Asc. NE. slope, 114 ft. to
 20.88 Ridge brs. NE. and SW. Desc. NW. slope, 201 ft. to
 37.21 Spur slopes NW. Desc. 90 ft. to
 39.94 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 12

$\frac{1}{4}$
S 13

1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Desc. 23 ft. to
 42.32 Ravine, course NW. Asc. 41 ft. to
 43.80 Spur slopes NW. Desc. 78 ft. to
 49.68 Ravine, course N. Asc. 107 ft. to
 54.21 Spur slopes NW. Desc. 55 ft. to
 56.93 Ravine, course NW. Asc. 43 ft. to
 58.93 Ridge brs. NW. and SE. Desc. 74 ft. to
 64.04 Ravine, course NW. Asc. 33 ft. to
 66.00 Desc. 60 ft. to
 71.08 Ravine, course NW. Asc. 206 ft. to
 75.53 Spur slopes NW. Descend.
 79.88 The cor. of secs. 11, 12, 13 and 14:
 Land, rolling. Soil, rocky, volcanic formation, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. 0° 1' W. bet. secs. 11 and 12.
Over rolling land, through scattering timber and undergrowth.

Asc. 25 ft. to
 .25 Spur slopes NW. Desc. NE. slope, 42 ft. to
 6.61 Ravine, course SW. Asc. SE. slope, 141 ft. to
 13.68 Spur slopes NW. Desc. along NW. slope, 164 ft. to
 26.01 Ravine, course SW. Asc. steep SE. slope, 297 ft. to
 38.00 Spur slopes SW. Thence asc. 18 ft. over gently rolling land.
 40.00 True point for $\frac{1}{4}$ sec. cor. falls on steep slope, therefore at
 40.20 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, to solid rock, in a mound of stone, for W.C. to $\frac{1}{4}$ sec. cor., mkd. on brass cap

S11/S12

W.C.

1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Asc. 35 ft. to
 41.00 Spur slopes NW. Desc. NW. slope, to
 43.00 Asc. gradual slope to
 44.55 Ridge brs. NW. and SE. Desc. broken NE. slope, 259 ft. to
 52.00 Ravine, course NW. Asc. 30 ft. to
 55.40 Spur slopes NW. Asc. 23 ft. to
 61.20 Spur slopes W. Desc. 45 ft. to
 63.00 Ravine, course W. Asc. gradual slope to
 66.30 Ridge brs. NW. and SE. Desc. 92 ft. to

Subdivision of Township 3 South, Range 23 West. 23.

Chains.

69.50 Ravine, course NW. Descend NW.slope.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 1, 2, 11 and 12, marked on brass cap,

T 3S R23W
S 2 | S 1
S 11 | S 12
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, rocky, volcanic formation, 4th rate.
Timber, scattering palo verde and ironwood.
Undergrowth, greasewood.

40.00 N. 89° 42' E., on a random line, bet. secs. 1 and 12.
80.02 Set temp. 1/4 sec. cor.
Intersect E. bdy. of Tp., 9 lks. N. of cor. of secs. 1, 6, 7 and 12, hereinbefore described.
Thence,
S. 89° 46' W., on a true line, bet. secs. 1 and 12.
Over rolling land, through scattering timber and undergrowth.

2.12 Ravine, course S. Ascend 110 ft. to
13.98 Spur, slopes SW. Descend W. slope, 158 ft. to
21.32 Head of ravine, course N. Descend 24 ft. to
29.37 Ravine, course N. Ascend 99 ft. to
36.77 Spur, slopes N. Descend 83 ft. to
40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

S 1
1/4
S 12
1915

and raise a mound of stone 2 ft. base, 1 1/2 ft. high, N. of cor.

Descend 40 ft. to
48.70 Ravine, course, N. Ascend 57 ft. to
53.00 Descend 66 ft. to
57.82 Ravine, course NW. Descend 14 ft. to
60.00 Same ravine, course SW.
60.63 Same ravine, course NW. Ascend 99 ft. to
68.52 Spur, slopes NW. Descend 33 ft. to
74.57 Spur, slopes N. Descend 42 ft. to
80.02 The cor. of secs. 1, 2, 11 and 12.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and ironwood.
Undergrowth, greasewood.

N. 0° 1' W., on a true line, bet. secs. 1 and 2.
Over rolling land, through scattering timber and undergrowth.

8.50 Descend over rolling NW. slope, 52 ft. to
12.72 Ravine, course NW. Descend 28 ft. to
24.44 Same ravine, course NE. Descend gradual slope to
33.00 Enter wash, 120 lks. wide, 4 ft. deep, course N. from S E.
40.00 Leave same wash, course NW. Ascend rolling SW. slope.
Set an iron post, 3 ft. long, 1 in. in diam., 5 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., marked on brass cap,

S 2 1/4 | S 1
1915

24. Subdivision of Township 3 South, Range 23 West.

Chains

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Ascend 128 ft. to
 45.60 Spur, slopes SE. Descend NE. slope, 131 ft. to
 60.00 Ravine, course SW. Ascend SE. slope, 34 ft. to
 64.00 Descend 22 ft. to
 65.72 Ravine, course SE. Ascend SW. slope, 162 ft. to
 69.66 Sharp rocky ridge, brs. NW. and SE. Descend steep NE. slope
 195 ft. to
 77.35 Ravine, course NW. Ascend SW. slope.
 80.26 Intersect S. bdy. of T. 2 S., R. 23 W., 4, 4 chs. E. of true cpt. for
 cor. of secs. 35 and 36, witnessed 75 lks. E. of cor. point,
 as hereinbefore described. At point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., on surface
 rock, in mound of stone, for closing cor. of secs. 1 and
 2, marked on brass cap,

T2S
 S 35 | S 36
 --- CC --- R23W
 S2 | S1
 T3S
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, SE.
 of cor. 10 ft. dist.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and ironwood.
 Undergrowth, greasewood.

From the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp.,
 hereinbefore described,
 N. $0^{\circ}1'W.$, bet. secs. 34 and 35.
 Over rolling land, through scattering timber and under-
 growth.
 14.00 Wash, 130 lks. wide, 8 ft. deep, course SW.
 18.00 Ravine, course SW.
 22.00 Old wagon road, brs. NE. and SW. Extends N. to Parker & S. to Yuma.
 23.40 Enter wash, 10 ft. deep, course SW.
 26.00 Leave wash, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the
 ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec.
 cor., marked on brass cap,

S34 | S 35
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of
 cor.
 Ascend along SW. slope, 68 ft. to
 47.50 Descend along rolling SW. slope to
 57.60 Prospect hole brs. W. 125 lks. dist.
 77.70 Ravine, course W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 26, 27, 34 and 35, marked on brass cap,

T 3S R23W
 S27 | S26
 S34 | S35
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde, ironwood and catclaw.
 Undergrowth, greasewood.

Chains

N. 89° 42' E. on a random line bet. secs. 26 and 35.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.17 Intersect N. and S. line, 21 lks. N. of cor. of secs.
 25, 26, 35 and 36.
 Thence
 S. 89° 51' W. on a true line bet. secs. 26 and 35.
 Over rolling land, through scattering timber and under-
 growth.
 Asc. along SE. slope, 40 ft. to
 4.57 Ridge brs. N. and S. Desc. SW. slope, 253 ft. to
 14.38 Ravine, course SW. Desc. 24 ft. to
 18.31 Ravine, course SW. Asc. 112 ft. to
 26.67 Spur slopes SW. Desc. 221 ft. to
 38.60 Ravine, course SW. Asc. 17 ft. to
 40.08 $\frac{1}{2}$ Set an iron post, 3 ft. long, on surface rock, in a mound
 of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 26

$\frac{1}{4}$

S 35

1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 Desc. 21 ft. to
 44.90 Gulch, course S.
 Wagon road brs. NW. and S. Ascend. 48 ft. to
 47.00 Desc. 27 ft. to
 49.77 Ravine, course SE. Asc. SE. slope, 235 ft. to
 60.67 Ridge brs. N. and S. Desc. W. slope, 352 ft. to
 80.17 The cor. of secs. 26, 27, 34 and 35.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. 0° 1' W. bet. secs. 26 and 27.
 Over rolling mountainous land, through scattering timber
 and undergrowth.
 3.30 Ravine, course SW.
 6.00 Same ravine, course SE.
 7.30 Same ravine, course SW.
 10.00 Same ravine, course SE.
 14.97 Same ravine, course SW. Asc. rolling SE. slope, 62 ft. to
 20.37 Spur slopes NE. Desc. along SW. slope, 40 ft. to
 37.04 Rocky point slopes W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 27 $\frac{1}{4}$ | S 26

1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.
 Desc. 56 ft. to
 44.46 Ravine, course SW. Asc. 125 ft. to
 48.00 Spur slopes SW. Asc. along SE. slope, 222 ft. to
 63.00 Desc. NE. slope, 263 ft. to
 76.80 Head of ravine, course NE. Asc. SE. slope 42 ft. to
 78.00 Desc. gradual slope to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in
 the ground, for cor. of secs. 22, 23, 26 and 27, mkd.
 on brass cap

26

24

Subdivision of T. 3 S., R. 23 W.

Chains

T 3S R23W
 S22 | S23
 S27 | S26
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

- 40.00 N. $89^{\circ}42'$ E. on a random line bet. secs. 23 and 26.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.31 Intersect N. and S. line, 28 lks. N. of cor. of secs.
 23, 24, 25 and 26.
 Thence
 S. $89^{\circ}54'$ W. on a true line bet. secs. 23 and 26.
 Over rolling land, through scattering timber and under-
 growth.
 24.31 Desc. W. slope, 172 ft. to
 Ravine, course NE. Asc. 96 ft. to
 28.97 Rocky point slopes SW. Desc. 119 ft. to
 40.15 $\frac{1}{8}$ Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 23

$\frac{1}{4}$

S 26

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

- 41.37 Ravine, course NW.
 43.31 Same ravine, course SW.
 48.16 Gulch, course N. Desc. rolling slope to
 59.21 Ravine, course N. Asc. 123 ft. to
 68.91 Spur slopes NW. Desc. 96 ft. to
 73.16 Ravine, course N.
 76.77 Ravine, course N. Asc. gradual E. slope, 17 ft. to
 80.31 The cor. of secs. 22, 23, 26 and 27.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

- 22.15 N. $0^{\circ}1'$ W. bet. secs. 22 and 23.
 38.73 Over rolling land, through scattering timber, and under-
 growth.
 40.00 Asc. gradually over rolling E. slope to
 Spur slopes E. Desc. NW. slope, 205 ft. to
 Ravine, course NE. Asc. 30 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor.; mkd. on brass cap

S22 $\frac{1}{2}$ | S23

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.

Note: Diagrams of cor. markings of the corners herein
 described, are in accordance with Surveyor Kimmel's
 verbal and diagrammatic instructions. NA

Subdivision of T. 3 S., R. 23 W.

Chains

43.17 Desc. 60 ft. to
 Ravine, course NE.
 47.32 Ravine, course NW. Asc. gradual slope to
 57.82 Spur slopes SE Desc. to
 67.78 Ravine, course NW. Asc. to
 74.00 Desc. 87 ft. to
 76.36 Ravine, course W.
 77.41 Ravine, course SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs., 14, 15, 22 and 23, mkd. on brass cap

T 3S R23W
 S15 | S14
 S22 | S23
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and ironwood.
 Undergrowth, greasewood.

* See
 NOTE
 26A

40.00 N. 89° 42' E. on a random line bet. secs. 14 and 23.
 80.14 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 10 lks. N. of true point for cor.
 of secs. 13, 14, 23 and 24.
 Thence
 S. 89° 46' W. on a true line bet. secs. 14 and 23.
 Over rolling land, through scattering timber & undergrowth
 Witness cor. to cor. of secs. 13, 14, 23 and 24 (W. of cor. point).
 0.10 Ravine, course NE. Asc. SE. slope, 75 ft. to
 2.15 Spur slopes NE. Descend NW. slope,
 7.00 Ravine, course NE. Asc. 93 ft. to
 11.80 Ridge brs. NE. and SW. Desc. NW. slope, 165 ft. to
 15.40 Ravine, course NW. Asc. 66 ft. to
 20.86 Ridge brs. NW. and SE. Desc. gradual slope.
 26.44 Spur slopes S. Desc. 60 ft. to
 33.70 Ravine, course N. Asc. 28 ft. to
 37.98 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
 40.07 the ground, to solid rock, in a mound of stone, for
 ¼ sec. cor.;, mkd. on brass cap

S 14
 ¼
 S 23
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor.
 Desc. 35 ft. to
 44.81 Ravine, course NW. Asc. 38 ft. to
 47.04 Spur slopes NE. Desc. gradual slope to
 50.08 Ravine, course NE. Asc. 30 ft. to
 53.74 Spur slopes SW. Desc. 120 ft. to
 80.14 The cor. of secs. 14, 15, 22 and 23.
 Land rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

Subdivision of T. 3 S. R. 23 W.

Chains

N. 0° 1' W. bet. secs. 14 and 15.
 Over rolling and hilly land, through scattering timber
 and undergrowth.
 Asc. 87 ft. to
 7.18 Spur slopes W. Asc. S. slope, 125 ft. to
 13.80 Spur slopes E. Desc. N. slope, 186 ft. to
 23.40 Asc. 39 ft. to
 26.16 Spur slopes W. Desc. 79 ft. to
 30.97 Ravine, course NW.
 40.00 True point for $\frac{1}{4}$ sec. cor., falls in wash, course NW.
 therefore at
 40.35 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
 the ground, to solid rock, in a mound of stone, for
 W. C. to $\frac{1}{4}$ sec. cor., mkd. on brass cap

S15 | S14
 W $\frac{1}{4}$
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Desc. 45 ft. to
 59.84 Enter wash, 5 ft. deep, course W.
 64.19 Old wagon road brs. NW & SE. Extends N. to Parker & S. to Yuma.
 65.24 Leave wash, course W. Asc. SW. slope, 56 ft. to
 71.63 Spur slopes W. Desc. 29 ft. to
 74.19 Ravine, course W. Asc. SW. slope, 67 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 10, 11, 14 and 15, mkd. on brass cap

T 3S R23W
 S10 | S11
 S15 | S14
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 11 and 14.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect N. and S. line, 17 lks. N. of cor. of secs.
 11, 12, 13 and 14.
 Thence
 S. 89° 45' W. on a true line bet. secs. 11 and 14.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. SW. slope, 74 ft. to
 9.27 Ravine, course N. Asc. 108 ft. to
 16.98 Spur slopes NW. Desc. 89 ft. to
 21.32 Ravine, course NW. Asc. 82 ft. to
 27.98 Spur slopes N. Desc. 145 ft. to
 31.21 Ravine, course SW. Asc. 71 ft. to
 34.33 Spur slopes S. Desc. 70 ft. to
 39.99 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
 the ground, to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 11
 $\frac{1}{4}$
 S 14
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.

Subdivision of T. 3 S. R. 23 W.

Chains

42.63 Desc. 54 ft. to
 45.60 Ravine, course NW. slope.
 67.68 Ravine, course N. Asc. along NE. slope, 216 ft. to
 71.48 Spur slopes N. Desc. along N. slope, 21 ft. to
 79.98 Spur ridge brs. NW. and SE. Desc. SW. slope, 99 ft. to
 The cor. of secs. 10, 11, 14 and 15.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. 0° 1' W. bet. secs. 10 and 11.
 Over rolling mountainous land, through scattering timber
 and undergrowth.

.54 Asc. gradual slope to
 .86 Foot of cliff brs. NW. and SE. Asc. 81 ft. to
 1.80 Top of cliff. Asc. to
 6.70 Spur slopes W. Asc. 52 ft. to
 33.30 Ridge brs. E. and W. Desc. along E. slope, 332 ft. to
 40.00 Ravine, course NW. Asc. along rolling W. slope, 93 ft. to
 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
 the ground, to solid rock, in a mound of stone, for
 ¼ sec. cor., mkd. on brass cap.

S10 ¼ | S11
 1915

and raise a mound of stone, 2 ft. base, 1 ½ ft. high,
 W. of cor.

44.93 Desc. 81 ft. to
 49.97 Ravine, course W.
 53.34 Ravine, course W.
 62.20 Ravine, course SW. Asc. SW. slope, 52 ft. to
 67.40 Ravine, course SW. Asc. 142 ft. to
 76.47 Spur slopes NW. Desc. NW. slope, 152 ft. to
 80.00 Ravine, course W.
 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the
 ground, to solid rock, in a mound of stone, for
 cor. of secs. 2, 3, 10 and 11, mkd. on brass cap

T 3S R23W
 S 3 | S 2
 S10 | S11
 1915

and raise a mound of stone, 2 ft. base, 1 ½ ft. high,
 W. of cor.

Land, rolling and hilly.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 2 and 11.
 80.06 Set temp. ¼ sec. cor.
 Intersect N. and S. line, 14 lks. N. of cor. of secs.
 1, 2, 11 and 12.

Thence
 S. 89° 48' W. on a true line bet. secs. 2 and 11.
 Over rolling land, through scattering timber and under-
 growth.

.54 Desc. 20 ft. to
 8.56 Ravine, course NE. Asc. 103 ft. to
 12.60 Spur slopes NW. Desc. 93 ft. to
 17.00 Head of ravine course N. Asc. gradual slope to
 22.00 Desc. 48 ft. to
 Asc. gradual slope to

20 Subdivision of ~~Block~~. T. 3 S., R. 23 W.

Chains 26.
 26.90 Spur slopes N. Desc. 87 ft. to
 32.70 Ravine, course NW. Asc. 54 ft. to
 36.00 Desc. 29 ft. to
 38.54 Ravine, course NE.
 40.03 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 2
 $\frac{1}{4}$
 S 11
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Asc. E. slope, 181 ft. to
 49.16 Spur slopes NE. Thence over rolling land, to
 54.76 Spur slopes N. Desc. W. slope, 151 ft. to
 57.00 Ravine, course NW.
 64.40 Same ravine, course SW. Asc. 26 ft. to
 65.60 Same ravine, course N. Asc. 40 ft. to
 70.86 Spur slopes N. Desc. 115 ft. to
 75.15 Ravine, course SW.
 78.17 Ravine, course S. Asc. 43 ft. to
 80.06 The cor. of secs. 2, 3, 10 and 11.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.


N. $0^{\circ} 1'$ W. on a true line bet. secs. 2 and 3.
 Over rolling land, through scattering timber and undergrowth.
 Asc. SW. slope, 24 ft. to
 1.86 Ravine, course SE. Asc. 214 ft. to
 13.13 Spur slopes SW. Desc. 81 ft. to
 15.87 Head of ravine, course W. Asc. 50 ft. to
 19.23 Spur slopes W. Desc. along NW. slope, 74 ft. to
 24.10 Asc. 27 ft. to
 27.90 Ridge brs. E. and W. Desc. NE. slope, 91 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., on surface rock in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S $3\frac{1}{4}$ S 2
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
 Over rolling land.
 47.50 Spur slopes NW. Desc. NE. slope, 118 ft. to
 55.30 Wash, 150 lks. wide, 3 ft. deep, course NW. Asc. 20 ft. to
 58.00 Desc. gradual slope to
 60.28 Ravine course SE. Asc. SW. slope 188 ft. to
 80.56 Intersect S. bdy. of ~~Block~~. T. 2 S., R. 23 W., 4.45 chs. E. of the cor. of secs. 34 and 35, hereinbefore described. At point of intersection,
 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, to solid rock, in a mound of stone, for C. C. of secs. 2 and 3, mkd. on brass cap

Subdivision of Tract. T. 3 S., R. 23 W.

Chains

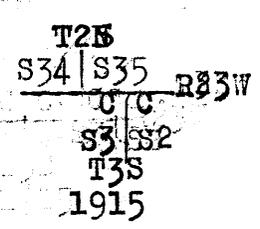

and raise a mound of stone, 2 ft. base, 1½ ft. high,
S. of cor.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

From true point for cor. of secs. 3, 4, 33 & 34, on S. bdy. of Tp.,
witnessed 30 lks. S. 89° 42' W., as hereinbefore described,
N. 0° 2' W. bet. secs. 33 and 34.


- 2.39
- 6.09
- 8.31
- 11.84
- 16.68
- 20.25
- 25.05
- 40.00
- 39.50

Over rolling land, through scattering timber and under-
growth.
Desc. 67 ft. to
Ravine, course W. Asc. gradual slope to
Spur slopes NW. Desc. 60 ft. to
Ravine, course W. Asc. 67 ft. to
Desc. 76 ft. to
Ravine, course W. Foot of mountains brs. NE. and SW.
Thence over gently rolling land.
Ravine, course W. Asc. gradual slope to
Low divide brs. NW. and SE.
True point for ¼ sec. cor., falls in ravine course NW.
therefore at
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for W. C. to ¼ sec. cor., mkd. on brass
cap



- 42.50
- 51.99
- 56.47
- 75.50
- 80.00

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Ravine, course NE. Desc. 14 ft. to
Same ravine, course NW.
Ravine, course NW.
Enter ravine course N.
True point for sec. cor. falls in ravine, therefore at
a point 80 lks. W. of true point,
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
the ground, for W. C. to cor. of secs. 27, 28, 33 and
34, mkd. on brass cap



from which,
An iron wood, 8 ins. diam., brs. N. 61° E.
44 lks. dist. mkd. W C T 3 S R 23 W S 27 B T.
An iron wood, 14 ins. diam., brs. S. 32° E.
90 lks. dist. mkd. W. C T 3 S R 23 W S 34 B T.
No other trees within limits.
Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

Subdivision of T. 3 S., R. 23 W.

Chains From the true point for cor. of secs. 27, 28, 33 and 34,
 N. 89° 42' E. on a random line bet. secs. 27 and 34.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.,
 79.96 Intersect N. and S. line, 9 lks. S. of cor. of secs.
 26, 27, 34 and 35.
 Thence
 S. 89° 38' W. on a true line bet. secs. 27 and 34.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. 18 ft. to
 1.78 Ravine, course S. Asc. SE. slope, 155 ft. to
 10.00 Spur slopes S. Desc. 185 ft. to
 20.60 Ravine, course SE. Asc. E. slope, 111 ft. to
 26.76 Spur slopes S. Desc. W. slope, 210 ft. to
 33.12 Ravine, course SE. Asc. 69 ft. to
 36.74 Spur slopes S. Desc. 108 ft. to
 39.76 Head of gulch, course SW.
 39.98 Set an iron post, 3 ft. long, 1 ins. in diam., 18 ins. in
 the ground to solid rock, in a mound of stone, for
 $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 27
 $\frac{1}{4}$
 S 34
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 N. of cor.
 Desc. 36 ft. to
 44.46 Ravine, course SW. Desc. gradual slope to
 52.26 Ravine, course NW.
 66.70 Ravine, course NW.
 71.30 Ravine, course NW.
 79.96 The true point for cor. of secs. 27, 28, 33 and 34.
 Land, rolling.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

From the true point for cor. of secs. 27, 28, 33 and 34,
 N. 0° 2' W. bet. secs. 27 and 28.
 Over gently rolling land, through scattering timber and
 undergrowth.
 1.00 Leave ravine, from S. to NW.
 7.90 Ravine, course NW.
 24.30 Ravine, course NW.
 32.80 Ravine, course NW.
 40.00 Ravine, course W. True point for $\frac{1}{4}$ sec. cor.,
 in ravine, at
 40.50 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for W. C. to $\frac{1}{4}$ sec. cor., mkd. on brass
 cap

S28 | S27
 WC $\frac{1}{4}$
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
 W. of cor.
 Asc. gradual slope.
 45.75 Ravine, course NW.
 67.00 Enter wash, course NW.
 75.70 Leave wash, course NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 21, 22, 27 and 28, mkd. on brass cap

T 3S R23W
 S21 | S22
 S28 | S27
 1915

Subdivision of land T. 3 S., R. 23 W.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 22 and 27.
 Set temp. ¼ sec. cor.
 79.96 Intersect N. and S. line, 2 lks. N. of cor. of secs. 22,
 23, 26 and 27.

Thence
 S. 89° 43' W. on a true line bet. secs. 22 and 27.
 Over rolling land, through scattering timber and under-
 growth.
 Asc. E. slope, to
 1.60 Ridge brs. N. and S. Asc. along SE. slope to
 15.45 Spur slopes S. Desc. 20 ft. to
 21.00 Asc. 120 ft. to
 24.46 Spur slopes S. Desc. gradual slope to
 28.40 Asc. 61 ft. to
 30.65 Spur slopes SW. Desc. 219 ft. to
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for ¼ sec. cor., mkd. on brass cap

S 22
 ¼
 S 27
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 N. of cor.
 Asc. 76 ft. to
 46.76 Spur slopes NW. Desc. SW. slope, 374 ft. to
 58.93 Ravine, course SW. Asc. 59 ft. to
 67.26 Spur slopes SW. Desc. 17 ft. to
 69.64 Gulch, course SW. Asc. 63 ft. to
 73.64 Spur slopes SW. Desc. SW. slope, 134 ft. to
 76.96 Foot of mountains brs. NW. and SE.
 79.96 The cor. of secs. 21, 22, 27 and 28.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. 0° 2' W. bet. secs. 21 and 22.
 Over rolling mountainous land, through scattering timber
 and undergrowth.
 Asc. 23 ft. to
 9.60 Gulch, course W. Asc. along SW. slope, 226 ft. to
 27.00 Desc. along NW. slope, 183 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
 the ground, to solid rock, in a mound of stone,
 for ¼ sec. cor., mkd. on brass cap

S21¼ | S22
 1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Desc. 99 ft. to
 53.62 Ravine, course W. Desc. gradual slope to
 57.29 Ravine, course W.
 63.45 Asc. SW. slope, 120 ft. to
 71.40 Spur slopes SE.

Subdivision of T. 3 S. R. 23 W.

Chains

76.00 Desc. over rolling land to
 Spur slopes NE. Desc. N. slope, 78 ft. to .
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 15, 16, 21 and 22, mkd. on brass cap

T 3S R23W
 S16|S15
 S21|S22
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Land, rolling, and hilly.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 15 and 22.
 Set temp. 1/4 sec. cor.
 79.96 Intersect N. and S. line, at cor. of secs. 14, 15, 22.
 and 23.

Thence
 S. 89° 42' W. on a true line bet. secs. 15 and 22.
 Over rolling land, through scattering timber and under-
 growth.

3.69 Desc. 16 ft. to
 Ravine, course SW. Asc. SE. slope, 90 ft. to
 15.00 Ridge brs. NE. and SW. Desc. 52 ft. to
 18.70 Asc. 18 ft. to
 26.70 Spur slopes N.
 Desc. 27 ft. to
 28.46 Spur slopes N. Desc. 96 ft. to
 32.96 Ravine, course NW. Desc. 16 ft. to
 36.10 Ravine, course N. Asc. 45 ft. to
 37.96 Spur slopes NE.
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in
 the ground, to solid rock, in a mound of stone, for
 1/4 sec. cor., mkd. on brass cap

S 15
 1/4
 S 22
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 N. of cor.

43.56 Asc. gradual slope to
 Spur slopes N. Desc. 70 ft. to
 54.08 Ravine, course SW. Ascend. over rolling land to
 67.66 Spur ridge brs. N. and S. Desc. 23 ft. to
 77.00 Ravine, course NW. Asc. 27 ft. to
 79.96 The cor. of secs. 15, 16, 21 and 22.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

Subdivision of Tract, T. 3 S. R. 23 W.

Chains

N. 0° 2' W. bet. secs. 15 and 16.
 Over rolling land, through scattering timber and undergrowth.
 Desc. 38 ft. to
 4.06 Ravine, course W. Asc. gradual slope to
 10.45 Ravine, course W. Asc. 18 ft. to
 19.75 Spur slopes W. Desc. 42 ft. to
 27.54 Ravine, course W. Asc. 33 ft. to
 33.00 Spur slopes NW. Desc. 32 ft. to
 34.57 Ravine, course W. Asc. 34 ft. to
 39.70 Spur slopes SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S16 $\frac{1}{4}$ |S15
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Desc. 55 ft. to
 49.46 Ravine, course W. Asc. S. slope, 52 ft. to
 55.00 Ridge brs. E. and W. Desc. 48 ft. to
 59.19 Ravine, course NW. Asc. SW. slope, 68 ft. to
 63.15 Spur slopes W. Desc. 36 ft. to
 64.82 Gulch, course W. Asc. 89 ft. to
 69.75 Spur slopes NW. Desc. 156 ft. to
 75.35 Ravine, course W. Asc. 82 ft. to
 79.75 Ridge brs. NW. and SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 7 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 9, 10, 15 and 16, mkd. on brass cap

T 3S R23W
 S 9|S10
 S15|S15
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 10 and 15.
 80.00 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 16 lks. S. of cor. of secs. 10, 11, 14 and 15.

Thence
 S. 89° 35' W. on a true line bet. secs. 10 and 15.
 Over rolling land, through scattering timber and undergrowth.

Desc. SW. slope, 139 ft. to
 11.20 Ravine, course SE. Desc. gradual slope to
 29.00 Enter wash, course NW.
 30.00 Old wagon road in wash, brs. NW & SE. Extends N. to Parker & S. to / Yuma.
 34.25 Leave wash, course NW. Asc. 65 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor.;, mkd. on brass cap

S 10
 $\frac{1}{4}$
 S 15
 1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor. 8 ft. dist. (Could not raise mound on N.)

Subdivision of T. 3 S. R. 23 W.

Chains
 40.15 Spur slopes NW. Desc. 72 ft. to
 42.70 Ravine, course NW. Asc. 45 ft. to
 44.14 Spur slopes NW. Desc. 46 ft. to
 46.10 Ravine, course NW. Asc. 65 ft. to
 52.00 Spur ridge brs. NW. and SE. Desc. 61 ft. to
 56.37 Ravine, course NW. Asc. 60 ft. to
 60.00 Spur slopes N. Desc. 47 ft. to
 64.27 Ravine, course N. Asc. 68 ft. to
 71.75 Spur slopes NW. Desc. 68 ft. to
 77.36 Head of gulch, course N. Asc. NE. slope, 63 ft. to
 80.00 The cor. of secs. 9, 10, 15 and 16.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. 0° 2' W. bet. secs. 9 and 10.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. 114 ft. to
 11.60 Ravine, course NW. Asc. SW. slope, 76 ft. to
 19.40 Ridge brs. NW. and SE. Desc. NE. slope, 136 ft. to
 33.23 Enter wash, 6 ft. dee, course W.
 34.33 Old wagon road brs. E. & W. Extends N. to Parker & S. to Yuma.
 38.00 Leave wash, course W. Asc. 68 ft. to
 39.80 Ridge brs. E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground, to solid rock, in a mound of stone, for
 ¼ sec. cor., mkd. on brass cap

S 9 1/4 | S10
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Desc. 80 ft. to
 50.80 Ravine, course NW. Asc. 25 ft. to
 57.50 Spur slopes NW. Desc. 34 ft. to
 59.35 Ravine, course NW. Asc. gradual slope to
 62.40 Spur slopes W. Desc. 39 ft. to
 64.62 Wash, 75 lks. wide, 10 ft. deep, course W. Asc. 48 ft. to
 70.30 Spur slopes SW.
 73.30 Spur slopes NW. Desc. 59 ft. to
 76.69 Ravine, course W. Asc. 43 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 3, 4, 9 and 10, mkd. on brass cap

T 3S R23W
 S 4 | S 3
 S 9 | S10
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Land, rolling and hilly.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 3 and 10.
 Set temp. 1/2 sec. cor.
 79.89 Intersect N. and S. line, 14 lks. S. of cor. of secs.
 2, 3, 10 and 11.
 Thence

Subdivision of Tract, T. 3 S., R. 23 W.

Chains

S. 89° 36' W. on a true line bet. secs. 3 and 10.
Over rolling land, through scattering timber and undergrowth.

Asc. gradual slope to
1.39 Spur slopes SE. Desc. SW. slope, 117 ft. to
8.26 Ravine, course NW. Asc. 30 ft. to
9.55 Desc. 26 ft. to
12.95 Same ravine, course SE. Asc. 127 ft. to
17.89 Spur slopes SE. Desc. gradual slope 20 ft. to
25.90 Ridge brs. NW. and SE. Thence over rolling land to
34.90 Spur slopes S. Desc. gradual slope to
39.94 1/2 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., mkd. on brass cap

S 3
1/4
S 10
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Desc. gradual slope to
41.36 Ravine, course S. Asc. 39 ft. to
44.69 Spur slopes SE. Desc. gradual slope over rolling land, to
47.24 Ravine, course N. Asc. NE. slope, 66 ft. to
51.89 Ridge brs. NW. and SE. Desc. SW. slope 86 ft. to
61.40 Ravine, course N. Asc. 60 ft. to
65.69 Spur slopes N. Desc. NW. slope, 93 ft. to
68.51 Ravine, course SW. Asc. 23 ft. to
71.40 Desc. gradual slope to
76.16 Ravine, course SW. Asc. 42 ft. to
79.89 The cor. of secs. 3, 4, 9 and 10.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

N. 0° 2' W. on a true line bet. secs. 3 and 4.
Over rolling land, through scattering timber and undergrowth.


Asc. gradual slope to
.40 Spur slopes W. Desc. 25 ft. to
1.45 Ravine, course W. Asc. SW. slope, 38 ft. to
5.25 Spur slopes W. Asc. 180 ft. to
16.00 Ridge brs. NW. and SE. Desc. NE. slope, 132 ft. to
26.00 Ravine, course SE. Asc. gradual slope to
28.10 Spur slopes SE. Desc. NE. slope, 68 ft. to
31.81 Ravine, course SE. Asc. SW. slope 104 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

S 4 1/4 | S 3
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Asc. 14 ft. to
42.00 Ridge brs. NW. and SE. Desc. NE. slope, 153 ft. to
51.13 Ravine, course NE. Asc. SE. slope, 85 ft. to
58.80 Spur slopes NE. Desc. NW. slope, 103 ft. to
64.18 Head of gulch, course NW. Asc. gradual slope to
69.00 Desc. 69 ft. to
74.15 Wash, 60 lks. wide, 3 ft. deep, course W. Asc. S. slope, 79 ft. to
81.21 Intersect S. bdy. of T. 2 S., R. 23 W. 4.46 chs. E. of true pt. for cor. of secs. 33 and 34, hereinbefore described.
At point of intersection Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, to solid rock, in a mound of stone, for C. G. of secs. 3 and 4, mkd. on brass cap

Chains



and raise a mound of stone, 2 ft. base, 1½ ft. high,
S. of cor.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp. N. 0° 2' W. bet. secs. 32 and 33. (hereinbefore described.)

- Over rolling land, through scattering timber and undergrowth.
- Desc. 18 ft. to
- 1.25 Ravine, course E. Asc. gradual slope to
- 14.10 Ravine, course SW. Asc. S. slope, 126 ft. to
- 17.00 Spur slopes SW. Desc. 53 ft. to
- 20.38 Head of ravine, course NW. Asc. 69 ft. to
- 25.40 Spur slopes W. Desc. 26 ft. to
- 30.00 Asc. 66 ft. to
- 34.30 Spur slopes W. Desc. gradual slope to
- 37.60 Ridge brs. NW. and SE. Desc. 40 ft. to
- 40.00 True point for ¼ sec. cor., falls in gulch, course NE. therefore at
- 40.30 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, to solid rock, in a mound of stone, for W. C. to ¼ sec. cor., mkd. on brass cap



- and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
- Desc. 26 ft. to
- 41.23 Head of ravine course E. Asc. 42 ft. to
- 43.75 Spur slopes W. Desc. 89 ft. to
- 47.17 Ravine, course E. Asc. gradual rolling slope to
- 49.90 Spur slopes E. Desc. 80 ft. to
- 55.00 Asc. 38 ft. to
- 62.00 Spur slopes NE. Desc. 73 ft. to
- 64.32 Ravine, course E. Asc. 50 ft. to
- 66.85 Spur slopes NE. Desc. 65 ft. to
- 69.14 Ravine, course NE. Asc. S. slope 54 ft. to
- 76.05 Spur slopes E. Desc. 30 ft. to
- 77.31 Ravine, course E. Asc. SE. slope, to
- 80.00 True point for sec. cor., falls on sloping bed rock, therefore at
- 79.75 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, in a mound of stone, for W. C. to cor. of secs. 28, 29, 32 and 33, mkd. on brass cap



and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

Subdivision of T. 3 S. R. 23 W.

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, mkd. on brass cap

T3 S R23W
S20|S21
S29|S28
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

40.00

N. 89° 42' E. on a random line bet. secs. 21 and 28. Set temp. 1/4 sec. cor.

79.98

Interssct N. and S. line, 2 lks. N. of cor. of secs. 21, 22, 27 and 28.

Thence

S. 89° 43' W. on a true line bet. secs. 21 and 28.

Over rolling land, through scattering timber and undergrowth.

4.38

Enter ravine, course W.

8.98

Leave same ravine, course SW.

10.70

Ravine, course N. Asc. 20 ft. to

13.52

Spur slopes N. Desc. 57 ft. to

16.08

Ravine, course N.

18.40

Ravine, course NE. Asc. 93 ft. to

25.98

Ridge brs. NE. and SW. Desc. 122 ft. to

37.82

Ravine, course N. Asc. 30 ft. to

39.99

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

S 21

1/4

S 28.

1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

59.08

Asc. gradual slope to

75.73

Ridge brs, NW. and SE. Desc. 111 ft. to

78.62

Ravine, course N.

79.98

Ravine, course NE. Asc. 22 ft. to

The cor. of secs. 20, 21, 28 and 29.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and ironwood.

Undergrowth, greasewood.

11.09

N. 0° 2' W. bet. secs. 20 and 21.

22.60

Over rolling land, through scattering timber and undergrowth.

31.60

Desc. 21 ft. to

34.00

Ravine, course NW. Asc. 88 ft. to

40.00

Ridge brs. NE. and SW. Desc. 52 ft. to

Spur slopes NW. Descend.

Ravine course NW. Ascend.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor. mkd. on brass cap

Subdivision of Twp. 4 S., R. 23 W.

Chains

S20 1/2 | S21
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

40.10 Spur slopes NW. Desc. 67 ft. to
46.10 Ravine, course NW. Asc. 29 ft. to
57.10 Spur slopes W. Desc. 66 ft. to
62.20 Box canytn 30 lks. wide, 25 ft. deep. course NW. Asc. 11
ft. to
64.20 Desc. 23 ft. to
66.47 Ravine, course NW. Asc. gradual slope to
68.70 Desc. 15 ft. to
69.87 Ravine, course W. Asc. 72 ft. to
78.00 Desc. 25 ft. to
79.85 Ravine, course W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in
the ground, for cor. of secs. 16, 17, 20 and 21, mkd.
on brass cap

T 3S R23W
S17 | S16
S20 | S21
1915

and raise a mound of stone 2 ft. base, 1 1/2 ft. high,
W. of cor.

Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 16 and 21.
Set temp. 1/4 sec. cor.
80.03 Intersect N. and S. line, 7 lks. N. of cor. of secs. 15,
16, 21 and 22, mkd. on brass cap

Thence
S. 89° 45' W. on a true line bet. secs. 16 and 21.
Over rolling land, through scattering timber and under-
growth.
Asc. 35 ft. to
6.10 Spur slopes N. Desc. NW. slope, 73 ft. to
8.18 Gulch, course NE. Asc. 31 ft. to
15.03 Ridge brs. NW. and SE. Desc. 50 ft. to
24.47 Ravine, course SE. Asc. 34 ft. to
33.53 Ridge brs. NW. and SE. Desc. gradual slope to
40.01 1/4 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, in a mound of stone, for 1/4 sec. cor., mkd.
on brass cap

S 16
1/4
S 21
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
N. of cor.

Asc. 17 ft. to
41.73 Spur slopes N. Desc. gradual slope, 40 ft. to
47.48 Gulch, course N. Asc. 62 ft. to
50.53 Spur slopes NE. Desc. 75 ft. to
57.73 Ravine, course NW. Asc. gradual slope to
72.63 Spur slopes N. Desc. 76 ft. to
78.14 Ravine, course SW.
80.03 The cor. of secs. 16, 17, 20 and 21.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

Chains

N. 0° 2' W. bet. secs. 16 and 17.
Over rolling land, through scattering timber and undergrowth

Asc. 62 ft. to
4.35 Spur slopes W. Desc. 61 ft. to
8.04 Ravine, course W. Asc. 38 ft. to
11.00 Desc. 15 ft. to
12.74 Gulch, course SW. Asc. 80 ft. to
22.46 Divide brs. E. and W. Desc. 47 ft. to
26.50 Gulch, course W. Asc. 44 ft. to
30.40 Ridge brs. NW. and SE. Desc. 76 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 17 $\frac{1}{2}$ | S 16
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Desc. 15 ft. to
42.59 Ravine, course NW. Asc. gradual slope to
57.75 Spur slopes NW. Desc. 112 ft. to
67.79 Ravine, course W. Desc. gradually over rolling land.
75.30 Ravine, course W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, mkd. on brass cap

T 3S R23W
S. 8 | S 9
S 17 | S 16
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and hilly.
Soil, rocky, 4th-rate, conglomerate formation.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 9 and 16.
79.96 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 28 lks. N. of cor. of secs. 9, 10, 15 and 16.
Thence
S. 89° 54' W. on a true line bet. secs. 9 and 16.
Over rolling land, through scattering timber and undergrowth.
.15 Ridge brs. NW. and SE. Desc. 74 ft. to
7.00 Asc. 29 ft. to
11.75 Spur slopes SW. Desc. 98 ft. to
18.62 Ravine, course N. Asc. 126 ft. to
22.05 Spur slopes N. Desc. 40 ft. to
27.50 Ridge brs. NW. and SE. Desc. gradual slope to
35.20 Spur slopes S. Desc. 68 ft. to
38.20 Ravine, course SW. Asc. 28 ft. to
39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 9.
S 16.
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Subdivision of land, T. 3 S. R. 23 W.

Chains

52.80 Asc. SE. slope, 74 ft. to
 61.30 Ridge brs. NE. and SW. Desc. 160 ft. to
 68.20 Head of gulch, course N. Asc. 29 ft. to
 79.96 Spur slopes NW. Desc. 106 ft. to
 The cor. of secs. 8, 9, 16 and 17.
 Land, rolling.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. 0° 2' W. bet. secs. 8 and 9.
 Over rolling land, through scattering timber and under-
 growth.

Desc. 18 ft. to
 1.98 Ravine, course W. Asc. 46 ft. to
 7.47 Spur slopes SW. Desc. 29 ft. to
 12.45 Ravine, course SW. Asc. 99 ft. to
 19.30 Spur ridge brs. NE. and SW. Desc. 65 ft. to
 24.32 Gulch, course W. Asc. 46 ft. to
 26.70 Spur slopes SW. Desc. 24 ft. to
 27.63 Ravine, course W. Asc. 139 ft. to
 36.00 Ridge brs. E. and W. Desc. NW. slope, 42 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 81 | S 9
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Desc. 126 ft. to
 51.71 Gulch, course NW. Asc. 40 ft. to
 60.20 Spur slopes NW. Desc. 99 ft. to
 67.52 Enter wash, 6 ft. deep, course NW.
 68.60 Old wagon road in wash, brs. NW. & SE. Extends N. to Parker & S. to Yuma.
 69.40 Leave wash, course NW. Asc. rocky SW. slope 126 ft. to
 74.30 Spur slopes NW. Desc. 86 ft. to
 78.59 Gulch, course W. Thence over rolling land to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in
 the ground, for cor. of secs. 4, 5, 8 and 9, mkd. on
 brass cap

T 3S R23W
 S 5 | S 4
 S 8 | S 9
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.

Land, rolling and hilly.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 4 and 9.
 79.98 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 12 lks. N. of cor. of secs.
 3, 4, 9 and 10.
 Thence
 S. 89° 47' W. on a true line bet. secs. 4 and 9.

41 42

Subdivision of T. 3 S. R. 23 W.

Chains

Over rolling land, through scattering timber and undergrowth.
 Desc. broken W. slope, 44 ft. to
 4.73 Ravine course S. Asc. 69 ft. to
 9.68 Spur slopes S. Desc. 72 ft. to
 12.60 Ravine course S. Asc. 95 ft. to
 15.98 Spur slopes S. Desc. 117 ft. to
 21.60 Ravine, course SW. Asc. 15 ft. to
 23.98 Spur slopes SW. Desc. 50 ft. to
 27.44 Ravine, course, S. Asc. 57 ft. to
 34.14 Ridge brs. NW. and SE. Thence over rolling land to
 37.14 Spur slopes S. Desc. gradual slope to
 39.99 True point for $\frac{1}{4}$ sec. cor., falls in ravine, course S.,
 therefore at
 40.18 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the
 ground, to solid rock, in a mound of stone, for witness
 cor. to $\frac{1}{4}$ sec. cor., mkd. on brass cap

$$\begin{array}{c} S 4 \\ S 9 \end{array} WC \frac{1}{4}$$

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 Asc. gradual slope to
 42.43 Spur slopes SW.
 45.23 Spur slopes SW. Desc. 94 ft. to
 53.58 Ravine, course NW. Desc. 22 ft. to
 55.17 Same ravine, course SW. Asc. 40 ft. to
 60.00 Desc. 42 ft. over rolling land to
 63.98 Ravine, course NW. Asc. 32 ft. to
 67.55 Spur slopes NW. Desc. 46 ft. to
 69.53 Ravine, course SW. Asc. 46 ft. to
 72.55 Spur slopes S. Desc. 40 ft. to
 75.32 Ravine, course NW. Asc. gradual slope, 16 ft. to
 78.00 Desc. 23 ft. to
 79.98 The cor. of secs. 4, 5, 8 and 9.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

N. $0^{\circ} 2' W.$ on a true line bet. secs. 4 and 5.
 Over rolling land, through scattering timber and undergrowth

Desc. to
 1.20 Ravine, course SW. Asc. 85 ft. to
 12.54 Spur slopes SE. Asc. to
 17.04 Spur ridge brs. NE. and SW. Desc. 20 ft. to
 18.20 Head of ravine, course SW. Asc. 123 ft. to 21.90
 21.90 Spur slopes SW. Thence along SW. slope. Desc. 35 ft. to
 28.01 Spur ridge brs. NW. and SE. Asc. 72 ft. to
 32.52 Ridge brs. NE. and SW. Desc. 65 ft. to
 35.75 Spur slopes NW. Desc. N. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., on bed rock, in
 a mound of stone, for $\frac{1}{2}$ sec. cor., mkd. on brass
 cap.


$$S 5\frac{1}{2} | S 4$$

1915.

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 W. of cor.
 Desc. 72 ft. to
 50.90 Wash, 120 lks. wide, 4 ft. deep, course W. Asc. SW. slope
 21 ft. to
 56.50 Desc. 39 ft. to


Subdivision of Encl. T. 3 S. R. 23 W.

Chains
 62.66 Ravine, course SW. Asc. 35 ft. to
 64.20- Spur slopes W. Desc. 31 ft. to
 65.96 Ravine, course W. Asc. 40 ft. to
 68.40 Spur slopes NW. Desc. 52 ft. to
 70.99 Ravine, course W. Asc. 65 ft. to
 73.40 Spur slopes W. Desc. 27 ft. to
 76.35 Ravine, course SW. Asc. steep rocky SE. slope, 175 ft. to
 81.40 Intersect S. bdy. of T. 2 S., R. 23 W., 371 lks. E. of the
 cor. of secs. 32 and 33, hereinbefore described.
 At point of intersection
 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in
 the ground, to solid rock, in a mound of stone, for
 C. C. of secs. 4 and 5, mkd. on brass cap



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 S. of cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

From the cor. of secs. 5, 6, 31 and 32, ^{on} S. bdy. of Tp.,
 hereinbefore described,
 N. 0° 3' W. bet. secs. 31 and 32.
 Over rolling land, through scattering timber and under-
 growth.
 Asc. steep S. slope, 112 ft. to
 2.75 Foot of cliff brs. E. and W. 121 ft. high. Asc. 121 ft.
 3.55 Top of cliff brs. E. and W. Desc. N. slope, 59 ft to
 7.14 Head of ravine, course W. Asc. N. slope, to
 10.03 Top of cliff brs. NW. and SE. 100 ft. high. Desc. 470 ft.
 to
 26.31 Gulch, course SW. Asc. S. slope, 264 ft. to
 37.34 Asc. short slope to
 37.75 Foot or cliff brs E. and W. about 100 ft. high.
 Thence over rolling land to
 40.00 True point for 1/4 sec. cor., falls on steep slope,
 therefore at a point 60 lks. W. of true point,
 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
 the ground, to solid rock, in a mound of stone, for
 W. C. to 1/4 sec. cor.; mkd. on brass cap



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 W. of cor.
 This cor. falls at foot of cliff which brs. N. and S.
 47.25 Foot of cliff brs. SE. and N. Desc. N. slope, 150 ft. to
 52.21 Head of gulch, course NW. Asc. SW. slope, 32 ft. to
 56.58 Spur slopes W. Desc. NW. slope, 89 ft. to
 63.04 Gulch, course W. Asc. rolling S. slope, 38 ft. to
 77.75 Ridge brs. E. and W. Desc. 25 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in
 the ground, to solid rock, in a mound of stone, for
 cor. of secs. 29, 30, 31 and 32, mkd. on brass cap

Chains

T 3S R23W.
S30|S29
S31|S32
1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
W. of cor.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

40.00

N. 89° 42' E. on a random line bet. secs. 29 and 32.

80.04

Set temp. ¼ sec. cor.

Intersect N. and S. line, 9 lks. S. of true point for cor. of
secs. 28, 29, 32 and 33.

Thence

S. 89° 38' W. on a true line bet. secs. 29 and 32.

Over rolling land, through scattering timber and under-
growth.

Asc. E. slope, 74 ft. to

3.50

Spur slopes NE. Desc. W. slope, 85 ft. to

8.50

Thence over gently rolling land to

9.15

Desc. 126 ft. to

14.46

Ravine, course NW. Asc. 115 ft. to

19.80

Spur slopes NW. Desc. W. slope, 107 ft. to

24.50

Ravine, course SW. Desc. 43 ft. to

291.84

Same ravine, course NW. Asc. 131 ft. to

35.00

Spur slopes N. Desc. 113 ft. to

40.02

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for ¼ sec. cor., mkd. on brass cap

S 29

¼

S 32

1915

and raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of cor.

Desc. NW. slope, 111 ft. to

40.90

Ravine, course SW. Asc. 71 ft. to

44.00

Spur slopes S. Desc. W. slope, 102 ft. to

48.40

Ravine, course S. Asc. 83 ft. over rolling S. slope to

57.60

Ridge brs. N. and S. Desc. SW. slope, 58 ft. to

61.65

Ravine, course NW. Asc. gradual slope to

64.45

Spur slopes N. Desc. over rolling land, 88 ft. to

76.90

Ravine, course SW.

79.25

Same ravine, course NW.

80.04

The cor. of secs. 29, 30, 31 and 32.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

40.00

S. 89° 42' W. on a random line bet. secs. 30 and 31.

82.39

Set temp. ¼ sec. cor.

Intersect W. bdy. of Tp., 28 lks. S. of the reestablished
cor. of secs. 30, 31, and fract. secs. 25 and 36, hereinbe-
fore described. Thence,

N. 89° 54' E. on a true line bet. secs. 30 and 31.

Over rolling land, through scattering timber and under-
growth.

2.89

Asc. NW. slope, 38 ft. to

8.58

Spur ridge slopes SW. thence asc. along ridge 46 ft. to

Top of spur ridge brs. N. and S. to SW. Desc. E. slope,
136 ft. to

Subdivision of T. 3 S., R. 23 W.

Chains

16.49 Ravine, course SW. Thence over rolling hills and small ridges.

42.39 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 30

$\frac{1}{4}$

S 31

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Desc. 37 ft. to

51.50 Ravine, course NW. Asc. 46 ft. to

56.00 Thence over level land to

58.50 Desc. 41 ft. to

61.86 Ravine, course SW. Asc. SW. slope, 152 ft. to

68.80 Spur slopes S. Desc. 69 ft. to

72.30 Spur slopes S. Desc. SE. slope, 53 ft. to

80.54 Ravine, course SW. Asc. NW. slope to

82.39 The cor. of secs. 29, 30, 31 and 32.

Land, rolling.

Soil, rocky, 4th rate.

Timber, scattering palo verde and iron wood.

Undergrowth, greasewood.

N. 0° 3' W. bet. secs. 29 and 30.

Over rolling land, through scattering timber and undergrowth

Desc. 22 ft. to

1.25 Intersection of two ravines from SE. and NE. to SW. Asc. rolling S. slope, 61 ft. to

7.80 Ridge brs. E. and W. Thence asc. along rolling W. slope, 14 ft. to

10.00 Desc. 29 ft. to

15.12 Ravine, course SW. Asc. SE. slope, 118 ft. to

20.69 Ridge brs. E. and W. Desc. NE. slope, 287 ft. to

34.96 Ravine, course W. Asc. over rolling hills, 50 ft. to

39.00 Desc. 17 ft. to

39.30 Gulch, course SW.

40.00 True point for $\frac{1}{4}$ sec. cor., falls in gulch, therefore at

39.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, to solid rock, in a mound of stone, for W. C. to $\frac{1}{4}$ sec. cor., mkd. on brass cap

WC $\frac{1}{4}$

S30 | S29

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. SW. slope, 132 ft. to

49.01 Spur slopes SW. Desc. along W. slope, 46 ft. to

59.00 Asc. 14 ft. to

60.27 Ravine, course SW. Asc. SE. slope, 146 ft. to

64.55 Rocky spur slopes W. Desc. NE. slope, 191 ft. to

73.16 Ravine, course NW. Asc. broken slope of spur sloping S. 152 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for cor. of secs. 20, 29, 30, and ~~frac. sec. 19~~, marked on brass cap,

T 3S R23W

S19 | S20.

S30 | S29

1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Chains

Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

40.00 N. 89° 42' E. on a random line bet. secs. 20 and 29.
Set temp. $\frac{1}{4}$ sec. cor.
79.81 Intersect N. and S. line, 18 lks. S. of cor. of secs.
20, 21, 28 and 29.

Thence
S. 89° 34' W. on a true line bet. secs. 20 and 29.
Over rolling land, through scattering timber and under-
growth.

Desc. 35 ft. to
5.37 Ravine, course N.
7.90 Ravine, course N. Asc. 46 ft. to
11.20 Ridge brs. NE. and SW. Desc. 80 ft. to
19.91 Ravine, course N.
26.14 Ravine, course NE. Asc. 48 ft. to
39.90 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 20

$\frac{1}{4}$

S 29

1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.

Desc. 13 ft. to
43.09 Ravine, course NE. Foot of mountains brs. NE. and SW.
Asc. SE. slope, 180 ft. to
49.60 Spur slopes SE. Asc. 26 ft. to
53.04 Ridge brs. N. and S. Desc. W. slope, 129 ft. to
58.00 Gulch, coursx NW. Asc. 14 ft. to
59.13 Spur slopes N. Desc. 19 ft. to
60.09 Gulch, course NE. Asc. along a NE. slope, 109 ft. to
68.40 Ridge brs. NW. and SE. Desc. along SW. slope, 135 ft. to
74.06 Asc. 61 ft. to
79.81 The cor. of secs. 20, 29, 30 and fracl. sec. 19.

Land, rolling.
Soil, rocky, conglomerate formation, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

40.00 S. 89° 42' W. on a random line bet. sec. 30, & fracl. sec. 19.
Set temp. $\frac{1}{4}$ sec. cor.,
82.70 Intersect W. bdy. of Tp., 12. lks. S. of reestablished cor.
of sec. 30 and fracl. sec. 19, 24 and 25, hereinbefore described.

Thence
N. 89° 47' E. on a true line bet. sec. 30, and fracl. sec. 19.
Over rolling land, through scattering timber and under-
growth.

Desc. SE. slope, 70 ft. to
3.39 Ravine, course SE. Asc. SW. slope, to
7.80 Desc. 28 ft. to
8.37 Ravine, course SW. Asc. W. slope, 91 ft. to
12.35 Spur slopes N. Desc. NE slope 50 ft. to
17.06 Head of ravine, course N. Asc. SW. slope, 28 ft. to
19.42 Spur ridge slopes NW. Desc. NE. slope, 52 ft. to
24.36 Ravine, course NW. Asc. W. slope, 17 ft. to
27.81 Ridge brs. N. and S. Desc. E. slope, 41 ft. to
29.71 Head of ravine, course N. Asc. W. slope, 45 ft. to
32.41 Spur ridge slopes N. Desc. E. slope, 40 ft. to
33.56 Head of ravine, course N. Asc. W. slope, 144 ft. to

Chains

38.72 Ridge brs. N. and S. Desc. E. slope, 123 ft. to
42.70 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

S 19
1/4
S 30
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

44.30 Desc. 50 ft. to Ravine, course NE. Asc. 240 ft. to
63.72 Ridge brs. NE. and SW. Desc. SE. slope, 205 ft. to
76.67 Ravine, course SW. Asc. 169 ft. to
82.70 The cor. of secs. 20, 29, 30 and frac. sec. 19. Land, rolling. Soil, rocky, 4th rate. Timber, scattering palo verde and iron wood. Undergrowth, greasewood.

N. 0° 3' W. bet. sec. 20, and frac. sec. 19. Over rolling land, through scattering timber and undergrowth.

1.88 Asc. S. slope of spur 31 ft to
14.75 Top of spur slopes NW. Desc. NW. slope, 72 ft. to
18.64 Ravine, course NW. Asc. 20 ft. to
22.75 Desc. 58 ft. to
30.24 Ravine, course SW. Asc. SE. slope, 31 ft. to
37.54 Ridge brs. NW. and SE. Desc. NE. slope, 23 ft. to
40.00 Spur slopes NE. Desc. N. slope, 31 ft. to
Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, in a mound of stone, for 1/4 sec. cor., mkd. on brass cap

S 19 1/2 | S 20
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

41.50 Desc. 52 ft. to
47.37 Gulch, course NW. Asc. SW. slope, 86 ft. to
53.72 Point of spur slopes W. Desc. NW. slope, 80 ft. to
59.74 Same gulch, course NE. Asc. SE. slope, 54 ft. to
71.07 Point of spur slopes NE. Desc. NE. slope, 75 ft. to
75.52 Same gulch; course NW. Asc. steep S. slope, 136 ft. to
80.00 Rocky point slopes SW. Desc. NW. slope, 30 ft. to
Head of ravine, course SW. True point for reestablished cor. of secs. 17, 20, and frac. secs. 18 and 19. falls, in ravine; therefore at

79.80 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, for W. C. to reestablished cor. of secs. 17, 20, and frac. secs. 18 and 19, marked on brass cap.

T 3S R 23W
S 18 | S 17
W C
S 19 | S 20
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.
Soil, rocky 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

Subdivision of T. 3 S. R. 23 W.

Chains

From true point ^{reestablished} for cor. of secs. 17, 20, & frac. secs. 18 & 19,
 N. 89° 42' E. on a random line bet. secs. 17 and 20.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.68 Intersect N. and S. line, at cor. of secs, 16, 17, 20 and
 21.
 Thence
 S. 89° 42' W. on a true line bet. secs. 17 and 20.
 Over rolling land, through scattering timber and under-
 growth.
 Desc. rolling SW. slope, 23 ft. to
 16.36 Ravine, course SW. Thence over gently rolling land to
 19.20 Desc. 49 ft. to
 23.43 Ravine, course S.
 34.57 Foot of mountains brs. N. and S. Asc. SE. slope, 142 ft
 to
 39.84 Set an iron post, 3 ft. long, 1 in. diam., on bed rock,
 in a mound of stone, for $\frac{1}{4}$ sec. cor., mkd. on brass
 cap

S 17
 $\frac{1}{4}$
 S 20
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 Asc. 52 ft. to
 42.58 Spur slopes SW. Desc. SW. slope, 198 ft. to
 52.20 Ravine, course SE. Asc. 72 ft. to
 56.45 Spur slopes S. Asc. along SE. slope, 184 ft. to
 70.35 Spur ridge brs. SW. Desc. steep SW. slope, 293 ft. to
 79.68 The true point for cor. of secs. 17 & 20, and frac. secs. 18 & 19.
 Land, rolling and hilly.
 Soil, rocky, 4th rate, conglomerate formation.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

RESURVEY.

From the true point for cor. of secs. 17, 20, & frac. secs. 18 & 19,
 S. 89° 42' W. on a random line bet. frac. secs. 18 and 19.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.70 Fall 25 lks. S. of M. C. of frac. secs. 18 and 19,
 hereinafter described.
 Thence
 N. 89° 53' E. on a true line bet. frac. secs. 18 and 19.
 Over rolling land, through scattering timber and under-
 growth, along river bottom.
 3.60 Destroy old M. C. which brs. N. 2° 15' E., 208 lks. dist.
 5.30 Wagon road brs. N & S. Extends N. to Parker and S. to Yuma.
 7.80 Leave river bottom, brs. N. and S. Thence over small
 rolling hills.
 24.87 Ravine, course SW. Asc. W. slope, 80 ft. to
 29.02 Low spur slopes S. Desc. SE. slope, 41 ft. to
 31.12 Ravine, course SW.
 32.17 Same ravine, course NW. Asc. SW. slope, 99 ft. to
 37.74 Ridge brs. NW. and SE. Desc. NE. slope, 39 ft. to
 39.70 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in
 the ground, to solid rock, in a mound of stone, for re-
 estab. $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 18
 $\frac{1}{4}$
 S 19
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
 N. of cor.
 Desc. 20 ft. to
 41.23 Ravine, course NW. Asc. NW. slope, 168 ft. to
 49.55 Ridge brs. N. and S.

Chains

57.34
63.52
70.67
79.70

Desc. SE. slope, 204 ft. to
Ravine, course NE. Desc. over rolling land, 30 ft. to
Ravine, course NW. Asc. 194 ft. to
Spur slopes SW. Desc. rolling SE. slope, 271 ft. to
True point for ^{reestablished} cor. of secs. 17, 20, and ~~fracl. secs. 18 and 19.~~
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

reestab.

From the true point for ^{reestab.} cor. of secs. 17, 20, and ~~fracl. secs. 18 and 19,~~
N. 0° 3' W. bet. sec. 17, and ~~fracl. sec. 18.~~
Over rolling land, through scattering timber and under-
growth.

7.85
11.63
18.20
22.73
30.24
39.56
40.00

Asc. S. slope, 244 ft. to
Ridge brs. NW. and SE. Desc. NE. slope, 96 ft. to
Ravine, course NW. Asc. SW. slope, 143 ft. to
Ridge brs. NW. and SE. Desc. NE. slope, 139 ft. to
Ravine, course NE. Asc. SE. slope, 48 ft. to
Spur slopes E. Desc. NE. slope, 114 ft. to
Spur slopes NE. Desc. NW. slope,
Set an iron post, 3 ft. long, 1 in. diam., on bed rock,
in a mound of stone, for ^{reestablished} sec. cor., mkd. on brass
cap

S 18 1/4 | S17
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

44.13
57.06
59.66
65.92
71.37
73.47
76.74
78.50
80.00

Desc. 118 ft. to
Ravine, course NW. Asc. rolling SW. slope, 199 ft. to
Ridge brs. E. and W. Desc. N. slope, 87 ft. to
Ravine, course NW. Asc. SW. slope, 27 ft. to
Spur slopes W. Desc. NW. slope, 78 ft. to
Ravine, course W. Asc. S. slope, 41 ft. to
Ridge brs. E. and W. Desc. N. slope, 83 ft. to
Ravine, course NW. Asc. SW. slope, 63 ft. to
Spur slopes SW. Desc. NW. slope,
Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the
ground, to solid rock, in a mound of stone, for reestab.
cor. of secs. 8, 17, and ~~fracl. secs. 7 and 18,~~ marked on
brass cap,

T 3S R23W
S 7 | S 8
S18 | S17
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.

Land, rolling and hilly.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

SURVEY.

40.00
79.64

N. 89° 42' E. on a random line bet. secs. 8 and 17.
Set temp. 1/4 sec. cor.
Intersect N. and S. line, 9 lks. S. of cor. of secs.
8, 9, 16 and 17.

Thence
S. 89° 38' W. on a true line bet. secs. 8 and 17.
Over rolling land, through scattering timber and under-
growth.

5.27

Desc. 19 ft. to
Ravine, course SW. Desc. gradual slope to

Chains

7.37 Ravine, course NW. Asc. gradual slope to
 24.25 Spur slopes N. Desc. gradual slope to
 28.46 Ravine, course NE. Asc. 72 ft. to
 32.90 Spur slopes NE. Desc. 97 ft. to
 39.82 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in.
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 8
 $\frac{1}{4}$
 S 17
 1915

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ t. high,

N. of cor.
 Desc. 19 ft. to
 43.29 Ravine, course NE. Asc. 142 ft. to
 55.35 Ridge brs. N. and S. Desc. W. slope, 148 ft. to
 62.68 Ravine, course SW. Asc. 36 ft. to
 66.21 Spur slopes SW. Desc. 49 ft. to
 67.74 Ravine, course SW. Asc. 89 ft. to
 71.30 Spur slopes S. Desc. along spur 40 ft. to
 77.10 End of spur, Desc. W. slope, 70 ft. to
 79.64 The cor. of secs. 8, 17 and fracl. secs. 7 and 18.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood.
 Undergrowth, greasewood.

West on a true line bet. fracl. secs. 7 and 18.
 Over rolling land, through scattering timber and undergrowth.

7.15 Ravine, course SW.
 22.40 Destroy old cor. of secs. 7, 8, 17 and 18, which brs.
 N. $54^{\circ} 55'$ W. 213 lks. dist.
 Desc. 40 ft. to
 7.35 Ravine, course NW. Asc. NE. slope, 64 ft. to
 10.38 Spur slopes NW. Thence over rolling NW. slope, Desc.
 100 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in.
 the ground, for $\frac{1}{4}$ sec. cor., mkd. on brass cap

S 7
 $\frac{1}{4}$
 S 18
 1915

from which,

An iron wood, 12 ins. diam., brs. N. $52\frac{1}{2}^{\circ}$ W.
 42 lks. dist. mkd. $\frac{1}{4}$ S 7 B T.

No other trees within limits.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

41.00 Enter wash, course NW.
 43.50 Leave wash, course NW. Asc. NE. slope, 41 ft. to
 48.00 Desc. 31 ft. to
 51.80 Wagonroad brs. N & S. Extends N. to Parker, and S. to Yuma.
 Enter river bottom and dense growth of undergrowth.
 52.20 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in.
 the ground, for M. C. of fracl. secs. 7 and 18, mkd.
 on brass cap

T3SR23W
 S 7
~~S 18~~
 1915

from which,

Chains

A mesquite limb 6 ins. diam., brs. S. 52 1/2° E.
9 lks. dist. mkd. T 3 S R 23 W S 18 M C B T.
A mesquite, 5 ins. diam., brs. N. 25 1/4° E.
33 lks. dist. mkd. T 3 S R 23 W S 7 M C B T.

Land, gently rolling.
Soil, rocky, 4th rate.
Timber, scattering mesquite.
Undergrowth, arrow weed.

RESURVEY.

N. 0° 3' W. bet. sec. 8, and fracl. sec. 7.
Over rolling and hilly land, through scattering timber and undergrowth.

.35 Ravine, course SW. Asc. SE. slope, 112 ft. to
6.46 Spur slopes SW. Desc. NW. slope, 113 ft. to
14.40 Ravine, course NW. Asc. SW. slope, 66 ft. to
17.70 Spur slopes NW. Desc. NW. slope, 31 ft. to
20.66 Ravine, course SW. Asc. SW. slope, 67 ft. to
24.57 Spur slopes SW. Desc. NW. slope, 56 ft. to
27.76 Gulch, course SW. Asc. SW. slope, 36 ft. to
30.00 Spur slopes W. Thence along W. slope. Desc. 17 ft. to
33.00 Spur slopes NW. Desc. NE. slope, 34 ft. to
37.48 Ravine, course NW. Asc. SW. slope, 20 ft. to
39.02 Spur slopes NW. Desc. NE. slope, 20 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground, for 1/4 sec. cor., mkd. on brass cap
reestab.

S 7 1/4 | S 8
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
W. of cor.
Desc. 88 ft. to
44.08 Gulch, course W. Asc. S. slope, 122 ft. to
49.30 Spur slopes SW. Thence along W. slope to
51.60 Desc. 53 ft. to
56.52 Ravine, course SW. Asc. SE. slope, 55 ft. to
58.52 Spur slopes SW. Desc. NW. slope, 37 ft. to
61.05 Ravine, course SW. Asc. SE. slope, 63 ft. to
64.10 Spur slopes SW. Desc. NW. slope, 57 ft. to
71.58 Head of gulch, course NW. Asc. to 73.40
73.40 Desc. N. slope, 51 ft. to
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in
the ground, to solid rock, in a mound of stone, for
reestab. cor. of secs. 5, 8, and fracl. 6 and 7, marked on brass
cap,

T 3 S R 23 W
S 6 | S 5
S 7 | S 8
1915

from which
An iron wood, 12 ins. diam., brs. N. 3 1/4° E.
72 lks. dist. mkd. T 3 S R 23 W S 5 B T.

No other trees within limits.
Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
Timber, scattering palo verde and iron wood.
Undergrowth, greasewood.

SURVEY.

40.00 N. 89° 42' E. on a random line bet. secs. 5 and 8.
79.56 Set temp. 1/2 sec. cor.
Intersect N. and S. line, 7 lks. S. of cor. of secs. 4,
5, 8 and 9.
Thence

Chains

S. 89° 39' W. on a true line bet. secs. 5 and 8.
 Over rolling land, through scattering timber and under-
 growth.
 1.50 Ravine, course SW. Asc. 23 ft. to
 3.98 Spur slopes S. Desc. 36 ft. to
 5.16 Ravine, course S. Asc. 84 ft. to
 8.10 Spur slopes S. Desc. 104 ft. to
 16.11 Ravine, course S. Asc. 106 ft. to
 22.40 Rocky point slopes S. Desc. 53 ft. to
 25.68 Ravine, course S. Asc. E. slope, 65 ft. to
 28.30 Spur slopes S. Desc. 102 ft. to
 34.91 Ravine, course S. Asc. steep E. slope, 94 ft. to
 37.34 Spur slopes S. Desc. 28 ft. to
 39.04 Spur slopes SW. Desc. to
 39.78 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in
 the ground, to solid rock, in a mound of stone, for
 1/4 sec. cor., mkd. on brass cap

S 5
 $\frac{1}{4}$
 S 8
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 SE. of cor. 4 ft. dist. (Could not raise mound N. of
 cor. on account of slope.)

Desc. 52 ft. to
 42.06 Ravine, course S. Asc. 60 ft. to
 43.80 Spur slopes S. Desc. SW. slope, 101 ft. to
 48.28 Ravine, course S. Asc. 85 ft. to
 50.80 Spur slopes S. Desc. SW. slope, 112 ft. to
 64.82 Enter wash, 6 ft. deep, course NW.
 69.43 Old wagon road in wash, brs. NW. and SE. Extends N. to Parker & Sto
 70.10 Leave wash, course NW. Thence along rolling N. slope to Yuma
 79.56 The ^{reestablished} cor. of secs. 5, 8, and fracl. secs. 6 and 7.
 Land, rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde and iron wood..
 Undergrowth, greasewood.

West on a true line bet. fracl. secs. 6 and 7.
 Over gently rolling land, through scattering timber and
 undergrowth.


36.15 Old wagon road brs. NE. and SW.
 37.85 Old adobe house brs. S. 2 ft. dist.
 38.18 U. S. L. M. No. 1258B, which is a post, as described by
 the Surveyor General brs. S. 48° 30' W., 3.51 chs.
 dist.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for 1/4 sec. cor., mkd. on brass cap

S 6
 $\frac{1}{4}$
 S 7
 1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high,
 N. of cor.

40.60 Foot of hills brs. NE. and SW.
 46.00 Enter river bottom brs. N. and S.
 46.50 Wagon road brs. N. & S. Extends N. to Parker & S. to Yuma.
 57.70 Slough brs. N. and S., 5 ft. deep, 100 lks. wide.
 67.30 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, for M. C. of fracl. secs. 6 and 7, mkd.
 on brass cap

Chains

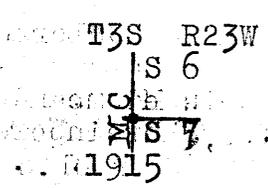

from which,

- A willow, 8 ins. diam., brs. N. $1\frac{1}{2}^\circ$ W. 32 lks. dist. mkd. T 3 S R 23 W S 6 M C B T.
- A willow 6 ins. diam., brs. S. 48° E. 36 lks. dist. mkd. T 3 S R 23 W S 7 M C B T.

Land, gently rolling.
 Soil, rocky, 4th rate.
 Timbe, scattering mesquite and willow.
 Undergrowth, arrow weed and greasewood.

RESURVEY

From reestablished cor. of secs. 5, 6, 7 and 8, N. $0^\circ 3' W.$ on a true line bet. sec. 5, and frac. sec. 6. Over rolling land, through scattering timber and undergrowth Desc. N. slope to Enter wash, course W. Old wagon road brs. E. and W. Extends N. to Parker & S. to Yuma, Leave wash, course W. Asc. 48 ft. to Ridge brs. NW. and SE. Desc. 34 ft. to Gulch, course NW. Asc. gradual slope to Desc. 29 ft. to Gulch, course NW. Asc. 20 ft. to Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{2}$ sec. cor., mkd. on brass cap


- .45
- 2.80
- 14.80
- 16.60
- 21.60
- 23.10
- 28.00
- 40.00



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 41.70
- 52.70
- 62.25
- 64.40
- 77.62
- 79.00
- 81.71
- 78.91

Desc. 15 ft. to Foot of hills brs. SW. and NE. Enter wash, course SW. Leave wash, course SW. Asc. 56 ft. to Spur slopes SW. Desc. 35 ft. to Gulch, course SW. Desc. over rolling land, 63 ft. to Foot of hills brs. E. and W. Enter wash, course W. Intersect S. bdy. of T. 2 S., R. 23 W. 4.53 chs. E. of the original cor. of sec. 32 and frac. sec. 31, hereinbefore described. As true point for C. C. of sec. 5, and frac. sec. 6, falls in wash, course W., at Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for W. C. to C. C. of sec. 5 and frac. sec. 6, marked on brass cap,



from which,

- An iron wood limb 5 ins. diam., brs. N. $78\frac{1}{2}^\circ$ E. 90 lks. dist. mkd. WCCC T 3 S R 23 W S 5 B T.
- An iron wood limb 5 ins. diam., brs. N. $43\frac{1}{2}^\circ$ W. 17 lks. dist. mkd. WCCC T 3 S R 23 W S 6 B T.

Land, gently rolling.
 Soil, rocky, 4th rate.
 Timber, scattering palo verde, iron wood and mesquite.
 Undergrowth, greasewood.

Meanders of Left Bank of Colorado River,

within T. 3 S., R. 23 W.

Chains

Meanders of Left Bank of Colorado River, Down Stream.

Commence at reestablished meander cor. of fracl. secs. 6, & 31, on N. bdy. of Tp., hereinbefore described,

Thence with meanders in fracl. sec. 6.

Through dense undergrowth and scattering timber.

- S. 17° W. 35.00 chs. Bank 10 ft. high.
- S. 21° W. 20.00 " " " "
- S. 33° W. 12.00 " " " "
- S. 33° E. 23.00 " " " "

To M. C. of fracl. secs. 6 and 7, hereinbefore described.

Land, level.
Soil, sandy silt, 2nd rate.
Timber, scattering willow.
Undergrowth, dense arrow weed.

Thence in fracl. sec. 7.

Through scattering timber and dense undergrowth.

- S. 28° E. 37.00 chs. Bank 10 ft. high. At 35.00 chs., mouth of slough from N., 100 lks. wide.

- S. 4½° W. 12.00 " At 1.00 ch. leave timber, and continue through undergrowth. At 7.00 chs. gravel point 20 ft. high. At 12.00 chs. gravel point 20 ft. high.

- S. 31¼° E. 4.80 "
- S. 18¼° W. 7.70 " At 7.70 chs. gravel point 20 ft. high.
- S. 3¼° W. 24.00 " At 15.00 chs. gravel point 20 ft. "
- At 23.50 chs. gravel point 20 ft. "
- To the M. C. of fracl. secs. 7 and 18, hereinbefore described.

Land, level river bottom.
Soil, sandy silt, 2nd rate.
Timber, scattering willow and cottonwood.
Undergrowth, dense arrow weed.

Thence in fracl. sec. 18.

Through scattering timber and dense undergrowth.

- S. 11¼° W. 7.00 chs. Bank 10 ft. high. At 7.00 chs. gravel point 20 ft. high.

- S. 15¼° W. 22.00 " To gravel point 15 ft. high.

- S. 18¼° W. 21.00 "

- S. 32° W. 7.50 Small rocky island known as "Light-house Rock" brs. S. 45° W. about 250 lks. dist.

- S. 30° E. 3.50 "

- S. 36¼° W. 11.00 "

- S. 17¼° W. 15.00 " To M. C. of fracl. secs. 18 and 19 hereinafter described.

Land, level river bottom.
Soil, sandy silt, 2nd rate.
Timber, scattering willow.
Undergrowth, dense arrow weed.

From the M. C. of fracl. secs. 19, & 24 on W. bdy. of Tp., hereinbefore described, with meanders in fractional

sec. 19, sec. 19.

Through scattering timber and dense undergrowth.

- N. 16¼° E. 10.00 chs. To a point 2.88 chs. N. 89° 42' E. of true point for cor. of secs. 13, 18, 19 & 24, and 80.00 chs. N. of, reestablished cor. of secs. 19, 24, 25 and 30 on W. bdy. of Tp., hereinbefore described.

Meanders of left bank of Colorado River within T. 3 S. R. 23 W.

Chains

At this point I set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for M. C. of fracl. secs. 18 and 19 mkd. on brass cap

T3S R23W
S18

~~S19~~

1915

from which,

A willow, 6 ins. diam., brs. N. 81° E.
57 lks. dist. mkd. T 3 S R 23 W S 18 M C B T.

A willow 5 ins. diam., brs. S. 84 1/4° E.
54 lks. dist. mkd. T 3 S R 23 W S 19 M C B T.

Land, level bottom land.
Soil, rocky, and gravelly 3rd rate.
Timber, scattering willow.
Undergrowth; dense arrow weed.

GENERAL DESCRIPTION.

This township is situated on the Colorado river about 20 miles in a direct line north from the City of Yuma, which is the nearest important settlement and RR. station. The surface is mountainous, rolling and level, the mountainous land comprising a small area in the eastern part, the level land a narrow strip along the Colorado river in the northwestern part, and the rolling land predominates over the remainder of the township, rising in elevation gradually from the river. The mountains form part of the Trigo range near the SW. extremity of said range. The soil is all rocky, 4th rate, with the exception of the level bottom land along the river, which is sandy and gravelly, 2nd and 3rd rate, suitable for agricultural purposes. Timber consists of palo verde, ironwood, cottonwood, mesquite and willow, the palo verde and ironwood being found over the whole township in a scattering growth, and the cottonwood, mesquite and willow is confined to the river bottom. A scattering growth of greasewood covers the mountainous and rolling land, and a dense growth of arrowweed covers most of the level land. Very little grass was observed. No settlers are located within the township. A patented mining claim in sec. 25, a patented millsite in secs. 6 and 7, and prospect holes in secs. 24, 25, 34 and 36 indicate that certain portions of this township contain minerals of value. Two roads traverse the township, one from SE. to NW. joining in sec. 6 a road running N. and S. along the river. There is no permanent running water within the boundaries of the township. General course of the drainage is west, thru. numerous washes and ravines, into the Colorado river.

Boundaries of Township 3 South, Range 23 West.
Latitudes, departures and Closing Errors.

Line Designated	Bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W
South boundary	S. 89°42' W.	482.52		2.59		482.52
West boundary,	North,	230.40	230.40			
Meander Left Bank of Colo. River,	Various,	Various	251.57		60.57	34.14
North boundary,	N. 89°51' E.	11.34	.03		11.34	
	N. 89°54' E.	40.13	.07		40.13	
	N. 89°56' E. x	89.39	.09		x 89.39	
	East,	324.27			324.27	
East boundary,	South,	479.78		479.78		
Convergency,					.48	
	Totals,		482.16	482.37	517.18	516.66
				482.16	516.66	517.18
	Error in latitude,			0.21		
	Error in departure,				0.52	0.48

x 89.39

517.18

0.52

140
BOOK 3174
60

CERTIFICATE OF UNITED STATES SURVEYOR.

I, William B. Kimmel, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Group 47, Arizona, bearing date of the 5th day of February, 1915, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the South boundary of TOWNSHIP 2 SOUTH, RANGE 23 WEST, the SOUTH and EAST boundaries of the SUBDIVISION LINES, and the MEANDERS of the left bank of the Colorado River, all of TOWNSHIP 3 SOUTH, RANGE 23 WEST, Resurveyed all those parts or portions of the South bdy. of T. 2 S., R. 23 W., the West bdy. and SUBDIVISION LINES of T. 3 S., R. 23 W. and RETRACED all those parts or portions of the SOUTH boundary of T. 2 S., R. 23 W. of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of ~~resurvey and retracement~~ said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Group 47, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey, ~~resurvey and retracement~~.

William B. Kimmel
U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, March 20, 1918.

The foregoing field notes of the Survey of part of the South bdy. of TOWNSHIP 2 SOUTH, RANGE 23 WEST, South, and East bdrs., part of the Subdivision lines, and the Meanders of left bank of the Colorado River, all of TOWNSHIP 3 SOUTH, RANGE 23 WEST, of the Resurvey of part of the South bdy. of T. 2 S., R. 23 W., all of the West bdy. & part of the Subdivision lines of T. 3 S., R. 23 W. and of the Retracement of part of the South bdy. of T. 2 S., R. 23 W. of the Gila and Salt River Base and Meridian, in the State of Arizona, executed by William B. Kimmel, U. S. Surveyor, under his special instructions dated Feby. 5, 1915, for Group 47, Arizona, having been ~~critically examined~~ and the necessary corrections and explanations made, the said field notes, and the surveys, ~~resurveys and retracements~~ they describe, are hereby approved.

Frank R. Cook
U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~has been correctly copied from the original notes on file in this office.~~

U. S. Surveyor General.