

3241

Book "S"

4-679

NOV 23 1914

BOOK 3241

(Subdivisions)

FIELD NOTES

OF THE SURVEY OF THE

SUBDIVISION LINES

of

TOWNSHIP 11 NORTH, RANGE 13 WEST.

Of the Gila and Salt River Base and Meridian,

In the State of Arizona,

EXECUTED BY

Hugo Price

In the capacity of U. S. Transitman under instructions dated July 23, 1914, issued by the United States Surveyor General to govern surveys included in Group No. 36, which were approved by the Commissioner of the General Land Office, August 15, 1914.

Survey commenced February 21, 1917.

Survey completed March 21, 1917.

Executed under Assignment Instructions dated

3241

3241

250
1A


3241
Book "S"

Group 36 --- Arizona.

Township 11 North, Range 13 West.

BOOK 3241

INDEX DIAGRAM.

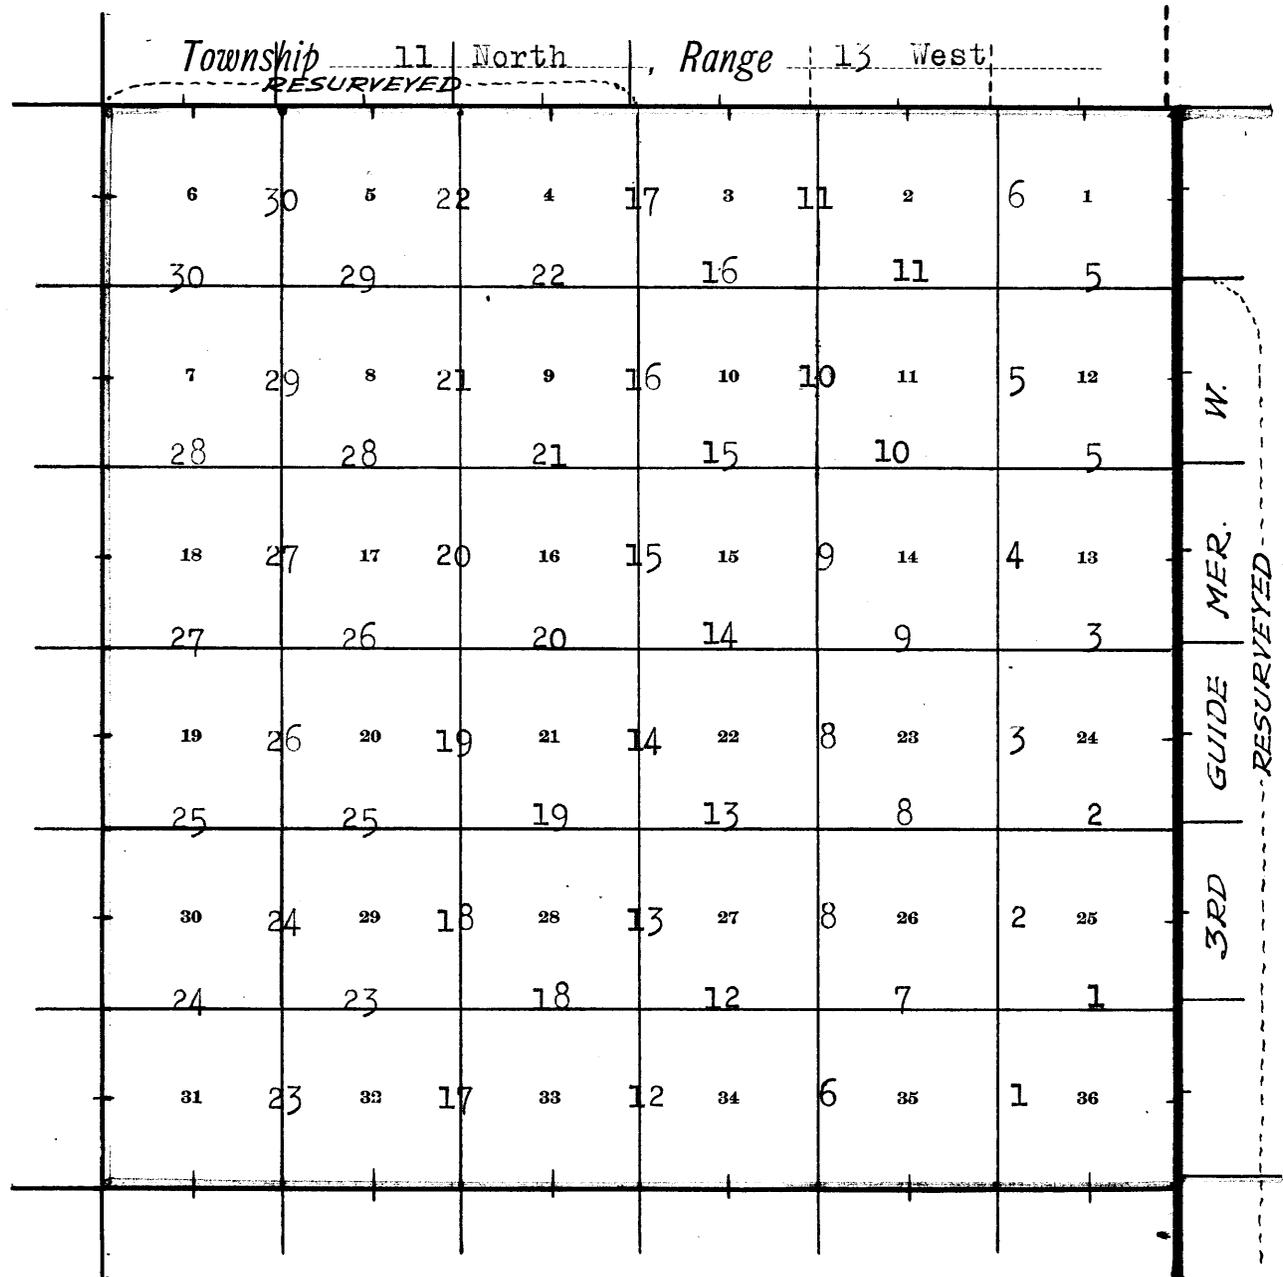

- Subdivision lines surveyed under this group.
- Township boundaries surveyed ^{or resurveyed} under this group.
Notes in Book "A". 3223
- Standard lines ^{surveyed or} resurveyed under this group.
Notes in Book "B". 3224
- Accepted surveys.
- Unsurveyed.

Subdivision of Township 11North, Range 13 West.

Chains.

Surveys hereinafter described were executed by Hugo Price, U. S. Transitman, on dates shown on diagram on page 33 hereof, using a Young and Sons light mountain transit No. 8539.

Description, tests and approval of this instrument in Book "A" of this group.

From the cor. of secs. 1, 2, 35, and 36, on South bdy. of township, as described in Book "A."

N.0°1'W., bet. secs. 35 and 36.

Over rolling land, through scattering undergrowth. Descend NW. slope.

- 5.80 Wash, 70 ft. below cor., 120 lks. wide, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S35|S36
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

- 48.70 Wash, 100 lks. wide, course NW. Descend gradual NW. slope.
- 52.10 Wire fence, bears N. and S. (approx)
- 67.10 Wash, 70 lks. wide, course NW.
- 72.00 Road, bears NE. and SW.
- 78.50 Wash, 20 lks. wide, course W.
- 79.50 Wash, 30 lks. wide, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 25, 26, 35, and 36, marked on brass cap,

T11N R13W
S26|S25
S35|S36
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

From this cor. the SW. cor. of Sherman Rodger's frame house, bears N.12°10'E., 201 lks. dist., and the SE. cor. of Sherman Rodger's frame house, bears N.45°15'W., 402 lks. dist., then the NW. cor. of T. Allen's frame house, bears S.67°10'E., 628 lks. dist.

Land, rolling.
Soil, rocky and sandy, 3rd rate.
Undergrowth, scattering mesquite, greasewood, and palo verde, four to six feet high.
No timber.

- 40.00 N.89°54'E. on a random line bet, secs. 25 and 36. Set temp. $\frac{1}{4}$ sec. cor.
- 79.90 Intersect the East bdy. of Tp. (3rd Guide Mer. W.) 97 lks. N. of the reestablished cor. of secs. 25 & 36, described in Book "B."

- 9.60 Thence, S.89°57'W., On a true line bet. secs. 25 and 36. Over rolling land, through scattering undergrowth. Wash, 180 lks. wide, course NW.
- 24.45 Center of nine small washes draining into one large wash, course NW.
- 39.95 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S25
S36
1915

Subdivision Of Township 11 North, Range 13 West.

Chains,

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.
 57.30 Enter road from NE. and continue along same to cor.
 79.90 The cor. of secs. 25, 26, 35, and 36.
 Land, rolling.
 Soil, rocky and sandy, 3rd and 4th rate.
 Undergrowth, mesquite, palo verde, greasewood, and cactus.
 No timber.

N.0°1'W., bet. secs. 25 and 26.
 Over rolling land, through scattering undergrowth.
 30.12 Wire fence, bears E. and W.
 8.40 Wire fence, bears NE. and SW.
 18.00 Wire fence, bears NW. and SE.
 20.00 Irrigation ditch, 10 lks. wide, course SW.
 22.80 Wire fence, bears E. and W.
 25.00 Enter dense undergrowth NE. and SW.
 30.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the witness corner to $\frac{1}{4}$ sec. cor., marked on brass cap,

WC
 $\frac{1}{4}$ S26 | S25
 1915

A mesquite, 10 ins. in diam. brs. S. $11\frac{1}{2}$ ° E. 14 lks. dist. mkd WC $\frac{1}{4}$ S25 BT
 A mesquite, 10 ins. in diam., brs. S. 62° W. 71 lks. dist. mkd. WC $\frac{1}{4}$ S 26 BT.

And raise a mound of stone, 2 ft. base; $1\frac{1}{2}$ ft. high, W. of cor.
 30.60 Left bank of Bill Williams river, thence across bed of same.
 40.00 Point for $\frac{1}{4}$ sec. cor. falls in river bed.
 42.70 Main channel of river, shallow water 250 lks. wide, course SW
 71.30 Right bank of Bill Williams river.
 75.75 Roads, bears NE. and SW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 23, 24, 25, and 26, marked on brass cap,

T11N R13W
 $\frac{1}{4}$ S23 | S24
 $\frac{1}{4}$ S26 | S25
 1915

from which
 A cottonwood, 24 ins. diam., brs. N. 51° E., 429 lks. dist., marked T 11 N R 13 W S 24 B T
 A mesquite, 10 ins. diam., bears S. 19° 30' E., 157 lks. dist., marked T 11 N R 13 W S 25 B T
 A mesquite, 12 ins. diam., bears S. 32° 30' W., 200 lks. dist., marked T 11 N R 13 W S 26 B T
 A cottonwood, 12 ins. diam., brs. N. 17° 45' W., 168 lks. dist., marked T 11 N R 13 W S 23 B T

Land, rolling.
 Soil, sandy, 3rd. rate.
 Undergrowth, mesquite, cottonwood, arrow-weed, greasewood, and cactus; eight to ten feet high.
 No timber.

N. 89° 57' E., on a random line bet secs. 24 and 25.
 40.00 Set Temp. $\frac{1}{4}$ sec. cor.
 79.86 Intersect the East bdy. of Tp. (3rd. Guide Mer. W.) 9 lks. S. of the reestablished cor. of secs. 24 and 25, described in Book "B." used 20.47 chs. N., as described in Book "B." S. 89° 53' W., on a true line bet secs. 24 and 25.
 Over rolling land, through dense undergrowth.
 7.20 Road, bears NE. and SW. (Forks of roads in wash).
 9.20 Irrigation ditch, bears SW.
 9.50 Wash, 100 lks. wide, course NW. Road in bed of wash.

Subdivision of Township 11 North, Range 13 West.

Chains.

- 10.40 Enter series of small washes, (ten in all) course NW.
- 18.40 Leave land cut by washes; continue in dense undergrowth.
- 23.44 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the witness cor. to $\frac{1}{4}$ sec. cor., marked on brass cap,

WC $\frac{1}{4}$ S 24
S 25
1915

from which

A mesquite, 8 ins. diam., bears N.32°W., 23 lks. dist., marked WC $\frac{1}{4}$ S 24 B T

A mesquite, 8 ins. diam., bears S. 2°E., 6 lks. dist., marked WC $\frac{1}{4}$ S 25 B T

- 24.60 Enter bottom land, bears SW and NE, subject to overflow.
- 29.40 Left bank of Bill Williams River; thence across flood land.
- 39.93 Point for $\frac{1}{4}$ sec. cor. falls in river bed.
- 50.20 Left bank of channel of river.
- 60.00 Center of channel, 350 lks. wide, course SW.
- 76.70 Right bank of bottom land subject to overflow.
- 77.80 Road, bears NE, and SW.
- 79.86 The cor. of secs. 23, 24, 25, and 26.
Land, level and rolling.
Soil, sandy, 2nd rate.
Undergrowth, dense mesquite, catclaw, and greasewood.
No timber.

N.0°1'w., bet. secs. 23 and 24.

Over rolling land, through dense undergrowth.

- 24.10 Road, bears NW. and SE.
- 35.00 Ascend and descend over rolling and rocky land.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins., in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S23|S24
1915

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

From this cor. the south end of house, bears S.54°30'E., 8.00 chs. distance.

- 80.00 True point for cor. of secs. 13, 14, 23, and 24, falls in wash on unsafe ground, establish temp. cor.
Land, rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, mesquite, and greasewood; four to six feet high.
No timber.

N.89°53'E., on a random line bet. secs. 13 and 24.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.84 Intersect the East bdy. of Tp., (3rd Guide Mer. W.) 4 lks. N. of the reestablished true point for the cor. of secs. 13 and 24, witnessed 26, 47 chs. N., as described in Book "B."
From true point for cor.,
S.89°55'W., on true line bet. secs. 13 and 24.
Over rolling land, through dense undergrowth.
In bed of Bill Williams River.
- 20.54 Set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in ground, for the witness cor. to reestablished cor. of secs. 13 and 24, marked on brass cap,

Subdivision of Township, 11 North, Range 13 West.

Chains.

T 11 N
R13W
S13
S24

WC
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is on the right bank of Bill Williams River.

- 26.30 Wash, 40 lks. wide, course SE.
- 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 13
S 24

1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

- 73.60 Wash, 150 lks. wide, course S.
- 78.80 Enter wash, course SE.
- 79.84 The true point for the cor. of secs. 13, 14, 23, and 24. Land, rolling. Soil, rocky, 3rd rate. Undergrowth, palo verde, mesquite, and greasewood. No timber.

N.0°1'W., on a true line bet. secs. 13 and 14 from the true point for the cor. of secs. 13, 14, 23, and 24. Over rolling land, through medium undergrowth.

- 0.30 Center wash, 80 lks. wide, course SE.
- 1.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in ground and supported by mound of stone, for the witness cor. to cor. of secs. 13, 14, 23, and 24, marked on brass cap,

T11N R13W
S14 S13
S23 S24

WC
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

- 3.70 Wash, 100 lks. wide, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 14 S 13

1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

- 48.20 Wash, 20 lks. wide; course SE.
- 76.00 Wash, 50 lks. wide, course SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 11, 12, 13, and 14, marked on brass cap,

T11N R13W
S11 S12
S14 S13

1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, rolling. Soil, rocky, 4th rate.

Subdivision of Township 11 North, Range 13 West.

Chains.

Undergrowth, palo verde, greasewood, and cactus.
No timber.

40.00 N. 89° 55' E., on a random line bet. secs. 12 and 13.
Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect the East bdy. of Twp. (3rd. Guide Mer. W.) 7 lks. N. of
reestablished cor. of secs. 12 and 13, described in Book
"B." Thence,
S. 89° 58' W., on a true line bet. secs. 12, and 13.
Over rolling land, through dense undergrowth.

35.10 Wash, 30 lks. wide, course S.

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
ground and supported by mound of stone, for the $\frac{1}{4}$
sec. cor., marked on brass cap,

$\frac{1}{4}$ S 12
S 13
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of the cor.

41.40 Wash, 20 lks. wide, course SE.

51.20 Wash., 20 lks. wide, course S.

79.90 The cor. of secs. 11, 12, 13, and 14.
Land, rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, and greasewood; four to six
feet high.
No timber.

20.20 N. 0° 1' W., bet. secs. 11 and 12.
Over rolling land, through medium undergrowth.

27.90 Wash, 20 lks. wide, course E.

40.00 Wash, 20 lks. wide, course SW.

Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in
ground and supported by mound of stone, for the $\frac{1}{4}$
secs. cor., marked on brass cap,

$\frac{1}{4}$
S. 11 | S 12
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of the cor.

60.60 Wash, 30 lks. wide, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
ground, for the cor. of secs. 1, 2, 11, and 12,
marked on brass cap,

T11N R13W
S 2 | S 1
S11 | S12
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of the cor.

Land, rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

40.00 N. 89° 58' E., on a random line bet, secs. 1 and 12.
Set temp. $\frac{1}{4}$ secs. cor.

Subdivision of Township 11 North, Range 13 West.

Chains.

- 80.08 Intersect the East bdy. of Tp., (3rd. Guide Mer. W.), 12 lks. N. of reestablished cor. of secs. 1 and 12, described in Book "B." Thence, N. 89° 57' W., on a true line bet. secs. 1 and 12. Over rolling, mountainous land, through medium undergrowth. Descend abrupt, rocky W. slope.
- 8.20 Wash, 180 ft. below cor., 30 lks. wide, course S. Ascend and descend over broken mountain top.
- 36.00 Spur, 60 ft. below wash, slopes SE. Descend W. slope, 40 ft.
- 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

$\frac{1}{4}$ S 1
 S 12
 1917

- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.
- Descend on broken W. slope.
- 64.50 Wash, 300 ft. below cor., 30 lks. wide, course S. Ascend 80 ft. on broken E. slope to sec. cor.
- 80.08 The cor. of secs. 1, 2, 11, and 12. Land, rolling mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus. No timber.

-
- North, on a random line bet. secs. 1 and 2.
 - 40.00 Set temp. 1/4 sec. cor.
 - 81.19 Intersect the North bdy. of Tp., 10 lks. E. of the cor. of secs. 1, and 2, described in Book "A." Thence, S. 0° 4' E., on a true line bet. secs. 1 and 2. Over mountainous land, through medium undergrowth. Ascend N. slope.
 - 9.10 Spur, 90 ft. above cor., slopes E. Descend broken SW. slope.
 - 15.00 Cliffs, bears E. and W.
 - 32.10 Bottom of descent.
 - 37.10 Head wash, 250 ft. below spur, course E. Ascend N. slope.
 - 41.19 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 2 | S 1
 1917

- and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.
- This cor. is 110 ft. above wash.
- 41.30 Ridge, bears E. and W.; descend broken S. slope.
- 73.00 Wash, 460 ft. below ridge, 20 lks. wide, course SE.
- 81.19 The cor. of secs. 1, 2, 11, and 12. Land, mountainous. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus. No timber.

-
- From the cor. of secs. 2, 3, 34, and 35, on the South bdy. of the Tp., as described in Book "A". N. 0° 1' W., bet. secs. 34 and 35. Over rolling land, through dense undergrowth.
 - 2.20 Wash, 40 lks. wide, course E.
 - 19.50 Wash, 20 lks. wide, course SE.
 - 19.90 Wash, 20 lks. wide, course SE.

Subdivision of Township 11 North, Range 13 West.

Chains.

Wide drain land, cut by washes as noted. About 10 chs. wide.

25.00 NE. bank of drain, thence over rocky soil and through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S34 | S35
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

75.60 Wash, 50 lks. wide, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 26, 27, 34, and 35, marked on brass cap,

T11N R13W
S27 | S26

S34 | S35
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, rolling.

Soil, sandy and rocky, 3rd and 4th rate.

Undergrowth, greasewood, palo verde, and cactus; four to six ft. high.

No timber.

40.00 N. 89° 54' E., on a random line bet. secs. 26 and 35.

Set temp. 1/4 sec. cor.

80.02 Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 25, 26, 35, and 36,

Thence,

S. 89° 50' W., on a true line bet. secs. 26 and 35.

Over rolling land, through scattering undergrowth.

2.60 Corral fence, bears N. and S.

3.10 Corral fence, bears N. and S.

4.20 Wire fence, bears N. and S.

13.30 Wire fence, bears N. and S.

23.00 Wire fence, bears N. and S.

25.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the witness cor. to 1/4 sec. cor., marked on brass cap,

WC 1/4 S26
S35
1915

from which

A cottonwood, 16 ins. diam., bears S. 52° 30' W., 6 lks. dist., marked WC 1/4 S 35 B T

A cottonwood, 20 ins. diam., bears N. 30° W., 1 lk. dist., marked WC 1/4 S 26 B T

25.20 Left bank of Bill Williams River.; thence over sandy bed

40.01 Point for 1/4 sec. cor. falls in bed of river.

44.20 Main channel of river, 150 lks. wide, course S.; thence over sandy bed of river.

47.50 Right bank of Bill Williams River.

Ascend gradual SE. slope from the river.

58.00 Top of ascent, thence over level land.

63.20 Wash, 20 lks. wide, course SE.

80.02 The cor. of secs. 26, 27, 34, and 35.

Land, rolling.

Soil, sandy and rocky, 3rd rate.

Undergrowth, cottonwood, greasewood, palo verde, and mesquite.

No timber.

Subdivision of Township 11 North, Range 13 West.

Chains.

N.0°1'W., bet. secs. 26 and 27.
Over rolling land, through medium undergrowth.

21.00 Center of Wash, 7 chains wide, course SE.

21.80 Road, bears SE. and NW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 27 | S 26
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

63.00 Wash, 40 ft. below cor., 100 lks wide, course SE.

Ascend 80 ft. on S. slope, to cor.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 22, 23, 26, and 27, marked on brass cap,

T11N R13W
S22 | S23
S27 | S26
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, greasewood, palo verde, and cactus.

No timber.

N.89°50'E., on a random line bet. secs. 23 and 26.

40.00 Set temp. 1/4 sec. cor.

80.12 Intersect the N. and S. line, 2 lks. S. of the corner of sections 23, 24, 25, and 26.

Thence,

S.89°49'W., on a true line bet. secs. 23 and 26.

Over rolling land, through dense undergrowth.

12.50 Leave dense undergrowth of arrow-weed and mesquite, bearing E. and W. ; continue through medium undergrowth.

15.70 Wash, 50 lks. wide, course SE. Ascend SE. slope 60 ft. to cor.

40.06 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 23
S 26
1915

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

Ascend 100 ft. on gradual SE. slope to sec. cor.

80.12 The cor. of secs. 22, 23, 26, and 27.

Land, rolling.

Soil, sandy and rocky, 3rd and 4th rate.

Undergrowth, cottonwood, arrow-weed, mesquite, greasewood, and cactus.

No timber.

N.0°1'W., bet. secs. 22 and 23.

Overrolling land, through medium undergrowth.

29.80 Wash, 20 lks. wide, course SE.

37.40 Wash, 70 lks. wide, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S 22 | S 23
1917

Subdivision of Township 11 North, Range 13 West.

Chains.

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

- 44.10 Wash, 20 lks. wide, course E.
- 51.80 Wash, 30 lks. wide, course SE.
- 60.50 Recross wash, 30 lks. wide, course S.
- 75.20 Dim road, bears E. and W.
- 78.30 Wash, 30 lks. wide, course SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 6 ins. in the ground, and supported by mound of stone for the cor. of secs. 14, 15, 22 and 23, marked on brass cap,

T11N R13W
 S15 | S14
 S22 | S23
 1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- 40.00 N. 89°49'E., on a random line bet. secs. 14 and 23. Set temp. 1/4 sec. cor.
- 80.16 Intersect the N. and S. line, 7 lks. S. of the true point for the cor. of secs. 13, 14, 23, and 24.

Thence,
 S. 89°46'W., on a true line bet. secs. 14 and 23.
 Over rolling land, through scattering undergrowth.

- 40.00 Wash, 20 lks. wide, course SE.
- 40.08 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 14
 S 23
 1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor. (As this cor. falls in wash a large mound of stone is placed around cor.)

- 47.80 Wash, 20 lks. wide, course SE.
- 61.70 Wash, 40 lks. wide, course S.
- 69.00 Wash, 70 lks. wide, course S.
- 80.16 The cor. of secs. 14, 15, 22, and 23.

Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- 12.20 N. 0°1'W., bet. secs. 14 and 15. Wash, 30 lks. wide, course SE.
- 16.90 Wash, 20 lks. wide, course SE.
- 30.50 Wash, 40 lks. wide, course SE.
- 37.50 Wash, 40 lks. wide, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4
 S 15 | S 14
 1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

- 44.10 Wash, 50 lks. wide, course SE.
- 67.30 Wash, 20 lks. wide, course SE.

Subdivision of Township 11 North, Range 13 West.

Chains.

- 71.60 Wash, 50 lks. wide, course SE.
- 79.80 Wash, 30 lks. wide, course SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 10, 11, 14, and 15, marked on brass cap,

T11N R13W
 S10 | S11
 S15 | S14
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- N. 89°46'E., on a random line bet. secs. 11 and 14.
- 40.00 Set temp. ¼ sec. cor.
- 80.18 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 11, 12, 13, and 14.

Thence,
 S. 89°48'W., on a true line bet. secs. 11 and 14.
 Over rolling land, through medium undergrowth.

- 1.50 Wash, 20 lks. wide, course SE.
- 40.09 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

¼ S 11
 S 14
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

- 41.00 Wash, 100 lks. wide, course SE.
- 55.60 Wash, 100 lks. wide, course SE.
- 71.00 Enter wash, 30 lks. wide, course SE.; continue in same.
- 76.00 Leave wash, course E.
- 80.18 The cor. of secs. 10, 11, 14, and 15.

Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

- N. 0°1'W., bet. secs. 10 and 11.
- Over rolling land, through medium undergrowth.
- 8.70 Wash, 30 lks. wide, course E.
- 18.20 Wash, 30 lks. wide, course SE.
- 30.40 Wash, 20 lks. wide, course E.
- 35.10 Wash, 50 lks. wide, course E.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

¼ S 10 | S 11
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

- 41.20 Wash, 90 lks. wide, course E.
- 58.70 Wash, 30 lks. wide, course SE.
- Leave rolling land and ascend broken SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid

Subdivision of Township 11 North, Range 13 West.

Chains.

rock and supported by mound of stone, for the cor. of secs. 2, 3, 10, and 11, marked on brass cap,

T11N R13W
S 3 | S 2
S10 | S11
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 160 ft. above the wash.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

- 40.00 N. 89°48'E., on a random line bet. secs. 2 and 11.
- 80.08 Set temp. 1/4 sec. cor.
- 80.08 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 1, 2, 11, and 12.

Thence,

S. 89°49'W., on a true line bet. secs. 2 and 11.

Over rolling and mountainous land, through medium undergrowth.

- 26.40 Descend and ascend along S. slope.
- Wash, 60 ft. above cor., 50 lks. wide, course S.
- Ascend 150 ft. on gradual SE. slope to cor.
- 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S 2
S 11
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

Ascend gradual E. slope.

- 64.00 Spur, 200 ft. above cor., slopes S.; descend broken SW. slope.

- 74.30 Spur, 80 ft. below spur, slopes SE.; descend 100 ft. on SW. slope to sec. cor.

- 80.08 The cor. of secs. 2, 3, 10, and 11.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

- 40.00 N. 0°4'W., on a random line bet. secs. 2 and 3.
- Set temp. 1/4 sec. cor.
- 81.23 Intersect the N. bdy. of Tp. at the cor. of secs. 2 and 3, described in Book "A." Book "A."

Thence,

S. 0°4'E., on true line bet. secs. 2 and 3.

Over mountainous land, through medium undergrowth.

Ascend broken N. slope.

- 5.80 Ridge, 50 ft. above cor., bears E. and W.
- Descend broken S. slope.
- 41.23 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for, the 1/4 sec. cor., marked on brass cap,

S 3 | S 2
1917

Subdivision of Township 11 North, Range 13 West.

Chains.

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 220 ft. below ridge.

Ascend and descend across broken E. slope.

65.00 Ridge, bears E. and W.

Descend 140 ft. on broken SW. slope to sec. cor.

81.23 The cor. of secs. 2, 3, 10, and 11.

Land, mountainous,

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

From the cor. of secs. 3, 4, 33, and 34, on the South bdy. of the Tp., described in Book "A".

N.0°2'W., bet. secs. 33 and 34.

Over mountainous land, through medium undergrowth.

1.10 Wash, 20 lks. wide, course SE.; ascend broken S. slope.

37.70 Wash, 290 ft. above cor., 20 lks. wide, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

43.00 Ridge, 50 ft. above cor., bears NW. and SE.

Descend NE. slope.


55.20 Wash, 170 ft. below ridge, 20 lks. wide, course SE.

Ascend SW. slope.

69.70 Ridge, 200 ft. above wash, bears NW. and SE.

Descend 70 ft. on broken NW. slope to sec. cor.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 27, 28, 33, and 34, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, mountainous.

Soil, rocky, 4th rate,

Undergrowth, greasewood, palo verde, and cactus.

No timber.

N.89°54'E., on a random line bet. secs. 27 and 34.

40.00 Set temp. 1/4 sec. cor.

80.00 Intersect the cor. of secs. 26, 27, 34, and 35.

Thence,

S.89°54'W., on a true line bet. secs. 27 and 34.

Over mountainous land, through medium undergrowth.

Ascend over rolling land to SE.

35.00 Wash, 20 lks. wide, course SE.

38.00 Wash, 20 lks. wide, course NE.

Ascend 70 ft. on SE. slope to cor.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

Subdivision of Township 11 North Range 13 West.

Chains.

$\frac{1}{4}$ S 27
S 34
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of the cor.
Ascend SE slope of ridge 300 ft. to sec. cor.
80.00 The cor. of secs. 27, 28, 33, and 34.
Land, rolling and mountainous.
Soil, rocky, 4th rate.
Undergrowth., greasewood, palo verde, and cactus.
No timber.

N.0°2'W., bet. secs. 27 and 28.
Over rolling land, through dense undergrowth.
33.60 Wash, 70 ft. below cor., 30 lks. wide, course SE.
40.00 Set an iron post, 3ft. long, 1 in. in diam., 12 ins. in
ground and supported by mound of stone, for the $\frac{1}{4}$
sec. cor., marked on brass cap,

$\frac{1}{4}$
S 28 | S 27
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of the cor.
53.40 Foot of descent, 100 ft. below cor., bears NW. and SE.;
thence over level land through dense undergrowth.
69.10 Wash, 100 lks. wide, course SE.
70.40 Road, bears E. and W.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
ground, for the cor. of secs. 21, 22, 27, and 28,
marked on brass cap,

T11N R13W
S21 | S22
S28 | S27
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
W. of the cor.
Land, level and rolling.
Soil, rocky, 4th rate.
Undergrowth, iron-wood, greasewood, palo verde, and cactus.
No timber.

N.89° 54'E., on a random line bet. secs. 22 and 27.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect the N. and S. line, 2 lks. N. of the cor. of
sec. 22, 23, 26, and 27.

Thence,
S, 89° 55'W., on a true line bet. secs. 22 and 27.
Over rolling land, through dense undergrowth.
8.40 Wash, 20 lks. wide, course S.
40.02 Set an iron post, 3 ft. long, 1 in. in diam., on solid
rock and supported by mound of stone, for the $\frac{1}{4}$
sec. cor., marked on brass cap,

$\frac{1}{4}$ S 22
S 27
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
N. of the cor.

Subdivision of Township 11 North, Range 13 West.

Chains.

42.00 Wash, 100 lks. wide, course SE.; continue over rolling land.
 60.00 Bottom of gentle W. slope; thence over level land through dense undergrowth.
 80.04 The cor. of secs. 21, 22, 27, and 28.
 Land, rolling and level.
 Soil, rocky, 4th rate.
 Undergrowth, iron-wood, greasewood, and palo verde; six to eight feet high.
 No timber.

N.0°2'W., bet. secs. 21 and 22.
 Over rolling land, through dense undergrowth.

15.80 Wash, 60 lks. wide, course E.
 27.50 Wash, 30 lks. wide, course SE.
 29.20 Spur, slopes SE.; descend NE. slope.
 38.00 Wash, 80 ft. below spur, 100 lks. wide, course SE.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground, for the $\frac{1}{4}$ secs. cor., marked on brass cap,

$\frac{1}{4}$
 S 21 | S 22
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

53.00 Wash, 300 lks. wide, course SE.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 15, 16, 21, and 22, marked on brass cap,

T11N R13W
 S16 | S15
 S21 | S22
 1917

and raise a mound of stone, 2 ft. base. $1\frac{1}{2}$ ft. high, W. of the cor.

Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, iron-wood, and cactus six to eight feet high.
 No timber.

N.89°55'E., on a random line bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect the N. and S. line, 5 lks. S. of the cor. of secs. 14, 15, 22, and 23.

Thence,
 S, 89°53'W., on a true line bet. secs. 15 and 22.
 Over rolling land, through medium undergrowth.

4.90 Road, bears N. and S.
 8.80 Wash, 20 lks. wide, course S.
 10.20 Wash, 30 lks. wide, course SE.
 19.20 Wash, 30 lks. wide, course S.
 39.99 Set an iron post, 3 ft. long, 1 in. in daim., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ $\frac{S 15}{S 22}$
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

Subdivision of Township 11 North, Range 13 West.

Chains.

43.00 Wash, 60 lks. wide, course S.
 75.80 Wash, 50 lks. wide, course SE.
 79.98 The cor. of secs. 15, 16, 21, and 22.
 Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

N.0°2'W., bet. secs. 15 and 16.
 Over rolling land, through dense undergrowth.

27.10 Wash, 20 lks. wide, course S.
 30.30 Wash, 40 lks. wide, course S.
 40.00 Point for $\frac{1}{4}$ sec. cor. falls in wash, 20 lks. wide, course SE:
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 16 | S 15
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor. (Note;- A large mound of stone is placed around cor.)

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 9, 10, 15, and 16, marked on brass cap,

T11N R13W
 S 9 | S 10
 S 16 | S 15
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

This cor. is 80 ft. above the $\frac{1}{4}$ sec. cor.
 Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus six to eight feet high.
 No timber.

N.89°53'E., on a random line bet. secs. 10 and 15.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.94 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 10, 11, 14, and 15.

Thence,
 S.89°55'W., on a true line bet. secs. 10 and 15.
 Over rolling land, through dense undergrowth.
 7.70 Wash, 20 lks. wide, course SE.; continue in same.
 12.40 Leave wash; continue ascending and descending over rolling land.

38.50 Ridge, 60 ft. above wash, bears NW. and SE.
 Road on top of ridge, bears NW. and SE.
 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 10
 S 15
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

Subdivision of Township 11 North, Range 13 West.

Chains.

54.00 Wash, 40 lks. wide, course SW.
 57.00 Wash, 40 lks. wide, course S.
 59.60 Wash, 30 lks. wide, course S.
 66.70, Wash, 30 lks. wide, course S.
 74.00 Wash, 50 lks. wide, course S.
 79.94 The cor. of secs. 9, 10, 15, and 16.
 Land, rolling.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus six to eight feet high.

No timber.

N.0°2'W., bet. secs. 9 and 10.
 Over rolling, mountainous land, through dense undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
 S 9 | S 10
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

This cor. is 60 ft. above the sec. cor.
 48.30 Road, bears NW. and SE.
 48.90 Ridge, 30 ft. above cor., bears NW. and SE.
 Descend over broken N. slope.
 74.40 Wash, 100 ft. below ridge, 50 lks. wide, course SE.
 75.60 Ascend broken, rocky SE. slope, 60 ft. to sec. cor.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 3, 4, 9, and 10, marked on brass cap,

T 11N R13W
 S 4 | S 3
 S 9 | S 10
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus six to eight feet high.

No timber.

N.89°55'E., on a random line bet. secs. 3 and 10.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.98 Intersect the N. and S. line, 7 lks. N. of the cor. of secs. 2, 3, 10, and 11.
 Thence,
 S.89°58'W., on a true line bet. secs. 3 and 10.
 Over mountainous land, through medium undergrowth.
 Descend along SW. slope, 60 feet.
 11.00 Ascend 50 ft. on E. slope to spur.
 18.00 Spur, slopes SE.; ascend and descend across broken S. slope.
 36.80 Wash, 70 ft. below spur, 60 lks. wide, course SE.
 Ascend 60 ft. on E. slope.
 39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 3
 S 10
 1917

Subdivision of Township 11 North, Range 13 West.

Chains.

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

44.30 Wash, 20 lks. wide, course SE.

65.80 Wash, 30 lks. wide, course SE.

Ascend 110 ft. on broken SE. slope.

79.98 The cor. of secs. 3, 4, 9, and 10.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N. 0°4'W., on a random line bet. secs. 3 and 4.

40.00 Set temp. 1/4 sec. cor.

81.26 Intersect the North bdy. of Tp., 5 lks. W. of the reestablished cor. of secs. 3 and 4, described in Book "A."

Thence,

S. 0°2'E., on a true line bet. secs. 3 and 4.

Descend 80 ft. on S. slope to

11.20 Wash, 50 lks. wide, course SE.

20.80 Wash, 40 lks. wide, course E.; ascend NE. slope.

41.26 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

S4 1/4 S3
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 260 ft. above the wash.

Ascend and descend over broken E. slope covered with rocks and boulders.

81.26 The cor. of secs. 3, 4, 9, and 10.

This cor. is 170 ft. above 1/4 sec. cor.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus, six to eight feet high and scattering.

No timber.

From the cor. of secs. 4, 5, 32, and 33, on the South bdy. of Tp., described in Book "A".

N. 0°2'W., bet. secs. 32 and 33.

Over mountainous land, through dense undergrowth.

Ascend S. slope.

6.70 Ridge, 100 ft. above cor., bears NW. and SE.

Descend and ascend over broken N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

S 32 1/4 S 33
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 230 ft. below ridge.

45.50 Wash, 40 ft. below cor., 40 lks. wide, course SE.; continue in same.

53.40 Leave wash; ascend and descend over broken, rolling land to SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid

Subdivision of Township 11 North, Range 13 West.

Chains.

rock and supported by mound of stone, for the cor. of secs. 28, 29, 32, and 33, marked on brass cap,

T11N	R13W
S29	S28
S32	S33
1917	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 160 ft. above the wash.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Undergrowth, dense palo verde and greasewood, six to eight feet high.

No timber.

- 40.00 N. 89° 54' E., on a random line bet. secs. 28 and 33.
- Set temp. 1/4 sec. cor.
- 79.98 Intersect the cor. of secs. 27, 28, 33, and 34.
- Thence,
- S. 89° 54' W., on a true line bet. secs. 28 and 33.
- Over mountainous land, through medium undergrowth.
- Ascend broken E. slope.
- 32.00 Ridge, 260 ft. above cor., bears NE. and SW.; along N. slope.
- 39.99 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4	S 28
	S 33
1917	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

- 57.80 Continue along broken N. slope.
- Ridge, bears NW. and SE.
- Descend 100 ft. on SW. slope.
- 63.00 Foot of descent; ascend 50 ft. on SE. slope.
- 73.00 Spur, slopes SW.; descend NW. slope, 110 ft. to sec. cor.
- 79.98 The cor. of secs. 28, 29, 32, and 33.
- Land, mountainous.
- Soil, rocky, 4th rate.
- Undergrowth, palo verde and greasewood.
- No timber.

- 23.70 N. 0° 2' W., bet. secs. 28 and 29.
- Over rolling, mountainous land, through medium undergrowth.
- Ascend broken SW. slope.
- Ridge, 130 ft. above cor., bears E. and W.
- Descend broken NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4	S 29
	S 28
1917	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

- 71.60 This cor. is 80 ft. below the ridge.
- Foot of descent, 200 ft. below cor.; continue over level land through dense undergrowth.

Subdivision of Township 11 North, Range 13 West.

Chains.

77.40 Wash, 30 lks. wide, course SE.
 78.70 Road, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 20, 21, 28, and 29, marked on brass cap,

T11N R13W
 S20 | S21
 S29 | S28
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus, four to six feet high.
 No timber.

40.00 N. 89° 54' E., on a random line bet. secs. 21 and 28. Set temp. ¼ sec. cor.
 79.90 Intersect the N. and S. line, 16 lks. N. of the cor. of secs. 21, 22, 27, and 28.

Thence,
 N. 89° 59' W., on a true line bet. secs. 21 and 28.
 Over level and rolling land, through dense undergrowth.
 27.60 Road, bears NW. and SE., in wash course SE.
 35.00 Road, bears NE. and W.
 39.95 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

¼ S 21
 S 28
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.
 44.70 Road, NE. and W.
 54.20 Wash, 20 lks. wide, course NE.
 79.90 The cor. of secs. 20, 21, 28, and 29.
 Land, level.
 Soil, rocky, 4th rate.
 Undergrowth, iron-wood, (eight to twelve ft. high) dense palo verde, and greasewood.
 No timber.

N. 0° 2' W., bet. secs. 20 and 21.
 Over level and rolling land, through dense undergrowth.
 11.90 Right bank of wash, course E.
 15.80 Left bank of wash.
 31.50 Road, bears E. and W. (Road in wash, 100 lks. wide)
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

¼
 S20 | S21
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.
 44.10 Wash, 110 lks. wide, course E.
 62.40 Wash, 30 lks. wide, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 16, 17, 20, and 21,

Subdivision of Township 11 North, Range 13 West.

Chains.

marked on brass cap,

T11N R13W
 $\frac{S17}{S20} | \frac{S16}{S21}$
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

Land, level and rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus, four to six feet high.

No timber.

40.00 S. $89^{\circ}59'E.$, on a random line bet. secs. 16 and 21.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.94 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 15, 16, 21, and 22.

Thence

N. $89^{\circ}58'W.$, on a true line bet. secs. 16 and 21.

Over rolling land, through medium undergrowth.

9.10 Wash, 50 lks. wide, course S.

21.50 Wash, 15 lks. wide, course S.

28.50 Wash, 50 lks. wide, course SE.

33.00 Wash, 100 lks. wide, course S.

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4} \frac{S 16}{S 21}$
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

44.50 Wash, 150 lks. wide, course SE.

51.40 Enter wash, course NE, continue in same.

64.00 Leave wash; 160 ft. above $\frac{1}{4}$ sec. cor.; continue over rolling land.

79.94 The cor. of secs. 16, 17, 20, and 21.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, and greasewood. four to six feet high.

No timber.

N. $0^{\circ}2'W.$, bet. secs. 16 and 17.

Over rolling land, through medium undergrowth.

8.50 Wash, 20 lks. wide, course SE. (In canyon)

Ascend 50 ft. along same.

32.50 Wash, 20 lks. wide, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock, and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4} \frac{S17}{S16}$
 1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.

This cor. is 40 ft. below the wash.

50.90 Wash, 30 lks. wide, course SE.

55.70 Recross wash, 30 ft. below, 30 lks. wide, course SW.

Subdivision of Township 11 North, Range 13 West.

Chains.

77.80 Wash, 20 lks. wide, course SE. (This wash is 50 ft. above previous wash)

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock and supported by mound of stone, for the cor. of secs 8, 9, 16, and 17, marked on brass cap,

T11N R13W
S 8 | S 9
S17 | S16
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

40.00 S. 89° 58' E., on a random line bet. secs. 9 and 16. Set temp. 1/4 sec. cor.

79.84 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 9, 10, 15, and 16.

Thence,

N. 89° 57' W., on a true line bet. secs. 9 and 16.

Over rolling land, through medium undergrowth.

3.40 Wash, 70 lks. wide, course S.

28.20 Wash, 30 lks. wide, course S.

39.92 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 9
S16
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

43.30 Wash, 80 lks. wide, course S.

44.90 Wash, 20 lks. wide, course S.

56.10 Wash, 30 lks. wide, course S.

76.80 Wash, 20 lks. wide, course NW.

79.20 Wash, 20 lks. wide, course S.

79.84 The cor. of secs. 8, 9, 16, and 17.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde and greasewood.

No timber.

N0° 2' W., bet. secs. 8 and 9.

Over rolling land, through dense undergrowth.

9.50 Wash, 20 lks. wide, course W.

26.70 Wash, 40 lks, wide, course S.

37.80 Recross wash, 30 lks. wide, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S8 | S9
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Ascend 90 ft. on SW. slope to ridge.

50.80 Ridge, bears W. and SE.; thence across rolling land ascending and descending.

62.20 Wash, 20 lks. wide, course E.

Subdivision of Township 11 North, Range 13 West.

Chains.

69.40 Wash, 30 lks. wide, course E.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 4, 5, 8, and 9, marked on brass cap,

T11N R13W
 S 5 | S 4
 S 88 | S 9
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus; four to six feet high and scattering.
 No timber.

40.00 S. 89° 57' E., on a random line bet. secs. 4 and 9.
 Set temp. ¼ sec. cor.
 79.84 Intersect the N. and S. line, 5 lks. S. of the cor. of secs. 3, 4, 9, and 10.

Thence,
 N. 89° 59' W., on a true line bet. secs. 4 and 9.
 Over rolling mountainous land, through medium undergrowth.
 Descend rocky SW. slope.

10.00 Wash, 130 ft. below cor., 20 lks. wide, course S.
 Ascend 80 ft. along SE. slope.
 24.00 Wash, 60 lks. wide, SE.; ascend broken E. slope.
 37.90 Ridge, 100 ft. above wash, bears NW. and SE.
 Road on top of ridge.
 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the ¼ sec. cor., marked on brass cap,

¼ S 4
 S 9
 1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

Descend SW. slope.
 79.84 The cor. of secs. 4, 5, 8, and 9.
 This cor. is 180 ft. below the ¼ sec. cor.
 Land, rolling mountainous.
 Soil, rocky, 4th rate.
 Undergrowth, palo verde, greasewood, and cactus.
 No timber.

40.00 N. 0° 2' W., on a random line bet. secs. 4 and 5.
 Set temp. ¼ sec. cor.
 81.24 Intersect the North bdy. of the Tp., 7 lks. E. of the re-established cor. of secs. 4 and 5, described in Book "A."

Thence,
 S. 0° 5' E., on a true line bet. secs. 4 and 5.
 Over mountainous land, through medium undergrowth.
 Ascend rocky NE. slope.

27.70 Ridge, 350 ft. above cor., bears S. 40° E. and N. 40° W.
 Descend rocky S. slope.
 41.24 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the ¼ sec. cor., marked on brass cap,

Subdivision of Township 11 North, Range 13 West.

Chains.

S 5¹/₄ S 4
1917

and raise a mound of stone; 2 ft. base, 1¹/₂ ft. high, W. of the cor.

This cor. is 200 ft. below the ridge. Continue along on top of mesa.

53.30 Descend 270 ft. on rocky S. slope.

67.80 Wash, 20 lks. wide, course SW.

74.60 Wash, 20 lks. wide, course SW.

81.24 The cor. of secs. 4, 5, 8, and 9.

Land, mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

From the cor. of secs. 5, 6, 31, and 32, on the South bdy. of Tp., as described in Book "A".

N.0°3'W., bet. secs. 31 and 32.

Over rolling mountainous land, through medium undergrowth. Descend along a W. slope.

7.20 Wash, 20 lks. wide, course NE.; ascend SE. slope.

14.30 Spur, 110 ft. above wash, slopes E.

Descend 90 ft. on NE. slope.

19.20 Foot of descent, ascend S. slope.

25.00 Ridge, 60 ft. above point, bears NE. and SW.

Descend and ascend over rolling mountainous land.

25.10 Trail, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the ¹/₄ sec. cor., marked on brass cap,

S31¹/₄S32
1917

and raise a mound of stone, 2 ft. base, 1¹/₂ ft. high, W. of the cor.

This cor. is 90 ft. below the ridge.

Continue over rolling land, through scattering brush.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock and supported by mound of stone, for the cor. of secs. 29, 30, 31, and 32, marked on brass cap,

T11N R13W
S30 | S29
S31 | S32
1917

and raise a mound of stone, 2 ft. base, 1¹/₂ ft. high, W. of the cor.

This cor. is 160 ft. below the ¹/₄ sec. cor.

Land, mountainous and rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus. four to six feet high.

No timber.

N.89°54'E., on a random line bet. secs. 29 and 32.

40.00 Set temp. ¹/₄ sec. cor.

79.84 Intersect the N. and S. line, 7 lks. S. of the cor. of Secs. 28, 29, 32, and 33.

Thence,

S. 89°51'W., on a true line bet. secs. 29 and 32.

Subdivision of Township 11 North, Range 13 West.

Chains.

Over rolling mountainous land, through medium undergrowth. Descend W. slope.

15.20 Wash, 70 ft. below cor., 20 lks. wide course SE.

Ascend 80 ft. on E. slope to cor.

39.92 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 29
S 32
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

48.25 Road, bears SW. and NE.

79.84 The cor. of secs. 29, 30, 31, and 32.

This cor. is 100 ft. above the $\frac{1}{4}$ sec. cor.

Land, rolling mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus, four to six feet high.

No timber.

S. $89^{\circ}54'$ W., on a random line bet. secs. 30 and 31.

40.00 Set temp, $\frac{1}{4}$ secs. cor.

81.47 Intersect the West bdy. of Tp., 2 lks. N. of the cor. of secs. 25, 30, 31, and 36, as described in Book "A".

Thence,

N. $89^{\circ}53'$ E., on a true line bet. secs. 30 and 31.

Over rolling land, through medium undergrowth.

Ascend along a broken NW. slope.

9.70 Spur, 60 ft. above cor., slopes N.; descend E. slope.

14.40 Wash, 90 ft. below spur, 40 lks. wide, course NE.

Ascend NW. slope.

21.80 Ridge, 90 ft. above wash, bears NE. and SW.

Descend broken E. slope.

38.00 Wash, 160 ft. below ridge, 20 lks. wide, course NE.

41.47 Set an iron post, 3 ft. long, 1 in. in diam., on solid rock and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S 30
S 31
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.

Continue along a broken N. slope.

57.90 Wash, 20 lks. wide, course N.

81.47 The cor. of secs. 29, 30, 31, and 32.

This cor. is 40 ft. below the wash.

Land, rolling mountainous.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus, four to six feet high.

No timber.

N. $0^{\circ}3'$ W., bet. secs. 29 and 30.

Over rolling land, through medium undergrowth.

11.00 Wash, 40 ft. below cor., 20 lks. wide, course E.

37.70 Leave rolling land, 70 ft. below wash, bearing E. and W.; continue over level land.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

Subdivision of Township 11 North, Range 13 West.

Chains.

1
S30|S29
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

- 50.00 Wash, 50 lks. wide, course E.
- 60.20 Wash, 50 lks. wide, course SE.
- 67.60 Wash, 50 lks. wide, course E.
- 75.10 Road, bears E. and W.
- 79.60 Wash, 40 lks. wide, course E.
- 80.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the cor. of secs. 19, 20, 29, and 30, marked on brass cap,

T11N R13W
S19|S20
S30|S29
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Land, rolling and level.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus, four to six feet high.

No timber.

N. 89° 51' E., on a random line bet. secs. 20 and 29.

- 40.00 Set Temp. 1/4 sec. cor.
- 79.82 Intersect the N. and S. line, 2 lks. N. of the cor. of secs. 20, 21, 28, and 29.

Thence,

S. 89° 52' W., on a true line bet. secs. 20 and 29.

- 10.00 Right bank of numerous washes, (There are about ten of these washes and none are over 20 feet apart), course NE.
- 20.00 Left bank of washes.
- 35.00 Wash, 150 lks. wide, course NE.
- 39.80 Wash, 20 lks. wide, course NE.
- 39.91 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground (in wash), for the 1/4 sec. cor., marked on brass cap,

S 20
1/4 S 29
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor. Note:-- The cor. is well rocked in by stone.

- 56.60 Leave level land and dense ironwood and palo verde, and continue over rolling land.
 - 67.70 Wash, 100 lks. wide, course NE.
 - 74.00 Wash, 30 lks. wide, course SE.
 - 79.82 The cor. of secs. 19, 20, 29, and 30.
Land, level and rolling.
Soil, rocky, 4th rate.
Undergrowth, iron-wood (eight to ten feet high), dense palo verde, and greasewood.
- No timber.

S. 89° 53' W., on a random line bet. secs. 19 and 30.

- 40.00 Set temp. 1/4 sec. cor.
- 81.15 Intersect the West bdy. of Tp., 14 lks. S. of the cor. of

Subdivision of Township 11 North, Range 13 West.

Chains.

secs. 19, 24, 25, and 30, as described in Book "A".

Thence,

N. 89° 59' E., on a true line bet. secs. 19 and 30.

Over rolling land, through scattering undergrowth.

37.20 Wash, 20 lks. wide, course SE.

41.15 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ $\frac{S\ 19}{S\ 30}$
1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of the cor.

64.40 Road, bears NW. and SE.

69.20 Wash, 60 lks. wide, course SE.

81.15 The cor. of secs. 19, 20, 29, and 30.

Land, rolling.

Soil, rocky, 4th. rate.

Undergrowth, palo verde, greasewood, and cactus, six to eight feet high.

No timber.

N. 0° 3' W., bet. secs. 19 and 20.

Over rolling land, through medium undergrowth.

14.50 Spur, 100 ft. above cor., slopes E.

Descend broken N. slope.

33.00 Wash, 80 ft. below spur, 30 lks. wide, course E.

39.90 Wash, 70 lks. wide, course E.

40.00 Point for $\frac{1}{4}$ sec. cor. falls in wash; therefore at

40.50 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the witness cor. to the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S19 | S20
WC
1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

52.80 Dim road, bears E. and W.

58.30 Wash, 60 lks. wide, course SE.

71.00 Wash, 20 lks. wide, course E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground and supported by mound of stone, for the cor. of secs. 17, 18, 19, and 20, marked on brass cap,

T11N R13W
S18 | S17
S19 | S20
1917

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of the cor.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

N. 89° 52' E., on a random line bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.82 Intersect the N. and S. line, 10 lks. S. of the cor. of secs. 16, 17, 20, and 21,

Subdivision of Township 11 North, Range 13 West.

Chains.

Thence, S. 89° 48' W., on a true line bet. secs. 17 and 20. Over rolling land, through medium undergrowth.

39.91 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in ground and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4 S 17 / S 20 1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

46.00 Road, bears NW. and SE.

63.00 Wash, 50 lks. wide course SE.

79.82 The cor. of secs. 17, 18, 19, and 20.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus.

No timber.

S. 89° 59' W., on a random line bet. secs. 18 and 19.

40.00 Set a temp. 1/4 sec. cor.

80.87 Intersect the West bdy. of Tp., 10 lks. N. of the cor. of secs. 13, 18, 19, and 24, described in Book "A".

Thence,

N. 89° 55' E., on a true line bet. secs. 18 and 19.

Over rolling land, through medium undergrowth.

28.20 Wash, 50 lks. wide, course SE.

40.87 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

1/4 S 18 / S 19 1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of the cor.

54.90 Wash, 100 ft. below cor., 30 lks. wide, course S.

68.00 Wash, 20 lks. wide, course S.

76.00 Wash, 20 lks. wide, course SE.

80.87 The cor. of secs. 17, 18, 19, and 20.

Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, palo verde, greasewood, and cactus, six to eight feet high.

No timber.

N. 0° 3' W., bet. secs. 17 and 18.

Over rolling land, through medium undergrowth.

14.10 Wash, 30 lks. wide, course E.

28.40 Wash, 30 lks. wide, course E.

32.60 Road, bears NW. and SE.

39.60 Wash, 30 lks. wide, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the 1/4 sec. cor., marked on brass cap,

S18 | S17 1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

Ascend S. slope.

54.00 Ridge, 100 ft. above cor., bears E. and W.

Descend NE. slope.

Subdivision of Township 11 North, Range 13 West.

Chains.

79.30 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the witness corner to cor. of secs. 7, 8, 17, and 18, marked on brass cap,

T11N R13W
WC
S 7 | S 8

S18 | S17
1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.

80.00 The true point for the cor. of secs. 7, 8, 17, and 18, falls in wash, 40 lks. wide, course E. This wash is 120 ft. below the ridge.

Land, rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus, four to six feet high. (Scattering).
No timber.

From true point for cor. of secs. 7, 8, 17 and 18, N. 89°48'E., on a random line bet. secs. 8 and 17.

40.00 Set temp. ¼ sec. cor.

79.96 Intersect the N. and S. line, 4 lks. N. of the cor. of secs. 8, 9, 16, and 17.

Thence, S. 89°50'W., on a true line bet. secs. 8 and 17.

Over rolling land, through medium undergrowth.

5.50 Wash, 30 lks. wide, course S.

21.60 Wash, 50 lks. wide, course SE.

39.98 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the ¼ sec. cor., marked on brass cap,

¼ S 8

S 17
1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

41.10 Wash, 50 lks. wide, course SE.

43.70 Wash, 30 lks. wide, course NE.

54.80 Wash, 40 lks. wide, course SE.

73.10 Wash, 30 lks. wide, course NE.

76.90 Enter wash, 40 lks. wide, course E., continue in same.

79.96 The true point for cor. of secs. 7, 8, 17 and 18.

Land, rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.

From true point for cor. of secs. 7, 8, 17 and 18, S. 89°55'W., on a random line bet. secs. 7 and 18.

40.00 Set temp. ¼ sec. cor.

80.54 Intersect the West bdy. of Tp., 12 lks. S. of the cor. of secs. 7, 12, 13, and 18, as described in Book "A".

Thence, East, on a true line bet. secs. 7 and 18.

Over rolling land, through medium undergrowth.

17.00 Wash, 100 lks. wide, course SE., road in wash.

36.20 Wash, 20 lks. wide, course SE.

40.54 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground and supported by mound of stone, for the ¼ sec. cor., marked on brass cap,

Subdivision of Township 11 North, Range 13 West.

Chains.

$\frac{1}{4}$ $\frac{S}{S} \frac{7}{18}$
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of the cor.
46.00 Low ridge, 40 ft. above cor., bears NW. and SE.
79.04 Set an iron post, 3 ft. long, 2 ins. in diam., on solid rock and supported by mound of stone, for witness cor. to the cor. of secs. 7, 8, 17, and 18, marked on brass cap,

T11N R13W
S 7 | S 8
S18 | S17 WC
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.
80.54 The true point for the cor. of secs. 7, 8, 17, and 18. Land, rolling. Soil, rocky 4th rate. Undergrowth, palo verde, greasewood, and cactus; four to six high and scattering. No timber.

From the true point for the cor. of secs. 7, 8, 17, and 18. N. $0^{\circ}3'W.$, bet. secs. 7 and 8. Over rolling land, through scattering undergrowth. 7.00 Wash; 80 lks. wide, course E.
33.40 Point 170 ft. above wash; along E. slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$
S 7 | S 8
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.
55.80 Ridge, 80 ft. above cor., bears E. and W. Descend over broken N. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground, for the cor. of secs. 5, 6, 7, and 8, marked on brass cap,

T11N R13W
S 6 | S 5
S 7 | S 8
1917

and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of the cor.
This cor. is 90 ft. below the ridge. Land, rolling. Soil, rocky, 4th rate. Undergrowth, palo verde, greasewood, and cactus; four to six feet high and scattering. No timber.

N. $89^{\circ}50'E.$, on a random line bet. secs. 5 and 8.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect the N. and S. line, 14 lks. N. of the cor. of secs. 4, 5, 8, and 9.

Subdivision of Township 11 North, Range 13 West.

Chains.

- Thence,
S. 89° 56' W., on a true line bet. secs. 5 and 8.
Over rolling land, through medium undergrowth.
- 8.10 Wash, 30 lks. wide, course SW.
16.20 Wash, 20 lks. wide, course S.
40.02 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground and supported by mound of stone, for the $\frac{1}{4}$ secs. cor., marked on brass cap,
- $\frac{1}{4}$ $\frac{S\ 5}{S\ 8}$
1917
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of the cor.
- 68.50 Wash, 40 lks. wide, course SE.
76.70 Wash, 30 lks. wide, course SE.
80.04 The cor. of secs. 5, 6, 7, and 8.
Land, rolling.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.
-
- West, on a random line bet. secs. 6 and 7.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect the West bdy. of Tp., 3 lks. S. of the cor. of secs. 1, 6, 7, and 12, as described in Book "A".
- Thence,
S. 89° 59' E., on a true line bet. secs. 6 and 7.
Over rolling mountainous land, through medium undergrowth.
- 9.00 Wash, 30 lks. wide, course SE.
Ascend SW. slope.
26.00 Spur, 60 ft. above wash, slopes SE.
Descend 130 ft. on NE. slope to cor.
40.10 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for the $\frac{1}{4}$ sec. cor., marked on brass cap,
- $\frac{S\ 6}{S\ 7}$
1917
- and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of the cor.
- 47.70 Small spur, slopes NE.
59.20 Wash, 50 ft. below spur, 30 lks. wide, course E.
66.50 Wash, 15 lks. wide, course NE.
70.80 Wash, 20 lks. wide, course SE.
77.40 Wash, 20 lks. wide, course NE.
80.10 The cor. of secs. 5, 6, 7, and 8.
Land, rolling mountainous.
Soil, rocky, 4th rate.
Undergrowth, palo verde, greasewood, and cactus.
No timber.
-
- N. 0° 5' W., on a random line bet. secs. 5 and 6.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
81.30 Intersect the North bdy. of Tp., 5 lks. W. of the reestablished cor. of secs. 5 and 6, described in Book "A".
- Thence,
S. 0° 3' E., on a true line bet. secs. 5 and 6.
Over mountainous land, through scattering undergrowth.
Descend SE. slope.
- 33.10 Wash, 400 ft. below cor., 20 lks wide, course E.

Subdivision of Township 11 North Range 13 West.

Chains.

41.30 Ascend NE. slope.
Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground on solid rock and supported by mound of stone, for the 1/4 sec. cor., marked on brass cap,

1/4
S6 | S5
1917

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of the cor.

This cor. is 70 ft. above wash.

Descend S. slope.
59.00 Wash, 130 ft. below cor., 100 lks. wide, course SE.
79.70 Wash, 30 ft. below previous wash, 20 lks. wide, course E.
81.30 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.
Soil, rocky, 4th rate.
Undergrowth, scattering palo verde, greasewood, and cactus.
No timber.

GENERAL DESCRIPTION

This township is composed mostly of rolling mountainous land, cut by deep washes and small box canyons. The northern tier of sections lies on the south slope of barren rocky mesas. A high ridge lies in the south tier. The township is drained by washes which have a general southeasterly course. They all empty into the Bill Williams river which enters on the east side of section 24 and flows about southwest through sections 24, 25, 26, and 35. At the southwest corner of section 35 it enters a box canyon. The normal width of the river varies from about 30 lks. to one chain and the water varies from about an inch to six inches in depth during low water stage. The width of the river channel, i.e., the portion covered by water during the flood season varies from fifteen chains to thirty chains. Above this flood land there are several small patches of river bottom land where some settlers are located and are engaged in agriculture and stock raising. Water for irrigation is obtained from the river. These small patches along the banks of the river are the only portions of the township available for agricultural purposes. The mountainous land produces very little vegetation fit for pasturage. It has no other value whatever except for mineral and though there are several mining claims located in the southwest portion of the township, there has been no mineral produced in paying quantities.

There is no timber in the township.
The undergrowth consists of palo verde, cactus, cat-claw, greasewood, sagebrush, and iron-wood and other varieties of small brush. There is also considerable arrow-weed, mesquite, and cottonwood along the banks of the river.
The small patches of flood land along the river are composed of sandy, loam soil about first rate. All the other soil is rocky and about fourth rate.
There is no water in the township except at the river.

BOOK 3241

For

CERTIFICATE OF UNITED STATES TRANSITMAN.

See Book "C"

I, _____, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, Jan. 20, 1919. 1018


The foregoing field notes of the survey of the _____ Subdivision lines of _____

TOWNSHIP 11 NORTH, RANGE 13 WEST.

of the Gila and Salt River Base and Meridian, in the State of Arizona.

executed by Hugo Price, U. S. Transitman,

under his special instructions dated July 23, 1914, for Group 36 Ariz. 101, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.


U. S. Surveyor General.

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.~~