

PROSPECTUS

REVISED

ASHLAND AREA
JACKSON MASTER UNIT

Medford Sale # 10-18
September 16, 2010

#6 SWINNING TIMBER SALE (5900), Jackson County,O&C BID DEPOSIT REQUIRED:\$29,700.00

All timber designated for cutting in NE $\frac{1}{4}$ SW $\frac{1}{4}$, S $\frac{1}{2}$ SW $\frac{1}{4}$, N $\frac{1}{2}$ SE $\frac{1}{4}$,SW $\frac{1}{4}$ SE $\frac{1}{4}$, N $\frac{1}{2}$ SE $\frac{1}{4}$ SE $\frac{1}{4}$, SW $\frac{1}{4}$ SE $\frac{1}{4}$ SE $\frac{1}{4}$ Sec 11; NW $\frac{1}{4}$, NE $\frac{1}{4}$ SW $\frac{1}{4}$, NW $\frac{1}{4}$ SE $\frac{1}{4}$ Sec 13; W $\frac{1}{2}$, Sec 25; E $\frac{1}{2}$ SE $\frac{1}{4}$, Sec 26; NE $\frac{1}{4}$ NE $\frac{1}{4}$, Sec 35, T38S R3E; SE $\frac{1}{4}$ SW $\frac{1}{4}$, SW $\frac{1}{4}$ SE $\frac{1}{4}$ Sec. 17; S $\frac{1}{2}$ NE $\frac{1}{4}$, SE $\frac{1}{4}$ NW $\frac{1}{4}$, E $\frac{1}{2}$ SW $\frac{1}{4}$, NE $\frac{1}{4}$ SE $\frac{1}{4}$, S $\frac{1}{2}$ SE $\frac{1}{4}$, Sec 19, W $\frac{1}{2}$ NE $\frac{1}{4}$, E $\frac{1}{2}$ NW $\frac{1}{4}$, Sec 20, T38S R4 E; NW $\frac{1}{4}$ NW $\frac{1}{4}$, Sec 1, T39S R3E; SW $\frac{1}{4}$ NE $\frac{1}{4}$, NE $\frac{1}{4}$ SW $\frac{1}{4}$, NW $\frac{1}{4}$ SE $\frac{1}{4}$, Sec 5; T39S R4E., Willamette Meridian

Approx. Number Merch. Trees	Est. Volume MBF 32' Log	Est. Volume CCF	Species	Est. Volume MBF 16' Log	Appr. Price Per MBF*	Est. Volume Times Appraised Price
2374	607	1230	Douglas-fir	751	\$163.00	\$122,413.00
8700	1412	3165	White fir	1820	\$92.60	\$168,532.00
626	93	222	Ponderosa pine	125	**\$24.50	\$3,062.50
131	9	22	Incense-cedar	11	\$224.50	\$2,469.50
11831	2121	4639	TOTAL	2707		\$296,477.00

*Stumpage values have been determined by market value estimates and analytical appraisal methods were used to compute the appraised price. Additional information concerning the appraised price is available at the Medford District Office.

**Minimum stumpage values were used to compute the appraised price (10% of pond value).

CRUISE INFORMATION - The timber volumes were based on a 3P sample tree volt cruise. With respect to merchantable trees of all conifer species: the average trees is 16.2 inches DBHOB; the average gross merchantable log contains 80 bd. ft.; the total gross volume is approximately 3308 M bd. ft; and 82% recovery is expected. (Average DF is 17.1 inches DBHOB; average gross merchantable log DF contains 94 bd. ft.)

Bidders will be restricted to bidding on a unit (MBF) rate of the White fir volume. All other species will be sold at appraised price per unit (MBF). The minimum bid increment will be \$0.10 per MBF.

LOG EXPORT AND SUBSTITUTION All timber sales shall be subject to the restrictions relating to the export and substitution of unprocessed timber from the United States in accordance with P.L. 94-165 and 43 CFR 5400 and 5420, as amended.

CUTTING AREA – Fourteen (14) units containing 467 acres to be partial cut.

CUTTING TIME – Contract duration will be 36 months for cutting and removal of timber.

ACCESS - Access to the sale area is available via existing BLM roads.

ROAD MAINTENANCE - BLM will maintain 4.73 miles of the roads listed in Section 41(C)(3). The Purchaser will be required to pay a maintenance fee of \$1.92 per MBF or a total of \$1,409.97 for the use of these roads as shown in RC-2c. The Purchaser will be required to maintain 5.28 miles of BLM roads.

SOIL DAMAGE PREVENTION - Pursuant to Section 25 of Form 5450-3, Timber Sale Contract, the Purchaser shall not operate or cause to have operated on the contract area any tractor-type logging equipment when soil moisture content exceeds twenty (20) percent by weight. The Purchaser shall construct waterbars on tractor skid trails, and block main skid trails where they intersect haul roads.

EQUIPMENT REQUIREMENTS - LOGGING: A ground-based machine less than 8 ½ feet wide, equipped with a winch, integral arch, and at least a 75 foot skidding line. Mechanical harvesting would be accomplished with a cut-to-length machine capable of severing, limbing to 3 inch top diameter, cutting to length, and bunching logs to the lead of designated skid trails. The harvester would be equipped with a telescoping arm 20 to 30 feet in length. Ground-based yarding systems equipped with grapples will not be permitted except for swing operations, unless also equipped with winch systems.

SLASH DISPOSAL - Section 41(G)(1) defines the slash disposal and site preparation work that may be required under this contract. Because of the significant uncertainty as to the appropriate level of slash disposal and site preparation that may be needed during the life of the contract the BLM has defined the treatment costs in Section 41(G)(2)(a) but has only appraised for a small portion of the work that might be required in Section 41(G)(1). The BLM, in accordance with Section 41(G)(2)(c), will unilaterally modify the contract to accomplish all of the necessary slash disposal and site preparation, beyond that which was appraised, using the menu of prices defined in Section 41(G)(2)(a). Appraised slash disposal consists of 100 acres of hand piling/covering, and 100 acres of hand pile burning.

CONTRACT TERMINATION - A Special Provision has been added to the contract which enables the Contracting Officer to suspend the contract to facilitate protection of certain plant or animal species, and/or to modify or terminate the contract when necessary to comply with the Endangered Species Act, or comply with a court order, or protect species which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP. This contract provision limits the liability of the Government to the actual costs incurred by the Purchaser which have not been amortized by timber removed from the contract area.

PERFORMANCE BOND - A performance bond in the amount of 20% of the total purchase price will be required.

OTHER -

1. No extension of time beyond the normal 30 days will be granted for completing bonding and contract signing requirements.
2. A BLM logging plan was prepared for the appraisal and is available for review. The harvest units are all to be yarded using ground-based systems.
3. BLM haul roads and harvest operations are seasonally restricted. Some variations of the restricted dates are possible depending on weather conditions. Winter operations would be permitted with an adequate snowpack provided certain conditions are met.
4. Cleaning of equipment to eliminate noxious weed seeds is required prior to move-in of equipment onto federal lands.

NARRATIVE DESCRIPTION OF HOW TO GET TO THE TIMBER SALE AREA – From Ashland, Oregon, take Dead Indian Memorial Road east approximately 17 miles to the junction with Hyatt Prairie Road. Part of the sale is accessed off of Hyatt Prairie Road on the west side of Howard Prairie Lake, and part of the sale is accessed by the Keno Access Road on the east side of the lake.

ENVIRONMENTAL ASSESSMENT - An Environmental Assessment (DOI-BLM-OR-M060-2010-0034-EA) was prepared for this project, and a Finding of No Significant Impact has been documented. This document is available for inspection at the Medford District Office.

Seasonal Restriction Matrix









































































Sheet 1 of 1

Swinning Timber Sale

OR-110-TS10-18

 Restricted

 Operating season

Activity	Jan		Feb		Mar		Apr		May		June		July		Aug		Sept		Oct		Nov		Dec	
	1	15	1	15	1	15	1	15	1	15	1	15	1	15	1	15	1	15	1	15	1	15	1	15
Ground-based yarding operations (All units) May be waived during dry conditions, or with a 24 “ snowpack. <i>Soils mitigation</i>																								
Hauling on roads 38-3E-11, 38-3E-11.5, 38-3E-13.1, 38-3E-13.3, 38-3E-19, 38-3E-25.1, 38-3E-25.2, 38-4E-7, 38-4E-7.1, 38-4E-7.2, 38-4E-19.3, 39-4E-5.1, 39-4E-5.2 (Winter hauling would be allowed on paved roads or any road when at least 4 inches of packed frozen snow is present on haul roads.)																								
Hauling on roads 38-3E-13.0, 38-3E-25.0, and 38-4E-19.0. (Winter hauling would be allowed on paved roads or any road when at least 4 inches of packed frozen snow is present on haul roads.)																								

SWINNING TIMBER SALE
SPECIAL PROVISIONS

THIS IS A SALE PROSPECTUS ONLY. THESE ARE THE SPECIAL PROVISIONS AS THEY WILL BE WRITTEN IN THE CONTRACT. ATTACHMENTS MAY NOT INCLUDE ALL EXHIBITS REFERRED TO IN THE CONTRACT PROVISIONS. THE COMPLETE CONTRACT, INCLUDING ALL EXHIBITS, IS AVAILABLE FOR INSPECTION AT THE MEDFORD DISTRICT OFFICE.

Section 40. TIMBER RESERVED FROM CUTTING - The following timber on the contract area is hereby reserved from cutting and removal under the terms of this contract and is retained as the property of Government.

- (A) AR-1 All timber on the Reserve Area(s) as shown on Exhibit A and all orange painted and/or posted trees which are on or mark the boundaries of the Reserve Area(s).
- (B) IR-2 All timber except approximately 11,831 trees marked for cutting heretofore by the Government with blue paint above and below stump height in all units as shown on Exhibit A.
- (C) IR-6 All naturally occurring dead and down woody debris greater than or equal to 16" diameter at the large end in all units as shown on Exhibit A.
- (D) IR-6 All hardwood trees twelve inches (12) D.B.H.O.B and greater, and all snags not designated for cutting fourteen (14) inches D.B.H.O.B and greater in all units as shown on Exhibit A.
- (E) IR-10 Genetically superior trees marked with orange paint and seed tree tags in the contract area. These trees are selected, genetically superior trees and are specially valued as a component of the tree improvement program. Any damage to such reserve trees caused by Purchaser shall be charged for on the basis of the resulting total loss to the Government including any loss in value as a superior seed source.
- (F) IR-12 All trees which were severed from the stump or cut into logs prior to the date this contract was entered into in all units as shown on Exhibit A.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

Section 41

(A) Log Exports

LE-1 All timber sold to the Purchaser under the terms of the contract, except exempted species, is restricted from export from the United States in the form of unprocessed timber, and is prohibited from being used as a substitute for exported private timber. For the purpose of this contract, unprocessed timber is defined as: (1) any logs, except those of utility grade or below, such as sawlogs, peeler logs; and pulp logs; (2) cants or squares to be subsequently remanufactured exceeding eight and three-quarters (8-3/4) inches in thickness; (3) split or round bolts or other roundwood not processed to standards or specifications suitable for end-product uses; or (4) western red cedar lumber which does not meet lumber of American Standards Grades of Number 3 dimension or better, or Pacific Lumber Inspection Bureau R-List Grades of Number 3 Common or better. Thus, timber manufactured into the following will be considered processed: (1) lumber and construction timbers regardless of size, manufactured to standards and specifications suitable for end-product uses; (2) chips, pulp, and pulp products; (3) green or dry veneer and plywood; (4) poles and piling cut or treated for use as such; (5) cants, squares, and lumber cut for remanufacturing of eight and three-quarters (8-3/4) inches in thickness or less; or (6) shakes and shingles.

Substitution will be determined under the definition found in 43 CFR 5400.0-5(n).

The Purchaser is required to maintain and upon request to furnish the following information:

1. Date of last export sale.
2. Volume of timber contained in last export sale.
3. Volume of timber exported in the past twelve (12) months from the date of last export sale.
4. Volume of Federal timber purchased in the past twelve (12) months from the date of last export sale.
5. Volume of timber exported in succeeding twelve (12) months from date of last export sale.
6. Volume of Federal timber purchased in succeeding twelve (12) months from date of last export sale.

SWINNING TIMBER SALE SPECIAL PROVISIONS

In the event the Purchaser elects to sell any or all of the timber sold under this contract in the form of unprocessed timber, the Purchaser shall require each party buying, exchanging, or receiving such timber to execute a "Certificate as to Nonsubstitution and the Domestic Processing of Timber." The original of such certificate shall be filed with the Authorized Officer. Additionally, when the other party is an affiliate of the Purchaser, the Purchaser will be required to update information under item (2) of Form 5450-17 (Export Determination) and file the form with the Authorized Officer.

In the event an affiliate of the Purchaser has exported private timber within twelve (12) months prior to purchasing or otherwise acquiring Federal timber sold under this contract, the Purchaser shall, upon request, obtain from the affiliate information in the form specified by the Authorized Officer and furnish the information to the Authorized Officer.

Prior to the termination of this contract, the Purchaser shall submit to the Authorized Officer Form 5460-15 (Log Scale and Disposition of Timber Removed Report), which shall be executed by the Purchaser. In addition, the Purchaser is required under the terms of this contract to retain for a three-year period from the date of termination of the contract the records of all sales or transfer of logs involving timber from the sale for inspection and use of the Bureau of Land Management.

Unless otherwise authorized in writing by the Contracting Officer, the Purchaser shall brand clearly and legibly one end of all logs with a scaling diameter (small end inside bark) of over ten (10) inches, prior to the removal of timber from the contract area. All loads of eleven (11) logs or more will have a minimum of ten (10) logs clearly and legibly branded on one end regardless of the diameter of the logs. All logs will be branded on loads of ten (10) logs or less. One end of all branded logs to be processed domestically will be marked with a three (3) square inch spot of highway yellow paint. The Purchaser will stop trucks for accountability monitoring at mutually agreed upon locations when notified by the Authorized Officer.

If multiple trailers (mule trains) are used, each bunked load shall be considered an individual load, and these guidelines will apply to each bunked load. If a flatbed stake trailer is used, each bundle will be treated as a separate load.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

At the discretion of the Contracting Officer, the Purchaser may be required to brand and paint all logs. Any increased costs for log branding and painting shall be the responsibility of the Purchaser.

In the event of the Purchaser's noncompliance with this subsection of the contract, the Authorized Officer may take appropriate action as set forth in Section 10 of this contract. In addition, the Purchaser may be declared ineligible to receive future awards of Government timber for a period of one year.

(B) Logging

- (1) L-1 Before beginning operations on the contract area for the first time or after a shutdown of five (5) or more days, the Purchaser shall notify the Authorized Officer in writing of the date they plan to begin operations. The Purchaser shall also notify the Authorized Officer in writing if they intend to cease operations for any period of five (5) or more days.
- (2) L-4 All trees designated for cutting with blue paint above and below stump and not reserved shall be felled in all units as shown on Exhibit A.
- (3) L-7MC Yarding on the areas designated herein and shown on Exhibit A shall be done in accordance with the yarding requirements or limitations for the designated area.

**SWINNING TIMBER SALE
SPECIAL PROVISIONS**

Designated Area	Yarding Requirements or Limitations
<p>TRACTOR or MECHANICAL HARVESTER UNITS</p> <p>Units 9, 11A, 11B, 13, 33, 40A, 40B, 45, 47A, 47B, 68, 70A, 70B, 71</p>	<p>All ground-based yarding systems shall be approved by the Authorized Officer.</p> <p>Yarding tractor /mechanical harvester width will not be greater than 8 ½ feet as measured from the outer edges of the track shoes. Yarding tractors will be equipped with integral arches and winch systems capable of lining logs at least seventy-five (75) feet. Mechanical harvesting would be accomplished with a cut-to-length machine capable of severing, limbing to 3 inch top diameter, cutting to length, and bunching logs to the lead of designated skid trails. The harvester would be equipped with a telescoping arm 20 to 30 feet in length. Ground-based yarding systems equipped with grapples will not be permitted except for swing operations, unless also equipped with winch systems. Yarding tractors will operate only on tractor skid roads approved by the Authorized Officer.</p> <p>Skid road locations will be approved prior to felling of timber to be yarded over that skidtrail and trees shall be felled to the lead. The location of the tractor skid roads must be clearly designated on the ground, spaced at approximately one hundred fifty (150) foot intervals where feasible. Existing skid roads will be utilized where possible. Ground based yarding systems shall be limited to slopes thirty-five (35) percent or less. Tractor operations on short pitches greater than thirty-five (35) may be permitted as approved by the Authorized Officer.</p> <p>Tractor skid roads utilized under the terms of this contract must be waterbarred, as directed by the Authorized Officer. Main skid roads are to be blocked where they intersect haul roads.</p> <p>Tractor yarding permitted between June 15 and October 15. This restriction may be waived or adjusted during dry periods, as determined by the Authorized Officer. This restriction may also be waived by the Authorized Officer if there is a minimum of twenty-four (24) inches of snow. No logging would be allowed once the snow depth deteriorates below eighteen inches of snow to protect soil from compaction. Skid trail spacing and soil moisture requirements would be waived if ground-based yarding takes place on top of a snowpack.</p> <p>No yarding will be allowed up or down draw bottoms.</p> <p>Landing size shall not exceed one-quarter (¼) acre. Front end loaders shall not be used in units or on landings, except as approved by the Authorized Officer.</p>

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (4) L-9 No yarding or loading is permitted in or through the reserve area as shown on Exhibit A, except as approved by the Authorized Officer.
- (5) L-11 No landing shall be located within one hundred eighty (180) feet of any stream as shown on Exhibit A.
- (6) L-18 No ground-based operations shall be conducted on the contract area between October 15 of one calendar year and June 15 of the following calendar year, both days inclusive. This restriction may be waived during dry soil conditions as approved by the Authorized Officer, or if there is a minimum of twenty-four (24) inches of snow. No logging would be allowed once the snow depth deteriorates below eighteen inches of snow to protect soil from compaction
- (7) L-18 No operator spur construction/use shall be permitted on the contract area between October 15 of one calendar year and June 15 of the following calendar year, both days inclusive. This restriction could be waived during dry conditions, as approved by the Authorized Officer.
- (8) L-18 No hauling or road maintenance/renovation shall be conducted on roads 38-3E-13.0, 38-3E-25.0, and 38-4E-19.0 between November 15 of one calendar year and May 15 of the following calendar year, both days inclusive. This restriction could be waived during dry conditions as directed by the Authorized Officer. Winter hauling would be allowed on paved roads or any road when at least 4 inches of packed frozen snow is present on hauling roads.
- (9) L-18 No hauling shall be conducted on roads 38-3E-11, 38-3E-11.5, 38-3E-13.1, 38-3E-13.3, 38-3E-19, 38-3E-25.1, 38-3E-25.2, 38-4E-7, 38-4E-7.1, 38-4E-7.2, 38-4E-19.3, 39-4E-5.1, 39-4E-5.2 between October 15 of one calendar year and June 15 of the following calendar year, both days inclusive. This restriction could be waived during dry conditions as directed by the Authorized Officer. Winter hauling would be allowed when at least 4 inches of packed frozen snow is present on hauling roads.
- (10) L-21 The Purchaser shall provide sufficient warning signs to control traffic on all roads where they pass through the contract area whenever harvest operations are adjacent to these roads and the harvest operations could create a hazard to the public.
- (11) L-24 Prior to the commencement of operations, the Purchaser shall obtain from the Authorized Officer written approval of a written operations and logging plan commensurate with the terms and conditions of the contract which shall include measures needed to assure protection of the environment and watershed. A pre-work conference between the Purchaser's authorized representative and the

SWINNING TIMBER SALE
SPECIAL PROVISIONS

Authorized Officer's representative must be held at a location designated by the Authorized Officer before the logging plan will be approved. All logging shall be done in accordance with the plan developed by this provision.

- (12) L-27 In all units shown on Exhibit A, all trees designated for cutting shall be felled away from unit boundaries, property lines, fences, streams, draw bottoms, seed trees, and administrative reserves. Active grazing allotments within the contract area require a higher level of awareness of the fences adjacent to harvest units. Fences damaged by operations are to be repaired at purchaser expense.
- (13) L-33 In accordance with the requirements of Section 8 of contract it has been determined that it is in the best interest of the Government and within the provisions of 43 CFR 5402.0-6 to sell additional timber located in the contract area, which is hazardous to workers, is severely damaged from the normal conduct of felling or yarding operations, or to meet all applicable State safety laws, codes or regulations. This timber must be cut or removed so that the Purchaser can continue active falling and yarding operations. The Purchaser is, therefore, authorized to cut and remove such additional timber in accordance with the provisions of Section 8 of the contract: provided, however, that:
- a) Trees reserved for the tree improvement program and trees reserved for the wildlife habitat objectives under Section 40 of the contract are not included in the authorization.
 - b) The Purchaser shall identify each tree sold and cut in accordance with the provision by marking the cut surface of the stump immediately after falling with a large "X". The "X" shall be cut with a chain saw. The stump shall be marked by yellow flagging so that that stump can be visually located from a distance of not less than 100 feet.
 - c) The volume and price for such timber shall be determined by the Authorized Officer in accordance with Bureau of Land Management prescribed procedures and paid for by the Purchaser in accordance with Section 3(b) or 3(d) of the contract as required by Section 8 of the contract.
 - d) No timber may be cut or removed under the terms of this provision if all contract payments required by Section 3(b) or 3(d) of the contract have been made.
 - e) The permission to cut and remove additional timber contained in this provision may be withdrawn by the Contracting Officer if the Authorized Officer determines that the Purchaser:

(1) failed to properly mark any stump with the "X" cut.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (2) failed to identify the location of any stump.
- (3) cut any tree that was reserved for tree improvement and/or wildlife habitat.
- (4) cut any tree in or adjacent to cable yarding corridors that was not necessary to facilitate cable yarding.
- (5) cut any reserve tree in or adjacent to tractor skid roads that was not necessary to facilitate ground based yarding.
- (6) failed to properly segregate any pulled over tree that was yarded to the landing.
- (7) cut any reserve tree that was not severely (as defined during the prework conference and documented in the approved logging plan) damaged from felling and yarding operations.
- (8) cut more than the minimum number of trees necessary to properly serve as guyline anchor stumps.
- (9) cut or topped more than the minimum number of trees necessary to properly serve as tailhold trees.
- (10) cut more than the minimum number of trees necessary to properly serve as tie-backs for topped tailhold trees.
- (11) failed to maintain accurate and current (no more than 24 hours old) documentation of cut and removed timber.

If the permission to cut and remove additional timber provision is withdrawn, the Authorized Officer shall deliver to the Purchaser a written notice that additional sale of timber under this special provision is no longer approved.

If the permission to cut and remove additional timber provision is withdrawn, the Purchaser shall inform the Authorized Officer at least two working days prior to the need for cutting and yarding any danger tree, pulled over tree, and severely damaged tree. All sales of additional timber shall comply with Section 8 of the contract. The Contracting Officer may order the Purchaser, in writing, to suspend, delay, or interrupt all or any part of the work of this contract for the period of time that the Contracting Officer determines appropriate for the Government to safely measure and mark additional timber.

All ground based equipment skid roads upon which timber may be cut and removed in accordance with this special provision must be needed for the removal of timber sold under this contract and shall be limited to the narrowest width necessary for the yarding of logs with minimum damage to reserved trees.

The purchaser shall be liable for damages in accordance with Section 13 of the contract for any reserved timber cut or removed in violation of the terms of this special provision.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

(C) Road Construction - Maintenance - Use

- (1) RC-1a The Purchaser shall construct, improve and/or renovate all roads and other structures in strict accordance with the plans and specifications shown on Exhibit C, which is attached hereto and made a part hereof.
- (2) RC-1b Prior to removal of any timber, except right-of-way timber, the Purchaser shall complete all construction, improvement, or renovation of structures and roads as specified in Exhibit C.
- (3) RC-2 The Purchaser is authorized to use the roads listed below and shown on Exhibit C-2 which are under the jurisdiction of the Bureau of Land Management, and or Fruit Growers Supply Company for the removal of Government timber sold under the terms of this contract and/or the hauling of rock as required in Exhibit C, provided that the Purchaser pay the required maintenance obligations described in Section 41(C)(6). Any road listed below and requiring improvement or renovation in Exhibit C of this contract, shall be maintained by the Purchaser until receiving written acceptance of the improvement or renovation from the Authorized Officer. The Purchaser shall pay current Bureau of Land Management maintenance fees for the sale of additional timber under modification to the contract.

Road No. and Segment	Length Miles Used	Road Control	Road Surface Type
38-3E-11.00	0.26	BLM	PRR
38-3E-13.00	0.14	BLM	PRR
38-3E-25.00	0.60	BLM	ASC
38-4E-19.00	0.72	BLM	PRR
39-4E-5.01	0.08	BLM	ASC
39-4E-5.02	0.07	BLM	ASC
39-7E-31.00	2.86	BLM	BST
Total	4.73		

- (4) RC-2a The Purchaser is authorized to use the roads listed below and shown on Exhibit C-2 which are under the jurisdiction of the Bureau of Land Management, the removal of Government timber sold under the terms of this contract and/or the hauling of rock as required in Exhibit C, provided that the Purchaser comply with the conditions set forth in Section 41(C)(9). The Purchaser shall pay current Bureau of Land Management rockwear fees for the sale of additional timber under modification to the contract.

Road No. and Segment	Length Miles Used	Road Control	Road Surface Type
38-3E-11.05	0.68	BLM	NAT

SWINNING TIMBER SALE
SPECIAL PROVISIONS

Road No. and Segment	Length Miles Used	Road Control	Road Surface Type
38-3E-13.01	0.24	BLM	NAT
38-3E-13.03	0.08	BLM	NAT
38-3E-25.01	0.42	BLM	NAT
38-3E-25.02	0.43	BLM	NAT
38-4E-7.00	2.85	BLM	NAT
38-4E-19.02	0.13	BLM	NAT
38-4E-19.03	0.39	BLM	NAT
39-4E-1.04	0.06	BLM	NAT
Total	5.28		

- (5) RC-2b With the prior written approval of the Authorized Officer, the Purchaser may arrange for cooperative maintenance with other users on road included in Section 41(C)(4) of this contract; provided, that such cooperative arrangement shall not relieve the Purchaser of his liability for the maintenance and repair of such roads resulting from wear or damage, in accordance with this contract. The Purchaser shall furnish the Authorized Officer a copy of any cooperative maintenance agreements entered into with other users on these roads.
- (6) RC-2c The Purchaser shall pay the Government a road maintenance obligation in the amount of One Thousand Four Hundred Nine and 97/100 dollars (\$1,409.97) for the transportation of timber included in the contract price and for the transportation of any mineral material required under the terms of the contract over road or roads listed in Section 41(C)(3).

The above road maintenance amount is for use of 4.73 miles of road or less. Unless the total maintenance amount is paid prior to commencement of operations on the contract area, payments shall be made in installments of not less than Five hundred dollars (\$500.00); payable in the same manner as and together with payments required in Sec. 3 of this contract. The total maintenance amount shall be paid prior to the removal of timber from the contract area.

- (7) RC-2d The Purchaser shall be authorized to use other roads not included in Section 41(C)(3) and/or Section 41(C)(4) provided, that in the use of such road(s), the Purchaser shall pay the Government current Bureau of Land Management road maintenance fees for the particular surface type of the road(s) used.
- For administrative purposes the total maintenance and rockwear obligation due shall be based upon the estimated volume set forth in Exhibit B of this contract and mileage of roads used as determined by the Authorized Officer.

In the event logs are hauled over more than one route, the estimated volume set forth in Exhibit B shall be proportioned on the basis of actual volume removed.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

Prior to the use of such roads, the Purchaser shall give written notice to the Authorized Officer of the roads intended for use in the removal of the timber purchased under this contract, together with an estimate of the volume to be hauled over such roads.

Section 41(C)(6) of this contract shall be amended to include adjustments of fee obligations.

- (8) RC-2f The Authorized Officer may at any time by written notice, terminate the Purchaser's operator road maintenance obligations and require instead payment of current Bureau of Land Management road maintenance fees for the particular surface type of the road(s) involved. These fees will be applied to the remaining contract volume on the sale area to be transported over road or roads listed in Section 41(C)(4). The Purchaser shall pay the total maintenance amount for said road(s) within thirty (30) days following receipt of written notice; provided, however, that if the total amount exceeds five hundred and no/100 dollars (\$500.00), the Purchaser may elect to make payment in installments in the same manner as and together with payments required in Section 3 of this contract.
- (9) RC-2h The Purchaser shall perform any required road repair and maintenance work on roads used by him, under the terms of Exhibit D, "Road Maintenance Specifications," of this contract, which is attached hereto and made a part hereof.
- (10) RC-3d The Purchaser agrees that if they elect to use any other private road which is the subject of a right-of-way agreement with the Government for the removal of Government timber sold under the terms of this contract, the Purchaser shall request and agree to the modification of this contract to provide for such use and for allowances for amortization of the Government's share of the capital investment of any such road.
- (11) RC-8 The Purchaser shall be required to secure written approval to use vehicles or haul equipment over Government owned or controlled roads and/or structures when that vehicle or equipment exceeds the maximum allowable weights or dimensions established by the State for vehicles operating without a permit.

Details of such equipment shall be furnished to the Authorized Officer for evaluation of load characteristics, at least fifteen (15) days prior to proposed move-in.

Details shall include:

- (a) Axle weights when fully loaded.
- (b) Axle spacing.
- (c) Transverse wheel spacing.
- (d) Tire size.
- (e) Outside width of vehicle.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (f) Operating speed.
- (g) Frequency of use.
- (h) Special features (e.g., running tracks, overhang loads, etc.)

The Purchaser shall be responsible for repair of any damage to roads or structures caused by the use of overweight or over-dimension vehicles (1) without written approval, (2) in violation of the conditions of a written approval or (3) in a negligent manner. The amount of actual damage shall be determined by the Authorized Officer following a technical inspection and evaluation.

(D) Environmental Protection

- (1) E-1 In addition to the requirement set forth in Sec. 25 of this contract, the Purchaser shall:

- (a) Abate dust created from hauling in accordance with Exhibit D, and as directed by the Authorized Officer.
- (b) Scarify and contour landings to provide for adequate drainage. Bare soil due to landing construction/renovation would be protected and stabilized prior to fall rains to reduce soil erosion and sediment potential. Straw mulch and seed exposed earth on tractor landings with certified weed free straw and seed mixture as directed and approved by the Authorized Officer. Selected landings may be left "as is" where natural rock occurs or where vegetation/topography prevents movement of sediment, as determined by the Authorized Officer. The seed mix and straw shall be provided by the purchaser from an approved commercial source, or may be provided by the BLM if the purchaser is unable to locate and buy the certified seed and straw. The purchaser shall reimburse the government for the cost of seed and straw if provided by the government.

The Purchaser shall furnish and apply to acres designated for treatment as directed by the Authorized Officer, a mixture of grass seed and mulch material at the following rate of application:

Grass seed	20 lbs./acre
Straw mulch	1000 lbs./acre (approx. 2 inches in depth)

The Purchaser shall furnish the following species of grass seed meeting corresponding germination, purity, and weed content requirements:

	Germination	Purity	Weed Content
<u>Species</u>	<u>Min. %</u>	<u>Min. %</u>	<u>Max. %</u>

SWINNING TIMBER SALE
SPECIAL PROVISIONS

California Brome	85	95	0.2
Blue Wild Rye	85	95	0.2

The grass seed furnished shall meet the minimum requirement for Blue Tag Seed as set forth in the latest edition of Oregon Certification Standards published by Oregon State University. Seed source shall be approved by the Authorized Officer and shall be from the general region where the project occurs. Straw mulch shall be from native grass or other approved grain crops which are certified weed free, and free of mold or other objectionable materials. Straw mulch shall be in an air-dry condition and suitable for placing in a uniform manner.

The Purchaser shall mix grass seed in the following proportions:

<u>Species</u>	<u>Percent of</u>	
	<u>Total by Wt.</u>	<u>Lbs. per Acre</u>
California Brome	50%	10
Blue Wild Rye	50%	10
TOTALS	100%	20 lbs./ac.

The Purchaser shall furnish the Authorized Officer a Seed Test result from a certified seed testing lab (i.e. Oregon State University), which shall include: date of test; lot number of each kind of seed; seed source; and results of tests as to name, percentages of purity and of germination, weed species and percentage of weed content, for each kind of seed furnished and, in case of mixture, the proportions of each kind of seed. The seed must have been tested within the last year to be accepted for use on this contract. The seed and straw mulch shall be applied between August 1 and October 15. The Purchaser shall notify the Authorized Officer at least 5 days in advance of the date he intends to commence the specified soil stabilization work.

- (c) Construct earth and log barricades on main skid trails where they intersect haul roads, as directed by the Authorized Officer.
 - (d) During winter haul (if approved), snow plow only half (or one vehicle width) of Keno Access provide unplowed track for snowmobiles. Plowed turnouts at appropriate intervals would be approved as needed. Snow plowing would maintain at least 4 inches of packed snow on haul roads.
- (2) E-1 In addition to requirement set forth in Sec. 25 of this contract, the Purchaser shall remove all slash and debris from roadways, ditchlines, catchbasins, and landings concurrently with yarding, or as directed by the Authorized Officer.
- (3) E-1 In addition to the requirement set forth in Sec. 25 of this contract, the Purchaser shall prepare a Spill Prevention, Control, and Countermeasure Plan for all hazardous substances to be used in the contract area. Such plans must comply with the State of Oregon DEQ OAR 340-142, *Oil and Hazardous Materials Emergency Response Requirements*.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (4) E-1 In addition to the requirement set forth in Sec. 25 of this contract, the Purchaser shall not refuel equipment, store, or cause to have stored, any fuel or other petroleum products within three hundred (300) feet of any stream or wet areas as shown on Exhibit A. All petroleum products shall be stored in durable containers and located so that any accidental releases will be contained and not drain into any stream system. Waste diesel, oil, hydraulic fluid and other hazardous materials and contaminated soil would be removed from the site and disposed of in accordance with DEQ regulations. Areas that have been saturated with toxic materials would be excavated to a depth of 12 inches beyond the contaminated material or as required by DEQ. Hydraulic fluid and fuel lines on heavy mechanized equipment must be in proper working condition in order to avoid leakage.
- (5) E-1 In addition to the requirement set forth in Section 25 of this contract, the Purchaser shall implement the following noxious weed control measures shall be implemented by the purchaser:
- (a) In order to prevent the potential spread of noxious weeds into the Medford District BLM, the operator would be required to clean all logging construction, rock crushing, and transportation equipment prior to entry on BLM lands.
 - (b) Cleaning shall be defined as removal of dirt, grease, plant parts, and material that may carry noxious weed seeds into BLM lands. Cleaning prior to entry onto BLM lands may be accomplished by using a pressure hose.
 - (c) Only logging and construction equipment inspected by the BLM would be allowed to operate within the Analysis Area. All subsequent move-ins of logging and construction equipment as described above shall be treated the same as the initial move-in.
 - (d) Prior to initial move-in of any logging or construction equipment, and all subsequent move-ins, the operator shall make the equipment available for BLM inspection at an agreed upon location off Federal lands.
 - (e) Logging and construction equipment would be visually inspected by the Authorized officer to verify that the equipment has been reasonably cleaned.
- (6) E-2 The water bars to be constructed as required by Sec. 25(c) shall be constructed in accordance with the specifications shown on Exhibit W, which is attached hereto and made a part hereof.
- (7) E-3 If, in connection with operations under this contract, the Purchaser, their contractors, subcontractors, or the employees of any of them, discovers, encounters, or becomes aware of any objects or sites of cultural value on the contract area such as historical or pre-historical ruins, graves or grave markers,

SWINNING TIMBER SALE
SPECIAL PROVISIONS

fossils, or artifacts, the Purchaser shall immediately suspend all operations in the vicinity of the cultural value and shall notify the Authorized Officer of the findings. Operations may resume at the discovery site upon receipt of written instructions and authorization by the Authorized Officer

- (8) E-4 The Purchaser shall immediately discontinue specified construction or timber harvesting operations upon written notice from the Contracting Officer that:
- (1) threatened or endangered plants or animals protected under the Endangered Species Act of 1973, as amended, may be affected by the operation, and a determination is made that consultation or reinitiation of consultation is required concerning the species prior to continuing operation, or;
 - (2) when, in order to comply with the Endangered Species Act, the Contracting Officer determines it may be necessary to modify or terminate the contract, or;
 - (3) federal proposed, federal candidate, Bureau sensitive or State listed species protected under BLM Manual 6840 - Special Status Species Management - have been identified, and a determination is made that continued operations would affect the species or its habitat, or;
 - (4) other active raptor nests have been discovered, and a determination is made that continued operations under this contract would adversely affect the present use of the discovered nesting area by the raptor, or;
 - (5) when, in order to comply with a court order which enjoins operations on the sale or otherwise requires the Bureau of Land Management to suspend operations, or;
 - (6) when, in order to comply with a court order, the Contracting Officer determines it may be necessary to modify or terminate the contract, or;
 - (7) species have been discovered which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, and the Contracting Officer determines that continued operations would affect the species or its habitat, or;
 - (8) when, in order to protect species which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, the Contracting Officer determines it may be necessary to modify or terminate the contract.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

Those operations necessary for a safe removal of personnel and equipment from the contract area and those directed by the Contracting Officer which are required in order to leave the contract area in an acceptable condition will be permitted. Discontinued operations may be resumed upon receipt of written instructions and authorization by the Contracting Officer.

During any period of suspension, the Purchaser may withdraw performance and payment bond coverage aside from that deemed necessary by the Authorized Officer to secure cut and/or removed timber for which the Bureau of Land Management has not received payment, and/or unfulfilled contract requirements associated with harvest operations that have already occurred and associated post-harvest requirements.

In the event of a suspension period or a combination of suspension periods that exceed a total of 30 days, the First Installment held on deposit may be temporarily reduced upon the written request of the Purchaser. For the period of suspension extending beyond 30 days, the First Installment on deposit may be reduced to five (5) percent of the First Installment amount listed in Section 3.b. of the contract. Any First Installment amount temporarily reduced may be refunded or transferred to another BLM contract at the request of the Purchaser. However, if the Purchaser has outstanding debt owing the United States, the Contracting Officer must first apply the amount of First Installment that could be refunded to the debt owed in accordance with the Debt Collection Improvement Act, as amended (31 USC 3710, *et seq.*). Upon Purchaser's receipt of a bill for collection and written notice from the Contracting Officer lifting the suspension, the Purchaser shall restore the First Installment to the full amount shown in Section 3.b. of the contract within 15 days after the bill for collection is issued, subject to Section 3.h. of the contract. The Purchaser shall not resume contract operations until the First Installment amount is fully restored.

In the event of a suspension period or a combination of suspension periods that exceed a total of 30 days, the unamortized Out-of-Pocket Expenses for road or other construction required pursuant to Exhibit C of the contract shall be refunded or transferred to another BLM contract at the request of the Purchaser. Upon written notice from the Contracting Officer lifting the suspension, the Purchaser shall reimburse the Government the amounts refunded or transferred. The Purchaser may choose to pay this reimbursement at once or in installments payable at the same time as payments are due for the timber under the contract and in amounts approximately equal to the expenses associated with the timber for which payment is due.

In the event that operating time is lost as a result of the incorporation of additional contract requirements, or delays due to Endangered Species Act consultation with the U.S. Fish and Wildlife Service or U.S. National Marine Fisheries Service, or court-ordered injunctions, the Purchaser agrees that an extension of time, without reappraisal, will constitute a full and complete remedy for any claim that delays due to the suspension hindered performance of the contract or resulted in damages of any kind to the Purchaser.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

The Contracting Officer may determine that it is necessary to terminate the cutting and removal rights under the contract in order to comply with the Endangered Species Act, protect species that have been discovered which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, or comply with a court order. Following the issuance of a written notice that cutting and removal rights will be terminated, the Purchaser will be permitted to remove timber cut under the contract, if allowed by the Endangered Species Act, survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, or court order requirements necessitating the modification or termination.

In the event cutting and removal rights are terminated under this subsection, the Purchaser agrees that the liability of the United States shall be limited to the actual costs incurred by the Purchaser which have not been amortized by timber removed from the contract area. This calculation of liability shall utilize actual Purchaser costs and Government estimates of timber volumes. At the Authorized Officer's request, the Purchaser agrees to provide documentation of the actual costs incurred in the performance of the contract. In addition, the Purchaser shall be released from the obligation to pay the contract price for any timber which is not authorized to be removed from the contract area.

The Purchaser specifically and expressly waives any right to claim damages, other than those described in the preceding paragraphs, based on an alleged breach of any duty to the Purchaser, whether express or implied, in regard to the manner in which the Government defended the litigation which resulted in the court order affecting the operation of the contract. This waiver also extends to any claims based on effects on the operation of the contract that arise from litigation against another agency. Furthermore, the Purchaser specifically acknowledges and agrees that a court ruling that the Government violated the Administrative Procedures Act cannot be interpreted, in itself, to mean that the Government had not acted reasonably in regard to its duties to the Purchaser under this contract.

(E) Miscellaneous

- (1) M-2 The Government, at its option, may administratively check scale any portion of the timber removed from the contract area, and if necessary, conduct check scaling of independent scalers contracted to BLM for administrative check scaling purposes. The Purchaser hereby agrees to make such contract timber available for such scaling at a location or locations to be approved in writing by the Authorized Officer. At the approved location or locations, the Purchaser shall provide an area for logs to be safely rolled out for scaling, to unload logs from trucks, place logs in a manner so that both ends and three faces of each log are visible for scaling, and to reload or remove logs after scaling has been completed. In the event that BLM elects to administratively check scale and if such check scaling causes a delay in log transportation time, an adjustment will be made to the purchase price

SWINNING TIMBER SALE
SPECIAL PROVISIONS

as follows: If the entire sale is check scaled, the purchase price of this contract shall be reduced by \$2,030.25. In the event that only a portion of the contract timber is scaled, the purchase price shall be reduced by that portion of \$2,030.25 which is equal to the percentage of timber sold which was actually scaled by the Government. For purposes of computing this price reduction, the percentage of timber sold which has been scaled shall be determined by the Government. Any reduction in purchase price under the terms of this provision shall be full compensation to the Purchaser for any expense or loss incurred as a result of such scaling. Scaling shall be conducted in accordance with the National Cubic Scaling Rules by BLM scalers, and/or independent scalers contracted to BLM. A copy of the scale report will be made available to the Purchaser upon request.

- (2) M-5 The Purchaser shall, without expense to the government, be responsible for obtaining any necessary licenses and permits and for complying with any and all Federal, State, County and municipal laws, codes, regulations, and administrative rules applicable to the performance of this contract. The Purchaser shall also be responsible for all damages to any persons or property that arise out of any operations under this contract and result from any breach of contract or wrongful or negligent act or omission of the Purchaser, its contractors, subcontractors, or employees of any of them.

(F) Fire Prevention and Control

- (1) F-1a Fire Prevention and Control. Primarily for purposes of fire prevention and control, the Purchaser shall comply with the following provisions:
- (a) Prior to the operation of power driven equipment in construction or logging operations under this contract during the closed fire season or periods of fire danger, prepare a fire prevention and control plan to the satisfaction of the State of Oregon, Department of Forestry.
- (b) Provide and maintain in good repair, on the contract area, the following equipment for use during closed fire season or periods of fire danger:
- (1) F-2a Fire fighting tools shall be kept at each landing or at such other place as the Authorized Officer shall designate whenever people are working on the contract area. All fire fighting tools shall be kept in a sturdily constructed box which shall be painted red and lettered on the front or top in large letters, "For Fire Only." The box shall have a hinged lid and a hasp by which the lid can be sealed. One box may serve two landings not over six hundred (600) feet apart. When filled, the box shall not weigh over two hundred (200) pounds. The fire tools shall be in good condition, be tight on strong handles, and have sharp cutting edges. There shall not be less than four (4) tools in each box nor less than one

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (1) tool for each person working on the contract area. Three-fourths ($\frac{3}{4}$) of all fire tools shall be shovels, hazel hoes, or other scraping tools. The fire tools shall be used only for fighting fire.
- (2) F-2b A round pointed size "0" or larger shovel in good condition, shall be within fifty (50) feet of any power saw when in operation.
- (3) F-2c At each landing during periods of operation one (1) tank truck. Each truck shall have three hundred (300) gallons minimum capacity with five hundred (500) feet minimum of hose and a nozzle acceptable to the Authorized Officer and a mounted or portable pump conforming to the standards set forth in Oregon Revised Statute (ORS) 477.645 through ORS 477.670 and any rule promulgated pursuant to those statutes. All hose couplings shall have the standard thread adopted by the State Fire Marshall pursuant to ORS 476.410 as amended or be provided with suitable adapters. At the close of each working day, all bulldozers and tank trucks shall be filled with fuel and made ready for immediate use. All tank trucks and portable tanks shall be filled with water and made available for immediate use.
- (4) F-2d Serviceable radio or cellular/satellite telephone equipment able to provide prompt and reliable communication between the contract area and Medford, Oregon. Such communication shall be available during periods of operation including the time watch-service is required.
- (5) F-2e A pair of headlights capable of being quickly attached to each bulldozer used on the contract area. The headlights shall be adequate to provide illumination sufficient to allow use of the bulldozers for fire fighting and construction of fire trails at night.
- (6) F-2f A headlight for each person in the woods crew adequate to provide sufficient illumination for night fire fighting. A headlight shall be of the type that can be fastened to the head so as to allow independent use of the hands. It shall be equipped with a battery case so designed that it can be either carried in the hip pocket or fastened to the belt. The head of the light and the battery case shall be connected by insulated wires. At least one extra set of batteries shall be provided for each such headlight.
- (7) F-2g Two (2) back-pack pumps at each landing and one (1) at each tail block, all to be kept full of water and in good operating condition.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (8) F-2h A chemical fire extinguisher of at least eight (8) ounces minimum capacity of a type approved by the Oregon State Forester shall be carried during the closed fire season or periods of fire danger by each saw operator using a power saw on the contract area. Such fire extinguisher shall be filled and in effective operating condition and shall at all times be immediately available to the operator when the saw is being fueled or the motor of the saw is running. A size "0" or larger shovel shall be available with each gas can when refueling. Any fueling of a power saw shall be done in an area which has first been cleared of all flammable material. Power saws shall be moved at least twenty (20) feet from the place of fueling before the engine is started. Each power saw shall be equipped with an exhaust system and a spark arresting device which are of types approved by the Oregon State Forester.
- (9) F-5 Where blocks and cables are used on the contract area during periods of fire danger, the Purchaser shall remove all flammable material at least ten (10) feet from the place where the tail or any other block will hang when the cable is tight. Such clearings shall be inspected periodically by the Purchaser, and shall be kept free of flammable material.

(G) **Slash Disposal and Site Preparation**

- (1) SD-4 Logging Residue Reduction. In addition to the requirements of Sect.15 of this contract, and notwithstanding the Purchaser's satisfactory compliance with State laws and regulations regarding offsetting or abating the additional fire hazard created by this operation and the State's willingness to release the Purchaser from liability for such hazard, the Purchaser shall remain responsible to the Government for performance of the following logging residue reduction and site preparation measure(s) required by this contract:
 - (a) Prior to commencement of any operation under this section of the contract, a slash disposal and site preparation pre-work conference between the purchaser's representative and the Authorized Officer must be held at a location designated by the Authorized Officer. All slash disposal and site preparation shall be done in accordance with the plans developed at this pre-work conference.
 - (b) Slash, as defined for this section, shall mean all material (brush, limbs, tops, unmerchantable stems, and chunks) severed or knocked over as a result of purchasers operations under the terms of this contract, including material cut during slashing activities for the purposes of fuels reduction.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (c) Refueling of chainsaws and other equipment will be done no closer than one hundred fifty (150) feet of any stream or wet area. Spilled fuel and oil would be cleaned-up and would be disposed of at an approved disposal site.

- (d) SD-1h HANDPILE Handpile all slash as directed by the Authorized Officer in accordance with the following specifications:
 - 1. Piling shall be accomplished by hand. Finished piles shall be tight and free of earth.
 - 2. Pile all slash which is between one (1) and six (6) inches in diameter on the large end and exceeds three (3) feet in length.
 - 3. A six (6) foot by six (6) foot sheet of 4 mil polyethylene black plastic shall be placed in each pile in a manner such that approximately one-third ($\frac{1}{3}$) of the pile lies above it to hold it in place and so that a two (2) foot by two (2) foot dry ignition point is maintained for one (1) year or until burned. The ignition point will consist of fine fuel material such as needles, small limbs, and branches less than one-half ($\frac{1}{2}$) inch in diameter and free of dirt. Piles shall be constructed by aligning individual pieces in the same direction and placing the heavier slash on top. Piles shall have a stable base to prevent toppling. The long axis of individual pieces shall be oriented up and down the slope. Protruding pieces shall be trimmed to allow covering in a manner that permits the pile to shed water. Height shall be no less than four (4) feet and no greater than six (6) feet; width shall not exceed six (6) feet; piles shall be circular and not windrowed. No pile shall be located in any stream channel; on down logs, stumps, talus slopes, roadways, drainage ditches, within ten feet of reserve trees, within 25 feet of designated wildlife trees and within ten feet of any other pile or unit boundary. No portion of the pile will be under the crown of any living conifer tree.

- (e) SD-1d Operations required by this provision shall be kept current with yarding as directed by the Authorized Officer and shall be conducted as follows:
 - 1. Units shall be piled and covered during the same season that they are logged. Piling shall be completed in each unit or portion thereof, within eight (8) weeks after being notified of BLM site treatment determination.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- (f) SD-1j LANDING SLASH In all units as shown in the Exhibit A, pile all slash located within fifty (50) feet on each side of each landing. Slash shall be piled by a grapple loader. Finished piles shall be tight and free of earth.

1. A ten (10) foot by ten (10) foot cover of six (6) mil black plastic shall cap each hand pile to maintain a dry ignition point. The cover shall be firmly fixed to each pile to hold it in place. Landings shall be piled and covered during the same season that they are logged.

- (2) SD-5 Perform logging residue reduction and site preparation work on approximately 100 acres of harvest area as directed by the Authorized Officer.

- (a) The required work shall consist of any treatment or combination of treatments listed in the table below, as determined by the Authorized Officer and specified in writing by the Contracting Officer. The number of acres of each treatment shall be determined by the Authorized Officer.

Treatment	Cost/Acre
Handpile and Cover - L2	\$383.00
Burn Handpile – L2	\$44.00

- (b) The following treatments were assumed for appraisal purposes on this contract:

Treatment/Level	Cost Per Acre	Number of Acres	Total Cost Per Treatment Type
Hand pile and cover L2	\$383.00	100	\$38,300.00
Hand Pile Burn L2	\$44.00	100	\$4,400.00
Total Appraised Cost			\$42,700.00

- (c) The total Purchase Price set forth in Section 2 shall be adjusted by the amount that the total cost of the site preparation treatments designated pursuant to Section 41(G)(2)(a) differs from \$42,700.00 as calculated by using the estimated acres determined by the Authorized Officer and the per acre costs listed in Section 41(G)(2)(a).

- (3) SD-2 Notwithstanding the provisions of Section 15 of this contract, the Government shall assume all obligations for disposal or reduction of fire hazards created by Purchaser's operations on Government lands, except for burning, and mop-up assistance as required herein. In accordance with written instructions to be issued by the Authorized Officer at least ten (10) days in advance of earliest date of required performance, the Purchaser shall, under supervision of the Authorized Officer or designated representative, assist in preparing units for

SWINNING TIMBER SALE
SPECIAL PROVISIONS

burning, mop-up, and patrol by furnishing, at the Purchaser's own expense, the services of personnel and equipment on each unit as shown below.

- (a) In Units the Purchaser shall fall any trees or snags as determined by the Authorized Officer or designated representative to be hazardous for the prescribed burning operations. This work shall be completed within one (1) month of completion of yarding the unit.
- (b) Burn and mop-up landings in accordance with Sections 41(G)(3)(b)(1) and (G)(3)(b)(2).
 - 1. Prescribed fire plans shall be prepared for hand pile burning activities to ensure that resource and fire management objectives are met by setting parameters under which the burning may take place. Prescribed burning within the harvest units will be conducted in a manner that will minimize damage to reserve trees, duff and soil, and to avoid loss of large, coarse woody debris and will be consistent with ecosystem management objectives.
 - 2. Piles will be burned in the fall/winter season after one or more inches of precipitation has occurred to reduce the potential for fire spread and scorch and mortality to the residual trees and shrubs. Patrol and mop-up of burning piles will occur when needed to prevent escape. The timing of prescribed burns depends on these parameters and the availability of adequate fire suppression resources as a contingency plan in the event of escaped fire.
 - 3. For Igniting and Burning Piles in Units as directed by the Authorized Officer and All Landings
 - a. One (1) person to supervise crew(s) and equipment operators, and to serve as Purchaser's representative. One (1) person shall meet the qualifications and fitness standards for Crew Boss (Single Resource) (CRWB) as shown on Exhibit S-310-1.
 - b. One (1) crew with ten (10) members per crew, including a designated crew foreman. Each crew shall be equipped with fuel, drip torches, shovels, pulaskis, one (1) power saw and one (1) backpack pump; one (1) tool for each crew member. Crew members shall meet the qualifications and fitness standards for Firefighter (FFT2) as shown on Exhibit S-310-1. Crew Foreman shall meet the qualifications and fitness standards for Advanced

SWINNING TIMBER SALE
SPECIAL PROVISIONS

Firefighter/Squad Boss (FFT1) as shown on Exhibit S-310-1.

- c. Two (2) tank truck drivers. One (1) person assigned to each tank truck shall meet the qualifications and fitness standards for Engine Boss (Single Resource) (ENGN) as shown on Exhibit S-310-1.
- d. Two (2) tank trucks. One truck shall have one thousand (1,000) gallons or more capacity and one (1) truck shall have five hundred (500) gallons acceptable to the Authorized Officer. Each truck shall be equipped with a mounted pump conforming to the standards set forth in ORS 477.645 through ORS 477.670 and any rule promulgated pursuant to those statutes. Tank(s) shall be filled with water.
- e. Each tank truck shall have one thousand (1,000) feet of one and one-half (1½) inch hose and one thousand (1,000) feet of one (1) inch hose. Six (6) gated "Y" valves, six (6) one and one-half (1½) to one (1) inch reducers, and six (6) combination fog and stream nozzles. All hose fittings shall match the couplings on the required hose. All hose couplings shall have the standard thread adopted by the State Fire Marshall pursuant to ORS 476.410 as amended.
- f. Ten (10) drip torches, Forester Sealtite, or equivalent.
- g. Hand ignition with drip torches is required in Units described by the Authorized Officer, all ignition personnel will be directly supervised by a BLM representative.
- h. All crews shall arrive on the project area(s) with radios capable of inter-crew communications and communications with a BLM representative at a ratio of one (1) radio per every five (5) crew members.
- i. All ignition personnel shall arrive at the project area(s) with the following personal protective equipment: minimum eight (8) inch top, laced, leather boots with lug soles, long sleeve Aramid shirts and full length Aramid trousers, leather gloves, fire shelter, hardhat with chin strap, goggles, and ear plugs.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

4. Mop-up of All Hand Piles in Units described by the Authorized Officer. Mop-up all Landing Piles. All mop-up personnel will be directly supervised by a BLM representative.
- a. Foam will not be used within 150 feet of stream channels to control spread of prescribed fire.
 - b. One (1) person to supervise crew(s) and equipment operators, and to serve as Purchaser's representative. One (1) person shall meet the qualifications and fitness standards for Crew Boss (Single Resource) (CRWB) as shown on Exhibit S-310-1.
 - c. One (1) crew with ten (10) members per crew, including a designated crew foreman. Each crew shall be equipped with fuel, drip torches, shovels, pulaskis, one (1) power saw and one (1) backpack pump; one (1) tool for each crew member. Crew members shall meet the qualifications and fitness standards for Firefighter (FFT2) as shown on Exhibit S-310-1. Crew Foreman shall meet the qualifications and fitness standards for Advanced Firefighter/Squad Boss (FFT1) as shown on Exhibit S-310-1.
 - d. One (1) tank truck driver. One (1) person assigned to each tank truck shall meet the qualifications and fitness standards for Engine Boss (Single Resource) (ENGX) as shown on Exhibit S-310-1.
 - e. One (1) tank truck. Each truck shall have one thousand (1,000) gallons or more capacity acceptable to the Authorized Officer. Each truck shall be equipped with a mounted pump conforming to the standards set forth in ORS 477.645 through ORS 477.670 and any rule promulgated pursuant to those statutes. Tank(s) shall be filled with water.
 - f. Each tank truck shall have one thousand (1,000) feet of one and one-half (1½) inch hose and one thousand (1,000) feet of one (1) inch hose. Six (6) gated "Y" valves, six (6) one and one-half (1½) to one (1) inch reducers, and six (6) combination fog and stream nozzles. All hose fittings shall match the couplings on the required hose. All hose couplings shall have the standard thread adopted by the State Fire Marshall pursuant to ORS 476.410 as amended.

SWINNING TIMBER SALE
SPECIAL PROVISIONS

- g. All crews shall arrive on the project area(s) with radios capable of inter-crew communications and communications with a BLM representative at a ratio of one (1) radio per every five (5) crew members.
- h. All mop-up personnel shall arrive at the project area(s) with the following personal protective equipment: minimum eight (8) inch top, laced, leather boots with lug soles, long sleeve Aramid shirts and full length Aramid trousers, leather gloves, fire shelter, hardhat with chin strap, goggles, and ear plugs.

Aircraft and pilots used for Logging Residue Reduction or the suppression of escaped fires from Logging Residue Reduction operations, shall be acquired from a list of aircraft and pilots approved (i.e., carded for these specific activities) by the Office of Aircraft Services or the U.S. Forest Service. This list is available from BLM District Offices upon request.

All listed personnel shall meet the qualifications, physical fitness standards, and currency requirements shown on Exhibit S-310-1. All personnel shall arrive at the project area(s) with the following personal safety equipment: minimum eight (8) inch top, laced, leather boots with lug soles, long sleeve Aramid shirts and full length Aramid trousers, leather gloves, fire shelter, hardhat with chin strap, goggles, and ear plugs.

All crews shall arrive on the project area(s) equipped with radios capable of inter-crew communications and communication with a BLM representative at the ratio of one (1) radio per every five (5) crew members.

All listed tools and equipment shall be in good usable condition. All power-driven equipment shall be fully fueled and available for immediate use. During periods of use under this subsection, the Purchaser shall provide fuel and maintenance for all such power-driven equipment.

Except as provided hereafter for fire escapement, the Purchaser shall continue the required assistance in mop-up on each unit to be burned as shown on Exhibit S as required in Section 41(G) for 750 work hours for each broadcast burn unit and 450 work hours for each piled unit and piled landing as directed by the Authorized Officer within a ten (10)-day period beginning 8:00 a.m. the day following completion of ignition in that unit or until released from such services by the Authorized Officer, whichever occurs first.

In the event of a fire escapement, Purchaser's personnel and equipment shall, under supervision of the Authorized Officer or designated representative, take

SWINNING TIMBER SALE
SPECIAL PROVISIONS

action to suppress, including control and mop-up, the escaped fire until released from such service by the Government. If it becomes necessary to suppress a fire which escapes from the prescribed fire area for a period beyond midnight of ignition day, then the Government shall, at its option: (1) reimburse Purchaser for such additional use of personnel and equipment at wage rates shown in the current Administratively Determined Pay Rates for Western Area and at equipment rates shown in the current Oregon-Washington Interagency Fire Fighting Equipment Rental Rates schedule, until the Purchaser is released from such service by the Government, or (2) release the Purchaser from additional suppression work and assume responsibility for suppressing the escaped fire.

In situations where an escaped fire is controlled and contained by an adequate fire break (i.e., trail, road, stream, rock formation, etc.), the Government may permit the Purchaser to remove personnel for that day; provided that, all mop-up work on the escaped fire area is included with mop-up work on the prescribed fire area. In such an event, the Purchaser must sign a statement of agreement to complete mop-up work on all escaped fire areas concurrently with mop-up work on the prescribed fire area.

In case of injury to personnel or damage to equipment furnished by the Purchaser as required by this subsection, liability shall be borne by the Purchaser, unless such injury or damage is caused by Government negligence.

Time is of the essence in complying with this provision. In the event the Purchaser fails to provide the personnel and equipment required herein, the Purchaser shall be responsible for all additional costs incurred by the Government in disposing of slash including but not limited to the wages and other costs of providing federal employees and others as substitute labor force, the cost of providing substitute equipment and appropriate additional overhead expenses. If the Purchaser's failure results in deferral of burning and new conditions necessitate additional site preparation work and/or use of additional personnel and equipment to accomplish planned burning, the Purchaser also shall be responsible for such additional costs.


(H) Quarry Development

Q-1 The Purchaser shall develop a rock quarry in strict accordance with the plans and specifications shown on Exhibit C-10 which is attached hereto and made a part hereof. Exhibit C-10 contains 1 sheet.


(I) Equal Opportunity in Employment

Certification of Non-segregated Facilities attached hereto and made a part hereof.

SWINNING TIMBER SALE LOCATION MAP OR-110-10-18

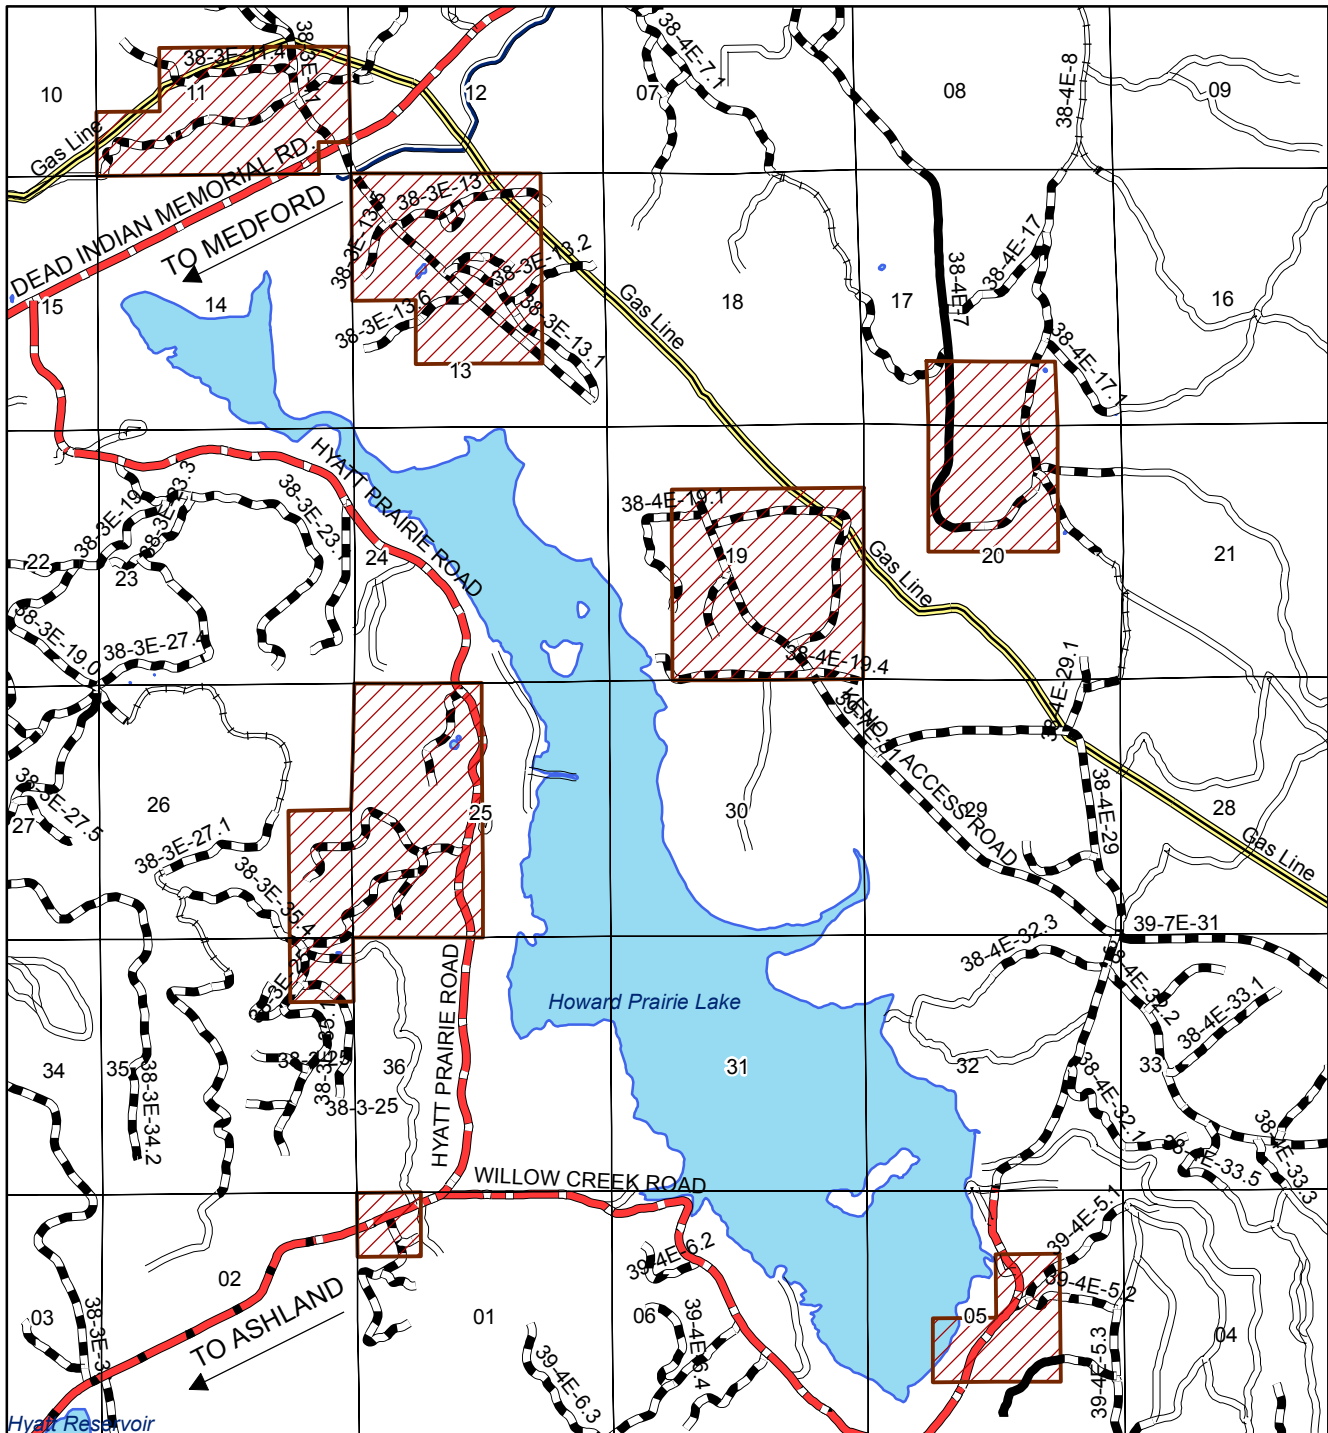


Miles



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 1 OF 9

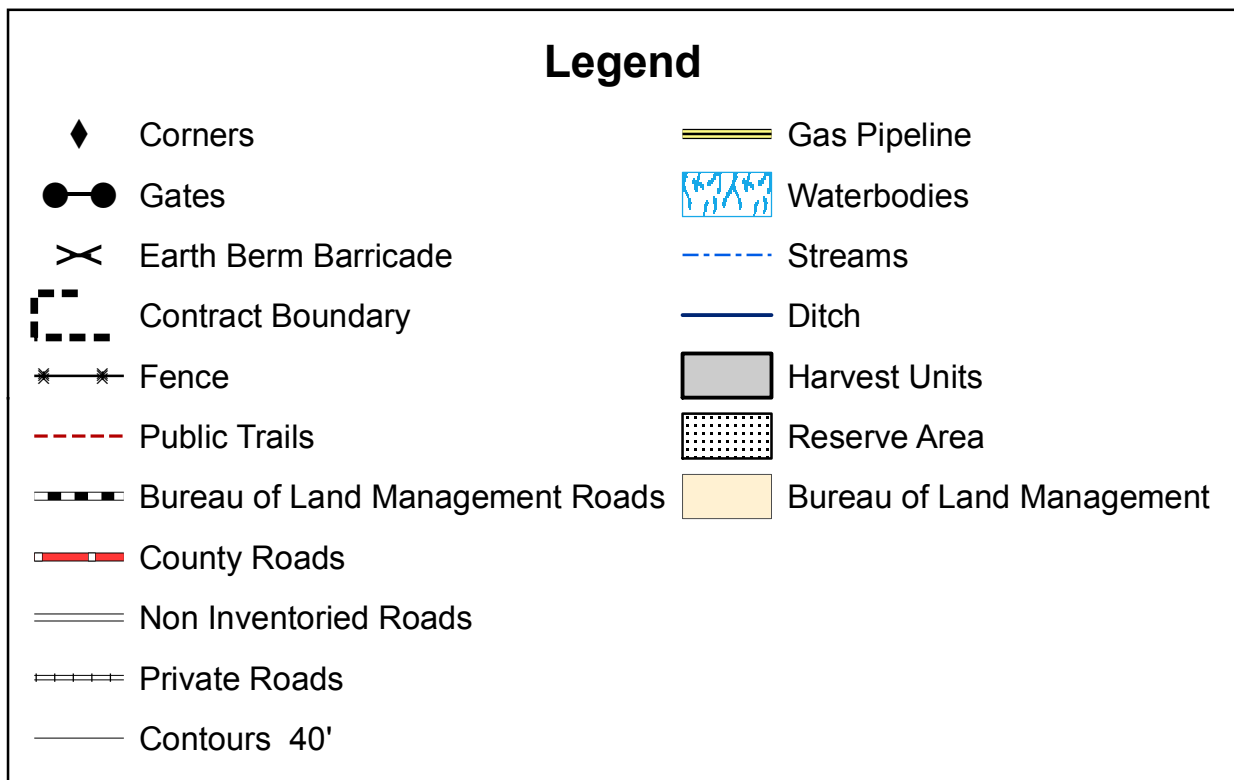



TRACTOR YARD HARVEST UNITS
 UNITS BLUE MARKED FOR CUTTING
 9, 11A, 11B, 13, 33, 40A, 40B, 45, 47A, 47B,
 68, 70A, 70B, 71..... 467.00 AC.

RESERVE AREA.....1,163.00 AC.

TOTAL CONTRACT AREA.....1,630.00 AC.



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 2 OF 9

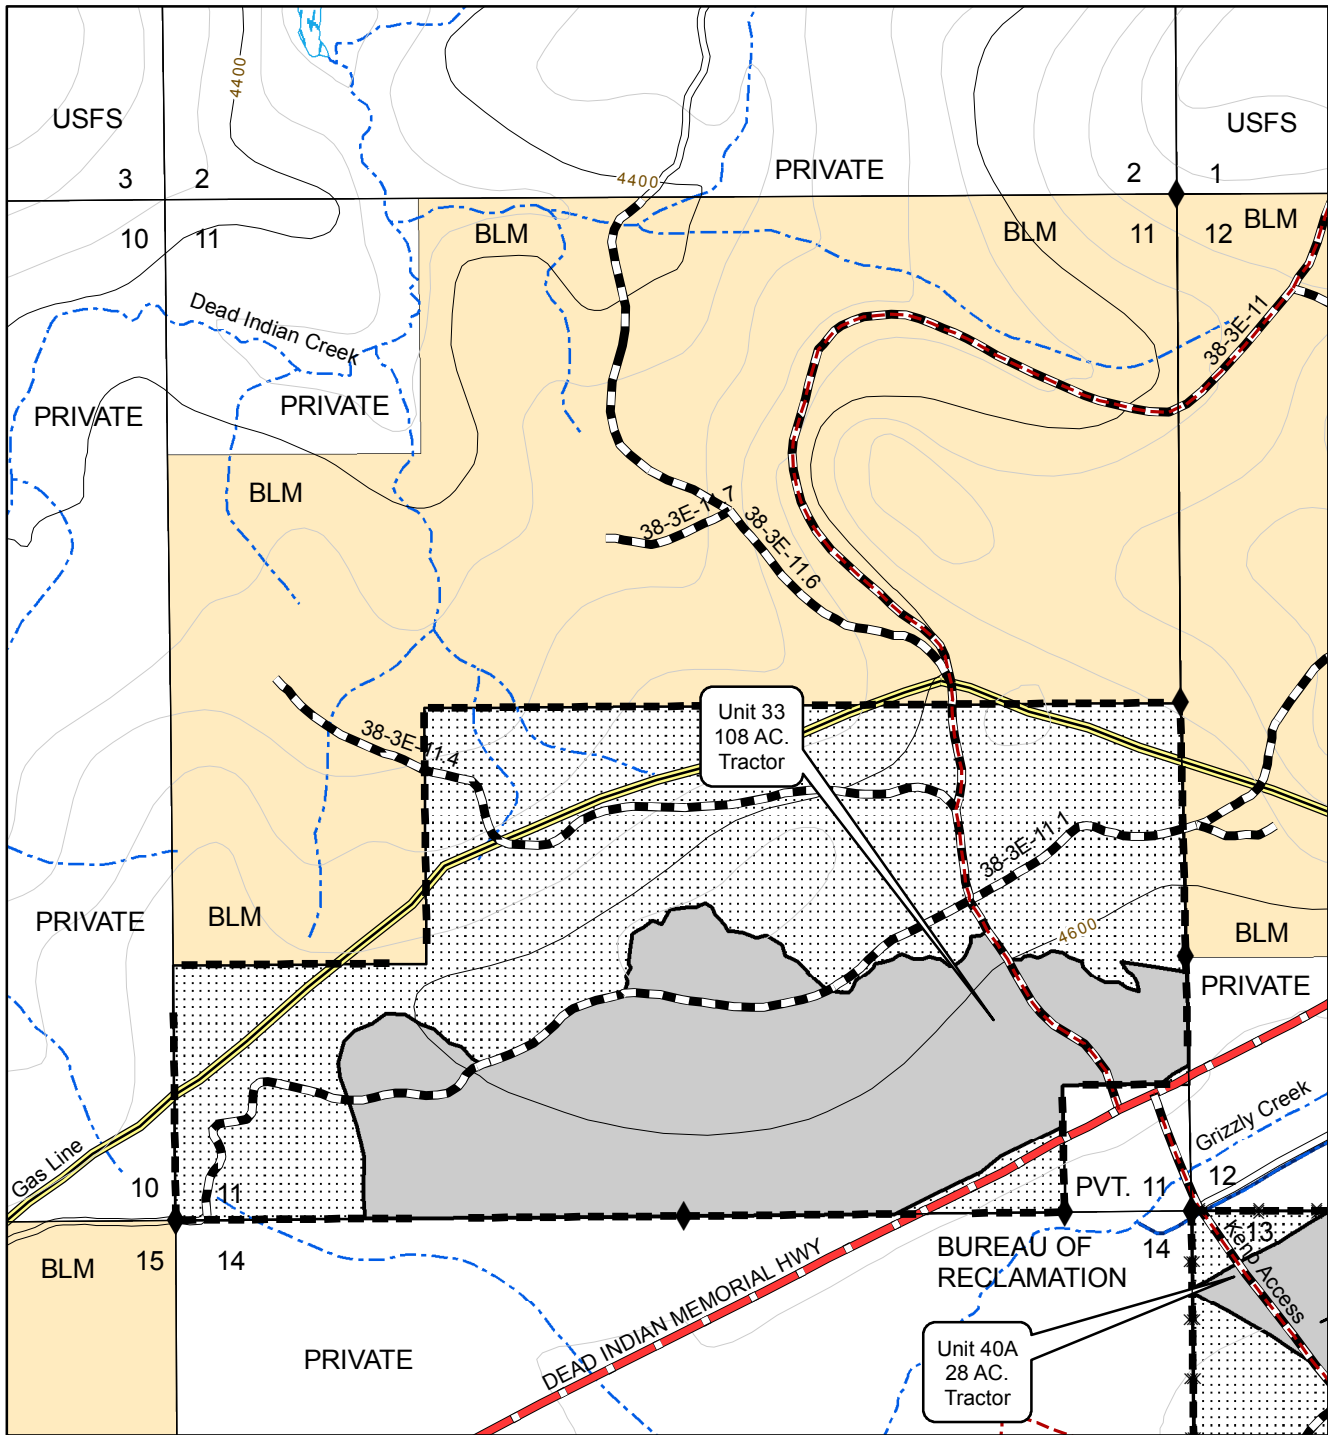



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 3 OF 9

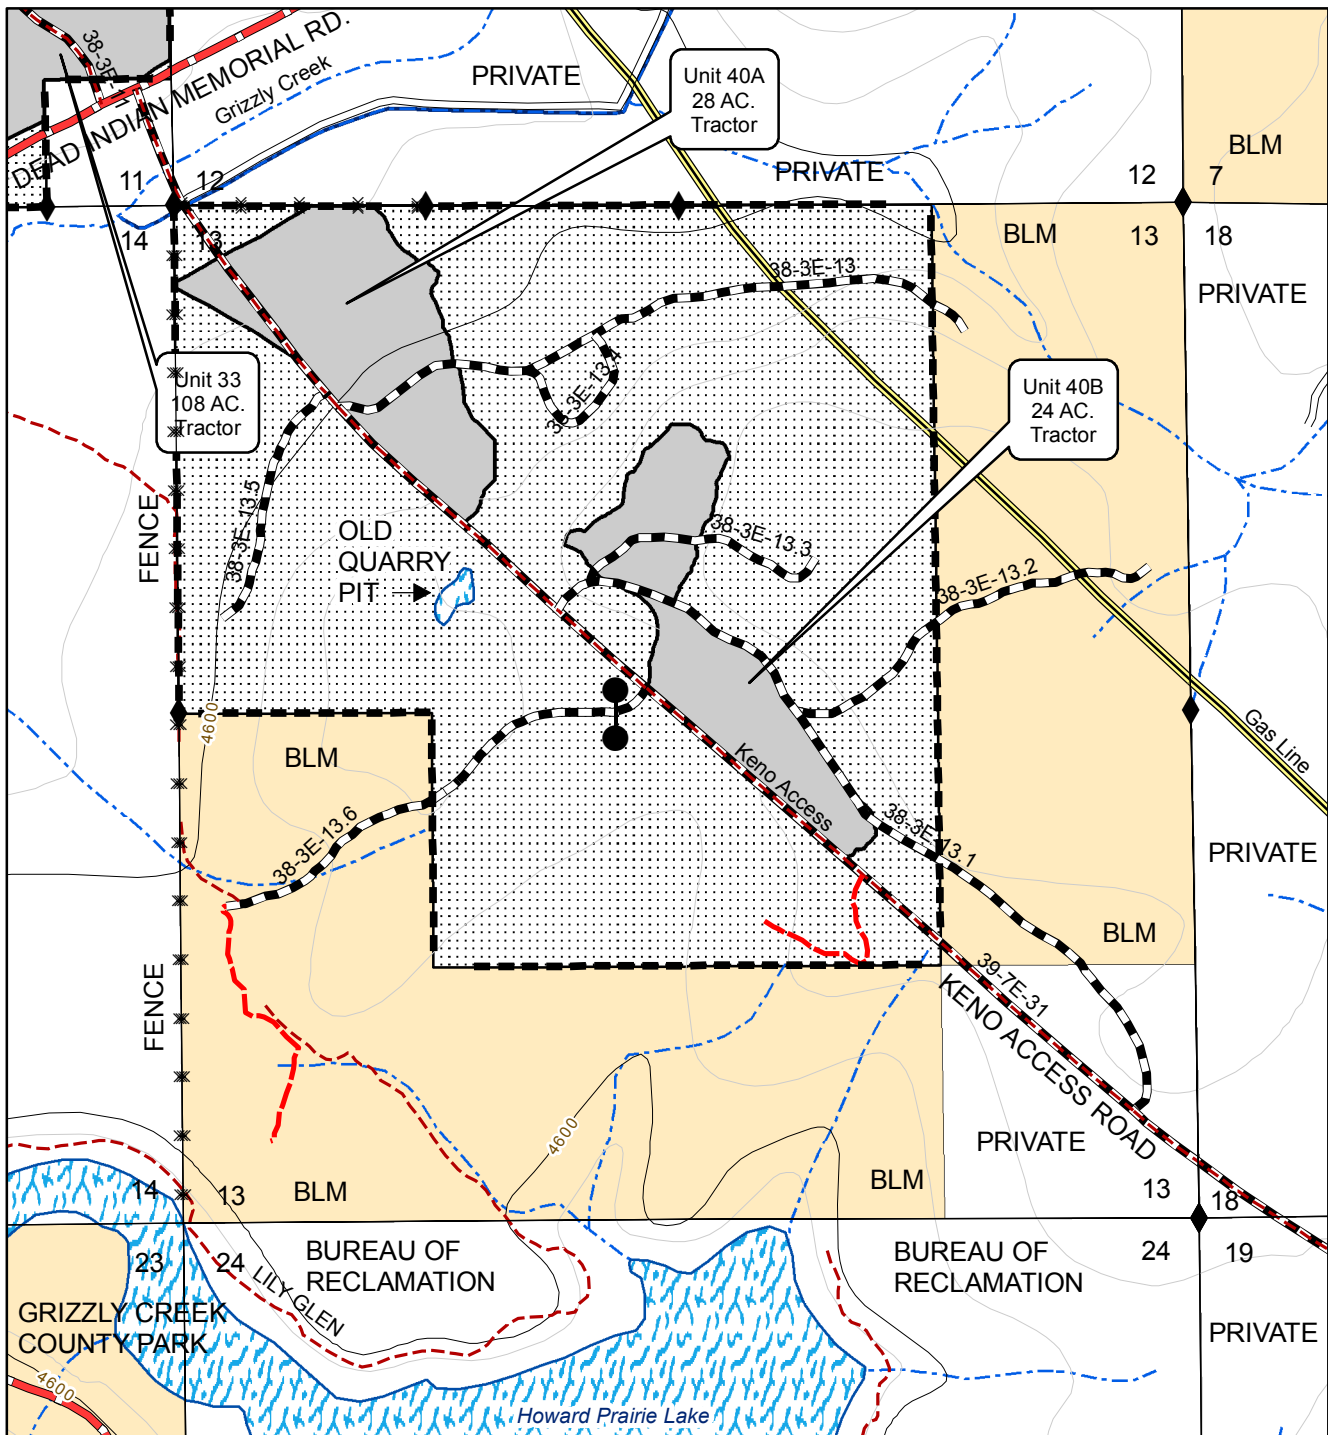



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 4 OF 9

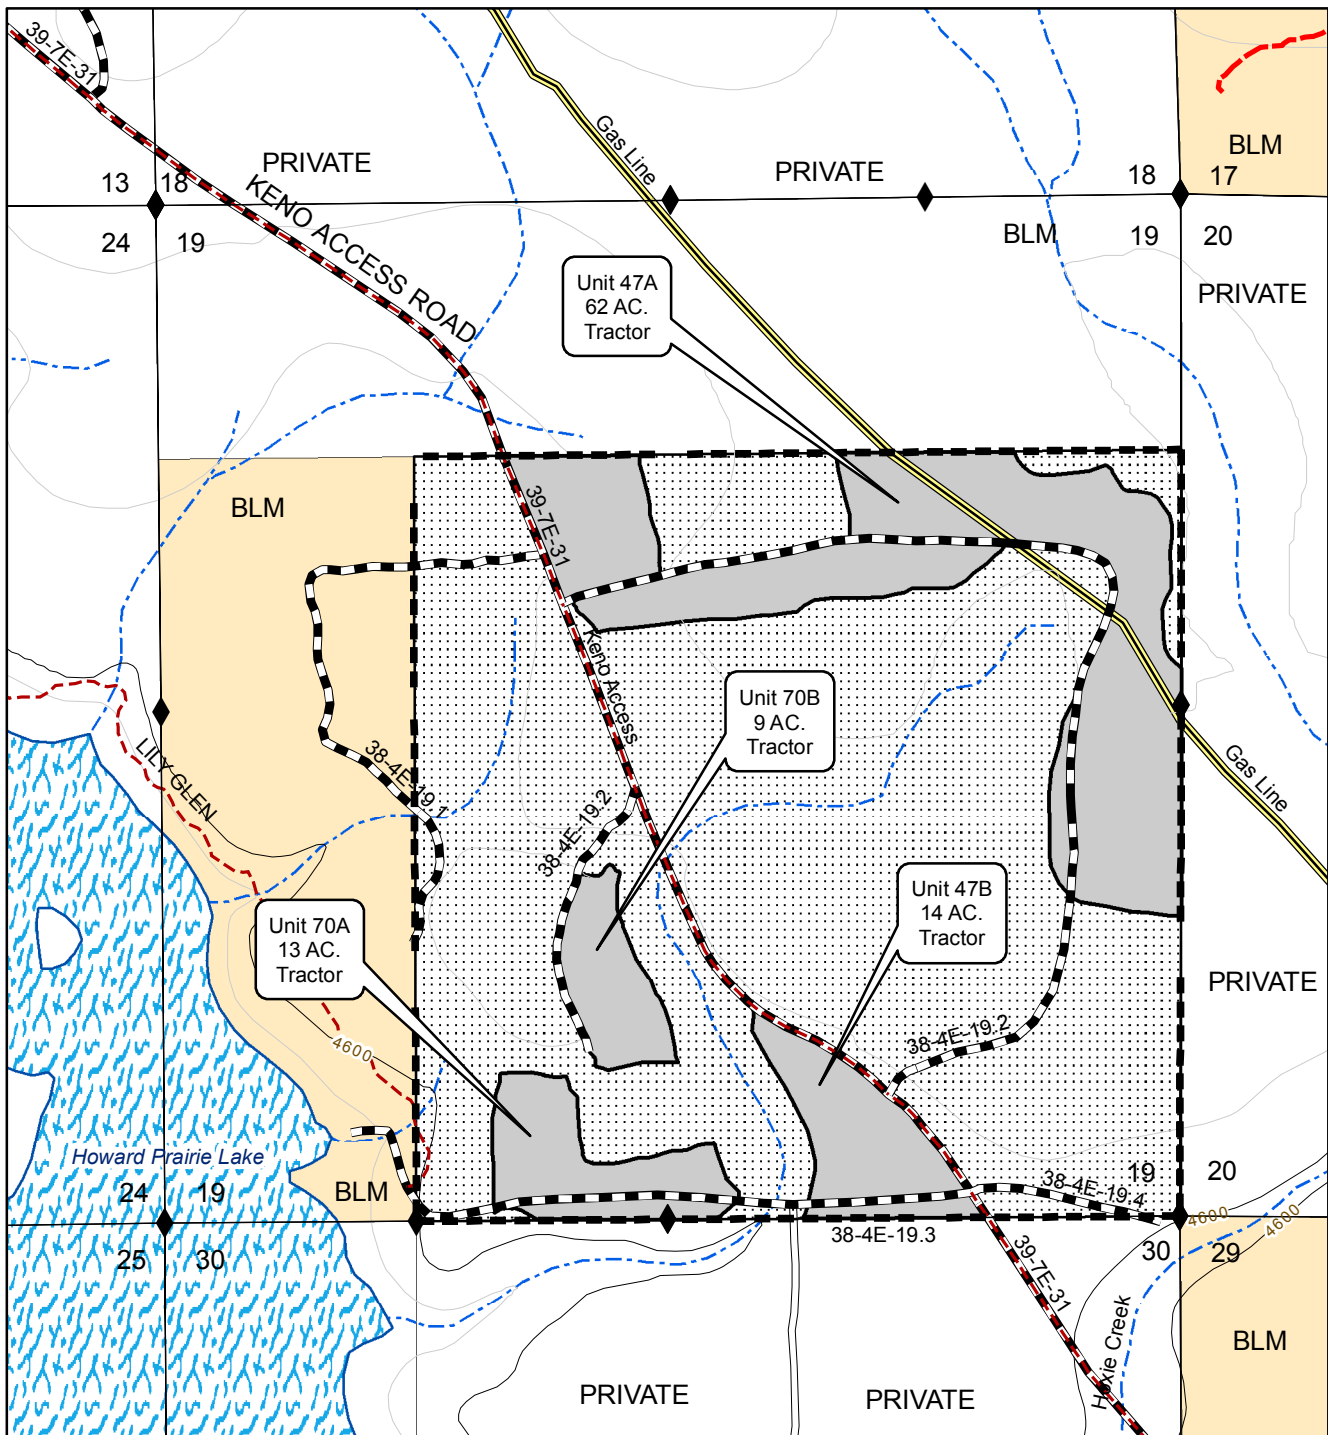



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 5 OF 9

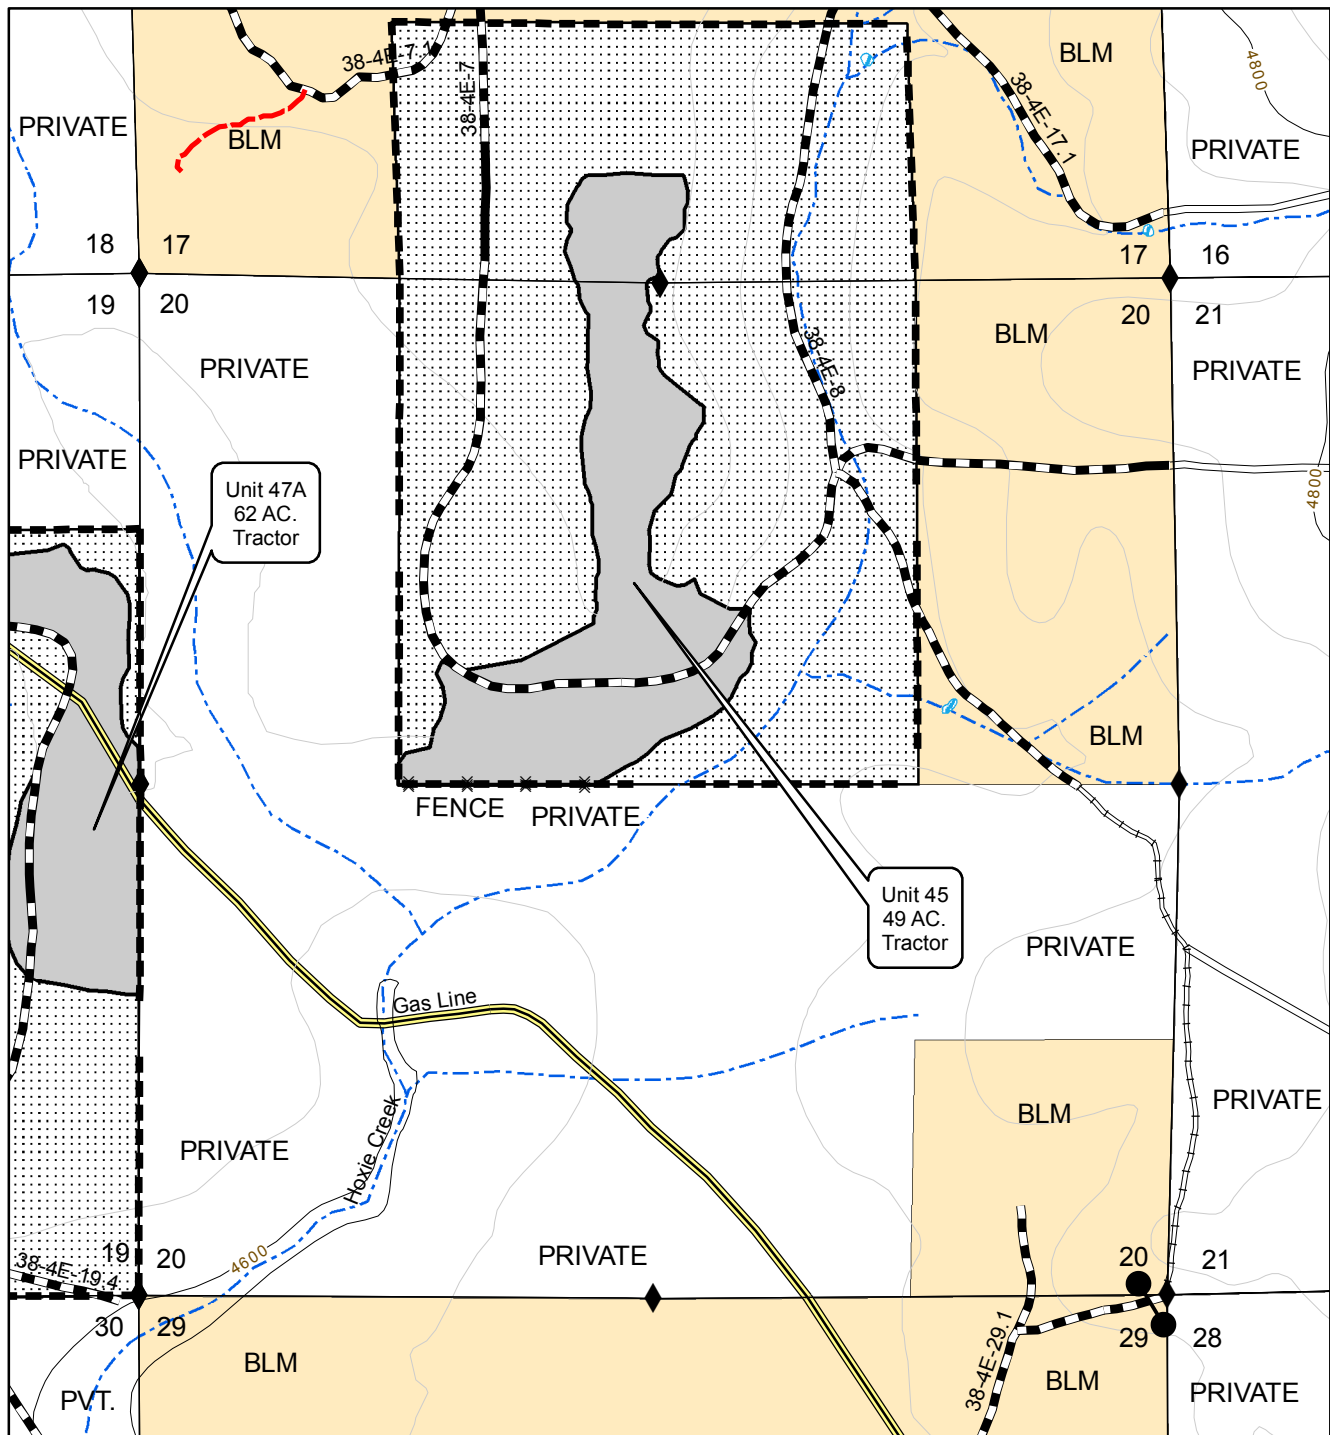



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 6 OF 9

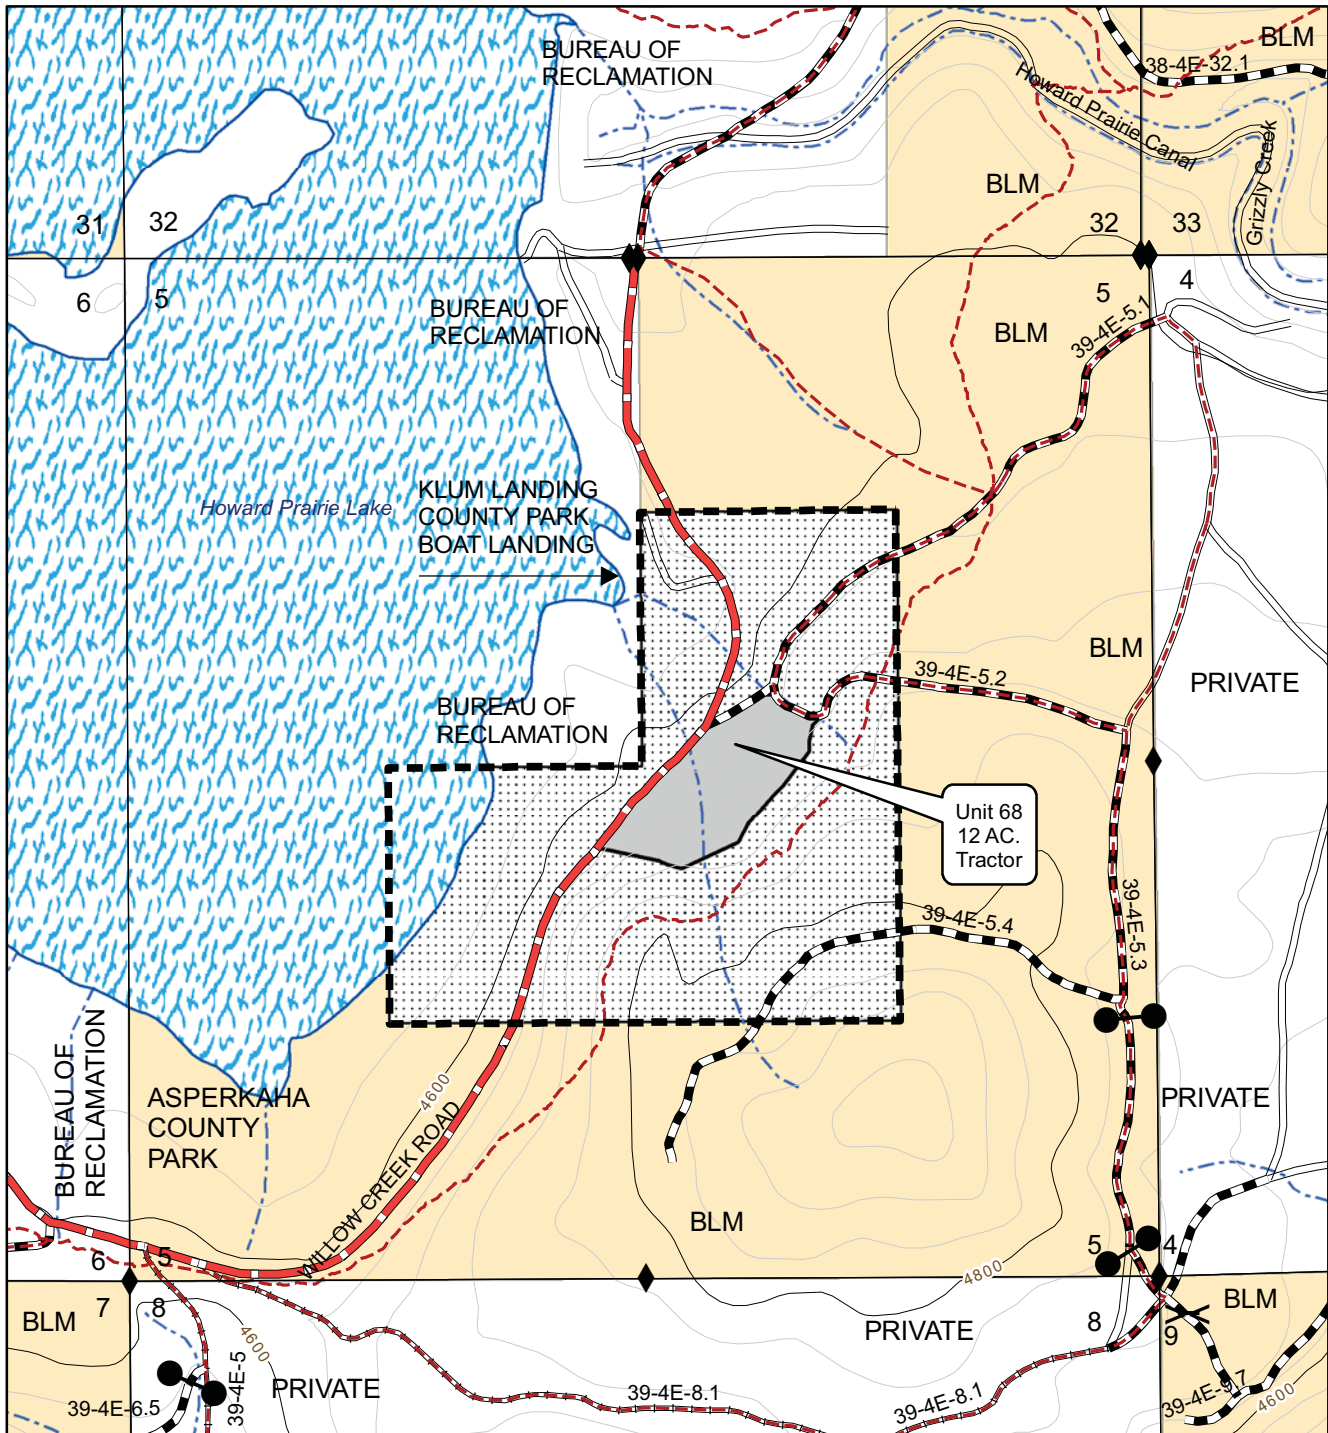



U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 7 OF 9

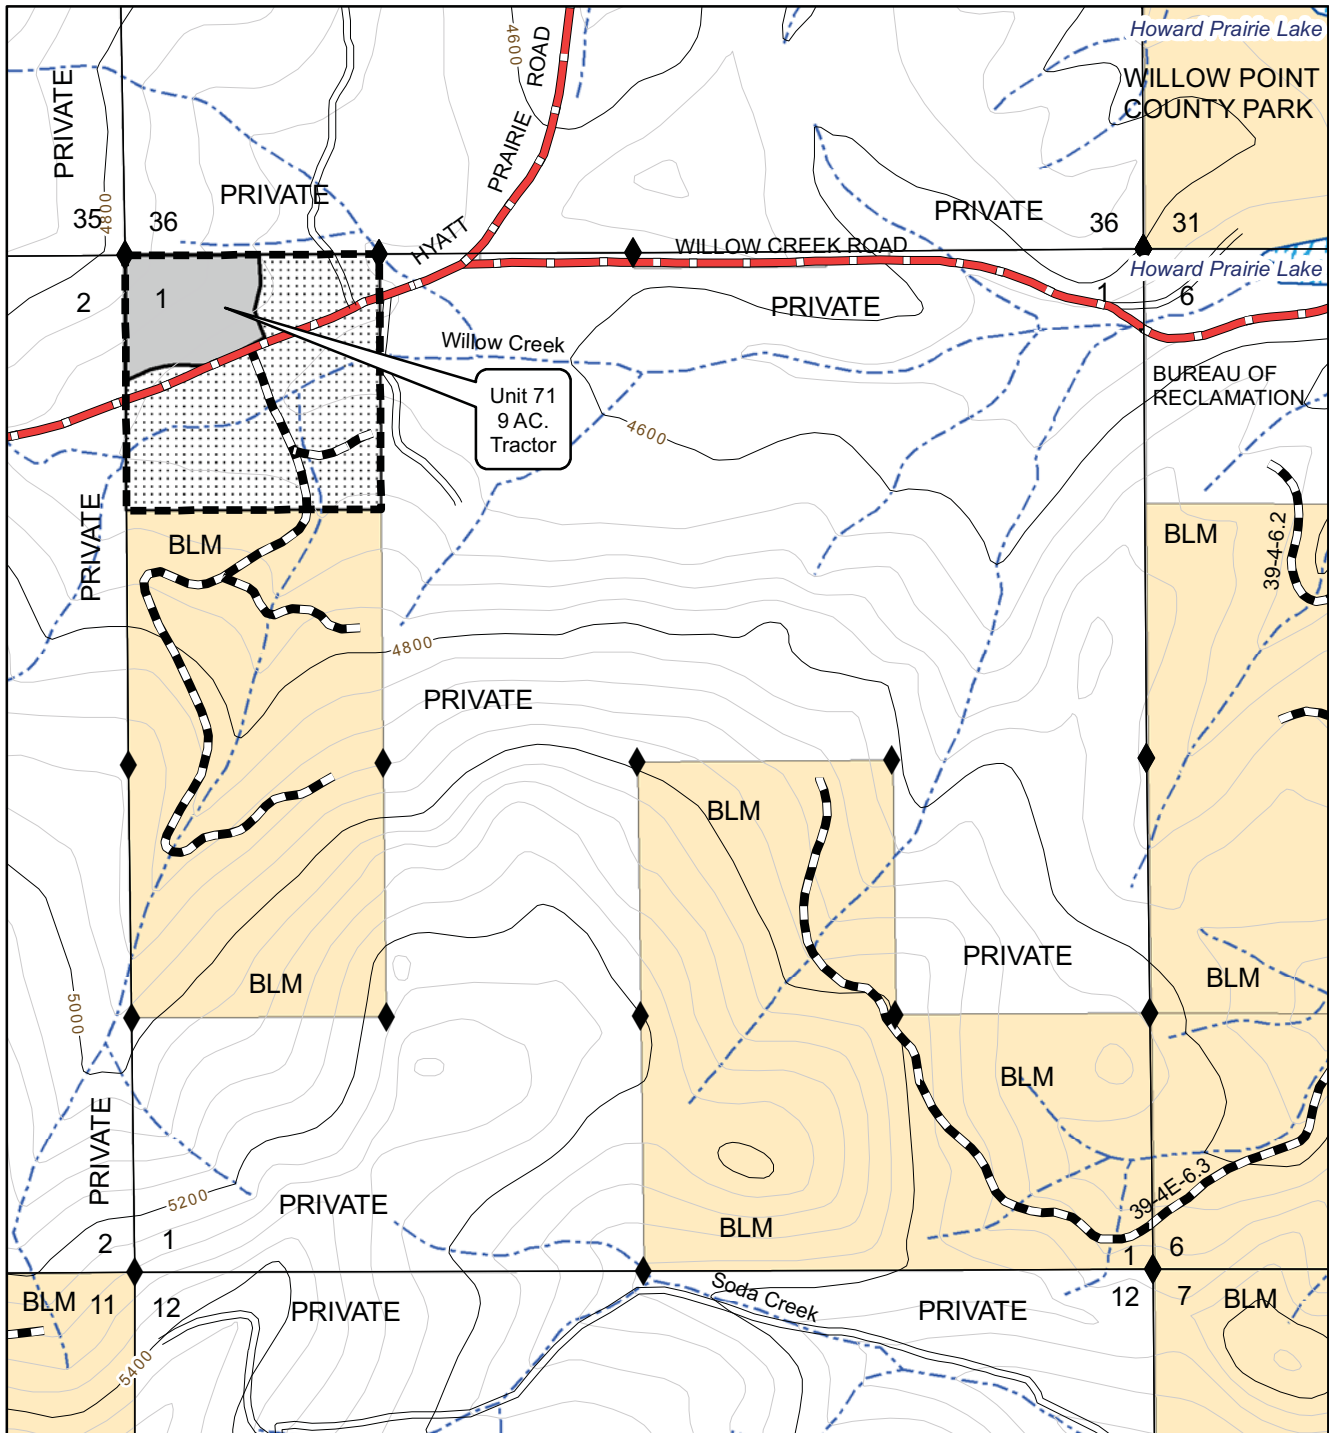


U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 8 OF 9

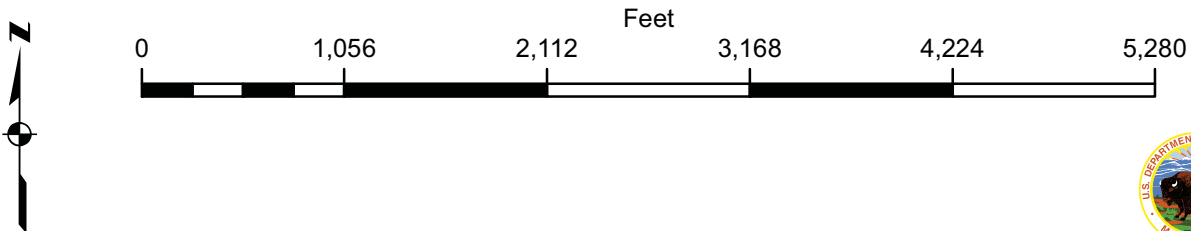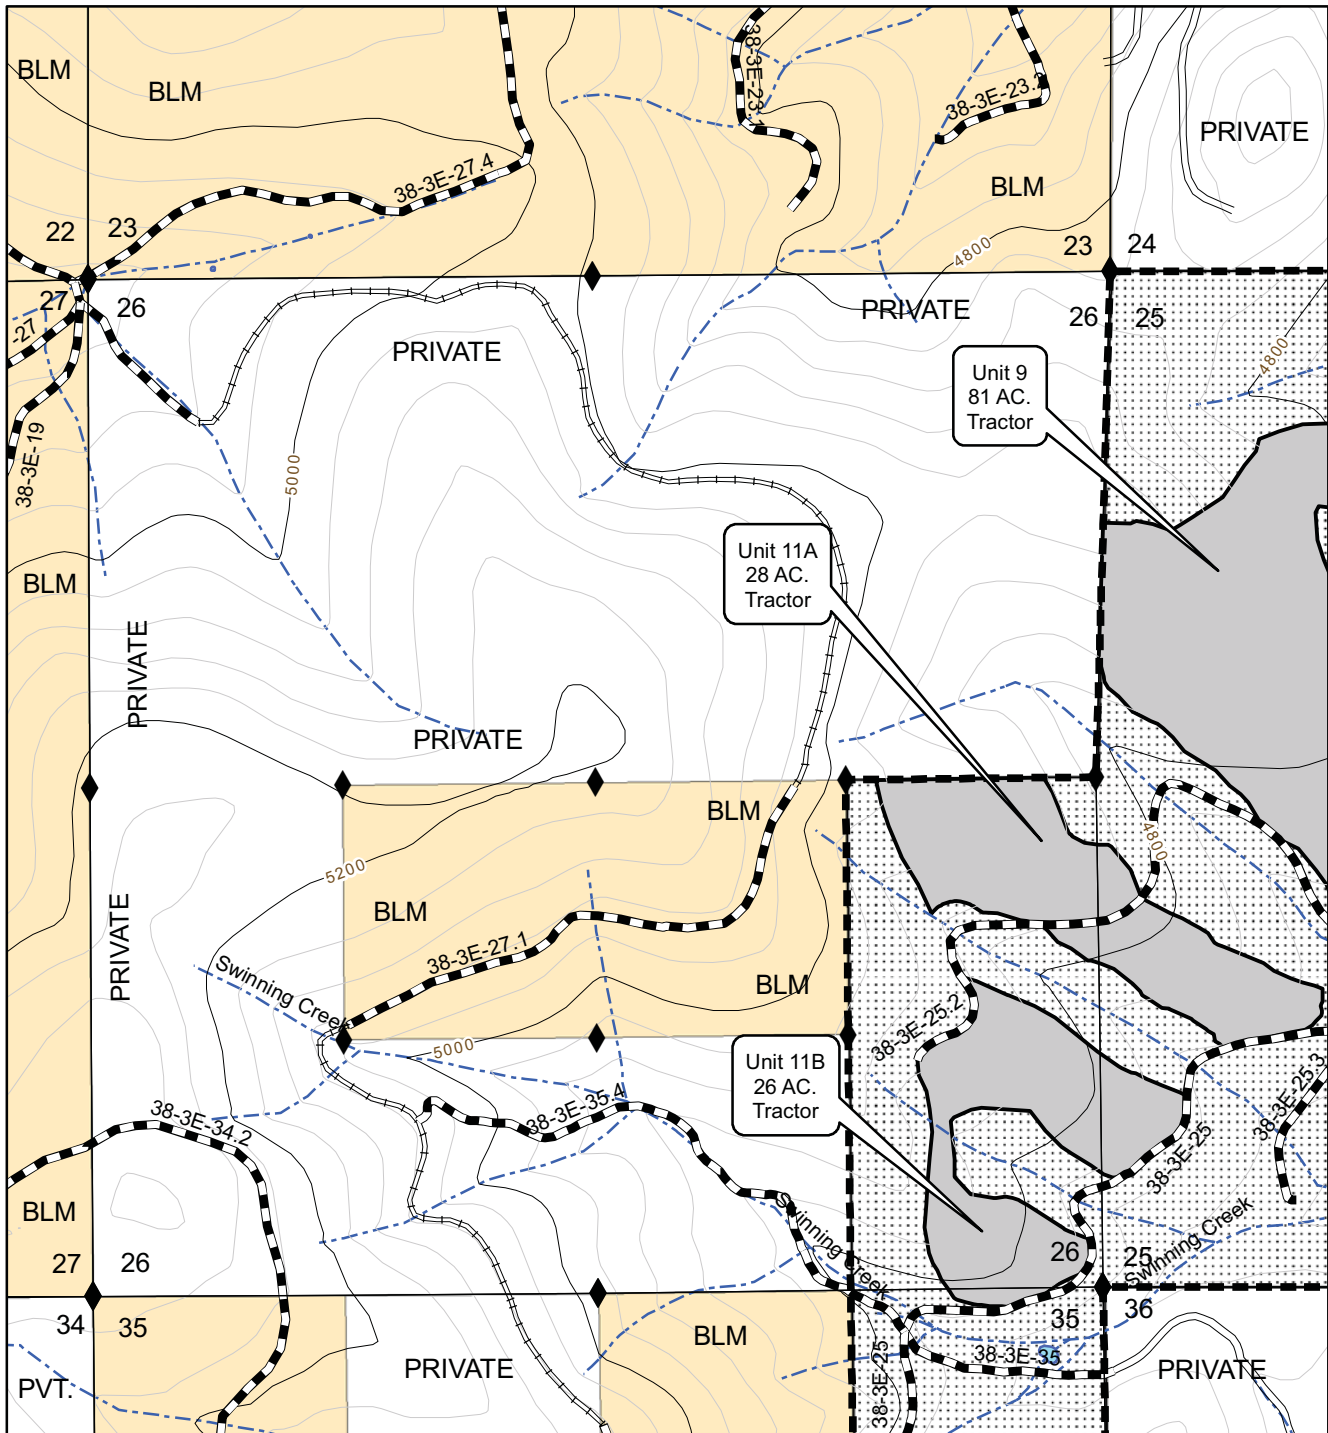

U.S.D.I. BLM MEDFORD DISTRICT SALE
 SWINNING TIMBER SALE
 T.38S., R. 3E. SEC. 11, 13, 25, 26, 35
 T.38S., R. 4E. SEC. 17, 19, 20
 T.39S., R. 3E. SEC. 1
 T.39S., R. 4E. SEC. 5

TIMBER SALE CONTRACT MAP
 CONTRACT NO. OR-110-10-18
 EXHIBIT A
 PAGE 9 OF 9

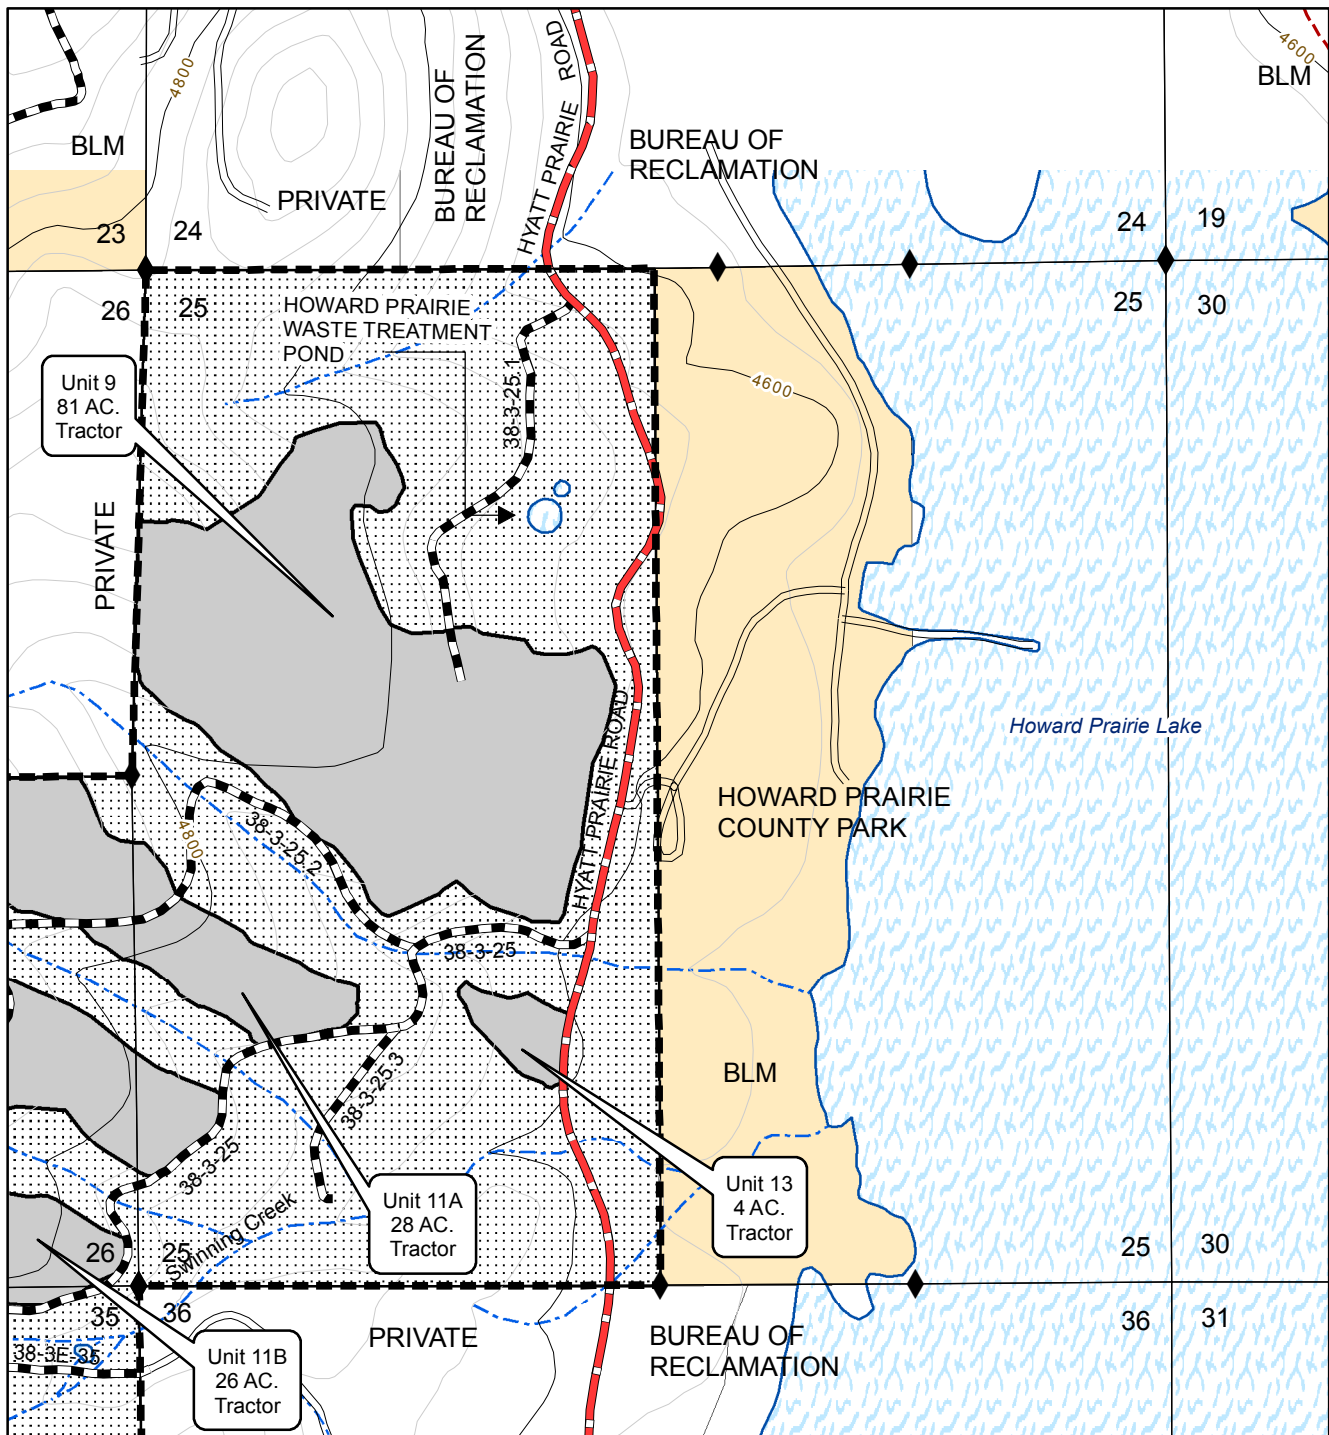



United States of America
Department of the Interior
Bureau Of Land Management
Timber Sale Appraisal

District : Medford
Sale Name : Swinning
Sale Date : 09/16/2010
Appraisal Method : 16' MBF

Contract # : TS 10-18
Job File # : M11262
Master Unit : Jackson
Planning Unit : Ashland

Contents

Timber Sale Summary	2
Stumpage Summary	4
Prospectus	5
Exhibit B	6
Volume Summary	10
Stump to Truck Costs	13
Other Allowances Costs	14
Consolidated Comments	15

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Timber - Sale - Summary**

Medford
Swinning
TS 10-18

Legal Description

Forest Type	Township	Range	Section	Subdivision
O&C	38S	3E	11	NE1/4 SW1/4, S1/2 SW1/4, N1/2 SE1/4, SW1/4 SE1/4,N1/2 SE1/4 SE1/4, SW1/4 SE
O&C	38S	3E	13	NW1/4, NE1/4 SW1/4, NW1/4 SE1/4.
O&C	38S	3E	25	W1/2.
O&C	38S	3E	26	E1/2 SE1/4.
O&C	38S	3E	35	NE1/4 NE1/4.
O&C	38S	4E	17	SE1/4 SW1/4,SW1/4 SE1/4.
O&C	38S	4E	19	S1/2 NE1/4, SE1/4 NW1/4, E1/2 SW1/4, NE1/4 SE1/4, S1/2 SE1/4.
O&C	39S	3E	1	NW1/4 NW1/4.
O&C	39S	4E	5	SW1/4 NE1/4, NE1/4 SW1/4, NW1/4 SE1/4.
O&C	38S	4E	20	W1/2 NE1/4, E1/2, NW1/4.

Cutting Volume (16' MBF)

Unit	WF	DF	PP	IC					Total	Regen	Partial	ROW
11A	68	82		5					155		28	
11B	56	97	2	2					157		26	
13	8	14							22		4	
33	515	232	88						835		108	
40A	180	25	23						228		28	
40B	54	54	9	1					118		24	
45	168	67							235		49	
47A	323	25	2						350		62	
47B	87	4	1						92		14	
68	33	10							43		12	
70A	48	31							79		13	
70B	38	6							44		9	
71	34	20							54		9	
9	208	84		3					295		81	
Totals	1,820	751	125	11					2,707	0	467	0

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Logging Costs per 16' MBF

Stump to Truck	\$	123.44
Transportation	\$	60.97
Road Construction	\$	9.55
Road Amortization	\$	0.00
Road Maintenance	\$	4.59

Other Allowances :

Fuels Treatment	\$15.77
Misc	\$0.66
Other Costs	\$1.90
Total Other Allowances :	\$ 18.34

Total Logging Costs per 16' MBF

\$	216.88
-----------	---------------

Utilization Centers

Center #1 : White City	43 Miles
Center #2	0 Miles
Weighted distance to Utilization Centers	43

Length of Contract

Cutting and Removal Time	36 Months
Personal Property Removal Time	6 Months

Profit & Risk

Total Profit & Risk	7 %
Basic Profit & Risk	7 % + Additional Risk 0 %
Back Off	0 %

Tract Features

Avg Log	White Fir : 77 bf	All : 80 bf
Recovery	White Fir : 81 %	All : 82 %
Salvage	White Fir : 0 %	All : 0 %
Avg Volume (16' MBF per Acre)	6	
Avg Yarding Slope	8 %	
Avg Yarding Distance (feet)	521	
Avg Age	85	
Volume Cable	0 %	
Volume Ground	100 %	
Volume Aerial	0 %	
Road Construction Stations	0.00	
Road Improvement Stations	0.00	
Road Renovation Stations	276.13	
Road Decomission Stations	0.00	

Cruise

Cruised By	Aaron Worman
Date	07/01/2010
Type of Cruise	3-P
County, State	Jackson, OR

Net Volume

Green (16' MBF)	2707
Salvage (16' MBF)	0.00
White Fir Peeler	83.00
Export Volume	0
Scaling Allowance (\$0.75 per 16' MBF)	\$2,030.25

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Stumpage Summary

Medford
Swinning
TS 10-18

Stumpage Computation (16' MBF)

Species	Trees	Net Volume	Pond Value	(-) Profit & Risk	(-) Logging Cost	(+) Marginal Log Value	(-) Back Off	Appraised Price	Appraised Value
WF	8,700	1,820	332.74	23.29	216.88	0.04		92.60	168,532.00
DF	2,374	751	408.11	28.57	216.88	0.38		163.00	122,413.00
PP	626	125	245.30	17.17	216.88			24.50	3,062.50
IC	131	11	474.56	33.22	216.88			224.50	2,469.50
Totals	11,831	2,707							\$ 296,477.00

Log Code by Percent

Species	Code #1	Code #2	Code #3	Code #4	Code #5	Code #6
Douglas-fir			11.0	51.0	31.0	7.0
White Fir				49.0	42.0	9.0
Incense-cedar						100.0
Ponderosa Pine				46.0	50.0	4.0

Marginal Log Volume

Species	Grade #7	Grade #8
Douglas-fir	14	20
White Fir	9	
Incense-cedar		
Ponderosa Pine		

Appraised By : Worman, Aaron

Date : 07/22/2010

Area Approval By : Worman, Aaron

Date : 07/22/2010

District Approval By :

Date :

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Prospectus

Appraisal Method : (16' MBF)

Species	Trees	Net Volume 16' MBF	Net Volume 32' MBF	Net Volume CCF
White Fir	8,700	1,820	1,412	3,165
Douglas-fir	2,374	751	607	1,230
Ponderosa Pine	626	125	93	222
Incense-cedar	131	11	9	22
Total	11,831	2,707	2,121	4,639

All Species

Gross Volume	Number Trees	Avg bf Volume Per Tree	DBH	Gross Merch Volume	Merch Logs	Avg bf Gross Merch Log
3,308	11,831	279	16.2	3,045	37,954	80

Merch Logs	Cull Logs	Total Logs	Logs per Tree	Net Volume	Gross Volume	Recovery
37,954	2,506	40,460	3	2,707	3,308	82 %

White Fir

Gross Volume	Number Trees	Avg bf Volume Per Tree	DBH	Gross Merch Volume	Merch Logs	Avg bf Gross Merch Log
2,259	8,700	259	17.1	2,038	26,595	77

Merch Logs	Cull Logs	Total Logs	Logs per Tree	Net Volume	Gross Volume	Recovery
26,595	1,867	28,462	3	1,820	2,259	81 %

Cutting Areas

Unit	Regen Acres	Partial Cut Acres	Right Of Way Acres	Total Acres
11A		28		28
11B		26		26
13		4		4
33		108		108
40A		28		28
40B		24		24
45		49		49
47A		62		62
47B		14		14
68		12		12
70A		13		13
70B		9		9
71		9		9
9		81		81
Totals :		467		467

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Exhibit B

The following estimates and calculations of timber sold are made solely as an administrative aid for determining: (1) Adjustments made or credits given in accordance with Sections 6, 9, or 11; (2) When payments are due; and (3) Value of timber subject to any special bonding provisions. The value of timber will be determined by multiplying the value per acre as shown below, times the amount of acreage as determined by the authorized officer, which has been cut or removed or designated for taking.

Except provided in Section 2, Purchaser shall be liable for the total purchase price even though the quantity of timber actually cut or removed or designated for taking is less than the estimated volume or quantity shown. Cutting areas are shown on the Exhibit A.

Sale Totals (16' MBF)

Species	Net Volume	Bid Price	Sale SubTotal
White Fir	1,820		
Douglas-fir	751		
Ponderosa Pine	125		
Incense-cedar	11		
Sale Totals	2,707		

Unit Details (16' MB)

Unit 11A **28 Acres** **Value per Acre : \$0.00**

Species	Net Volume	Bid Price	Species Value
Douglas-fir	82		
Incense-cedar	5		
White Fir	68		
Unit Totals	155		

Unit 11B **26 Acres** **Value per Acre : \$0.00**

Species	Net Volume	Bid Price	Species Value
Douglas-fir	97		
Incense-cedar	2		
Ponderosa Pine	2		
White Fir	56		
Unit Totals	157		

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Unit 13 4 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	14		
White Fir	8		
Unit Totals	22		

Unit 33 108 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	232		
Ponderosa Pine	88		
White Fir	515		
Unit Totals	835		

Unit 40A 28 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	25		
Ponderosa Pine	23		
White Fir	180		
Unit Totals	228		

Unit 40B 24 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	54		
Incense-cedar	1		
Ponderosa Pine	9		
White Fir	54		
Unit Totals	118		

Unit 45 49 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	67		
Ponderosa Pine			
White Fir	168		
Unit Totals	235		

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Unit 47A 62 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	25		
Incense-cedar			
Ponderosa Pine	2		
White Fir	323		
Unit Totals	350		

Unit 47B 14 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	4		
Ponderosa Pine	1		
White Fir	87		
Unit Totals	92		

Unit 68 12 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	10		
White Fir	33		
Unit Totals	43		

Unit 70A 13 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	31		
White Fir	48		
Unit Totals	79		

Unit 70B 9 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	6		
White Fir	38		
Unit Totals	44		

Unit 71 9 Acres Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	20		
White Fir	34		
Unit Totals	54		

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Unit 9

81 Acres

Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	84		
Incense-cedar	3		
White Fir	208		
Unit Totals	295		

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Volume Summary**

Medford
Swinning
TS 10-18

Sale Volume Totals

467 Acres

0 Regen

467 Partial

0 R/W

14 Units

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Net	16' MBF GM	16' MBF Gross	32' MBF Net	32' MBF GM	32' MBF Gross	CCF Net	CCF GM	CCF Gross
White Fir	8,700	26,595	1,867	1,820	2,038	2,259	1,412	1,579	1,760	3,165	3,552	3,912
Douglas-fir	2,374	8,994	486	751	853	892	607	693	725	1,230	1,386	1,454
Ponderosa Pine	626	2,120	120	125	142	144	93	106	109	222	254	260
Incense-cedar	131	245	33	11	12	13	9	10	10	22	24	25
Totals	11,831	37,954	2,506	2,707	3,045	3,308	2,121	2,388	2,604	4,639	5,216	5,651

Unit Totals

Unit : 11A

28 Acres

0 Regen

28 Partial

0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
Douglas-fir	165	981	52	96	92	82
White Fir	435	988	69	84	76	68
Incense-cedar	48	100	14	5	5	5
Unit Totals	648	2,069	135	185	173	155

Unit : 11B

26 Acres

0 Regen

26 Partial

0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
Douglas-fir	314	1,158	61	113	109	97
White Fir	330	819	58	70	63	56
Incense-cedar	31	49	7	3	2	2
Ponderosa Pine	7	33	2	2	2	2
Unit Totals	682	2,059	128	188	176	157

Unit : 13

4 Acres

0 Regen

4 Partial

0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
Douglas-fir	33	173	9	17	16	14
White Fir	58	123	9	10	9	8
Unit Totals	91	296	18	27	25	22

Unit : 33

108 Acres

0 Regen

108 Partial

0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	2,321	7,520	527	639	577	515

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Douglas-fir	781	2,768	146	272	259	232
Ponderosa Pine	453	1,497	84	102	101	88
Unit Totals	3,555	11,785	757	1,013	937	835

Unit : 40A 28 Acres 0 Regen 28 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	832	2,628	185	223	201	180
Douglas-fir	111	295	16	29	27	25
Ponderosa Pine	119	391	22	27	26	23
Unit Totals	1,062	3,314	223	279	254	228

Unit : 40B 24 Acres 0 Regen 24 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	220	793	56	67	61	54
Douglas-fir	149	641	34	63	60	54
Ponderosa Pine	31	153	9	10	10	9
Incense-cedar	8	30	4	2	2	1
Unit Totals	408	1,617	103	142	133	118

Unit : 45 49 Acres 0 Regen 49 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	1,094	2,449	172	208	188	168
Douglas-fir	313	799	53	87	85	67
Ponderosa Pine	1	1				
Unit Totals	1,408	3,249	225	295	273	235

Unit : 47A 62 Acres 0 Regen 62 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	1,403	4,715	331	401	361	323
Douglas-fir	114	305	16	30	29	25
Ponderosa Pine	13	34	2	2	2	2
Incense-cedar	3	3				
Unit Totals	1,533	5,057	349	433	392	350

Unit : 47B 14 Acres 0 Regen 14 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	305	1,270	89	108	97	87
Douglas-fir	16	49	3	5	5	4

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Ponderosa Pine	2	11	1	1	1	1
Unit Totals	323	1,330	93	114	103	92

Unit : 68 12 Acres 0 Regen 12 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	178	488	34	41	37	33
Douglas-fir	42	121	6	12	11	10
Unit Totals	220	609	40	53	48	43

Unit : 70A 13 Acres 0 Regen 13 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	182	700	49	59	54	48
Douglas-fir	90	376	20	37	35	31
Unit Totals	272	1,076	69	96	89	79

Unit : 70B 9 Acres 0 Regen 9 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	113	560	39	48	43	38
Douglas-fir	17	78	4	8	7	6
Unit Totals	130	638	43	56	50	44

Unit : 71 9 Acres 0 Regen 9 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	172	497	35	42	38	34
Douglas-fir	28	242	13	24	23	20
Unit Totals	200	739	48	66	61	54

Unit : 9 81 Acres 0 Regen 81 Partial 0 R/W

SpeciesName	# of Trees	Merch Logs	Cull Logs	16' MBF Gross	16' MBF GM	16' MBF Net
White Fir	1,057	3,045	214	259	233	208
Douglas-fir	201	1,008	53	99	95	84
Incense-cedar	41	63	8	3	3	3
Unit Totals	1,299	4,116	275	361	331	295

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Stump to Truck Costs**

Medford
Swinning
TS 10-18

Total (16' MBF)

Total Stump to Truck Costs	Net Volume	Cost / Net Volume
\$334,148.60	2,707	\$123.44

Detail

Yarding & Loading

Yarding System	Unit Of Measure	Units	Cost / Unit	Total Cost
Track Skidder	MBF	3,045	\$109.08	\$332,148.60
Subtotal				\$332,148.60

Other Costs

Explanation	Unit Of Measure	Units	Cost / Unit	Total Cost
Subtotal				

Additional Move-Ins

Equipment	# Move-In	Cost / Move In	Total Cost
Yarder / Loader	2	\$550.00	\$1,100.00
Dozer	2	\$450.00	\$900.00
Subtotal			\$2,000.00

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Medford
Swinning
TS 10-18

Other Allowances Costs

Total (16' MBF)

Total Other Allowances Costs	Net Volume	Cost / Net Volume *	Total Buy Out Cost
\$49,641.45	2,707	\$18.34	\$0.00

Fuels Treatment

Detail (16' MBF)

Cost Item	Total Cost	Cost / Net Vol *	Buy Out	Buy Out Cost
Hand Pile, Cvr - Level 2	38,300.00	14.15	N	0.00
Hand Pile Brn-Level 2	4,400.00	1.63	N	0.00
Subtotal	42,700.00	15.77		0.00

Misc

Detail (16' MBF)

Cost Item	Total Cost	Cost / Net Vol *	Buy Out	Buy Out Cost
Directional Falling	1,791.45	0.66		0.00
Subtotal	1,791.45	0.66		0.00

Other Costs

Detail (16' MBF)

Cost Item	Total Cost	Cost / Net Vol *	Buy Out	Buy Out Cost
Skid Location	640.00	0.24	N	0.00
Skid Construction	900.00	0.33	N	0.00
Waterbar Skids	1,800.00	0.66	N	0.00
Barricades	600.00	0.22	N	0.00
Landing Construction	450.00	0.17	N	0.00
Landing Clean up	600.00	0.22	N	0.00
Equipment Washing	160.00	0.06	N	0.00
Subtotal	5,150.00	1.90		0.00

* Cost / Net Volume has been rounded to the nearest \$0.01 Subtotals may not tie to Sale Total Cost / Net Volume.

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Consolidated Comments**

Medford
Swinning
TS 10-18

General

Yarding & Loading

Track skidder, an option of feller buncher may be used, However, appraisal was for conventional Cat.

Road Costs

(see Engineering Appraisal for details).

Transportation

(see Transportation appendix for details).

Other Allowances

467 acres of Ground Base. 23 Landings per Lead Layout. 1/4 hour per landing for const.
47 acres of skids. 2 ac. an hour for waterbars. Sale area has previous skids/landings/rd. access etc. Costs as a whole are lower than other sales.(Flat ground).

Prospectus

015 is dominant species, 202 not able to show % of peeler volume.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
MEDFORD DISTRICT
SWINNING TIMBER SALE
TRACT NO. TS 10-18

EXHIBIT C-1
SHEET 1 OF 1

PROJECT LOCATION


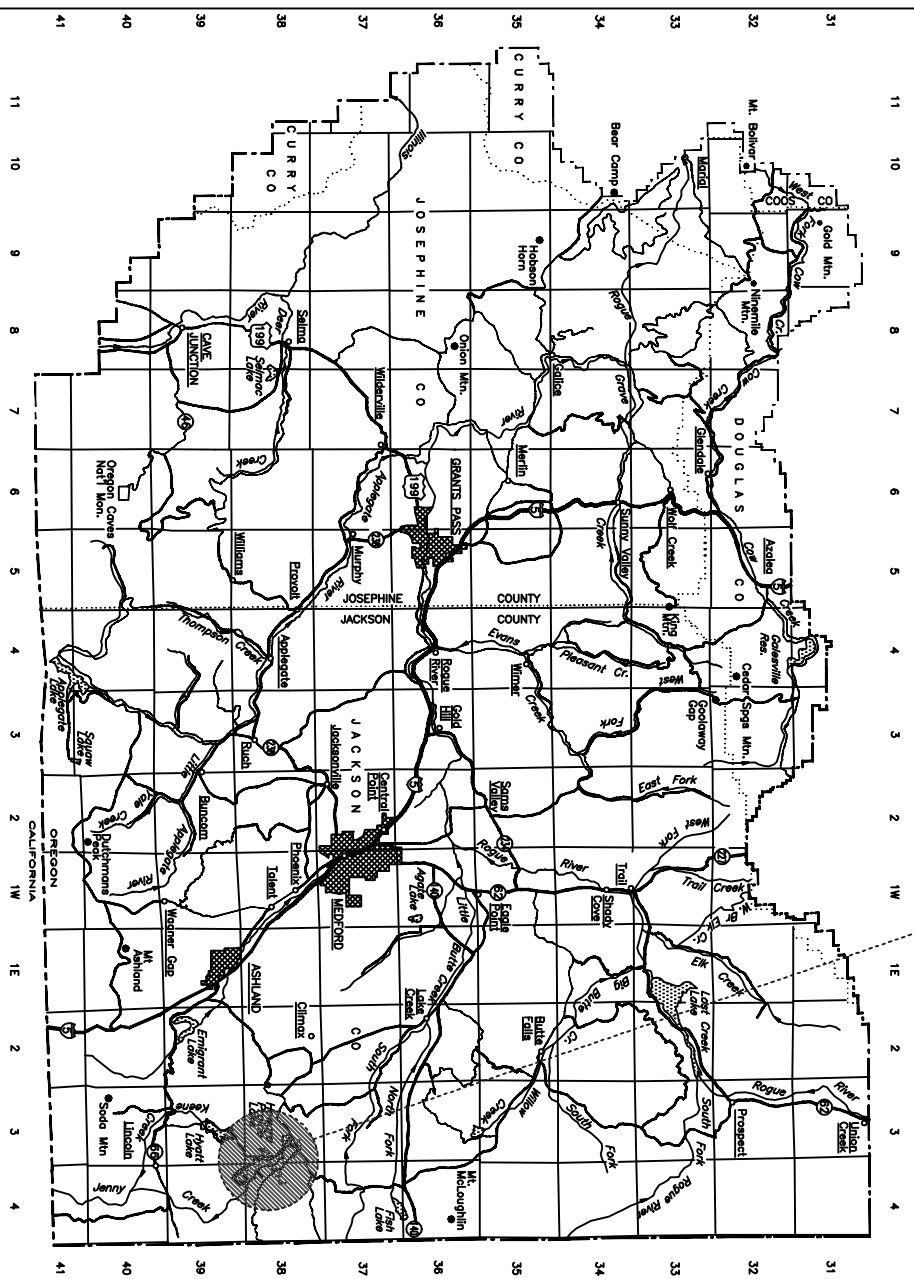


Exhibit No.	Description
C 1	TITLE SHEET
C 2	ROAD LOCATION MAP
C 3	ESTIMATE OF QUANTITIES
C 4	SPECIFICATION SHEET
C 5	TYPICAL ROAD SURFACING SECTIONS
C 6	ROADSIDE BRUSHING DETAIL
C 7	ROAD RENOVATION WORKLIST
C 8	DRAINAGE AND EROSION CONTROL
C 9	CONSTRUCTION SPECIFICATIONS
C10	QUARRY DEVELOPMENT PLAN
D 1	ROAD MAINTENANCE SPECIFICATIONS
D 2	ROAD MAINTENANCE MAP




ALWAYS
THINK
SAFETY


REV. NO.	DESCRIPTION	DATE	APPROV.
UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT MEDFORD DISTRICT - MEDFORD, OREGON			
TITLE SHEET			
DESIGNED			
REVIEWED			
APPROVED			
DRAWN BY JWR	SCALE AS SHOWN		
DATE May 2010	SHEET 1 OF 1		
DRAWING NO. OR-11-9113.4-1			


SWINNING TIMBER SALE
ROAD LOCATION MAP
CONTRACT NO. TS 10-18
EXHIBIT C-2; PAGE 1 OF 1


U.S.D.I. BLM MEDFORD DISTRICT


T.38S., R.3E. WILL. MER.
T.38S., R.4E. WILL. MER.
T.39S., R.3E. WILL. MER.
T.39S., R.4E. WILL. MER.


 EXISTING GATE


 EXISTING BARRICADE


 PUMP CHANCE


 QUARRY FOR 38-4E-7.00 MATERIAL


 ROAD PROJECTS


 EXISTING ROAD


 EXISTING PAVED ROAD




 EXISTING PRIMITIVE ROAD

 ROAD TO BE RENOVATED

 ROAD TO BE RENOVATED AND SPOT ROCKED

 BLM LAND

 TS UNITS

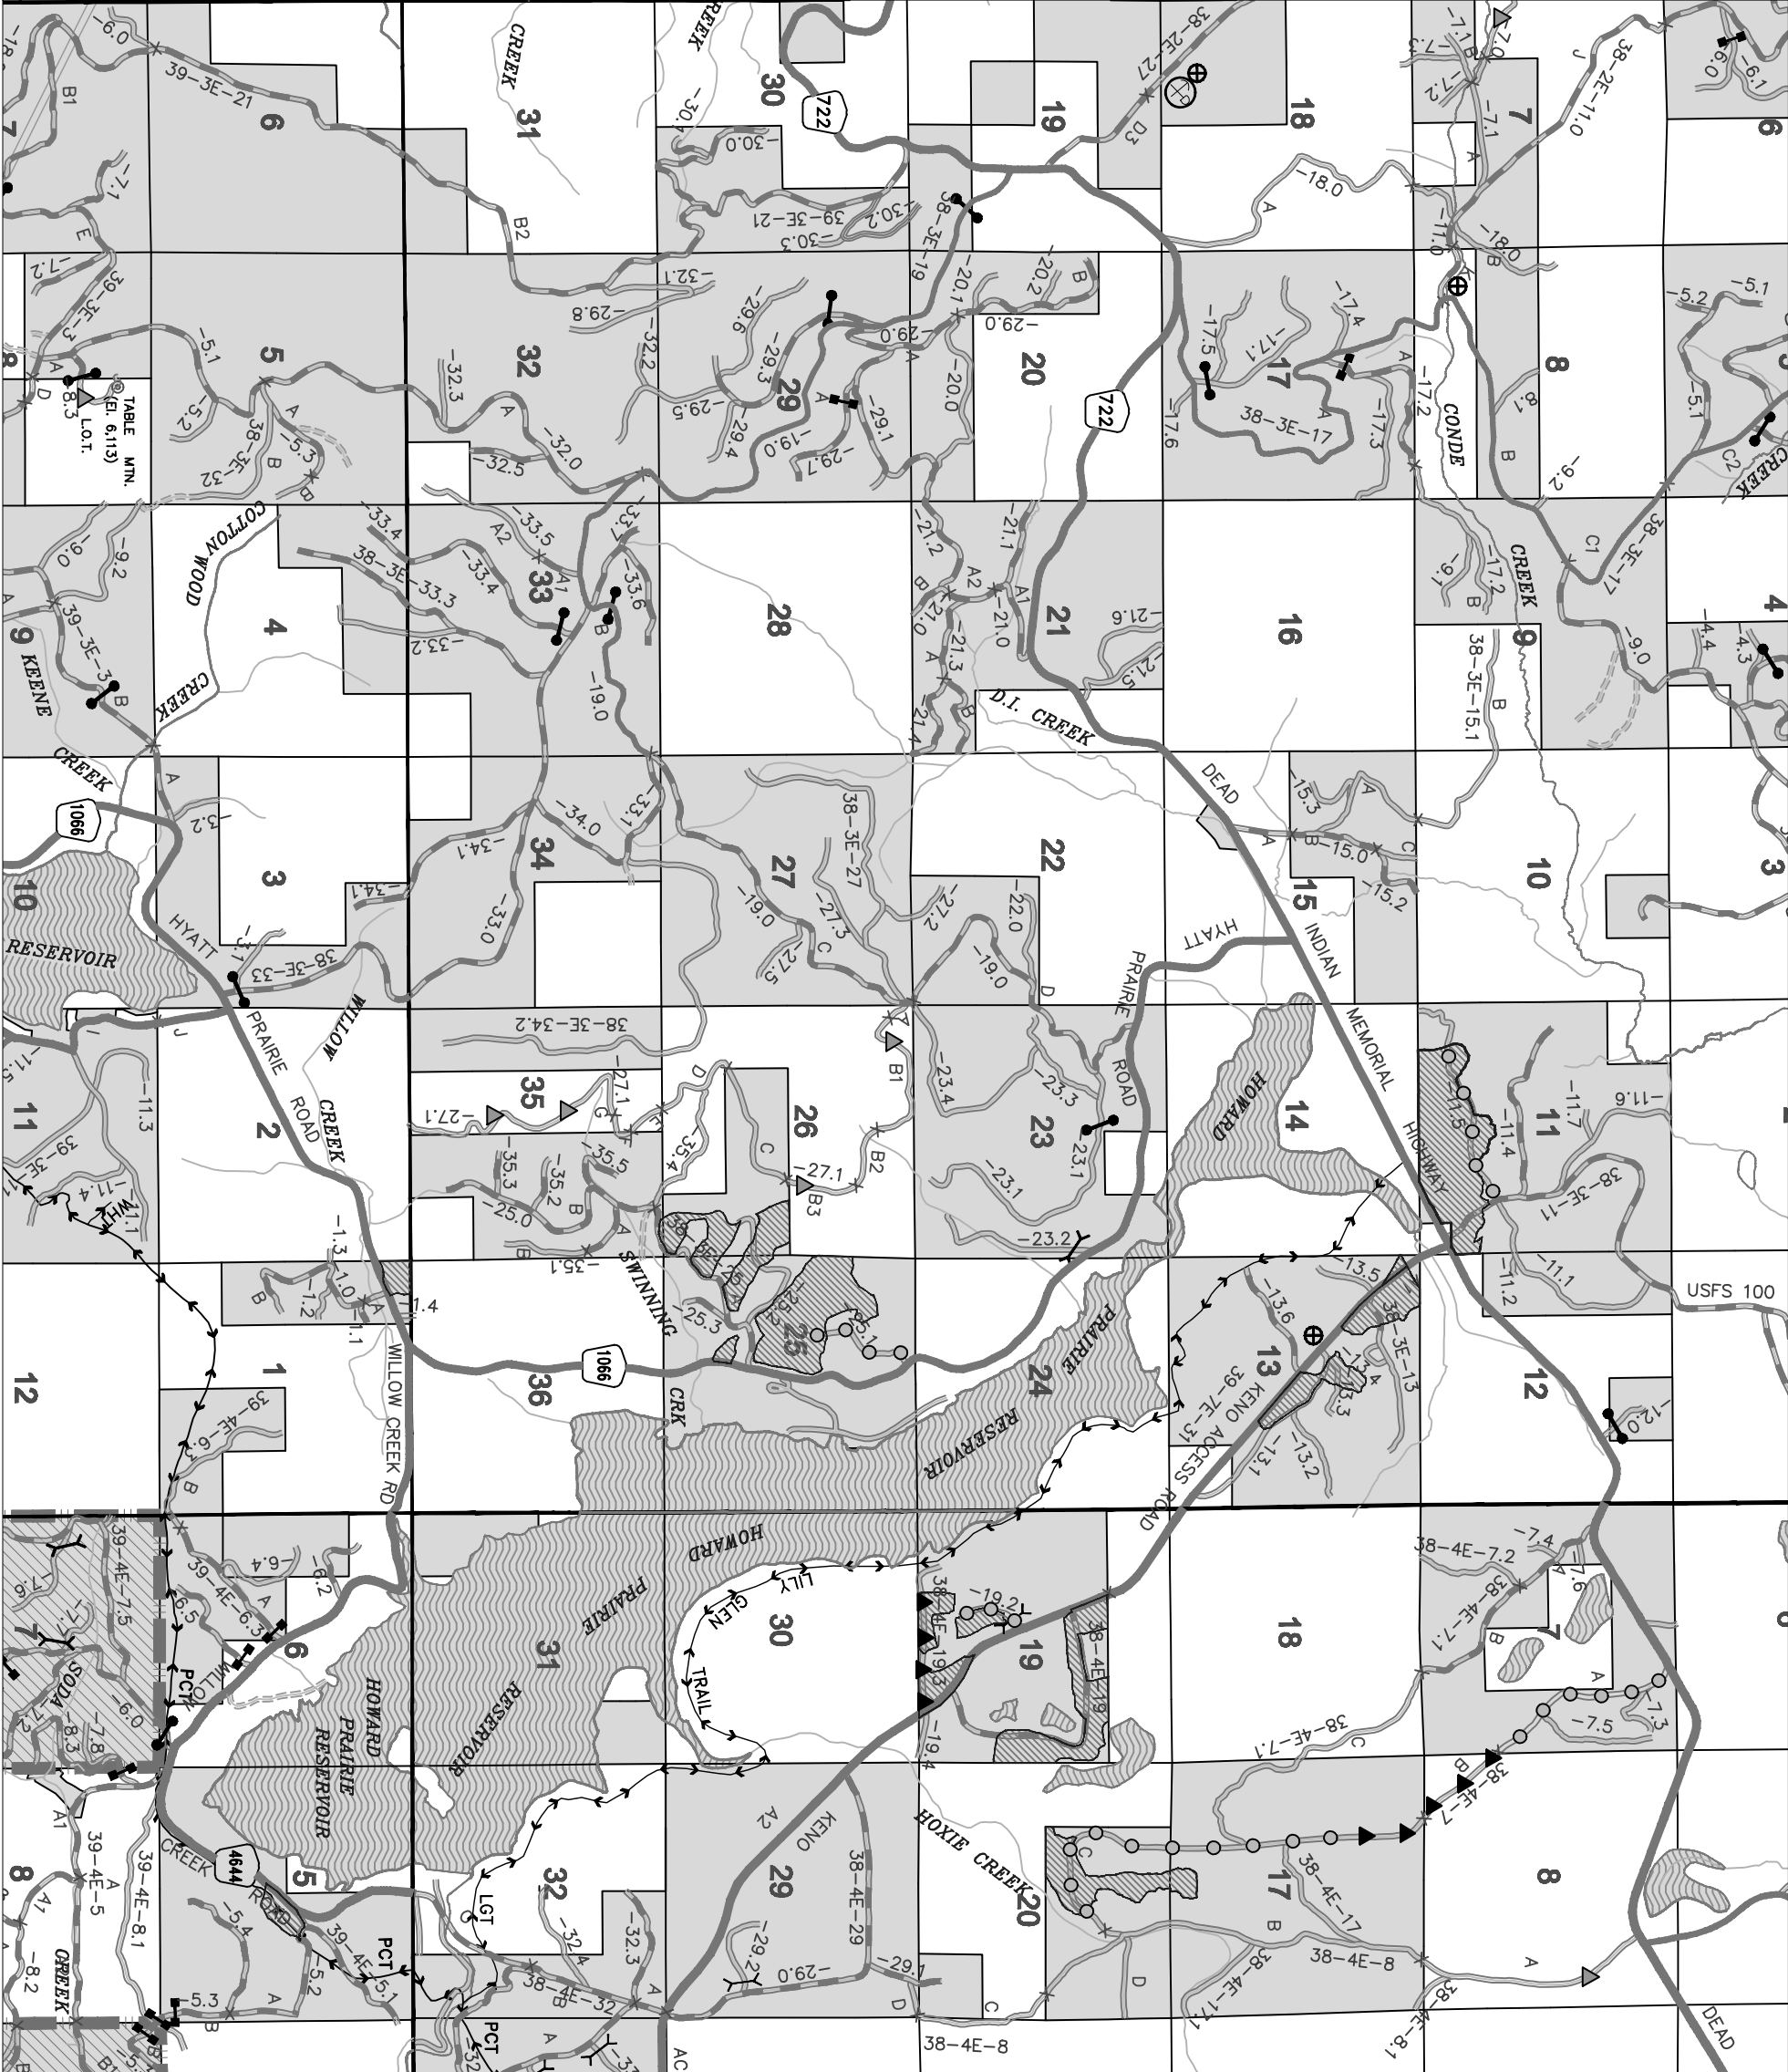

R.3E.

R.4E.

T.39S.

T.38S.

[illegible]




Indicate gradation.

ESTIMATE OF QUANTITIES*

REQ. NO.	DATE	APPROV.
U.S. DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT MEDFORD DISTRICT MEDFORD, OREGON		

DESIGNED		
REVIEWED		
APPROVED		
DRAWN	JS	SCALE NONE
DATE		SHEET 1 OF 1

DRAWING NO. OR-11-9713A-2

[illegible]

NOTES

1. DRAIN SURVEYOR TROUSERS AND TO EACH FILL SHOULDER 1 PT. FOR FILL OF 1-4 FT. & 1 PT. FOR FILL OVER 4 FT. WIDEN THE INSIDE SHOULDER OF ALL CURVES AS FOLLOWS:
WHEN THE DEGREE OF CURVE EQUALS



3. TURNPIKES
A. NIGHT TRIP: IN ADDITION TO SUPERVISOR WARNING AS
BEFORE, THE TRUCK SHOULD BE STOPPED AS SOON AS THE
TRUCK IS OBSERVED AS BEING ON THE ROAD AND
B. INTERVIEWABLE AND NOT MORE THAN _____ FT. AHEAD.
4. SUPERSTOPS
TURNPIKES, CLAYCE WISDOM AND ROAD
APPROACH APPROXIMATIONS SHALL BE SUPERSTOPS.
5. CLEARING NIGHT
TRUCK SUPERSTOPS 2000

**ALWAYS
THINK
SAFETY**

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT MEDFORD DISTRICT
MEDFORD, OREGON

SPECIFICATION SHEET

DESIGNED
REVIEWED
APPROVED



TYPE 6

2. QUERIED TYPE
A. PIT RUN ROCK MATERIAL.
B. GRIND ROLLED ROCK MATERIAL.
C. SCREENED ROCK MATERIAL.
D. CRUSHED ROCK MATERIAL.

DRAWING NO. **CR-11-0119-42**

TYPICAL CROWNED SURFACE

EXISTING MIN. BASE COURSE WIDTH


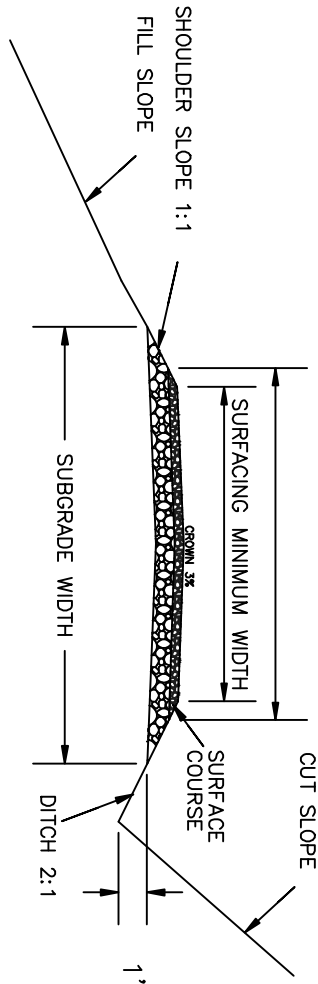


EXHIBIT C-5
SHEET 1 OF 1


TYPICAL INSLOPED SURFACE

EXISTING MIN. BASE COURSE WIDTH

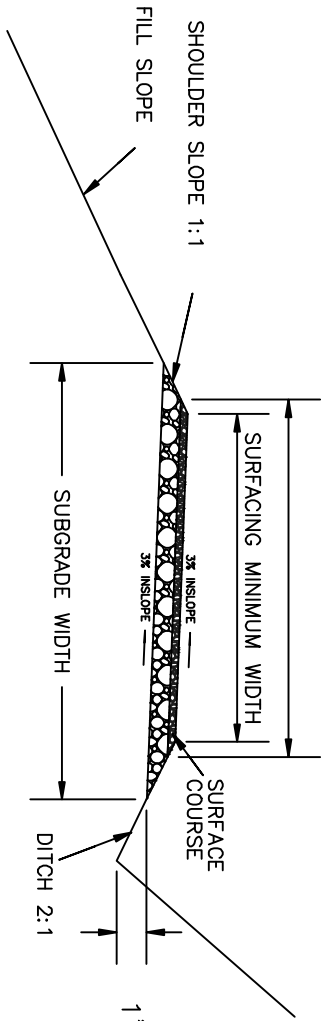


TYPICAL OUTSLOPED SURFACE

EXISTING MIN. BASE COURSE WIDTH

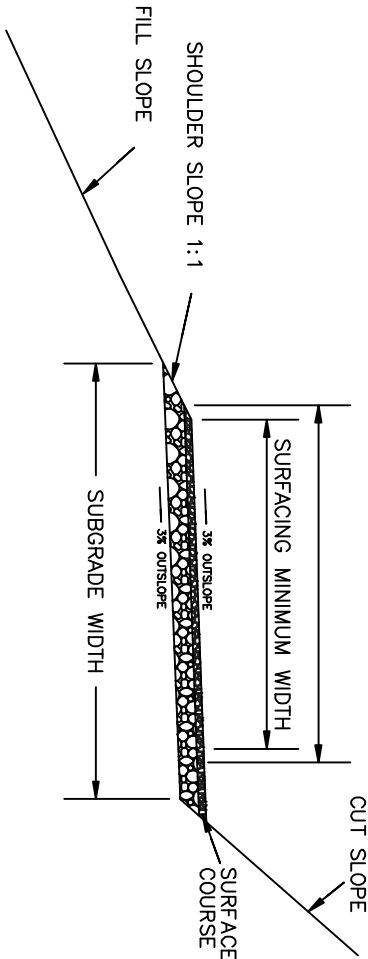

NOTE: All roads shall receive one layer of surfacing at 6" in depth.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT MEDFORD DISTRICT - MEDFORD, OREGON	
<i>TYPICAL ROAD SURFACING SECTIONS</i>	
DESIGNED _____	
REVIEWED _____	
APPROVED _____	
DRAWN: JMR	SCALE: AS SHOWN
DATE: JUNE 2009	SHEET 7 OF 7
DRAWING NO. OR-11-9113.4-04	

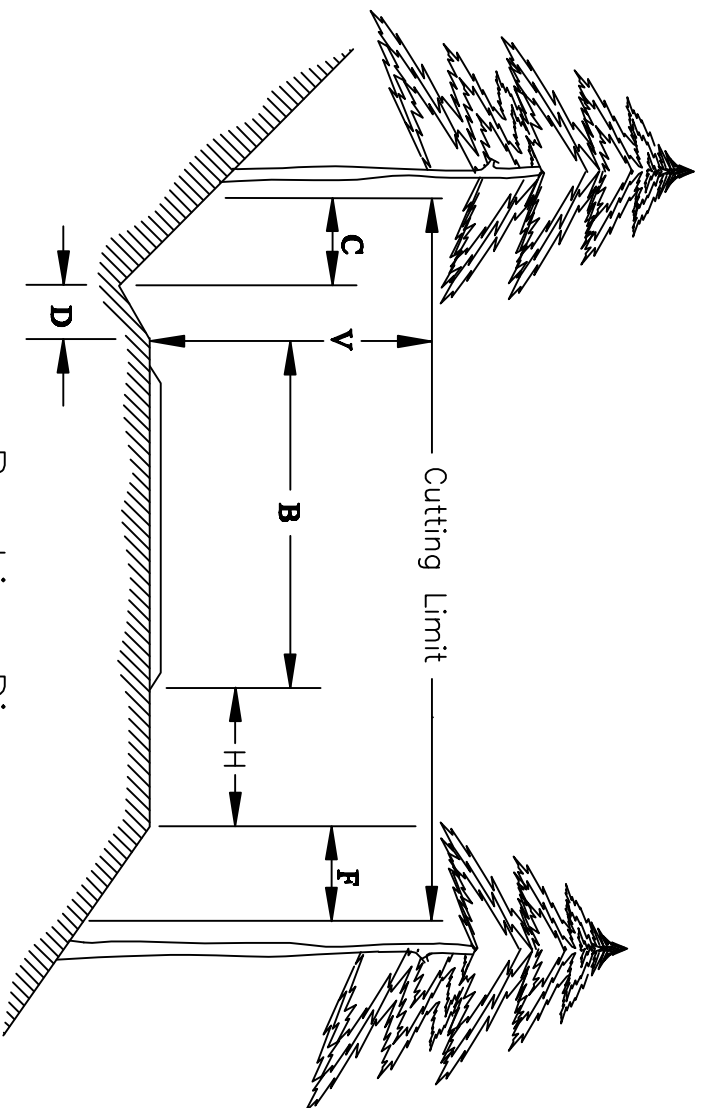

Brushing Diagram

Cutting Limit = $C + D + B + H + F$

B = Basic lane width (includes turnouts)

Width shall be determined by the PI

C = 4 ft - Distance to be brushed on cut slope beyond centerline of ditch

D = Centerline of ditch to inside shoulder


H = Variable distance between edge of basic lane and outside shoulder (does not include turnout widths)

F = Distance to be brushed on fill slope beyond outside shoulder

(F = 4 when H is 4 ft or less)

(F = 0 when H is greater than 4 ft)

V = 14 ft - Height of vertical cutting limit

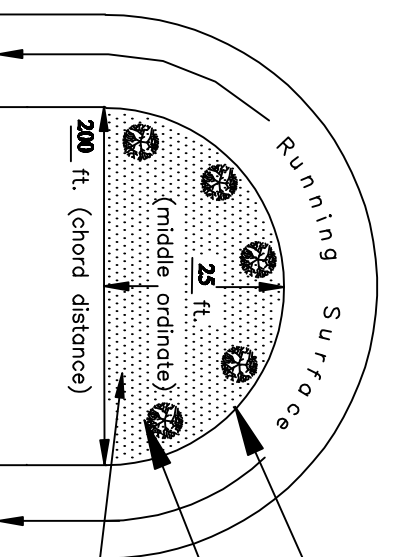

Sight Distance Diagram

Inside shoulder

Thin, space and prune trees through curved sections of road for visibility as shown. Thinning and spacing of trees shall be a minimum (10) feet apart. A minimum (1/3) tree crown shall be maintained on any pruned tree.

Area to be cut

Typical Basic lane widths

- One lane low traffic volume..... 12 to 16 ft
- One lane medium traffic volume.. 16 to 20 ft
- Two lane high volume traffic..... 20 to 40 ft
- Turnouts..... 10 ft

NOTES:

Cutting and Removal of vegetation from ditches and roadway is incidental to brushing within cutting limits.

All distances shown are horizontal except for V

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT MEDFORD DISTRICT - MEDFORD, OREGON	
ROADSIDE BRUSHING	
DETAIL	
DESIGNED _____	SCALE NONE
REVIEWED _____	SHEET 1 OF 1
APPROVED _____	
DRAWN RRB	
DATE August 2006	
DRAWING NO. OR-117-TS06-26-C8	

SWINNING TIMBER SALE Road Renovation Worklist

Renovation: This consists of road work to be performed on the road prior to its use. The work includes, but not limited to blading the road surface, brushing, cleaning catch basins, cleaning ditches, and placing crushed aggregate on approved road bed..

Pit run material to be placed on 38-4E-7.00 and for spot rock shall come from Sharon Lakes Quarry located on Exhibit C-2 Road Location Map.

Road barricades removed during timber operations shall be replaced immediately after use. For activities that are not finished in one dry season, barricades shall be re-installed before the wet season, October 15th.

NAT – Natural Surface

CMP – Corrugated Metal Pipe
Jct.– Junction

Road 38-3E-11.05 (Shell Peak C Spur)

NAT

<u>MP</u>	<u>Remarks</u>
0.00	Jct. with 38-3E-11.00.Begin Blading.
0.68	End Blading.

Road 38-3E-25.01 (Willow Cr Spur)

NAT

<u>MP</u>	<u>Remarks</u>
0.00	Jct. with Hyatt Prairie Road. Begin Blading. Begin Brushing.
0.43	End Blading. . End Brushing.

Road 38-4E-07.00 (Guard Station Rd)

NAT

<u>MP</u>	<u>Remarks</u>
0.00	Jct. with Dead Indian Memorial Road. Begin cleaning ditch line and catch basins. Begin Brushing.
0.06	Existing CMP 18"x 30'
0.20	Existing CMP 18"x 30'
0.29	Private Drive Way right.

0.46	Private Drive Way right.
0.58	Existing CMP 18"x 30'
0.83	Cross Section line between Sec. 7 & 8 North/South Line. Begin Balding. Begin placement of pit run material 4" depth.
1.48	End Blading. End placement of pit run material.
1.14	Existing CMP 18"x 30'
1.49	Existing CMP 18"x 30'
1.81	Junction with 37-4E-7.1 left.
1.95	Junction with 38-4E-7.1 right.
2.04	Existing CMP 18"x 30'
2.69	Existing CMP 18"x 30'. Spot Rock with 25 CY of pit run material for 50'.
3.20	Junction with 38-4E-8.0. End of Project.

Road 38-4E-19.02 (Hoxie Creek Sp)


NAT

<u>MP</u>	<u>Remarks</u>
0.00	Jct. with Keno Access Road 39-7E-31. Begin Blading. Begin Brushing.
0.01	Existing barricade. Remove and replace upon completion of log haul.
0.02	Existing barricade. Remove and replace upon completion of log haul.
0.39	End Blading. End Brushing. Road to be decommissioned, seeded and mulched upon completion of timber haul.


Road 38-4E-19.03 (Hoxie Creek Sp)

NAT

<u>MP</u>	<u>Remarks</u>
0.00	Jct. with Keno Access Road 39-7E-31. Begin Blading. Begin Brushing. Placement of spot rock 50 CY shall be determined by Authorized Officer.
0.53	End Blading. . End Brushing.

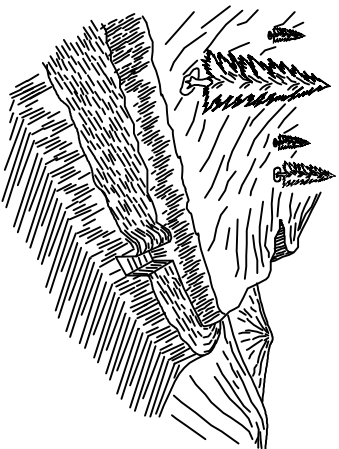



TRENCH BARRICADE



1. BARRICADE LENGTH SHALL EXTEND ACROSS THE ENTIRE ROAD SURFACE TO A POINT SUFFICIENT TO PROHIBIT MOTOR VEHICLE TRAFFIC.
2. THE EXACT LOCATION SHALL BE AS STAKED IN THE FIELD.
3. THE BARRICADE SHALL BE SKEWED AS NEEDED TO DRAIN OR AS DIRECTED BY THE AUTHORIZED OFFICERS REPRESENTATIVE.




ARMORED WATER DIP

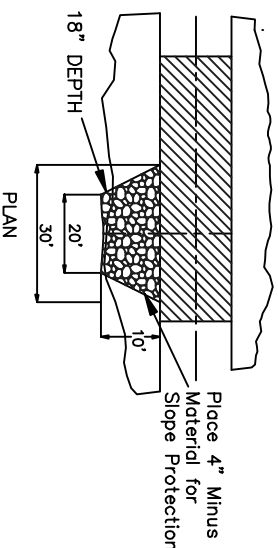

1. WATER DIPS SHALL BE CONSTRUCTED AS SHOWN ABOVE.
2. EXACT LOCATION WILL BE FLAGGED BY THE AUTHORIZED OFFICER PRIOR TO CONSTRUCTION.
3. ALL WATER DIPS SHALL BE SKEWED 30 DEGREES.
4. THE WATER DIP INVERT SHALL BE SMOOTH AND FREE DRAINING.
5. THE LENGTH SHALL BE SUFFICIENT TO EXTEND FROM THE CUT BANK TO THE FILL SLOPE AND BE READILY CROSSED BY HIGH CLEARANCE TYPE VEHICLES.
6. MATERIAL SOURCE FOR 4" MINUS CRUSHED MATERIAL SHALL BE FROM A COMMERCIAL SOURCE.
7. EXCAVATED MATERIAL SHALL BE UTILIZED IN CONSTRUCTION OF WATER DIP. NO SIDECASTING IS ALLOWED.




CROSS-DRAIN

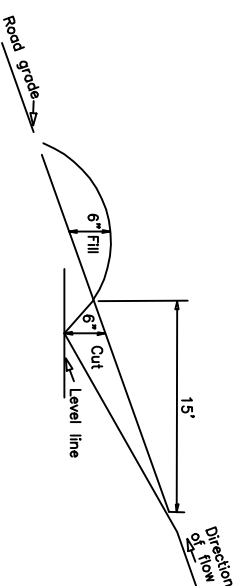

1. CROSS-DRAINS SHALL BE CONSTRUCTED AS SHOWN ABOVE.
2. EXACT LOCATION WILL BE FLAGGED BY THE AUTHORIZED OFFICER PRIOR TO CONSTRUCTION.
3. ALL CROSS DRAINS SHALL BE SKEWED 30 DEGREES.
4. THE CROSS-DRAINS INVERT SHALL BE SMOOTH AND FREE DRAINING.

SKEW DIAGRAM



REV. NO.	DESCRIPTION	DATE	APPROV.
1	DESIGNED		
2	REVIEWED		
3	APPROVED		
4	DRAWN	DCM	SCALE NONE
5	DATE	November 2009	SHEET 1 OF 1
6	DRAWING NO.	OR-117-TS06-26-C7	

DRAINAGE & EROSION CONTROL INSTALLATION

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
MEDFORD DISTRICT - MEDFORD, OREGON

SPECIAL PROVISIONS

1. Before beginning road construction operations for the first time or after a shutdown of seven or more days, the Purchaser shall notify the Authorized Officer of the date he plans to begin operations. The Purchaser shall also notify the Authorized Officer if he intends to cease operations for any period of 30 or more days.
2. Winterized - All road segments not completed during dry weather periods shall be winterized, by providing a well-drained roadway by water barring, maintaining drainage, barricades, and any additional measures necessary to minimize erosion and other damage to the roadway, as directed by the Authorized Officer.
3. The P-line as staked in the field and as shown on Exhibit C, are intended to be used as a control, and should be considered as being in the area of the finished grade.
4. Seed mix and Straw sources: At agency discretion
 - A) Provided from BLM: based on availability
 - OR
 - B) Purchased from approved Commercial source:
5. The application of dust abatement materials such as Lignin or approved petroleum based dust abatement products shall be restricted from application just after wet weather or at stream crossings or other locations that could result in direct delivery to a water body.
6. Water sources/ Pump chances – Listed are approved water sources. Other water sources shall be approved by the Authorized Officer prior to use. The Purchaser is responsible for all permits and fees from water sources on private or commercial sources.

Location:

<u>ROAD # and NAME</u>		<u>MP</u>
38-4E-35.00	Nameless Springs Quarry	2.14
39-7E-31.00	Skinny Dip Quarry	0.64
38-2E-27.00	Sharon Lakes Quarry	0.53
38-3E-17.00	Conde Creek Road	2.52

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ROAD SPECIFICATIONS

Jackson County, Oregon

INDEX

SPECIAL PROVISIONS

100	GENERAL
500	RENOVATION OF EXISTING ROADS
600	WATERING
700	AGGREGATE BASE COURSE (PIT RUN)
1600	QUARRY AND PIT DEVELOPMENT
1800	SOIL STABILIZATION
2100	ROADSIDE BRUSHING
2600	POST HARVEST WORK

GENERAL – 100

101 - Prewrite Conference(s):

A prework conference will be held prior to the start of new construction, improvements, reconstruction, quarry development, surfacing, and soil stabilization. The Purchaser shall request the conference at least 72 hours prior to the time it is to be held. The conference will be attended by the Purchaser and/or his representatives, subcontractors and/or his or their representatives and the Authorized Officer and/or his representatives.

The purpose will be to review the required work, exhibits and specifications, and to establish a work schedule and a list of the Purchaser's representatives and subcontractors. A Prewrite conference shall be scheduled at the work site for quarry development.

102 - Definitions:

AASHTO - American Association of State Highway and Transportation Officials.
Current editions of tests and specifications.

ASTM - American Society for Testing and Materials.

Base Course - Surfacing structure consisting of crushed gravel or stone, crushed sandstone, pit run rock, bank or river run gravels, etc., to provide support and, in the event no surface course is placed, the running surface for traffic load.

BLM - Bureau of Land Management

Borrow - Excavated material required for embankments and other portions of the work.

Culvert - A pipe, pipe-arch, arch, or box structure constructed of metal, concrete, plastic or wood which provides an opening under the roadway primarily for the conveyance of liquids, pedestrians or livestock.

Curve Widening - Widening required on inside of curves to accommodate long log and equipment hauling trucks.

Embankment - A structure of soil, aggregate, or rock material placed on a prepared ground surface and constructed to subgrade.

End Haul - Excavated material moved, other than by dozer, to an embankment or waste area to prevent sidecasting material outside of the road prism.

Excess Excavation - Material from the roadway in excess of that needed for construction of the designed roadway (waste).

Grading - Leveling to grade, shaping and smoothing of a road subgrade; the shaping of roadside ditches as to grade and contour. In some instances includes smoothing of the cut bank.

Pioneer Road - Temporary construction access built along the route of the project.

Plans - The approved drawings, or exact reproductions thereof which show the locations, character, dimensions, and details of the work to be done.

Purchaser - The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through their, or its agents, employees, or contractors.

Roadbed - The graded portion of the road within top and side slopes, prepared as a foundation for the pavement structure and shoulders.

Road Centerline - Longitudinal center of roadbed.

Road Improvement - Work done to an existing road which improves it over its original design standard.

Road Renovation - Work done to an existing road which restores it to its original design.

Roadway - The portion of a road within limits of construction. Usually from the toe of the fill slope to a point where the cut slope intersects natural ground line. Synonym - road prism.

Scale - In quarrying, consists of the removal of loose or overhanging rock adhering to the solid face after a shot or a round of shots has been fired.

Scarification - The process of loosening or breaking up of the surface layer of soil or road, usually to a specified depth.

Shoulder - The portion of the roadbed contiguous with the traveled way designed for accommodation of stopped vehicles, safety, and lateral support of base and surface courses.

Spalls - Flakes or chips of stone.

Specifications - A general term applied to all directions, provisions, and requirements pertaining to performance of the work.

Specific Gravity - The ratio of the density of a material to the density of water obtained by weighing known volumes of both items in air. A specific gravity less than one implies that the material will float.

Structures Bridges, culverts, catch basins, retaining walls, underdrains, flumes, splash pads, downspouts, and other project features which may be involved in the work and not otherwise classified in these specifications.

Subbase - Reinforcement of the subgrade with large particles of pit run or crushed stone. Usually confined to roads having wet subgrades or subgrades with weak support characteristics.

Surface Course - Top layer of a road structure consisting of finely crushed gravels or asphalt designed to provide a smooth running surface for traffic load.

Subgrade - The top surface of a roadbed upon which the traveled way and shoulders are constructed.

Traveled Way - The portion of the roadbed used for the movement of vehicles, exclusive of shoulders.

Typical Cross Sections - Cross sectional plane of a typical roadway; showing natural ground line and designed roadway in relation to cut and fill, through cut, and through fill.

Turnout - Extra widening of the roadbed at appropriate intervals on single-lane roads for passing purposes.

102a - Tests Used in These Specifications:

AASHTO T 11 Quantity of rock finer than No. 200 sieve.

AASHTO T 27 Sieve analysis of fine and coarse aggregate using sieves with square openings; gradation.

AASHTO T 89 Liquid limit of material passing the No. 40 sieve.
Water content at which the soil passes from a plastic to a liquid state.

AASHTO T 90 Plastic limits and plasticity index of soil.
a. Plastic limit - lowest water content at which the soil remains plastic.
b. Plasticity index - range of water content, within which the material is in a plastic state. Numerical difference between the liquid and plastic limits of the soil.

AASHTO T 96 Resistance to abrasion of small size coarse aggregate by use of the Los Angeles machine.

AASHTO T 99 Relationship between soil moisture and maximum density of soil.
Method A - 4" mold, soil passing a No. 4 Sieve.
25 blows/layer & 3 layers.
Method D - 6" mold, soil passing a 19.00mm 3/4
inches sieve. 56 blows/layer & 5
layers.

AASHTO T 176 Shows relative portions of fine dust or claylike materials in soil or graded aggregate.

AASHTO T 180 (OSHD 106-71) moisture density relationship of soil same as AASHTO T 99 proctor but uses a 10-lb rammer & 18-in drop.

AASHTO T 191 Sand Cone. Density of soil in place: For subgrade use 6-inch or 12-inch cone. For rock surfacing for 1-1/2-inch minus to 3-inch minus use 12-inch cone.

AASHTO T 205 Rubber balloon. Density of soil in place. Use for compacted or firmly bonded soil.

AASHTO T 210 Durability of aggregates based on resistance to produce fines.

AASHTO T 224 Correction for coarse particles in the soil.

AASHTO T 238 Determination of density of soil and soil aggregates in place by nuclear methods.

AASHTO T 248 Reducing field samples of aggregate to testing size by mechanical splitter, quartering, or miniature stockpile sampling.

DES. E-12 Determination of relative density of cohesionless soils.

DMSO (dimethyl sulfide) - Determines volume of expanding clays in aggregates. Usually associated with marine basalts.

103 - Compaction equipment shall meet the following requirements:

103f - Vibratory roller. The drum diameter shall be not less than 48 inches, the drum width not less than 58 inches, and have a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 vibrations per minute (VPM),

corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 RPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled or drawn by a vehicle of sufficient horsepower to enable the unit to travel through a loose layer of material at a speed ranging from 0.9 mile to 1.8 miles per hour, as directed by the Authorized Officer.

The towing vehicle and roller or self-propelled unit meeting the above requirements shall be considered a vibratory roller unit.

- 103g - Vibratory compactor. Vibratory compactors shall consist of multiple or gang-type compacting units or pads with a minimum variable width of 2 feet. It shall be self-contained and capable of compacting material as required.
- 103h - Other. Compaction equipment approved by the Authorized Officer.

RENOVATION OF EXISTING ROADS - 500

- 501 - This work shall consist of reconditioning and preparing the roadbed and shoulders, cleaning and shaping drainage ditches, trimming vegetation from cut and embankment slopes, and cleaning and repairing drainage structures of existing roads in accordance with these specifications, as shown on the plans, and as marked on the ground with stakes or metal tags.
- 501a - This work shall include the removal and disposal of slides in accordance with these specifications.
- 502 - The existing road surface shall be bladed and shaped to the lines, grades, dimensions, and typical cross sections shown on the plans at the following locations:

Road No.	From	To
38-3E-11.05	0.00	0.68
38-3E-25.01	0.00	0.43
38-4E-7.00	0.83	1.48
38-4E-19.02	0.00	0.39
38-4E-19.03	0.00	0.53

- 502b - Drainage ditches shall be bladed and shaped in accordance with the lines, grades, dimensions, and typical cross sections shown on the plans.
- 506 - The inlet end of all existing drainage structures shall be cleared of vegetative debris and boulders that are of sufficient size to obstruct normal stream flow. Pipe inverts shall be cleared of sediment and other debris lodged in the barrel of the pipe. The outflow area of

all pipe structures shall be cleared of rock and vegetative obstructions which will impede the structure's designed outflow configuration.

- 507 - The finished grading shall be approved in writing by the Authorized Officer. The Purchaser shall give the Authorized Officer 5 days notice prior to final inspection of the grading operations.

WATERING - 600

- 601 - This work shall consist of furnishing and applying water required for the compaction of embankments, roadbeds, backfills, base courses, surface courses, finishing and reconditioning of existing roadbeds laying dust, or for other uses in accordance with these specifications.
- 602 - Water, when needed for compaction or laying dust, shall be applied at the locations, in the amounts, and during the hours as directed by the Authorized Officer. Amounts of water to be provided will be the minimum needed to properly execute the compaction requirements in conformance with these specifications, and for laying dust during work periods.
- 603 - Water trucks used in this work shall be equipped with a distributing device of ample capacity and of such design as to ensure uniform application of water on the roadbed.
- 605 - The Purchaser shall secure the necessary water permits and pay all required water fees for use of water source(s) selected by the Purchaser and approved by the Authorized Officer.

AGGREGATE BASE COURSE - 700
PIT RUN ROCK MATERIAL

- *701 - This work shall consist of hauling and placing one or more layers of pit run rock material on the approved roadbeds in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans.
- 702 - Pit run rock materials used in this work shall be obtained from the source shown on the plans. Development and mining of such source shall be in accordance with Subsection 1601 of these specifications.
- 705 - Pit run rock material shall be placed in layers of sufficient thickness to accommodate the material, except that the maximum thickness of any layer shall not exceed 10 inches.
- 706 - Oversize material that cannot be accommodated in the layer shall be removed at the source or on the road, and shall be disposed of as directed by the Authorized Officer.

- 707 - When so indicated by the plans, filler or binder obtained from the source shown on the plans shall be uniformly blended with pit run rock material on the road.
- *708 - The roadbed as shaped and compacted under Section 500 of these specifications shall be approved in writing by the Authorized Officer prior to placement of pit run rock material.
- 709 - Pit run rock material shall be placed on roadbed, blade processed and spread to required dimensions.
- 710 - Pit run rock material shall be compacted by routing construction and hauling equipment over the full width of each layer placed.
- 711 - Layers of pit run rock material placed and shaped as specified shall be uniformly moistened or dried to the optimum moisture content for maximum density and compacted to full width by compacting equipment conforming to the requirements of Subsections 103f, 103g, and 103h. Minimum compaction shall be one 1 hour of continuous compacting for each 250 cubic yards, or fraction thereof, of pit run rock material placed per layer.
- 712 - Pit run rock material shall be surface bladed during the compaction operation to remove irregularities and to produce a smooth running surface.
- 713 - Pit run rock material used to repair or reinforce soft, muddy, frozen, yielding, or rutted subgrades shall not be construed as surfacing required under this specification unless approved in writing by the Authorized Officer prior to placement.

QUARRY AND BORROW PIT DEVELOPMENT - 1600

- 1601 - This work shall consist of quarry and borrow pit development and rehabilitation in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans.
- 1602 - The designated rock quarry site is located at the following location:

<u>Subdivision</u>	<u>Section</u>	<u>T.</u>	<u>R.</u>
<u>Sharon Lakes Quarry</u>	SE ¼ SW¼	<u>18</u>	<u>38</u> <u>3E</u>

Development and reclamation work at these sites shall be in strict accordance with these specifications and the mining and reclamation plan, as shown on the plans.

- 1603a- If the Purchaser elects to use a rock source other than the designated source, the rock

material produced shall comply with applicable sections of these specifications. If the alternate source is located on BLM ownership and a current BLM plan is not available, a development, mining, and reclamation plan shall be prepared by the Purchaser, and submitted for approval by the Authorized Officer. Development, mining and reclamation work shall be in accordance with the approved plan and 1600 specifications.

- 1604 - If the designated source proves insufficient as to quantity and quality of the required rock material, the Purchaser shall, when ordered in writing by the Authorized Officer, move his crushing operation to an alternate materials source as shown on the plans and as selected by the Authorized Officer. Development, extraction, and reclamation work on the alternate source shall be in accordance with the mining and reclamation plans prepared by the BLM. An equitable adjustment will be made in the contract price.
- 1605c- The operation of equipment related to the production of rock aggregate and quarry operations shall be confined to the quarry operations area and to the designated tractor trails as shown on the plans.
- 1609 - Overburden, trees, stumps, logs, and loose rock shall be removed back from the edge of working quarry faces for a distance of 10 feet.
- 1609a- Overburden and reject material shall be placed at the disposal site shown on the plans as directed by the Authorized Officer.
- 1611 - The Purchaser shall notify the Authorized Officer at least 5 days prior to commencing quarry operations.
- 1612 - The Purchaser shall notify MSHA (Mining Safety and Health Administration) by standard form or telephone, and in accordance with part 56, Chapter 1 of Title 30 Code of Federal Regulations (CFR) of what date he intends to commence, terminate, and/or temporarily close down operations of the quarry. Notice shall be submitted a minimum of 10 days prior to the proposed date of the action to be taken. Notification shall be submitted to:

Mining Safety and Health Admin.
Attn: Supervisor
P.O. Box 70
Albany, Oregon 97321
Commercial Phone No. 541-967-5825

Mining Safety and Health Admin.
117 107th Ave. NE
Bellevue, Washington 98004
Commercial Phone No. 206-442-7037

The Purchaser shall also prepare and submit to MSHA at the above address the quarterly Employment Report and Injury and Illness Report for the mining operation.

- 1613 - The Purchaser shall comply with local and State Safety Codes covering quarrying operations, warning signs and traffic control.
- 1615 - Operations on the quarry site shall be so conducted that, both during and after completion of work, erosion will be minimized and sediment will not enter streams or other bodies of water. Waste or disposal areas and quarry access roads shall be located, constructed, and maintained in a manner that will prevent sediment from entering live streams or other bodies of water. Noncombustible debris and silt-laden water material resulting from the quarry operation shall be placed in such waste or disposal areas as shown on the plans and as directed by the Authorized Officer.
- 1616 - Upon completion of quarrying operations, overburden and waste materials shall be disposed of in accordance with requirements of the approved reclamation plan or in a manner approved in writing by the Authorized Officer.
- 1617 - Upon completion of quarrying operations, required site reclamation measures shall be performed to the satisfaction of the Authorized Officer, including but not limited to the following:
 - (a) Permanently seal or fill unused drill holes as directed by the Authorized Officer.
 - (b) Construct water bars and take other erosion control measures as directed by the Authorized Officer.
 - (c) Remove blockages from drainage systems, streams, and waterways, and restore streams and waterways to their original courses.
 - (d) Erect barricades on quarry access roads as directed by the Authorized Officer.
 - (e) Complete required site reclamation measures within 14 days after final cessation of quarrying operations.
 - (k) Clear quarry benches and scale wall of loose or dislodged shot material and move to a designated location within the quarry.

SOIL STABILIZATION - 1800

- 1801 - This work shall consist of seeding and mulching on designated cut, fill, borrow, disposal, and special areas in accordance with these specifications and as shown on the plans.
- 1802a- Soil stabilization work consisting of seeding and mulching shall be performed on all disturbed portions of roads shown in Section 2601, landings, and all disturbed areas in accordance with these specifications and as shown on the plans.

- 1803 - Soil stabilization work as specified under Subsection(s) 1802a shall be performed during the following seasonal periods:

From: August 1 to: October 31

- 1804 - The Purchaser shall furnish the following species of grass seed meeting corresponding germination, purity, and weed content requirements:

<u>Species</u>	<u>Germination</u>	<u>Purity</u>	<u>Weed Content</u>
	<u>Min. %</u>	<u>Min. %</u>	<u>Max. %</u>
California Brome	85	95	0.2
Blue Wild Rye	85	95	0.2

The grass seed furnished shall meet the minimum requirement for Blue Tag Seed as set forth in the latest edition of Oregon Certification Standards published by Oregon State University. Seed source shall be approved by the Authorized Officer and shall be from general region where the project occurs.

The Purchaser shall furnish the Authorized Officer a Seed Test Result from a certified seed testing lab (Oregon State University), which shall include: date of test; lot number of each kind of seed; seed source; and results of tests as to name, percentages of purity and of germination, weed species and percentage of weed content, for each kind of seed furnished and, in case of mixture, the proportions of each kind of seed. The seed must have been tested within the last year to be accepted for use on this contract.

Genetically appropriate native plant species (seed or other native plant materials) shall be selected as a first choice for project work. If native grass/forb seed or (other plant materials) is not available, non-native species to be used shall be approved by the appropriate resources specialist (botanist, native plant coordinator, etc.) and authorized officer prior to application on the ground.

- 1805 - The Purchaser shall mix grass seed specified under Subsection 1804 in the following proportions: Seed Mixture "A":

<u>Species</u>	<u>Percent of Total by Wt.</u>	<u>Lbs. per Acre</u>
California Brome	50%	10
Blue Wild Rye	50%	10
TOTALS	100	20 lbs./ac.

- 1809d - Straw mulch shall be from native grass or other approved grain crops which are certified weed free, and free from noxious weeds, mold, or other objectionable materials. Straw mulch shall be in an air-dry condition and suitable for placing in a uniform manner. Straw mulch shall be applied evenly in treatment areas to a depth of 2 inches (approximately 1000 lbs/ac), or as directed by the Authorized Officer.

- 1810 - Mulch material shall be delivered to the work area in a dry state. Material found to be wet will not be accepted. Material to be used in the mulching operation may be stockpiled along the road designated for treatment provided it is maintained in a dry state and has the approval of the Authorized Officer.
- 1811 - Bulk mulching material required under these specifications shall be delivered to the work area bound either by twine, string, or hemp rope. Wire binding and plastic twine will not be permitted.
- 1812 - The Purchaser shall furnish and apply to acres designated for treatment as shown on the plans, a mixture of grass seed and mulch material at the following rate of application:

Grass seed	20 lbs./acre
Mulch	1000 lbs./acre
- 1816b - Dry Method - Blowers, mechanical seeders, seed drills, landscape seeders, cultipacker seeders, or other approved mechanical seeding equipment may be used when seed is to be applied in dry form.
- 1820 - The Purchaser shall notify the Authorized Officer at least 5 days in advance of the date he intends to commence the specified soil stabilization work.
- 1822 - Mulch that collects at the ends of culverts or accumulates to excessive depths on the slopes shall be evenly spread by hand methods, as directed by the Authorized Officer's Rep.
- 1823 - No material shall be applied when wind velocities would prevent a uniform application of the mix or slurry or when winds would drift the mix or slurry spray outside of the designated treatment area.
- 1826 - Twine, rope, sacks, and other debris resulting from the soil-stabilization operation shall be picked up and disposed of to the satisfaction of the Authorized Officer.

ROADSIDE BRUSHING - 2100

- 2101 - This work shall consist of the removal of vegetation from the road prism - variable distance, and inside curves in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the Roadside Brushing Detail Sheet of this exhibit, at designated locations as shown in the plans.
- 2102 - Roadside brushing may be performed mechanically with self powered, self-propelled equipment or manually with hand tools, including chain saws.

- 2103 - Vegetation cut manually and or mechanically less than 6 inches in diameter when measured at DBH shall be cut to a maximum height of 2 inches above the ground surface or above obstructions such as rocks or stumps on cut and fill sloped and all limbs will be severed from the trunk.
- 2103a - Vegetation shall be cut and removed from the road bed between the outside shoulders and the ditch centerline and such vegetation shall be cut to a maximum height of 1 inch above the ground and running surface. All limbs will be severed from the trunk. Sharp pointed ends will not be permitted. Cuts shall be parallel to the ground line or running surface.
- 2104 - Trees in excess of 6 inches in diameter at DBH shall be limbed, so that no limbs extend into the treated area or over the roadbed to a height of 14 feet above the running surface of the roadway on cut and fill slopes, within the road prism-variable distance. Limbs shall be cut to within 1 inch of the trunk to produce a smooth vertical face. Removal of trees larger than (6) inches in diameter for sight distance or safety may be directed by the Authorized Officer.
- 2105 - Vegetation that is outside of the road prism-variable distance that protrudes into the road prism and within 14 feet in elevation above the running surface shall be cut, to within 1 inch of the trunk to produce a smooth vertical face.
- 2106 - Vegetative growth capable of growing 1 foot in height or higher shall be cut, within the road prism-variable distance or as directed by the Authorized Officer.
- 2107 - Inside curves shall be brushed out for a sight distance of 200 feet chord distance and a middle ordinate distance of 25 feet. Overhanging limbs and vegetation in excess of 1 foot in height, shall be cut within these areas.
- 2108 - Self propelled equipment shall not be permitted on cut and fill slopes or in ditches.
- 2109 - Debris resulting from this operation shall be scattered downslope from the roadway. Debris shall not be allowed to accumulate in concentrations. Debris in excess of 1 feet in length and 2 inches in diameter shall not be allowed to remain on cut slopes, ditches, roadways or water courses, or as directed by Authorized Officer.
- 2113 - Roadside brushing shall be accomplished as specified on the plans on the roads listed below:

Road No.	From	To
38-3E-25.01	0.00	0.43
38-4E-7.00	0.00	3.20
38-4E-19.02	0.00	0.39
38-4E-19.03	0.00	0.53


- 2116 - Mechanical brush cutters shall not be operated when there are people and occupied vehicles within (400) feet of the immediate operating area.
- 2117 - Traffic warning signs shall be required at each end of the work area. Signs shall meet the requirements of the Manual on Uniform Traffic Devices.

POST HARVEST ROAD WORK - 2600

- 2601 - Construct barricade and construct waterbars on the following roads after use during same operating season:

Road # and Name	From	To
38-4E-19.02	0.00	0.39
TOTAL MILES		0.39

- 2602 - Post harvest road work shall consist of the following treatments:
- Construct water bars at 100' spacing, or as staked or directed by the Authorized Officer's Representative.
 - Construct log/earth barricades near the beginning of road to be decommissioned. The final locations will be staked by the Authorized Officer's Rep.

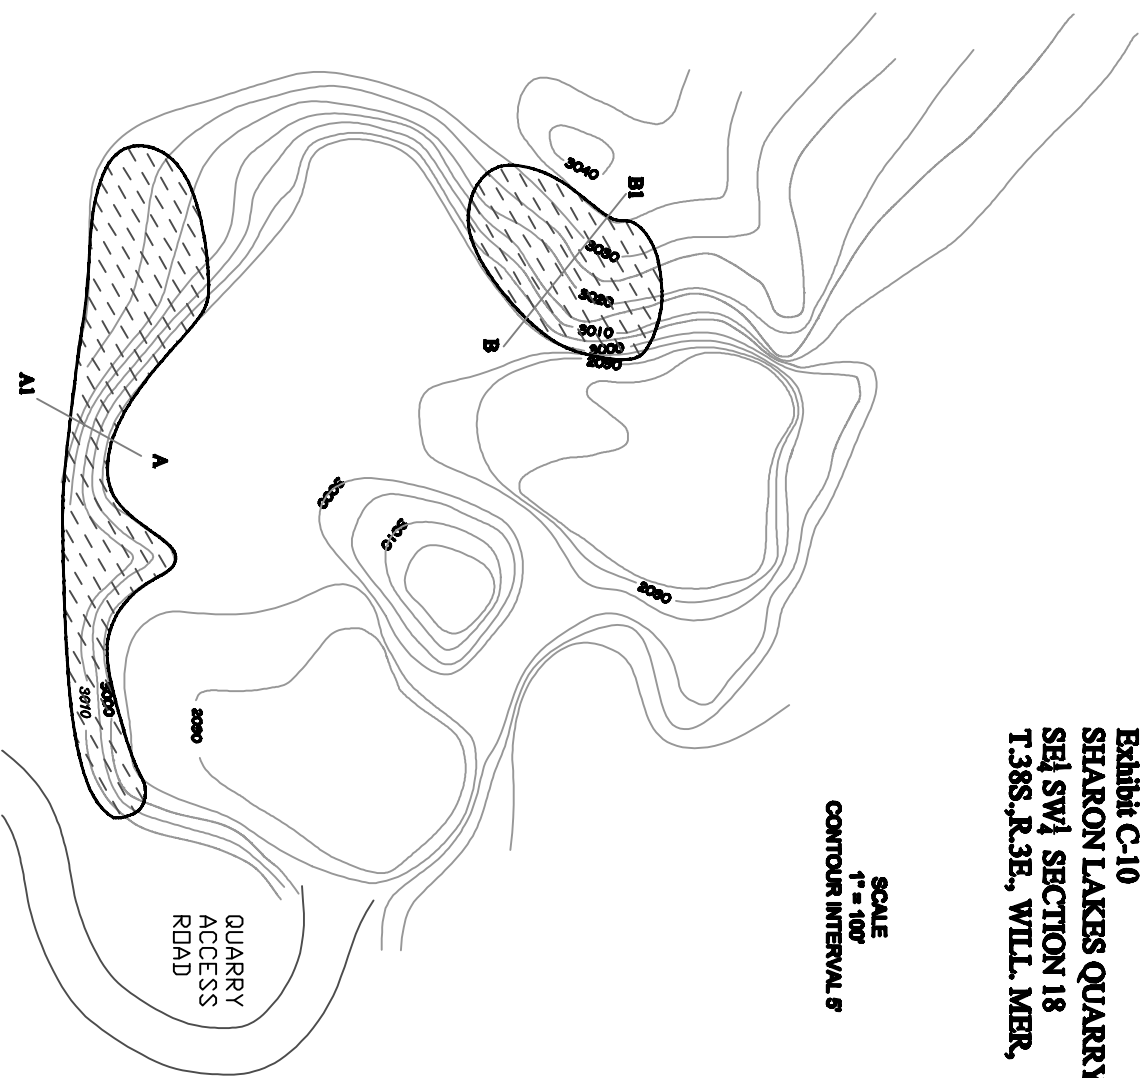[illegible]

LEGEND

 APPROXIMATE AREA OF MATERIAL TO BE REMOVED

REVNO.	DESCRIPTION	DATE	APPROVED
U.	S. DEPARTMENT OF THE INTERIOR		
	BUREAU OF LAND MANAGEMENT		
MEDFORD	DISTRICT MEDFORD,OREGON		
QUARRY PLAN			
SHARON LAKES QUARRY			
DESIGNED	BLM		
REVIEWED			
APPROVED			
DRAWN	BLM	SCALE As Shown	
DATE		SHEET 1 OF 1	

SPECIFICATION
TABLE OF CONTENTS

Section 3000	General	Sheet 2
Section 3100	Operational Maintenance	Sheet 2
Section 3200	Seasonal Maintenance	Sheet 4
Section 3300	Final Maintenance	Sheet 5
Section 3400	Other Maintenance	Sheet 5

GENERAL - 3000

- 3001 - The Purchaser shall be required to maintain all roads listed and/or referenced in Section 41(C)(2) Special Provisions of this contract in accordance with Sections 3000, 3100, 3200, 3300, and 3400 of this exhibit.
- 3001a - The Purchaser shall be required to provide maintenance on roads in accordance with Subsections 3403 and 3404.
- 3002 - The Purchaser shall maintain the cross section of existing dirt or graveled roads to the existing geometric standards.
- 3003 - The minimum required maintenance on any roads shall include the provisions specified in Subsections 3101, 3104, and 3105.
- 3004 - The Purchaser shall be responsible for providing timely maintenance and cleanup on any road(s) with logging units substantially completed prior to moving operations to other roads. The maximum length of non-maintained or non-cleanup of the road prism, shall not exceed the sum of one (1) mile at any time. Release of maintenance requirements may be granted, upon written request, when the conditions specified in Sections 3300 and 3400 are met satisfactorily.

OPERATIONAL MAINTENANCE - 3100

- 3101 - The Purchaser shall blade and shape the road surface and shoulders with a motor patrol grader. Banks shall not be undercut. Back blading with tractors or similar equipment will be allowed only around landings and other areas when approved by the Authorized Officer.
- 3103 - The Purchaser shall maintain established berms and place additional berms using adjacent material where needed to protect fills as directed by the Authorized Officer.
- 3104 - The Purchaser shall perform other road cleanup including removal of debris, fallen timber, bank slough, and slides which can practicably be accomplished by a motor patrol grader, rubber-tired front-end bucket loader, rubber-tired backhoe or comparable equipment, and by the use of hand tools.

- 3104a - Removal of bank slough and slide material includes placement of material at the nearest suitable turnout or disposal site where material cannot erode into streams, lakes, or reservoirs or cause undue damage to road fill slopes which have been planted or mulched to control soil erosion.
- 3104b - The Purchaser shall be responsible for removal of all slides or slough, up to fifteen (15) station yards in quantity, at any one site. This work includes unlimited multiple sites on all roads required to be maintained by the Purchaser.

Prior to removal of any slough or slide material exceeding fifteen (15) station yards at any one site, the Purchaser and the Authorized Officer or their Authorized Representatives shall agree in writing, in the field, to the quantity of material, method of disposal, and the disposal site. Work may commence immediately after agreement.

Upon completion of agreed-upon work, a reduction in timber sale purchase price will be made to offset the cost of work, based on current BLM Timber Appraisal Production Cost Schedules. Adjustments in purchase price for completed work shall be made as necessary and no less than once per year when actual work is ongoing.

- 3105 - The Purchaser shall be responsible for maintaining normal flow in drainage structures. This includes cleaning out drainage ditches, catch basins, clearing pipe inverts of sediment and other debris lodged in the barrel of the pipe and maintaining water dips and waterbars using equipment specified in Subsection 3104 and other culvert cleaning and flushing equipment.
- 3106 - The Purchaser shall be responsible for repair and replacement of all materials eroded from road shoulders and fill slopes, up to fifteen (15) station yards in quantity, at any one site. The work includes unlimited multiple sites on all roads required to be maintained by the Purchaser. Prior to repair and replacement of eroded material exceeding fifteen (15) station yards at any one site, the Purchaser and the Authorized Officer or their Authorized Representatives shall agree in writing, in the field, to the quantity of material, borrow source, and method of repair. Work may commence immediately after agreement.

Upon completion of agreed-upon work, a reduction in timber sale purchase price will be made to offset the cost of the work, based upon current BLM Timber Sale Appraisal Production Cost Schedules. Adjustments in purchase price for completed work shall be made as necessary, and no less than once per year when actual work is ongoing.

- 3107 - The Purchaser shall cut or trim trees and brush which obstructs vision or prevents the safe passage of traffic along the traveled way, when directed by the Authorized Officer.

The Purchaser shall also cut trees or brush encroaching on the road prism that are a result of his activities or winter damage during the contract period. Disposal of such vegetative material shall be by scattering below the road.

- 3108 - The Purchaser shall avoid fouling gravel or bituminous surfaces through covering with earth and debris from side ditches, slides, or other sources. The Purchaser shall also avoid blading surfacing material off the running surface of the roadway.
- 3108a - The Purchaser shall perform logging operations on gravel bituminous roadways only where the locations have been marked on the ground and/or approved by the Authorized Officer. Repair of the road shall be as specified in Subsection 3401.

SEASONAL MAINTENANCE - 3200

- 3201 - The Purchaser shall perform preventive maintenance at the end of Purchaser's hauling each season and during nonhauling periods which occur between other operations on the contract area. This includes cross ditching, removing ruts or other surface irregularities, and all other requirements specified in Section 3100.
- 3202 - The Purchaser shall perform and complete maintenance, specified in Sections 3000, 3100, and 3200, on all roads maintained by him, prior to October 1 each year, except as specified in Subsection 3203, after initial commencement of construction or logging operations. Thereafter all roads shall have continuous preventive maintenance and road cleanup until suspension of seasonal operations. This includes all roads used and not used during the preceding operating seasons.
- 3203 - The Purchaser shall complete road cleanup and maintenance, as specified in Section 3100, at the completion of logging operations on any road(s) located in an area separate from the area where logging activities will resume.
- 3204 - The Purchaser shall be responsible for performing post storm inspections and maintenance during the winter season to minimize erosion and potential road or watershed damage.

FINAL MAINTENANCE - 3300

- 3301 - The Purchaser shall complete final maintenance and/or damage repairs on all roads used under terms of their contract within 30 calendar days following the completion of hauling and in accordance with Sec. 16(b) of this contract. This work shall include any maintenance and/or damage repairs specified in Sections 3000, 3100, and 3200 necessary to meet the conditions specified in Subsection 3002 and shall be executed in accordance with Subsection 3302 of this section. The Authorized Officer may grant acceptance of Purchaser's maintenance responsibility in part where certain individual roads or road segments are no longer of any use to the Purchaser's remaining removal operations, providing that all contract requirements as specified under Sec. 16(b), Special Provisions (Sections 3000, 3100, 3200, and 3300 of the maintenance specifications) have been completed and a relinquishment of cutting and removal rights on cutting units tributary to these roads is signed by the Purchaser. Request for partial acceptance must be submitted in writing by the Purchaser.
- 3302 - The Purchaser shall perform final road maintenance only when weather or soil moisture conditions are suitable for normal maintenance equipment operations as determined by the Authorized Officer.

If final maintenance is delayed after the date required in Subsection 3301 of this contract by adverse soil moisture or unsuitable equipment operating conditions, the Purchaser will be notified by the Authorized Officer when soil moisture and equipment operating conditions are suitable. The Purchaser shall then be required to complete final maintenance within 30 days.

OTHER MAINTENANCE - 3400

- 3401 - The Purchaser shall repair any damage to road surfaces that was specified under Subsection 3108a. This repair includes restoring the roadway to the designed standard and replacement of surfacing with approved surface material. This repair is not limited to use of equipment specified in Subsection 3104.
- 3402 - The Purchaser shall be permitted to remove ice and snow from roads authorized for use under this contract only when prior written approval has been secured from the Authorized Officer. The Purchaser shall submit a written request for permission to remove ice and snow in advance of the date operations are to begin.

Upon receiving written authorization for ice and snow removal, the Purchaser will perform the work according to the conditions and equipment requirements set forth in the Authorization.

- 3403 - The Purchaser shall be required to furnish and apply non-saline water during dry hauling periods, when directed by the Authorized Officer, for the purpose of laying dust and to prevent loss of surface material. The first application of water shall be made at the rate of one-half gallon per yd² of road surface traveled. Subsequent applications shall be made for each 40 MBF of timber or 120 yds² of rock hauled. Subsequent waterings may be done at a rate less than one-half gallon per yd² when a specified lesser rate is approved by the Authorized Officer.

The following roads shall be watered:

Road No.	From M.P./STA	To M.P./STA
38-3E-11.0	0.00	0.30
38-3E-11.5	0.00	0.70
38-3E-13.0	0.00	0.20
38-3E-13.1	0.00	0.69
38-3E-13.3	0.00	0.23
38-3E-25.0 A	0.00	1.02
38-3E-25.1	0.00	0.43
38-3E-25.2	0.00	0.70
38-4E-7.0 A-D	0.00	3.20
38-4E-19.0	0.00	1.20
38-4E-19.2 A-B	0.00	0.39
38-4E-19.3	0.00	0.70
39-4E-1.4	0.00	0.06
39-4E-5.1	0.00	0.10
39-4E-5.2	0.00	0.43

During drought periods when the transportation of water from the source to the roads noted above exceeds 10 miles, a reduction shall be made in the total purchase price to reflect the additional haul or the substitution of other acceptable dust palliatives in lieu of watering, based on equipment rental rates from current BLM Timber Appraisal Production Cost Schedules.

- 3403a - During dry hauling conditions when the authorized officer determines watering is not required, the Purchaser shall reduce hauling speeds to 5 MPH and/or restrict the number of loads hauled to 2 per day on the following road:

Road No.	From M.P./STA	To M.P./STA
38-3E-11.0	0.00	0.30
38-3E-11.5	0.00	0.70
38-3E-13.0	0.00	0.20
38-3E-13.1	0.00	0.69
38-3E-13.3	0.00	0.23
38-3E-25.0 A	0.00	1.02
38-3E-25.1	0.00	0.43
38-3E-25.2	0.00	0.70
38-4E-7.0 A-D	0.00	3.20
38-4E-19.0	0.00	1.20
38-4E-19.2 A-B	0.00	0.39
38-4E-19.3	0.00	0.70
39-4E-1.4	0.00	0.06
39-4E-5.1	0.00	0.10
39-4E-5.2	0.00	0.43



Adjustments to the above schedules may be made by the Authorized Officer at his option as hauling conditions improve. The Purchaser, at his option and expense, may elect to substitute watering or other dust palliatives in lieu of the above hauling requirements provided that written approval is received from the Authorized Officer. Such authorization shall include the approval of product specifications for the application and the product to be used.

- 3404 - The Purchaser may at his option and expense, substitute lignin sulfonate, magnesium chloride, or bituminous dust palliatives for water on any or all road segments listed in Subsection 3403 or 3403a provided that written approval is received from the Authorized Officer. Such authorization shall include approval of product specifications for the application of the product to be used. Multiple applications may be required to maintain the conditions specified in Subsection 3403.

SWINNING TIMBER SALE
ROAD LOCATION MAP
CONTRACT NO. TS 10-18
EXHIBIT D-2; PAGE 1 OF 1

U.S.D.I. BLM MEDFORD DISTRICT

T.38S., R.3E. WILL. MER.
T.38S., R.4E. WILL. MER.
T.39S., R.3E. WILL. MER.
T.39S., R.4E. WILL. MER.

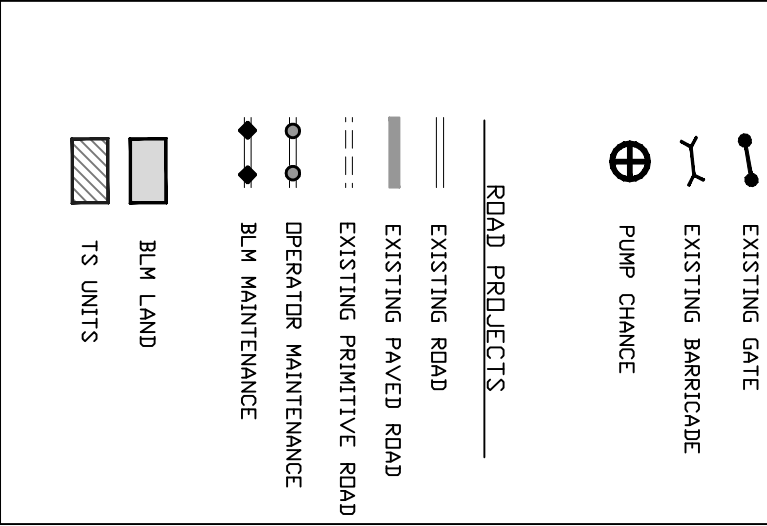


R.3E.

R.4E.

T.39S.

T.38S.

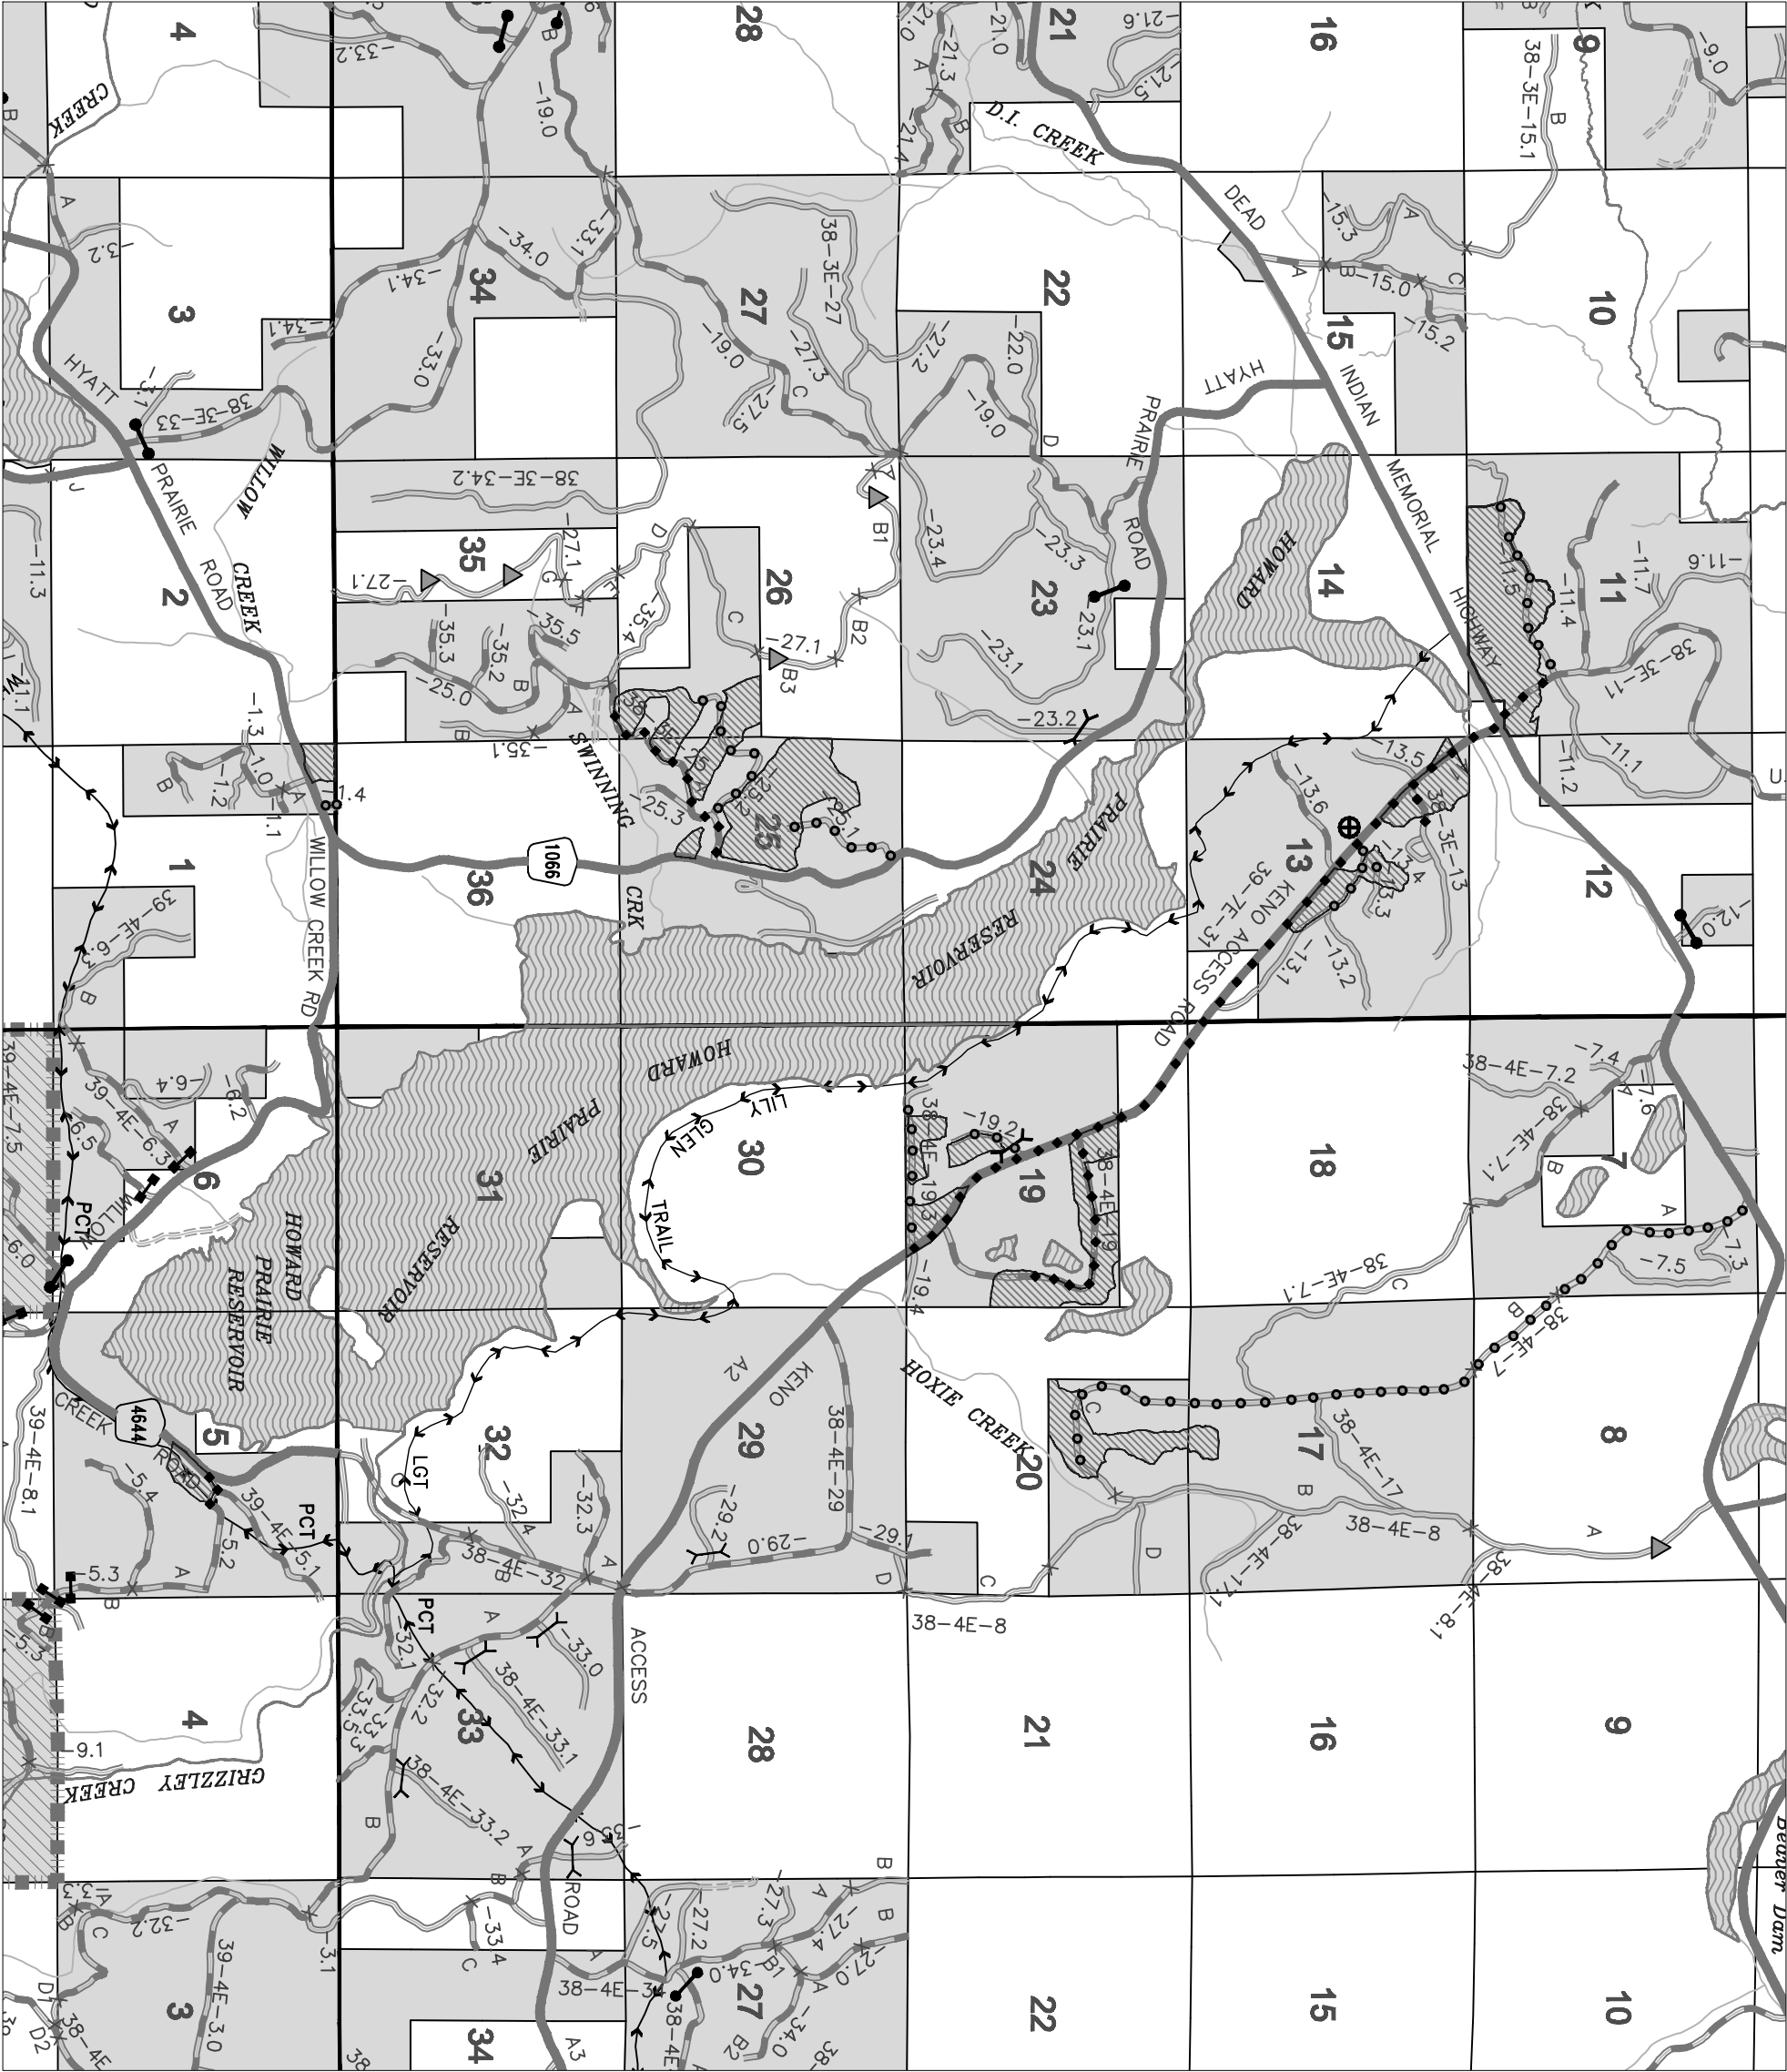

Tract No : 10-18
 Sale Name: Swinning
 Prep. By : JoshR
 Sale Date: Sept 16, 2010

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

ROAD MAINTENANCE AND ROAD USE APPRAISAL WORK SHEET

Summary of Costs

1. Road Use - Amortization: (1) \$0.00/3046 MBF = \$0.00/MBF 1/
 (RC-3 & RC-3a) (Tot Sale Vol)

2. Road Maintenance Obligation:

<u>\$1409.97</u>	+	<u>\$0.00</u>	+	<u>\$0.00</u>	+	<u>\$0.00</u>	=	<u>\$1409.97</u>
(2.1)		(3.1)		(4.1)		(5.1)		(RC-2c)

3. Rockwear Obligation:

<u>\$0.00</u>	+	<u>\$0.00</u>	+	<u>\$0.00</u>	+	<u>\$0.00</u>	=	<u>\$0.00</u>
(4.2)		(5.2)		(7.1)		(7.2)		(RC-2g)

4. Other Maintenance Payments:

Total (6)	=	<u>\$0.00</u>
		(RC-3a)

5. Purchaser Maintenance Allowances:

(7.3A) Move In	\$840.75
(7.3B) Culverts, Catch Basins, Downspouts	\$1544.14
(7.3C) Grading, Ditching	\$2426.69
(7.3D) Slide Removal and Slump Repair	\$0.00
(7.3E) Dust Palliative (Water)	\$6207.68
(7.3F) Surface Repair (Aggregate)	\$0.00
(7.3G) Dust Palliative (Bituminous, Lignin, MgCl) . . .	\$0.00
(7.3H) Other	\$0.00

Total (7.3)	=	<u>\$11019.26</u>
		(RC-2a & Ex D)

(2+3+4+5) Total = \$12,429.23/3046 MBF = \$4.08/MBF 1/
 (Total Sale Vol)

Costs are estimates only and do not include Profit and Risk.
 1/ Enter on Timber Sale Summary Form OSO 5420-1.

1. Road Use Fees - Amortization

R/W		Rd Use	Vol	Road Use
Number	Road Number	Fee x	MBF	= Obligation

(1) Subtotal

2. BLM Maintenance - Timber Haul 1/ 2/ 3/ 4/ 5/

Road Number and Segment	A Surf N Type	Maint Mi	Vol x Fee x	MBF	Total = Maint
38-3E-11.00	A PRR	0.08	1.12	85	\$7.62
38-3E-11.00	A PRR	0.26	1.12	852	\$248.10
38-3E-13.00	A PRR	0.14	1.12	255	\$39.98
38-3E-25.00	A ASC	0.60	1.12	88	\$59.14
38-3E-25.00	A ASC	0.23	1.12	26	\$6.70
38-3E-25.00	A ASC	0.23	1.12	88	\$22.67
38-3E-25.00	A ASC	0.23	1.12	87	\$22.41
38-3E-25.00	A ASC	0.18	1.12	173	\$34.88
38-4E-19.00	A PRR	0.09	1.12	98	\$9.88
38-4E-19.00	A PRR	0.32	1.12	137	\$49.10
38-4E-19.00	A PRR	0.72	1.12	157	\$126.60
39-4E-5.01	A ASC	0.08	1.12	49	\$4.39
39-4E-5.02	A ASC	0.07	1.12	49	\$3.84
39-7E-31.00	A BST1	2.86	0.46	192	\$252.60
39-7E-31.00	A BST1	2.33	0.46	50	\$53.59
39-7E-31.00	A BST1	2.13	0.46	392	\$384.08
39-7E-31.00	A BST1	0.67	0.46	133	\$40.99
39-7E-31.00	A BST1	0.37	0.46	255	\$43.40

(2.1) Subtotal \$1409.97

1/ Enter list of roads in Sec. 41(RC-2).
2/ Rockwear is included in fee as a maintenance cost for BLM maintained roads.
3/ Include lump sum logging damage repair (see Ex. D, Subsection 3108a Option F & 3401a).

3. BLM Maintenance - Rock Haul 1/ 2/ 3/

Road Number and Segment	A Surf N Type	Maint Mi	Vol x Fee x	C.Y.	Total = Maint
----------------------------	------------------	-------------	----------------	------	------------------

(3.1) Subtotal

1/ Enter list of roads in Section 41(RC-2).
2/ Rockwear is included in fee as a maintenance cost for BLM maintained roads.
3/ Include lump sum logging damage repair (See Ex. D, Subsection 3108a Option F & 3401a).

4. Third Party Maintenance and Rockwear - Timber Haul 1/

MAINTENANCE (4.1)					ROCKWEAR (4.2) 2/ 3/		
Road Number and Segment	A	Maint Mi	Vol x Fee x	Total MBF = Maint	Rkwear Vol	Total	
	N				Mi	x Fee x	MBF = Rkwear

(4.1) Subtotal

(4.2) Subtotal

1/ Enter list of roads in Sec. 41(RC-2).
2/ Rockwear is included in fee as a maintenance cost for BLM maintained roads.
3/ Include lump sum logging damage repair (see Ex. D, Subsection 3108a Option F & 3401a).

5. Third Party Maintenance and Rockwear - Rock Haul 1/

MAINTENANCE (5.1)					ROCKWEAR (5.2) 2/ 3/		
Road Number	A	Maint	Vol	Total	Rkwear Vol	Total	

(5.1) Subtotal (5.2) Subtotal

- 1/ Enter list of roads in Sec. 41(RC-2).
 2/ Rockwear is included in fee as a maintenance cost for BLM maintained roads.
 3/ Include lump sum logging damage repair (see Ex. D, Subsection 3108a Option F & 3401a).

6. Other Maintenance Payments - USFS or Others Perform Maintenance

Agreement	Fee	Fee	Vol	Maint
Number	Road Number	MBF/Mi x Mi =	/MBF x Hauled =	Cost

(6) Subtotal

7. Purchaser Maintenance - Rock Wear

TIMBER HAUL (7.1) ROCK HAUL (7.2) 2/ 3/

Road No	1/	A	RkWear	Vol	Total	RkWear	Vol	Total
and Segment	N	Mi	x Fee x	MBF =	RkWear	Mi	x Fee x	C.Y.= RkWear
38-3E-11.05	A	0.10	0.00	262	\$0.00	0.00	0.00	0 \$0.00
38-3E-11.05	A	0.27	0.00	328	\$0.00	0.00	0.00	0 \$0.00
38-3E-11.05	A	0.68	0.00	262	\$0.00	0.00	0.00	0 \$0.00
38-3E-13.01	A	0.24	0.00	67	\$0.00	0.00	0.00	0 \$0.00
38-3E-13.03	A	0.08	0.00	66	\$0.00	0.00	0.00	0 \$0.00
38-3E-25.01	N	0.42	0.00	331	\$0.00	0.00	0.00	0 \$0.00
38-3E-25.02	A	0.43	0.00	86	\$0.00	0.00	0.00	0 \$0.00
38-4E-7.00	A	2.85	0.00	271	\$0.00	0.00	0.00	0 \$0.00
38-4E-19.02	N	0.13	0.00	50	\$0.00	0.00	0.00	0 \$0.00
38-4E-19.03	A	0.39	0.00	50	\$0.00	0.00	0.00	0 \$0.00
38-4E-19.03	A	0.16	0.00	103	\$0.00	0.00	0.00	0 \$0.00
39-4E-1.04	A	0.06	0.00	61	\$0.00	0.00	0.00	0 \$0.00

(7.1) Subtotal \$0.00 (7.2) Subtotal \$0.00

- 1/ List all purchaser maintained roads and enter list in Section 41(RC-2a). Don't repeat any BLM maintained roads listed on appraisal. List may include new const. roads without fees.
 2/ All surfaced roads have a rockwear fee, except no rockwear fee is charged for rock haul on roads surfaced or resurfaced under this timber sale.
 3/ Include lump sum logging damage repair (See Ex. D, Subsection 3108a Option F & 3401a).

7. Purchaser Operational Maintenance

Cost allowances must be limited to work required under timber sale Exhibit D.
 If purchaser maint. such as dust control/damage repair is performed on BLM maint. roads, add appropriate mandatory Ex. D provisions, RC-2a and RC-2h stips. Note in prospectus.

7.3A Move In

Equipment 1/	No	Move	Cost/	Dist	Sub-
	Units	x in x	50 Mi x	Factor =	total
Motor Grader:	1	1	\$335.00	0.59	\$197.65
Back Hoe:	1	1	\$335.00	0.59	\$197.65
Loader:	1	1	\$335.00	0.59	\$197.65
Water Truck:	1	1	\$206.00	0.59	\$121.54
Dump Truck 2/:	1	1	\$214.00	0.59	\$126.26

(7.3A) Total \$840.75

- 1/ Equipment limited to that allowed in Exhibit D. Refer to Sch. 20 Table 2.
 2/ Dump truck is allowable for surface repair only.

7.3B Culvert Maintenance - Including Catchbasins and Downpipes 1/

Miles	x	Cost/Mi	=	Subtotal
5.28		292.45		\$1544.14

(7.3B) Total \$1544.14

1/ Does not include purchase or installation of culvert pipe. Refer to Sch. 20 Table 32.

7.3C Grading (Includes Ditches and Shoulders) 1/

	Miles	x	Cost/Mi	x	Freq	=	Subtotal
Blade Road:	5.28		459.60		1		\$2426.69
Blade Ditch:	0.00		153.20		0		\$0.00

(7.3C) Total \$2426.69

1/ Watch for double allowance on roadway preparation for dust palliative application.

7.3D Slide and Slough removal, Slump Repair (15 sta-yds. ea.) 1/

Type	No Slides	Hours	Equip				
Equipment	/Slumps	x	Each x	Cost	=	Subtotal	
Grader:	0		0	119.90		\$0.00	
Loader:	0		0	84.43		\$0.00	
Backhoe:	0		0	62.55		\$0.00	

(7.3D) Total \$0.00

1/ Maximum haul is 15 sta. yds. Use grader or front end loader only. Dump truck not allowed in specifications. Refer to Sch. 20 Table 28.

7.3E Dust Palliative (Water) 1/

Spreading Hours

Miles	/	MPH	=	Hours	x	No	x	Freq	=	Truck
						Days		/Day		Hours
7.15		5		1.4		11		1		15.4
Load & Haul-Roundtrip	=			0.0		0		0		0.0
Load & Haul-Roundtrip	=			1.0		60		1		60.0
Fixed Hours (3000 Gal. tanker)										
Total Hours =										75.4

Truck Cost: \$82.33/Hr. x 75.4 Hours = \$6207.68

(7.3E) Total \$6207.68

1/ Allow water for all BLM maint. non-oiled roads. Subsection 3403 requires 0.50 gal/syd.

7.3F Surface Repair (Aggregate)

Production Cost: 1/	0 C.Y. x \$0.00/C.Y.	=	\$0.00
Haul to Stockpile:	0 C.Y. x \$2.18/C.Y. x 0.00 Mi	=	\$0.00
Stockpile:	0 C.Y. x \$1.18/C.Y.	=	\$0.00
Load from Stockpile:	0 C.Y. x \$1.30/C.Y.	=	\$0.00
Haul from Stockpile:	0 C.Y. x \$2.18/C.Y. x 0.00 Mi	=	\$0.00
Process with Grader:	0 C.Y. x \$1.00/C.Y.	=	\$0.00

(7.3F) Total \$0.00

1/ Use unit cost from Road Construction Cost Guide.

7.3G Dust Palliative (Bituminous, Lignin, Magnesium Chloride)

(7.3G) Total

7.3H Other

Fallen Timber Cutting: 1/ 0.0 Hours x \$0.00/Hour = \$0.00

Brush Cutting/Tree Trimming: 2/ 0.0 Hours x \$0.00/Hour = \$0.00

Oil/Asphalt Materials: 3/ Lump Sum = \$0.00

Signing for Dust Palliatives: 4/ Lump Sum = \$0.00

Misc. L.S. = \$0.00

(7.3H) Total \$0.00

1/ Exhibit D Subsection 3104.

2/ Exhibit D Subsection 3107.

3/ Exhibit D Subsection 3401a.

4/ Exhibit D Subsection 3405b.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Summary of All Roads and Projects

T.S. Update 04/15/10

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Prepared by: JoshR Ph: 618-2258 Print Date: 7/26/2010 2:44:38 PM

Construction: 0.00 sta (Surfaced 0.00 sta Natural 0.00 sta)

Improve: 0.00 sta Renov: 276.13 sta Decom: 0.00 sta Temp: 5.28 sta

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing: 0.0 sta Grubbing: 0.0 acres	
Slash Treatment: 0.0 acres	
300 Excavation:	\$0.00
Haul: 0 sta-yds	
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$2,195.40
Blading 2.68 mi	
Surfacing:	\$14,840.06
Quarry Name: BLM Quarry 850 cy	
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$3,066.33
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 4.4 acres	\$1,186.16
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$2,146.60
Mobilization: Const. \$2,407.04 Surf. \$0.00.....	\$2,407.04
Quarry Development:	\$0.00

Total: 3,046 mbf @ \$8.48/mbf = \$25,841.58

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities are COMPACTED in place cubic yards.

File D:\JRobeson\2010\TSales\Swinning\Swinning Road Cost.mdb

ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Road Number: 38-3E-11.05 Road Name: SHELL PEAK C SP

Road Renovation: 0.68 mi 14 ft Subgrade ft ditch

T.S. Update 04/15/10

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing:0.0 sta Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation:	\$0.00
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$312.53
Blading 0.68 mi	
Surfacing:	\$0.00
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$0.00
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 0.0 acres	\$0.00
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$0.00
Mobilization: Const. \$32.10 Surf. \$0.00.....	\$32.10
Quarry Development:	\$0.00
Total:	\$344.63

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

Road Construction Worksheet

Road Number: 38-3E-11.05 Road Name: SHELL PEAK C SP

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Blading: \$459.60/mi x 0.68 mi = \$312.53

Subtotal: \$312.53

Surfacing:

Subtotal: \$0.00

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Subtotal: \$0.00

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Subtotal: \$0.00

Section 2200 Surface Treatment:

Subtotal: \$0.00

Section 2300 Engineering:

Subtotal: \$0.00

Section 2400 Minor Concrete:

Subtotal: \$0.00

Section 2500 Gabions:

Subtotal: \$0.00

Section 8000 Miscellaneous:

Subtotal: \$0.00

Mobilization:

Construction - 1.33% of total Costs = \$32.10

Surfacing - 0.00% by rock volume = \$0.00

Subtotal: \$32.10

Quarry Development:

Based on 0.00% of total rock volume

Subtotal: \$0.00

Total: \$344.63

ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Road Number: 38-3E-25.01 Road Name: WILLOW CR SP

Road Renovation: 0.43 mi 14 ft Subgrade ft ditch

T.S. Update 04/15/10

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing:0.0 sta Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation:	\$0.00
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$197.63
Blading 0.43 mi	
Surfacing:	\$0.00
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$0.00
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 0.4 acres	\$93.64
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$0.00
Mobilization: Const. \$29.92 Surf. \$0.00.....	\$29.92
Quarry Development:	\$0.00
Total:	\$321.19

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

Road Construction Worksheet

Road Number: 38-3E-25.01 Road Name: WILLOW CR SP

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Blading: $\$459.60/\text{mi} \times 0.43 \text{ mi} = \197.63

Subtotal: \$197.63

Surfacing:

Subtotal: \$0.00

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Subtotal: \$0.00

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Brushing width Left: 4ft. Right: 4ft.

RoadSide Brushing Light: $\$234.11/\text{acre} \times 0.40 \text{ acres} = \93.64

Subtotal: \$93.64

Section 2200 Surface Treatment:

Subtotal: \$0.00

Section 2300 Engineering:

Subtotal: \$0.00

Section 2400 Minor Concrete:

Subtotal: \$0.00

Section 2500 Gabions:

Subtotal: \$0.00

Section 8000 Miscellaneous:

Subtotal: \$0.00

Mobilization:

Construction - 1.24% of total Costs = \$29.92

Surfacing - 0.00% by rock volume = \$0.00

Subtotal: \$29.92

Quarry Development:

Based on 0.00% of total rock volume

Subtotal: \$0.00

Total: \$321.19

ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Road Number: 38-4E-19.02 Road Name: HOXIE CRK SP

Road Renovation: 0.39 mi 14 ft Subgrade ft ditch

T.S. Update 04/15/10

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing:0.0 sta Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation:	\$0.00
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$179.24
Blading 0.39 mi	
Surfacing:	\$0.00
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$332.78
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 0.4 acres	\$249.72
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$2,146.60
Mobilization: Const. \$298.73 Surf. \$0.00.....	\$298.73
Quarry Development:	\$0.00
Total:	\$3,207.07

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

Road Construction Worksheet

Road Number: 38-4E-19.02 Road Name: HOXIE CRK SP

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Blading: \$459.60/mi x 0.39 mi = \$179.24

Subtotal: \$179.24

Surfacing:

Subtotal: \$0.00

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Seed and Mulch

Native Grass Seed 0.7 Acre x \$140.00/Acre = \$98.00

Native Grass Straw 0.7 Acre x \$125.00/Acre = \$87.50

Labor 0.7 Acre x \$210.40/Acre = \$147.28

Subtotal: \$332.78

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Brushing width Left: 4ft. Right: 4ft.

RoadSide Brushing Heavy: \$624.29/acre x 0.40 acres = \$249.72

Subtotal: \$249.72

Section 2200 Surface Treatment:

Subtotal: \$0.00

Section 2300 Engineering:

Subtotal: \$0.00

Section 2400 Minor Concrete:

Subtotal: \$0.00

Section 2500 Gabions:

Subtotal: \$0.00

Section 8000 Miscellaneous:

Earth Berm Barricades

Install Barricades 2 EA x \$300.00/EA = \$600.00

Road Decomission

Tractor: D7 with rippers 10 hr x \$154.66/hr = \$1,546.60

Subtotal: \$2,146.60

Mobilization:

Construction - 12.41% of total Costs = \$298.73

Road Number: 38-4E-19.02 HOXIE CRK SP Continued

Surfacing - 0.00% by rock volume = \$0.00

Subtotal: \$298.73

Quarry Development:

Based on 0.00% of total rock volume

Subtotal: \$0.00

Total: \$3,207.07

ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Road Number: 38-4E-19.03 Road Name: HOXIE CRK SP

Road Renovation: 0.53 mi 14 ft Subgrade ft ditch

T.S. Update 04/15/10

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing:0.0 sta Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation:	\$0.00
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$243.59
Blading 0.53 mi	
Surfacing:	\$585.22
Quarry Name: BLM Quarry 50 cy	
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$0.00
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 0.5 acres	\$117.06
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$0.00
Mobilization: Const. \$97.15 Surf. \$0.00.....	\$97.15
Quarry Development:	\$0.00
Total:	\$1,043.01

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

Road Construction Worksheet

Road Number: 38-4E-19.03 Road Name: HOXIE CRK SP

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Blading: \$459.60/mi x 0.53 mi = \$243.59

Subtotal: \$243.59

Sharon Lakes Quarry Name: BLM Quarry

<u>Length</u>	<u>TopW</u>	<u>BotW</u>	<u>Depth</u>	<u>CWid</u>	<u>#TOs</u>	<u>Width</u>	<u>F.W.L</u>	<u>Taper</u>	<u>Other</u> 50cy
---------------	-------------	-------------	--------------	-------------	-------------	--------------	--------------	--------------	----------------------

Rock Volume = 50cy

Ripping: 100% x \$3.65/cy x 50cy = \$182.50

Processing: \$1.23/cy x 50cy = \$61.50

Compaction: \$1.00/cy x 50cy = \$50.00

Basic Rock Haul cost: \$0.87/cy x 50cy = \$43.50

Rock Haul -15% grades: \$1.31/cy-mi x 50cy x 0.51 mi= \$33.41

Rock Haul St& Co Roads: \$0.58/cy-mi x 50cy x 7.39 mi= \$214.31

Subtotal: \$585.22

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Subtotal: \$0.00

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Brushing width Left: 4ft. Right: 4ft.

RoadSide Brushing Light: \$234.11/acre x 0.50 acres = \$117.06

Subtotal: \$117.06

Section 2200 Surface Treatment:

Subtotal: \$0.00

Section 2300 Engineering:

Subtotal: \$0.00

Section 2400 Minor Concrete:

Subtotal: \$0.00

Section 2500 Gabions:

Subtotal: \$0.00

Section 8000 Miscellaneous:

Subtotal: \$0.00

Road Number: 38-4E-19.03 HOXIE CRK SP Continued

Mobilization:

Construction - 4.04% of total Costs = \$97.15

Surfacing - 5.88% by rock volume = \$0.00

Subtotal: \$97.15

Quarry Development:

Based on 5.88% of total rock volume

Subtotal: \$0.00

Total: \$1,043.01

ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Road Number: 38-4E-7.0 Road Name: 38-4E-7.0

Road Renovation: 3.20 mi 15 ft Subgrade 2 ft ditch

T.S. Update 04/15/10

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing:0.0 sta Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation:	\$0.00
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$1,262.42
Blading 0.65 mi	
Surfacing:	\$14,254.84
Quarry Name: BLM Quarry 800 cy	
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$0.00
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 3.1 acres	\$725.74
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$0.00
Mobilization: Const. \$1,668.37 Surf. \$0.00.....	\$1,668.37
Quarry Development:	\$0.00

Total: \$17,911.37

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

Road Construction Worksheet

Road Number: 38-4E-7.0 Road Name: 38-4E-7.0

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Blading: $\$459.60/\text{mi} \times 0.65 \text{ mi} = \298.74

Clean Culverts: $\$292.45/\text{mi} \times 1.50 \text{ mi} = \438.68

Plateau Thin TS

Clean CMP Inlets & Outlets (7)

$7 \text{ EA} \times \$75.00/\text{EA} = \525.00

Subtotal: \$1,262.42

Sharon Lakes Quarry Name: BLM Quarry

<u>Length</u>	<u>TopW</u>	<u>BotW</u>	<u>Depth</u>	<u>CWid</u>	<u>#TOs</u>	<u>Width</u>	<u>F.W.L</u>	<u>Taper</u>	<u>Other</u>
									800cy

Rock Volume = 800cy

Ripping: $100\% \times \$3.65/\text{cy} \times 800\text{cy} = \$2,920.00$

Processing: $\$1.23/\text{cy} \times 800\text{cy} = \984.00

Compaction: $\$1.00/\text{cy} \times 800\text{cy} = \800.00

Basic Rock Haul cost: $\$0.87/\text{cy} \times 800\text{cy} = \696.00

Rock Haul -15% grades: $\$1.31/\text{cy-mi} \times 800\text{cy} \times 0.51 \text{ mi} = \534.48

Rock Haul St& Co Roads: $\$0.58/\text{cy-mi} \times 800\text{cy} \times 7.39 \text{ mi} = \$3,428.96$

Swinning TS

FE Loader 950B (3cy) 20 hr $\times \$84.43/\text{hr} = \$1,688.60$

Dump truck 10 cy 20 hr $\times \$85.77/\text{hr} = \$1,715.40$

Water truck 2000 gal 20 hr $\times \$74.37/\text{hr} = \$1,487.40$

Subtotal: \$14,254.84

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Subtotal: \$0.00

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Brushing width Left: 4ft. Right: 4ft.

RoadSide Brushing Light: $\$234.11/\text{acre} \times 3.10 \text{ acres} = \725.74

Subtotal: \$725.74

Section 2200 Surface Treatment:

Subtotal: \$0.00

Section 2300 Engineering:

Subtotal: \$0.00

Section 2400 Minor Concrete:

Road Number: 38-4E-7.0 38-4E-7.0 Continued

Subtotal: \$0.00

Section 2500 Gabions:

Subtotal: \$0.00

Section 8000 Miscellaneous:

Subtotal: \$0.00

Mobilization:

Construction - 69.31% of total Costs = \$1,668.37

Surfacing - 94.12% by rock volume = \$0.00

Subtotal: \$1,668.37

Quarry Development:

Based on 94.12% of total rock volume

Subtotal: \$0.00

Total: \$17,911.37

ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Swinning TS Sale Date: 9/16/2010

Road Number: Landings Road Name: Landings

Temporary Road: 0.10 mi 50 ft Subgrade ft ditch

T.S. Update 04/15/10

200 Clearing and Grubbing: 0.0 acres	\$0.00
Clearing:0.0 sta Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation:	\$0.00
400 Drainage:	\$0.00
Culvert: 0 lf wt = 0 lbs factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation:	\$0.00
Surfacing:	\$0.00
1300 Geotextiles:	\$0.00
1400 Slope Protection:	\$0.00
1800 Soil Stabilization: 0.0 acres	\$2,733.55
1900 Cattleguards:	\$0.00
2100 RoadSide Brushing: 0.0 acres	\$0.00
2200 Surface Treatment: 0.0 tons	\$0.00
2300 Engineering: 0.00 sta.	\$0.00
2400 Minor Concrete:	\$0.00
2500 Gabions:	\$0.00
8000 Miscellaneous:	\$0.00
Mobilization: Const. \$280.77 Surf. \$0.00.....	\$280.77
Quarry Development:	\$0.00
Total:	\$3,014.32

Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

Road Construction Worksheet

Road Number: Landings Road Name: Landings

Section 200 Clearing and Grubbing:

Dan

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Subtotal: \$0.00

Surfacing:

Subtotal: \$0.00

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Seed and Mulch Landings

Native Grass Seed 5.75 Acre x \$140.00/Acre = \$805.00

Native Grass Straw 5.75 Acre x \$125.00/Acre = \$718.75

Labor 5.75 Acre x \$210.40/Acre = \$1,209.80

Subtotal: \$2,733.55

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Subtotal: \$0.00

Section 2200 Surface Treatment:

Subtotal: \$0.00

Section 2300 Engineering:

Subtotal: \$0.00

Section 2400 Minor Concrete:

Subtotal: \$0.00

Section 2500 Gabions:

Subtotal: \$0.00

Section 8000 Miscellaneous:

Subtotal: \$0.00

Mobilization:

Construction - 11.66% of total Costs = \$280.77

Surfacing - 0.00% by rock volume = \$0.00

Subtotal: \$280.77

Quarry Development:

Based on 0.00% of total rock volume

Subtotal: \$0.00

Road Number: Landings Landings Continued

Total: \$3,014.32

OPERATIONS

CREW REPRESENTATIVE (CREP)

<u>REQUIRED TRAINING</u>	None
<u>ADDITIONAL TRAINING WHICH SUPPORTS DEVELOPMENT OF KNOWLEDGE AND SKILLS</u>	No additional
<u>PREREQUISITE EXPERIENCE</u>	Satisfactory performance as a Single Resource Boss Crew + Satisfactory position performance as a Crew Representative
<u>PHYSICAL FITNESS</u>	Arduous
<u>OTHER POSITION ASSIGNMENTS THAT WILL MAINTAIN CURRENCY</u>	Single Resource Boss Crew

CREW BOSS (SINGLE RESOURCE) (CRWB)

<u>REQUIRED TRAINING</u>	Crew Boss (S-230) Intermediate Wildland Fire Behavior (S-290)
<u>ADDITIONAL TRAINING WHICH SUPPORTS DEVELOPMENT OF KNOWLEDGE AND SKILLS</u>	Basic ICS (I-200) Ignition Operations (S-234) Interagency Incident Business Management (S-260) Basic Air Operations (S-270)
<u>PREREQUISITE EXPERIENCE</u>	Satisfactory performance as an Advanced Firefighter/Squad Boss + Satisfactory position performance as a Single Resource Boss Crew on a wildland or prescribed fire incident
<u>PHYSICAL FITNESS</u>	Arduous
<u>OTHER POSITION ASSIGNMENTS THAT WILL MAINTAIN CURRENCY</u>	Single Resource Boss (Dozer, Engine, Felling, Firing, Tractor/Plow) Incident Commander Type 4

OPERATIONS

FIRING BOSS (SINGLE RESOURCE) (FIRB)

REQUIRED TRAINING

Crew Boss (S-230)
Intermediate Wildland Fire Behavior (S-290)

**ADDITIONAL TRAINING WHICH
SUPPORTS DEVELOPMENT OF
KNOWLEDGE AND SKILLS**

Basic ICS (I-200)
Ignition Operations (S-234)
Interagency Incident Business Management
(S-260)
Basic Air Operations (S-270)

PREREQUISITE EXPERIENCE

Satisfactory performance as an Advanced
Firefighter/Squad Boss
+
Satisfactory position performance as a
Single Resource Boss Firing on a wildland
or prescribed fire incident

PHYSICAL FITNESS

Arduous

**OTHER POSITION ASSIGNMENTS THAT
WILL MAINTAIN CURRENCY**

Single Resource Boss (Crew, Dozer,
Engine, Felling, Tractor/Plow)

ENGINE BOSS (SINGLE RESOURCE) (ENGB)

REQUIRED TRAINING

Crew Boss (S-230)
Intermediate Wildland Fire Behavior (S-290)

**ADDITIONAL TRAINING WHICH
SUPPORTS DEVELOPMENT OF
KNOWLEDGE AND SKILLS**

Basic ICS (I-200)
Engine Boss (S-231)
Ignition Operations (S-234)
Interagency Incident Business Management
(S-260)
Basic Air Operations (S-270)

PREREQUISITE EXPERIENCE

Satisfactory performance as an Advanced
Firefighter/Squad Boss
+
Satisfactory position performance as a
Single Resource Boss Engine on a wildland
or prescribed fire incident

PHYSICAL FITNESS

Arduous

**OTHER POSITION ASSIGNMENTS THAT
WILL MAINTAIN CURRENCY**

Single Resource Boss (Crew, Dozer,
Felling, Firing, Tractor/Plow)
Incident Commander Type 4

OPERATIONS

ADVANCED FIREFIGHTER/SQUAD BOSS (FFT1)

REQUIRED TRAINING

Advanced Firefighter Training (S-131)

**ADDITIONAL TRAINING WHICH
SUPPORTS DEVELOPMENT OF
KNOWLEDGE AND SKILLS**Supervisory Concepts and Techniques (S-281)
Portable Pumps and Water Use (S-211)
Wildfire Power Saws (S-212)**PREREQUISITE EXPERIENCE**Satisfactory performance as a Firefighter
Type 2

+

Satisfactory position performance as an
Advanced Firefighter/Squad Boss on a wildland
fire incident**PHYSICAL FITNESS**

Arduous

**OTHER POSITION ASSIGNMENTS THAT
WILL MAINTAIN CURRENCY**

Incident Commander Type 5

FIREFIGHTER (FFT2)

REQUIRED TRAININGFirefighter Training (S-130)
Introduction to Wildland Fire Behavior (S-190)**ADDITIONAL TRAINING WHICH
SUPPORTS DEVELOPMENT OF
KNOWLEDGE AND SKILLS**

Introduction to ICS (I-100)

PREREQUISITE EXPERIENCE

None

PHYSICAL FITNESS


Arduous

**OTHER POSITION ASSIGNMENTS THAT
WILL MAINTAIN CURRENCY**

None




LOG BARRICADE



1. LOG BARRICADE SHALL BE CONSTRUCTED AS SHOWN ABOVE.
2. EXACT LOCATION WILL BE FLAGGED BY THE AUTHORIZED OFFICER PRIOR TO CONSTRUCTION.
3. ALL BARRICADES SHALL BE SKEWED 30 DEGREES
4. THE LENGTH SHALL BE SUFFICIENT TO EXTEND FROM THE CUT BANK TO THE FILL SLOPE.
5. THE MINIMUM SMALL END DIAMETER OF THE LOG BARRICADE SHALL BE 24".




WATER BAR



1. WATER BARS SHALL BE CONSTRUCTED AS SHOWN ABOVE.
2. EXACT LOCATION WILL BE FLAGGED BY THE AUTHORIZED OFFICER PRIOR TO CONSTRUCTION.
3. ALL WATER BARS SHALL BE SKEWED 30 DEGREES
4. UPON COMPLETION OF SKIDDING LOGS, FOR THE LOGGING SEASON, EACH SKID ROAD WILL HAVE CROSS DRAINAGE CONSTRUCTED AS SHOWN ABOVE.
5. PRIOR TO BLOCKING, EACH ROAD WILL HAVE CROSS DRAINAGE CONSTRUCTED AS SHOWN ABOVE.

SKEW DIAGRAM



WATER BAR SPACING *

ROAD GRADE	LOAM OR CLAY LOAM	DECOMPOSED LOAM	GRANITE
%	FEET	FEET	FEET
4-6	400	300	
7-9	300**	200**	
10-14	200	150	
15-20	150	90	
21-40	90	50	
41-60	50	25	

* DISTANCES ARE MAXIMUM.
** ON GRADES IN EXCESS OF 10% CONSTRUCT WATER BARS.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
MEDFORD DISTRICT — MEDFORD, OREGON

DRAINAGE & EROSION
CONTROL INSTALLATION

DESIGNED _____
REVIEWED _____
APPROVED _____
DRAWN DCM SCALE NONE
DATE October 2009 SHEET 1 OF 1
DRAWING NO. OR-11-9113.4-8

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NOTICE OF REQUIREMENT FOR CERTIFICATION
OF NONSEGREGATED FACILITIES

Bidders and offerors are cautioned as follows: by signing this bid or offer or entering into this contract or lease, as the case may be, the bidder, offeror, or contractor will be deemed to have signed and agreed to the provisions of the Certification of Non-segregated Facilities in this solicitation. The certification provides that the bidder or offeror does not maintain or provide for his employees facilities which are segregated on a basis of race, color, religion, sex, or national origin, whether such facilities are segregated by directive or on a de facto basis. The certification also provides that he will not maintain such segregated facilities. Failure of a bidder or offeror to agree to the Certification of Nonsegregated Facilities will render his bid or offer nonresponsive to the terms of solicitations involving awards of contract exceeding \$10,000 which are not exempt from the provisions of the Equal Opportunity clause.

In accordance with 41 CFR 60, as amended May 19, 1967, and Executive Order No. 11246 of September 24, 1965, as amended, this notification will be included in all notices of invitations for bid, lease, offers, and requests for proposal where prospective nonexempt contracts may exceed \$10,000.

INSTRUCTIONS TO BIDDERS

1. **AUTHORITY** – Timber located on the revested Oregon and California Railroad Grant Lands and on the reconveyed Coos Bay Wagon Road Grant Lands is administered and sold pursuant to authority of the Act of August 28, 1937 (50 Stat. 874; 43 U.S.C. 1181a); timber located on other lands and other vegetative resources on all public lands of the United States under jurisdiction of the Bureau of Land Management are administered and sold pursuant to authority of the Act of July 31, 1947 (61 Stat. 681), as amended, by the Act of July 23, 1955 (69 Stat. 367; 30 U.S.C. 601 et. seq.). Regulations of the Secretary of the Interior governing sale of timber are codified in 43 CFR Group 5400.

2. **QUALIFICATIONS OF BIDDERS** – A bidder for sale of timber/vegetative resources must be either (a) a citizen of the United States, (b) a partnership composed wholly of such citizens, (c) an unincorporated association composed wholly of such citizens, or (d) a corporation authorized to transact business in the State in which the timber/vegetative resource is located.

3. **INSPECTION OF TIMBER/VEGETATIVE RESOURCES** – Bidder is invited, urged, and cautioned to inspect the timber/vegetative resource prior to submitting a bid. By executing the timber/vegetative resource sale contract, bidder warrants that the contract is accepted on the basis of his examination and inspection of the timber/vegetative resource and his opinion of its value.

4. **DISCLAIMER OF WARRANTY** – Government expressly disclaims any warranty of the fitness of the designated timber/vegetative resource for any purpose of the bidder; all timber/vegetative resources are to be sold “As Is” without any warranty of merchantability by Government. Any warranty as to the quantity or quality of timber/vegetative resource to be sold is expressly disclaimed by Government.

5. **BIDS** – Sealed or written bids for not less than the advertised appraised price, per timber/vegetative resource must be submitted in duplicate to the District Manager who issued *Timber/Vegetative Resource Sale Notice*.

(a) **Sealed Bid Sales** – Bids will be received until time for opening which is set out in the Notice. Enclose both copies of bid with required bid deposit in a sealed envelope marked on the outside *Bid for Timber/Vegetative Resource*, time bid is to be opened, tract number, and legal description of land on which timber/vegetative resource is located. In event of a tie, the high bidder shall be determined by lot from among those who submitted the tie bids.

(b) **Auction Sales** – Submission of the required bid deposit and a written bid is required to qualify for oral bidding. Oral bidding shall begin from the highest written bid. No oral bid will be considered which is not higher than the preceding bid. In the event there is a tie in high written bids, and no oral bidding occurs, the bidder who was the first to submit his bid deposit and written bid shall be declared the high bidder. If the officer conducting the sale cannot determine who made the first submission of high tie written bids, the high bidder shall be determined by lot. High bidder must confirm his bid, in writing, immediately upon being declared high bidder.

(c) Except as otherwise provided in 43 CFR 5442.2, bids will not be considered in resale of timber/vegetative resource remaining from an uncompleted contract from any person or affiliate of such person who failed to complete the original contract because of (1) cancellation for the purchaser's breach or (2) through failure to complete payment by expiration date.

(d) When it is in the interest of the Government to do so, it may reject any and all bids and may waive minor deficiencies in bids or in sale advertisement.

6. **BID FORMS** – All sealed, written bids, and confirmation of oral bids shall be submitted on forms provided by Government.

(a) **Lump Sum Sales** – Bids shall specify (1) Bureau of Land Management estimated volume, (2) price per unit, and (3) total purchase price. Estimated volume and price per unit are to be used for administrative and appraisal purposes only. Upon award of contract, high bidder shall be liable for total purchase price, including any adjustment which may be made as a result of reappraisal if an extension of time is granted, even though quantity of timber/vegetative resource actually cut, removed, or designated for taking is more or less than the estimated volume or quantity listed.

(b) **Timber Scale Sales** – Bids must state price per thousand board feet that will be paid for each species. High bidder will be determined by multiplying bid price per thousand board feet per species by Bureau of Land Management estimate of volume of each species. Purchaser shall be liable for purchase price of all merchantable timber sold under contract even though all such timber is not actually cut

and removed prior to expiration of time for cutting and removal as specified in contract.*

7. **BID DEPOSIT** – All bidders must make a deposit of not less than the amount specified in the *Timber/Vegetative Resource Notice*. Deposit may be in the form of cash, money orders, bank drafts, cashiers or certified checks made payable to the Department of the Interior – BLM, bid bonds of a corporate surety shown on the approved list of the United States Treasury Department*, or any approved guaranteed remittance approved by the Authorized Officer. Upon conclusion of bidding, the bid deposit of all bidders, except high bidder, will be returned. The cash deposit of the successful bidder may be applied toward the required sale deposit and/or the purchase price. Cash not applied to the sale deposit or the purchase price, or a corporate surety bid bond, will be returned at the time the contract is signed by the Government.

8. **AWARD OF CONTRACT** – Government may require high bidder to furnish such information as is necessary to determine the ability of bidder to perform the obligation of contract. Contract will be awarded to high bidder, unless he is not qualified or responsible or unless all bids are rejected. If high bidder is not qualified or responsible or fails to sign and return the contract together with required performance bond and any required payment, contract may be offered and awarded to the highest bidders qualified, responsible, and willing to accept the contract.

9. **TIMBER/VEGETATIVE RESOURCE SALE CONTRACT** – To be executed by purchaser, has been prepared by Government, and may be examined in the District Manager's office.

10. **PERFORMANCE BOND** -

(a) A performance bond in an amount of not less than 20 percent of total purchase price is required, but the amount of the bond shall not be in excess of \$500,000, except when the purchaser opts to increase the minimum bond to permit cutting prior to payment as provided in 43 CFR 5451.2, or in the event the purchaser is a holder of an unresolved default the bond may be increased as provided in 43 CFR 5450.1(b). Performance bond may be (1) bond of a corporate surety shown on approval list issued by the United States Treasury Department and executed on an approved standard form, (2) personal surety bond executed on an approved standard form if Government determines principals and bondsman are capable of carrying out the terms of the contract, (3) cash bonds, (4) negotiable securities of the United States, or (5) any guaranteed remittance approved by the Authorized Officer.

(b) If purchaser elects to cut timber without skidding or yarding it to a loading point or removing it prior to the payment of the second or subsequent installments, Government shall require an increase in amount of performance bond initially required by an amount equal to the value of timber to be cut. Such increase must be on a bond rider form supplied by Government and be approved, in writing, by Government prior to cutting timber covered by the bond increase. This increased amount of bond shall be used to assure payment for timber cut in advance of payment.*

11. **PAYMENT BOND** – If purchaser elects to (a) cut and remove timber, or (b) remove timber already cut which has been secured by an increased performance bond as provided in paragraph 10(b) above, before payment of the second or subsequent installments, Government shall require a payment bond on a form supplied by Government. Purchaser shall obtain written approval from Government of payment bond prior to cutting and/or removal of timber covered by the bond. Payment bond shall be used to assure payment for timber cut and/or removed in advance of payment.*

12. **PAYMENT OF PURCHASE PRICE** – For sales of \$500 or more, Government may allow payment by installments. Except as discussed in paragraphs 10 and 11 above, no part of any timber/vegetative resource sold may be severed, cut, or removed unless advance payment has been made as provided in contract.

13. **LIQUIDATED DAMAGES** – Within thirty (30) days from receipt of *Timber/Vegetative Resource Sale Contract*, the successful bidder shall sign contract and return it to Government, together with required bond and any required payment. If successful bidder fails to comply within the stipulated time, his bid deposit shall be retained by Government as liquidated damages.

14. **NINETY-DAY SALES** – If no bid is received within time specified in the advertisement of sale and if Government determines that there has been no significant rise in the market value of timber/vegetative resource, it may, in its discretion, keep the sale open, not to exceed ninety (90) days.

*Applies to Timber Only

15. **UNAUTHORIZED USE OF GOVERNMENT PROPERTY** – A sale may be refused to high bidder who has been notified that he has failed to make satisfactory arrangements for payment of damages resulting from unauthorized use of, or injury to, property of the United States.

16. **EQUAL OPPORTUNITY CLAUSE** – This contract is subject to the provisions of Executive Order No. 11246 of September 24, 1965, as amended, which sets forth the nondiscrimination clauses. Copies of this order may be obtained from the District Manager. 43 CFR 60-1.7(b) requires that the Equal Opportunity *Compliance Report Certification* will be completed by prospective contractors. Certification may be obtained from District Manager.

17. **LOG EXPORT** – All timber offered for sale except as noted in the *Timber Sale Notice* is restricted from export from the United States in the form of unprocessed timber and cannot be used as a substitute for exported private timber. For the purpose of this contract, unprocessed timber is defined as: (1) any logs except those of utility grade or below, such as sawlogs, peeler logs, and pulp logs; (2) cants or squares to be subsequently remanufactured exceeding eight and three quarters (8-3/4) inches in thickness; (3) split or round bolts or other roundwood not processed to standards and specifications suitable for end product use; or (4) western

red cedar lumber which does not meet lumber of American Lumber Standards Grades of Number 3 dimension or better, or Pacific Lumber Inspection Bureau R-List Grades of Number 3 common or better. Timber manufactured into the following will be considered processed: (1) lumber and construction timbers, regardless of size, manufactured to standards and specifications suitable for end product uses; (2) chips, pulp and pulp products; (3) green or dry veneer and plywood; (4) poles and piling cut or treated for use as such; (5) cants, squares, and lumber cut for remanufacture of eight and three quarters (8-3/4) inches in thickness or less; or (6) shakes and shingles. In event purchaser wishes to sell any or all of timber restricted from export in the form of unprocessed timber, the buyer, exchanges, or recipient shall be required to comply with contractual provisions relating to “*unprocessed timber*”. Special reporting, branding and painting of logs may be included in contract provisions.*

18. **DETAILED INFORMATION** – Detailed information concerning contract provisions, bid, performance bond forms, tract location maps, and access conditions may be obtained from the District Manager. All persons interested in bidding on the products listed are encouraged to familiarize themselves with all such detailed information.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DEPOSIT AND BID FOR ☒ **TIMBER***
☐ **VEGETATIVE RESOURCE**
(Other Than Timber)

LUMP SUM SALE

Name of Bidder
Tract Number OR110-TS10-18
Sale Name
Swinning
Sale Notice (dated) August 18 th , 2010
BLM District Medford

<input type="checkbox"/> Sealed Bid for Sealed Bid Sale	<input checked="" type="checkbox"/> Written Bid for Oral Auction Sale
---	---

In response to the above dated Sale Notice, the required deposit and bid are hereby submitted for the purchase of designated timber/vegetative resource on the tract specified above.

Required bid deposited is \$29,700.00 and is enclosed in the form of ☐ cash ☐ money order ☐ bank draft
☐ cashier's check ☐ certified check ☐ bid bond of corporate surety on approved list of the United States Treasury
☐ guaranteed remittance approved by the authorized officer.

IT IS AGREED That the bid deposit shall be retained by the United States as liquidated damages if the bid is accepted and the undersigned fails to execute and return the contract, together with any required performance bond and any required payment within 30 days after the contract is received by the successful bidder. It is understood that no bid for less than the appraised price on a unit basis per species will be considered. If the bid is rejected the deposit will be returned.

BID SCHEDULE – LUMP SUM SALE

NOTE: Bidders should carefully check computations in completing the Bid Schedule

BID SUBMITTED					ORAL BID MADE	
PRODUCT SPECIES	UNIT	ESTIMATED VOLUME OR QUANTITY	UNIT PRICE	TOTAL VALUE	UNIT PRICE	TOTAL VALUE
Douglas-fir	751		X	=	X	=
White fir	1820		X	=	X	=
Ponderosa pine	125		X	=	X	=
Incense-cedar	11		X	=	X	=
			X	=	X	=
Total	2707		X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
TOTAL PURCHASE PRICE						

(Continued on reverse)

If sale contract is executed, undersigned is liable for total purchase price even though the quantity cut, removed, or designated for taking is more or less than the total estimated volume or quantity shown above. Undersigned certifies bid was arrived at by bidder or offeror independently, and was tendered without collusion with any other bidder or offeror. In submitting or confirming this bid, undersigned agrees to the foregoing provisions, applicable regulations, and certifies that he is authorized to act as, or on behalf of, the bidder.

Bid submitted on *(date)*

(Check appropriate box, sign in ink, and complete the following)

<input type="checkbox"/>	Signature, if firm is individually owned	Name of firm <i>(type or print)</i>
<input type="checkbox"/>	Signatures, if firm is a partnership or L.L.C.	Business address, include zip code <i>(type or print)</i>
<input type="checkbox"/>		
<input type="checkbox"/>		
<input type="checkbox"/>	Corporation organized under the state laws of	<i>(To be completed following oral bidding)</i>
Signature of Authorized Corporate Signing Officer		I HEREBY confirm the above oral bid By <i>(signature)</i>
Title		Date
Submit bid, in <i>duplicate</i> , to qualify for either an oral auction or sealed bid sale together with the required bid deposit made payable to the Department of the Interior – BLM. Oral Auction – Submit to Sales Supervisor prior to closing of qualifying period for tract.		Sealed Bid – Send to District Manager, who issued the sale notice, in a sealed envelope marked on the outside: (1) “Bid for Timber” (2) Vegetative Resource Other Than Timber (3) Time bids are to be opened (4) Legal description

NOTICE

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 38 FR 6280 and 43 CFR 5442.1

PURPOSE: To qualify an oral auction bidder, and then if successful, to bind bidder to certain contract conditions.

ROUTINE USE: To determine that an individual is qualified to participate in oral auction bidding, and, as surety that bidder will fulfill contract requirements.

EFFECT OF NOT PROVIDING INFORMATION: Filing this deposit and bid information is necessary only when an individual wishes to participate in a sealed or auction bid sale for timber or vegetative resources.