

3328

199

Original (1)
JAN 20 1920

Book "G".

4-679

BOOK 3328

NOV 25 1919

FIELD NOTES

OF THE RETRACEMENT OF

3328

Part of South boundary of TOWNSHIP 8 NORTH, RANGE 2 EAST,

and RESURVEY of

2nd Standard Parallel North, thru part of Range 2 East,

Part of the South boundary, and

Part of the Subdivision lines of TOWNSHIP 8 NORTH, RANGE 2 EAST, and

East boundary of TOWNSHIP 8 NORTH, RANGE 1 EAST,

and SURVEY of

Part of the Subdivision lines of

TOWNSHIP 8 NORTH, RANGE 2 EAST,

3328

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Geo. F. Rigby, U.S. Surveyor

with corrective resurvey of part of South Boundary of T. 8 N., R. 2 E. by

H. L. Baldwin, U.S. Surveyor,

in the capacity of U. S. Surveyor, under Special Instructions dated January 20, 1916,

issued by the United States Surveyor General to govern surveys included in Group

61, Arizona, which were approved by the Commissioner of the General Land

Office, January 31, 1916, and Assignment Instructions dated November 25, 1916

Retracement,
Resurvey and Survey commenced February 21, 1917. (Rigby)

Retracement,
Resurvey and Survey completed March 14, 1917. (Rigby)

Corrective Resurvey-Part of S. bdy. T. 8 N., R. 2 E. June 11, 1918 (Baldwin).

(A)


3328

Book "G."

Group 61- Arizona.

BOOK 3328

INDEX DIAGRAM.

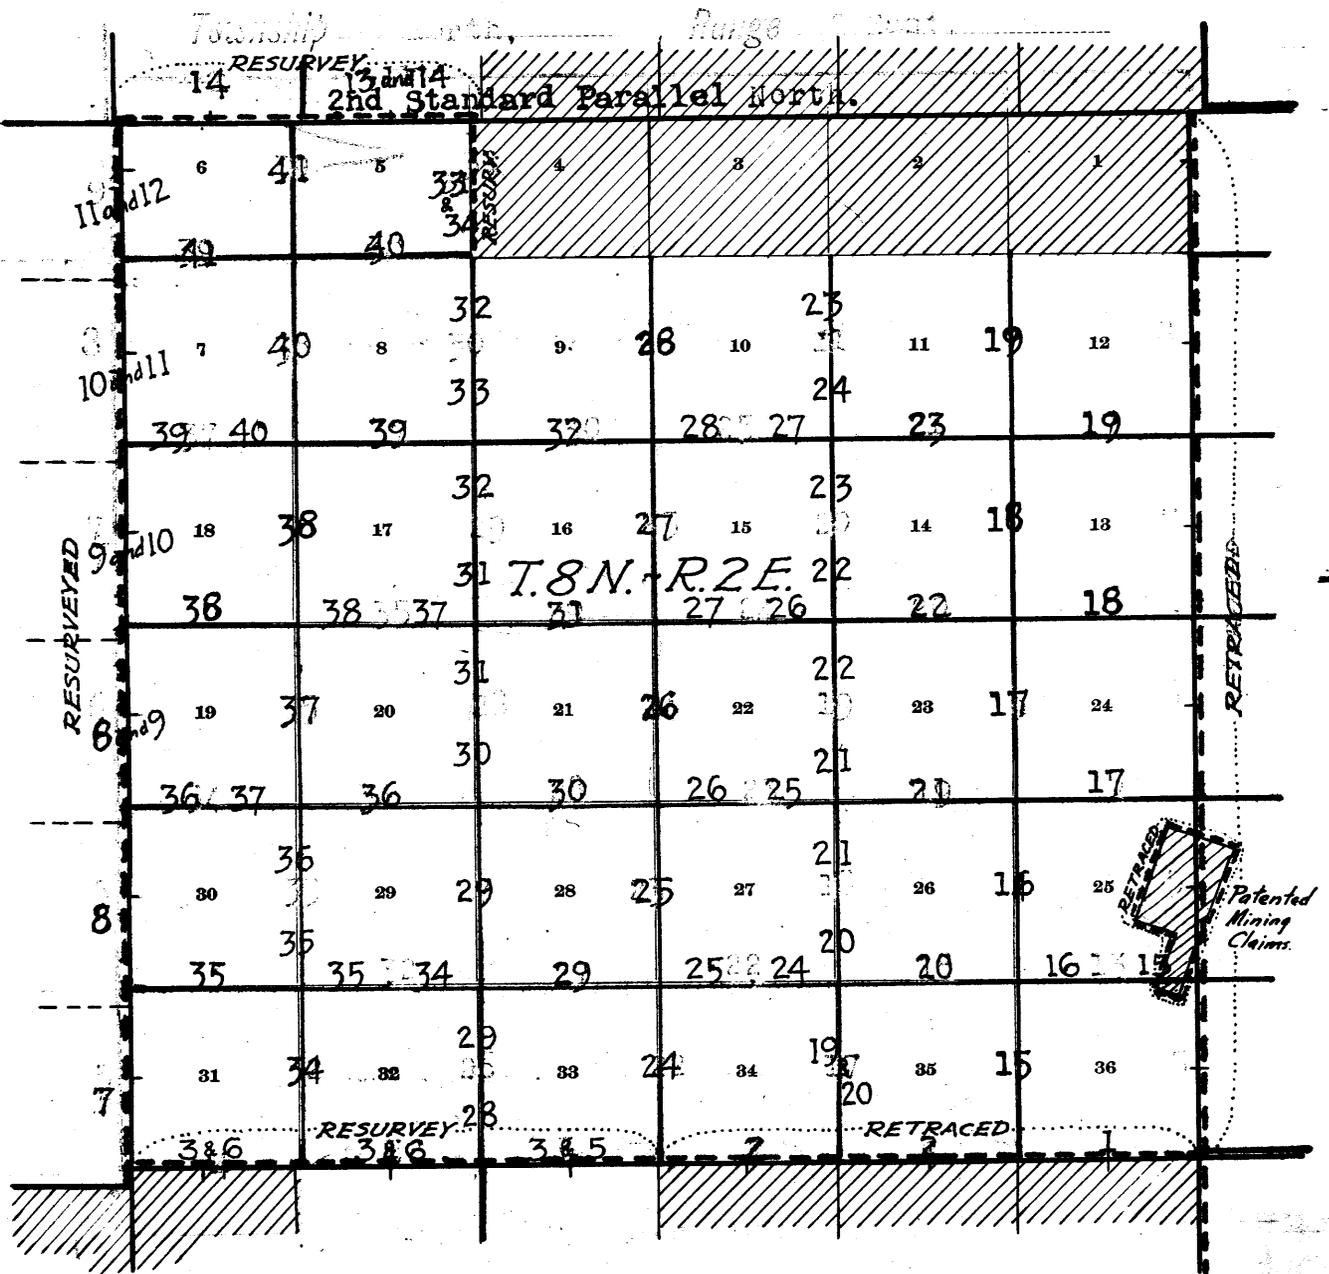

-  Lines surveyed under this group.
-  Lines retraced or resurveyed under this group.
-  Accepted surveys.
-  Unsurveyed.
-  Areas surveyed as per accepted plats on file.

Retracement of part of S. bdy. of Township 8 North, Range 2 East.

Chains.

Retracements, Resurveys and Surveys hereinafter described, with the exception of resurvey of part of the south bdy. of T. 8 N., R. 2 E., executed by Geo. F. Rigby, U.S. Surveyor, on dates shown on diagram, on page 44 hereof; using C.L. Berger transit No. 8947, with $6\frac{1}{4}$ in. horizontal limb, reading to 30" of arc. The instrument has no solar attachment:

In the following surveys, the meridian described in book "E" is transferred to the cor. of Ts: 7 and 8 N., Rs. 2 and 3 E. by careful foresights and backsights, and find same to coincide with a meridian transferred in the same way from camp in sec. 29, T. 8 N., R. 3 E. By the same means, continue the line thru. the township, with proper deflections for subdivisional lines.

Berger transit No. 8947 was approved by the Assistant Supervisor of Surveys for Arizona and California, conditional upon satisfactory field tests, February 2, 1917:

Resurvey of part of the south bdy. of T. 8 N., R. 2 E. was altered by H.L. Baldwin, U.S. Surveyor, on dates shown on diagram on page 44 hereof, and as hereinafter described.

The original cor. of Ts. 7 and 8 N., Rs. 2 and 3 E. is a granite stone, 8x6x10 ins. above ground, firmly set, marked with 6 notches on each of N., S., E. and W. edges, and "8N on NE." "3E" on SE., "7N" on SW., and "2W" on NW. face, and witnessed by mound of stone, S. of cor.

No bearing trees:

3.00
14.79
37.12
39.91

1.00
4.91
9.88
14.62
30.92
34.35
37.76
39.76

Thence,
West, on random line, bet. secs. 1 and 36 (E. $\frac{1}{2}$).
Over mountainous land, thru. scattering undergrowth.
Ascend 120 ft. on NE. slope.
Fence, brs. NW. and S.
Spur, slopes NW. Descend 265 ft.
Gulch, course N. 10° W. Ascend 15 ft. to
Fall 5 lks. S. of original $\frac{1}{2}$ sec. cor. of secs. 1 and 36, which is a granite stone, 10x8x6 ins., above ground, firmly set, marked "4" on N. face, and witnessed by mound of stone, N. of cor. No bearing trees.
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 1 and 36 are therefore, N. 89° 56' W., 39.91 chs.
Thence,
West, on random line, bet. secs. 1 and 36 (W. $\frac{1}{2}$).
Over mountainous land, thru. scattering undergrowth. Asc. 15 ft. to
Spur, slopes N. Descend 56 ft.
Gulch, course NW. Ascend 34 ft.
Spur, slopes N. Descend 93 ft.
Gulch, course N. Ascend 141 ft.
Spur, slopes N. Descend 50 ft.
Draw, course N. 10° W., Ascend 48 ft.
Spur, slopes N. Descend 15 ft. to
Fall 3 lks. S. of original cor. of secs. 1, 2, 35 and 36, which is a granite stone, 7x6x6 ins. above ground, firmly set, marked with 1 notch on E. edge and 5 notches on W. edge, and witnessed by mound of stone, W. of cor. No bearing trees.
True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 1 and 36, are therefore N. 89° 57' W., 39.76 chs.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, scattering greasewood, palo verde and mesquite.
No grass.

West, on random line, bet. secs. 2 and 35 (E. $\frac{1}{2}$).

2. Retracement of part of South bdy. of Township 8 North, Range 2 E.

Chains.	Over mountainous land, thru scattering undergrowth. Desc. 15 ft.
1.49	Gulch, course N. Ascend 129 ft.
12.11	Spur, slopes NW. Descend 163 ft. to
22.74	Ravine, course NW. Descend 117 ft.
27.59	Fence brs. NE. and SW.
29.24	Foot of descent, brs. N. and S.
31.34	Fence brs. N. 70° W. and S. 70° E. Ascend 50 ft.
37.68	Ridge, brs. NW. and SE. Descend 20 ft. to
39.95	Fall 10 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a granite stone 8x6x4 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by mound of stone, N. of cor., and one bearing tree NW. of cor. marked " $\frac{1}{4}$ S35 BT."
	True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 2 and 35 are therefore, N. 89° 51' W., 39.95 chs.
	Thence, West, on random line, bet. secs. 2 and 35 (W. $\frac{1}{2}$). Over mountainous land, thru scattering undergrowth. Ascend 13 ft.
1.23	Low spur, slopes N. Descend gradually.
6.03	Foot of gradual slope, brs. N. and S. Descend 222 ft.
11.92	Fence brs. NE. and S. 70° W.
40.13	Fall 2 lks. N. of original cor. of secs. 2, 3, 34 and 35, which is a granite stone, 8x6x4 ins. above ground, firmly set, marked with 2 notches on E. edge, and 4 notches on W. edge, and witnessed by mound of stone W. of cor., and one bearing tree NW. of cor., marked "T8NR2ES34BT."
	True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 2 and 35, are therefore S. 89° 58' W., 40.13 chs.
	Land, mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, scattering greasewood and palo verde. No grass.

	West, on random line, bet. secs. 3 and 34 (E. $\frac{1}{2}$). Over rolling land, thru dense undergrowth. Descend 68 ft.
9.94	Draw, course NW. Ascend 57 ft.
16.88	Spur, slopes NW. Descend 158 ft. to
40.00	Fall 5 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a sandstone 6x6x5 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by one bearing tree NE. of cor., marked " $\frac{1}{4}$ S34BT." and one bearing tree SW. of cor., marked " $\frac{1}{4}$ S3BT."
	True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 3 and 34 are therefore, N. 89° 56' W., 40.00 chs.
	Thence, West, on a random line, bet. secs. 3 and 34 (W. $\frac{1}{2}$). Over rolling land, thru dense undergrowth. Descend gradually.
15.60	Road brs. NW. to Prescott and SE. to Phoenix.
31.00	Descend 68 ft. on SW. slope, to
40.15	Intersect original cor. of secs. 3, 4, 33 and 34, which is a granite stone, 7x4x4 ins. above ground, firmly set, marked with 3 notches on each of E. and W. edges, and witnessed by mound of stone, W. of cor., and one bearing tree NE. of cor., marked "T8NR2ES34 BT." and one bearing tree NW. of cor., marked "T8N R2E S33BT."
	Land, rolling, soft, rocky, 4th rate. No timber. Undergrowth, dense greasewood, palo verde, cactus and mesquite. No grass.

Retracement of part of South ~~part~~ of Township 8 North, Range 2 E. 3

Chains

Retracement for Resurvey.

- From original cor. of secs. 3, 4, 33 and 34,
West, on random line, bet. secs. 4 and 33 (E. $\frac{1}{2}$).
- 40.38 Fall 8 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is a sandstone, 7x5 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by one bearing tree NW. of cor., marked " $\frac{1}{4}$ S33BT." and one bearing tree SE. of cor., marked " $\frac{1}{4}$ S4BT."
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 4 and 33 are therefore N. 89° 53' W., 40.38 chs.
Thence,
West, on random line, bet. secs. 4 and 33 (W. $\frac{1}{2}$).
- 40.24 Fall 7 lks. S. of original cor. of secs. 4, 5, 32 and 33, which is a sandstone 6x5x4 ins. above ground, firmly set, marked with 4 notches on E. edge and 2 notches on W. edge, and witnessed by one bearing tree NE. of cor., marked "T8NR2ES33BT.", one bearing tree SE. of cor., marked "T7NR2ES4BT.", one bearing tree SW. of cor., marked "T7NR2ES5BT.", & one tree NW. of cor., mkd. "T8NR2ES32BT." True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 4 and 33 are therefore N. 89° 54' W., 40.24 chs.
-
- West, on random line, bet. secs. 5 and 32 (E. $\frac{1}{2}$).
- 40.16 Fall 10 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a quartzite stone, 6x5x4 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by one bearing tree SE. of cor., marked " $\frac{1}{4}$ " S5BT." and one bearing tree NE. of cor., marked " $\frac{1}{4}$ " S32BT."
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 5 and 32 are therefore N. 89° 51' W., 40.16 chs.
Thence,
West, on random line, bet. secs. 5 and 32 (W. $\frac{1}{2}$).
- 40.08 Fall 11 lks. S. of original cor. of secs. 5, 6, 31 and 32, which is a granite stone, 10x6x6 ins. above ground, firmly set, marked with 5 notches on E. and 1 notch on W. edge, and witnessed by mound of stone, W. of cor. No bearing trees.
True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 5 and 32 are therefore, N. 89° 51' W., 40.08 chs.
-
- West, on random line, bet. secs. 6 and 31 (E. $\frac{1}{2}$).
- 40.17 Fall 6 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is a sandstone, 6x5x5 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by one bearing tree, SW. of cor., marked " $\frac{1}{4}$ " S6BT.", and one bearing tree NW. of cor., marked " $\frac{1}{4}$ " S31BT."
True course and dist. of E. $\frac{1}{2}$ of line, bet. secs. 6 and 31 are therefore N. 89° 55' W., 40.17 chs.
Thence,
West, on random line, bet. secs. 6 and 31 (W. $\frac{1}{2}$).
- 33.11 Fall 9 lks. S. of original closing cor. of Ts. 7 and 8 N., R. 2 E., which is a lava stone, 8x7x5 ins. above ground, firmly set, marked with 6 grooves on N., E. and S. faces and "CE" on E. face, and witnessed by one bearing tree NE. of cor., marked "CCT8NR2ES31BT.", and one bearing tree SE. of cor., marked "CCT7NR2ES6BT."
True course and dist. of W. $\frac{1}{2}$ of line, bet. secs. 6 and 31 are therefore, N. 89° 51' W., 33.11 chs.
-

Resurvey of a portion of the South boundary of Township 8 North, Range 2 East.

Chains

The south bdy. of secs. 31, 32 and 33, T. 8 N., R. 2 E., was resurveyed in February 1917 under this group by Geo. F. Rigby, U. S. Surveyor, reestablishing the cors. referring to areas N. of line, by setting iron posts with brass caps at 40 ch. intervals on lines between the old cors. found in the retracement hereinbefore described, and changing the markings and accessories of said old cors. to make them refer to areas S. of line only. H. L. Baldwin, U. S. S., in June, 1918, alters this resurvey by connecting the original cor. of secs. 3, 4, 33 and 34 with the original cor. of secs. 5, 6, 31 and 32, by a direct line, moving certain cors. reestablished by Rigby to bring them on the direct line and changing the markings and accessories of certain cors. as hereinafter described to make them refer to areas both N. and S. of line. Surveyor Baldwin also obliterates markings and accessories of the original cors. in the part of the line previously changed by Surveyor Rigby, leaving the stones in their original positions. The altering of Surveyor Rigby's resurvey by Surveyor Baldwin, was made in connection with the latter's survey of subdivision of part of T. 7 N., R. 2 E., the north boundaries of secs. 4 and 5 thereof being subject to rectification. In the following notes the topography is from Surveyor Rigby's resurvey; also, the corner descriptions marked with the initials "G. F. R." The course of the line south of secs. 32 and 33 is from Surveyor Baldwin's records, and those corners marked with both initials "G. F. R." and "H. L. B." are described from the records of both surveyors.

From the original cor. of secs. 3, 4, 33 and 34, hereinbefore described,

8.48

N. 89° 52' W., on resurvey on the S. bdy. of sec. 33.

Over rolling valley, thru dense undergrowth.

Wash, course NW. Descend gradual W. slope.

40.00

"G. F. R. and "H. L. B."

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor., marked on brass cap,

S 33	
S	4
1917	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

40.38

"G. F. R." and "H. L. B."

The original 1/4 sec. cor. of secs. 4 and 33, hereinbefore described, bears S. 1 lk. dist. First altered by "G. F. R." to refer to sec. 4 only; then, later "H. L. B." obliterates all markings and accessories, leaving stone in place,

51.46

Wash, course NW.

64.98

Begin descent of SW. slope.

80.00

"G. F. R. and "H. L. B."

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 4, 5, 32 and 33, marked on brass cap,

T 8 N.	R 2 E.
S 32	S 33
S 5	S 4
T 7 N.	
1917	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling valley.
 Soil, gravelly clay, 3rd rate.
 No timber.
 Undergrowth, palo verde, ironwood and cactus.

N. 89° 52' W., on true line, along S. bdy. of sec. 32.
 Over rolling valley, thru scattering undergrowth.

6 Resurvey of a portion of the South boundary of Township 8 North, Range 2 East.

Chains

0.62 "G.F.R. and H.L.B." The original cor. of secs. 4, 5, 32 and 33, hereinbefore described, brs. S. 3 lks. dist. First altered by "G.F.R." to refer to sec. 4 and 5 only; then, later "H.L.B."; obliterate all markings and accessories, leaving stone in place.

10.00 Begin gradual descent.

23.26 Gulch, course N. 15° E. Ascend 150 ft.

33.82 Ridge, brs. NE and W. Thence along ridge.

40.00 "G.F.R." and H.L.B.

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap,

$\frac{1}{4}$ S32
S 5
1917

from which,
A palo verde, 6 ins. diam., brs. N. 40 $\frac{1}{2}$ ° W., 95 lks. dist., marked $\frac{1}{4}$ S 32 B T.
No other trees within limits; raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

40.78 "G.F.R. and "H.L.B."
The original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, hereinbefore described, brs. S. 2 lks. dist. First altered by "G.F.R." to refer to sec. 5 only, then, later "H.L.B." obliterate all markings and accessories, leaving stone in place.

49.15 Spur, slopes NW. Descend 25 ft.

66.92 Tip Top road, brs. NW, and SE.

72.72 Draw, course SW. Ascend 25 ft.

77.71 Spur, slopes S. Descend 25 ft.

80.00 "G.F.R."
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 31 and 32, marked on brass cap,

T8N | R2E
S31 | S32
T 7 N
1917

from which,
A palo verde, 7 ins. in diam., brs. N. 58° W., 174 lks. dist., marked T8N R2E S31BT.
No other trees within limits; raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
Land, rolling valley.
Soil, gravelly clay, 3rd rate.
No timber.
Undergrowth, mesquite, palo verde and ironwood.

0.86 N. 89° 52' W., on true line, on S. bdy. of sec. 31. Over rolling land, thru. scattering undergrowth. "G.F.R."
Intersect the original cor. of secs. 5, 6, 31 and 32, hereinbefore described. Alter this cor. to refer to secs. 5 and 6 only by moving mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, from west to south of corner st. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

Thence N. 89° 55' W., continuing measurement.

28.04 Enter Agua Fria river, 2 ft. deep, course S.

30.54 Leave Agua Fria river, course S.

40.00 "G.F.R."
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31, marked on brass cap,

$\frac{1}{4}$ S31
1917

Resurvey of a portion of the South Boundary of Township 8 North, Range 2 East.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

41.03 "G.F.R." (40.17 chs. N. 89° 55' W. of cor. of secs. 5 and 6) Intersect the original ¼ sec. cor. of secs. 6 and 31 hereinbefore described. Alter this cor. to refer to sec. 6 only, by obliterating the marking on NW bearing tree, and building a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

Thence
N. 89° 51' W., continuing measurement.

55.94 Wash, course S. Ascend.

65.95 Dim road, brs. N. and S.

71.20 Low spur, slopes S. Descend.

73.15 Draw, course S. 20° E.

74.14 Intersect the original closing cor. of Ts. 7 and 8 N., R. 2 E. hereinbefore described.

Land, rolling valley,
Soil, gravelly clay, 3rd rate.
No timber.
Undergrowth, mesquite, palo verde and ironwood.

Resurvey of East bdy. of Township 8 North, Range 1 East.

From the cor. of Ts. 7 and 8 N., R. 1 E., which is a granite stone, firmly set, marked and witnessed as described by the surveyor general,
North, on resurvey, along E. bdy. of sec. 36.
Over broken, mountainous land, thru. dense undergrowth.
Ascend 65 ft.

6.12 The closing cor. of Ts. 7 and 8 N., R. 2 E., hereinbefore described. Descend.


12.82 Wash, course SE.

30.22 Road, brs. NW. and SE.

31.62 Wash, course SE. Ascend.

35.93 Spur, slopes E. Descend 100 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 36, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

40.07 Fall 7 lks. W. of the original ¼ sec. cor., which is a malpais stone, 6x5x4 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.
Destroy all trace of this cor.

42.27 Gulch, course SE. Ascend 80 ft.

46.12 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 31, marked on brass cap,




and raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

64.63 Ridge, brs. E. and W. Descend 105 ft.

74.49 Wash, course E. Ascend 35 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 25 and 36, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, broken, mountainous. Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite, catclaw and cactus.

8 Resurvey of the East boundary of Township 8 North, Range 1 East.

Chains

North, on resurvey, along E. bdy. of sec. 25.
 Over mountainous land, thru dense undergrowth. Desc. 35 ft.
 0:12 Fall 13 lks. W. of the original cor. of secs. 25, 30, 31 and 36, which is a sandstone, 8x7x5 ins. above ground, firmly set, marked and witnessed as described by the surveyor general. Destroy all trace of this cor.
 5:59 Gulch, course N. 85° E. Ascend gradually 100 ft.
 6:12 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 30 and 31, T. 8 N., R. 2 E., marked on brass cap,

T8N
 S30
 S31
 R2E

1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.
 18.71 Spur, slopes E. Descend 45 ft.
 33.41 Gulch, course S 70° E. Ascend 920 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 25, marked on brass cap,

S25

1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 40.23 Fall 10 lks. W. of the original ¼ sec. cor., which is a sandstone, 8x6x5 ins. above ground, marked and witnessed as described by the surveyor-general. Destroy all trace of this cor.

46.12 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 30, marked on brass cap,

S30

1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.
 74.02 Ridge, brs. E. and W. Thence over rolling E. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 24 and 25, marked on brass cap,

T8N
 S24
 S25
 R1E

1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

North on resurvey, along E. bdy. of sec. 24.
 Over rolling mesa, thru dense undergrowth.
 0.42 Fall 18 lks. W. of the original cor. of secs. 19, 24, 25 and 30, which is a sandstone, 7x5x5 ins. above ground, firmly set, marked and witnessed as described by the surveyor-general. Destroy all trace of this cor.
 6.12 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 19 and 30, T. 8 N., R. 2 E., marked on brass cap,

T8N
 S19
 S30
 R2E

1917

Resurvey of the
East Boundary of T. 8 N., R. 1 E.


Chains.

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

10.93 Desc. 85 ft.
Gulch, course S.60°E. Asc. 350 ft.

39.87 Gulch, course E. Asc. 180 ft.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 24, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.67 Fall 24 lks. W. of the original 1/4 sec. cor., which is a sandstone, 6 X 5 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. Destroy all trace of this cor.

46.12 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 19, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.


54.54 Cor. stands on spur, slopes E. Desc. 200 ft.

65.56 Gulch, course N.70°E. Asc. 120 ft.

68.44 Spur, slopes E. Desc. 55 ft.

80.00 Draw, course E. Asc. 170 ft.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 13 and 24, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and broken.

Soil, rocky, 4th rate.


No timber.

Undergrowth, palo verde, mesquite and cactus.

North on resurvey, along E. bdy. of sec. 13.
Over mountainous land, through scattering undergrowth.
Desc. 165 ft.

0.37 Fall 31 lks. W. of the original cor. of secs. 13, 18, 19 and 24, which is a malpais stone, 7 X 6 X 4 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. Destroy all trace of this cor.

6.12 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 18 and 19, T. 8 N., R. 2 E., marked on brass cap



Resurvey of the East Boundary of T. 8 N., R. 1 E.

8. 10

Chains.


And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Desc. 380 ft.

17.21 Gulch, course NE. Asc. 220 ft.

30.60 Spur, slopes E. Desc. 195 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 13, marked on brass cap




And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.42 Fall 38 lks. W. of the original 1/4 sec. cor., which is a sand stone, 10 X 7 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. Destroy all trace of this cor.

40.60 Gulch, course E. Asc. 70 ft.

46.12 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 18, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Asc. 25 ft.


47.78 Spur, slopes NE. Desc. 105 ft.

59.96 Creek, 5 lks. wide, 3 ins. diam., course E. Asc. 170 ft.

70.00 Spur, slopes E. Desc. 70 ft.

73.03 Creek, 5 lks. wide, 3 ins. deep, course E. Asc. 215 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 12 and 13, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, palo verde, mesquite and cactus.

North on resurvey, along E. bdy. of sec. 12.

Over mountainous land, through scattering undergrowth. Asc. 110 ft.

0.18 Fall 48 lks. W. of the original cor. of secs. 7, 12, 13 and 18, which is a granite stone, 8 X 7 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. Destroy all trace of this cor.


4.08 Spur, slopes SW. Desc. 40 ft.

6.12 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 7 and 18, marked on brass cap

Resurvey of the East Boundary of T. 8 N., R. 1 E.


11

chains.




- And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor. Asc. 100 ft.
- 21.36 Ridge, brs. NW. and S.10°E. Desc. 130 ft.
- 27.52 Head of gulch, course E. Asc. 240 ft.
- 39.75 Fall 44 lks. W. of the original ¼ sec. cor., which is a granite stone, 9 X 7 X 5 ins. above ground, firmly set marked and witnessed as described by the Surveyor-General. Destroy all trace of this cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 12, marked on brass cap




- And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Asc. 140 ft.
- 46.12 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 7, marked on brass cap



- And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor. Asc. 35 ft.
- 49.07 Spur, slopes E. Desc. 190 ft.
- 68.76 Creek, 3 lks. wide, 2 ins. deep, course S.60°E. Asc. 60 ft.
- 70.92 Spur, slopes E. Desc. 30 ft.
- 74.89 Creek, 4 lks. wide, 3-ins. deep, course SE. Asc. 80 ft.
- 79.63 Fall 47 lks. W. of the original cor. of secs. 1, 6, 7 and 12, which is a granite stone, 8 X 8 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. Destroy all trace of this cor.

80.00 Set an iron post, 3 ft. long 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 1 and 12, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

- North on resurvey, along E. bdy. of sec. 1. Over rocky mountainous land. Asc. 465 ft.
- 6.12 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 6 and 7, marked on brass cap

Retracement of 2nd. Std. Par. North, thru. part of Range 2 East.

Chains

5.06 From the standard cor. of secs. 32 and 33, T.9 N., R.2 E., which is a sandstone, 7x5x4 ins. above ground, firmly set, marked and witnessed as described by the surveyor general, West, on retracement, along S. bdy. of sec. 32.

10.06 Fall 2 lks. S. of the original closing cor. of secs. 4 and 5, T.8 N., R.2 E., which is a sandstone, 6x5x4 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

39.66 Continue line and measurement.

39.66 Fall 8 lks. S. of the Standard $\frac{1}{4}$ sec. cor. of sec. 32, T.9 N., R.2 E., which is a shale stone, 6x6x5 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

The true course and distance of E. half of S. bdy. of sec. 32 is therefore N.89° 53' W., 39.66 chs.

79.35 Continue line and measurement on W. $\frac{1}{2}$ of S. bdy. of sec. 32.

79.35 Fall 17 lks. S. of the standard cor. of secs. 31 and 32, T.9 N., R.2 E., which is a shale stone, 6x6x8 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

The true course and distance of W. $\frac{1}{2}$ of S. bdy. of sec. 32, is therefore N.89° 52' W., 39.69 chs.

39.57 From the Standard cor. of secs. 31 and 32, West, on retracement, along S. bdy. of sec. 31.

39.57 Fall 20 lks. S. of the Standard $\frac{1}{4}$ sec. cor. of sec. 31, T.9 N., R.2 E., which is a sandstone, 7x7x6 ins. above ground, firmly set, marked and witnessed as described by the surveyor general.

The true course and distance of E. $\frac{1}{2}$ of S. bdy. of sec. 31 is therefore N.89° 43' W., 39.57 chs.

79.49 Continue line and measurement on W. half of S. bdy. of sec. 31.

79.49 Fall 41 lks. S. of the reestablished closing cor. of Ts. 8 N., Rs. 1 and 2 E., hereinbefore described.

79.55 Fall 41 lks. S. of the standard cor. of Ts. 9 N., Rs. 1 and 2 E., hereinbefore described.

The true course and distance of W. $\frac{1}{2}$ of S. bdy. of sec. 31 is therefore N.89° 42' W., 39.98 chs.

The S. bdrs. of secs. 31 and 32 being subject to rectification, make independent resurvey of same as follows:

Resurvey of 2nd. Std. Par. North, thru. part of Range 2 East.

From the standard cor. of secs. 32 and 33, hereinbefore described, N.89° 47' W., on a true line, along S. bdy. of sec. 32. Over rough, mountainous land, thru, scattering undergrowth. Ascend 365 ft.

5.06 Intersect the original closing cor. of secs. 4 and 5, T.8 N., R.2 E., hereinbefore described.

10.92 Spur, slopes S. Descend 170 ft.

16.45 Gulch, course SW. Ascend 51 ft.

24.08 Spur, slopes S. Descend 143 ft.

30.70 Gulch, course SE. Ascend 318 ft.

39.66 The original standard $\frac{1}{4}$ sec. cor. of sec. 32, hereinbefore described, brs. S. 6 lks. dist. Destroy all trace of this cor.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard $\frac{1}{4}$ sec. cor., marked on brass cap,

S C
 $\frac{1}{4}$ S 32
 1917.

and raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

54.00 Spur, slopes S. Descend 300 ft.

14. Resurvey of Second Std. Par. North, thru, part of Range 2 East.

Chains.

- 68.65 Gulch, course S. 15° E. Ascend.
 79.35 The original standard cor. of secs. 31 and 32, hereinbefore described, brs. south 11 lks. dist. Destroy all trace of this cor.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished standard cor. of secs. 31 and 32, marked on brass cap,

S	C
T9N	R2E
S31	S32

1917

and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Land, rough, mountainous.

Soil, very rocky clay, 3rd rate.

No timber.

Undergrowth, mesquite and palo verde.

- N. 89° 47' W., on a true line, along S. bdy. of sec. 31. Over very mountainous land, thru scattering undergrowth. Descend 180 ft.
 7.12 Creek, 2 lks. wide, 2 ins. deep, course S. Thence along S. slope.
 13.10 Creek, 5 lks. wide, course S.
 19.30 Creek, 3 lks. wide, 2 ins. deep, course N. 80° E. Ascend 110 feet.
 23.00 Spur, slopes S. Descend 15 ft.
 24.00 Creek, 5 lks. wide, 3 ins. deep, course SE. Asc. 735 ft.
 38.92 The original standard ¼ sec. cor. of sec. 31, hereinbefore described, brs. south 5 lks. dist. Destroy all trace of this cor.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished standard ¼ sec. cor., marked on brass cap,

S	C
S31	

1917


and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

- 59.00 Spur, slopes SE. Descend 100 feet.
 67.00 Creek, 5 lks. wide, 5 ins. deep, course SE. Ascend 120 ft.
 72.23 Spur, slopes N.; descend.
 78.84 Intersect the closing cor. of Ts. 8 N., Rs. 1 and 2 E., hereinbefore described.
 78.90 Intersect the standard cor. of Ts. 9 N., Rs. 1 and 2 E.
 Land, very mountainous.
 Soil, very rocky, 4th rate.
 No timber.
 Undergrowth, palo verde and mesquite.

Completion of Subdivision of Township 8 North, Range 2 East, 15

Chains.

From the original cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described, N. 0° 3' E., bet. secs. 35 and 36. (Bearing adopted to insure an intersection of the original cor. of secs. 1, 2, 11 and 12).
 Over rolling and mountainous land, thru scattering undergrowth.
 Descend 520 ft.
 29.31 Wash, course NW. Continue descent.
 30.11 Fence brs. NE. and SW.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,




and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 50.93 Road to Orizaba Mine, brs. E and W.
 55.42 Moore's Gulch, stream of water 50 lks. wide, 1 ft. deep, course W. Ascend 190 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

 40.00 S. 89° 57' E., on a random line, bet. secs. 25 and 36.
 79.68 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect E. bdy. of Tp., 37 lks. N. of the original cor. of secs. 25, 30, 31 and 36; described in Book "E."
 Thence,
 N. 89° 41' W., on a true line, bet. secs. 25 and 36.
 Over rolling, mountainous land, thru dense undergrowth.
 Ascend 40 ft.
 5.29 Intersect E. side line of Bolsa patented mining claim, Mineral Survey No. 2909, Moore's Mining District, at a point, 4.86 chs. N. 10° 3' E. from cor. No. 2 (SE. cor.) thereof.
 6.62 Spur, slopes S. Descend 145 ft.
 14.30 Intersect W. side line of "Bolsa" patented mining claim, Mineral Survey No. 2909, Moore's Mining District, at a point 1.48 chs. N. 9° 36' E. from cor. No. 3 (SW. cor.) thereof. (See retracement of Mineral Surveys in field notes of survey of T. 8 N., R. 3 E. in Book "E.")
 15.28 Wash, course S. 70° W. Thence over rolling land.
 21.29 Wash, course N. 80° W. Ascend 20 ft.
 25.23 Low spur, slopes N. Descend 40 ft.
 26.73 Wash, course SW. Ascend.
 29.73 Spur, slopes S. Descend 85 ft.
 39.84 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N.


16 Completion of Subdivision of Township 8 North, Range 2 East.

Chains.


of cor.
 43.74 Wash, course N:75° W. Ascend.
 45.23 Descend 35 ft.
 51.70 Gulch, course SW. Ascend 85 ft.
 60.08 Spur, slopes S. Descend 50 ft.
 64.09 Gulch, course S. Ascend 140 ft.
 72.62 Spur, slopes S. Descend 65 ft.
 79.68 The cor. of secs. 25, 26, 35 and 36.

Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

N.0° 3'E., bet. secs. 25 and 26.
 Over rolling and mountainous land, thru. dense undergrowth.
 Ascend 120 ft.
 19.80 Spur, slopes W. Descend 80 ft.
 24.65 Gulch, course W. Ascend 50 ft.
 34.55 Descend 220 ft.
 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 42:70 Creek, containing stream of water, 4 lks. wide, 5 ins. deep,
 course S.85°W. Ascend 230 ft.
 54.45 Thence over rolling land.
 69.45 Descend 30 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 23, 24, 25 and 26, marked
 on brass cap,



and raise a mound of stone, 2 ft. base, 1½ ft. high,
 W. of cor.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

Completion of
Subdivision of T. 8 N., R. 2 E.

BOOK 3328
15. 17

Chains.

40.00
79.71

7.19
14.47
19.44
27.15
35.24
38.81
39.85½

S. 89° 41' E., on a random line, bet. secs. 24 and 25.
Set temp. ¼ sec. cor.
Intersect E. bdy. of Tp., 2 lks. S. of the original cor. of secs.
19, 24, 25 and 30, described in Book "F".
Thence
N. 89° 42' W., on a true line, bet. secs. 24 and 25.
Over broken mountainous land, through scattering under-
growth.
Asc. 140 ft.
Ridge, brs. NE. and SW. Desc. 100 ft.
Head of draw, course N. 70° W. Asc. 35 ft.
Spur, slopes N. Desc. 140 ft.
Gulch, course SW. Asc. 135 ft.
Spur, slopes S. Desc. 65 ft.
Draw, course S. Asc. 80 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., marked on brass cap

¼ S24
¼ S25
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N.
of cor.

42.87
48.59
51.64
74.75
79.71

Spur, slopes S. Desc. 115 ft.
Draw, course SW. Asc. 50 ft.
Spur, slopes S. Desc. 320 ft.
Wash, course NW. Asc. 95 ft.
The cor. of secs. 23, 24, 25 and 26.
Land, broken mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde and mesquite.

27.71
40.00

N. 0° 3' E., bet. secs. 23 and 24.
Over rolling mountainous land, through dense undergrowth.
Desc. 230 ft.
Gulch, containing small stream of water, 2 lks. wide,
2 ins. deep, course NW. Asc. 115 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for ¼ sec. cor., marked on brass cap

¼ S23 S24
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.
of cor. Desc. 30 ft.

45.00
54.98
62.47
69.85
80.00

Thence over rolling land.
Asc. 25 ft.
Desc. 85 ft.
Little Squaw Creek, 25 lks. wide, 1 ft. deep, course S. 75° W.
Asc. 55 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 13, 14, 23 and 24, marked on
brass cap

T8N R2E
S14 S13
S23 S24
1917

From which

A cat claw, 7 ins. diam., brs. N. 42½° E.,
92 lks. dist., marked T8N R2E S13 BT.
No other trees within limits. Raise amount of stone, 2
ft. base, 1½ ft. high, N. of cor.
Land, rolling & mountainous.
Soil, rocky, 4th rate.

Completion of Subdivision of
T. 8 N., R. 2 E.

18.

Chains.

No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 S. 89° 42' E., on a random line, bet. secs. 13 and 24.
Set temp. $\frac{1}{4}$ sec. cor.
79.89 Intersect E. bdy. of Tp., at original cor. of secs. 13, 18, 19
and 24, described in Book "F".
Thence
N. 89° 42' W., on a true line, bet. secs. 13 and 24.
Over rolling & mountainous land, through dense undergrowth.
Desc. 90 ft.
4.81 Gulch, course NW. Asc. 40 ft.
10.77 Spur, slopes N. Desc. 135 ft.
21.05 Wash, course NW. Asc. 15 ft.
29.57 Desc. 135 ft.
39.94 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} S13 \\ \frac{1}{4} S24 \\ \hline 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.
60.43 Little Squaw Creek, 15 lks. wide, 7 ins. deep, course SW.
Asc. 85 ft.
67.50 Spur, slopes S. Desc. 100 ft.
77.12 Wash, course S. Asc. 45 ft.
79.89 The cor. of secs. 13, 14, 23 and 24.
Land, rolling & mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

N. 0° 3' E., bet. secs. 13 and 14.
Over rolling & mountainous land, through dense undergrowth.
Asc. 45 ft.
9.95 Spur, slopes W. Desc. 75 ft.
16.22 Wash, course W. Asc. 470 ft.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{r} \frac{1}{4} \\ S14 \quad S13 \\ \hline 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
77.54 Top of square butte. Desc. 75 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 11, 12, 13 and 14, marked on
brass cap

$$\begin{array}{r} T8N R2E \\ S11 \quad S12 \\ \hline S14 \quad S13 \\ \hline 1917 \end{array}$$

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor:
Land, rolling and mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.

40.00 S. 89° 42' E., on a random line, bet. secs. 12 and 13.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect E. bdy. of Tp., 7 lks. N. of original cor. of secs.
7, 12, 13 and 18, described in Book "F".
Thence
N. 89° 39' W., on a true line, bet. secs. 12 and 13.
Over mountainous land, through scattering undergrowth.
8.04 Desc. 70 ft.
11.35 Gulch, course S. Asc. 65 ft.
20.28 Spur, slopes E. Desc. 185 ft.
40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N of cor.

46.27 Gulch, course SW. Asc. 390 ft.
75.26 Spur, slopes N. Desc. 90 ft.
80.04 The cor. of secs. 11, 12, 13 and 14.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, and mesquite.

40.00 N. 0° 3' E., on a random line, bet. secs. 11 and 12.
Set temp. $\frac{1}{4}$ sec. cor.
79.50 Fall 13 lks. E. of orig. cor. of secs. 1, 2, 11 and 12, which
is a granite stone, 9 X 7 X 6 ins. above ground, firmly
set, marked and witnessed as described by the Surveyor-
General.

Thence
S. 0° 3' E., on a true line, bet. secs. 11 and 12.
Over mountainous land, through scattering undergrowth.
Asc. 530 ft.

34.58 Spur, slopes W. Desc. 55 ft.
39.50 Asc. 85 ft.
39.75 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W of cor.

47.00 Spur, slopes SW. Desc. 390 ft.
67.05 Gulch, course W. Asc. 240 ft.
79.50 The cor. of secs. 11, 12, 13 and 14.
Land, rough mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

From orig. cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp. hereinbefore described,

N. 0° 3' E., bet. secs. 34 and 35.
Over rolling land, through scattering undergrowth.
Desc. 115 ft.

34.92 Wash, course NW. Continue over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Completion of the
Subdivision of T. 8 N., R. 2 E.

180

Chains.

$\frac{1}{4}$
 S34 | S35
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 50.00 Desc. 150 ft. Enter mountainous land.
 63.77 Road to Orizaba Mine, brs. N.85°E. and SW.
 73.74 Moore's Creek, 20 lks. wide, 10 ins. deep, course N.80°W.
 Asc. 20 ft.
 74.85 Thence over rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of sec. 26, 27, 34 and 35, marked on brass cap

T8N R2E
 S27 | S26
 S34 | S35
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling, and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cat claw.

40.00 S.89°57'E., on a random line, bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.18 Intersect N. and S. line; 2 lks. N. of the cor. of secs. 25, 26, 35 and 36.
 Thence
 N.89°56'W., on a true line, bet. secs. 26 and 35.
 Over rolling land, through dense undergrowth.
 Desc. 110 ft.
 11.40 Wash, course S.10°W. Asc. 45 ft.
 17.34 Spur, slopes S. Desc. 55 ft.
 35.20 Thence over rolling land.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S26
 S35
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 65.22 Desc. 65 ft.
 67.73 Thence over rolling land.
 80.18 The cor. of secs. 26, 27, 34 and 35.
 Land, rolling.
 Soil, sandy loam, 6 ins. deep, gravelly subsoil; 3rd rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

N.0°3'E., bet. secs. 26 and 27.
 Over rolling & mountainous land, through scattering undergrowth.
 Asc. 20 ft.
 Desc. 20 ft.
 Asc. 35 ft.
 3.00 Spur, slopes W. Desc. 65 ft.
 5.00 Gulch, course W. Asc. 40 ft.
 10.62 Thence over rolling land.
 14.81 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
 19.75
 40.00

S27 | S26
 1917

Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 45.00 Asc. 80 ft.
 52.98 Low spur, slopes W. Desc. 75 ft.
 64.90 Little Squaw Creek, 15 lks. wide, 1 ft. deep, course W. Asc. 155 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, marked on brass cap

T8N	R2E
S22	S23
S27	S26
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, mesquite, cat claw and cactus.

40.00 S. 89°56'E., on a random line, bet. secs. 23 and 26. Set temp; ¼ sec. cor.
 80.11 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 23, 24, 25 and 26,

Thence
 N. 89°55'W., on a true line, bet. secs. 23 and 26.
 Over rough mountainous land, through scattering undergrowth.

Desc. 105 ft.
 7.84 Gulch, course SW. Asc. 10 ft.
 11.87 Spur, slopes S. Desc. 60 ft.
 16.79 Gulch, course SW. Asc. 50 ft.
 20.45 Desc. 110 ft.
 31.07 Gulch, course SW. Asc. 40 ft.
 36.07 Desc. 105 ft.
 40.05½ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

1	S23
4	S26
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 45.98 Gulch, course NW. Asc. 55 ft.
 51.96 Spur, slopes N. Desc. 130 ft.
 64.77 Little Squaw Creek, 12 lks. wide, 10 ins. deep, course SW. Asc. 130 ft.
 80.11 The cor. of secs. 22, 23, 26 and 27.
 Land, rough mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

N. 0°3'E., bet. secs. 22 and 23.
 Over mountainous land, through scattering undergrowth.
 Asc. 45 ft.
 4.95 Spur, slopes S. 80°W. Desc. 125 ft.
 19.76 Head of draw, course W. Asc. 20 ft.
 22.24 Spur, slopes W. Desc. 20 ft.
 29.72 Head of draw, course SW. Asc. 120 ft.
 38.53 Spur, slopes W. Desc. 70 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

Completion of
Subdivision of T. 8 N., R. 2 E.

Chains.

$\frac{1}{4}$
 S22 | S23
 1917

46.88 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 72.71 Gulch, course SW. Asc. 185 ft.
 80.00 Spur, slopes W. Desc. 90 ft.
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, marked on brass cap.

T8N R2E
 S15 | S14
 S22 | S23
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite, cactus and cat claw.

40.00 S. $89^{\circ}55'$ E., on a random line, bet. secs. 14 and 23.
 80.16 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 13, 14, 23 and 24.
 Thence
 N. $89^{\circ}59'$ W., on a true line, bet. secs. 14 and 23.
 Over rough mountainous land, through dense undergrowth.
 Desc. 90 ft.
 11.92 Wash, course S. 80° W.
 14.93 Same wash, course N. 80° W.
 19.93 Same wash, course SW. Asc. 95 ft.
 34.83 Spur, slopes N. Desc. 20 ft.
 40.08 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S14
 S23
 1917

50.00 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 59.98 Small wash, course N. Asc. 160 ft.
 65.70 Ridge, brs. W. and SE. Continue ascent, along ridge.
 80.16 Ridge, brs. E. and S. 70° W. Desc. 150 ft.
 The cor. of secs. 14, 15, 22 and 23.
 Land, rough mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

10.00 N. $0^{\circ}3'$ E., bet. secs. 14 and 15.
 30.84 Over rolling land, through scattering undergrowth.
 40.00 Desc. 105 ft.
 Thence over rolling land.
 Wash, course W.
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.

$\frac{1}{4}$
S15 | S14
1917

50.00 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
55.00 Asc. 35 ft.
80.00 Thence over rolling land.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
ground, for cor. of secs. 10, 11, 14 and 15, marked on
brass cap

T8N R2E
S10 | S11
S15 | S14
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 S. $89^{\circ}59'$ E., on a random line, bet. secs. 11 and 14.
80.22 Set temp. $\frac{1}{4}$ sec. cor.
Intersect the corners of secs. 11, 12, 13 and 14.
Thence
N. $89^{\circ}59'$ W., on a true line, bet. secs. 11 and 14.
Over rolling & mountainous land, through scattering under-
growth.
40.11 Desc. 340 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S11
S14
1917

55.30 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
80.22 of cor.
Asc. 100 ft.
Spur, slopes W. Desc. 100 ft.
The cor. of secs. 10, 11, 14 and 15.
Land, rolling & mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 N. $0^{\circ}3'$ E., on a random line, bet. secs. 10 and 11.
79.73 Set temp. $\frac{1}{4}$ sec. cor.
Fall 14 lks. E. of the cor. of secs. 2, 3, 10 and 11,
which is a sandstone, 7 X 6 X 4 ins. above ground,
firmly set, marked and witnessed as described by the
Surveyor-General.
Thence
S. $0^{\circ}3'$ E., on a true line, bet. secs. 10 and 11.
Over rolling land, through scattering undergrowth.
Desc. 140 ft.
33.32 Gulch, course NW. Asc. 50 ft.
37.23 Spur, slopes W. Desc. 70 ft.
39.86 $\frac{1}{2}$ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Completion of the
Subdivision of T. 8 N., R. 2 E.

222A

Chains.

$\frac{1}{4}$
 S10 | S11
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 45.85 Gulch, course NW. Asc. 55 ft.
 64.73 Thence over rolling land.
 79.73 The cor. of secs. 10, 11, 14 and 15.
 Land, rolling.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

From original cor. of secs. 3, 4, 33 and 34, on the S. bdy. of Tp., hereinbefore described,

N. $0^{\circ}2'E.$, bet. secs. 33 and 34.
 Over rolling land, through scattering undergrowth.
 Desc.
 0.70 Small wash, course S. $70^{\circ}W.$ Asc. 55 ft.
 9.96 Spur, slopes W. Desc. 50 ft.
 20.90 Gulch, course S. $80^{\circ}W.$ Asc. 90 ft.
 32.80 Thence over rolling land.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S33 | S34
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 41.00 Desc. 115 ft.
 52.56 Gulch, course W. Asc. 75 ft.
 61.37 Desc. 75 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, marked on brass cap

T8N R2E
 S28 | S27
 S33 | S34
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling.
 Soil, rocky, 3rd and 4th rates.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 S. $89^{\circ}58'E.$, on a random line, bet. secs. 27 and 34.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.18 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 26, 27, 34 and 35.
 Thence
 West on a true line, bet. secs. 27 and 34.
 Over rolling land, through scattering undergrowth.
 Desc. 25 ft.
 9.27 Moore's Gulch, course NW. Asc. 25 ft.
 11.20 Thence over rolling land.
 33.20 Desc. 35 ft.
 36.68 Wash, course NW. Thence over rolling land.
 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Completion of the
Subdivision of T. 8 N., R. 2 E.

23.25

Chains.

S27
S34
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

- 53.73 Road, brs. N. to Mayer and S. to Phoenix.
- 57.13 Desc. 40 ft.
- 63.49 Wash, course N.20°W. Asc. 50 ft.
- 66.39 Spur, slopes N. Desc. 45 ft.
- 69.36 Wash, course N. Asc. 35 ft.
- 73.33 Desc. 40 ft.
- 75.22 Wash, course N. Asc. 25 ft.
- 80.18 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.
Soil, rocky, 3rd and 4th rate.
No timber.
Undergrowth, palo verde and mesquite.

N.0°2'E., bet. secs. 27 and 28.
Over rolling land, through scattering undergrowth.
Desc. 125 ft.

- 23.54 Moore's Gulch, 20 lks. wide, 1 ft. deep, course N.75°W.
Asc. 35 ft.

- 34.80 Desc. 45 ft.
- 38.76 Gulch, course W. Asc. 90 ft.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼
S28 | S27
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

- 64.97 Desc. 105 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, marked on brass cap

T8N R2E
S21 | S22
S28 | S27
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde and mesquite.

- 40.00 East on a random line, bet. secs. 22 and 27.
- 80.18 Set temp. ¼ sec. cor.
Intersect N. and S. line, 2 lks. S. of the cor. of secs. 22, 23, 26 and 27.

Thence
S.89°59'W., on a true line, bet. secs. 22 and 27.
Over mountainous land, through dense undergrowth.
Asc. 20 ft.

- 2.48 Spur, slopes SW. Desc. 155 ft.
- 16.70 Head of draw, course NW. Asc. 30 ft.
- 25.16 Spur, slopes S. Desc. 75 ft.
- 36.60 Thence over rolling land.
- 40.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

24. 26

Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.

$\frac{1}{4}$ S22
 $\frac{1}{4}$ S27
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
55.00 Desc. 35 ft.
60.00 Thence over rolling land.
62.37 Road, brs. N. to Mayer and SW. to Phoenix.
75.97 Little Squaw Creek, 25 lks. wide, 1 ft. deep, course N.75°W.
80.18 The cor. of secs. 21, 22, 27 and 28.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, dense palo verde, mesquite and cactus.

N.0°2'E., bet. secs. 21 and 22.
Over rolling & mountainous land, through scattering undergrowth.
Desc.
1.40 Little Squaw Creek, 25 lks. wide, 1 ft. deep, course NW.
Asc. 150 ft.
15.60 Desc. 100 ft.
21.24 Gulch, course W. Asc. 115 ft.
28.90 Desc. 45 ft.
40.00 Draw, course SE.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S21 | S22
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Asc. 40 ft.
43.93 Spur, slopes NE. Desc. 190 ft.
51.14 Gulch, course N.80°W. Asc. 25 ft.
54.44 Low spur, slopes W. Desc. 50 ft.
67.91 Gulch, course SW. Asc. 65 ft.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, marked on brass cap

T8N R2E
S16 | S15
S21 | S22
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, rolling, and mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

N.89°59'E., on a random line, bet. secs. 15 and 22.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 14, 15, 22 and 23.
Thence
N.89°58'W., on a true line, bet. secs. 15 and 22.
Over rolling & mountainous land, through scattering undergrowth.
Desc. 115 ft.
19.88 Wash, course N. Asc. 15 ft.
21.85 Desc.

Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.

24.87 Wash, course N. Asc. 75 ft.
 39.77 Spur, slopes NW. Desc. 165 ft.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S15
 $\frac{1}{4}$ S22
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

55.24 Road, brs. N. to Canyon and S. to Phoenix.
 56.14 Gulch, course S. 20° W. Asc. 120 ft.
 65.82 Spur, slopes SW. Desc. 165 ft.
 74.11 Gulch, course SW. Asc. 40 ft.
 80.10 The cor. of secs. 15, 16, 21 and 22.
 Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

N. $0^\circ 2'$ E., bet. secs. 15 and 16.
 Over mountainous land, through dense undergrowth.
 Asc. 75 ft.

12.35 Desc. 35 ft.
 14.85 Draw, course E. Asc. 110 ft.
 20.61 Ridge, brs. NE. and SW. Desc. 230 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S16 | S15
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

49.87 Wash, course W. Asc. 50 ft.
 59.81 Spur, slopes W. Desc. 100 ft.
 64.48 Gulch, course SW. Asc. 190 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 9, 10, 15 and 16, marked on
 brass cap

T8N R2E
 S 9 | S10
 S16 | S15
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 S. $89^\circ 58'$ E., on a random line, bet. secs. 10 and 15.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.32 Intersect N. and S. line, 9 lks. S. of the cor. of secs.
 10, 11, 14 and 15.

Thence
 S. $89^\circ 58'$ W., on a true line, bet. secs. 10 and 15.
 Over rolling land, through dense undergrowth.

20.37 Desc. 50 ft.
 27.35 Gulch, course NW. Asc. 45 ft.
 40.16 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.

$\frac{1}{4}$ S10
S15
1917

64.70 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.
Desc. 195 ft.
72.46 Road, brs. N. to Canyon and S.10°W. to Phoenix.
80.32 Gulch, course SW. Asc. 95 ft.
The cor. of secs. 9, 10, 15 and 16.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00 N.0°2'E., on a random line, bet. secs. 9 and 10.
79.81 Set temp. $\frac{1}{4}$ sec. cor.
Fall 16 lks E. of original cor. of secs. 9, 10, 15 and 16, which
is a sandstone, 6 X 5 X 4 ins. above ground, firmly set,
marked and witnessed as described by the Surveyor-
General.

Thence
24.87 S.0°5'E., on a true line, bet. secs. 9 and 10.
39.90 $\frac{1}{2}$ Over rolling land, through dense undergrowth.
Desc. 85 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S 9 $\frac{1}{4}$ S10
1917

57.80 And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.
60.30 Thence over rolling and mountainous land.
64.90 Asc. 25 ft.
Desc. 105 ft.
77.30 Small creek, 2 lks. wide, 2 ins. deep, course SW. Asc.
79.81 185 ft.
East edge of butte. Desc. 20 ft.
The cor. of secs. 9, 10, 15 and 16.
Land, rolling and mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

10.92 From the reestablished cor. of secs. 45, 5, 32 and 33, on a
12.40 S. bdy. of the Tp., hereinbefore described,
24.91 N.0°2'E., bet. secs. 32 and 33.
28.00 Over rolling land, through dense undergrowth.
40.00 Desc. 55 ft.
Gulch, course NW. Asc. 15 ft.
Thence over gently rolling land.
Small draw, course W. Asc. 20 ft.
Thence over rolling land.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

S32 $\frac{1}{4}$ S33
1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Completion of the
Subdivision of T. 8 N., R. 2 E.

27. 29

Chains.

60.00
80.00

Asc. 185 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, marked on brass cap

T8N R2E
S29 | S28
S32 | S33
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

40.00
79.90

East . . . on a random line, bet. secs. 28 and 33.
Set temp. ¼ sec. cor.
Intersect N. and S. line, 10 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Thence
N.89°56'W., on a true line, bet. secs. 28 and 33.
Over rolling land, through dense undergrowth.

8.00
14.93
21.45
24.90
39.95

Desc. 40 ft.
Wash, course N. Asc.
Desc. 15 ft.
Wash, course N. Asc. 30 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S28
¼ S33
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

50.23
66.21
70.20
79.90

Cor. stands on low spur, slopes N. Desc. 25 ft.
Wash, course S. Asc. 35 ft.
Low spur, slopes S. Desc. 20 ft.
Wash, course S. Asc. 155 ft.
The cor. of secs. 28, 29, 32 and 33.

Land, rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

10.77
23.15
30.52
36.72
40.00

N.0°2'E., bet. secs. 28 and 29.
Over mountainous land, through dense undergrowth.
Asc. 135 ft.
Spur, slopes NE. Desc. 240 ft.
Gulch, course NW. Asc. 105 ft.
Spur, slopes W. Desc. 130 ft.
Gulch, course SW. Asc. 180 ft.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S29 | S28
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

43.71
80.00

Spur, brs. NW. and E. Desc. 315 ft.
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, marked on

Completion of Subdivision of
T. 8 N., R. 2 E.

230

Chains.

brass cap

T8N	R2E
S20	S21
S29	S28
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

- A willow, 15 ins. diam., brs. S.3¾°E., 392 lks. dist., marked T8N R2E S28 BT.
- A mesquite, 10 ins. diam., brs. S.66½°W., 358 lks. dist., marked T8N R2E S29 BT.
- A willow, 37 ins. diam., brs. N.87°W., 422 lks. dist., marked T8N R2E S20 BT.

Land, rolling & mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, palo verde, mesquite and cactus.

40.00

S.89°56'E., on a random line, bet. secs. 21 and 28.

Set temp. ¼ sec. cor.

80.10

Intersect N. and S. line, 16 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence

N.89°49'W., on a true line, bet. secs. 21 and 28.

Over mountainous land, through dense undergrowth.

Asc. 200 ft.

7.96

Spur, slopes N. David C. Heckle's house brs. N.72°10'W. Desc. 125 ft.

14.16

Gulch, course N. Asc. 110 ft.

20.95

Spur, slopes N. Desc. 270 ft.

21.45

David C. Heckle's house brs. N.65°14'W.

40.05

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼	S21
	S28
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

44.83

Left bank of Agua Fria River, brs. NE. and SW.

46.83

Right bank of Agua Fria River, brs. NE. and SW.

50.35

Wire fence, brs. NE. and SW.

53.33

Wire fence, brs. NE. and SW. Asc. 35 ft.

54.80

Thence over rolling land.

64.50

Fence, brs. NW. and SE.

74.80

Desc. 55 ft.

77.67

Agua Fria River, 2 chs. wide, 2 ft. deep, course N.75°W.

80.10

The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, palo verde, mesquite and cactus.

1.00

N.0°2'E., bet. secs. 20 and 21.

3.50

Over broken mountainous land, through dense undergrowth.

Left bank of Agua Fria River, brs. NE. and SW.

16.11

Ridge, brs. E. and W. Desc. 65 ft.

25.54


Wash, course W. Thence over rolling land.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap


Completion of the
Subdivision of T. 8 N., R. 2 E.

Chains.



And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

- 45.00 Asc. 105 ft.
- 54.86 Spur, slopes E. Desc. 30 ft.
- 59.85 Asc. 50 ft.
- 66.25 Spur, slopes E. Desc. 80 ft.
- 69.54 Gulch, course E. Asc. 170 ft.
- 78.10 Spur, slopes E. Desc. 45 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, broken mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cat claw.

- 40.00 S. 89° 49' E., on a random line, bet. secs. 16 and 21.
- 79.83 Set temp. ¼ sec. cor.
Intersect N. and S. line, 5 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence
N. 89° 47' W., on a true line, bet. secs. 16 and 21.
Over mountainous land, through scattering undergrowth.
Asc. 80 ft.

- 9.85 Spur, slopes SW. Desc. 105 ft.
- 20.13 Gulch, course S. Asc. 215 ft.
- 37.28 Spur, slopes S. Desc. 75 ft.
- 39.91½ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

- 40.00 Wash, course SW. Asc. 65 ft.
- 43.55 Spur, slopes S. Desc. 355 ft.
- 57.05 Agua Fria River, 1.50 chs. wide, 2 ft. deep, course S. 10° W.
Asc. 330 ft.
- 79.83 The cor. of secs. 16, 17, 20 and 21.
Land, mountainous.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde, mesquite and cactus.

- 7.66 N. 0° 2' E., bet. secs. 16 and 17.
Over mountainous land, through scattering undergrowth.
Desc. 155 ft.
- 27.22 Gulch, course E. Asc. 445 ft.
- 40.00 Spur, slopes SW. Continue ascent.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

30.32

Completion of
Subdivision of T. 8 N., R. 2 E.

Chains.

$\frac{1}{4}$
 S17 | S16
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 41.93 Spur, slopes E. Desc. 100 ft.
 54.74 Head of draw, course E. Asc. 15 ft.
 56.42 Low spur, slopes E. Desc. 40 ft.
 69.68 Gulch, course SE. Asc. 45 ft.
 74.65 Thence over rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, marked on brass cap

T8N R2E
 S 8 | S 9
 S17 | S16
 1917

And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde and mesquite.

40.00 S. $89^{\circ}47'E.$, on a random line, bet. secs. 9 and 16.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.80 Intersect N. and S. line, 19 lks. N. of the cor. of secs. 9, 10, 15 and 16.
 Thence
 N. $89^{\circ}39'W.$, on a true line, bet. secs. 9 and 16.
 Over mountainous land, through dense undergrowth.
 Asc. 25 ft.
 2.41 Spur, slopes S. Desc. 240 ft.
 18.64 Gulch, course S. Asc. 260 ft.
 30.34 Desc. 125 ft.
 35.00 Draw, course S. Asc. 90 ft.
 39.90 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 9
 S16
 1917


And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Thence along S. slope.
 40.54 Desc. 235 ft.
 46.04 Agua Fria River, 1.60 chs. wide, 2 ft. deep, course SW. Asc. 510 ft.
 79.80 The cor. of secs. 8, 9, 16 and 17.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 N. $0^{\circ}2'E.$, on a random line, bet. secs. 8 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.56 19 lks. E. of original cor. of secs. 4, 5, 8 and 9, hereinafter described.
 Thence
 S. $0^{\circ}2'E.$, on a true line, bet. secs. 8 and 9.
 Over mountainous land, through scattering undergrowth.
 Desc. 110 ft.

Completion of
Subdivision of Township 8 North, Range 2 East.

Chains.

11.31 Creek, 7 lks. wide, 4 ins. deep, course E. Ascend 160 ft.
30.00 Spur, slopes NE. Descend 360 ft.
39.78 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Thence over rolling land.
46.11 Descend 25 ft.
53.41 Gulch, course E. Ascend 540 ft.
74.80 Spur, slopes E. Descend 100 ft.
74.88 Kay Mine, brs. N. $35^{\circ}9'$ E.
79.56 The cor. of secs. 8, 9, 16 and 17.
Land, mountainous and rolling.
Soil, rocky, 4th rate.
No timber.
Undergrowth, palo verde and mesquite.

Resurvey of W. bdy. of sec. 4, Township 8 North, Range 2 East.

From the original cor. of secs. 4, 5, 8 and 9, which is a
slate stone, 5x8x8 ins. above ground, firmly set, marked
and witnessed, as described by the surveyor general.
39.65 North, on retracement, along W. bdy. of sec. 4.
Fall 4 lks. W. of the original $\frac{1}{4}$ sec. cor., which is a sand-
stone, 7x4x4 ins. above ground, firmly set, marked and
witnessed as described by the surveyor general.

The true course and distance of S. $\frac{1}{2}$ of W. bdy. of sec. 4 is
therefore N. $0^{\circ}3'$ E. 39.65 chs.

58.82 Continue line and measurement on N. $\frac{1}{2}$ of W. bdy. of sec. 4.
Fall 16 lks. W. of original closing cor. of secs. 4 and 5,
hereinbefore described.


The true course and distance of N. $\frac{1}{2}$ of W. bdy. of sec. 4 is
therefore N. $0^{\circ}21'$ E., 19.17 chs.

Alter the original cor. of secs. 4, 5, 8 and 9, hereinbe-
fore described to refer to secs. 4 and 9 only, as fol-
lows:

Destroy the two bearing trees W. of line, tear down the
old mound of stone, and build a new mound, 2 ft. base,
 $1\frac{1}{2}$ ft. high, E. of cor.

Thence,
N. $0^{\circ}3'$ E., on true line on S. $\frac{1}{2}$ of W. bdy. of sec. 4.
Over mountainous land, thru scattering undergrowth.
Ascend.

0.44 (80.00 chs. N. of cor. of secs. 8, 9, 16 and 17 and 40.22 chs.
N. of $\frac{1}{4}$ sec. cor. of secs. 8 and 9),
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for reestablished cor. of secs. 5 and 8, marked
on brass cap,




and raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high, W. of
cor.

Continue line and measurement.
Ascend 155 ft.
4.81 Spur, slopes E. Descend 55 ft.
9.73 Draw, course E. Ascend 110 ft.
17.34 Spur, slopes E. Descend 80 ft.
21.46 Draw, course E. Ascend 130 ft.
33.12 Spur, slopes E. Thence over very broken land.
39.65 Intersect the original $\frac{1}{4}$ sec. cor., hereinbefore described.
Alter this cor. to refer to sec. 4 only, by destroying the
mound of stone west of the cor., and building a new
mound, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

3432. Resurvey of W. bdy. of sec. 4, Township 8 North, Range 2 East.

Chains.

0.79 Thence N.0°21'E., on a true line, on N. $\frac{1}{2}$ of W. bdy. of sec. 4, (40.00 chs. N.0°3'E. from reestablished cor. of secs. 5 and 8) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 5, marked on brass cap,




19.17 and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W of cor.
Intersect the original closing cor. of secs. 4 and 5, on 2nd Std. Par. N., hereinbefore described.
Land, rough, mountainous.
Soil, very rocky clay, 3rd rate.
No timber.
Undergrowth, mesquite, palo verde and cactus.

Completion of Subdivision of Township 8 North, Range 2 East.
-(continued)

From the reestablished cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described, N.0°1'E., bet. secs. 31 and 32.
Over mountainous land, thru. dense undergrowth.
Ascend 15 ft.
4.98 Spur, slopes W. Descend 30 ft.
9.66 Road, brs. E. and W.
11.96 Draw, course W. Ascend 25 ft.
19.95 Spur, slopes W. Descend 75 ft.
24.80 Creek, 5 lks. wide, 6 ins. deep, course W. Ascend 50 ft.
28.70 Thence over rolling land.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
47.00 Descend 95 ft.
50.62 Left bank of the Agua Fria river, brs. NE. and SW.
52.62 Right bank of Agua Fria river, brs. NE. and SW. Asc. 95 ft.
72.37 Spur, slopes E. Descend 85 ft.
75.16 Gulch, course E. Ascend 45 ft.
80.00 Set an iron post, 3 ft. long; 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
Land, rolling and mountainous.
Soil, rocky, 4th rate.
No timber. Undergrowth, palo verde, mesquite and cactus.

E. East line, on a random line, bet. secs. 29 and 32.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.02 Intersect N. & S. line, 40 lks. N. of cor. of secs. 28, 29, 32 & 33.
Thence N.89°43'W., on a true line, bet. secs. 29 and 32.
Over rolling and mountainous land, thru. scattering undergrowth. Ascend 115 ft.
5.60 Spur, slopes S. Descend 65 ft.
10.50 Draw, course SW. Ascend 30 ft.
13.00 Spur, slopes SW. Descend 60 ft.
18.48 Draw, course NW. Ascend 40 ft.

Completion of
Subdivision of T. 8 N., R. 2 E.

<p>Chains. 22.10 25.35 30.15 40.01</p>	<p>Spur, slopes N. Desc. 35 ft. Wash, course NW. Asc. 50 ft. Spur, slopes SW. Desc. 410 ft. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S29 $\frac{1}{4}$ S32 1917 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p>
<p>57.50 69.35 75.05 80.02</p>	<p>Agua Fria River, 2 chs. wide, 2 ft. deep, course SW. Asc. 105 ft. Desc. 70 ft. Gulch, course S. Asc. 40 ft. The cor. of secs. 29, 30, 31 and 32, Land, mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, palo verde, mesquite and cactus.</p>
<p>40.00 74.15</p>	<p>W. West . . . on a random line; bet. secs. 30 and 31. Set temp. $\frac{1}{4}$ sec. cor. Intersect W. bdy. of Tp., 5 lks. S. of the reestablished cor. of secs. 30 and 31, hereinbefore described. Thence S. $89^{\circ}58'E.$, on a true line, bet. secs. 30 and 31. Over rolling & mountainous land, through scattering undergrowth. Desc. 35 ft.</p>
<p>9.97 18.12 32.50 34.15</p>	<p>Gulch, course SE. Asc. 120 ft. Spur, slopes SE. Desc. 160 ft. Gulch, course SE. Asc. 65 ft. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S30 $\frac{1}{4}$ S31 1917 </p> <p>And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p>
<p>49.09 69.93 74.15</p>	<p>Spur, slopes S. Desc. 115 ft. Gulch, course SE. Asc. 20 ft. The cor. of secs. 29, 30, 31 and 32. Land, rolling & mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, palo verde, mesquite and cactus.</p>
<p>11.70 28.86 33.65 38.62 40.00</p>	<p>N. $0^{\circ}1'E.$, bet. secs. 29 and 30. Over mountainous land, through dense undergrowth. Asc. 185 ft. Desc. 200 ft. Gulch, course E. Asc. 85 ft. Spur, slopes E. Desc. 35 ft. Head of draw, course E. Asc. 55 ft. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;"> $\frac{1}{4}$ S30 S29 1917 </p>

34. 36

Completion of
Subdivision of T. 8 N., R. 2 E.

Chains.

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 41.64 Spur, slopes E. Desc. 95 ft.
 45.66 Draw, course SE. Asc. 70 ft.
 56.62 Head of draw, course SW. Asc. 75 ft.
 70.00 Gulch, course N.85°E. Asc. 55 ft.
 72.95 Spur, slopes E. Desc. 70 ft.
 75.29 Gulch, course E. Asc. 115 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, marked on brass cap

T8N R2E
 S19 | S20

 S30 | S29
 1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 S.89°43'E., on a random line, bet. secs. 20 and 29.
 Set temp. ¼ sec. cor.
 80.10 Intersect N. and S. line, at the cor. of secs. 20, 21, 28 and 29.
 Thence
 N.89°43'W., on a true line, bet. secs. 20 and 29.
 Over rolling bottomland, through dense undergrowth.
 22.50 Agua Fria River, course SW. Asc. 80 ft.
 33.91 Spur, slopes S. Desc. 70 ft.
 37.77 Gulch, course S. Asc. 55 ft.
 39.89 Spur, slopes S. Desc. 20 ft.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

S20
 S29
 1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N of cor.
 40.96 Gulch, course S. Asc. 145 ft.
 59.79 Spur, slopes S. Desc. 45 ft.
 64.75 Thence over rolling land.
 74.74 Gulch, course SE. Asc. 95 ft.
 80.10 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling and mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 N.89°58'W., on a random line, bet. secs. 19 and 30.
 Set temp. ¼ sec. cor.
 74.09 Intersect W. bdy. of Tp., 14 lks. N. of the reestablished cor. of secs. 19 and 30, hereinbefore described.
 Thence
 N.89°56'E., on a true line, bet. secs. 19 and 30.
 Over rough mountainous land, through scattering undergrowth.
 Desc. 180 ft.
 7.35 Gulch, course SE. Asc. 80 ft.
 18.74 Spur, slopes SE. Desc. 605 ft.
 34.09 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap,
 and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

¼ S19
 S30
 1917


Completion of
Subdivision of T. 8 N., R. 2 E.

5. 37


Chains.

36.35 Gulch, course S. Asc. 220 ft.
 44.80 Spur, slopes S.20°E. Desc. 350 ft.
 67.13 Gulch, course SE. Asc. 20 ft.
 72.10 Spur, slopes SE. Desc. 20 ft.
 74.09 The cor. of secs. 19, 20, 29 and 30.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

N.0°1'E., bet. secs. 19 and 20.
 Over mountainous land, through scattering undergrowth.
 Desc. 140 ft.
 5.96 Gulch, course SE. Asc. 385 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 43.60 Desc. 350 ft.
 53.65 Gulch, course E. Asc. 105 ft.
 58.38 Spur, slopes E. Desc. 110 ft.
 68.16 Gulch, course E. Asc. 105 ft.
 72.89 Spur, slopes E. Desc. 160 ft.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 17, 18, 19 and 20, marked on
 brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 S.89°43'E., on a random line, bet. secs. 17 and 20.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line, 7 lks. N. of the cor. of secs.
 16, 17, 20 and 21.
 Thence
 N.89°40'W., on a true line, bet. secs. 17 and 20.
 Over rolling & mountainous land, through dense undergrowth.
 Asc. 80 ft.
 3.80 Spur, slopes SE. Desc. 75 ft.
 13.69 Wash, course SE. Asc. 50 ft.
 19.66 Ridge, brs. NE. and SW. Desc. 155 ft.
 36.42 Gulch, course NW. Asc. 170 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
 of cor.

Completion of
Subdivision of T. 8 N., R. 2 E.

36-78

Chains.	
44.78	Spur, slopes SW. Desc. 270 ft.
60.35	Creek, 6 lks. wide, 3 ins. deep, course S. Thence over rolling land.
66.65	Creek, 6 lks. wide, 3 ins. deep, course N.80°E.
74.15	Creek, course S.75°E.
80.00	The cor. of secs. 17, 18, 19 and 20. Land, rolling & mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, palo verde, mesquite and cactus.
40.00	S.89°56'W., on a random line, bet. secs. 18 and 19. Set temp. $\frac{1}{4}$ sec. cor.
74.15	Intersect W. bdy. of Tp., 19 lks. S. of the reestablished cor. of secs. 18 and 19, hereinbefore described. Thence S.89°56'E., on a true line, bet. secs. 18 and 19. Over mountainous land, through scattering undergrowth. Desc. 50 ft.
5.25	Draw, course N. Asc. 165 ft.
14.80	Spur, slopes N. Desc. 180 ft.
24.40	Draw, course N. Asc. 80 ft.
29.24	Spur, slopes N. Desc. 600 ft.
34.15	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\begin{array}{c} \frac{1}{4} \text{ S18} \\ \frac{1}{4} \text{ S19} \\ 1917 \end{array}$
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
74.15	The cor. of secs. 17, 18, 19 and 20. Land, mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, palo verde, mesquite, cactus and cat claw.
	N.0°1'E., bet. secs. 17 and 18. Over broken land, through dense undergrowth. Desc. 20 ft.
9.49	Creek, 7 lks. wide, 4 ins. deep, course SE. Asc. 60 ft.
15.00	Thence over rolling land.
19.96	Gulch, course SW. Asc. 25 ft.
25.00	Thence over rolling land,
30.00	Same draw, course S.15°E. Asc. 115 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\begin{array}{c} \frac{1}{4} \\ \text{S18} \text{ } \text{S17} \\ \\ 1917 \end{array}$
	And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
50.91	Ridge, brs. E. and W. Desc. 60 ft.
54.81	Wash, course N.70°E. Asc. 115 ft.
62.62	Spur, slopes E. Desc. 325 ft.
73.85	Creek, 5 lks. wide, 6 ins. deep, course N.70°E. Asc. 90 ft.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, marked on brass cap

Completion of
Subdivision of T. 8 N., R. 2 E.

339

Chains.

T8N	R2E
S 7	S 8
S18	S17
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, rolling & mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cholla.

40.00 S.89°40'E., on a random line, bet. secs. 8 and 17.
 Set temp. ¼ sec. cor.
 80.10 Intersect N. and S. line, 21 lks. S. of the cor. of secs. 8, 9, 16 and 17.
 Thence
 N.89°49'W., on a true line, bet. secs. 8 and 17.
 Over mountainous land, through dense undergrowth.
 Asc. 99 ft.
 2.80 Desc. 40 ft.
 5.75 Gulch, course SE. Asc. 115 ft.
 12.69 Ridge, brs. NE. and SW. Desc. 130 ft.
 22.13 Gulch, course S. Asc. 125 ft.
 40.05 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S 8
¼ S17
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 Cor. stands on ridge, brs. NE. and SW. Desc. 515 ft.
 73.43 Gulch, course S. Asc. 65 ft.
 80.10 The cor. of secs. 7, 8, 17 and 18.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

40.00 N.89°56'W., on a random line, bet. secs. 7 and 18.
 Set temp. ¼ sec. cor.
 73.98 Intersect W. bdy. of Tp., at the reestablished cor. of secs. 7 and 18, hereinbefore described.
 Thence
 S.89°56'E., on a true line, bet. secs. 7 and 18.
 Over mountainous land, through dense undergrowth,
 Asc. 30 ft.
 1.95 Ridge, brs. N. and S. Desc. 415 ft.
 33.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼ S 7
¼ S18
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
 34.43 Gulch, course SE. Asc. 45 ft.
 37.92 Spur, slopes S. Desc. 50 ft.
 44.87 Wash, course S. Asc. 30 ft.
 48.87 Spur, slopes SE. Desc. 85 ft.
 55.70 Creek, 5 lks. wide, 4 ins. deep, course SE. Asc. 95 ft.


Completion of
Subdivision of T. 8 N., R. 2 E.

Chains.

66.16 Spur, slopes S. Desc. 90 ft.
 70.93 Asc. 75 ft.
 73.98 The cor. of secs. 7, 8, 17 and 18.
 Land, rough mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, dense palo verde, mesquite and cactus.


N.0°1'E., bet. secs. 7 and 8.
 Over mountainous land, through scattering undergrowth.
 Desc. 20 ft.

9.49 Draw, course S.20°W. Asc. gradually, 205 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the
 ground, for cor. of secs. 5, 6, 7 and 8, marked on brass cap




And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde and mesquite.

40.00 S.89°49'E., on a random line, bet. secs. 5 and 8.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.74 Intersect N. and S. line, 5 lks. S. of the reestablished
 cor. of secs. 5 and 8, hereinbefore described.

Thence
 N.89°51'W., on a true line, bet. secs. 5 and 8.
 Over mountainous land, through dense undergrowth.
 Asc. 120 ft.

11.72 Spur, slopes S. Desc. 205 ft.
 20.03 Gulch, course S. Asc. 490 ft.
 39.87 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. off cor.


41.90 Kay Mine brs. S.74°51'E.
 51.88 Spur, slopes S. Desc. 55 ft.
 54.54 Draw, course SE. Asc. 165 ft.
 65.72 Spur, slopes S.10°W. Desc. 250 ft.
 79.57 Gulch, course S.15°E. Asc.
 79.74 The cor. of secs. 5, 6, 7 and 8.
 Land, mountainous.
 Soil, rocky, 4th rate.
 No timber.
 Undergrowth, palo verde, mesquite and cactus.

Completion of the Subdivision of Township 8 North, Range 2 East.

Chains.


40.00 N.89°56'W., on a random line, bet. secs.6 and 7.
Set temp. 1/4 sec.cor.
73.87 Intersect W. bdy.of Tp., at the reestablished cor.of secs.
6 and 7, hereinbefore described.

Thence.
S.89°56'E., on a true line, bet. secs.6 and 7.
Over mountainous land, thru.scattering timber and under-
growth.
Ascend 210 ft.
15.50 Spur, slopes SE. Descend 730 ft.
33.87 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for 1/4 sec.cor., marked on brass cap,




43.06 and raise a mound of stone, 2ft.base, 1 1/2 ft.high, N.of cor.
Creek, 6 lks.wide, 6 ins. deep, course S. Ascend 225 ft.
57.34 Spur, slopes S. Descend 155 ft.
65.66 Gulch, course S. Ascend 40 ft.
69.11 Spur, slopes S. Descend 100 ft.
73.87 The cor.of secs.5,6,7 and 8.
Land, mountainous.
Soil, rocky, 4th rate.
Timber, sycamore.
Undergrowth, cedar, mesquite, palo verde and cactus.

N.0°1'E., on a true line, bet. secs.5 and 6.
Over rough, mountainous land, thru. scattering undergrowth.
Ascend 55 ft.
6.94 Ridge, brs.E. and W. Descend 80 ft.
10.74 Gulch, course NE. Ascend 60 ft.
14.75 Spur, slopes NE. Descend 120 ft.
29.60 Wash, course NE. Ascend 20 ft.
34.59 Spur, slopes NE. Descend 80 ft.
40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for 1/4 sec.cor., marked on brass cap,



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W.
of cor.
40.15 Wash, course N. 25° W. Ascend 25 ft.
41.14 Spur, slopes W. Descend 45 ft.
43.03 Gulch, course NE. Ascend 25 ft.
46.15 Descend 30 ft.
50.51 Creek, 7 lks.wide, 5 ins. deep, course E. Ascend 115 ft.
58.31 Intersect the 2nd Standard Parallel North, 4.90 chs. N.89°
47' W.of the reestablished standard cor.of secs.31 and
32, hereinbefore described.
At the point of intersection,
Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in the
ground, for closing cor.of secs. 5 and 6, marked on
brass cap,



and raise a mound of stone, 2 ft.base, 1 1/2 ft.high, S.of cor.
Land, rough and mountainous.
Soil, rocky, 4th rate. No timber.
Undergrowth, palo verde, and mesquite.

Boundaries of that portion of Township 8 North, Range 2 East, subdivided under this Group.

Latitudes, departures, and closing errors.

Line designated.	True bearing.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary.	N.89°56'W.	39.91	.05			39.91
	N.89°57'W.	39.76	.03			39.76
	N.89°51'W.	39.95	.10			39.95
	S.89°58'W.	40.13		.02		40.13
	N.89°56'W.	40.00	.05			40.00
	West,	40.15				40.15
	N.89°52'W.	160.86	.37			160.86
	N.89°55'W.	40.17	.06			40.17
	N.89°51'W.	33.11	.09			33.11
West boundary,	North,	458.76	458.76			
North boundary, (2nd. Std. Par. N.)	S.89°47'E.	153.78		.58	153.78	
Subdivisional boundary,	S.0°21'W.	19.17		19.17		.12
	S.0°3'W.	39.65		39.65		.04
	East,	320.00			320.00	
East boundary,	S.0°7'W.	39.90		39.90		.08
	S.0°3'W.	40.03		40.03		.03
	S.0°5'W.	39.91		39.91		.06
	S.0°14'W.	40.00		40.00		.16
	S.0°8'W.	39.98		39.98		.09
	S.0°5'W.	40.05		40.05		.05
	S.0°6'W.	40.05		40.05		.07
	S.0°7'W.	39.87		39.87		.08
	S.0°5'W.	39.86		39.86		.06
S.0°3'W.	39.86		39.86		.03	
Convergency,					.43	
Totals,			459.50 458.93	458.93	474.21	474.92 474.21
Error in latitude,			0.58			
Error in departure,						0.71

General Description.

This township lies on the valley of the Agua Fria River, and, although none of it is very high, it is badly cut up and rough. There is very little land of any value for agriculture, as the ground is all very rocky.

There is no timber, except a few scattering trees along the river, but there is quite a dense growth of palo verde and mesquite undergrowth, and many varieties of cactus. Forage if any kind is very scattering.

There appears to be many outcroppings of mineral in the township and there are many prospects and the "Kay" mine is producing ore which they are going to ship.

There is only one settler in the portion of this township which was surveyed at this time, David Heckle, on the Agua Fria River.

Book "G"

Group 61 - - - Arizona.

DATE DIAGRAM

T. 8 N., R. 2 E.

		2ND STANDARD PARALLEL NORTH					
RESURVEYED		RESURVEYED					
3/14/17		3/14/17					
RESURVEYED	3/18/17	6 3/11/17	5 3/11/17	4	3	2	1
	3/18/17	7 3/11/17	8 3/2/17	9 3/2/17	10 2/27/17	11 2/26/17	12 2/24/17
	2/28/17	18 3/7/17	17 3/7/17	16 3/7/17	15 3/7/17	14 3/7/17	13 3/7/17
	2/28/17	19 3/3/17	20 3/3/17	21 3/3/17	22 3/5/17	23 3/5/17	24 3/5/17
	2/28/17	30 3/3/17	29 3/3/17	28 3/5/17	27 3/5/17	26 3/5/17	25 3/5/17
	2/28/17	31 2/28/17	32 2/23/17	33 2/23/19	34 2/21/17	35 2/21/17	36 2/21/17
RESURVEYED				RETRACED			
Corrected by H.L. Baldwin U.S. Surveyor June 11, 1918							

Lines retraced, resurveyed or surveyed on the dates shown on the above diagram, by Geo. F. Rigby, U. S. Surveyor.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, H. L. Baldwin, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 61, Arizona, bearing date of the 20th day of January, 1916, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of corrected all those parts or portions of the Resurvey of the South boundary of TOWNSHIP 8 NORTH, RANGE 2 EAST, executed in February, 1917, by George E. Rigby, U. S. Surveyor, under same instructions for Group 61, Arizona,

of the Gila and Salt River Base & Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 44 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 61, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey. corrective resurvey.

Wichita Falls Texa Nov 22 1919

H. L. Baldwin

U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in

, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

George F. Rigby
FOR CERTIFICATE OF UNITED STATES SURVEYOR.
See Book "E" of this Group.

I, _____, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

BOOK 3528

U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, May 14, 1920.

The foregoing field notes of the ~~survey of~~ Retracement of part of the South bdy. of Township 8 North, Range 2 East, Resurvey of the 2nd Standard Parallel North, thru part of Range 2 East, Part of the South bdy., and part of the Subdivision lines of Township 8 North, Range 2 East, and East bdy. of Township 8 North, Range 1 East, and SURVEY of Part of the Subdivision lines of Township 8 North, Range 2 East, of the Gila and Salt River Base & Meridian, in the State of Arizona, executed by Geo. F. Rigby, U.S. Surveyor, with correction of resurvey of part of South bdy. of T. 8 N., R. 2 E. by H.L. Baldwin, U.S. Surveyor under ~~his~~ special instructions dated January 20, 1916 for Group 61, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.


U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.