

Book "J".

4-679

BOOK 3331

# FIELD NOTES

RE-  
OF THE SURVEY OF THE

East, and

Parts of the North and South boundaries, and

Part of the Subdivision lines, and

SURVEY of

Part of the Subdivision lines of

TOWNSHIP 11 NORTH, RANGE 3 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

George F. Rigby,

U. S. Surveyor,

~~In the capacity of U. S. Surveyor~~, under Special Instructions dated Oct. 20, 1916  
issued by the United States Surveyor General to govern surveys included in Group  
No. 61, which were approved by the Commissioner of the General Land  
Office, Nov. 6, 1916, and Assignment Instructions dated Nov. 25, 1916

Resurvey and Survey commenced April 20, 1917

Resurvey and Survey completed May 3, 1917

3331

3331


3331


Book "J"

Group 61 - - - Arizona.

BOOK 3331

# INDEX DIAGRAM.

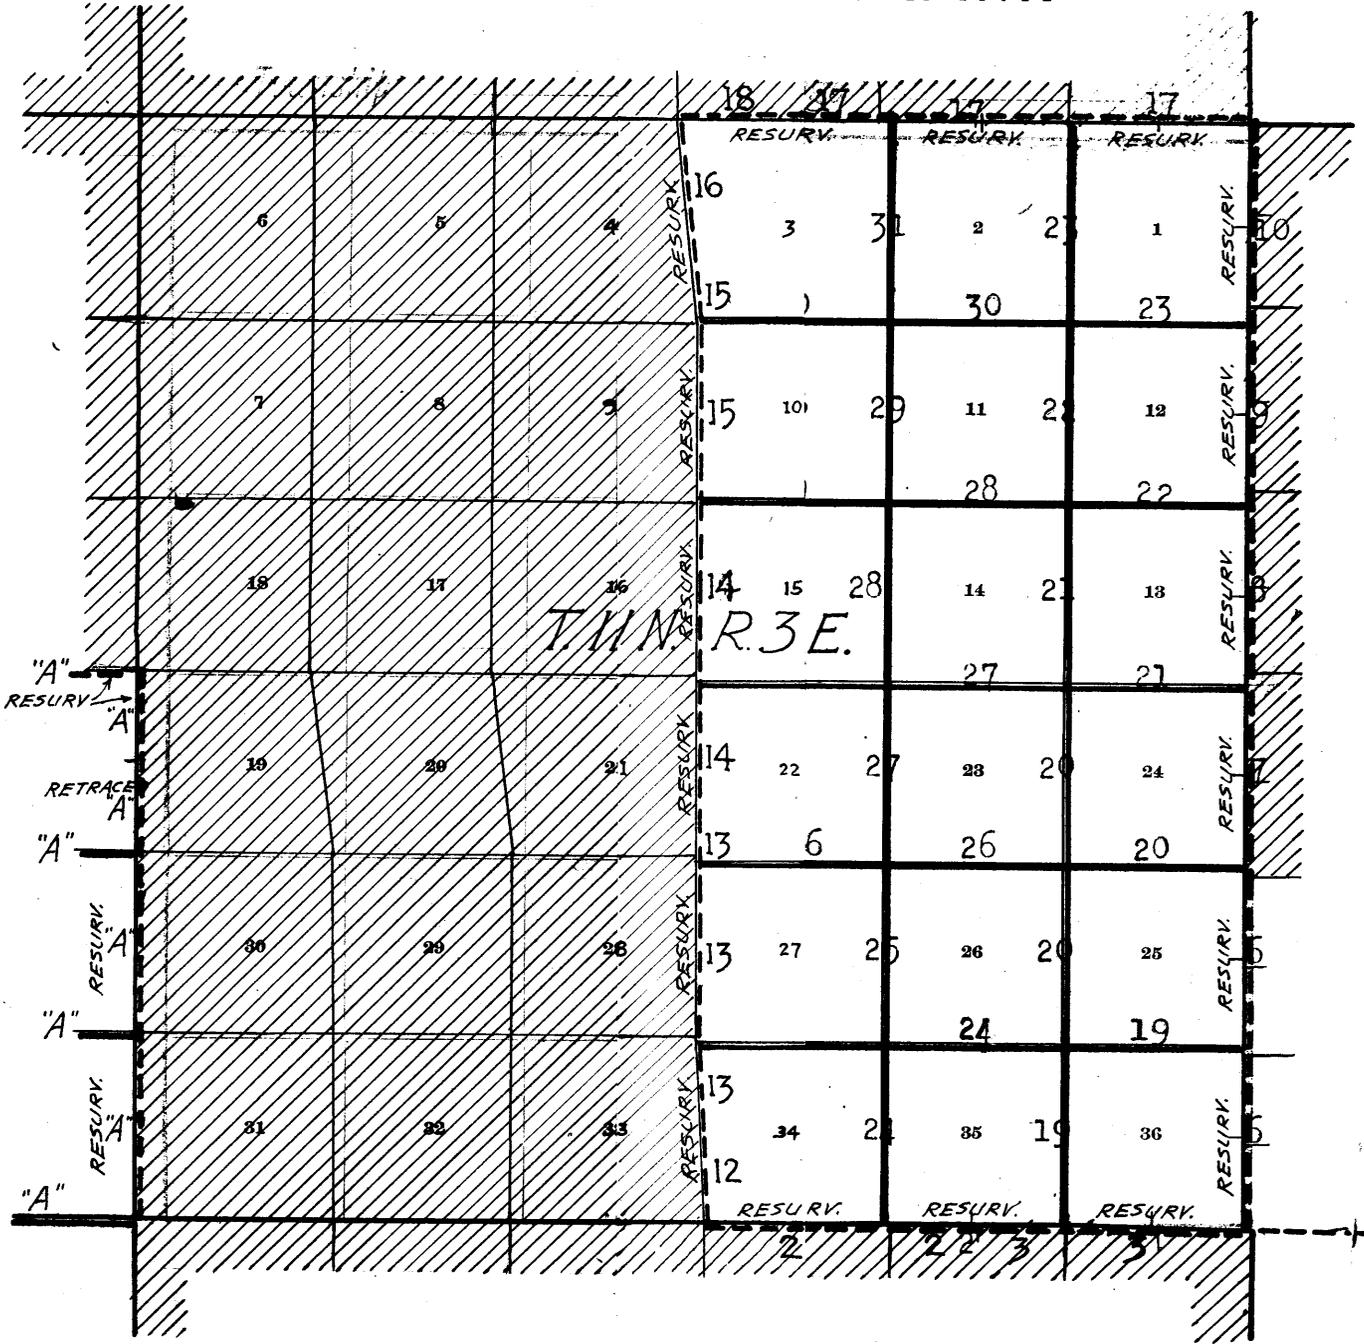

-  Surveyed under this group.
-  Retraced or resurveyed under this group.
-  Accepted surveys.
-  Unsurveyed.
-  Areas surveyed as per accepted plats on file.

Chains. Resurvey &	Survey executed by Geo. F. Rigby, U. S. Surveyor, on dates shown on page 32 hereof, using C. L. Berger transit No. 8947, without solar attachment. For description of instrument and certificate of approval, see Book "G".
41.00	<p>April 20, 1917. At my camp in sec. 26, T. 11 N., R. 3 E., lat. <math>34^{\circ}18'N.</math>, long. <math>112^{\circ}1'W.</math>, at 5hrs. 41m., a.m., 1. m.t., by my Watch, which is set to correct local mean time, observe Polaris at eastern elongation, in accordance with the Manual of Instructions, and measure an angle of <math>22^{\circ}42'</math> to the east, to a nail in a hub, 5 chs. dist. The azimuth of Polaris being <math>1^{\circ}22'</math> to the east, the bearing of this line is therefore <math>N.24^{\circ}4'E.</math></p> <p>From this reference line, all courses in this township were determined, prolonging all lines by careful foresights and backsights, with proper deflections.</p> <p style="text-align: center;">RETRACEMENTS FOR RESURVEY.</p> <p>From the original cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., which is a volcanic stone, 18 X 12 X 4 ins., lying on the ground, marked and witnessed as described by the Surveyor-General,</p> <p>S. <math>88^{\circ}34'E.</math>, on a random line, along the S. bdy. of sec. 34.</p> <p>Fall 50 lks. S. of the <math>\frac{1}{4}</math> sec. cor., which is a malpais stone, 8 X 7 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore <math>S.89^{\circ}16'E.</math>, 41.00 chs.</p>
80.63	<p>Continue same line and measurement.</p> <p>Fall 106 lks. S. of the cor. of secs. 2, 3, 34 and 35, which is a sandstone, 8 X 8 X 6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.</p> <p>The true course and distance of this half mile are therefore <math>S.89^{\circ}23'E.</math>, 39.63 chs.</p>
39.84	<p>From the cor. of secs. 2, 3, 34 and 35, S. <math>88^{\circ}34'E.</math>, on a random line, along the S. bdy. of sec. 35.</p> <p>Fall 84 lks. S. of the <math>\frac{1}{4}</math> sec. cor., which is a malpais stone, 9 X 8 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore <math>S.89^{\circ}47'E.</math>, 39.84 chs.</p>
80.08	<p>Continue same line and measurement.</p> <p>Fall 122 lks. S. of the cor. of secs. 1, 2, 35 and 36, which is a malpais stone, 6 X 4 X 8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.</p> <p>The true course and distance of this half mile are therefore <math>S.89^{\circ}06'E.</math>, 40.24 chs.</p>
39.52	<p>From the cor. of secs. 1, 2, 35 and 36, S. <math>88^{\circ}34'E.</math>, on a random line, along the S. bdy. of sec. 36.</p> <p>Fall 91 lks. S. of the <math>\frac{1}{4}</math> sec. cor., which is a sandstone, 9 X 8 X 14 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore <math>S.89^{\circ}53'E.</math>, 39.52 chs.</p>
79.76	<p>Continue same line and measurement.</p> <p>Fall 108 lks. S. of the cor. of Ts. 10 and 11 N., Rs. 3 and 4 E., which is a malpais stone, 9 X 8 X 14 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.</p> <p>The true course and distance of this half mile are therefore <math>S.88^{\circ}48'E.</math>, 40.25 chs.</p>

2. Resurvey of the East Half of South Boundary of T. 11 N., R. 3 E.

Chains.

Reestablish the cor. of secs. 3, 4, 33 and 34, hereinbefore described, in the same place as follows:  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 3, 4, 33 and 34,  
Marked on brass cap

T11N R3E  
S33 | S34  
S 4 | S 3  
T10N  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Thence S. 89° 16' E., on a true line, along S. bdy. of sec. 34. Over rolling and broken land, Desc. 120 ft.

4.67 Indian Creek, 15 lks. wide, 7 ins. deep, course SW. Asc. 185 ft.

17.67 Spur, slopes SW. Desc.

23.63 Wash, course SW. Thence over rolling land.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 34, marked on brass cap

1/4 S34  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

41.00 The original 1/4 sec. cor., hereinbefore described. Alter this cor. to refer to sec. 3 only by turning the stone to face the south, by destroying the original mound, and by building a new mound, 2 ft. base, 1 1/2 ft. high, S. of cor.

Thence S. 89° 23' E., continuing measurement.

70.53 Creek, 4 lks. wide, 3 ins. deep, course SW.

80.02 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 34 and 35, marked on brass cap

T11N | R3E  
S34 | S35  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

A cedar, 10 ins. diam., brs. N. 66 1/4° E., 41 lks. dist., marked T11N R3E S35 BT.

Land, rolling and broken.  
Soil, clay loam, and rock; 3rd rate.  
No timber or undergrowth.

S. 89° 23' E., on a true line, along S. bdy. of sec. 35. Asc. 270 ft. over rolling land.

0.61 The original cor. of secs. 2, 3, 34 and 35, hereinbefore described. Alter this cor. to refer to secs. 2 and 3 only, by destroying the markings on the bearing tree N. of line, by destroying the original mound of stone, and building a new mound, 2 ft. base, 1 1/2 ft. high, S. of cor.

Thence S. 89° 47' E., continuing measurement.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 35, marked on brass cap,

Resurvey of the East Half of South Boundary of T. 11 N., R. 3 E. 3.

Chains.

1835

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

40.45 The original ¼ sec. cor., hereinbefore described. Alter this cor. to refer to sec. 2 only, by turning the stone to face the south, by destroying the original mound of stone, and by raising a new mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Thence S.89°06'E., continuing measurement.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 35 and 36, marked on brass cap

T11N	R3E
S35	S36

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Land, rolling.

Soil, clay, loam and rock; 3rd rate.

No timber or undergrowth.

Some grass.

S.89°06'E., on a true line, along S. bdy. of sec. 36.

Over rolling mesa.

Asc. 235 ft.

0.69 The original cor. of secs. 1, 2, 35 and 36, hereinbefore described. Alter this cor. to refer to secs. 1 and 2 only by destroying the original mound of stone, and by building a new mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

Thence S.89°53'E., continuing measurement.

33.52 Spur, slopes NW. Desc. 125 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 36, marked on brass cap,

1836

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

40.21 The original ¼ sec. cor., hereinbefore described. Alter this cor. to refer to sec. 1 only, by turning the stone to face the south, by destroying the original mound and by building a new mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

Thence S.88°48'E., continuing measurement.

54.18 Head of draw, course NW.

79.64 A point due south of the original cor. of secs. 19, 24, 25 and 30, on the E. bdy. of Tp., hereinafter described.

Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for reestablished cor. of Ts. 11 N., Rs. 3 and 4 E., marked on brass cap

T11N	
R3E	R4E
S36	S31

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Resurvey of the

4.

East Half of South Boundary of T. 11 N., R. 3 E.

Chains. 80.46	<p>The original cor. of Ts. 10 and 11 N., Rs. 3 and 4 E., hereinbefore described. Alter this cor. to refer to Ts. 10 N., Rs. 3 and 4 E. only, by obliterating the markings on the N. edge of rock.</p> <p>Land, rolling mesa. Soil, rocky clay, 3rd rate. No timber or undergrowth, A little grass.</p>
<p><u>Retracement for Resurvey of the</u> <u>East Boundary of T. 11 N., R. 3 E.</u></p>	
39.25	<p>From the original cor. of Ts. 10 and 11 N., Rs. 3 and 4 E., hereinbefore described, North on retracement, along the E. bdy. of sec. 36. Fall 15 lks. E. of the original <math>\frac{1}{4}</math> sec. cor., which is a cross on a ledge of volcanic rock, witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°13'W., 39.25 chs.</p>
79.42	<p>Continue same line and measurement. Fall 62 lks. E. of the cor. of secs. 25, 30, 31 and 36, which is a malpais stone, 10 X 6 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°40'W., 40.17 chs.</p>
40.48	<p>From the cor. of secs. 25, 30, 31 and 36, North on retracement, along the E. bdy. of sec. 25. Fall 9 lks. E. of the original <math>\frac{1}{4}</math> sec. cor., which is a malpais stone, 8 X 6 X 5 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°8'W., 40.48 chs.</p>
81.10	<p>Continue same line and measurement. Fall 20 lks. E. of the cor. of secs. 19, 24, 25 and 30, which is a malpais stone, 12 X 12 X 12 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°9'W., 40.62 chs.</p>
38.50	<p>From the cor. of secs. 19, 24, 25 and 30, North on retracement, along E. bdy. of sec. 24. Fall 74 lks. E. of the original <math>\frac{1}{4}</math> sec. cor., which is a cross on a volcanic rock in place, 48 X 30 X 12 ins. above ground, witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.1°6'W., 38.51 chs.</p>
87.82	<p>Continue same line and measurement. Fall 109 lks. E. of the cor. of secs. 13, 18, 19 and 24, which is a malpais stone, 24 X 12 X 8 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°24'W., 49.32 chs.</p>

Retracement for Resurvey of the  
East Boundary of T. 11 N., R. 3 E.

Chains.

40.00 From the cor. of secs. 13, 18, 19 and 24,  
North on retracement, along the E. bdy. of sec. 13.  
Diligent search failed to reveal any trace of the original  
cor.

79.49 Fall 81 lks. W. of the cor. of secs. 7, 12, 13 and 18,  
which is a cedar stake, 3 ins. square, set in a mound  
of stone, marked and witnessed as described by the  
Surveyor-General.  
The true course and distance of this mile are therefore  
N.0°35'E., 79.49 chs.

40.07 From the cor. of secs. 7, 12, 13 and 18,  
North on retracement, along the E. bdy. of sec. 12.  
Fall 8 lks. W. of the original  $\frac{1}{4}$  sec. cor., which is a  
malpais stone, 9 X 8 X 6 ins. above ground, firmly set,  
marked and witnessed as described by the Surveyor-  
General.  
The true course and distance of this half mile are there-  
fore N.0°7'E., 40.07 chs.

80.06 Continue same line and measurement.  
Intersect the cor. of secs. 1, 6, 7 and 12, which is a  
sandstone, 10 X 7 X 5 ins. above ground, properly set,  
marked and witnessed as described by the Surveyor-  
General.  
The true course and distance of this half mile are there-  
fore N.0°7'W., 39.99 chs.

39.94 From the cor. of secs. 1, 6, 7 and 12,  
North on retracement, along the E. bdy. of sec. 1.  
Fall 3 lks. W. of the original  $\frac{1}{4}$  sec. cor., which is a  
sandstone, 10 X 10 X 6 ins. above ground, firmly set,  
marked and witnessed as described by the Surveyor-  
General.  
The true course and distance of this half mile are there-  
fore N.0°3'E., 39.94 chs.

79.88 Continue same line and measurement.  
Fall 65 lks. W. of the cor. of Ts. 11 and 12 N., Rs. 3 and  
4 E., which is a cedar post, 5 ins. square, set in a  
mound of stone, marked and witnessed as described by the  
Surveyor-General.  
The true course and distance of this half mile are there-  
fore N.0°53'E., 39.94 chs.


6. Resurvey of the East Boundary of T. 11 N., R. 3 E.

Chains.	
<p>32.31 39.25 40.00</p>	<p>From the reestablished cor. of Ts. 11 N., Rs. 3 and 4 E., hereinbefore described, North on a true line, along E. bdy. of sec. 36. Over mesa land. Desc. 185 ft. Gulch, course W. Asc. 160 ft. <del>Destroy</del> the original <math>\frac{1}{4}</math> sec. cor., and its accessories. Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished <math>\frac{1}{4}</math> sec. cor. of sec. 31, marked on brass cap</p>
	<p style="text-align: center;"> <math>\frac{1}{4}</math>                         S31                         1917         </p> <p>And raise a mound of stone, 2 ft. base, <math>1\frac{1}{2}</math> ft. high, E. of cor.</p>
<p>42.74</p>	<p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished <math>\frac{1}{4}</math> sec. cor. of sec. 36, marked on brass cap</p>
	<p style="text-align: center;"> <math>\frac{1}{4}</math>                         S36                         1917         </p> <p>And raise a mound of stone, 2 ft. base, <math>1\frac{1}{2}</math> ft. high, W. of cor.</p>
<p>45.00 53.19 59.52 79.42</p>	<p>Spur, slopes W. Desc. 135 ft. Gulch, course SW. Asc. 190 ft. Top of rim rock, brs. E. and W. Thence over rolling mesa. <del>Destroy</del> the original cor. of secs. 25, 30, 31 and 36, and its accessories.</p>
<p>80.00</p>	<p>Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 30 and 31, T. 11 N., R. 4 E., marked on brass cap</p>
	<p style="text-align: center;">           T11N                         S30                         S31                         R4E                         1917         </p> <p>And raise a mound of stone, 2 ft. base, <math>1\frac{1}{2}</math> ft. high, E. of cor.</p>
<p>82.74</p>	<p>Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 25 and 36, marked on brass cap</p>
	<p style="text-align: center;">           T11N                         S25                         S36                         R3E                         1917         </p> <p>And raise a mound of stone, 2 ft. base, <math>1\frac{1}{2}</math> ft. high, W. of cor.</p> <p>Land, mesa. Soil, rocky clay and loam, 3rd rate. No timber or undergrowth. Some grass.</p>
<p>9.16 18.81 28.27</p>	<p>North on a true line, along the E. bdy. of sec. 25. Over level mesa, through scattering undergrowth. Desc. 370 ft. Creek, 6 lks. wide, 3 ins. deep, course W. Asc. 260 ft. Spur, slopes W. Desc. 100 ft.</p>


Resurvey of the  
East Boundary of T. 11 N., R. 3 E.

Chains.

36.68 Kaufman's house brs. W. 2.00 chs. dist.  
 37.16 Destroy the original  $\frac{1}{4}$  sec. cor., and its accessories.  
 37.26 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for reestablished  $\frac{1}{4}$  sec. cor. of secs. 30,  
 marked on brass cap




And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E.  
 of cor.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 25,  
 marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W.  
 of cor.  
 44.08 Indian Creek, 7 lks. wide, 3 ins. deep, course SW. Asc. 170  
 ft.

71.53 Spur, slopes W. Desc. 65 ft.  
 76.44 Draw, course SW. Asc. 10 ft.  
 77.78 The original cor. of secs. 19, 24, 25 and 30, hereinbefore  
 described. Alter this cor. to refer to secs. 19 and  
 30, T. 11 N., R. 4 E., only, by destroying the original  
 mound of stone, and building a new mound, 2 ft. base,  
 1 1/2 ft. high, E. of cor.

Thence N.1°6'W., continuing measurement.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
 ground, for reestablished cor. of secs. 24 and 25,  
 marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W.  
 of cor.  
 A cedar, 12 ins. diam., brs. S.16°W.,  
 136 lks. dist., marked T11N R3E S25 BT.  
 Land, level mesa and rolling.  
 Soil, 3rd rate.  
 No timber.  
 Undergrowth, scrub oak and cat claw.  
 Some grass.

N.1°6'W., on a true line, along E. bdy. of sec. 24.  
 Over broken mesa.  
 Asc. 215 ft.

18.46 Spur, slopes W. Desc. 115 ft.  
 27.16 Gulch, course W. Asc. 280 ft.  
 36.29 The original  $\frac{1}{4}$  sec. cor., hereinbefore described. Alter  
 this cor. to refer to sec. 19 only by destroying the  
 original mound of stone, and building a new mound of  
 stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Thence N.0°24'W., continuing measurement.  
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 24, marked  
 on brass cap

8. Resurvey of the East Boundary of T. 11 N., R. 3 E.

Chains.

$\frac{1}{4}$   
 S24  
 |  
 1917

47.64 And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 60.00 Top of mesa, brs. E. and W. Thence over rolling land.  
 67.14 Desc. 185 ft.  
 77.00 Draw, course W. Asc. 130 ft.  
 80.00 Spur, slopes W. Desc. 35 ft.  
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 13 and 24, marked on brass cap

T11N  
 S13  
 ———  
 S24  
 R3E  
 |  
 1917

And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Land, broken mesa.  
 Soil, rocky clay, 4th rate.  
 No timber or undergrowth.  
 Some grass.

5.61 N.0°24'W., on a true line, along E. bdy. of sec. 13.  
 Over broken mesa,  
 Desc. 190 ft.  
 The original cor. of secs. 13, 18, 19 and 24, hereinbefore described. Alter this cor. to refer to secs. 18 and 19, T. 11 N., R. 4 E., only, by destroying the mound of stone, and building a new mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, E. of cor.  
 7.56 Thence N.0°35'E., continuing measurement.  
 12.61 Gulch, course SW. Asc. 150 ft.  
 40.00 Top of mesa; thence over rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 13, marked on brass cap

$\frac{1}{4}$   
 S13  
 |  
 1917

45.36 And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor. of sec. 18, marked on brass cap

$\frac{1}{4}$   
 S18  
 |  
 1917

70.20 And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, E. of cor.  
 80.00 Ridge, brs. NE. and SW. Desc. 65 ft.  
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 12 and 13, marked on brass cap

Resurvey of the  
East Boundary of T. 11 N., R. 3 E.

Chains.

T11N  
S12  
S13  
R3E

1917

From which

A cedar, 11 ins. diam., brs. S.87°W.,  
marked T11N R3E S13 BT.

No other trees within limits. Raise a mound of stone, 2  
ft. base, 1½ ft. high, W. of cor.

Land, broken mesa.

Soil, rocky clay and loam, 4th rate.

No timber or undergrowth.

Some grass.

5.10

N.0°35'E., on a true line, along E. bdy. of sec. 12.  
Over broken hills, through scattering undergrowth.  
Desc. 285 ft.

The original cor. of secs. 7, 12, 13 and 18, hereinbefore  
described. Alter this cor. to refer to secs. 7 and  
18, T. 11 N., R. 4 E., only, by destroying the mound  
of stone, W. of cor., and building a new mound of stone,  
2 ft. base, 1½ ft. high, E. of cor. An old cedar  
bearing tree, 10 ins. diam., brs. S.27°E., 254 lks.  
dist., marked T11N R4E S18 BT.

31.34  
40.00

Thence N.0°7'E., continuing measurement.

Gulch, course NW. Asc. 80 ft.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for reestablished ¼ sec. cor. of sec. 12, marked  
on brass cap

1/4  
S12  
1917

45.17

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.  
of cor.

The original ¼ sec. cor., hereinbefore described. Alter  
this ¼ sec. cor. to refer to sec. 7 only, by destroying  
the mound of stone W. of cor., and building a new mound  
of stone, 2 ft. base, 1½ ft. high, E. of cor.

47.60

Thence N.0°7'W., continuing measurement.

Spur, slopes W. J. F. Taylor's house, brs. N.35°42'W.  
Desc. 155 ft.

62.36  
80.00

Gulch, course N.80°W. Asc. 145 ft.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, for reestablished cor. of secs. 1 and 12, marked  
on brass cap

T11N  
S 1  
S12  
R3E  
1917

From which

A cedar, 10 ins. diam., brs. N.14°W., 314  
lks. dist., marked T11N R3E S1 BT.

A cedar, 6 ins. diam., brs. S.25¼°W., 146  
lks. dist., marked T11N R3E S12 BT.

Land, broken hills.

Soil, rocky clay and loam, 3rd rate.

No timber or undergrowth.

Undergrowth, scattering cedar.

10. Resurvey of the East Boundary of T. 11 N., R. 3 E.

Chains.


N.0°7'W., on a true line, along E. bdy. of sec. 1. Over rolling hills, through scattering undergrowth. Desc. 275 ft.

5.16 The original cor. of secs. 1, 6, 7 and 12, hereinbefore described. Alter this cor. to refer to secs. 6 and 7, T. 11 N., R. 4 E., only, by destroying the bearing tree W. of line, and the mound of stone, and building a new mound of stone, 2 ft. base, 1½ ft. high, E. of cor. The original bearing tree, a cedar, 10 ins. diam., brs. N.63½°E., 154 lks. dist., marked T11N R4E S6 BT. Fred Dugas' house brs. N.29°19'E.

17.25 Thence N.0°3'E., continuing measurement. Sycamore Creek, 15 lks. wide, 8 ins. deep, course SW. Asc. 215 ft.

29.02 Road, brs. NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 1, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

45.10 The original ¼ sec. cor., hereinbefore described. Alter this cor. to refer to sec. 6 only, by destroying the original mound of stone, W. of cor., and building a new mound of stone, 2 ft. base, 1½ ft. high, E. of cor. Thence N.0°53'E., continuing measurement.


45.50 Spur, slopes SE. J. F. Taylor's house brs. S.37°10'W. Desc. 40 ft.

52.13 Head of wash, course SE. Asc. 105 ft.

60.98 Fred Dugas' house brs. S.47°30'E.

63.88 Desc. 40 ft.

85.04 The original cor. of Ts. 11 and 12 N., Rs. 3 and 4 E., hereinbefore described. Reestablish this cor. in the same place as follows:  
Set an iron post, 3 ft. long, 3 ins. diam., 24 ins. in the ground, for reestablished cor. of Ts. 11 and 12 N., Rs. 3 and 4 E., marked on brass cap



From which  
A cedar, 16 ins. diam., brs. N.72°E., 104 lks. dist., marked T12N R4E S31 BT.  
No other trees within limits. Raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.  
Land, rolling hills.  
Soil, rocky clay, 3rd rate.  
No timber.  
Undergrowth, cedar.

Retracement for Resurvey of a portion of the  
Subdivision of T. 11 N., R. 3 E. 11.

Chains.	
40.00	From the reestablished cor. of secs. 3, 4, 33 and 34, on the S. bdy. of Tp., hereinbefore described, North on retracement, along E. bdy. of sec. 33. Diligent search in this vicinity failed to reveal any trace of the original $\frac{1}{4}$ sec. cor.
80.70	Fall 3.83 chs. E. of the original cor. of secs. 27, 28, 33 and 34, which is a volcanic stone, 10 X 8 X 6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.2°43'W., 80.80 chs.
39.83	From the cor. of secs. 27, 28, 33 and 34, North on retracement, along E. bdy. of sec. 28. Fall 17 lks. E. of the original $\frac{1}{4}$ sec. cor., which is a malpais stone, 12 X 10 X 6 ins. above ground, properly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°15'W., 39.83 chs.
79.73	Continue same line and measurement. Fall 22 lks. E. of the original cor. of secs. 21, 22, 27 and 28, which is a sandstone, 14 X 11 X 9 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°4'W., 39.90 chs.
39.93	From the cor. of secs. 21, 22, 27 and 28, North on retracement, along E. bdy. of sec. 21. Fall 15 lks. W. of the original $\frac{1}{4}$ sec. cor., which is a volcanic stone, 24 X 14 X 9 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°13'E., 39.93 chs.
79.98	Continue same line and measurement. Fall 29 lks. W. of the original cor. of secs. 15, 16, 21 and 22, which is a malpais stone, 27 X 20 X 16 ins. above ground, properly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°12'E., 40.05 chs.
39.69	From the cor. of secs. 15, 16, 21 and 22, North on retracement, along E. bdy. of sec. 16. Fall 11 lks. E. of the original $\frac{1}{4}$ sec. cor., which is a malpais stone, 14 X 10 X 7 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°9'W., 39.69 chs.
79.51	Continue same line and measurement. Fall 2 lks. W. of the original cor. of secs. 9, 10, 15 and 16, which is a malpais stone, 30 X 12 X 6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General. The true course and distance of this half mile are therefore N.0°11'E., 39.82 chs.


12. Retracement for Resurvey of a portion of the  
Subdivision of T. 11 N., R. 3 E.

Chains.	<p>From the cor. of secs. 9, 10, 15 and 16, North on retracement, along E. bdy. of sec. 9.</p> <p>38.97 Fall 26 lks. W. of the original <math>\frac{1}{4}</math> sec. cor., which is a malpais stone, 30 X 14 X 10 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.</p> <p>The true course and distance of this half mile are therefore N.0°23'E., 38.97 chs.</p>
78.72	<p>Continue same line and measurement.</p> <p>Fall 65 lks. W. of the original cor. of secs. 3, 4, 9 and 10, which is a malpais stone, 9 X 7 X 6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.</p> <p>The true course and distance of this half mile are therefore N.0°33'E., 39.75 chs.</p>
41.73	<p>From the cor. of secs. 3, 4, 9 and 10, N.7°2'W., on retracement, along E. bdy. of sec. 4.</p> <p>Fall 23 lks. E. of the original <math>\frac{1}{4}</math> sec. cor., which is a malpais stone, 10 X 8 X 6 ins. above ground, firmly set, marked and witnessed as described by the Surveyor-General.</p> <p>The true course and distance of this half mile are therefore N.7°21'W., 41.76 chs.</p>
89.16	<p>Continue same line and measurement.</p> <p>Fall 99 lks. E. of the original cor. of secs. 3, 4, 33 and 34, on the N. bdy. of Tp., which is a pile of stones, with remains of marked stake in the middle.</p> <p>The true course and distance of this half mile are therefore N.7°57'W., 47.53 chs.</p>
<p>Resurvey of Part of the Subdivision of T. 11 N., R. 3 E.</p>	
23.84 29.94 40.05	<p>From the reestablished cor. of secs. 3, 4, 33 and 34; on the S. bdy. of Tp., hereinbefore described, N.2°43'W., on a true line, along W. bdy. of sec. 34. Over rolling land. Asc. 100 ft.</p> <p>Road, brs. NE. and S<math>20^{\circ}</math>W. to Cordes. Ridge, brs. NE. and SW. Desc. 30 ft.</p> <p>(40.00 chs. northing from the reestablished cor. of secs. 3, 4, 33 and 34.)</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished <math>\frac{1}{4}</math> sec. cor. of sec. 34, marked on brass cap</p> <div style="text-align: center;"> <math>\frac{1}{4}</math>                S34                             1917         </div>
40.40	<p>And raise a mound of stone, 2 ft. base, 1<math>\frac{1}{2}</math> ft. high, E. of cor.</p> <p>(40.35 chs. northing from the reestablished cor. of secs. 3, 4, 33 and 34.)</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished <math>\frac{1}{4}</math> sec. cor. of sec. 33, marked on brass cap</p> <div style="text-align: center;"> <math>\frac{1}{4}</math>                S33                             1917         </div>

Resurvey of Part of the  
Subdivision of T. 11 N., R. 3 E.

Chains.


And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 41.00 Wash, course SW. Asc. 105 ft.  
 79.95 Ridge, brs. NE. and SW. Desc.  
 80.10 (80.00 chs. northing from the reestablished cor. of secs. 3, 4, 33 and 34.)  
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 27 and 34, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.  
 Land, rolling.  
 Soil, rocky clay, 3rd rate.  
 No timber or undergrowth.


0.70 N.2°43'W., on a true line, along W. bdy. of sec. 27.  
 Over rolling land.  
 Desc. 115 ft.  
 The original cor. of secs. 27, 28, 33 and 34, hereinbefore described. Alter this cor. to refer to secs. 28 and 33 only, by obliterating the notches on E. edge of stone; rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

17.04 Thence N.0°15'W., continuing measurement.  
 40.00 Creek, 5 lks. wide, 4 ins. deep, course SW. Asc. 100 ft.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 27, marked on brass cap



40.53 And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.  
 The original ¼ sec. cor., hereinbefore described. This cor. will hereafter refer to sec. 28 only. Rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 Thence N.0°4'W., continuing measurement.

54.69 Wash, course SE. Asc. 170 ft.  
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 22 and 27, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.  
 Land, rolling.  
 Soil, rocky clay, 3rd rate.  
 No timber or undergrowth.

0.43 N.0°4'W., on a true line, along W. bdy. of sec. 22.  
 Over broken mesa,  
 The original cor. of secs. 21, 22, 27 and 28, hereinbefore described. Alter this cor. to refer to secs. 21 and


14. Resurvey of a Part of the  
Subdivision of T. 11 N., R. 3 E.

Chains.

28 only, by destroying the notches on E. edge of stone; rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

13.34  
40.00

Thence N.0°13'E., continuing measurement.  
Gulch, course SW. Asc. 255 ft.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 22, marked on brass cap




And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

40.36

The original ¼ sec. cor., hereinbefore described. Rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor. This cor. will hereafter refer to sec. 21 only.

75.40  
80.00

Thence N.0°12'E., continuing measurement.  
Spur, slopes SW. Desc. 20 ft.  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 15 and 22, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.


Land, broken mesa.  
Soil, rocky clay, 3rd rate.  
No timber or undergrowth.

0.41

N.0°12'E., on a true line, along W. bdy. of sec. 15. Over broken mesa.  
The original cor. of secs. 15, 16, 21 and 22, hereinbefore described. Alter this cor. to refer to secs. 16 and 21 only by obliterating the notches on E. edge of stone; rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

20.34  
27.23  
40.00

Thence N.0°9'W., continuing measurement.  
Head of draw, course W. Asc. 80 ft.  
Spur, slopes W. Desc. 235 ft.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 15, marked on brass cap



And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

40.10

The original ¼ sec. cor., hereinbefore described. This cor. will hereafter refer to sec. 16 only. Rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

56.27  
65.00  
79.92

Thence N.0°11'E., continuing measurement.  
Gulch, course W. Asc. 165 ft.  
Edge of mesa, brs. E. and W. Thence over rolling land.  
The original cor. of secs. 9, 10, 15 and 16, hereinbefore described. Alter this cor. to refer to secs. 9 and 16 only, by obliterating the notches on E. edge of stone; rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00

Thence N.0°23'E., continuing measurement.  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 10 and 15, marked

Resurvey of a Part of the  
Subdivision of T. 11 N., R. 3 E.

Chains.

on brass cap

T11N
S10
S15
R3E

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.  
Land, broken mesa and rolling.  
Soil, rocky clay, 3rd rate.  
No timber or undergrowth.

N.0°23'E., on a true line, along W. bdy. of sec. 10.

Over broken mesa,  
Desc. 360 ft.

18.50 Sycamore Creek, 15 lks. wide, 1ft. deep, course W. Asc. 240 ft.

36.63 Spur, slopes SW. Desc. 55 ft.

38.89 The original ¼ sec. cor., hereinbefore described. This cor. will hereafter refer to sec. 9 only. Rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Thence N.0°33'E., continuing measurement.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 10, marked on brass cap

¼
S10

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

43.88 Gulch, course SW. Asc. 135 ft.

49.57 Top of mesa; brs. E. and W. Thence over rolling land.

78.64 The original cor. of secs. 3, 4, 9 and 10, hereinbefore described. Alter this cor. to refer to secs. 4 and 9 only by obliterating the notches on E. edge of stone; rebuild mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Thence, N.7°21'W., continuing measurement.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 3 and 10, marked on brass cap

80.00

T11N
S 3
S10
R3E

1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

Land, broken mesa.  
Soil, rocky, clay, 3rd rate.  
No timber or undergrowth.

N.7°21'W., on a true line, along W. bdy. of sec. 3.  
Over rolling mesa.

40.34 (40.00 chs. northing from the reestablished cor. of secs. 3 and 10.)

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor., of sec. 3, marked on brass cap

Resurvey of Part of the  
Subdivision of T. 11 N., R. 3 E.

Chains.

$\frac{1}{4}$   
 $\uparrow$  S 3  
 1917

- And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, E. of cor.
- 40.40 The original  $\frac{1}{4}$  sec. cor., hereinbefore described. This cor. will hereafter refer to sec. 4 only. Rebuild mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor. Thence N.  $7^{\circ}57'$  W., continuing measurement.
- 56.00 Begin descent of 165 ft.
- 60.99 Wire fence, brs. NE. and SW.
- 63.25 Gulch, course NW. Asc. 190 ft.
- 78.00 Top of ascent; brs. NW. and SE. Thence over rolling land.
- 87.60 Wire fence, brs. E. and W.
- 87.93 The original cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., hereinbefore described. Reestablish this cor. in the same place as follows:  
Set a malpais stone, 22 X 12 X 8 ins., 17 ins. in the ground, for reestablished cor. of secs. 3, 4, 33 and 34, marked with 3 notches on E. and W. edges; and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Land, broken mesa.  
Soil, rocky clay, 3rd rate.  
No timber or undergrowth.

~~Re~~Retracement for Resurvey of the  
East Half of North Boundary of T. 11 N., R. 3 E.

- 40.10 From the reestablished cor. of Ts. 11 and 12 N., Rs. 3 and 4 E., hereinbefore described,  
West on retracement, along N. bdy. of sec. 1.  
Fall 18 lks. S. of the original  $\frac{1}{4}$  sec. cor., which is a cedar post, set in a mound of stone, marked and witnessed as described by the Surveyor-General.  
The true course and distance of this half mile are therefore N.  $89^{\circ}45'$  W., 40.10 chs.
- 80.35 Continue same line and measurement.  
Fall 44 lks. S. of the original cor. of secs. 1, 2, 35 and 36, which is a cedar post, set in a mound of stone, marked and witnessed as described by the Surveyor-General.  
The true course and distance of this half mile are therefore N.  $89^{\circ}38'$  W., 40.25 chs.
- 40.04 From the cor. of secs. 1, 2, 35 and 36,  
West on retracement, along N. bdy. of sec. 2.  
Fall 19 lks. S. of the original  $\frac{1}{4}$  sec. cor., which is a pile of rock, with remains of wooden stake in center.  
The true course and distance of this half mile are therefore N.  $89^{\circ}44'$  W., 40.04 chs.
- 80.00 Continue same line and measurement.  
Diligent search failed to reveal any trace of the original cor. of secs. 2, 3, 34 and 35.
- 120.00 Diligent search failed to reveal any trace of the original  $\frac{1}{4}$  sec. cor. bet. secs. 3 and 34.
- 174.16 Fall 125 lks. S. of the reestablished cor. of secs. 3, 4, 33 and 34, hereinbefore described.  
The true course and distance of this line are therefore N.  $89^{\circ}33'$  W., 134.13 chs.

Resurvey of the  
East Half of the North Boundary of T. 11 N., R. 3 E. 17.

Chains.

40.10 From the reestablished cor. of Ts. 11 and 12 N., Rs. 3 and 4 E., hereinbefore described,  
N. 89° 45' W., on a true line, along N. bdy. of sec. 1.  
The original  $\frac{1}{4}$  sec. cor., hereinbefore described. Re-establish this cor. in the same place as follows:  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S36  
S I  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.35 Thence N. 89° 38' W., continuing measurement.  
The original cor. of secs. 1, 2, 35 and 36, hereinbefore described. Reestablish this cor. in the same place as follows:  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 1, 2, 35 and 36, marked on brass cap

T12N R3E  
S35 S36  
S 2 S I  
T11N  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling. - - Soil, clay-loam, 2nd rate. No timber. A little grass.

14.81 N. 89° 44' W., on a true line, along the N. bdy. of sec. 2.  
40.04 Over rolling land.

Ridge, brs. NW. and SE. Desc. 195 ft.  
The original  $\frac{1}{4}$  sec. cor., hereinbefore described.  
Reestablish this cor. in the same place as follows: Re-  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S35  
S 2  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

45.00 Thence N. 89° 33' W., continuing measurement.  
80.00 Foot of descent; thence over rolling land.  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for reestablished cor. of secs. 2 and 3, marked on brass cap

S 3 S 2  
T11N R3E  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

Land, rolling mesa.  
Soil, clay and loam, 2nd rate.  
No timber or undergrowth.  
A little grass.

N. 89° 33' W., on a true line, along N. bdy. of sec. 3.  
Over rolling mesa,  
Asc. 45 ft.

Resurvey of  
18. East Half of North Boundary of T. 11 N., R. 3 E.

Chains.	
4.75	Set a malpais stone, 24 X 12 X 5 ins., 18 ins. in the ground, for reestablished cor. of secs. 34 and 35, T. 12 N., R. 3 E., marked with 2 notches on E. and 4 notches on W. edge; and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
12.97	Spur, slopes S. Desc. 95 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 3, marked on brass cap
	$\frac{1}{4}S3$ 1917
	And raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.
49.46	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 34, T. 12 N., R. 3 E., marked on brass cap
	$\frac{1}{4}S34$ 1917
	And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
54.99	Spur, slopes SW. Thence over rolling land.
89.12	Wire fence, brs. N. and S.
94.17	The reestablished cor. of secs. 3, 4, 33 and 34, hereinbefore described.
	Land, rolling mesa.
	Soil, clay, 3rd rate.
	No timber or undergrowth.
	A little grass.

Completion of Survey of Subdivision of T. 11 N., R. 3 E. 19.

Chains.

From the reestablished cor. of secs. 25 and 36, on E. bdy. of Tp., hereinbefore described, West on sectional correction line, bet. secs. 25 and 36. Over rolling mesa, through scattering undergrowth. Desc. 445 ft.

5.00  
39.63

{Same as westing of E. half of S. bdy. of sec. 36}, Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap,

1/4 S25  
S36  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

47.50

South bank of Indian Creek, course NW. Comes from NE. Asc. 70 ft.

54.52

Spur, slopes N. Desc. 65 ft.

61.43

Indian Creek, 10 lks. wide, 7 ins. deep, course SW. Asc. 40 ft.

79.63

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, marked on brass cap

T11N R3E  
S26 | S25  
S35 | S36  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and broken mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, scrub oak and cat claw.

40.00  
81.97

South on a random line, bet. secs. 35 and 36. Set temp. 1/4 sec. cor. Fall 22 lks. W. of the reestablished cor. of secs. 35 and 36, which is an iron post, hereinbefore described.

Thence N. 80° 10' W., on a true line, bet. secs. 35 and 36. Over broken mountainous land, through scattering undergrowth. Asc. 115 ft.

7.97

Spur, slopes W. Desc. 265 ft.

34.10

Gulch, course SW. Asc. 195 ft.

41.97

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4  
S35 | S36  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Thence over rolling land. Desc. 335 ft. Indian Creek, 25 lks. wide, 10 ins. deep, course S. 75° W. Asc. 65 ft.

57.75

75.57

81.97

The cor. of secs. 25, 26, 35 and 36.

Land, broken mountainous. Soil, rocky, 4th rate. No timber. Undergrowth, cat claw and scrub oak.

20. Survey of Subdivision of T. 11 N., R. 3 E. Completion of

Chains.

North on Sectional Guide Meridian, bet. secs. 25 and 26. Over rolling mountainous land, through scattering undergrowth. Asc. 175 ft.

14.74

Ridge, brs. N E. and SW. Desc. 115 ft.

38.62

Wash, course SW. Asc. 85 ft.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4  
S26 | S25  
1917

From which

A cedar, 12 ins. diam., brs. S.42 1/2° E., 102 lks. dist., marked 1/4 S25 BT.

No other trees within limits. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

61.99

Wash, course S.10° E. Asc. 85 ft.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, marked on brass cap

T11N R3E  
S23 | S24  
S26 | S25  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling mountains

Soil, rocky, 4th rate.

No timber.

Undergrowth, cedar and cat claw.

40.00

East on a random line, bet. secs. 24 and 25.

79.52

Set temp. 1/4 sec. cor.

Fall 26 lks. S. of the reestablished cor. of secs. 24 and 25, on the east boundary of Tp., hereinbefore described.

Thence

S.89°49' W., on a true line, bet. secs. 24 and 25.

Over rolling land, through scattering undergrowth.

10.00

Desc. 105 ft.

21.67

Gulch, course S. Asc. 495 ft.

39.52

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S24  
S25  
1917

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

54.08

Top of ascent; spur, slopes S. Desc. 450 ft.

79.52

The cor. of secs. 23, 24, 25 and 26.

Land, rolling and broken mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, scrub oak and cat claw.

34.98

North on Sectional Guide Meridian, bet. secs. 23 and 24.

40.00

Over rolling land, through scattering undergrowth.

Asc. 55 ft.

Spur, slopes W. Desc. 40 ft.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4  
S23 | S24  
1917

Completion of  
Survey of Subdivision of T. 11 N., R. 3 E.

21.


Chains.

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

43.99 Gulch, course SW. Asc. 235 ft.

59.57 Thence over rolling mesa.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw and cactus.

40.00 N. 89° 49' E., on a random line, bet. secs. 13 and 24.

78.58 Set temp. 1/4 sec. cor.

Fall 7 lks. S. of the reestablished cor. of secs. 13 and 24, hereinbefore described.

Thence

S. 89° 46' W., on a true line, bet. secs. 13 and 24.


Over rolling mesa, through dense undergrowth.

Desc. 165 ft.

10.65 Gulch, course S. Asc. 290 ft.

28.58 Thence over rolling land.

38.58 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

53.64 Desc. 85 ft.

78.28 Small wash, course S. 10° E. Asc.

78.58 The cor. of secs. 13, 14, 23 and 24.

Land, rolling mesa.

Soil, rocky, 4th rate.

No timber.

Undergrowth, dense scrub oak.

North on Sectional Guide Meridian, bet. secs. 13 and 14.

Over rolling land, through scattering undergrowth.

Asc. 75 ft.

25.00 Thence over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

54.99 Spur, slopes W. Desc. 475 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, marked on brass cap

22. Completion of Survey of Subdivision of T. 11 N., R. 3 E., c

Chains.

T11N R3E  
S11 S12  
S14 S13  
1917

From which

A cedar, 6 ins. diam., brs. S.39°E.,  
104 lks. dist., marked T11N R3E S13 BT.

A cedar, 8 ins. diam., brs. N.77°E.,  
263 lks. dist., marked T11N R3E S12 BT.

No other trees within limits. Raise a mound of stone, 2  
ft. base, 1½ ft. high, W. of cor.

Land, rolling mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw and cedar.

40.00  
79:38

N.89°46'E., on a random line, bet. secs. 12 and 13.

Set temp. ¼ sec. cor.

Fall 4 lks. S. of the reestablished cor. of secs. 12 and  
13, on E. bdy. of Tp., hereinbefore described.

Thence

S.89°44'W., on a true line, bet. secs. 12 and 13.

Over mountainous land, through scattering undergrowth.

Desc. 405 ft.

39.38

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for ¼ sec. cor., marked on brass cap

1/4 S12  
1/4 S13  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, N.  
of cor.

40.57

Gulch, course SW. Asc. 25 ft.

44.53

Desc. 65 ft.

56.03

Wash, course NW. Asc. 85 ft.

66.45

Spur, slopes N. Desc. 65 ft.

79.38

The cor. of secs. 11, 12, 13 and 14.

Land, mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, cat claw and scrub oak.

5.45

North on Sectional Guide Meridian, bet. secs. 11 and 12.

Over mountainous land, through scattering undergrowth.

Desc. 70 ft.

19.27

Gulch, course NW. Asc. 265 ft.

40.00

Spur, slopes W. Desc. 365 ft.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for ¼ sec. cor., marked on brass cap

1/4  
S11 S12  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W.  
of cor.

54.87

Frank Bliss' house brs. N.31°58'W.

Sycamore Creek, 30 lks. wide, 8 ins. deep, course S.80°W.  
Asc. 325 ft.

56.56

Wire fence, brs. N.80°E. and S.80°W.

56.99

Road, brs. N.75°E. and S.80°W.

74.08

Thence over rolling land.

77.88

Wire fence, brs. E. and W.

Completion of  
Survey of Subdivision of T. 11 N., R. 3 E.

Chains.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, marked on brass cap

T11N R3E  
S 2 | S 1  
-----  
S11 | S12  
1917

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
Land, mountainous.  
Soil, rocky, 4th rate.  
No timber.  
Undergrowth, scrub oak, manzanita and cat claw.

40.00

N.89°44'E., on a random line, bet. secs. 1 and 12.  
Set temp. ¼ sec. cor.

79.40

Fall 7 lks. S. of the reestablished cor. of secs. 1 and 12, on E. bdy. of Tp., hereinbefore described.

Thence

S.89°41'W., on a true line, bet. secs. 1 and 12.  
Over mountainous land, through scattering undergrowth.  
Desc. 310 ft.

19.44

Wire fence, brs. NE. and SW.

31.43

Sycamore Creek, 60 lks. wide, 7 ins. deep, course S.70°W.  
Thence over rolling land.

34.43

Thence thru cultivated field.

39.40

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

S 1  
¼ S12  
1917

From which

A sycamore, 30 ins. diam., brs. S.35°W.,  
340 lks. dist., marked ¼S12 BT. Raise md. of stone  
(2ft. base, 1½ft. high, N. of cor.)

49.40

Asc. 295 ft.

75.70

Spur, slopes SW. Desc. 35 ft.

79.40

The cor. of secs. 1, 2, 11 and 12.

Land, mountainous and rolling.

Soil, 3rd and 4th rates.

No timber, except sycamore along creek.

Undergrowth, scrub oak, cat claw and cedar.

40.00

North on a random line, bet. secs. 1 and 2.  
Set temp. ¼ sec. cor.

85.62

Fall 38 lks. E. of the reestablished cor. of secs. 1, 2, 35 and 36, on the north boundary of Tp., hereinbefore described.

Thence

S.0°15'E., on a true line, bet. secs. 1 and 2.  
Over rolling land,

Asc. 35 ft.

2.92

Thence over rolling land.

15.62

Desc. 190 ft.

25.83

Wire fence, brs. NE. and SW.

35.68

Wash, course SW. Asc. 50 ft.

45.62

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼  
S 2 | S 1  
1917

Completion of

24. Survey of Subdivision of T. 11 N., R. 3 E.c

Chains.

And raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Desc. 80 ft.

55.06 Draw, course W. Asc. 60 ft.

61.00 Spur, slopes W. Desc. 100 ft.

70.78 Draw, course SW. Asc. 110 ft.

85.62 The cor. of secs. 1, 2, 11 and 12.

Land, rolling and rolling mountainous.

Soil, 3rd and 4th rates.

No timber or undergrowth.

Fair growth of grass.

From the cor. of secs. 25, 26, 35 and 36, West on Sectional Correction Line, bet. secs. 26 and 35. Over rolling land, through scattering undergrowth.

15.00 Desc. 70 ft.

24.94 Wash, course S. Asc. 20 ft.

26.40 Spur, slopes S. Desc. 95 ft.

33.68 Indian Creek, course N.70°W. Asc. 105 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

1/4 S26  
1/4 S35  
1917

From which

A cedar, 18 ins. diam., brs. N.86 1/2°E., 287 lks. dist., marked 1/4 S26 BT.

A cedar, 18 ins. diam., brs. S.17°E., 120 lks. dist., marked 1/4 S35 BT.

44.92 Spur, slopes N. Desc. 65 ft.

48.76 Wash, course N. Asc. 80 ft.

54.69 Spur, slopes N. Desc. 180 ft.

72.43 Indian Creek, course SW. Asc. 20 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, marked on brass cap

T11N R3E  
S27 S26  
S34 S35  
1917

From which

A cedar, 15 ins. diam., brs. N.18°E., 84 lks. dist., marked T11N R3E S26 BT.

A cedar, 11 ins. diam., brs. S.18°W., 58 lks. dist., marked T11N R3E S34 BT.

No other trees within limits. Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

No timber.

Undergrowth, scrub oak, and cat claw.

South on a random line, bet. secs. 34 and 35.

40.00 Set temp. 1/4 sec. cor.

81.16 Fall 35 lks. W. of the reestablished cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.

Thence

N.0°15'W., on a true line, bet. secs. 34 and 35.

Over rolling land, through scattering undergrowth.

Desc. 65 ft.


10.43 Draw, course S.40°W. Asc. 210 ft.

36.20 Spur, slopes W. Desc. 275 ft.

41.16 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor., marked on brass cap

Completion of  
survey of Subdivision of T. 11 N., R. 3 E.

Chains



From which

A cedar, 12 ins. diam., brs. S.29°W.,  
229 lks. dist., marked  $\frac{1}{4}$ S34 BT.

No other trees within limits. Raise a mound of stone, 2  
ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

63.81

Top of bluff; desc. abruptly.

75.02

Indian Creek, 15 lks. wide, 10 ins. deep, course S.30°W.  
Asc. 55 ft.

81.16

The cor. of secs. 26, 27, 34 and 35.

Land, rolling.

Soil, rocky, 3rd and 4th rates.

No timber.

Undergrowth, cedar and cactus.

40.00

West on a random line, bet. secs. 27 and 34.

83.62

Set temp.  $\frac{1}{4}$  sec. cor.

Fall 17 lks. N. of the reestablished cor. of secs. 27 and  
34, hereinbefore described.

Thence

N.89°53'E., on a true line, bet. secs. 27 and 34.

Over rolling land. through scattering undergrowth.


Desc. 75 ft.

28.62

Draw, course S. Asc. 55 ft.

43.62

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap



And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N.  
of cor.

57.30

Road, brs. N.20°E. and S.20°W.

60.80

Ridge, brs. NE. and SW. Desc. 55 ft.

68.60

Thence over rolling land.

76.25

Desc. 85 ft.

83.62

The cor. of secs. 26, 27, 34 and 35.

Land, rolling

Soil, rocky, 3rd and 4th rates.

No timber.

Undergrowth, cactus, cat claw and cedar.

Fair grass.

15.22

From the cor. of secs. 26, 27, 34 and 35,

N.0°1'W., bet. secs. 26 and 27.


Over rolling land, through scattering undergrowth.

Asc. gradually, 430 ft.

40.00

Road, brs. NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap



From which

A cedar, 9 ins. diam., brs. S.33°E.,  
40 lks. dist., marked  $\frac{1}{4}$ S26 BT.

A cedar, 8 ins. diam., brs. S.28°W.,  
133 lks. dist., marked  $\frac{1}{4}$ S27 BT.

26. Completion of Survey of Subdivision of T. 11 N., R. 3 E.

Chains.

80.00 Continue gradual ascent.  
 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, marked on brass cap

T11N	R3E
S22	S23
<hr/>	
S27	S26
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
 Land, rolling.  
 Soil, rocky, 4th rate.  
 No timber.  
 Undergrowth, cat claw, cedar and cactus.

40.00 East on a random line, bet. secs. 23 and 26.  
 Set temp. ¼ sec. cor.  
 79.97 Intersect N. and S. line, 11 lks. N. of the cor. of secs. 23, 24, 25 and 26.  
 Thence  
 N.89°55'W., on a true line, bet. secs. 23 and 26.  
 Over rolling land, through scattering undergrowth.  
 Desc. 20 ft.  
 2.58 Wash, course S.10°E. Asc. 45 ft.  
 12.49 Low ridge, brs. N. and S. Desc. 100 ft.  
 26.90 Gulch, course S.15°W. Asc. 235 ft.  
 39.98½ Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap c

¼	S23
¼	S26
<hr/>	
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.  
 43.61 Spur, slopes S.20°W. Desc. 280 ft.  
 59.33 Gulch, course S.15°W. Asc. 200 ft.  
 79.97 The cor. of secs. 22, 23, 26 and 27.  
 Land, rolling and broken.  
 Soil, rocky clay, 4th rate.  
 No timber.  
 Undergrowth, scattering cedar and cat claw.

40.00 S.89°53'W., on a random line, bet. secs. 22 and 27.  
 Set temp. ¼ sec. cor.  
 83.66 Fall 3 lks. N. of the reestablished cor. of secs. 22 and 27, hereinbefore described.  
 Thence  
 N.89°52'E., on a true line, bet. secs. 22 and 27.  
 Over rolling land, through scattering undergrowth.  
 Desc. 100 ft.  
 23.81 Gulch, course SW. Asc. 325 ft.  
 36.76  
 43.66 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for ¼ sec. cor., marked on brass cap

¼	S22
¼	S27
<hr/>	
1917	

And raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.  
 70.66 Thence over rolling land.  
 83.66 The cor. of secs. 22, 23, 26 and 27.  
 Land, rolling and rolling mountainous.  
 Soil, 4th rate.  
 No timber.


Completion of  
Survey of Subdivision of T. 11 N., R. 3 E.

27.


Chains.

Undergrowth, cat claw and cactus.

11.16 N.0°1'W., bet. secs. 22 and 23.  
 29.38 Over mountainous land, through  
 40.00 Asc. 220 ft.  
 End of long spur, from N.15°E. Desc. 90 ft.  
 Draw, course SW. Asc. 220 ft.  
 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap




49.79 And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W.  
 of cor.  
 59.79 Top of mesa; thence over rolling land.  
 80.00 Desc. 85 ft.  
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in  
 the ground, for cor. of secs. 14, 15, 22 and 23, marked  
 on brass cap



And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W.  
 of cor.  
 Land, rolling and mountainous.  
 Soil, rocky, 4th rate.  
 No timber or undergrowth.

40.00 S.89°55'E., on a random line, bet. secs. 14 and 23.  
 79.96 Set temp.  $\frac{1}{4}$  sec. cor.  
 Intersect N. and S. line, 2 lks. S. of the cor. of secs.  
 13, 14, 23 and 24,

Thence  
 N.89°56'W., on a true line, bet. secs. 14 and 23.  
 Over rolling land, through  
 Asc. 250 ft.  
 39.98 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap



79.96 And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N.  
 of cor.  
 Thence over rolling land.  
 The cor. of secs. 14, 15, 22 and 23.  
 Land, rolling.  
 Soil, 4th rate.  
 No timber.  
 Undergrowth, none.

40.00 S.89°52'W., on a random line, bet. secs. 15 and 22.  
 83.47 Set temp.  $\frac{1}{4}$  sec. cor.  
 Fall 2 lks. S. of the reestablished cor. of secs. 15 and  
 22, hereinbefore described.  
 Thence  
 N.89°53'E., on a true line, bet. secs. 15 and 22.

Completion of

28. Survey of Subdivision of T. 11 N., R. 3 E.

Chains.

43.47 Over rolling mesa. Asc. 235 ft.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S15  
S22  
1917

And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

83.47 Thence over rolling mesa.  
The cor. of secs. 14, 15, 22 and 23.  
Land, rolling mesa.  
Soil, rocky, 4th rate.  
No timber or undergrowth.

40.00 N.0°1'W., bet. secs. 14 and 15.  
Over rolling mesa.  
Desc. gradually, 290 ft.  
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

S15 | S14  
1917

And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

53.82 Draw, course N.35°W. Asc. 65 ft.  
60.76 Ridge, brs. N.35°W. and S.35°E. Desc. 40 ft.  
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, marked on brass cap

T11N R3E  
S10/S11  
S15/S14  
1917

And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling mesa.  
Soil, rocky, 4th rate.  
No timber, or undergrowth.

40.00 S.89°56'E., on a random line, bet. secs. 11 and 14.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Thence  
N.89°58'W., on a true line, bet. secs. 11 and 14.  
Over mountainous land, through scattering undergrowth.  
Desc. 20 ft.

1.06 Gulch, course NW. Asc. 65 ft.  
15.33 Spur, slopes N. Desc. 120 ft.  
30.20 Gulch, course N. Asc. 340 ft.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S11  
S14  
1917

From which  
A cedar, 13 ins. diam., brs. N.29°W.,  
51 lks. dist., marked  $\frac{1}{4}$ S11 BT.

Completion of  
Survey of Subdivision of T. 11 N., R. 3 E. 29.

Chains.

65.00 A cedar, 8 ins. diam., brs. S.10 $\frac{3}{4}$ °W.,  
121 lks. dist., marked  $\frac{1}{4}$ S14 BT.  
74.00 Thence over rolling land.  
80.00 Frank Bliss' house brs. N.51°E.  
The cor. of secs. 10, 11, 14 and 15.  
Lanr, rolling and mountainous.  
Soil, 4th rate.  
No timber.  
Undergrowth, scrub oak and cat claw.

40.00 S.89°53'W., on a random line, bet. secs. 10 and 15.  
Set temp.  $\frac{1}{4}$  sec. cor.  
83.34 Fall 2 lks. S. of the reestablished cor. of secs. 10 and  
15, hereinbefore described.  
Thence  
N.89°54'E., on a true line, bet. secs. 10 and 15.  
Over rolling land, through scattering undergrowth.  
39.52 Desc. 265 ft., over mountainous land.  
43.34 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$  S10  
 $\frac{1}{4}$  S15  
 1917

47.68 And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N.  
of cor.  
52.56 Gulch, course NW. Asc. 275 ft.  
83.34 Thence over rolling land.  
The cor. of secs. 10, 11, 14 and 15.  
Land, rolling and mountainous.  
Soil, 4th rate.  
No timber.  
Undergrowth, cat claw and cactus.

8.65 N.0°1'W., bet. secs. 10 and 11.  
27.52 Over rolling mes, through scattering undergrowth.  
Desc. 440 ft.  
Sycamore Creek, 35 lks. wide, 10 ins. deep, course W. Asc.  
350 ft.  
32.50 Road, brs. E. and W.  
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$\frac{1}{4}$   
 S10 | S11  
 1917

64.56 From which  
80.00 A cedar, 7 ins. diam., brs. N.71 $\frac{1}{2}$ °E.,  
11 lks. dist., marked  $\frac{1}{4}$ S11 BT:  
No other trees within limits. Raise a mound of stone, 2  
ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.  
Spur, slopes SW. Desc. 45 ft.  
Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the  
ground, for cor. of secs. 2, 3, 10 and 11, marked on  
brass cap

T11N R3E  
 S 3 | S 2  
 S10 | S11  
 1917

And raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W.  
of cor.

Completion of  
 50. Survey of Subdivision of T. 11 N., R. 3 E.

Chains.

Land, rolling and mountainous.  
 Soil, rocky, 4th rate.  
 No timber.  
 Undergrowth, scrub oak and cat claw.

40.00

S.89°58'E., on a random line, bet. secs. 2 and 11.  
 Set temp.  $\frac{1}{4}$  sec. cor.

79.90

Intersect N. and S. line, 2 lks. N. of the cor. of secs.  
 1, 2, 11 and 12.

Thence

N.89°57'W., on a true line, bet. secs. 2 and 11.

Over rolling mountainous land, through scattering under-  
 growth.

Desc. 225 ft.

13.53

Gulch, course S. Asc. 325 ft.

14.59

Wire fence, brs. N. and S.

28.95

Spur, slopes S. Desc. 335 ft.

39.95

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S 2}{S 11}$$

1917

And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N.  
 of cor.

66.28

Gulch, course S. Asc. 110 ft.

73.10

Thence over rolling land.

79.90

The cor. of secs. 2, 3, 10 and 11.

Land, rolling and rolling mountainous.

Soil, 4th rate.

No timber.

Undergrowth, cat claw and cactus.

Fair grass.

40.00

S.89°54'W., on a random line, bet. secs. 3 and 10.

Set temp.  $\frac{1}{4}$  sec. cor.

82.84

Fall 8 lks. S. of the reestablished cor. of secs. 3 and 10,  
 hereinbefore described.

Thence

N.89°57'E., on a true line, bet. secs. 3 and 10.

Over rolling land.

Asc. 80 ft.

27.84

Thence over rolling land.

42.84

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S 3}{S 10}$$

1917

And raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N.  
 of cor.

57.89

Desc. 80 ft.

82.84

The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, rocky, 3rd and 4th rates.

No timber or undergrowth.

Survey of Survey of  
Subdivision of Township 11 North, Range 3 East.

Chains.  
North, on random line, bet. secs. 2 and 3.  
40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
86.29 Fall 44 lks. E. of the reestablished cor. of secs. 2 and 3 on  
N. bdy. of Tp., hereinbefore described.  
Thence,  
S.  $0^{\circ}17'E.$ , on a true line, bet. secs. 2 and 3.  
Over rolling land, thru. scattering undergrowth.  
25.00 Ascend 110 ft.  
44.90 Ridge, brs. NE. and SW. Descend 285 ft.  
46.29 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., marked on brass cap,  
  
S 3 S 2  
1917  
  
and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
Cor.  
80.70 Wash, course SE. Ascend 70 ft.  
86.29 The cor. of secs. 2, 3, 10 and 11.  
Land, rolling.  
Soil, 3rd and 4th rate.  
No timber.  
Undergrowth, scrub oak and catclaw.

Boundaries of East half of Township 11 North, Range 3 East.  
Latitudes, Departures and Closing Errors.

Line designated.	True course.	Dist.	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N. $88^{\circ}48'W.$	39.43	.84			39.42
	N. $89^{\circ}53'W.$	39.52	.08			39.52
	N. $89^{\circ}6'W.$	40.24	.63			40.24
	N. $89^{\circ}47'W.$	39.84	.15			39.84
	N. $89^{\circ}15'W.$	39.63	.53			39.63
	N. $89^{\circ}16'W.$	41.00	.51			41.00
Subdivisional boundary	N. $2^{\circ}43'W.$	80.80	80.70			3.83
	N. $0^{\circ}15'W.$	39.83	39.83			.18
	N. $0^{\circ}4'W.$	39.90	39.90			.05
	N. $0^{\circ}13'E.$	39.93	39.93		.15	
	N. $0^{\circ}12'E.$	40.05	40.05		.14	
	N. $0^{\circ}9'W.$	39.69	39.69			.10
	N. $0^{\circ}11'E.$	39.82	39.82		.13	
	N. $0^{\circ}23'E.$	38.97	38.97		.27	
	N. $0^{\circ}33'E.$	39.75	39.75		.39	
N. $7^{\circ}21'W.$	41.76	41.42			5.34	
N. $7^{\circ}57'W.$	47.53	47.07			6.57	
North boundary,	S. $89^{\circ}33'E.$	134.13		1.06	134.12	
	S. $89^{\circ}44'E.$	40.04		.19	40.04	
	S. $89^{\circ}38'E.$	40.25		.26	40.25	
	S. $89^{\circ}45'E.$	40.10		.18	40.10	
East boundary,	S. $0^{\circ}53'W.$	39.94		39.94		.62
	S. $0^{\circ}3'W.$	39.94		39.94		.03
	S. $0^{\circ}7'E.$	39.99		39.99	.08	
	S. $0^{\circ}7'W.$	40.07		40.07		.08
	S. $0^{\circ}35'W.$	79.49		79.49		.81
	S. $0^{\circ}24'E.$	49.32		49.32	.35	
	S. $1^{\circ}6'E.$	38.51		38.50	.74	
South,	160.52		160.52			
Convergency,					.26	
Totals,			489.87	489.46	257.02	257.26
			489.46			257.02
Error in latitude,			.41			
Error in departure,						.24

GENERAL DESCRIPTION.

The portion of this township surveyed at this time lies across a very broken mesa, on the east side of the Agua Fria river. It is drained by Indian Creek on the South, and Sycamore creek on the North.

The soil is very sticky clay, with a good deal of rock on the top, but seems quite fertile where it has been cultivated.

There is no timber, except some scattering sycamore trees along the creeks, and there is very little undergrowth of cedar, cactus and catclaw. There is a fair growth of grass.

The whole country seems to be of volcanic origin, and all of the rock is lava. There is much rim rock about the edges of all of the gulches.

There is one settler in sec. 25, and one in sec. 11, and one in sec. 1. These settlers are on Indian and Sycamore Creeks, and seem to have about all the agricultural land in the township, the remainder being suited to grazing only.

Township 11 North, Range 3 East.

Group 61 - - Arizona.

DATE DIAGRAM.

				RESURVEY			
				5-3-17	5-3-17	5-3-17	
6	5	4	4-24-17	3	5-3-17	2	5-3-17
				5-3-17	5-2-17	5-2-17	4-26-17
7	8	9	4-24-17	10	5-2-17	11	4-30-17
				5-2-17	5-2-17	5-2-17	4-26-17
18	17	16	4-24-17	15	4-28-17	14	4-30-17
		RESURVEY		5-1-17	5-1-17	5-1-17	4-26-17
19	20	21	4-24-17	22	4-28-17	23	4-30-17
				5-1-17	5-1-17	5-1-17	4-26-17
30	29	28	4-24-17	27	4-28-17	26	4-30-17
				4-28-17	4-27-17	4-27-17	4-26-17
31	32	33	4-24-17	34	4-28-17	35	4-30-17
				4-25-17	4-25-17	4-25-17	4-26-17
				RESURVEY			

Lines executed by Geo. F. Rigby, on dates shown on the above diagram.



34

For CERTIFICATE OF UNITED STATES SURVEYOR.  
See Book "E" of this Group.

I, \_\_\_\_\_, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for \_\_\_\_\_ bearing date of the \_\_\_\_\_ day of \_\_\_\_\_, 191\_\_\_\_, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of \_\_\_\_\_ of the \_\_\_\_\_ Meridian, in the State of \_\_\_\_\_, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for \_\_\_\_\_ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

\_\_\_\_\_  
U. S. Surveyor.

BOOK 3331

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, May 14, 1920

The foregoing field notes of the <sup>re-</sup>survey of \_\_\_\_\_ the \_\_\_\_\_ East, and parts of the North and South boundaries, and part of the Subdivision lines, and SURVEY of \_\_\_\_\_ part of the Subdivision lines of \_\_\_\_\_ TOWNSHIP 11 NORTH, RANGE 3 EAST,

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by George F. Rigby, U. S. Surveyor,

under ~~his~~ special instructions dated Oct. 20, 1915, for Group 61, Arizona, ~~and~~ having been critically examined, and the necessary corrections and explanations made, the said field notes, and the <sup>re-</sup>surveys and surveys they describe, are hereby approved.

  
\_\_\_\_\_  
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.