

Book "G"

BOOK 3433

Mar 21 1922

77 5/10

FIELD NOTES

OF THE RETRACEMENT OF

Part of the North Boundary, and

Part of the Subdivision lines,

and of the RESURVEY of the

South and West boundaries, and

Part of the Subdivision lines,

and the SURVEY of

Part of the Subdivision lines (completion) of

TOWNSHIP 8 SOUTH, RANGE 10 EAST,

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

William H. Thorn, U. S. Cadastral Engineer,

Horace M. Muscott, U.S. Transitman,

William D. Wilson, U. S. Transitman,

In the capacity of U.S. Surveyors, under instructions dated February 6, 1918,

issued by the United States Surveyor General to govern surveys included in

Group No. 81, which were approved by the Commissioner of the General Land

Office, February 27, 1918, and Assignment Instructions, dated

December 18, 1918.

Retracement,
Resurvey & Survey commenced May 19, 1919

Retracement,
Resurvey & Survey completed May 28, 1919


3433


(1A)

BOOK 3433

Book "G"
Group 81 - - Arizona.

INDEX DIAGRAM.

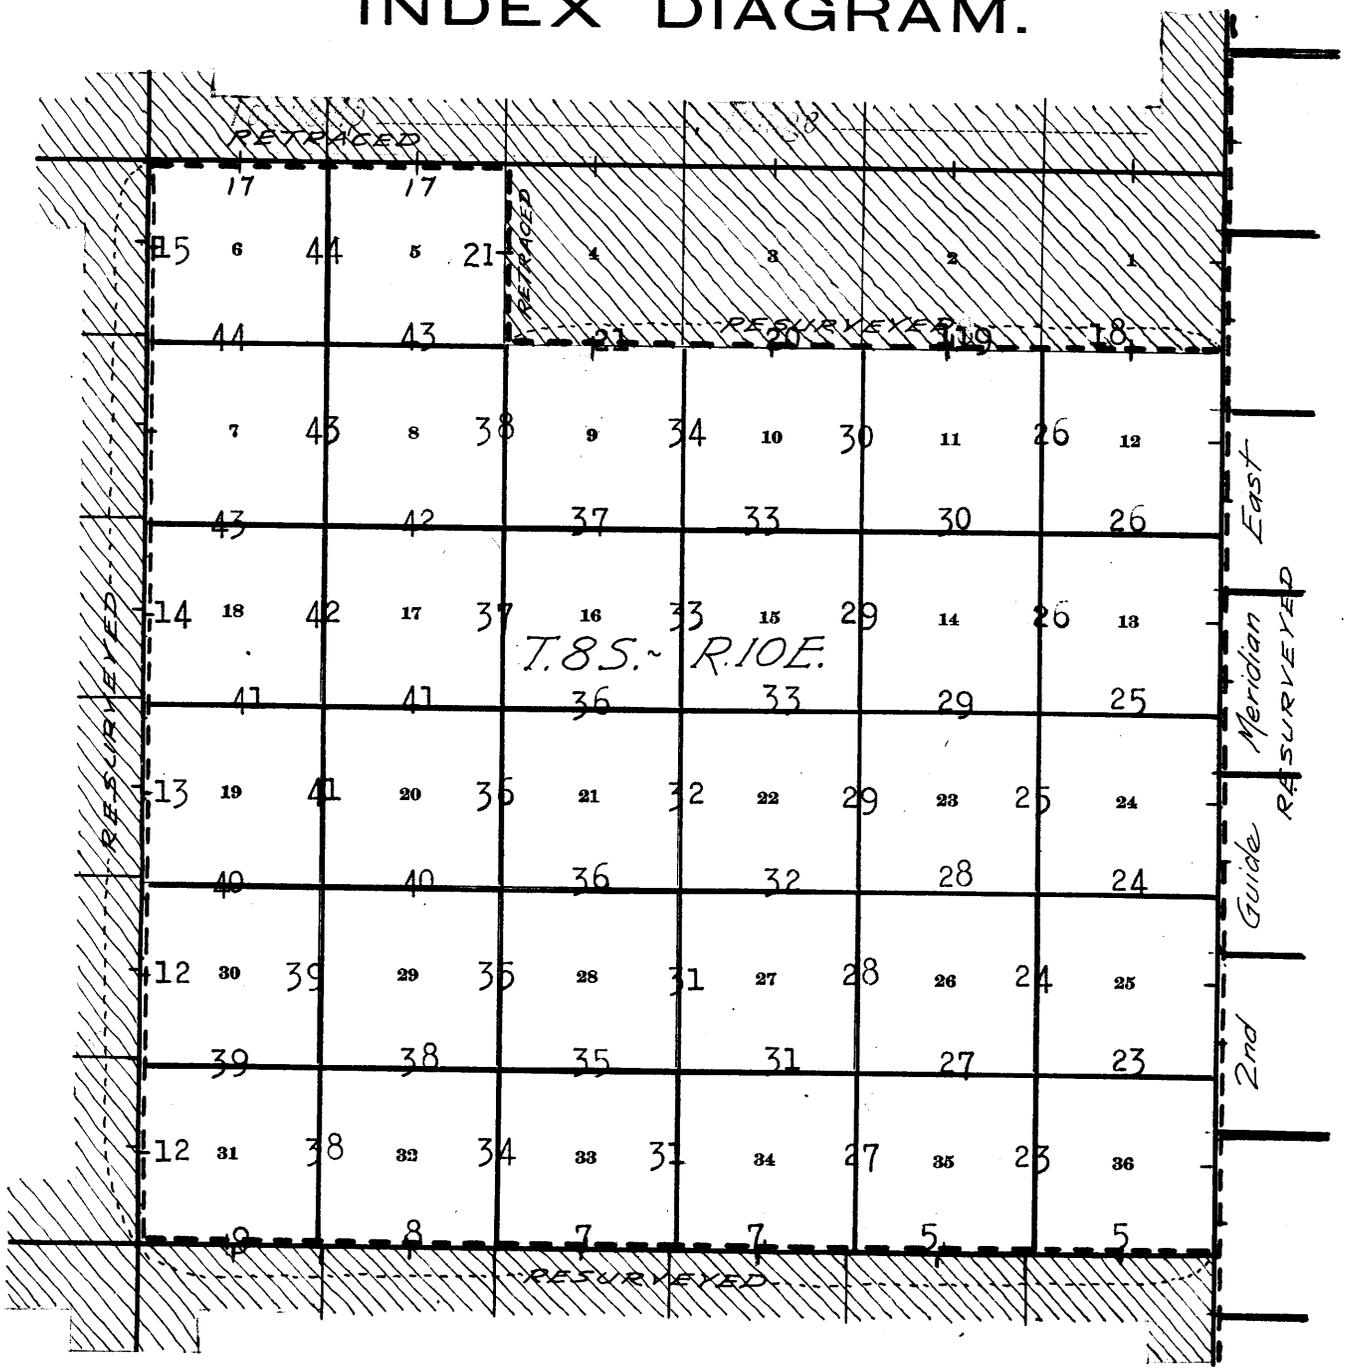

-  Lines surveyed under this group.
-  Lines retraced or resurveyed under this group.
-  Accepted surveys.
-  Areas surveyed as per accepted plats on file.


BOOK 3433

Book "G"

Group 81 - - - - Arizona.

4-679 b

DATE DIAGRAM.

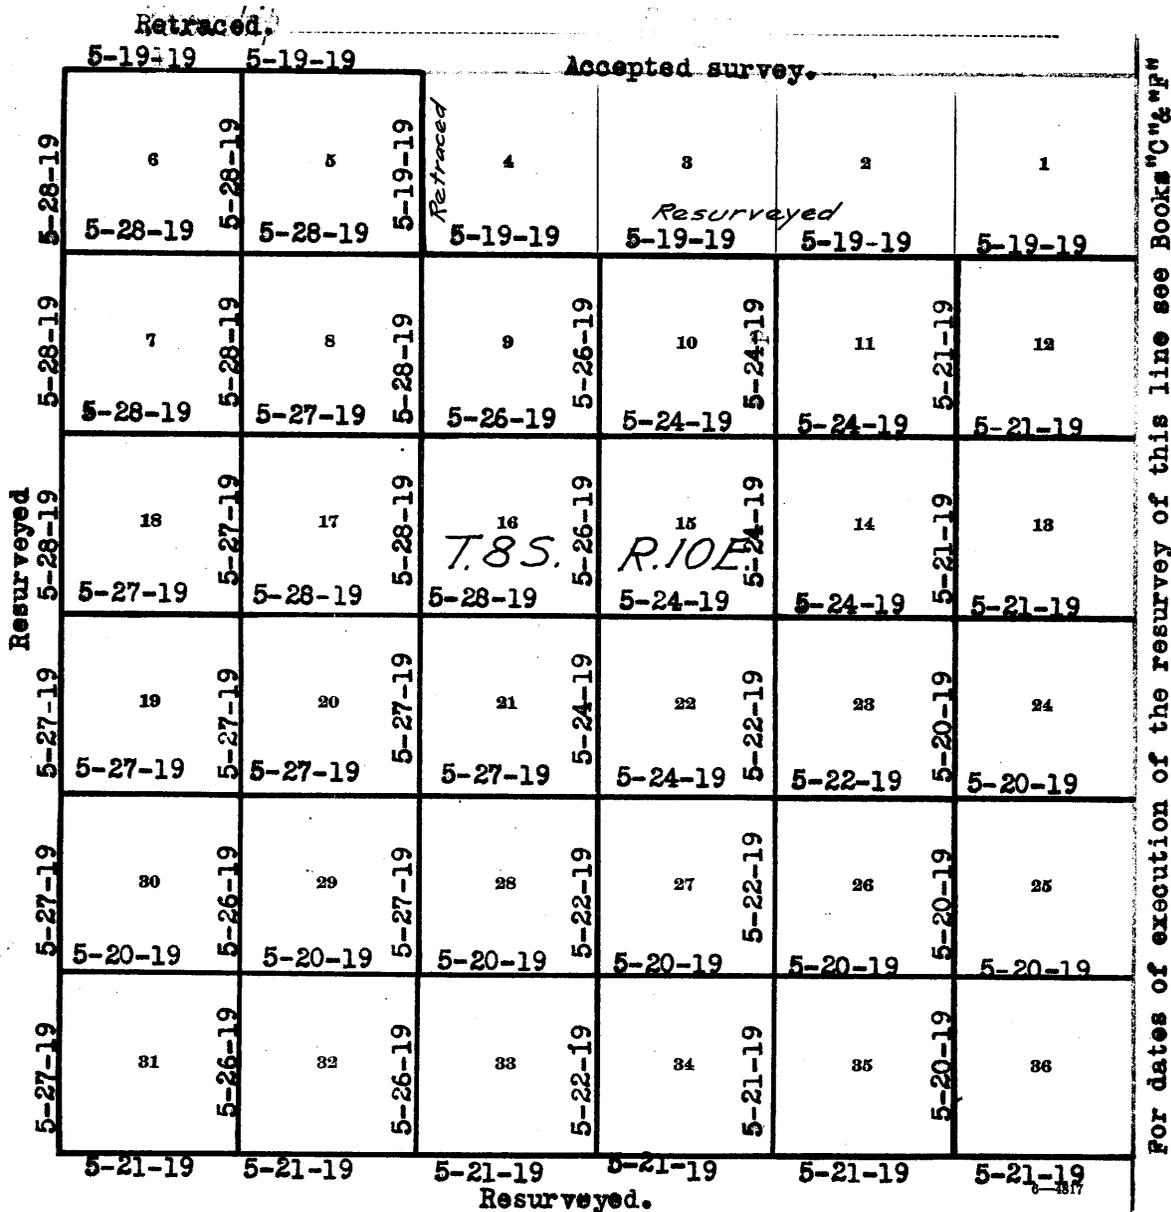

Black lines on above diagram indicate surveys executed by William H. Thorn, U.S. Cadastral Engineer, on dates shown thereon.

Red lines on above diagram indicate surveys executed by Horace M. Muscott, U.S. Transitman, on dates shown thereon.

Green lines on above diagram indicate surveys executed by William D. Wilson, U.S. Transitman on dates shown thereon.

Retracement,

Resurvey and survey hereinafter described, executed by William H. Thorn, U. S. Cadastral Engineer, Horace M. Muscott, U. S. Transitman, & William D. Wilson, Temporary U. S. Transitman, on dates shown on diagram on page 2 hereof. Mr. Thorn used Young and Sons' light mountain transit No. 8592. Mr. Muscott and Mr. Wilson used Young and Sons' light mountain transit No. 8248, both of which instruments are described, with certificate of approval by the Assistant Supervisor of Surveys, in Book "A."

Test of Instruments:

We examine the adjustments of the transits, and correct all errors; then, to test the solar apparatus, by comparing their indications, resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations on Polaris at elongation, we proceed as follows:

May 18, 1920: At our camp in sec. 16, T. 8 S., R. 10 E., G. and S. R. B. & M., in latitude $32^{\circ} 43\frac{1}{2}' N.$; longitude, $111^{\circ} 19' W.$, at 3 hrs. 55 m. a.m., l.m.t., by our watches, which are set to correct local mean time, we observe Polaris at eastern elongation, in accordance with the Manual of Instructions, and mark a point in the line thus determined by a tack driven in a stake, 5 chs. N. of our station.

We lay off the azimuth of Polaris, $1^{\circ} 20\frac{1}{2}'$ to the east, and mark the meridian thus determined, by a tack in a stake driven firmly in the ground, 5 chs. N. of station. Then, placing each instrument on the meridian, at 9h. 0m., a.m., l.m.t., we set off $32^{\circ} 43\frac{1}{2}' N.$ on the lat. arcs; $19^{\circ} 25\frac{1}{2}' N.$ on the decl. arcs, and determine a meridian with each solar, which, in each case agrees with the true meridian.

At apparent noon, with the latitude arcs unchanged, we observe the sun on the meridian with each transit; the resulting readings of the decl. arcs are $19^{\circ} 27' N.$, which agrees with the computed declination of the sun.

At 3 hrs. 0m. p.m., l.m.t., with the latitude arcs unchanged, we set off $19^{\circ} 29' N.$ on the decl. arcs, and determine a meridian with each solar, which, in each case agrees with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1' 30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Resurvey of South bdy. of Township 8 South, Range 10 East.

Chains.

Retracement for Resurvey.

This line was originally surveyed by R.C. Powers, U.S.D.S. in 1883, and the cors. established by him are those which are found, as described in the following notes, no previous resurvey of the line having been made. A retracement of the west two miles of the line was executed by Hugh P. DuVal, U.S.D.S. in 1911, but no cors. thereon were reestablished by him.

From the reestablished cor. of T_s. 8 and 9 S., R. 10 E., on 2nd Guide Meridian East, described in Book "C," West, on random line on E. half of N. bdy. of sec. 1, T. 9 S., R. 10 E.

40.07 Fall 54 lks. S. of original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 1 are therefore N. 89° 14' W., 40.07 chs.

Thence,
West, on random line on W. $\frac{1}{2}$ of N. bdy. of sec. 1, T. 9 S., R. 10 E.

41.16 Fall 192 lks. S. of the original cor. of secs. 1, 2, 35 and 36, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 1 are therefore N. 87° 20' W., 41.20 chs.

40.16 West, on random line, on N. bdy. of sec. 2 (E. $\frac{1}{2}$).
Fall 12 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 2 are therefore N. 89° 50' W., 40.16 chs.

Thence,
West, on random line.
40.00 No trace of original cor. of secs. 2, 3, 34 and 35 can be found after diligent search.

Set temp. cor. of secs. 2 and 3.
Continue line and measurement.
80.00 No trace of original $\frac{1}{4}$ sec. cor. of secs. 3 and 34 can be found after diligent search.

Set temp. $\frac{1}{4}$ sec. cor. of sec. 3.
Continue line and measurement,
120.00 No trace of original cor. of secs. 3, 4, 33 and 34 can be found after diligent search.

Set temp. cor. of secs. 3 and 4.
Continue line and measurement,
160.00 No trace of original $\frac{1}{4}$ sec. cor. of secs. 4 and 33 can be found after diligent search.

Set temp. $\frac{1}{4}$ sec. cor. of sec. 4.
Continue line and measurement.
200.00 No trace of original cor. of secs. 4, 5, 32 and 33 can be found after diligent search.

Set temp. cor. of secs. 4 and 5.
Continue line and measurement.
238.22 Fall 30 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, hereinafter described.

True course and dist. of Tp. bdy. from $\frac{1}{4}$ sec. cor. of secs. 2 and 35 to this $\frac{1}{4}$ sec. cor. are therefore N. 89° 56' W., 238.22 chs., which determines the proper interval for reestablishment of the missing intermediate cors. referring to secs. and quarter secs. in T. 9 S., R. 10 E. only to be 39.70 + chs.

Thence,
West, on random line.
40.00 No trace of original cor. of secs. 5, 6, 31 and 32 can be found after diligent search.

Set temp. cor. of secs. 5 and 6.
Continue line and measurement,
77.00 Fall 96 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.

Chains.

Retracement for Resurvey, continued.

True course and dist. of Tp. bdy. from $\frac{1}{4}$ sec. cor. of secs. 5 and 32 to this $\frac{1}{4}$ sec. cor. are therefore, S. $89^{\circ}19'$ W., 77 chs., which gives a dist. of 38.50 chs. for both the W. half of N. bdy. of sec. 5, and the E. half of N. bdy. of sec. 6.

37.88 Thence, West, on random line on N. bdy. of sec. 6, (W. $\frac{1}{2}$). Intersect the corner of Ts. 8 and 9 S., Rs. 9 and 10 E., re-established by Jesse B. Wright, U.S.S. in 1913. This cor. is hereinafter described. True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 6 are therefore west, 37.88 chs.

Resurvey.

From the reestablished cor. of Ts. 8 and 9 S., R. 10 E., on 2nd Guide Meridian East, described in Book "C," N. $89^{\circ}14'$ W., on true line, on S. bdy. of sec. 36. Over level land, thru. dense undergrowth.

.80 Wire fence brs. N. and S. NE. fence cor. brs. N. about 175 lks. dist.

Thence nearly parallel to fence N. of line, about 175 lks. dist.

40.07 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a mesquite post, 3 ins. in diam., 2 ft. above ground, firmly set in ground and mound of earth, marked " $\frac{1}{4}$ S" on N. face. No trace of old pits is visible. No bearing trees. Reestablish this cor. as follows: Destroy mound of earth, reset the old post in same position, exposing 1 ft. above ground, and alongside old post, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 & 36, with brass cap, marked

$\frac{1}{4}$ S 36
S 1
1919

dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.

Thence, N. $87^{\circ}20'$ W., on true line, continuing measurement of S. bdy. of sec. 36.

Over level land, nearly parallel to wire fence N. of line about 175 lks. dist.

43.87 Wash, 20 lks. wide, course N. 80° W.
80.04 (80.00 chs. westing from Tp. cor.) Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 35 and 36 only, with brass cap, marked

T8S | R10E
S35 | S36
1919

Dig pits, 24x24x12 ins. NW. and NE. of post, 4 ft. dist. Land, level. Soil, sandy, 1st rate. Undergrowth, dense greasewood, scrub palo verde and mesquite. No timber.

1.23 N. $87^{\circ}20'$ W., on true line, on S. bdy. of sec. 35. Over level land, thru. dense undergrowth, nearly parallel to wire fence, N. of line about 175 lks. dist. (41.20 chs. N. $87^{\circ}20'$ W. from $\frac{1}{4}$ sec. cor. of secs. 1 and 36),

6 Resurvey of the South bdy. of Township 8 South, Range 10 East.

Chains.

Intersect the original cor. of secs. 1, 2, 35 and 36 which is a mesquite stake 3 ins. in diam., 2½ ft. above ground, firmly set in ground and mound of earth, marked "T8SS36" on NW., "R10ES1" on SE., "T9SS2" on SW. and "S35" on NW. face, 1 notch on E. edge, and 5 notches on W. edge, and witnessed by the record bearing tree, A mesquite (now dead) 8 ins. in diam., S. 57° E., 163 lks. dist., marked "T9SR10ES1 BT."

No trace of old pits is visible.

Reestablish this cor. as follows:

Destroy mound of earth; destroy marking on NE. and NW. faces; reset old post in same position exposing 2 ft. above ground, and alongside same set

An iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 1 and 2 only, with brass cap, marked

| | |
|------|------|
| S 2 | S 1 |
| T9 S | R10E |
| 1919 | |

Dig pits, 24x24x12 ins., SE. and SW. of post, 4 ft. dist. N. 89° 50' W., on true line, continuing measurement of S. bdy. of sec. 35, over level land, nearly parallel to wire fence N. of line, about 150 lks. dist.

9.70
40.00

Wash, 25 lks. wide, course S. 80° W.

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 35, only, with brass cap, marked

| |
|------|
| S 35 |
| ¼ |
| 1919 |

41.39

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. (40.16 chs. N. 89° 50' W. from cor. of secs. 1 and 2), Intersect the original ¼ sec. cor. of secs. 2 and 35, which is a mesquite post, 3 ins. in diam., 2 ft. above ground firmly set in ground and mound of earth, marked "¼" on N. face. No trace of old pits is visible. No bearing trees. Reestablish this cor. as follows: Destroy mound of earth, reset the old post in same place, exposing 1 ft. above ground, and alongside same, set An iron post, 3 ft. long, 1 in. in diam., alongside of old cor. post, 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 2 only, with brass cap, marked

| |
|------|
| ¼ |
| S 2 |
| 1919 |

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. Thence,

47.90
80.00

N. 89° 56' W., on true line, continuing measurement of S. bdy. of sec. 35, over level land nearly parallel to wire fence N. of line about 100 lks. dist.

Same wash, 30 lks. wide, course N. 80° W.

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 34 and 35 only, with brass cap, marked

| | |
|-----|------|
| T8S | R10E |
| S34 | S35 |

1919

Dig pits 24x24x12 ins. NE. and NW. of post, 4 ft. dist. Land, level. Soil, sandy, 1st rate. Undergrowth, dense greasewood and scrub mesquite. No timber.

Resurvey of South bdy. of Township 8 South, Range 10 East.

Chains.

1.09 N. 89° 56' W., on true line, on S. bdy. of sec. 34.
 Over level land, thru. dense undergrowth. Along wire fence
 nearly parallel to line at about 100 lks. N.
 (Proportional dist. of 39.70 chs. N. 89° 56' W. from $\frac{1}{4}$ sec. cor.
 of sec. 2),
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for reestablished cor. of secs. 2 and 3 only,
 with brass cap, marked

| | |
|-------|--------|
| S 3 | S 2 |
| T 9 S | R 10 E |
| 1919 | |

40.00 Dig pits, 24x24x12 ins. SE. and SW. of post, 4 ft. dist.
 Continue line and measurement over level land, nearly
 parallel to fence, about 75 lks. N. of line.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 34
 only, with brass cap, marked

| | |
|---------------|------|
| $\frac{1}{4}$ | S 34 |
| 1919 | |

40.80 Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist.
 (Proportional dist. of 39.71 chs., N. 89° 56' W. from cor. of
 secs. 2 and 3),
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 3.
 only, with brass cap, marked

| | |
|---------------|-----|
| $\frac{1}{4}$ | S 3 |
| 1919 | |

80.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Continue line and measurement, over level land, nearly
 parallel to fence N. of line, about 50 lks. dist.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for reestablished cor. of secs. 33 and 34
 only, with brass cap, marked

| | |
|-------|--------|
| T 8 S | R 10 E |
| S 33 | S 34 |
| 1919 | |

Dig pits 24x24x12 ins. NW. and NE. of post, 4 ft. dist.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood, scrub mesquite and palo
 verde.
 No timber.

.50 N. 89° 56' W., on true line, on S bdy. of sec. 33.
 Over level land, thru. dense undergrowth, nearly parallel
 to wire fence, N. of line about 10 lks. dist.
 (Proportional dist. of 39.70 chs., N. 89° 56' W. from $\frac{1}{4}$ sec.
 cor. of sec. 3),
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for reestablished cor. of secs. 3 and 4
 only, with brass cap, marked

| | |
|-------|--------|
| S 4 | S 3 |
| T 9 S | R 10 E |
| 1919 | |

8 Resurvey of South bdy. of Township 8 South, Range 10 East.

Chains.

Dig pits 24x24x12 ins., SE. and SW. of post, 4 ft. dist.
 Continue line and measurement.
 Over level land, nearly parallel to fence N. of line.
 10.00 Cross the wire fence, which has nearly paralleled the Tp.
 bdy. E. of this point. Thence nearly parallel to said
 fence, and north therefrom.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 33
 only, with brass cap, marked

S 33
 $\frac{1}{4}$ ———
 1919

40.21 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 (Proportional dist. of 39.71 chs. N. 89°56' W. from cor. of
 secs. 3 and 4),
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 4 only,
 with brass cap, marked

$\frac{1}{4}$ ———
 S 4
 1919

77.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Wire fence brs. N. and S. The E. and W. fence, which nearly
 parallels the Tp. bdy. E. of this point terminates at
 its intersection with this N. and S. fence at about
 100 lks. S. at SW. fence cor.
 79.91 (Proportional dist. of 39.70 chs. N. 89°56' W. from $\frac{1}{4}$ sec. cor.
 of sec. 4)
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for reestablished cor. of secs. 4, 5, 32 and
 33, with brass cap, marked

T8S | R10E
 S32 | S33
 S 5 | S 4
 T9S
 1919

Dig pits, 18x18x12 ins. in each sec. 5 $\frac{1}{2}$ ft. dist.
 This cor. is reestablished to refer to 4 secs. for the
 reason that the westing of the Tp. bdy. to said cor. is
 319.91 chs., which is well within allowable limits of
 error for measurement of such portion of the line.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood and scrub mesquite.
 No timber.

36.30
39.70

N. 89°56' W., on true line, on S. bdy. of sec. 32.
 Over level land, thru. dense undergrowth.
 Road, brs. NE. and SW.
 Intersect original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is
 a mesquite post 3 ins. in diam., 2 $\frac{1}{2}$ ft. above ground
 firmly set in ground and mound of earth and marked
 " $\frac{1}{4}$ " on N. face. No trace of old pits is visible. No
 bearing trees. Reestablish this cor. as follows: De-
 stroy old mound of earth, ~~reestablish~~ old post in
 same place with marking on S. face, exposing 1 ft.
 above ground, and alongside same, set an iron post, 3
 ft. long, 1 in. in diam., 26 ins. in the ground, for
 reestablished $\frac{1}{4}$ sec. cor. of sec. 5 only, with brass cap,
 marked

Resurvey of South bdy. of Township 8 South, Range 10 East. 9

Chains.

$\frac{1}{4}$
S 5
1919

40.00 Dig pits, 18x18x12 ins.; E. and W. of post, 3 ft. dist.
Thence,
S. 89°19' W., on true line, continuing measurement of S. bdy.
of sec. 32.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 32, with
brass cap, marked

S 32
 $\frac{1}{4}$
1919

55.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
76.60 Wash, 15 lks. wide, course S.
78.20 Wire fence, brs. W and N.
(Proportional dist. of 38.50 chs., S. 89°19' W. from $\frac{1}{4}$ sec.
cor. of sec. 5),
Set an iron post, 3 ft. long, .2 ins. in diam., 24 ins. in
the ground, for reestablished cor. of secs. 5 and 6, **only**
with brass cap, marked

S 6 | S 5
T9S | R10E
1919

80.00 Dig pits 24x24x12 ins. SE and SW. of post, 4 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for reestablished cor. of secs. 31 and 32
only, with brass cap, marked

T8S | R10E
S31 | S32
1919

Dig pits, 24x24x12 ins. NE. and NW. of post, 4 ft. dist.
Land, level.
Soil, sandy, 1st rate.
Undergrowth, dense greasewood.
No timber.

8.00 S. 89°19' W., on true line, on S. bdy. of sec. 31.
10.60 Over level land, thru. dense undergrowth.
16.00 Along fence parallel to line.
18.20 Wash, 30 lks. wide, 4 ft. deep, course S.
36.70 Wash, 20 lks. wide, course S.
Leave level land; ascend gradual E. slope.
Dim road brs. N. and S.
(Proportional dist. of 38.50 chs., S. 89°19' W. from cor. of
secs. 5 and 6) Intersect original $\frac{1}{4}$ sec. cor. of secs.
6 and 31, which is a mesquite post, 3 ins. in diam.,
18 ins. above ground, firmly set in ground and mound
of earth, marked " $\frac{1}{4}$ S" on N. face. No trace of old pits
is visible. No bearing tree. Reestablish this cor.
as follows:
Destroy old mound of earth, reset the old post in same
place, with marking to the south, exposing 1 ft. above
ground, and alongside same, set an iron post 3 ft.
long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec.
cor. of sec. 6 **only**, with brass cap, marked


$\frac{1}{4}$
S 6
1919

10 Resurvey of South bdy. of Township 8 South, Range 10 East.

Chains.

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. Thence, West, on true line, continuing measurement on S. bdy. of sec. 31.


40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap, marked



74.58

Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist. (37.88 chs. west from $\frac{1}{4}$ sec. cor. of sec. 6) Intersect the cor. of Ts. 8 and 9 S., Rs. 9 and 10 E., which is a mesquite post 4 ins. in diam., 2 $\frac{1}{2}$ ft. above ground, firmly set in ground, and mound of stone, marked "XXXVI" on NW. face, and "RIXX" on SW. face, and 6 notches on each of N., S., E. and W. faces, and witnessed by 4 bearing trees. properly marked, one N. 17° E., 236 lks. dist., one S. 20° E., 57 lks. dist., one S. 48° W., 88 lks. dist., and one N. 88 $\frac{1}{2}$ ° E., 104 lks. dist. No trace of old pits is visible. The bearing trees were added to the original Tp. cor. by Jesse B. Wright, U.S.S. in 1913. Reestablish this cor. as follows:

Destroy mound of stone, and alongside the old post, set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of Ts. 8 and 9 S., Rs. 9 and 10 E., marked on brass cap,



In addition to record bearing tree, raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
Land, level.
Soil, sandy, 2nd rate,
Undergrowth, dense greasewood and scrub mesquite.
No timber.

Chains.

Retracement for Resurvey:

This line was originally surveyed by Hugh F. DuVal, U.S.D. S. in 1911, and the cors. established by him thereon are those which are found, as described in the following notes, no previous resurvey of the line having been made. A retracement of the south 2 miles of the line was executed by Jessé B. Wright, U.S.S. in 1913, who made no change in the cors. except the Tp. cor.

40.09 From the reestablished cor. of Ts. 8 and 9 S., Rs. 9 and 10 E., hereinbefore described,
North, on a random line, on E. bdy. of sec. 36 (S. $\frac{1}{2}$).
Fall 12 lks. E. of the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore N. 0° 10' W., 40.09 chs.

39.90 Thence,
North, on random line on E. bdy. of sec. 36 (N. $\frac{1}{2}$).
Fall 3 lks. E. of the original cor. of secs. 25, 30, 31 and 36, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore, N. 0° 3' W., 39.90 chs.

39.96 North, on random line, on E. bdy. of sec. 25, (S. $\frac{1}{2}$).
Fall 2 lks. E. of the original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore N. 0° 2' W., 39.96 chs.

40.00 Thence,
North, on random line on E. bdy. of sec. 25 (N. $\frac{1}{2}$).
Intersect the original cor. of secs. 19, 24, 25 and 30, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore North, 40.00 chs.

39.96 North, on random line on E. bdy. of sec. 24 (S. $\frac{1}{2}$).
Fall 10 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 19 and 24, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore N. 0° 9' E., 39.96 chs.

40.09 Thence,
North, on random line on E. bdy. of sec. 24 (N. $\frac{1}{2}$).
Fall 1 lk. west of the original cor. of secs. 13, 18, 19 and 24, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore N. 0° 1' E., 40.09 chs.

39.95 North, on random line, on E. bdy. of sec. 13 (S. $\frac{1}{2}$).
Fall 1 lk. W. of the original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore N. 0° 1' E., 39.95 chs.

39.85 Thence,
North, on random line on E. bdy. of sec. 13 (N. $\frac{1}{2}$).
Fall 7 lks. W. of the original cor. of secs. 7, 12, 13 and 18, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore N. 0° 6' E., 39.85 chs.

40.00 North, on random line, on E. bdy. of sec. 12 (S. $\frac{1}{2}$).
Fall 2 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, hereinafter described.

12 Resurvey of West bdy. of Township 8 South, Range 10 East.

Chains

- True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore N. $0^{\circ}2'$ W., 40.02 chs.
Thence,
North, on random line on E. bdy. of sec. 12 (N. $\frac{1}{2}$).
40.02 Fall 2 lks. E. of original cor. of secs. 1, 6, 7 and 12, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore N. $0^{\circ}2'$ W., 40.02 chs.
-
- North, on random line on E. bdy. of sec. 1 (S. $\frac{1}{2}$).
40.05 Fall 8 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore N. $0^{\circ}7'$ E., 40.05 chs.
Thence,
North, on random line on E. bdy. of sec. 1, (N. $\frac{1}{2}$).
40.03 Fall 15 lks. W. of the cor. of Ts. 7 and 8 S., Rs. 9 and 10 E. hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore N. $0^{\circ}13'$ E., 40.03 chs.
-

RESURVEY:

- From the reestablished cor. of Ts. 8 and 9 S., Rs. 9 and 10 E., hereinbefore described,
N. $0^{\circ}10'$ W., on true line, on W. bdy. of sec. 31.
Over level land, thru. dense undergrowth.
Along wire fence, parallel to line.
17.40 Wash, 20 lks. wide, course S. 60° E.
37.97 (40.00 chs. southing from cor. of secs. 30 and 31), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap, marked

 $\frac{1}{4}$

S31

1919

- 40.09 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. Intersect the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a granite stone, 7x6x4 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on W. face, and witnessed by mound of stone, W. of cor. No bearing trees. This is now $\frac{1}{4}$ sec. cor. of sec. 36 only. No change in marking or accessory is required.
Thence,
N. $0^{\circ}3'$ W., on true line, continuing measurement of W. bdy. of sec. 31. Along wire fence parallel to line.
49.00 Wash, 20 lks. wide, course S. 70° E.
60.00 Small knoll, brs. E. 8.00 chs. dist.
72.35 Wire fence extends E. from the N. and S. fence at this point.
77.97 Reestablished cor. of secs. 30 and 31 at intersection of sectional correction line, surveyed due west thru. T. 8 S., R. 10 E. as hereinafter described.
Land, level.
Soil, sandy, 2nd rate.
Undergrowth, dense scrub palo verde and greasewood.
No timber.
-

- N. $0^{\circ}3'$ W., on true line, on W. bdy. of sec. 30.
Over gently rolling land, thru. dense undergrowth.
Along fence, parallel to line.
2.02 Intersect the original cor. of secs. 25, 30, 31 and 36, which

Chains.

is a granite stone, 7x6x5 ins. above ground, firmly set, marked with 1 notch on S. edge, and 5 notches on N. edge, and witnessed by mound of stone, W. of cor. No bearing trees. This cor. is now cor. of secs. 25 and 36 only. No change in marking or accessory is required.

40.00 Thence, N. 0° 2' W., on true line, continuing measurement of W. bdy. of sec. 30, along fence, parallel to line. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 30 only, with brass cap, marked




1919

41.98 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. Intersect the original 1/4 sec. cor. of secs. 25 and 30, which is a granite stone, 7x4x4 ins. above ground, firmly set, marked "1/4" on W. face, and witnessed by mound of stone, W. of cor. No bearing trees. This is now 1/4 sec. cor. of sec. 25 only. No change in marking or accessory is required.

45.75 Thence, North, on true line, continuing measurement of W. bdy. of sec. 30, along fence parallel to line.

80.00 Wash, 15 lks. wide, course E. Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 19 and 30 only, with brass cap, marked




1919

Dig pits, 24x24x12 ins., NE. and SE. of post, 4 ft. dist. Land, gently rolling. Soil, sandy, 3rd rate. Undergrowth, dense greasewood, scrub palo verde and giant cactus. No timber.

1.98 North, on true line, on W. bdy. of sec. 19. Over gently rolling land, thru dense undergrowth, along fence parallel to line.

28.00 Intersect the original cor. of secs. 19, 24, 25 and 30, which is a granite stone, 8x6x5 ins. above ground, firmly set, marked with 2 notches on S. edge, and 4 notches on N. edge, and witnessed by mound of stone, W. of cor. No bearing trees. This is now cor. of secs. 24 and 25 only. No change in marking or accessory is required.

40.00 N. 0° 9' E., on true line, continuing measurement of W. bdy. of sec. 19. Wash, 15 lks. wide, course E. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 19 only, with brass cap, marked



1919

41.94 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. Intersect the original 1/4 sec. cor. of secs. 19 and 24, which is a quartzite stone 8x5x4 ins. above ground, firmly

14 Resurvey of West bdy. of Township 8 South, Range 10 East.

Chains.

set, marked "1/4" on W. face, and witnessed by mound of stone, W. of cor. No bearing trees. This cor. is now 1/4 sec. cor. of sec. 24 only. No change in marking or accessory is required.

Thence,

N. 0° 1' E., on true line, continuing measurement of West bdy. of sec. 19, along fence parallel to line.

44.68

Wash, 10 lks. wide, course E.

57.40

Fence cor., from which fences extend S., S. 80° W. and N. 80° E. Leave N. and S. fence, which parallels the Tp. bdy. S. of this point.

58.60


Wash, 15 lks. wide, course E.

72.00

Wash, 15 lks. wide, course E.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 18 and 19, only with brass cap, marked



Dig pits, 24x24x12 ins., NE. and SE. of post, 4 ft. dist. Land, gently rolling. Soil, 3rd rate. Undergrowth, dense greasewood and scrub palo verde. No timber.

N. 0° 1' E., on true line, on W. bdy. of sec. 18.

Over gently rolling land, thru. dense undergrowth

2.03

Intersect the original cor. of secs. 13, 18, 19 and 24, which is a granite stone, 8x6x5 ins. above ground, firmly set, marked with 3 notches on each of N. and S. edges, and witnessed by a mound of stone, W. of cor. No bearing trees.

This cor. is now cor. of secs. 13 and 24 only. No change in marking or accessory is required.

Thence,

N. 0° 1' E., on true line, continuing measurement of W. bdy. of sec. 18.

8.13


Wash, 20 lks. wide, course S. 70° E.

27.43

Wash, 15 lks. wide, course S. 70° E.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 18 only, with brass cap, marked



Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. Intersect the original 1/4 sec. cor. of secs. 13 and 18, which is a granite stone, 7x6x5 ins. above ground, firmly set, marked "1/4" on W. face, and witnessed by mound of stone, W. of cor.

No bearing trees.

This is now 1/4 sec. cor. of sec. 13 only. No change in marking or accessory is required.

Thence,

N. 0° 6' E., on true line, continuing measurement of W. bdy. of sec. 18.

42.63

Wash, 15 lks. wide, course S. 70° E.

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 7 and 18, only, with brass cap, marked

Reserve of West bdy. of Township 8 South, Range 10 East. 15

Chains.

T8S
R10E
S 7
S18

1919

Dig pits, 24x24x12 ins., NE. and SE. of post, 4 ft. dist.
Land, gently rolling.
Soil, sandy, 2nd rate.
Undergrowth, dense greasewood, scrub palo verde and cholla,
and sahuaro cactus.
No timber. Fair grass.

1.83

N. 0° 6' E., on true line, on W. bdy. of sec. 7.
Over gently rolling land, thru. dense undergrowth.
Intersect the original cor. of secs. 7, 12, 13 and 18, which
is a granite stone, 7x5x5 ins. above ground, firmly set,
marked with 2 notches on N. edge, and 4 notches on S.
edge, and witnessed by mound of stone, W. of cor. No bear-
ing trees. This is now cor. of secs. 12 and 13 only. No
change in marking or accessory is required.
Thence, N. 0° 2' W., on true line, continuing measurement of W.
bdy. of sec. 7.

32.77
40.00

Wash, 10 lks. wide, course N. 80° E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 7 only, with
brass cap, marked

$\frac{1}{4}$
S 7
1919

41.83

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Intersect the original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which
is a quartzite stone, 8x5x4 ins. above ground, firmly set,
marked " $\frac{1}{4}$ " on W. face, and witnessed by mound of stone,
W. of cor. No bearing trees. This is now $\frac{1}{4}$ sec. cor. of
sec. 12 only. No change in marking or accessory is re-
quired.

49.33
69.93
80.00

Wash, 15 lks. wide, course E.
Wash, 15 lks. wide, course E.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the
ground, for reestablished cor. of secs. 6 and 7, only,
with brass cap,

T8S
R10E
S 6
S 7
1919

Dig pits, 24x24x12 ins. NE. and SE. of post, 4 ft. dist.
Land, gently rolling.
Soil, sandy, 2nd and 3rd rate.
Undergrowth, dense greasewood, scrub palo verde and mes-
quite, and cholla and giant cactus.
Timber, scattering small palo verde and mesquite.

1.85

N. 0° 2' W., on true line, on W. bdy. of sec. 6.
Over nearly level land, thru. dense undergrowth.
Intersect the original cor. of secs. 1, 6, 7 and 12, which
is a granite stone, 8x5x4 ins. above ground, firmly
set, marked with one notch on N. edge, and 5 notches on
S. edge, and witnessed by mound of stone, W. of cor. No
bearing trees. This is now cor. of secs. 1 and 12
only.

10.85
40.00

No change in marking or accessory is required.
Thence,
N. 0° 7' E., on true line, continuing measurement of W. bdy.
of sec. 6.
Wash, 15 lks. wide, course S. 80° E.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only,
with brass cap, marked

16 Resurvey of West bdy. of Township 8 South, Range 10 East.

Chains.

$\frac{1}{4}$
 |
 S 6
 |
 1919

- 41.90 Dig pits, 18x18x12 ins., N. and S of post, 3 ft. dist. Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which is a granite stone, 8x6x4 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on W. face, and witnessed by mound of stone, W. of cor. This cor. is now $\frac{1}{4}$ sec. cor. of sec. 1 only. No change in marking or accessory is required.
- Thence,
 N. 0° 13' E.; on true line, continuing measurement of W. bdy. of sec. 6.
- 48.70 Wash, 15 lks. wide, course E.
- 51.40 Dim road, brs. N. 80° E. and S. 80° W.
- 81.93 Intersect the original cor. of Ts. 7 and 8 S., Rs. 9 and 10 E., which is a granite stone, 12x8x5 ins. above ground, firmly set, marked "T7S" on NE. face, "10E" on SE. face, "8S" on SW. face, and "9E" on NW. face, and 6 notches on each of N., S., E. and W. edges, and witnessed by 4 pits, 24x24x12 ins., one each E., E. and W. of cor. 4 ft. dist., and one S. of cor. 8 ft. dist., and by three bearing trees properly marked, one S. 27 $\frac{1}{2}$ ° E., 258 lks. dist., one S. 6° W., 188 lks. dist., and one N. 75 $\frac{1}{2}$ ° W., 142 lks. dist., and mound of earth, S. of cor. Alongside the original cor. stone, set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of Ts. 7 and 8 S., Rs. 9 and 10 E., with brass cap, marked

T7S
 R9E | R10E
 S36 | S31
 S 1 | S 6
 T8S
 1919

Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood and scrub mesquite.
 No timber.

Retracement of part of N.bdy. of Township 8 South, Range 10 E. 17

Chains.

The original cor. of secs. 4, 5, 32 and 33, Ts. 7 and 8 S., R. 10 E., is a granite stone, 14x12x5 ins. above ground, firmly set, marked with 4 notches on E. face, and 2 notches on W. face, and witnessed by 4 pits, one in each sec., and mound of earth W. of cor. No bearing trees.

Thence,
N. 89° 46' W. (record course) on random line, bet. secs. 5 and 32 (E. $\frac{1}{4}$).

40.00 Over nearly level land, thru. dense undergrowth, along fence parallel to line, and about 60 lks. S. therefrom. Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a granite stone, 6x6x5 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by 2 pits, one each E. and W. of cor., and a mound of earth, N. of cor. No bearing trees.

7.50 True course and dist. of E. $\frac{1}{4}$ of line, bet. secs. 5 and 32, are therefore N. 89° 46' W., 40.00 chs.

10.00 Thence,
N. 89° 46' W., on random line; bet. secs. 5 and 32 (W. $\frac{1}{4}$). Over nearly level land, thru. dense undergrowth, along fence, parallel to line, and about 60 lks. S. therefrom.

40.04 Wire fence, brs. N. and S. This fence corners and turns E. at 60 lks. S. of line.

North side of road, irregular bearing, but in general, E. and W.

Fall 5 lks. N. of original cor. of secs. 5, 6, 31 and 32, which is a granite stone, 8x6x6 ins. above ground, firmly set, marked with 5 notches on E. face, and 1 notch on W. face, and witnessed by 4 pits, one in each sec.

True course and dist. of W. $\frac{1}{4}$ of line, bet. secs. 5 and 32 are therefore N. 89° 49' W., 40.04 chs.

Land, nearly level.
Soil, gravelly, 3rd rate.
No timber.
Undergrowth, dense mesquite.

40.08 N. 89° 46' W., on random line, bet. secs. 6 and 31 (E. $\frac{1}{4}$). Over nearly level land, thru. dense undergrowth. Fall 3 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is a granite stone, 8x5x5 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on N. face, and witnessed by 2 pits, one each E. and W. of cor.

True course and dist. of E. $\frac{1}{4}$ of line, bet. secs. 6 and 31, are therefore N. 89° 43' W., 40.08 chs.

Thence;
N. 89° 46' W., on random line, bet. secs. 6 and 31 (W. $\frac{1}{4}$). Over level land, thru. dense undergrowth.

33.35 Fall 8 lks. S. of the reestablished cor. of Ts. 7 and 8 S., Rs. 9 and 10 E., hereinbefore described.

True course and dist. of W. $\frac{1}{4}$ of line, bet. secs. 6 and 31 are therefore N. 89° 39' E., 33.35 chs.

Land, level.
Soil, sandy and gravelly, 1st and 2nd rate.
Undergrowth, dense scrub mesquite and greasewood.
No timber.

18 Resurvey of part of Subdivision lines of T.8 S., R.10 E.

Chains.

Retracement for Resurvey.

- From the reestablished cor. of secs. 1 and 12, on E. bdy. of the Tp. (2nd Guide Mer. E.) described in Book "F,"
- 40.09 West, on random line, on S. bdy. of sec. 1 (E. $\frac{1}{2}$).
Fall 9 lks. N. of original $\frac{1}{4}$ sec. cor. of secs. 1 and 12, hereinafter described.
True course and dist. of E. half of S. bdy. of sec. 1 are therefore S. 89° 52' W., 40.09 chs.
Thence,
- 40.01 West, on random line, on S. bdy. of sec. 1 (W. $\frac{1}{2}$).
Fall 1 lk. N. of original cor. of secs. 1, 2, 11 and 12, hereinafter described.
True course and dist. of E. $\frac{1}{2}$ of S. bdy. of sec. 1 are therefore S. 89° 59' W., 40.01 chs.
-
- 40.06 West, on random line, on S. bdy. of sec. 2 (E. $\frac{1}{2}$).
Fall 7 lks. N. of original $\frac{1}{4}$ sec. cor. of secs. 2 and 11, hereinafter described.
True course and dist. of this E. $\frac{1}{2}$ of S. bdy. of sec. 2 are therefore S. 89° 54' W., 40.06 chs.
Thence,
- 40.36 West, on random line, on S. bdy. of sec. 2 (W. $\frac{1}{2}$).
Fall 26 lks. N. of the original cor. of secs. 2, 3, 10 and 11, hereinafter described.
True course and dist. of this W. $\frac{1}{2}$ of S. bdy. of sec. 2 are therefore S. 89° 38' W., 40.36 chs.
-
- 39.94 West, on random line, on S. bdy. of sec. 3 (E. $\frac{1}{2}$).
Fall 1 lk. S. of the original $\frac{1}{4}$ sec. cor. of secs. 3 and 10, hereinafter described.
True course and dist. of E. half of S. bdy. of sec. 3 are therefore N. 89° 59' W., 39.94 chs.
Thence,
- 40.01 West, on random line, on S. bdy. of sec. 3 (W. $\frac{1}{2}$).
Fall 1 lk. S. of the original cor. of secs. 3, 4, 9 and 10, hereinafter described.
True course and dist. of W. half of S. bdy. of sec. 3, are therefore N. 89° 59' W., 40.01 chs.
-
- 39.94 West, on random line, on S. bdy. of sec. 4 (E. $\frac{1}{2}$).
Fall 2 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 4 and 9, hereinafter described.
True course and dist. of E. half of S. bdy. of sec. 4 are therefore N. 89° 58' W., 39.94 chs.
Thence,
- 40.00 West, on random line, on S. bdy. of sec. 4 (W. $\frac{1}{2}$).
Fall 2 lks. N. of the original cor. of secs. 4, 5, 8 and 9, hereinafter described.
True course and dist. of W. $\frac{1}{2}$ of S. bdy. of sec. 4, are therefore S. 89° 58' W., 40.00 chs.
-

RESURVEY.

- From the reestablished cor. of secs. 1 and 12, on the E. bdy. of the Tp. (2nd Guide Meridian East), described in Book "F,"
- S. 89° 52' W., on true line, bet. secs. 1 and 12.
Over nearly level land, thru. dense undergrowth.
- 25.00 Dim road, brs. N. 85° E. and S. 85° W.
- 40.09 Intersect original $\frac{1}{4}$ sec. cor. of secs. 1 and 12, which is a mesquite post, 4 ins. in diam., 1 ft. above ground, firmly set, marked "1S1" on N. face, and "12" on S. face, and witnessed by 2 pits, 18x18x12 ins., one each E. and W. of cor., 3 ft. dist., and mound of earth, N. of cor.
No bearing trees.

Resurvey of part of Subdivision lines of T.8 S., R. 10 E.

Chains.

Reestablish this cor. as follows: Alongside of old post, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1 and 12, with brass cap, marked

$\frac{1}{4}$ ——— S 1
S 12
1919

52.50
80.10

Thence, S. 89° 59' W., on true line, continuing measurement, Wash, 20 lks. wide, 3 ft. deep, course S. 70° W. (40.01 chs. S. 89° 59' W., from $\frac{1}{4}$ sec. cor. of secs. 1 and 12), Intersect the original cor. of secs. 1, 2, 11 and 12, which is a mesquite post, 6 ins. square, 1 ft. above ground, firmly set, marked "T8SS1" on NE., "R10ES12" on SE., "S11" on SW., and "S2" on NW. face, with 1 notch on E. edge, and 5 notches on S. edge, and witnessed by 4 pits 18x18x12 ins., one in each sec., and mound of earth, W. of cor. No bearing trees.

Reestablish this cor. as follows: Alongside of old post, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 1, 2, 11 and 12, with brass cap, marked

T8S | R10E
S 2 | S 1
S11 | S12
1919

Land, nearly level.
Soil, sandy, 2nd rate.
Undergrowth, dense greasewood, scrub palo verde and mesquite.
No timber.

40.06

S. 89° 54' W., on true line, bet. secs. 2 and 11. Over nearly level land, thru. dense undergrowth. Intersect the original $\frac{1}{4}$ sec. cor. of secs. 2 & 11, which is a mesquite post, 5 ins. square, 1 ft. above ground, firmly set, marked " $\frac{1}{4}$ S2" on N. face, and "11" on S. face, and witnessed by 2 pits, 18x18x12 ins., one each E. and W. of cor. 3 ft. dist., and mound of earth, N. of cor. No bearing trees.

Destroy marking on S. face of old post, and alongside of same,

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., of sec. 2 only, with brass cap, marked

$\frac{1}{4}$ ——— S 2
1919

40.21

Thence, S. 89° 38' W., on true line, continuing measurement. (Midpoint of N. bdy. of sec. 11), Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 11 only, with brass cap, marked

$\frac{1}{4}$ ——— S 11
1919

48.70
80.42

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. Road brs. N. 60° W. and S. 60° E. (40.36 chs. S. 89° 54' W. from $\frac{1}{4}$ sec. cor. of sec. 2),

20 Resurvey of part of Subdivision lines of T. 8 S., R. 10 E.

Chains.

Intersect the original cor. of secs. 2, 3, 10 and 11, which is a mesquite post, 5 ins. square, 1 ft. above ground, firmly set, marked "T8SS2" on NE., "R10ES11" on SE., "S10" on SW., and "S3" on NW. face, and 2 notches on E. edge, and 5 notches on S. edge, and witnessed by 4 pits 18x18x12 ins., one in each sec., and mound of earth W. of cor.

No bearing trees.

Reestablish this cor. as follows: Alongside of old cor. post, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 2, 3, 10 and 11, with brass cap, marked

| | |
|-----|------|
| T8S | R10E |
| S 3 | S 2 |
| S10 | S11 |

1919

Land, nearly level.

Soil, sandy loam; 2nd rate.

Undergrowth, dense greasewood and sage brush.

No timber.

N. 89° 59' W., on true line, bet. secs. 3 and 10.

Over nearly level land, thru. dense undergrowth.

39.94

Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 10, which is a mesquite post, 4 ins. square, 1 ft. above ground, firmly set, marked " $\frac{1}{4}$ S3" on N. face, and "10" on S. face, and witnessed by 2 pits, 18x18x12 ins., one each E. and W. of cor. 3 ft. dist., and mound of earth N. of cor.

No bearing trees.

Alongside of old cor. post, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 3 and 10, with brass cap, marked

| | |
|-----------------|---|
| $\frac{1}{4}$ S | 3 |
| S 10 | |

1919

Continue line and measurement.

79.95

(40.01 chs. N. 89° 59' W. from $\frac{1}{4}$ sec. cor. of secs. 3 and 10)

Intersect the original cor. of secs. 3, 4, 9 and 10, which is a mesquite post 5 ins. square, 1 ft. above ground, firmly set, marked "T8SS3" on NE., "R10ES10" on SE., "S9" on SW., and "S4" on NW. face, and 3 notches on E. edge, and 5 notches on S. edge, and witnessed by 4 pits, 18x18x12 ins., one in each sec., and mound of earth W. of cor.

No bearing trees.

Reestablish this cor. as follows:

Alongside of old cor. post, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 3, 4, 9 and 10, with brass cap, marked

| | |
|-----|------|
| T8S | R10E |
| S 4 | S 3 |
| S 9 | S10 |

1919

Land, nearly level.

Soil, sandy loam, 2nd rate.

Undergrowth, dense greasewood and scrub palo verde.

No timber.

Resurvey of part of Subdivision lines of T. 8 S., R. 10 E. 21

Chains.

39.94 N. 89°58'W., on true line, bet. secs. 4 and 9.
Over nearly level land, thru. dense undergrowth.
Intersect the original $\frac{1}{4}$ sec. cor. of secs. 4 and 9, which is a mesquite post 4 ins. square, 1 ft. above ground, firmly set, marked "S4" on N. face, and "9" on S. face, and witnessed by 2 pits 18x18x12 ins., one each E. and W. of post, 3 ft. dist., and mound of earth N. of cor.
No bearing trees.
Reestablish this cor. as follows:
Alongside of old post, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 4 and 9, with brass cap, marked

S 4

S 9
1919

79.60 Thence,
79.85 S. 89°58'W., on true line, continuing measurement.
79.94 Road brs. N. and S.
Wire fence brs. N. and S.
(40.00 chs. S 89°58'W. from $\frac{1}{4}$ sec. cor. of secs. 4 and 9),
Intersect the original cor. of secs. 4, 5, 8 and 9, herein-
after described.
Land, nearly level.
Soil, sandy, 2nd rate.
Undergrowth, dense greasewood and scrub palo verde.
No timber.

Retracement of part of Subdivision lines of T. 8 S. R. 10 E.

The subdivision lines of secs. 1, 2, 3 and 4 of this Tp., were original surveyed by Hugh F. DuVal, U.S.D.S. in 1911, and as no previous retracement or resurvey has been made, the corners found as described in the following notes of Retracement and Resurvey of such lines are the original cors.
From the original cor. of secs. 4, 5, 8 and 9, which is a granite stone, 6x5x4 ins. above ground, firmly set, marked with 5 notches on S. edge, and 4 notches on E. edge, and witnessed by 4 pits, one in each sec. 5 $\frac{1}{2}$ ft. dist., and mound of earth W. of cor. No bearing trees.
N. 0°2'W., on random line, bet. secs. 4 and 5 (S. $\frac{1}{2}$).
Over slightly rolling land, thru. dense undergrowth, along W. side of wire fence, bearing nearly N. and S.
40.00 Fall 1 lk. E. of original $\frac{1}{4}$ sec. cor. of secs. 4 and 5, which is a granite stone 5x4x4 ins. above ground, firmly set, marked "4" on W. face, and witnessed by 2 pits, one each N. and S. of cor., 3 ft. dist., and mound of earth W. of cor. No bearing trees.
True course and dist. of S. $\frac{1}{2}$ of line, bet. secs. 4 and 5 are therefore N. 0°1'W., 40.00 chs.
Thence,
N. 0°2'W., on random line, bet. secs. 4 and 5. ($\frac{1}{2}$).
Over slightly rolling land, thru. dense undergrowth, parallel to wire fence, E. of line.
30.40 Old road, brs. NE. and SW.
40.78 Wire fence, brs. E. and W.
41.34 Fall 5 lks. E. of the original cor. of secs. 4, 5, 32 and 33, on the N. bdy. of Tp., hereinbefore described.
True course and dist. of N. $\frac{1}{2}$ of line, bet. secs. 4 and 5 are therefore N. 0°4'W., 41.34 chs.
Land, slightly rolling SW. slope.
Soil, sandy and gravelly, 2nd and 3rd rate.
Undergrowth, dense scrub mesquite and greasewood.
No timber.

Boundaries of that part of Township 8 South, Range 10 East, subdivided under this group (32 secs.)

Latitudes, departures, and closing errors.


| Line designated. | True bearing. | Dist. | Latitudes. | | Departures. | |
|--------------------------------------|---------------|--------|------------|--------|-------------|--------|
| | | | N. | S. | E. | W. |
| South boundary, | N. 89° 14' W. | 40.07 | .54 | | | 40.07 |
| | N. 87° 20' W. | 41.20 | 1.92 | | | 41.16 |
| | N. 89° 50' W. | 40.16 | .12 | | | 40.16 |
| | N. 89° 56' W. | 238.22 | .28 | | | 238.22 |
| | S. 89° 19' W. | 77.00 | | .92 | | 77.00 |
| | West, | 37.88 | | | | 37.88 |
| West boundary, | N. 0° 10' W. | 40.09 | 40.09 | | | .12 |
| | N. 0° 3' W. | 39.90 | 39.90 | | | .04 |
| | N. 0° 2' W. | 39.96 | 39.96 | | | .02 |
| | North, | 40.00 | 40.00 | | | |
| | N. 0° 9' E. | 39.96 | 39.96 | | | .10 |
| | N. 0° 1' E. | 80.04 | 80.04 | | | .02 |
| | N. 0° 6' E. | 39.85 | 39.85 | | | .07 |
| | N. 0° 2' W. | 80.02 | 80.02 | | | .05 |
| | N. 0° 7' E. | 40.05 | 40.05 | | | .08 |
| N. 0° 13' E. | 40.03 | 40.03 | | | .15 | |
| North boundary | S. 89° 39' E. | 33.35 | | .220 | 33.35 | |
| | S. 89° 43' E. | 40.08 | | .20 | 40.08 | |
| | S. 89° 49' E. | 40.04 | | .13 | 40.04 | |
| | S. 89° 46' E. | 40.00 | | .16 | 40.00 | |
| Subdivisional boundary, | S. 0° 4' E. | 41.34 | | 41.34 | .05 | |
| | S. 0° 1' E. | 40.00 | | 40.00 | .01 | |
| | N. 89° 58' E. | 40.00 | .02 | | 40.00 | |
| | S. 89° 58' E. | 39.94 | .02 | .02 | 39.94 | |
| | S. 89° 59' E. | 79.95 | .02 | .02 | 79.95 | |
| | N. 89° 38' E. | 40.36 | .26 | | 40.36 | |
| | N. 89° 54' E. | 40.06 | .07 | | 40.06 | |
| | N. 89° 59' E. | 40.01 | .01 | | 40.01 | |
| N. 89° 52' E. | 40.09 | .09 | | 40.09 | | |
| East boundary, (2nd Guide Mer. E) | S. 0° 01' W. | 400.50 | | 400.50 | | .12 |
| Convergency, | | | | | .42 | |
| Total, | | | 483.21 | 483.49 | 484.78 | 474.84 |
| | | | | 483.21 | | 474.78 |
| Error in latitude: | | | 0.28 | | | |
| Error in departure: | | | | | 0.06 | |

Survey of part of Subdivision lines(completion)of T.8 S.R.10 E. 23

Chains.


The south bdy. of this Tp. having been found defective in alinement and measurement, thus causing the S. tier of secs. to be irregular; therefore, preliminary to the survey of the remaining subdivision lines of the Tp., survey the first latitudinal sec. line N. of the S. bdy. of the Tp., due west thru. the township, as a Sectional Correction line from which to initiate the survey of the subdivision lines.

40.00 From the cor. of secs. 25, 26, 35 and 36, on Sectional Correction line, hereinafter described,
77.57 South on random line, bet. secs. 35 and 36.
Set temp. 1/4 sec. cor.
Intersect the S. bdy. of the Tp., 18 lks. E. of the reestablished cor. of secs. 35 and 36, hereinbefore described.
Thence,
N. 0° 8' E., on true line, bet. secs. 35 and 36.
Over nearly level land, thru. scattering timber and dense undergrowth.
1.77 A 4 wire fence, brs. E. and W.
1.87 Drain, course W.
3.07 Wash, 20 lks. wide, 1 ft. deep, course S. 80° W.
37.57 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




45.57 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
50.27 Wash, 10 lks. wide, 2 ft. deep, course W.
77.07 Wash, 15 lks. wide, 1 1/2 ft. deep, course W.
77.57 Wash, 20 lks. wide, 1 ft. deep, course W.
Intersect the cor. of secs. 25, 26, 35 and 36, on Sectional Correction line, hereinafter described.
Land, nearly level.
Soil, sandy, 2nd rate.
Timber, scattering small mesquite, ironwood and palo verde.
Undergrowth, dense greasewood and sage brush.

From the reestablished cor. of secs. 25 and 36, on the E. bdy. of the Tp. (2nd. Guide Mer. E.) described in Book "F,"
West, on true line, on Sectional Correction Line, bet. secs. 25 and 36.
Over level land, thru. dense undergrowth and scattering timber.
16.80 Wash, 20 lks. wide, 2 ft. deep, course NW
40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



80.00 Dig pits, 18x18x12 ins., E. and W of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked



from which,
A mesquite, 5 ins. in diam., brs. S. 80° E., 90 lks. dist., marked "T8S R10E S36 BT."

21 Survey of Subdivision lines (completion) of T.8 S., R.10 E.

Chains.


A mesquite, 4 ins. in diam., brs. SW., 15 lks. dist., marked "T8SR10E S35 BT."
 No other trees available; dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Undergrowth, dense greasewood and catclaw.
 Timber, scattering small mesquite, and palo verde.

North, bet. secs. 25 and 26, 50 lks. dist.
 Over, nearly level land, thru dense undergrowth and scattering timber.

- 13.70 Wash, 8 lks. wide, 3 ft. deep, course S. 70° W.
- 19.60 Wash, 80 lks. wide, 3 ft. deep, course W.
- 21.50 Wash, 40 lks. wide, 3 ft. deep, course S. 80° W.
- 22.50 Wash, 20 lks. wide, 1 ft. deep, course S. 80° W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for 1/4 sec. cor., with brass cap, marked.




- 40.50 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
- 45.00 Wash, 20 lks. wide, 4 ft. deep, course W.
- 80.00 Wash, 10 lks. wide, 1 ft. deep, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked



Dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist.
 Land, nearly level.
 Soil, sandy, 1st and 2nd rate.
 Timber, scattering small mesquite and ironwood.
 Undergrowth, dense greasewood and sage brush.

- 40.00 East, on random line, bet. secs. 24 and 25.
- 80.02 Set temp. 1/4 sec. cor.
- 80.02 Intersect the E. bdy. of the Tp. (2nd. Guide Meridian E.) 14 lks. S. of the reestablished cor. of secs. 24 and 25, described in Book "F,"
 Thence,
 S. 89° 54' W., on true line, bet. secs. 24 and 25.
 Over gently rolling land, thru dense undergrowth and scattering timber.
- 22.00 Wash, 10 lks. wide, 1 ft. deep, course S. 60° W.
- 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




- 80.02 Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist.
- 80.02 The cor. of secs. 23, 24, 25 and 26.
- 80.02 Land, gently rolling.
- 80.02 Soil, sandy loam. 2nd and 3rd rate.
- 80.02 Timber, scattering small mesquite and ironwood.

Survey of part of Subdivision lines (completion) of T. 8S., R. 10 E. 25


Chains.

Undergrowth, dense greasewood and sage brush.

19.20 North, bet. secs. 23 and 24.
 40.00 Over nearly level land, thru. dense undergrowth and scattering timber.
 Wash, 12 lks. wide, 4 ft. deep, course S. 70° W.
 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




44.80 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Wash, 10 lks. wide, 2 ft. deep, course S. 70° W.
 56.00 Wash, 20 lks. wide, 2 ft. deep, course S. 70° W.
 60.00 Wash, 100 lks. wide, 2 ft. deep, course S. 70° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap, marked



Dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist.
 Land, nearly level.
 Soil, sandy loam, 2nd rate.
 Timber, scattering small mesquite, palo verde and ironwood.
 Undergrowth, dense greasewood.

40.00 N. 89° 54' E., on random line, bet. secs. 13 and 24.
 80.08 Set temp. 1/4 sec. cor.
 Intersect the E. bdy. of the Tp. (2nd Guide Meridian E.) 21 lks. S. of the reestablished cor. of secs. 13 and 24, described in Book "F."
 Thence,
 S. 89° 45' W., on true line, bet. secs. 13 and 24.
 Over nearly level land, thru. dense undergrowth and scattering timber.
 37.08 Wash, 40 lks. wide, 5 ft. deep, course S. 00° W.
 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




44.10 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 80.08 Dim road brs. N. and S.
 The cor. of secs. 13, 14, 23 and 24.
 Land, nearly level.
 Soil, sandy, 2nd rate.
 Timber, scattering small mesquite, palo verde and ironwood.
 Undergrowth, dense greasewood.

26 Survey of part of Subdivision lines(completion)of T.8 S.R.10 E.


Chains.

North, bet. secs.13 and 14.
Over nearly level land, thru. dense undergrowth and scattering timber.

- .80 Drain, 8 lks. wide, 4 ft. deep, course S. 60° W.
- 23.50 Wash, 30 lks. wide, 1 ft. deep, course S. 80° W.
- 33.00 Dim road, brs. N. 50° W. and S. 50° E.
- 39.00 Wash, 20 lks. wide, 2 ft. deep, course S. 80° W.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




- 69.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
- 80.00 Wash, 8 lks. wide, 1 ft. deep, course W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap, marked



Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.
Land, nearly level.
Soil, sandy loam, 2nd rate.
Timber, scattering small mesquite, palo verde and ironwood.
Undergrowth, dense greasewood and sage brush.

- 40.00 N. 89° 45' E., on random line, bet. secs. 12 and 13.
- 80.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Intersect the E. bdy. of the Tp. (2nd Guide Mer. E.) 2 lks. S. of the reestablished cor. of secs. 12 and 13, described in Book "F."
- Thence,
- S. 89° 44' W., on true line, bet. secs. 12 and 13.
- Over nearly level land, thru. scattering timber and dense undergrowth.
- 5.00 Strike wash, 20 lks. wide, 1 ft. deep, from N. 85° E., and follow west, along same.
- 34.80 Same wash, 20 lks. wide, 1 ft. deep, turns to N. 80° W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



- 80.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
- 80.00 The cor. of secs. 11, 12, 13 and 14.
- Land, nearly level.
- Soil, sandy loam, 2nd rate.
- Timber, scattering small mesquite, palo verde and ironwood.
- Undergrowth, dense catclaw, greasewood and sage brush.


- 40.00 North, on random line, bet. secs. 11 and 12.
- 80.24 Set temp. $\frac{1}{4}$ sec. cor.
- 80.24 Intersect E. and W. line, 3 lks. E. of the reestablished cor. of secs. 1, 2, 11 and 12, hereinbefore described.
- Thence,

Survey of part of Subdivision lines (completion) of T.8S.R.10E. 27

Chains.

S.0°1'E., on true line, bet. secs.11 and 12.
Over nearly level land, thru. dense undergrowth, and scattering timber.


- 5.25 Wash, 10 lks. wide, 2 ft. deep, course W.
- 18.25 Road, brs. N.80°W. and S.80°E.
- 40.24 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



- 63.75 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
- 73.05 Wash, 25 lks. wide, 1 ft. deep, course SW.
- 80.24 Wash, 10 lks. wide, 6 ft. deep, course SW.
- The cor. of secs. 11, 12, 13 and 14.
- Land, nearly level.
- Soil, sandy loam, 1st rate.
- Timber, scattering small mesquite and palo verde.
- Undergrowth, dense greasewood and sage brush.


-
- 40.00 From the cor. of secs. 26, 27, 34 and 35, on Sectional Correction line, hereinafter described,
 - 77.42 S.0°7'W., on random line, bet. secs. 34 and 35.
 - Set temp. $\frac{1}{4}$ sec. cor.
 - Intersect the S. bdy. of the Tp., 5 lks. W. of the cor. of the reestablished cor. of secs. 34 and 35, hereinbefore described.

- Thence,
- N.0°5'E. on true line, bet. secs. 34 and 35.
- Over level land, thru. dense undergrowth and scattering timber.
- .92 Wire fence, brs. E. and W.
- 4.42 Wash, 20 lks. wide, course W.
- 9.42 Wash, 20 lks. wide, course W.
- 37.42 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



- 52.42 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
- 77.42 Wash, 30 lks. wide, course W.
- Intersect cor. of Secs. 26, 27, 34 and 35. on Sectional Correction line, hereinafter described.
- Land, level.
- Soil, sandy loam, 1st rate.
- Timber, scattering small palo verde and catclaw.
- Undergrowth, dense greasewood.


-
- 40.00 From cor. of secs. 25, 26, 35 and 36,
 - West, on true line, on Sectional Correction line, bet. secs. 26 and 35.
 - Over level land, thru. dense undergrowth and very scattering timber.
 - Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



28 Survey of part of Subdivision lines (completion) of T.8 S. R.10 E.

Chains.

80.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked




1919

Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Undergrowth, dense greasewood and scrub palo verde and mesquite.
Timber, very scattering small mesquite and palo verde.

N. 0° 1' W., bet. secs. 26 and 27.
Over level land, thru. scattering timber and dense undergrowth.


35.00 Wash, 150 lks. wide, course W.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



1919

from which,
A mesquite, 8 ins. in diam., brs. S. 30° W., 20 lks. dist., marked 1/4 S 27 BT.
No other tree available; dig pits, 18x18x12 ins. N. and S. of post, 3 ft. dist.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap, marked




1919

Dig pits, 18x18x12 ins. in each sec. 5 1/2 ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite and catclaw.
Undergrowth, dense greasewood and scrub palo verde.

40.00 East, on random line, bet. secs. 23 and 26.
Set temp. 1/4 sec. cor.
80.02 Intersect the N. and S. line, 5 lks. N. of the cor. of secs. 23, 24, 25 and 26.

Thence,
N. 89° 58' W., on true line, bet. secs. 23 and 26.
Over level land, thru. dense undergrowth and scattering timber.

40.01 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked




1919

Survey of part of Subdivision lines (completion) of T. 8 S. R. 10 E. 29


Chains.

80.02 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 The cor. of secs. 22, 23, 26 and 27.
 Land, level.
 Soil, sandy, 1st rate.
 Timber, scattering small mesquite.
 Undergrowth, dense greasewood and catclaw.

25.00 N. 0° 1' W., bet. secs. 22 and 23.
 Over level land, thru. dense undergrowth:
 Wash, 50 lks. wide, course W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



80.00m Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground,
 for cor. of secs. 14, 15, 22 and 23, with brass cap,
 marked



Dig pits, 18x18x12 ins. in each sec. 5 $\frac{1}{2}$ ft. dist.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood, catclaw and mesquite.
 No timber.


40.00 S. 89° 58' E., on random line, bet. secs. 14 and 23.
 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect the cor. of secs. 13, 14, 23 and 24.
 Thence,

N. 89° 58' W., on true line, bet. secs. 14 and 23.
 Over level land, thru. brush.

6.70 Wash, 20 lks. wide, course SW.

40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



80.02 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 The cor. of secs. 14, 15, 22 and 23.
 Land, level.
 Soil, sandy, 1st rate.
 Timber, scattering small mesquite.
 Undergrowth, dense greasewood and scrub palo verde.

40.00 N. 0° 1' W., bet. secs. 14 and 15.
 Over level land, thru. dense undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

30 Survey of part of
Subdivision lines of (completion) of T.8 S., R.10 E.

Chains.

$\frac{1}{4}$
 S15 | S14
 1919

56.10 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 70.00 Ravine, 20 lks. wide, 6 ft. deep, course W.
 80.00 Dim road, brs. NW. and SE.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked

T8S | R10E
 S10 | S11
 S15 | S14
 1919

Dig pits, 18x18x12 ins., in each sec. 5½ ft. dist.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood and scrub mesquite.
 No timber.

40.00 S. 89°58'E., on random line, bet. secs. 11 and 14.
 Set temp. ¼ sec. cor.
 80.10 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 11, 12, 13 and 14.
 Thence,
 S. 89°58'W., on true line, bet. secs. 11 and 14.
 Over level land, thru. dense undergrowth.
 12.10 Wash, 20 lks. wide, course SW.
 40.05 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

S 11
 $\frac{1}{4}$
 S 14
 1919

80.10 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 The cor. of secs. 10, 11, 14 and 15.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood, catclaw and scrub palo verde.
 No timber.

40.00 N. 0°2'W., on random line bet. secs. 10 and 11.
 Set temp. ¼ sec. cor.
 79.92 Intersect E. and W. line, 35 lks. E. of the reestablished
 48.00 cor. of secs. 2, 3, 10 and 11, hereinbefore described.
 Thence,
 S. 0°17'E., on true line, bet. secs. 10 and 11.
 Over level land, thru. dense undergrowth and scattering timber.
 24.90 Wash, 20 lks. wide, course S. 70°W.
 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S10 | S11
 1919

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

Survey of part of Subdivision lines(completion)of T.8 S.R.10 E. 31

chains.

54.90
79.92


Wash, 10 lks. wide, course S.60°W.
The cor. of secs. 10, 11, 14 and 15.
Land, level.
Soil, sandy, 1st rate.
Timber, scattering small mesquite and palo verde.
Undergrowth, dense greasewood.

40.00
77.12

From the cor. of secs. 27, 28, 33 and 34, on Sectional Correction line, hereinafter described,
S.0°5'W., on random line, bet. secs. 33 and 34.
Set temp. 1/4 sec. cor.
Intersect the S. bdy. of the Tp., 2 lks. W. of the reestablished cor. of secs. 33 and 34, hereinbefore described.
Thence,
N.0°4'E., on true line, bet. secs. 33 and 34.
Over level land, thru. dense undergrowth and scattering timber.

.08
37.12

A 4-wire fence, brs. E and W.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



77.12

Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Intersect the cor. of secs. 27, 28, 33 and 34, on Sectional correction line, hereinafter described.
Land, level.
Soil, sandy clay, 1st rate.
Timber, scattering mesquite and palo verde.
Undergrowth, dense greasewood, 4 to 6 ft. high.


40.00

From cor. of secs. 26, 27, 34 and 35,
West, on true line, on Sectional Correction Line, bet. secs. 27 and 34.
Over level land, thru. dense undergrowth.
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap,



80.00

Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap, marked




Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite.
Undergrowth, dense palo verde, greasewood and sage brush.

N.0°1'W., bet. secs. 27 and 28.
Over level land, thru. dense undergrowth and scattering timber.


32 Survey of part of Subdivision lines (completion) of T.8S R.10E.

Chains.

16.90 Wash, 25 lks. wide, 2 ft. deep, course W.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



80.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap, marked




Dig pits, 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist.
Land, level.
Soil, sandy clay, 1st rate.
Timber, scattering small mesquite.
Undergrowth, dense greasewood.

40.00 East, on random line, bet. secs. 22 and 27.
Set temp. $\frac{1}{4}$ sec. cor.
80.02 Intersect the N. and S. line, 7 lks. S. of the cor. of secs. 22, 23, 26 and 27.

Thence,
S. 89° 57' W., on true line, bet. secs. 22 and 27.
Over level land, thru. dense undergrowth and scattering timber.


40.01 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked.



80.02 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
The cor. of secs. 21, 22, 27 and 28.
Land, level.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite and palo verde and dense greasewood.
Undergrowth, dense greasewood.

N. 0° 1' W., bet. secs. 21 and 22.
Over level land, thru. scattering timber and dense undergrowth.

8.80 Wash, 20 lks. wide, 2 ft. deep, course W.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



80.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap, marked

Chains.

| | |
|------|------|
| T8S | R10E |
| S16 | S15 |
| S21 | S22 |
| 1919 | |

Dig pits, 18x18x12 ins., in each sec. 5 1/2 ft. dist.
 Land, level.
 Soil, sandy clay, 1st rate.
 Undergrowth, dense greasewood.
 Timber, scattering small mesquite.

40.00 N. 89° 57' E., on random line, bet. secs. 15 and 22.
 Set temp. 1/4 sec. cor.
 80.02 Intersect the cor. of secs. 14, 15, 22 and 23.
 Thence,
 S. 89° 57' W., on true line, bet. secs. 15 and 22.
 40.01 Over level land, thru. dense undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., with brass cap, marked

| |
|------|
| S 15 |
| 1/4 |
| S 22 |
| 1919 |

80.02 Dig pits, 18x18x12 ins., E and W. of post, 3 ft. dist.
 The cor. of secs. 15, 16, 21 and 22.
 Land, level.
 Soil, sandy clay, 1st rate.
 Undergrowth, dense scrub mesquite and greasewood.
 No timber.

6.90 N. 0° 1' W., bet. secs. 15 and 16.
 40.00 Over level land, thru. dense undergrowth.
 Wash, 15 lbs. wide, 2 ft. deep, course W.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., with brass cap, marked

| | |
|------|-----|
| 1/4 | |
| S16 | S15 |
| 1919 | |

80.00 Dig pits, 18x18x12 ins., N. and S. of cor., 3 ft. dist.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 9, 10, 15 and 16, with
 brass cap, marked

| | |
|------|------|
| T8S | R10E |
| S 9 | S10 |
| S16 | S15 |
| 1919 | |

Dig pits, 18x18x12 ins., in each 5 1/2 ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Undergrowth, dense scrub mesquite and greasewood.
 No timber.

40.00 N. 89° 57' E., on random line, bet. secs. 10 and 15.
 Set temp. 1/4 sec. cor.

34 Survey of part of Subdivision lines(completion)of T.8S.,R.10E.

Chains.

79.98 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 10, 11, 14 and 15.
 Thence,
 S. 89° 58' W., on true line, bet. secs. 10 and 15.
 Over level land, thru. dense undergrowth,
 26.90 Dim road, brs. N. 60° W. and S. 60° E.
 39.99 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 10
 $\frac{1}{4}$ ———
 S 15
 1919

52.40 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 Wood road, brs. NW. and SE.
 79.98 The cor. of secs. 9, 10, 15 and 16.
 Land, level.
 Soil, sandy clay, 1st rate.
 Undergrowth, dense greasewood.
 No timber.

40.00 N. 0° 17' W., on random line, bet. secs. 9 and 10.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Intersect E. and W. line, 5 lks. W. of the reestablished cor. of secs. 3, 4, 9 and 10, hereinbefore described.
 Thence,
 S. 0° 15' E., on true line, bet. secs. 9 and 10.
 Over level land, thru. dense undergrowth.
 39.88 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S 9 | S 10
 1919

66.38 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Dim road, brs. E. and W., N. and S. of post, 3 ft. dist.
 79.88 The cor. of secs. 9, 10, 15 and 16.
 Land, level.
 Soil, sandy loam, 1st rate.
 Undergrowth, dense scrub mesquite and greasewood.
 No timber.

40.00 From the cor. of secs. 28, 29, 32 and 33, on Sectional Correction Line, hereinafter described,
 S. 0° 3' W. on random line, bet. secs. 32 and 33.
 Set temp. $\frac{1}{4}$ sec. cor.
 76.94 Intersect the S. bdy. of the Tp., 4 lks. E. of the reestablished cor. of secs. 4, 5, 32 and 33, hereinbefore described.
 Thence,
 N. 0° 5' E., on true line, bet. secs. 32 and 33.
 Over level land, thru. dense undergrowth.
 30.64 Wash, 10 lks. wide, course W.
 36.94 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S 32 | S 33
 1919

63.94 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Wash, 20 lks. wide, 1 ft. deep, course W.

Survey of part of Subdivision lines (completion) of T.8 S., R.10 E. 35

Chains.

76.94 Intersect the cor. of secs. 28, 29, 32 and 33, on Sectional Correction Line, hereinafter described.
 Land, level.
 Soil, sandy clay, 1st rate.
 Undergrowth, dense greasewood.
 No timber.

 From cor. of secs. 27, 28, 33 and 34,
 West, on true line, on Sectional Correction Line, bet.
 secs. 28 and 33.
 Over level land, thru dense undergrowth and very scatter-
 ing timber.

20.00 Strike low land, with a number of small washes, course SW.
 36.00 Leave low land, with a number of small washes, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

S 28
 $\frac{1}{4}$
 S 33
 1919

78.25 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 A 4-wire fence, brs. N. and S.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the
 ground, for cor. of secs. 28, 29, 32 and 33, with brass
 cap, marked

T8S | R10E
 S29 | S28
 S32 | S33
 1919

 Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.
 Timber, scattering small mesquite.
 Undergrowth, dense greasewood.

N. 0° 2' W., bet. secs. 28 and 29.
 Over level land, thru scattering timber and dense under-
 growth.
 3.30 A 4-wire fence, brs. E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$
 S29 | S28
 1919

66.90 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 Wash, 15 lks. wide, 3 ft. deep, course S. 80° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 20, 21, 28 and 29, with
 brass cap, marked

T8S | R10E
 S20 | S21
 S29 | S28
 1919

Dig pits, 18x18x12 ins. in each sec. $5\frac{1}{2}$ ft. dist.
 Land, level.
 Soil, sandy loam, 1st rate.

Survey of part of Subdivision lines(completion)of T.8 S., R.10 E.

36

Chains.


Undergrowth, dense, greasewood brush.
Timber, scattering small mesquite.

40.00 East, on random line, bet. secs. 21 and 28.
Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect the cor. of secs. 21, 22, 27 and 28.
Thence,

West, on true line, bet. secs. 21 and 28.
Over level land, thru. scattering timber and dense undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



80.08 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
The cor. of secs. 20, 21, 28 and 29.
Land, level.

Soil, sandy loam, 1st rate.
Undergrowth, dense greasewood.
Timber, scattering small mesquite.


N.0°2'W., bet. secs. 20 and 21.
Over level land, thru. dense undergrowth.

12.00 Wash, 15 lks. wide, 3 ft. deep, course S.80°W.

34.00 Road brs. N.5°E. and S.5°W.

39.00 Wire fence parallel to road.


40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



47.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Wash, 15 lks. wide, 1 ft. deep, course W.

79.80 Fence brs. N.89°E. and S.89°W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap, marked



Dig pits, 18x18x12 ins., in each sec. $5\frac{1}{2}$ ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Undergrowth, dense scrub mesquite and greasewood.
No timber.

40.00 East, on random line, bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect the cor. of secs. 15, 16, 21 and 22.
Thence,

West, on true line, bet. secs. 16 and 21.
Over level land, thru. dense undergrowth and scattering timber.

40.02 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

Survey of part of Subdivision lines(completion)of T.8 S.,R.10 E. 37

Chains.

S 16
 $\frac{1}{4}$ -----
S 21
1919

75.00 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
Road brs. N. and S.
76.00 A 4-wire fence, brs. N. and S.
78.45 A 4-wire fence brs. N. 89° E. and S. 89° W.
80.04 The cor. of secs. 16, 17, 20 and 21.
Level land.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite.
Undergrowth, dense greasewood.

N. 0° 2' W., bet. secs. 16 and 17.
Over level land, thru. dense undergrowth and scattering timber.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

.1
|
S17 | S16
|
1919

80.00 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap, marked

T8S | R10E
S 8 | S 9

S17 | S16
1919

Dig pits. 18x18x12 ins. in each sec. 5 $\frac{1}{2}$ ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite.
Undergrowth, dense greasewood.

40.00 East, on random line, bet. secs. 9 and 16.
Set temp. $\frac{1}{4}$ sec. cor.
80.08 Intersect the cor. of secs. 9, 10, 15 and 16.
Thence,
West, on true line, bet. secs. 9 and 16.
Over level land, thru. dense undergrowth and scattering timber.

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 9

S 16
1919

76.20 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
Road brs. N. and S.
78.10 Fence, 4 wires, brs. N. and S.
80.08 The cor. of secs. 8, 9, 16 and 17.
Land, level.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite.
Undergrowth, dense greasewood.

Survey of part of Subdivision lines(completion)of T.8 S.,R.10 E.

38

Chains.

- 40.00 N.0°16'W., on random line, bet. secs.8 and 9.
Set temp. $\frac{1}{4}$ sec.cor.
79.84 Intersect E.and W.line,25 lks.W.of the original cor.of
secs.4,5,8 and 9,hereinbefore described.
Thence,
S.0°5'E., on true line, bet.secs.8 and 9:
Over level land, thru. dense undergrowth and scattering
timber.
9.84 Wash,20 lks.wide,1 ft. deep,course S:70°W.
39.84 Set an iron post 3 ft.long,1 in.in diam.,26 ins.in the
ground,for $\frac{1}{4}$ sec.cor.,with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ | \\ S\ 8\ | \ S\ 9 \\ | \\ 1919 \end{array}$$

- 79.84 Dig pits,18x18x12 ins., N.and S.of post,3 ft.dist.
The cor.of secs.8,9,16 and 17.
Land,level.
Soil,sandy loam,1st rate.
Timber,scattering small mesquite.
Undergrowth,dense greasewood.

- From the cor.of secs.29,30,31 and 32,on Sectional Correc-
tion line, hereinafter described,
S.0°5'W., on random line, bet. secs.31 and 32.
40.00 Set temp. $\frac{1}{4}$ sec.cor.
77.38 Intersect the S.bdy. of the Tp., at the reestablished
cor.of secs. 31 and 32, hereinbefore described.
Thence,
N.0°5'E., on true line, bet. secs.31 and 32.
Over level land,thru. thru. dense undergrowth.
34.38 Wash,30 lks.wide,course SW.
37.38 Set an iron post, 3 ft.long, 1 in.in diam., 26 ins.in
the ground,, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ | \\ S\ 31\ | \ S\ 32 \\ | \\ 1919 \end{array}$$

- 47.38 Dig pits, 18x18x12 ins., N.and S. of post,3 ft.dist.
Wash,30 lks.wide,course SE.
67.38 Wash,40 lks.wide,course S.10°W.
68.60 Wire fence, brs.E and W.
71.38 Road brs.E.and W.
77.38 Intersect the cor.of secs. 29,30,31 and 32,on Sectional
Correction Line,hereinafter described.
Land,level.
Soil,sandy loam,1st rate.
Undergrowth, dense scrub mesquite,and greasewood.
No timber.

- From the cor.of secs.28,29,32 and 33,
West,on true line,on Sectional Correction Line, bet.secs.
29 and 32.
Over level land, thru.dense undergrowth and scattering
timber.
10.80 Road brs.N.10°E. and S.10°W.
40.00 Set an iron post, 3 ft.long,1 in.in diam.,26 ins.in the
ground,for $\frac{1}{4}$ sec.cor.,with brass cap,marked

Survey of part of Subdivision lines(completion)of T.8 S.,R.10 E. 39

Chains.

S 29
1/4
S 32
1919

76.60 Dig pits,18x18x12 ins.,E.and W.of post,3 ft.dist.
A 4-wire fence, brs.N.and S.
78.50 Wash,35 lks.wide,5 ft.deep,course S.
80.00 Set an iron post 3 ft.long,2 ins.in diam., 24 ins.in the ground,for cor.of secs.29,30,31 and 32,with brass cap, marked

T8S | R10E
S30 | S29
S31 | S32
1919

Dig pits,18x18x12 ins.,in eachsec..5 1/2 ft.dist.
Land,level.
Soil,sandy clay,1st rate.
Timber,scattering small mesquite and palo verde.
Undergrowth, dense greasewood.

10.00 West, on true line,on Sectional Correction Line,bet.secs. 30 and 31.
Over level land, thru. scattering timber and undergrowth.
11.00 Windmill,well and corral, brs.S.10.00 chs.dist.
11.50 Adobe house brs.S.8.00 chs.dist.
40.00 Dim road brs.N.10°E. and S.10°W.
Set an iron post,3 ft.long, 1 in. in diam.,26 ins.in the ground,for 1/4 sec.cor., with brass cap,marked

S 30
1/4
S 31
1919

74.65 Dig pits,18x18x12 ins.,E.and W.of post,3 ft.dist.
Intersect the W.bdy.of the Tp.,2.02 chs.S.0°3'E.,from the reestablished cor.of secs. 25 and 30,T.8 S.,R.9 E., hereinbefore described.
At point of intersection,
Set an iron post, 3 ft.long, 2 ins.in diam., 24 ins.in the ground,for reestablished cor.of secs.30 and 31, with brass cap,marked

T8S
S30
S31
R10E

1919

Dig pits 24x24x12 ins. NE. and SE.of post, 4 ft.dist.
Land, nearly level.
Soil,sandy loam, 2nd rate.
Timber, scattering small mesquite and palo verde.
Undergrowth, scattering greasewood, catclaw and sahuaro cactus.

8.70 From cor.of secs.29,30,31and 32.
12.10 N.0°2' W., bet. secs. 29 and 30.
33.30 Over level land, thru. dense undergrowth.
40.00 Wash,50 lks.wide,course S.10°E.
Same wash,50 lks.wide,course S,10°W.
Dim road, brs.N.20°E. and S.20°W.
Set an iron post,3 ft.long,1 in.in diam.,26 ins.in the ground,for 1/4 sec.for., with brass cap,marked

400 Survey of part of subdivision lines (completion) of T.8 S.R.10 E.

Chains.

80.00 Dig pits, 18x18x12 ins. in each sec. 5 $\frac{1}{2}$ ft. dist.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 20, 29 and 30, with brass cap, marked

| | |
|------|------|
| T8S | R10E |
| S19 | S20 |
| S30 | S29 |
| 1919 | |

Dig pits, 18x18x12 ins. in each sec. 5 $\frac{1}{2}$ ft. dist.
Land, level.
Soil, sandy loam, 1st rate.
Undergrowth, dense scrub mesquite and greasewood.
No timber.

40.00 East, on random line, bet. secs. 20 and 29.
Set temp. $\frac{1}{4}$ sec. cor.
79.96 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 20, 21, 28 and 29.

Thence,
N. 89° 58' W., on true line, bet. secs. 20 and 29.
Over level land, thru. dense undergrowth and scattering timber.

3.40 Road brs. N. and S.
3.60 Wire fence, brs. N. and S.
39.98 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

| |
|---------------|
| S 20 |
| $\frac{1}{4}$ |
| S 29 |
| 1919 |

47.50 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
54.40 Wash, 15 lks. wide, 3 ft. deep, course S. 30° W.
60.00 Wash, 30 lks. wide, 5 ft. deep, course S. 20° W.
79.96 Dim road brs. N. 10° E. and S. 10° W.
The cor. of secs. 19, 20, 29 and 30.
Land, level.
Soil, sandy loam, 1st rate.
Timber, scattering small mesquite.
Undergrowth, dense greasewood.

40.00 West, on random line, bet. secs. 19 and 30;
Set temp. $\frac{1}{4}$ sec. cor.
74.52 Intersect W. bdy. of the Tp., 5 lks. S. of the reestablished cor. of secs. 19 and 30, hereinbefore described.

Thence,
S. 89° 58' E., on a true line, bet. secs. 19 and 30.
Over level land, thru. dense undergrowth.

5.00 Wash, 10 lks. wide, course SE.
34.52 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

| |
|---------------|
| S 19 |
| $\frac{1}{4}$ |
| S 30 |
| 1919 |

43.52 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
74.52 Wash, 10 lks. wide, course SE.
The cor. of secs. 19, 20, 29 and 30.
Land, level.
Soil, sandy loam, 1st and 2nd rate.
Undergrowth, dense greasewood, scrub mesquite and giant cactus.
No timber.

Survey of part of Subdivision lines (completion) of T.8 S., R.10 E. 41

| | |
|-------------------------|---|
| Chains. | N.0°21'W., bet. secs.19 and 20. Over level land, thru. dense undergrowth. 16.50 Wash, 20 lks. wide, course E. 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked |
| | $\begin{array}{c} \frac{1}{4} \\ \hline S19 \quad S20 \\ \hline 1919 \end{array}$ |
| 43.10 68.10 80.00 | Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist. Wash, 30 lks. wide, course E. Wire fence brs. E and W. Set an iron post; 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 17, 18, 19 and 20, with brass cap, marked |
| | $\begin{array}{c} T8S \quad R10E \\ \hline S18 \quad S17 \\ \hline S19 \quad S20 \\ \hline 1919 \end{array}$ |
| | Dig pits, 18x18x12 ins. in each sec. 5½ ft. dist. Land, level. Soil, sandy clay, 1st rate. Undergrowth, dense scrub mesquite and greasewood. No timber. |
| ----- | |
| 40.00 80.08 | S.89°58'E., on random line, bet. secs. 17 and 20. Set temp. ¼ sec. cor. Intersect the N. and S. line, 5 lks. S. of the cor. of secs. 16, 17, 20 and 21. Thence, West, on true line, bet. secs. 17 and 20. Over level land, thru. dense undergrowth. |
| 40.04 | Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked |
| | $\begin{array}{c} S \quad 17 \\ \hline S \quad 20 \\ \hline 1919 \end{array}$ |
| 49.70 55.00 80.08 | Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist. Wash, 35 lks. wide, 4 ft. deep, course S. Dim road, brs. N. and S. of sec. 20. The cor. of secs. 17, 18, 19 and 20. Land, level. Soil, sandy loam, 1st rate. Undergrowth, dense scrub mesquite and greasewood. No timber. |
| ----- | |
| 40.00 74.37 | N.89°58'W., on random line, bet. secs. 18 and 19. Set temp. ¼ sec. cor. Intersect the W. bdy. of the Tp. at the reestablished cor. of secs. 18 and 19, hereinbefore described. Thence, S.89°58'E., on true line, bet. secs. 18 and 19. Over level land, thru. dense undergrowth. |
| .37 13.37 34.37 | Wash, 10 lks. wide, course SE. Wash, 20 lks. wide, course SE. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked |
| | $\begin{array}{c} S \quad 18 \\ \hline S \quad 19 \\ \hline 1919 \end{array}$ |

Survey of part of Subdivision lines (completion) of T.8 S., R.10 E.


42

Chains.

74.37 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
The cor. of secs. 17, 18, 19 and 20 at the recent line
Land, nearly level.
Soil, sandy loam, 1st rate.
Undergrowth, dense greasewood, scrub palo verde, mesquite
and cacti.
No timber.

N. 0° 2' W., bet. secs. 17 and 18.
Over nearly level land, thru. dense undergrowth and scat-
tering timber.

1.70 Wash, 20 lks. wide, course E.
27.00 Wash, 10 lks. wide, course E.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked




from which,

A mesquite, 6 ins. in diam., brs. S. 16 $\frac{1}{2}$ ° W., 91
lks. dist., marked " $\frac{1}{4}$ S 18 BT."

A mesquite, 10 ins. in diam., brs. N. 44 $\frac{1}{2}$ ° E., 15
lks. dist., marked " $\frac{1}{4}$ S 17 BT."

44.80 Wash, 10 lks. wide, course E.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for cor. of secs. 7, 8, 17 and 18, with brass
cap, marked




Dig pits, 18x18x12 ins., in each sec. 5 $\frac{1}{2}$ ft. dist.
Land, nearly level.
Soil, sandy loam, 1st rate.
Undergrowth, dense greasewood, scrub mesquite and palo
verde.
Timber, scattering small mesquite and palo verde.

40.00 East, on random line, bet. secs. 8 and 17.
80.06 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 2 lks. S. of the cor. of secs.
8, 9, 16 and 17.

Thence,
S. 89° 59' W., on true line, bet. secs. 8 and 17.
Over level land, thru. dense undergrowth and scattering
timber.

38.65 Wash, 50 lks. wide, course S.
40.03 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



49.65 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
80.06 Dim road, brs. N. and S.
The cor. of secs. 7, 8, 17 and 18.
Land, level.
Soil, sandy loam, 1st rate.
Undergrowth, dense greasewood and scrub mesquite.
Timber, scattering small mesquite,

Survey of Subdivision lines(completion)of T.8 S.,R. 10 E. 43

Chains.

40.00 N.89°58'W., on random line, bet. secs.7 and 18.
 Set temp. $\frac{1}{4}$ sec.cor.
 74.14 Intersect W. bdy. of the Tp.,4 lks.S.of the reestablished
 cor.of secs. 7 and 18,hereinbefore described.
 Thence,
 S.89°56'E., on true line, bet. secs.7 and 18.
 Over level land, thru. dense undergrowth.
 1.14 Wash,10 lks.wide, course N.70° E.
 12.84 Wash,20 lks.wide, course N.70° E.
 34.14 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec.cor., with brass cap,marked

$$\begin{array}{r} S \ 7 \\ \frac{1}{4} \overline{) \quad} \\ S \ 18 \\ 1919 \end{array}$$

74.14 Dig pits,18x18x12 ins., E.and W.of post,3 ft.dist.
 The cor.of secs. 7,8,17 and 18.
 Land,level.
 Soil,sandy loam, 1st rate.
 Undergrowth, dense greasewood and scrub mesquite.
 No timber.

24.80 N.0°2'W., bet. secs.7 and 8.
 Over level land, thru.dense undergrowth.
 40.00 Wash,10 lks.wide,course N.80°E.
 Set an iron post, 3 ft.long, 1 in.in diam.,26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$$\begin{array}{r} \frac{1}{4} \\ S7 \ | \ S8 \\ 1919 \end{array}$$

57.00 Dig pits, 18x18x12 ins., N.and S.of post,3 ft.dist.
 Wash, 10 lks. wide, course E.
 80.00 Set an iron post,3 ft.long,2 ins. in diam.,24 ins.in
 the ground,for cor.of secs.5,6,7 and 8, with brass
 cap, marked

$$\begin{array}{r|l} T8S & R10E \\ S6 & S5 \\ \hline S7 & S8 \\ 1919 \end{array}$$

Dig pits, 18x18x12 ins., in each sec.5 $\frac{1}{2}$ ft. dist.
 Land,level.
 Soil,sandy loam, 1st rate.
 Undergrowth, dense greasewood and scrub mesquite.
 No timber.


40.00 N.89° 59' E., on random line, bet. secs.5 and 8.
 Set temp. $\frac{1}{4}$ sec.cor.
 79.92 Intersect N. and S. line, 9 lks.N. of the original cor.
 of secs. 4,5,8 and 9, hereinbefore described.
 Thence,
 N.89°57' W.,on true line, bet. secs.5 and 8.
 Over level land, thru.dense undergrowth.
 37.00 Wash,50 lks.wide, course S.
 39.96 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$$\begin{array}{r} S \ 5 \\ \frac{1}{4} \overline{) \quad} \\ S \ 8 \\ 1919 \end{array}$$

44 Survey of part of Subdivision lines(completion)of T.8 S.R.10 E.


Chains.
 44.90 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 79.92 Dim road, brs. N. and S.
 The cor. of secs. 5, 6, 7 and 8.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense scrub mesquite.
 No timber.

40.00 N. 89° 56' W., on random line, bet. secs. 6 and 7.
 74.03 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the W. bdy. of the Tp., at the reestablished
 cor. of secs. 6 and 7, hereinbefore described.
 Thence,
 S. 89° 50' E., on a true line, bet. secs. 6 and 7.
 Over level land, thru. dense undergrowth.
 5.03 Wash, 20 lks. wide, course SE.
 34.03 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



74.03 Dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.
 The cor. of secs. 5, 6, 7 and 8.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense greasewood and scrub mesquite.

40.00 N. 0° 2' W., on random line, bet. secs. 5 and 6.
 81.58 Set temp. $\frac{1}{4}$ sec. cor.
 Intersect the N. bdy. of the Tp., 16 lks. E. of the origin-
 al cor. of secs. 5, 6, 31 and 32, hereinbefore described.
 Thence,
 S. 0° 9' E., on true line, bet. secs. 5 and 6.
 Over level land, thru. dense undergrowth.
 1.58 Dim road, brs. N. 70° E., and S. 70° W.
 41.58 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



51.08 Dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
 62.88 Wash, 20 lks. wide, course E.
 81.58 Wash, 30 lks. wide, course S. 70° E.
 The cor. of secs. 5, 6, 7 and 8.
 Land, level.
 Soil, sandy, 1st rate.
 Undergrowth, dense scrub mesquite.
 No timber.

The continued satisfactory adjustment of the solar appa-
 ratus during the survey of this township is indicated
 in field tests, as described in Book "H."

GENERAL DESCRIPTION.

SURFACE: Very gently rolling.
 SOIL. Sandy loam, 1st and 2nd rate.
 TIMBER. Small scattering mesquite, palo verde and ironwood.

GENERAL DESCRIPTION, (cont'd)

UNDERGROWTH: Mesquite, greasewood, sage brush and catclaw.

EVIDENCE OF MINERAL: None.

SETTLEMENT: One settler in sec.4, and also one in sec.31.

INDUSTRY: The township is adapted to stock raising.

There is early spring pasture.

Note: There are two wells in township, one in sec.4,
500 ft. deep, furnishing good water, another in sec.
31.

CERTIFICATE OF UNITED STATES TRANSITMAN.

BOOK 3433

I, William D. Wilson U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 81, Arizona bearing date of the 6th day of February, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the Subdivision lines of

Township 8 South - Range 10 East

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 2 hereof as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 81, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Date Feb. 21, 1921.

William D. Wilson
U.S. Transitman

Place Phoenix Ariz.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

....., 191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

.....
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

.....
U. S. Surveyor General.

196

50

BOOK 3433

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Horace M. Muscott, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 81, Arizona bearing date of the 6th day of February, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{RETRACED} surveyed all those parts or portions of The North boundary and Subdivision lines, RESURVEYED all those parts or portions of the Subdivision lines, and SURVEYED all those parts or portions of the Subdivision lines of

Township 8 South - Range 10 East

of the Gila and Salt

River Base and Meridian, in the State of _____, which are represented in the foregoing field notes ^{and by diagram on page 2 hereof} as having been executed by me, and under my direction; and that all the corners of ^{said retracement, resurvey and survey} ~~said survey~~ have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 81, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Date February 12 1921

Horace M. Muscott
U.S. Transitman

Place Sec 20 T12N R20E S.B.D.M

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

_____, 191

The foregoing field notes of the survey of _____

executed by _____

under his special instructions dated _____, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

198

52

BOOK 3433

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

I, William H. Thorn, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 81, Arizona bearing date of the 6th day of February, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the South and West boundaries and surveyed all those parts or portions of the Subdivision lines of Township 8 South - Range 10 East of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 2 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 81, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey and survey.

Date May 16 1921

William H. Thorn U.S. Cadastral Engineer

Place T2SR29EGSRB+M

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix Arizona May 23 1921.

The foregoing field notes of the retracement of Part of the North boundary and Part of the Subdivision lines, resurvey of the South and West boundaries and Part of the Subdivision lines, and of the Survey of Part of the Subdivision lines (Completion) of Township 8 South, Range 10 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by William H. Thorn, U.S. Cadastral Engineer and Horace M. Muscott and William D. Wilson, U.S. Transitmen

under his special instructions dated Feb. 6, 1918 for Group 81, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys retracements, resurveys and surveys they describe, are hereby approved.

U.S. Surveyor General

I certify that the foregoing transcript of the field notes of the above described retracements, resurveys and surveys in Book "G" of Group 81, Arizona, has been correctly copied from the original notes on file in this office.