

3501

Book "A"

4-679

BOOK 3501

FIELD NOTES

OF THE RESURVEY OF

East boundary,

South boundary, and

West boundary of

TOWNSHIP 11 NORTH, RANGE 21 EAST,

Part of the South boundary, and

Part of the East boundary of

TOWNSHIP 12 NORTH, RANGE 21 EAST,

Part of the South boundary of

TOWNSHIP 12 NORTH, RANGE 22 EAST,

and of the Survey of

Subdivisions lines of

TOWNSHIP 11 NORTH, RANGE 21 EAST,

Of the ~~Gila and Salt River Base~~ and ~~Meridian,~~

In the State of Arizona.

EXECUTED BY

Benjamin J. Kinsey, U. S. Transitman,

and

Sidney E. Blout, U. S. Cadastral Engineer,

In the capacity of U. S. Surveyors, under Special Instructions dated September 28, 1918, issued by the United States Surveyor General to govern surveys included in Group No. s. 93 and 94, which were approved by the Commissioner of the General Land Office, Oct. 23 and 24, 1918, and Assignment Instructions dated August 7, 1920 and March 28, 1921.

Resurvey & Survey commenced Sept. 1, 1920, and May 4, 1921.

Resurvey & Survey completed Oct. 8, 1920, and May 10, 1921.

3501

3501

INDEX DIAGRAM.

Township *Range*


6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

1A

BOOK 3501


~ INDEX DIAGRAM ~

Book No. 3501

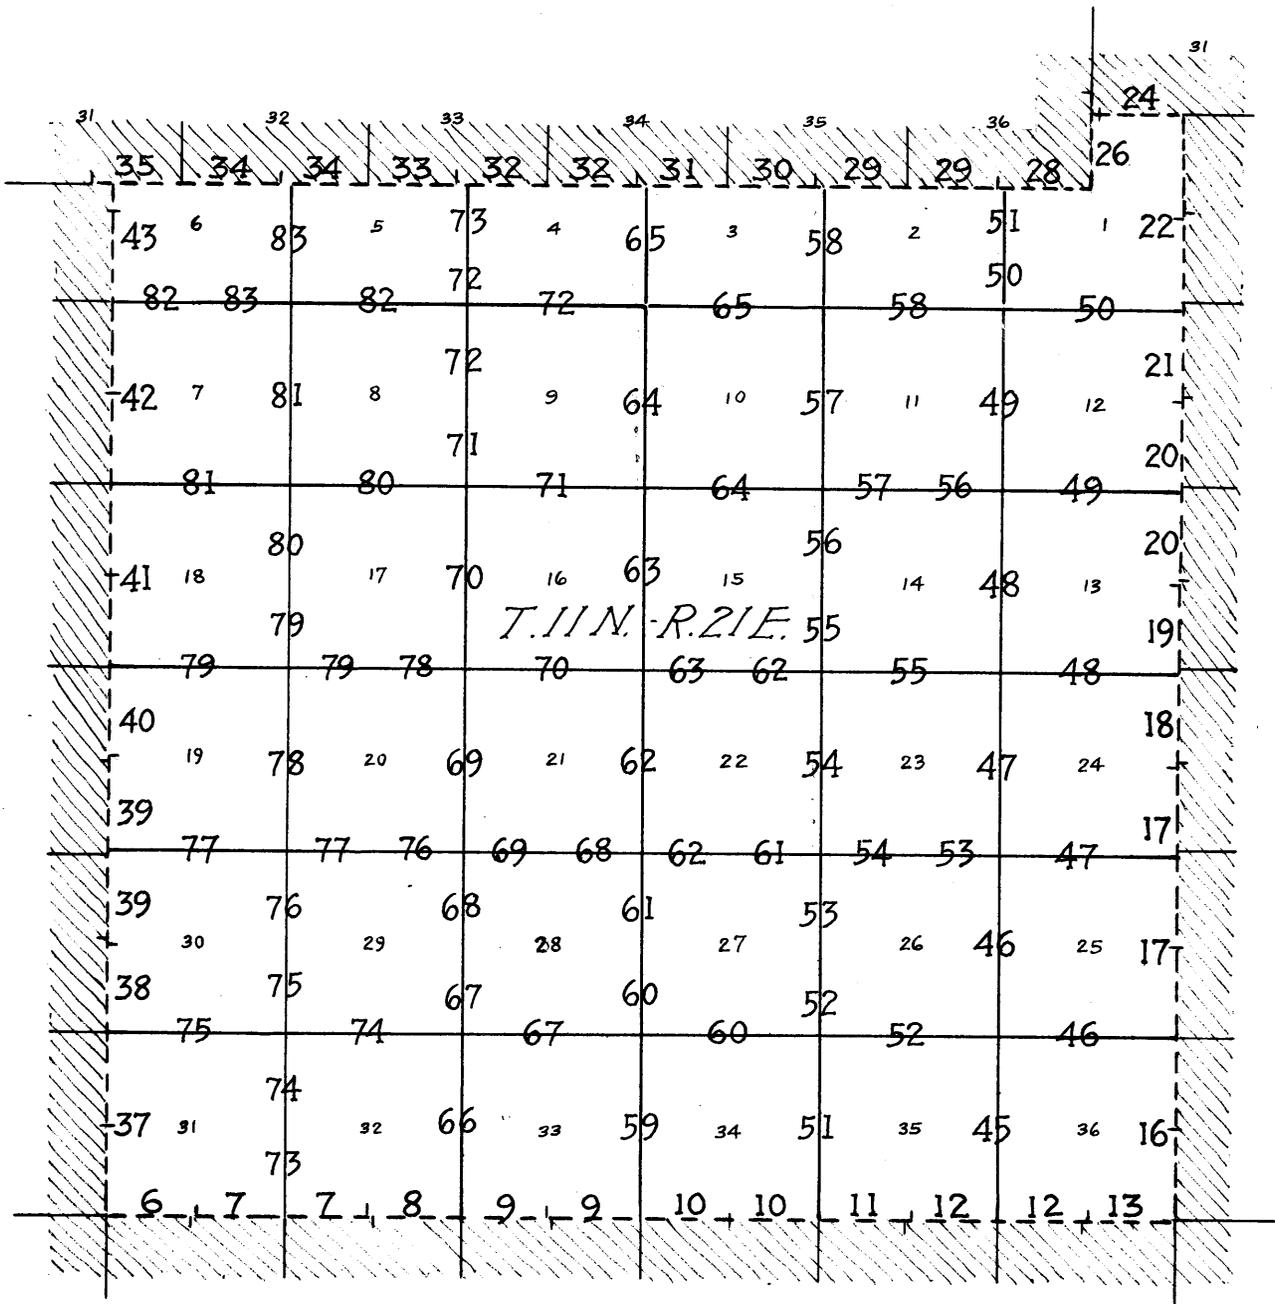

- Lines resurveyed under Group 94.
- Lines surveyed under Group 94.
- Lines surveyed under Group 93.
- Accepted surveys.
- //// Areas surveyed as per accepted plats on file.

DATE DIAGRAM

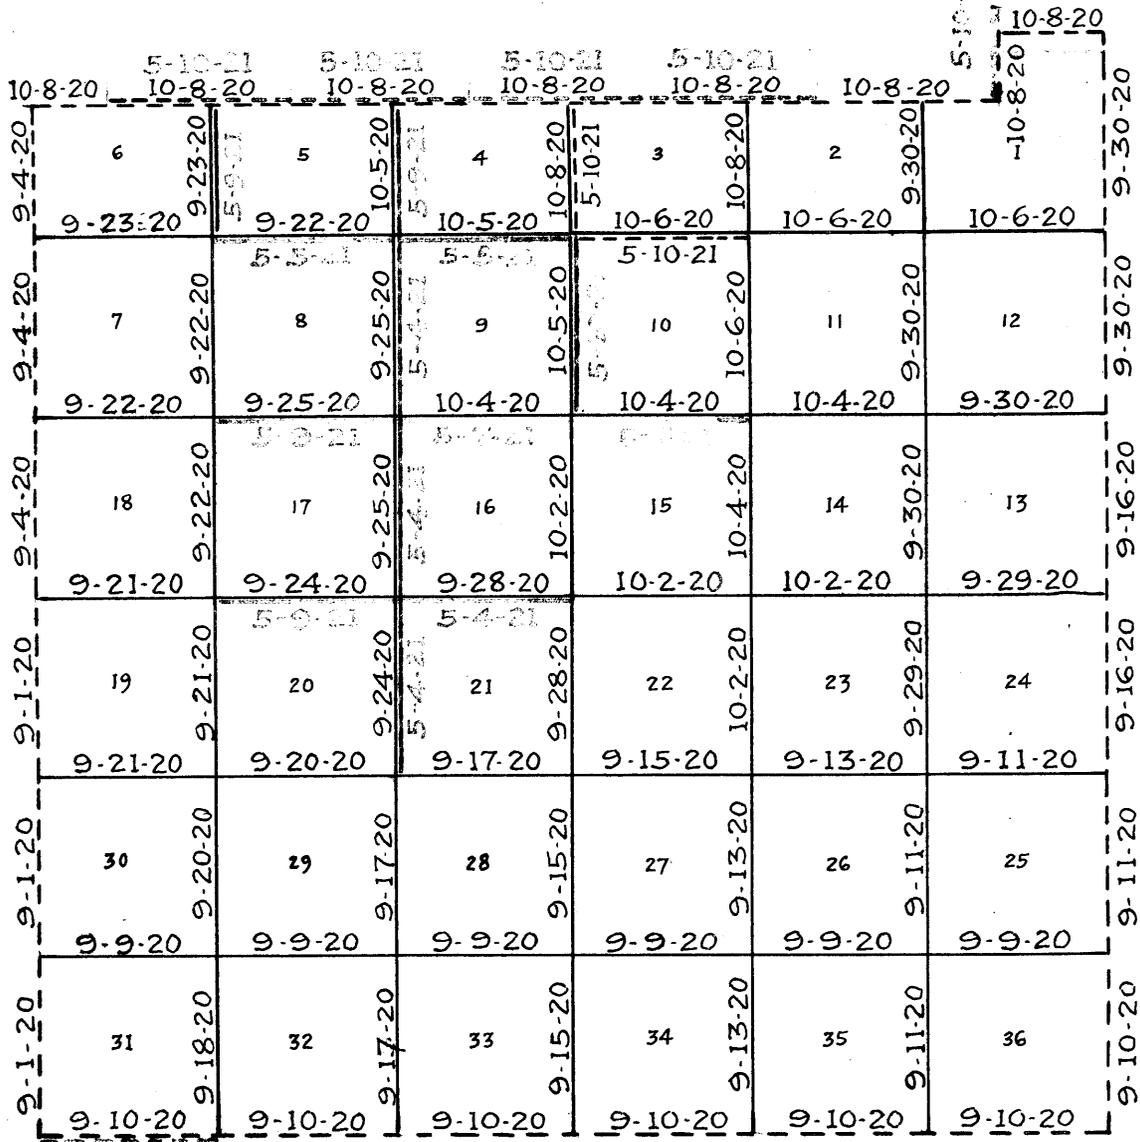

Solid red lines indicate surveys under Group 94.) by Benjamin J. Kinsey, U.S.T.
 Dotted red lines indicate resurveys under Group 94.) on dates shown thereon.
 Solid blue lines indicate surveys under Group 93.)

Solid green lines indicate surveys under Group 94) by Sidney E. Blout, U.S. Cadas-
 Dotted green lines indicate resurveys under Group 94) tral Engineer, on dates shown
 Dotted blue lines indicate surveys under Group 93) thereon.

Resurveys and surveys hereinafter described, executed on dates shown on diagram on page 2 hereof, by Benjamin J. Kinsey, U. S. Transitman, and Sidney E. Blout, U. S. Cadastral Engineer, both using a Buff light mountain Favorite, Transit No. 9984, with U-shaped standards, 4½ in. horizontal circle, 4 in. vertical circle, and improved Smith solar attachment. The horizontal limb is provided with two double verniers, reading to single minutes of arc, which is also the least reading of the verniers of the latitude and declination arcs.

The instrument was examined and tested on the true meridian at Phoenix, Arizona, Aug. 7, 1920, for Kinsey's work; and March 26, 1921, for Blout's work; found correct, and was approved by the Assistant Supervisor of Surveys for Arizona, conditional upon satisfactory field tests.

All azimuth determinations are accomplished with the solar attachment, except the special observation upon Polaris for meridian upon which to test the solar apparatus, as stated in the field notes.

All measurements are made with a Lallie 5-chain steel tape compared with a Inlkin Standard one chain tape, and found correct.

The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances

PRELIMINARY FIELD TEST OF INSTRUMENT
by TRANSITMAN KINSEY.

Examine the adjustments of the transit, and correct the level and collimation errors; then, to test the solar apparatus by comparing its indications resulting from observations made during a. m. & p. m. hours, with a meridian established by observations on Polaris, proceed as follows.

August 17, 1920. In camp, near the cor. of secs. 32 and 33, T. 11 N., R. 21 E., Gila and Salt River Meridian, in lat. 34° 17½' N., and approximate long. 110° 07' 40" W., at 9 h. 52.6 m. by watch, which is 1 m. 30 s. fast of l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined on a peg driven firmly in the ground about 5 chs. N. Azimuth of Polaris at eastern elongation = 1° 21' 48".

August 18, 1920. Lay off the azimuth of Polaris 1° 21' 48" to the west, and mark the meridian thus determined by a tack in a peg driven firmly in the ground, 5 chs. N.

At 8 h. 00 m. a.m., l.m.t., set off 34° 18½' on the lat. arc, and 13° 05½' N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

At apparent noon, with the lat. arc unchanged, observe the sun on the meridian. The resulting reading of the decl. arc is 13° 02' N., which agrees with the computed decl. of the sun.

At 1 h. 30 m. p.m., l.m.t., with the lat. arc unchanged, set off 13° 00½' N. on the decl. arc, and determine a meridian with the solar, which agrees with the true meridian.

During the remainder of the afternoon, the sun is obscured by clouds.

As all of the observations taken agree within 1' 30" of the true meridian, conclude that the adjustments of the instrument are satisfactory.

Aug. 22, 1920. In camp, at same station, make a meridian observation upon the sun for time and latitude, observing simultaneously the altitude of the sun's upper limb and the transit of the sun's west limb, reversing the telescope, and observing simultaneously the altitude of the sun's lower limb and the transit of the

sun's east limb.

Mean observed altitude: $67^{\circ} 25' 00''$.

Reduced latitude : $34^{\circ} 17' 23''$.

Mean watch time of observation 12 h. 04 m. 15 s.

Watch fast of local mean time: 1 m. 31 s.

PRELIMINARY FIELD TEST OF INSTRUMENT

by Sidney E. Blout,
U. S. Cadastral Engineer

Examine the adjustments of the transit, and correct the level and collimation errors; then, to test the solar apparatus by comparing its indications, resulting from solar observations made during a. m. and p. m. hours with a meridian established by observations on Polaris, proceed as follows:

May 3, 1921. At camp, near the closing cor. of secs. 4 and 5, T. 11 N., R. 21 E.; latitude, $34^{\circ} 22\frac{1}{2}'$ N., and long. $110^{\circ} 07' 37''$ W. At 4 h. 00 m. p. m., app. time, set off $34^{\circ} 22\frac{1}{2}'$ N. on the lat. arc; $15^{\circ} 45'$ N. on the decl. arc, and determine a meridian with the solar, and mark a point thereof on a stake driven firmly in the ground, about 6 chs. N.

At same station, at 7 h. $52\frac{1}{2}'$ m., p. m., l.m.t., by watch, which is set to read local mean time, make an hour angle observation on Polaris west of the meridian, making two observations, one each with the telescope in direct and reversed position, and mark the mean point in the line thus determined on a stake driven firmly in the ground, about 6 chs. north.

Watch time of observation, mean of two observations,
7 h. 52 m. 30 s.

Azimuth of Polaris at observation, $0^{\circ} 55'$ W.

May 3, 1921. At the same station, make an altitude observation on Polaris at lower culmination for latitude, making four observations, two each with the telescope in direct and reversed positions.

Watch set to read the correct local mean time.

Mean watch time of observation 10 h. 46 m. 45 s.

Mean observed vertical angle $33^{\circ} 17'$

Reduced latitude $34^{\circ} 22' 36''$.

May 4, 1921. Lay off the azimuth of Polaris, $0^{\circ} 55\frac{1}{2}'$ to the east, and mark the meridian thus determined on the stake already set about 6 chs. N. on which the meridian falls 01' E. of the mark determined by the solar

At 7 h. 30 m., a.m., app. time, set off $34^{\circ} 22\frac{1}{2}'$ N. on the lat. arc; $15^{\circ} 56'$ N. on the decl. arc, and determine a meridian with the solar, and mark a point thereof on the stake already set about 6 chs. N. of instrument; this mark falls 01' E. of the meridian established by the Polaris observations; therefore, conclude that the adjustments of the instrument are satisfactory.

Chains

RETRACEMENT FOR RESURVEY.

This township boundary was surveyed by O. D. Wheeler, U. S. D. S., in 1883, and no subsequent retracement or resurvey is of record.

The cor. of Ts. 10 and 11 N., Rs. 20 and 21 E., was re-established in 1883 by O. D. Wheeler, U. S. D. S., and reestablished in same place by S. E. Blout, U. S. Surveyor, in 1915, and is now an iron post 3 ins. in diam., projecting 12 ins. above ground, firmly set, properly marked on brass cap, and witnessed by 4 bearing trees, properly marked, one each NW., NE., SE. and SW. of corner.

Thence,

East, on a random line, on W. 1/2 of N. bdy. of Sec. 6, T. 10 N., R. 21 E.

39.91 Fall 24 lks. S. of the point of original location of the 1/4 sec. cor. of secs. 6 and 31, as determined by reference to the original bearing trees, which are now found as hereinafter described.

The true course and dist. of W. 1/2 of N. bdy. of sec. 6 are therefore, N. 89° 39' E., 39.91 chs.

Thence,

East, on a random line, on E. 1/2 of N. bdy. of sec. 6.

39.59 Fall 47 lks. S. of the reestablished cor. of secs. 5, 6, 31 and 32, hereinafter described.

True course and dist. of E. 1/2 of N. bdy. of sec. 6 are therefore N. 89° 19' E., 39.59 chs.

East, on a random line on W. 1/2 of N. bdy. of sec. 5.

39.60 Fall 46 lks. S. of the original 1/4 sec. cor. of secs. 5 and 32, hereinafter described.

True course and dist. of W. 1/2 of N. bdy. of sec. 5 are therefore N. 89° 20' E., 39.60 chs.

Thence,

East, on a random line, on E. 1/2 of N. bdy. of sec. 5.

39.98 Fall 19 lks. N. of the original cor. of secs. 4, 5, 32 and 33, hereinafter described.

True course and dist. of E. 1/2 of N. bdy. of sec. 5 are therefore S. 89° 44' E., 39.98 chs.

East, on a random line, on W. half of N. bdy. of sec. 4.

40.33 Fall 12 lks. S. of the original point of location of the 1/4 sec. cor. of secs. 4 and 33, determined as hereinafter described.

True course and dist. of W. 1/2 of N. bdy. of sec. 4 are therefore N. 89° 50' E., 40.33 chs.

Thence,

East, on a random line, on E. 1/2 of N. bdy. of sec. 4.

39.97 Intersect the original point of location of the cor. of secs. 3, 4, 33 and 34, determined as hereinafter described.

True course and dist. of E. 1/2 of N. bdy. of sec. 4 are therefore East, 39.97 chs.

East, on a random line on W. 1/2 of N. bdy. of sec. 3.

40.19 Fall 10 lks. S. of the original point of location of the 1/4 sec. cor. of secs. 3 and 34, hereinafter described.

True course and dist. of W. 1/2 of N. bdy. of sec. 3 are therefore N. 89° 51' E., 40.19 chs.

Thence,

East, on a random line, on E. 1/2 of N. bdy. of sec. 3.

39.98 Fall 65 lks. N. of the original cor. of secs. 2, 3, 34 and 35, hereinafter described.

True course and dist. of E. 1/2 of N. bdy. of sec. 3 are therefore S. 89° 04' E., 39.98 chs.

East, on a random line on W. 1/2 of N. bdy. of sec. 2.

6. Resurvey of South bdy. of Township 11 North, Range 21 East.

Chains	Retracement for Resurvey, (Cont'd.)
39.56	Intersect the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, hereinafter described. True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 2 are therefore East, 39.56 chs. Thence, East, on a random line, on E. $\frac{1}{2}$ of N. bdy. of sec. 2.
40.32	Fall 23 lks. S. of the original cor. of secs. 1, 2, 35 and 36, hereinafter described. True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 2 are therefore N. $89^{\circ} 40' E.$, 40.32 chs.
40.15	East, on a random line, on W. $\frac{1}{2}$ of N. bdy. of sec. 1. Fall 15 lks. S. of the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, hereinafter described. True course and dist. of W. $\frac{1}{2}$ of N. bdy. of sec. 1 are therefore N. $89^{\circ} 47' E.$, 40.15 chs. Thence, East, on a random line, on E. half of N. bdy. of sec. 1.
40.27	Fall 19 lks. S. of the original cor. of Ts. 10 and 11 N., Rs. 21 and 22 E., hereinafter described. True course and dist. of E. $\frac{1}{2}$ of N. bdy. of sec. 1 are therefore N. $89^{\circ} 44' E.$, 40.27 chs.

RESURVEY.

- From the reestablished cor. of Ts. 10 and 11 N., Rs. 20 and 21 E., hereinbefore described.
N. $89^{\circ} 39' E.$ on true line, on S. bdy. of sec. 31.
Over rolling land, thru thick timber and scattering undergrowth. Ascend 12 ft., over W. slope.
- 00.40 Spur, slopes S. Descend 119 ft., over SE. slope.
- 27.20 Wash, 10 lks. wide, 3 ft. deep, course SE.
Ascend 35 ft. to $\frac{1}{4}$ sec. cor., over SW. slope.
- 28.70 Barb wire fence, brs. NW. and SE.
- 28.80 Road from Linden to Taylor, brs. NW. to SE.
- 29.50 Barb wire fence, brs. NW. and SE.
- 39.16 Ascend 30 ft., over NW. slope.
- 39.50 (40.00 chs. westing from cor. of secs. 5, 6, 31 and 32).
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, marked on brass cap:

$\frac{1}{4}$ S 31
1920

from which, one of the original bearing trees to the $\frac{1}{4}$ sec. cor. of secs. 6 and 31,

An oak, 9 ins. in diam., brs. N. $25^{\circ} E.$, 106 lks. dist., marked " $\frac{1}{4}$ S BT". Change marking on this tree to read: " $\frac{1}{4}$ S BT 31".

In addition to this tree, established a new one as follows:

On an oak, 5 ins. in diam., N. $47\frac{1}{2}^{\circ} W.$, 90 lks. dist., mark " $\frac{1}{4}$ S 31 BT."

- 39.91 Intersect the point of original location of the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, located by reference to the original bearing trees, described as follows:

An oak, 9 ins. in diam., N. $1^{\circ} E.$, 96 lks. dist. marked " $\frac{1}{4}$ S BT".

Stump of a juniper, 8 ins. in diam., projecting 12 ins. above ground, N. $3^{\circ} E.$, 60 lks. dist., marked "BT."

The remainder of this tree is found in fence used for post, and bearing the marking " $\frac{1}{4}$ S".

The first mentioned tree is now used as an accessory to the reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, as hereinbefore described.

Reestablish the $\frac{1}{4}$ sec. cor. of sec. 6 at this point, as follows:

Resurvey of South bdy. of Township 11 North, Range 21 East. 7

Chains Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/4 sec. cor. of sec. 6 only, marked on brass cap:

1/4 S 6
1920

A juniper, 8 ins. in diam., brs. S. 10 1/2° W., 96 lks. dist., mark "1/4 S 6 BT."

A yellow pine, 24 ins. in diam., brs. S. 19 1/2° W., 319 lks. dist., mark "1/4 S 6 BT."

Thence,

N. 89° 19' E., on true line, continuing measurement.

62.20 Spur, slopes SE.: descend 34 ft., over E. slope.

65.75 Barb wire fence, brs. N. and S.

65.85 Wash, 20 lks. wide, 3 ft. deep, course SE. Ascend 24 ft. over SW. slope.

70.16 Spur, slopes SE. Descend 52 ft., over NE. slope.

75.51 Wash, 10 lks. wide, course SE. Ascend 23 ft., over SW. slope.

79.50 (39.59 chs. N. 89° 19' E. from 1/4 sec. cor. of sec. 6). Intersect the original cor. of secs. 5, 6, 31 and 32, which is a sandstone 12 x 8 x 8 ins. above ground, marked with 1 notch on W. face, and 5 notches on E. face, set in small mound of stone, alongside a juniper post, set by U. S. Forest Service, marked "T 11 N R 21 E S 32" on NE. face, "T 10 N R 21 E S 32" on NE. face, "T 10 N R 21 E" on SE. face, "S 6" on SW. face, and "S 31" on NW. face.

The cor. is witnessed by the two original bearing trees, described as follows:

A juniper, 18 ins. in diam., N. 28° E., 94 lks. dist., marked "T 11 N R 21 E S 32 BT".

A yellow pine, 18 ins. in diam., S. 23° E., 220 lks. dist., marked "T 10 N R 21 E S 5 BT".

Reestablish this cor. in same place as follows: Alongside post and stone, set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 5, 6, 31 and 32, with brass cap, marked:

T 11 N | R 21 E
S 31 | S 32
S 6 | S 5
1920

In addition to the two original bearing trees, establish two new bearing trees as follows:

On a pinon, 20 ins. in diam., N. 54° W., 126 lks. dist., mark "T 11 N R 21 E S 31 BT."

On a yellow pine 18 ins. in diam., S. 8° W., 283 lks. dist., mark "T 10 N R 21 E S 6 BT."

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon and oak, and some unrecognizable varieties.

Timber, cedar, pinon, juniper, live oak and yellow pine.

Fair grass.

N. 89° 20' E., on true line, on S. bdy. of sec. 32. Over rolling land, thru scattering timber and undergrowth. Ascend 49 ft., over SW. slope.

11.00 Spur, slopes S. Descend 101 ft., over rolling SE. slope.

39.60 Intersect original 1/4 sec. cor. of secs. 5 and 32, which is a basalt stone 14 x 12 x 6 ins., marked "1/4" on W. face, set in a small mound of stone.

The cor. is witnessed by the two original bearing trees, described as follows:

A yellow pine, 24 ins. in diam., S. 76° W., 156 lks. dist., marked "1/4 S BT".

A yellow pine, 20 ins. in diam., N. 5° E., 154 lks. dist., marked "1/4 S B T".

8 . Resurvey of South bdy. of Township 11 North, Range 21 East.

Chains Reestablish this $\frac{1}{4}$ sec. cor. to refer to sec. 5 only, as follows: Reset old stone in same place, 9 ins. in the ground, and alongside same set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, with brass cap,

$\frac{1}{4}$ S 5
1920

Change markings on original SW. bearing tree to read " $\frac{1}{4}$ S BT 5".

No other tree being available S. of line, retain the old NE. bearing tree as accessory.

Thence,

S. $89^{\circ} 44'$ E., on true line, continuing measurement of S. bdy. of sec. 32.

39.79 (Midpoint). Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 32 only, with brass cap, marked:

$\frac{1}{4}$ S 32
1920

Witnessed by the original bearing tree described above at N. 5° E. from $\frac{1}{4}$ sec. cor. of sec. 5, which bears N. $2\frac{1}{2}^{\circ}$ W., 153 lks. dist. from this cor. Change marking on this tree to read " $\frac{1}{4}$ S BT 32".

40.93 A yellow pine, 24 ins. in diam., on line, mark 2 notches on each of E. and W. faces of same.

41.70 Road, bears NNW. and SSE.

43.10 Wash, 20 lks. wide, 10 ft. deep, course SSE.

Ascend 20 ft. over SW. slope.

53.60 Spur, slopes S. Descend 57 ft. over SE. slope.

56.60 Old road, brs. N. 70° E. and S. 70° W. Leave timber, brs. NE. and SW.

57.20 Barb wire fence, brs. N. 70° E. and S. 70° W.

Thence over cultivated ground.

66.10 Juniper wash (dry) 30 lks. wide, 8 ft. deep, course NE.

69.90 Road, brs. N. 80° E. and S. 80° W. Leave rolling, and enter level land.

79.58 (39.98 chs. S. $89^{\circ} 44'$ E., from $\frac{1}{4}$ sec. cor. of sec. 5). Intersect the original cor. of secs. 4, 5, 32 and 33, which is a sandstone 16 x 14 x 12 ins., marked with 2 notches on W. face, and 4 notches on E. face, and set in a mound of stone.

Reestablish this cor. in same place as follows: Reset old stone 11 ins. in the ground, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, with brass cap, marked:

T 11 N	R 21 E
S 32	S 33
S 5	S 4
T 10 N	
1920	

from which,

A yellow pine, 24 ins. in diam., brs. N. 26° W., 52 $\frac{1}{2}$ lks. dist., mark "T11N R21E S32 BT."

Raise a mound of stone, 3 ft. base and 2 ft. high, W. of cor.

Land, rolling except E. 10 chs. which is level.

Soil, rocky, 3rd rate on slopes, in field sandy loam; 1st rate.

Undergrowth, scrub cedar, pinon and oak, and some unknown varieties of brush.

Timber, cedar, pinon, juniper, oak, and yellow pine.

Fair grass.

- Chains N. 89° 50' E., on a true line on S. bdy. of sec. 33. Over level, open cultivated land.
- 10.45 Barbed wire fence, brs. N. and S. Leave cultivated and level land, and enter slightly rolling N. slope, and scattering timber and undergrowth.
- 10.90 Wash, 10 lks. wide, 3 ft. deep, course NE. Ascend 20 ft., over NW. slope. Fence cor. from which fence brs. S. 70° W. and E. Thence along fence.
- 37.80 Old road, brs. NW. and SE.
- 40.15 (Midpoint). Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap, marked

$\frac{1}{4}$ S 33
1920

From this cor., the original bearing tree to $\frac{1}{4}$ sec. cor. of secs. 4 and 33.

A cedar, 50 ins. in diam., brs. N. 14° E., 207 lks. dist., marked " $\frac{1}{4}$ S BT".

Change marking on this tree to read " $\frac{1}{4}$ S BT 33".

- 40.33 Intersect the point of original location of the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, determined by measuring S. 10° W., 202 lks. (record course and dist) from the original bearing tree described above. No trace of original pits and mound of earth can be found. Part of the original wood cor. post, 3 ins. in diam., 12 ins. long, bearing marking " $\frac{1}{4}$ S" is found hanging in fence cor. 6 lks. E.

Reestablish this $\frac{1}{4}$ sec. cor. to refer to sec. 4 only as follows: Reset the remains of old post in ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 4 only, with brass cap, marked:

$\frac{1}{4}$ S 4
1920

from which,

A yellow pine, 24 ins. in diam., brs. S. 50 $\frac{3}{4}$ ° E., 462 lks. dist., mark " $\frac{1}{4}$ S 4 BT."

Thence,

East, on true line, continuing measurement of S. bdy. of sec. 33, along fence bearing E. and W.

Ascend 25 ft. over NW. slope.

- 40.39 Fence cor. from which fences bear E., W., and N. Continue along fence.

- 60.00 Ridge, brs. N. and S. Descend 95 ft. over E. slope.

- 80.30 (39.97 chs. from $\frac{1}{4}$ sec. cor. of sec. 4). Intersect the point of original location of cor. of secs. 3, 4, 33, and 34, determined by reference to the two original bearing trees. At this point is a wood post set by the U. S. Forest Service surveyor.

A cedar post, 4 ins. square, 4 ft. long, marked "S 34" on one face, "S 4" on another, and faint remains of marking on the other face, is lying on the ground alongside, and is probably the original cor. post.

Reestablish this cor. alongside the U. S. Forest Service post as follows:

Reset the old cor. post 24 ins. in the ground, and alongside both wood posts set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for reestablished cor. of secs. 3, 4, 33 and 34, with brass cap, marked:

T 11 N | R 21 E
S 33 | S 34
S 4 | S 3
T 10 N
1920

10 Resurvey of South bdy. of Township 11 North, Range 21 East.

Chains witnessed by the original bearing trees, described as follows:

A cedar, 14 ins. in diam., S. 62 $\frac{1}{2}$ ° E., 75 lks. dist. marked "T 10 N R 21 E S 3 BT." and

A cedar, 12 ins. in diam., S. 53 $\frac{1}{2}$ ° W., 110 lks. dist., marked "T 10 N R 21 E S 4 BT." In addition to which establish new bearing trees as follows:

On a cedar, 8 ins. in diam., N. 81° W., 215 lks. dist., mark "T 11 N R 21 E S 33 BT." and

On a yellow pine, 24 ins. in diam., N. 47° E., 740 lks. dist., mark "T 11 N R 21 E S 34 BT."

Land, level and rolling.
 Soil, 1st and 3rd rate, rocky on slopes.
 Undergrowth, scrub cedar and pinon, and oak.
 Timber, cedar, pinon and yellow pine.
 Fair grass.

N. 89° 51' E., on true line, on S. bdy. of sec. 34. Over rolling land, thru scattering timber and undergrowth. Descend 45 ft. over E. slope.

.70 Barb wire fence, brs. N. and S., intersects fence bearing E. and W. at 120 lks. N. of line.

25.00 Shallow draw, drains SE. Ascend 30 ft., over W. slope.

28.00 Spur, slopes S. Descend 30 ft., over E. slope.

40.19 Intersect the original point of location of the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, at fence cor. from which fences extend, N., S., and W. This point is determined by measuring S. 55° E., 146 lks. (record course and dist.) from the original bearing tree.

The original cor. monument is sandstone 18 x 15 x 12 ins. marked " $\frac{1}{4}$ " on one face. lying on the ground at this point.

Reestablish this cor. as follows: Reset original stone 12 ins. in the ground, and alongside same set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 3 and 34, with brass cap, marked:

$\frac{1}{4}$ S 34
 S 3
 1920

witnessed by original bearing tree, described as follows:

A yellow pine, 14 ins. in diam., N. 55° W., 146 lks. dist., marked " $\frac{1}{4}$ S BT." Change marking on same to read " $\frac{1}{4}$ S B T 34". Establish new bearing tree as follows:

On a yellow pine, 14 ins. diam., S. 59° E., 424 lks. dist. mark " $\frac{1}{4}$ S 3 BT."

Thence,
 S. 89° 04' E., on true line, continuing measurement of S. bdy. of sec. 34.
 Descend 10 ft., over E. slope.

40.30 Road from Showlow to Taylor, brs. N. and S.

43.50 Barb wire fence brs. N. and S.

43.60 Telephone line, brs. N. 20° W. and S. 20° E.

45.00 Shallow draw, drains S. Ascend 150 ft., over W. slope.

55.80 Ascend over rocky rim, 30 ft. high.

56.20 Rim, brs. N. and S: Leave rolling land and scattering timber, and enter level land and thick timber.

75.20 Leave level and enter rolling land. Descend 46 ft. over E. slope.

80.17 (39.98 chs. S. 89° 04' E. from $\frac{1}{4}$ sec. cor. of secs. 3 and 34). Intersect the original cor. of secs. 2, 3, 34 and 35, which is a basalt stone 40 x 20 x 6 ins., marked with 2 notches on E. and 4 notches on W. face; set in a mound of stone, and witnessed by the two orig-

Resurvey of South bdy. of Township 11 North, Range 21 East. 11.

Chains

inal bearing trees, described as follows:
 A yellow pine, 20 ins. in diam., N. 86° E., 29 lks. dist., marked "T11N R21E S35 BT."
 A cedar, 40 ins. in diam., N. 30° W., 140 lks. dist., marked "T11N R21E S34 BT."

Reestablish this cor. as follows: Alongside the old stone, set an iron post, 3 ft. long, 2 ins. in diam., on bed rock, above a cross (X) cut in rock, supported by a mound of stone 5 ft. base, and 3 ft. high, for reestablished cor. of secs. 2, 3, 34 and 35, with brass cap, marked:




In addition to the original bearing trees described above, establish new bearing trees as follows:

- On a cedar, 6 ins. in diam., N. 45½° W., 238 lks. dist., mark "T11N R21E S34 BT."
- On a cedar, 8 ins. in diam., S. 65½° W., 33 lks. dist., mark "T10N R21E S3 BT."

No other tree available SE. of cor.
 Land, rolling, and level.
 Soil, rocky, 3rd and 4th rate.
 Undergrowth, scattering scrub cedar, pinon and oak.
 Timber, cedar, pinon and very scattering yellow pine.
 Fair grass.

East, on a true line, on S. bdy. of sec. 35.
 Over level land, thru thick timber and scattering undergrowth.


- 1.50 Rim of Showlow Canyon, brs. N. and S. Leave level and enter broken land. Descend 152 ft. over boulder strewn E. slope.
- 3.75 Barb wire fence, brs. N. and S.
- 8.15 Showlow Creek, 100 lks. wide, with stream of water, 30 lks. wide, 6 ins. deep, course NNE.
Ascend 230 ft. over rocky W. slope.
- 23.50 East rim of canyon, bears NW. and SE. Leave broken land; thence over level land.
- 39.56 Intersect the original ¼ sec. cor. of secs. 2 and 35, which is a basalt stone 22 x 12 x 7 ins., marked "¼" on N. face, set in a small mound of stone, and witnessed by the original bearing trees, described as follows:
 A cedar, 18 ins. in diam., S. 40° E., 56 lks. dist., marked "¼ S BT."
 A cedar, 18 ins. in diam., S. 31° W., 40 lks. dist., marked "¼ S BT."
 Reestablish this cor. as follows: Reset old stone, 16 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished ¼ sec. cor. of sec. 2 only, with brass cap, marked:



Change markings on each of original bearing trees to read "¼ S BT 2".

Thence,
 N. 89° 40' E., on true line, continuing measurement of S. bdy. of sec. 35. Over level land.

- 39.94 (Midpoint). Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for reestablished ¼ sec. cor. of sec. 35 only, with brass cap, marked



12. Resurvey of South bdy. of Township 11 North, Range 21 East.

Chains from which:

60.00 A cedar, 8 ins. in diam., brs. N. 60° W., 107
lks. dist., mark "1/4 S 35 BT."
79.88 Gulch, 30 lks. wide, 10 ft. deep, course NW.
(40.32 chs. N. 89° 40' E. from 1/4 sec. cor. of sec. 2).
Intersect the original cor. of secs. 1, 2, 35 and 36,
which is a basalt stone 32 x 18 x 6 ins., marked with
1 notch on E. face, and 5 notches on W. face, set in
a small mound of stone. No trace of old accessory.
Reestablish this cor. as follows:
Reset old stone, 24 ins. in the ground, and alongside
same, set an iron post 3 ft. long, 2 ins. in diam., 24
ins. in the ground, for reestablished cor. of secs.
1, 2, 35 and 36, with brass cap, marked:

T 11 N	R 21 E
S 35	S 36
S 2	S 1
T 10 N	
1920	

from which:

A cedar, 18 ins. in diam., brs. N. 57° W., 223
lks. dist., mark "T11N R21E S35 BT."
A cedar, 12 ins. in diam., brs. N. 34° E., 255
lks. dist., mark "T11N R21E S36 BT."
A cedar, 8 ins. in diam., brs. S. 58° E., 53 lks.
dist., mark "T10N R21E S 1 BT."
A cedar, 12 ins. in diam., brs. S. 49° W., 215
lks. dist., mark "T10N R21E S2 BT."

Land, level and broken.
Soil, rocky, 4th rate.
Undergrowth, scrub cedar and pinon.
Timber, cedar, pinon and scattering yellow pine.
Fair grass.

40.15 N. 89° 47' E., on true line, on S. bdy. of sec. 36.
Over level land, thru thick timber and undergrowth.
Intersect original 1/4 sec. cor. of secs. 1 and 36, which
is a basalt stone, 14 x 12 x 8 ins. above ground, firm-
ly set, marked "1/4" on N. face, and witnessed by mound
of stone N. of cor. and the two original bearing trees
described as follows:

A pinon, 10 ins. in diam., N. 22 1/2° E., 44 lks.
dist., marked "1/4 S BT".
A pinon, 10 ins. in diam., S. 77 1/2° E., 29 lks.
dist., marked "1/4 S BT".

Reestablish this cor. as follows: Alongside old stone,
set an iron post, 3 ft. long, 1 in. in diam., 26 ins.
in the ground, for reestablished 1/4 sec. cor. of sec. 1
only, with brass cap, marked:

1/4 S 1
1920

Change marking on SE. bearing tree to read: "1/4 S BT 1.",
and establish a new bearing tree as follows:
On a cedar, 16 ins. in diam., S. 61° W., 41 lks.
dist., mark "1/4 S 1 BT."

Thence,

40.21 N. 89° 44' E. on true line, continuing measurement of
S. bdy. of sec. 36.
(Midpoint). Set an iron post, 3 ft. long, 1 in. in diam.,
26 ins. in the ground, for the reestablished 1/4 sec.
cor. of sec. 36 only, with brass cap, marked:

1/4 S 36
1920

from which,

A cedar, 14 ins. in diam., brs. N. 40° E., 31 lks. dist.


Resurvey of South bdy. of Township 11 North, Range 21 East. 13.

Chains
80.42

mark "1/4 S 36 BT."
(40.27 chs. N. 89° 44' E. from 1/4 sec. cor. of sec. 1).
Intersect the original cor. of Ts. 10 and 11 N., Rs. 21 and 22 E., established by O. D. Wheeler, U. S. D. S. in 1882, which is a basalt stone 8 x 8 x 8 ins. above ground, firmly set, marked with 6 notches on each of N., S., E., and W., faces, and witnessed by a mound of stone, W. of cor. and the four original bearing trees described as follows:

- A cedar, 14 ins. in diam., N. 66° W., 82 lks. dist., marked "T11N R21E S36 BT."
- A cedar, 24 ins. in diam., N. 8° E., 58 lks. dist., marked "T11N R22E S31 BT."
- A cedar, 18 ins. in diam., S. 81° E., 38 lks. dist., marked "T10N R22E S6 BT."
- A cedar, 22 ins. in diam., S. 66° W., 43 lks. dist., marked "T10N R21E S1 BT."

Reestablish this cor. as follows: Alongside old stone, set an iron post, 3 ft. long, 3 ins. in diam., 24 ins. in the ground for reestablished cor. of Ts. 10 and 11 N., Rs. 21 and 22 E., with brass cap, marked.

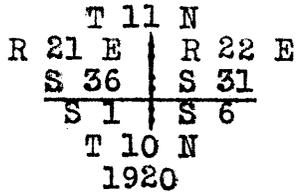

Destroy old mound of stone, W. of cor.
 Leave original bearing trees undisturbed.
 Land, level.
 Soil, rocky, 4th rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar, pinon and scattering yellow pine.
 Fair grass.

Chains.

Retracement for Resurvey.

This township bdy. was surveyed in 1882 by O.D. Wheeler, U.S. D.S., and no subsequent retracement or resurvey of same is of record.

From the reestablished cor. of Ts. 10 and 11 N., Rs. 21 and 22 E., hereinbefore described,

North, on a random line on S. $\frac{1}{2}$ of W. bdy. of sec. 36, T. 11 N., R. 22 E.

40.23 Fall 5 lks. E. of the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.

True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 36 are therefore, N. 0° 04' W., 40.23 chs.

Thence,

North, on a random line on N. $\frac{1}{2}$ of W. bdy. of sec. 36.

40.05 Fall 7 lks. W. of original cor. of secs. 25, 30, 31 and 36, hereinafter described.

True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 36 are therefore N. 0° 06' E., 40.05 chs.

North, on a random line on S. $\frac{1}{2}$ of W. bdy. of sec. 30.

40.00 Fall 18 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, hereinafter described.

True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 30 are therefore N. 0° 15' E., 40.00 chs.

Thence,

North, on a random line, on N. $\frac{1}{2}$ of W. bdy. of sec. 30.

40.35 Fall 12 lks. E. of the cor. of secs. 19, 24, 25 and 30, hereinafter described.

True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 30 are therefore N. 0° 10' W., 40.35 chs.

North, on a random line on S. $\frac{1}{2}$ of W. bdy. of sec. 19.

41.52 Fall 16 lks. W. of the original point of location of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, hereinafter described.

True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 19 are therefore N. 0° 14' E., 41.52 chs.

Thence,

North, on a random line, on N. $\frac{1}{2}$ of W. bdy. of sec. 19.

40.30 Fall 14 lks. E. of the original cor. of secs. 13, 18, 19 and 24, hereinafter described.

True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 19 are therefore N. 0° 12' W., 40.30 chs.

North, on a random line, on S. $\frac{1}{2}$ of W. bdy. of sec. 18.

40.78 Fall 23 lks. E. of the original point of location of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, hereinafter described.

True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 18 are therefore, N. 0° 20' W., 40.78 chs.

Thence,

North, on a random line, on N. $\frac{1}{2}$ of W. bdy. of sec. 18.

40.81 Fall 11 lks. E. of the original cor. of secs. 7, 12, 13 and 18, hereinafter described.

True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 18 are therefore N. 0° 09' W., 40.81 chs.

North, on a random line on S. $\frac{1}{2}$ of W. bdy. of sec. 7.

40.81 Fall 23 lks. E. of the original point of location of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, hereinafter described.

True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 7, are therefore N. 0° 20' W., 40.81 chs.

Thence,

North, on a random line, on N. $\frac{1}{2}$ of W. bdy. of sec. 7.

40.97 Fall 15 lks. W. of the original cor. of secs. 1, 6, 7 and 12,

16 Resurvey of the East bdy. of Township 11 North, Range 21 East.

Chains.


hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 7 are therefore N. 0° 13' E., 40.97 chs.

40.71 North, on a random line, on S. $\frac{1}{2}$ of W. bdy. of sec. 1. Fall 14 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described.
True course and dist. of S. $\frac{1}{2}$ of W. bdy. of sec. 1 are therefore N. 0° 12' W., 40.71 chs.

41.54 Thence, North, on a random line, on N. $\frac{1}{2}$ of W. bdy. of sec. 6. Fall 138 lks. W. of the cor. of Tp. 11 N., Rs. 21 and 22, hereinafter described.
True course and dist. of N. $\frac{1}{2}$ of W. bdy. of sec. 6 are therefore, N. 1° 54' E., 41.56 chs.

RESURVEY.


40.23 From the reestablished cor. of Ts. 10 and 11 N., Rs. 21 and 22 E., hereinbefore described, N. 0° 04' W. on true line, on E. bdy. of sec. 36. Over level land, thru. thick timber and undergrowth. Intersect the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a basalt stone, 20x16x10 ins. above ground, firmly set, marked " $\frac{1}{4}$ " on W. face, and witnessed by a mound of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor. Reestablish this cor. as follows. Alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 31 and 36, with brass cap, marked



In addition to the mound of stone, W. of cor., establish bearing trees as follows:

- On a cedar, 18 ins. in diam., N. 22° E., 63 lks. dist., mark " $\frac{1}{4}$ S 31 BT."
- On a cedar, 8 ins. in diam., S. 80° W., 66 lks. dist., mark " $\frac{1}{4}$ S 36 BT."

80.28 Thence, N. 0° 06' E., on a true line, continuing measurement of E. bdy. of sec. 36. (40.05 chs, N. 0° 6' E. from $\frac{1}{4}$ sec. cor. of secs. 31 and 36), intersect the original cor. of secs. 25, 30, 31 and 36, which is a basalt stone, 14x8x7 ins. above ground, firmly set, marked with 1 notch on S. face, and 5 notches on N. face, and witnessed by mound of stone W. of cor. Reestablish this cor. as follows: Alongside old stone, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 25, 30, 31 and 36; with brass cap, marked



In addition to the mound of stone W. of cor., establish bearing trees as follows:

- On a cedar, 2 1/2 ins. in diam., N. 11° W., 57 lks. dist., mark "T11N R21E S25 BT."

Resurvey of East bdy. of Township 11 North, Range 21 East.


Chains.

- On a cedar, 24 ins. in diam., N.69°E., 24 lks. dist., mark "T11N R22E S 30 BT."
- On a cedar, 40 ins. in diam., S.73°E., 10 lks. dist., mark "T11N R22E S 31 BT."
- On a cedar, 14 ins. in diam., S.70°W., 31 lks. dist., mark "T11N R21 E S 36 BT."

Land, level.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Fair grass.

40.00

N.0° 15'E., on true line, on E. bdy. of sec. 25.
 Over gently rolling land, thru. thick timber and scattering undergrowth.
 Intersect the original 1/4 sec. cor. of secs. 25 and 30, which is a basalt stone, 15x10x8 ins. above ground, firmly set, marked "1/4" on W. face, and witnessed by a mound of stone 3 ft. base, 1 1/2 ft. high, W. of cor.
 Reestablish this cor. as follows: Alongside old stone set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 25 and 30, with brass cap, marked



In addition to the mound of stone, W. of cor. establish bearing tree as follows:
 On a cedar, 8 ins. in diam., N.22°E., 60 lks. dist., mark "1/4 S 30 BT."
 On a cedar, 9 ins. in diam., S.70°W., 25 lks. dist., marked "1/4 S 25 BT."

44.00

Thence N.0° 10'W. on a true line, continuing measurement of E. bdy. of sec. 25.
 Over rolling land.
 Rocky rim, 10 ft. high, brs. NW. and SE. Descend 91 ft. over N. slope, Leave timber, brs. NW. and SE.

50.00


Across large dry basin, draining east.

70.00

Leave basin; ascend 45 ft., over SE. slope.

80.00

Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 24 and 25, only, with brass cap, marked



from which,
 A cedar, 20 ins. in diam., brs. N.81°W., 175 lks. dist., mark T11N R21E S24 BT."
 A cedar, 8 ins. in diam., brs. S.7°W., 244 lks. dist., mark "T11N R21E S25 BT."

Land, rolling.
 Soil, rocky, 3rd and 4th rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Fair grass.


.35

N.0°10'W., on a true line on E. bdy. of sec. 24.
 Over rolling land.
 Ascend 56 ft., over open SE. slope.
 (40.35 chs. N.0°10'W. from 1/4 sec. cor. of secs. 25 and 30,)

18 Resurvey of the E. bdy. of Township 11 North Range 21 East.

Chains.


Intersect cross (x) on top of a basalt boulder, exposed 50x24x30 ins. above ground, marked with 2 notches S. of cross and 4 notches N. of cross. No accessories. This is a much larger stone than is recorded as monumenting this cor., but as no trace of any stone answering the record description can be found in the vicinity, accept this stone as being in proper position for the original cor. of secs. 19, 24, 25 and 30. Reestablish this cor. as follows: Alongside this boulder, an iron post 3 ft. long, 2 ins. in diam., on bed rock, supported by a mound of stone 4 ft. base, 3 ft. high, for reestablished cor. of secs. 19 and 30 only, with brass cap, marked



from which,
A cedar, 8 ins. in diam., brs. N. 21° E., 170 lks. dist., mark "T11N R22E S19 BT."


And raise a mound of stone 3 ft. base, 2 ft. high, E. of cor. Thence, N. 0° 14' E., on true line, continuing measurement of E. bdy. of sec. 24.

- 8.85 Enter thick timber, brs. E. and W.
- 20.35 Divide brs. E. and W. Begin descent over very gradual NW slope.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 24 only, with brass cap, marked



from which,
A cedar, 16 ins. in diam., brs. S. 42° W., 77 lks. dist., mark " $\frac{1}{4}$ S 24 BT."

- 41.87 (41.52 chs. N. 0° 14' E., from cor. of secs. 19 and 30) Intersect the original point of location of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, determined by reference to the original accessories which consist of a mound of stone, W. of cor. and one bearing tree, described as follows:
A cedar, 16 ins. in diam., S. 57° E., 67 lks. dist., marked " $\frac{1}{4}$ S BT."
- No trace of the original SW. bearing tree can be found. The original cor. monument, a malpais stone, 20x11x10 ins., marked " $\frac{1}{4}$ " is lying on the ground at cor. point. Reestablish the cor. as follows: Reset the old stone, 15 ins. in the ground, and alongside same set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 19 only, marked



Change the marking on the bearing tree to read " $\frac{1}{4}$ S BT 19". Destroy the mound of stone W. of cor., and raise a new mound of stone, 3 ft. base, 2 ft. high, E. of cor. Thence, N. 0° 12' W., on true line, continuing measurement of E. bdy. of sec. 24.

- 80.00 Descend 33 ft., over NW slope. Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 19 and 24.

Recovery of E. bdy of Township 11 North Range 21 East. 19

Chains.

with brass cap, marked

T11N	R11N
S13	

S24	S22E
R21E	S19
1920	

from which,
 A cedar, 18 ins. in diam., brs. N. 42° W., 237 lks. dist., mark "T11N R21E S13 BT."
 A cedar, 20 ins. in diam., bears S. 44° W., 153 lks. dist., mark "T11N R21E S24 BT."

Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon, and very scattering yellow pine.
 Fair grass.

2.17

N. 0° 12' W., on a true line; on E. bdy. of sec. 13.
 Over gently rolling land, thru. thick undergrowth and scattering timber.
 (40.30 chs. N. 0° 12' W. from $\frac{1}{4}$ sec. cor. of sec. 19), Intersect the original cor. of secs. 13, 18, 19 and 24, which is a basalt stone 15x10x6 ins. above ground, firmly set, marked with 3 notches on N. and S. faces, and witnessed by mound of stone, W. of cor., & the 3 original bearing trees described as follows:

- A cedar, 18 ins. in diam., S. 46° E., 57 lks. dist., marked "T11N R22E S 19 BT."
- A cedar, 20 ins. in diam., S. 65° W., 90 lks. dist., marked "T11N R21E S24 BT."
- A cedar (dead) 18 ins. in diam., N. 51° E., 77 lks. dist., marked "T11N R22E S18 BT."

Reestablish this cor. as follows: An iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 18 and 19 only with brass cap, marked

T11N	T11N
	S18
R21E	

S13	S19
	R22E
1920	

Destroy the old mound of stone, W. of cor., and marking on old SW. bearing tree. In addition to the original bearing tree, establish a new bearing tree as follows:
 On a cedar, 8 ins. in diam., N. 57° E., 100 lks. dist., mark "T11N R22E S18 BT."

40.00

Thence,
 N. 0° 20' W., on true line, continuing measurement of E. bdy. of sec. 13.
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 13 only, with brass cap, marked

	$\frac{1}{4}$
S13	

1920	


42.95

from which,
 A cedar, 10 ins. in diam., brs. N. 39° W., 154 lks. dist., marked " $\frac{1}{4}$ S 13 BT."
 (40.78 chs. N. 0° 20' W. from cor. of secs. 18 and 19), Intersect the original point of location of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, determined by reference to the original accessories consisting of a mound of stone, W. of cor., and bearing tree described as follows:
 A cedar, 16 ins. in diam., S. 58° W., 132 lks. dist., marked " $\frac{1}{4}$ S B T."

20. Resurvey of East Bdy. of Township 11 North, Range 21 East

Chains.

The original cor. monument, a basalt stone, 16x12x9 ins., marked "1/4" is lying on the ground at cor. point. Reestablish this cor. as follows: Reset the old stone, 11 ins. in the ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 18 only, with brass cap, marked



Destroy old mound of stone, and establish a new bearing tree, described as follows:

On a cedar, 18 ins. in diam., S. 47 1/2° E., 246 lks. dist., mark "1/4 S 18 BT."


There being no other tree available E. of line, retain the old SW. bearing tree as accessory.

Thence, N. 10° 09' W., on true line, continuing measurement of E. bdy. of sec. 13.

67.47
80.00

Dim road, brs. E. and W.

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 12 and 13 only, with brass cap, marked



from which,

A cedar, 10 ins. in diam., bears N. 48° W., 261 lks. dist., mark "T11N R21E S12 BT."

A cedar, 8 ins. in diam., brs. S. 31° W., 58 lks. dist., mark "T11N R21E S13 BT."

Land, rolling gently.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon.

Fair grass.

3.76


N. 0° 9' W., on true line, on E. bdy. of sec. 12.

Over level land, thru. scattering timber and undergrowth. (40.81 chs. N. 0° 9' W. from 1/4 sec. cor. of sec. 18), intersect the original cor. of secs. 7, 12, 13 and 18, which is a basalt stone 17x11x9 ins. above ground, firmly set, marked with 2 notches on N. face, and 4 notches on S. face, and witnessed by mound of stone, W. of cor., and the two original bearing trees as follows:

A dead pinon, 12 ins. in diam., N. 45° W., 75 lks. dist., marked "T11N R21E S12 BT.", and

A cedar, 14 ins. in diam., S. 52° W., 105 lks. dist., marked "T11N R21E S13 BT."

Reestablish this cor. as follows: Alongside old stone set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 7 and 18 only with brass cap, marked



Destroy the old mound of stone, and marking on the old bearing trees, and establish new bearing trees as follows:


On a cedar, 20 ins. in diam., N. 35 1/2° E., 133 lks.

Resurvey of East bdy. of Township 11 North, Range 21 East. 21

Chains.

dist., mark "T11N R22E S7 BT.", and
On a cedar, 6 ins. in diam., S. 27° E., 60 lks.
dist., mark "T11N R22E S12 BT."

Thence
N. 0° 20' W., on a true line, continuing measurement of E. bdy.
of sec. 12.
3.86 Fence cor. from which fences extend E. and N. 20° E.
17.26 Head of draw, course NE.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for reestablished 1/4 sec. cor. of sec. 12 only,
with brass cap, marked




from which,
A pinon, 12 ins. in diam., brs. S. 12° W., 59 lks.
dist., mark "1/4 S 12 BT."
44.57 (40.81 chs. N. 0° 20' W. from cor. of secs. 7 and 18, determin-
ed by reference to the original accessory consisting
of a mound of stone, W. of cor.
The original cor. monument, a basalt stone, 16x14x8 ins.,
marked "1/4" is lying on the ground at cor. point. From
cor. point,

A cedar, 20 ins. in diam., brs. S. 50° W., 128 lks.
dist., marked "1/2 S BT."

This bearing tree does not appear in original
record.

Reestablish this cor. as follows: Reset old stone, 11
ins. in the ground, and alongside same set an iron
post 3 ft. long, 1 in. in diam., 26 ins. in the ground
for reestablished 1/4 sec. cor. of sec. 7 only, with brass
cap, marked



Destroy old mound of stone, and establish bearing tree
as follows:

On a pinon, 12 ins. in diam., S. 34° E., 148 lks. dist.,
mark "1/4 S 7 BT."


There being no other tree available E. of line, retain the
old SW. bearing tree as accessory.

Thence,
N. 0° 13' E., on true line, continuing measurement of E.
bdy. of sec. 12. Over rolling land.
51.06 Descend 29 ft., over NE. slope; leave timber and under-
growth.

56.56 Enter shallow draw, course ESE.; thence across same.
67.50 Leave draw; ascend 29 ft., over SW. slope.

79.76 Ridge brs. NW. and ESE. Thence over flat top of same.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for reestablished cor. of secs. 1 and 12
only, with brass cap, marked




Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Land, level and rolling.
Soil, stony, 3rd rate.
Undergrowth, scrub cedar and pinon.
Timber, cedar and pinon.
Fair grass.

22 Resurvey of East bdy. of Township 11 North, Range 21 East.


Chains.

5.54 N.0°13'E. on true line, on east boundary of sec. 1. Over rolling land, thru scattering timber & undergrowth. (40.97 chs. N.0°13'E., from 1/4 sec. cor. of sec. 7), Intersect the original cor. of secs. 1, 6, 7 and 12, which is a basalt stone 18x12x6 ins., marked with 1 notch on N. face, and 5 notches on S. face, loosely set in mound of stone. No trace of old mound of stone described in record as the only accessory to this cor. Reestablish this cor. as follows: Destroy mound of stone, reset old stone, 12 ins. in the ground, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 6 and 7 only, with brass cap, marked




Raise a mound of stone, 4 ft. base, 2 ft. high, E. of cor. Thence, N.0°12'W., on true line, continuing measurement of E. bdy. of sec. 1.

7.06 Barb wire fence, brs. E. and W.
 20.54 Enter thick timber, brs. E. and W.
 Descend 120 ft., over ENE. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 1 only, with brass cap, marked



from which,
 A cedar, 12 ins. in diam., brs. S.7° W., 34 lks. dist., mark "1/4 S 1 BT." (40.71 chs. N.0° 12'W. from cor. of secs. 6 and 7), Intersect the original 1/4 sec. cor. of secs. 1 and 6, which is a basalt stone, 12x10x8 ins. above ground, firmly set, marked "1/4" on W. face, and witnessed by the original accessories, consisting of a mound of stone, W. of cor. and two bearing trees, described as follows:
 A cedar, 12 ins. in diam., S.79°E., 44 lks. dist., marked "1/4 S BT." and
 A cedar, 12 ins. in diam., S.6°W., 33 lks. dist., marked "1/4 S BT."

46.25 Reestablish this cor. as follows: Alongside old stone, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 6 only, with brass cap, marked



Destroy old mound of stone, and change marking on SE. bearing tree to read: ("1/4 SBT 6") There being no other tree available E. of line, retain the old SW. bearing tree as accessory.


Thence, N.1°54'E. on a true line, continuing measurement of E. bdy. of sec. 1.

Descend 208 ft., over NE. slope.
 56.54 Leave thick, and enter scattering timber.
 57.74 Telephone line, bears N.35°W. and S.35°E.
 63.34 Road, Showlow to Shumway, brs. NW. and SE.
 87.81 (41.56 chs. N.1°54'E. from 1/4 sec. cor. of sec. 6.) Intersect the original cor. of T's. 11 N., Rs. 21 and 22 E.

Chains

on south boundary of Township 12 North, Range 22 East, which is a sandstone, 12 x 6 x 5 ins. above ground, firmly set, marked with 6 notches on each of N., S., E., and W. faces. No trace of original accessories, on record as pits and mound of earth, can be found. This cor. was established in 1882, by O. D. Wheeler, U. S. D. S. as cor. of Ts. 11 and 12 N., Rs. 21 and 22 E., which was an error, as cor., with such designation had been established in 1879, by John L. Harris, U. S. D. S. at a point about 60 chs. SW. In 1883, M. N. Grant, U. S. D. S. completed the survey of the S. bdy. of T. 12 N., R. 22 E., by surveying said line west, 48.65 chs. from said Wheeler cor. to a closing on E. bdy. of T. 12 N., R. 21 E., at a point 33.95 chs. N. from the Harris cor. of Ts. 11 and 12 N., Rs. 21 and 22 E., such survey resulting in a change in the designation of the Harris cor. to SE. cor. of T. 12 N., R. 21 E. only, and of the Wheeler cor. to cor. of Ts. 11 N., Rs. 21 and 22 E., though no change of marking or accessory to either cor. is on record. The Wheeler cor. is recorded by Grant as a wood post in mound of stone witnessed by four bearing trees, but no such cor. can be found.

Reestablish this cor. as follows: Alongside old stone, set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in the ground, for reestablished cor. of Ts. 11 N., Rs. 21 and 22 E., with brass cap, marked:

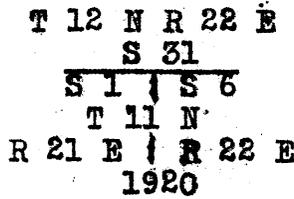

Dig pits, 18 x 18 x 12 ins., S., E., and W., of cor., 3 ft. dist.

From this cor:

House of E. J. Solomon, bears N. 60° W., about 10 chs. dist.

House of Chas. Whipple, bears S. 40° E., about 3 chs. dist.


Land, rolling.

Soil, sandy and rocky, 2nd and 3rd rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar and pinon.

Fair grass.

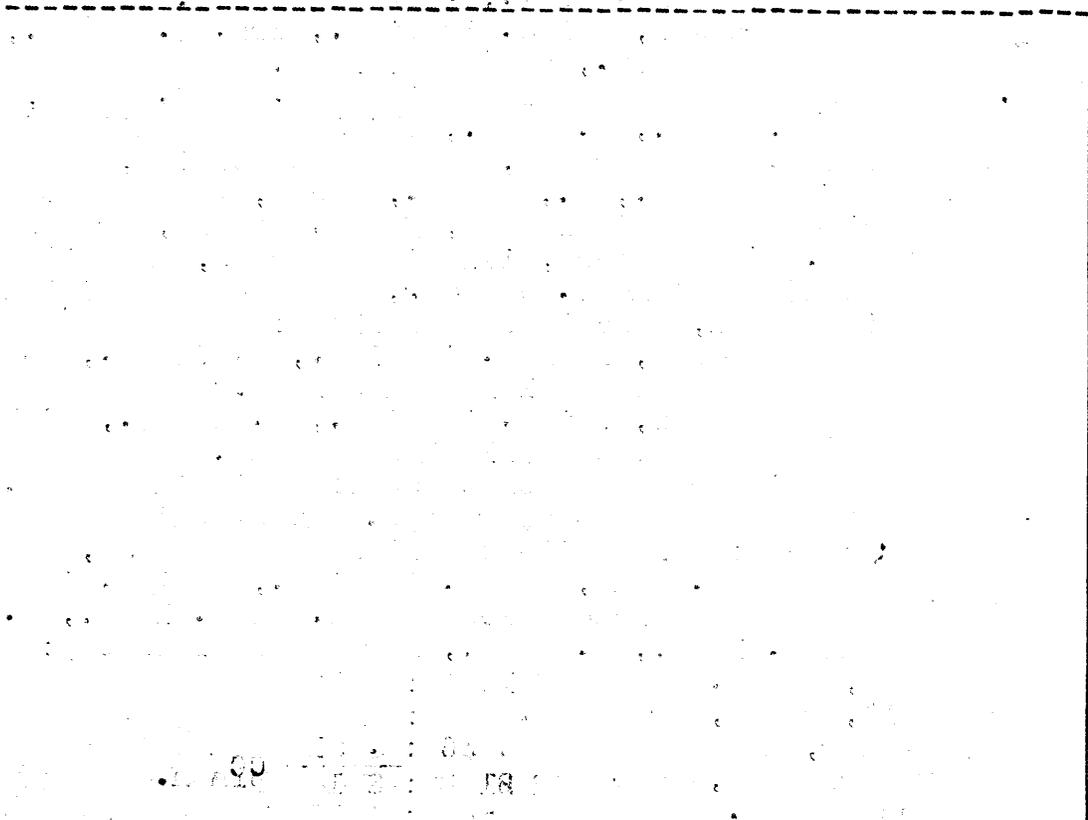

Chains

Retracement for Resurvey.

This line was surveyed in 1883 by M. N. Grant, U. S. D. S. as completion of S. bdy. of T. 12 N., R. 22 E., and no subsequent retracements of resurvey of same is on record.

From the reestablished cor. of Ts. 11 N., Rs. 21 and 22 E., hereinbefore described.

West, on a random line, bet. secs. 1 and 31, T. 11 N., R. 21 E., and T. 12 N., R. 22 E.

40.00 Set temp. $\frac{1}{4}$ sec. cor. of sec. 1.

48.24 Fall 42 lks. S. of the original closing cor. of T. 11 N., R. 21 E., and T. 12 N., R. 22 E., hereinafter described.

True course and dist. of that portion of S. bdy. of T. 12 N., R. 22 E. which lies N. of sec. 1, T. 11 N., R. 21 E., are therefore N. 89° 30' W., 48.24 chs.

RESURVEY.

From the reestablished cor. of Ts. 11 N., Rs. 21 and 22 E., hereinbefore described.

N. 89° 30' W., on a true line, bet. secs. 1 and 31, T. 11 N., R. 21 E., and T. 12 N., R. 22 E.

Over level land, thru scattering undergrowth.

8.30 Wash, 15 lks. wide, 3 ft. deep, course N.

12.70 Road from Showlow to Shumway, brs. N. 10° W, and S. 10° E.

15.00 Telephone line, brs. N. 30° W. and S. 30° E.

18.00 Enter thick timber and undergrowth, brs. NE. and SW.

Leave level and enter rolling land; ascend 267 ft., over E. slope.

23.50 Rim of mesa, brs. NE. and SW. Leave rolling and enter level, stony land on top of mesa.

41.17 (Computed easting of 40.00 chs. from closing cor. of secs. 1 and 2, T. 11 N., R. 21 E. hereinafter described, or a point due north from $\frac{1}{4}$ sec. cor. of secs. 1 and 12, T. 11 N., R. 21 E.)

Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, supported by a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor. of sec. 1 only, with brass cap, marked:

$\frac{1}{4}$ S 1
1920

from which,

A cedar, 11 ins. in diam., brs. S. 82 $\frac{1}{2}$ ° E., 47 lks. dist., mark " $\frac{1}{4}$ S 1 BT."

A cedar, 7 ins. in diam., brs. S. 59° W., 59 lks. dist., mark " $\frac{1}{4}$ S 1 BT."

48.24 Intersect the original closing cor. of T. 11 N., R. 21 E., and T. 12 N., R. 22 E., which is a basalt stone, 8 x 4 x 6 ins. above ground, marked "CC" on top, and 6 notches on each of N., S., and E., faces, firmly set alongside an old cedar post, 3 ins. square, projecting 24 ins. above ground, illegibly marked, and witnessed by mound of stone W. of cor., and the two original bearing trees, described as follows:

A cedar, 12 ins. in diam., N. 60° W., 46 lks. dist. marked "T12N R22E S31 BT."

A cedar, 9 ins. in diam., S. 80° E., 16 lks. dist., marked "T11N R22 E S6 BT."

The markings on both of these trees is incorrect. The wood post is not of record. Reestablish this cor. as follows: Alongside of old stone and post, set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished closing cor. of T. 11 N., R. 21 E., and T. 12 N., R. 22 E., marked on brass cap:

T 12 N	T 12 N
R 22 E	R 22 E
S 31	S 31
S 1	S 1
T 11 N	T 11 N

1920

Resurvey of part of S. bdy. of Township 12 North, Range 21 East. 31

Chains Timber, cedar and pinon.
Poor grass.

S. 89° 31' W., on a true line, on E. $\frac{1}{2}$ of S. bdy. of sec. 34.
Over level land, thru scattering timber and undergrowth.

3.00 Enter thick timber.

13.50 Rim of Showlow Canyon, brs. NW. and SE. Leave level and enter mountainous land; desc. 141 ft., over broken SW. slope, into said canyon.

17.90 Showlow Creek with running water, 1 ch. wide, and 6 ins. deep, course N. 80° W. Thence along N. slope, near bottom of Showlow Canyon.

18.30 Mouth of Burton Draw, from SW. Ascend 67 ft., over N. slope in Showlow Canyon.

30.65 (80.44 chs. westing from closing cor. of secs. 2 and 3). established as hereinafter described.

Intersect closing cor. of secs. 3 and 4, T. 11 N., R. 21 E., established as hereinafter described.

36.00 Rim of Showlow Canyon, brs. NW. and SE. Leave mountainous land and Showlow Canyon, enter rolling land.

40.06 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a decayed cedar post, 3 ins. sq., projecting 2 ft. above ground, firmly set in ground, and in mound of stone, faintly marked " $\frac{1}{4}$ S" on N. face, and witnessed by the original bearing trees described as follows:

- A pinon, 20 ins. in diam., N. 60° E., 35 lks. dist., marked " $\frac{1}{4}$ S B T."
- A pinon, 20 ins. in diam., S. 75° E., 38 lks. dist., marked " $\frac{1}{4}$ S B T."

Reestablish this cor. as follows: Alongside old wood post, and in same mound of stone, set an iron post 3 ft. long, 1 in. in diam., on bed rock, for reestablished $\frac{1}{4}$ sec. cor. of sec. 34 only, with brass cap, marked:

$\frac{1}{4}$ S 34
1920

In addition to the original bearing trees, establish a new bearing tree as follows:
On a pinon, 14 ins. in diam., N. 63 $\frac{1}{2}$ ° E., 36 lks. dist., mark " $\frac{1}{4}$ S 34 B T."

Change marking on the original NE. bearing tree to read " $\frac{1}{4}$ S BT 34."

Thence,
S. 89° 33' W., on true line, on W. $\frac{1}{2}$ of S. bdy. of sec. 34.
Over rolling land, thru thick timber and undergrowth.
Descend 5 ft.

2.30 Ravine, 10 lks. wide, course NE. Ascend 55 ft., over east slope.

7.00 Top of ascent, brs. N. and S. Thence over gently rolling N. slope. Descend 70 ft. to cor. of secs. 33 and 34.

10.00 Rail fence brs. ENE. and SW.

26.80 Wood road, brs. N. and S.

30.82 (Midpoint of N. bdy. of sec. 4, T. 11 N., R. 21 E.). Set an iron post, 3 ft. long, 1 in. in diam., 5 ins. in the ground to bed rock, supported by a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 4 only, with brass cap, marked:

$\frac{1}{4}$ S 4
1920

- From which
- A cedar 5 ins. in diam. brs. S. 25 $\frac{1}{2}$ ° W., 328 lks. dist., mark " $\frac{1}{4}$ S 4 BT."
 - A cedar 4 ins. in diam. brs. S 36 $\frac{1}{4}$ ° E., 61 lks. dist., mark " $\frac{1}{4}$ S 4 BT."

38.35 Brush fence, brs. NE. and S.

32. Resurvey of part of South bdy. of Township 12 North, Range 21 East.

Chains

40.17

Intersect the original cor. of secs. 3, 4, 33 and 34, which is a cedar post 3 ins. square, projecting 2 ft. above ground, firmly set in ground, and in a mound of stone. Post is marked "T12N R21E S34" on NE. face; "T11 N R21E S3" on SE. face, "4" on SW. face, "33" on NW. face, and 3 notches on each of E. and W. edges, and witnessed by the original bearing tree, described as follows:

A cedar, 30 ins. in diam., S. 25° W., 40 lks. dist., marked "T11N R21E S4 BT."

The numbers of the markings on post and bearing tree are scribed in Roman numerals.

Reestablish this cor. as follows: Alongside old wood post, and in same mound of stone, set an iron post 3 ft. long, 2 ins. in diam., on bedrock, for reestablished cor. of secs. 33 and 34 only, with brass cap, marked:

T 12 N	R 21 E
S 33	S 34
T 11 N	R 21 E
S 4	
1920	

Destroy marking on SE. and SW. faces of old post, and on original bearing tree, and establish new bearing trees as follows:

On a cedar, 8 ins. in diam., N. 49½° W., 65 lks. dist., mark "T12N R21E S33 BT." and

On a pinon, 5 ins. in diam., N. 68° E., 32 lks. dist., mark "T12N R21E S34 BT."

Land, rolling and mountainous:

Soil, rocky, 4th rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar, pinon and scattering yellow pine.

Fair grass.

S. 88° 12' W., on true line on E.½ of S. bdy. of sec. 33. Over rolling land, thru thick timber and undergrowth.

.25 Rocky drain, 10 lks. wide, 6 ft. deep, course NE.

Ascend 54 ft. over NE. slope.

6.00 Spur, slopes N. Descend 53 ft. over NW. slope.

12.50 Road, brs. NE. and SW.

12.70 Draw, course NE. Ascend 41 ft. over N. slope.

18.00 Point of spur, slopes N. Descend 55 ft. over W. slope.

21.80 Draw, course NE. Ascend 95 ft. over SE. slope.

31.00 Spur, slopes N. 70° E. Descend 40 ft. over NW. slope.

30.89 Intersect closing cor. of secs. 4 and 5, T. 11 N., R. 21 E., hereinafter described.

39.75 Draw, course N. Road in draw, brs. NW. and SE.

40.86 Intersect point of original location of ¼ sec. cor. of secs. 4 and 33, determined by reference to the original bearing tree, described as follows:

A cedar, 30 ins. in diam., S. 60° W., 105 lks. dist., marked "¼ S BT."

Reestablish the cor. at original point as follows:

Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground, supported by a mound of stone, for reestablished ¼ sec. cor. of sec. 33 only, with brass cap, marked:

¼ S 33
1920

In addition to the original bearing tree, establish new bearing trees as follows:

On a pinon, 6 ins. in diam., N. 58½° W., 136 lks. dist., mark "¼ S 33 BT."

On a cedar 40 ins. in diam., N. 59° E., 164 lks. dist., mark "¼ S 33 BT."

Resurvey of part of S. bdy. of Township 12 North, Range 21 East. 33

- Chains No trace of the old cor. post, or pits and mound of earth described as accessory to same, can be found. Thence, N. 89° 47' W., on true line on W. 1/2 of S. bdy. of sec. 33. Over rolling and broken land, thru thick timber and undergrowth. Ascend 30 ft., over NE. slope.
- 1.00 Telephone line, brs. N. 10° W. and S. 10° E.
 - 5.00 Point of spur, slopes N. Descend 68 ft., over NW. slope.
 - 9.35 Road from Linden to Taylor, brs. N. 10° E. and S. 10° W.
 - 14.50 Bull Ranch Draw, 30 lks. wide, 3 ft. deep, course NE. from S. At a point about 100 lks. S. this draw is joined by the Bull Hollow wash from the SW. Ascend 40 ft., over S. slope.
 - 23.00 Point of spur, slopes SE. Descend 28 ft., over SW. slope.
 - 27.00 Draw, course SE. Ascend 85 ft., over NE. slope to cor. of secs. 32 and 33.
 - 30.22 (Midpoint of N. bdy. of sec. 5, T. 11 N., R. 21 E.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished 1/2 sec. cor. of sec. 5 only, with brass cap, marked:

1/4 S 5
1920

from which

- A cedar, 12 ins. in diam., brs. S. 28 1/2° W., 236 lks. dist., mark "1/4 S 5 BT."
- A cedar 4 ins. in diam., brs. S. 45 3/4° E., 124 lks. dist., mark "1/4 S 5 BT."
- 40.47 Intersect the original cor. of secs. 4, 5, 32 and 33, which is a cedar post, 3 ins. square, projecting 3 ft. above ground, firmly set in the ground, marked "T12 N R21E S33" on NE. face; "4" on SE. face, "T11N R21E S5" on SW. face, "32" on NW. face, 4 notches on E. edge and 2 notches on W. edge, and witnessed by two bearing trees, described as follows:
 - A cedar, 20 ins. in diam., S. 40° E., 20 lks. dist., marked "T11N R21E S4 BT." and
 - A pinon, 20 ins. in diam., S. 20° W., 45 lks. dist., marked "T11N R21E S5 BT."

The numbers on the markings on the post and bearing trees are scribed in Roman numerals. The courses and distances to these bearing trees differ to a very great extent from the record, but no other marked trees can be found, and no trace of the pits and mound of earth is visible.

Reestablish this cor. as follows: Alongside old wood post set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 32 and 33 only, with brass cap, marked:

T 12 N		R 21 E
S 32		S 33

T 11 N		R 21 E
S 5		
1920		

Destroy marking on SE. and SW. faces of old post, and on the old bearing trees, and establish new bearing trees as follows:

- On a pinon, 12 ins. in diam., N. 67° W., 88 lks. dist., mark "T12N R21E S32 BT."
- On a cedar, 6 ins. in diam., N. 34° E., 115 lks. dist., mark "T12N R21E S33 BT."

Land, rolling and broken.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon and oak.
 Timber, cedar and pinon.
 Fair grass.

34 Resurvey of part of S. bdy. of Township 12 North, Range 21 East.

Chains N. 89° 38' W., on true line, on E. $\frac{1}{2}$ of S. bdy. of sec. 32.
 Over rolling land, thru thick timber and undergrowth.
 Ascend 40 ft., over SE. slope.
 10.00 Spur, slopes NE. Descend 15 ft., over NW. slope.
 13.75 Gulch, 15 lks. wide, course NE. Ascend 57 ft., over E. slope.
 29.95 Intersect closing cor. of secs. 5 and 6, T. 11 N., R. 21 E., hereinafter described.
 33.00 Ridge, brs. NE. and SW. Road on same, brs. NE. and SW.
 40.18 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is a cedar post, 3 ins. square, projecting 3 ft. above ground, firmly set in a mound of stone, marked " $\frac{1}{4}$ S" on N. face, and witnessed by the original bearing tree described as follows:
 A dead pinon, east 13 lks. dist., marked " $\frac{1}{4}$ S BT."
 There is no visible remains of the pits described in record as accessory to this cor.
 Reestablish this cor. as follows: Alongside old wood post, and in same mound of stone, set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 32 only, with brass cap, marked:

$\frac{1}{4}$ S 32
1920

In addition to old bearing tree, establish new bearing tree as follows:

On a cedar, 12 ins. in diam., N. 55° E., 23 lks. dist., mark " $\frac{1}{4}$ S 32 BT."

No other tree is available N. of line for which reason the marking on the old tree is left untouched.

Thence,

N. 89° 38' W., on true line, on W. $\frac{1}{2}$ of S. bdy. of sec. 32.

Over rolling land, thru thick timber and undergrowth.
 Descend 28 ft., over NW. slope.

8.60 Shallow draw, course NE. Ascend 111 ft. over E. slope.

9.60 Old road, brs. NE. and SW.

29.00 Main ridge, brs. N. and S. Descend 52 ft. over W. slope, to

29.75 (40.00 chs. westing from closing cor. of secs. 5 and 6, T. 11 N., R. 21 E.)

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, over cross (x) on bedrock, supported by a mound of stone, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap, marked:

$\frac{1}{4}$ S 6
1920

from which:

A cedar, 13 ins. in diam., brs. S. 42° W., 23 lks. dist., mark " $\frac{1}{4}$ S 6 BT."

34.00 Road, from Pinedale to Taylor, brs. N. 10° E., and S. 10° W

39.40 Shallow draw, course N. Ascend 10 ft., over E. slope to

40.09 Intersect the original cor. of secs. 5, 6, 31 and 32, which is a cedar post, 3 ins. square, projecting 3 ft. above ground, firmly set in ground, and in a mound of stone: post is marked "T12N R21E S32" on NE. face, "5" on SE. face, "T11N R21E S6" on SW. face; "31" on NW. face, and 1 notch on W. edge, and 5 notches on E. edge, and witnessed by one of the original bearing trees described as follows:

A pinon, 14 ins. in diam., S. 26 $\frac{1}{2}$ ° W., 43 lks. dist., marked "T11N R21E S6 BT."

The charred stamp, where the original SE. bearing tree has been burned, brs. S. 40° E., 22 lks. dist.

The numbers on the old post and bearing tree are scribed in Roman numerals.

Reestablish this cor. as follows: Alongside old wood

Resurvey of part of S. bdy. of Township 12 North, Range 22 East. 25

Chains Destroy mound of stone, W. of cor., and marking on old NW. bearing tree; change marking on old SE. bearing tree to read: "T11N R21E S1 CC BT.", and establish new bearing trees as follows:

On a cedar 6 ins. in diam., N. $20\frac{1}{2}^{\circ}$ E., 104 lks. dist., mark "CC T12N R22E S31 BT."

On a cedar, 8 ins. in diam., S. 48° E., 103 lks. dist., mark "CC T11N R21E S1 BT."

This closing cor. was erroneously designated in the notes describing its establishment in 1883 as "closing cor. to Ts. 11 and 12 N., R. 22 E."

Land, level and rolling.

Soil, sandy and rocky, 2nd and 3rd rate.

Undergrowth, scrub cedar and pinon and oak.

Timber, cedar and pinon.

Poor grass.

Chains This township boundary was surveyed in 1879 by John L. Harris, U. S. D. S. and no retracement or resurvey of the same is of record.

Retracement for Resurvey.

From the reestablished SE. cor. of T. 12 N., R. 21 E., hereinafter described:

North, on a random line on S. $\frac{1}{2}$ of E. bdy. of sec. 36.
33.85 Intersect the closing cor. of Ts. 11 N., R. 21 E., and T. 12 N., R. 22 E., hereinbefore described.

40.26 Fall 4 lks. W. of the original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a mesquite post, 3 ft. long, 3 ins. square, loosely set, marked " $\frac{1}{4}$ S" on W. face, witnessed by one bearing tree, a cedar limb, 4 ins. in diam., S. $3\frac{1}{2}^{\circ}$ W., 15 lks. dist., marked " $\frac{1}{4}$ S BT."

Alongside of the old post, set a malpais stone, 16 x 10 x 7 ins., 12 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 36 only, marked " $\frac{1}{4}$ S-36" on W. face.

Change marking on original bearing tree to read " $\frac{1}{4}$ S BT 36", and establish a new bearing tree as follows:

On a cedar, 10 ins. in diam., S. $49\frac{1}{2}^{\circ}$ W., 48 lks. dist., mark " $\frac{1}{4}$ S 36 BT."

True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore S. $0^{\circ} 3'$ W., 40.26 chs.

Resurvey.

From reestablished $\frac{1}{4}$ sec. cor. of sec. 36, described above:
S. $0^{\circ} 3'$ W., on true line on S. $\frac{1}{2}$ of E. bdy. of sec. 36.

Over level top of mesa, thru dense timber and undergrowth.

6.41 Intersect the closing cor. of Ts. 11 N., R. 21 E., and T. 12 N., R. 22 E., hereinbefore described.

Continue line and measurement.

Over level top of mesa, thru dense timber and undergrowth.

40.26 Intersect the reestablished SE. cor. of T. 12 N., R. 21 E., hereinafter described.

Land, level.

Soil, rocky, 3rd rate.

Timber, dense cedar and pinon.

Undergrowth, dense scrub cedar and pinon.

Poor grass.

Resurvey of part of South bdy. of Township 12 North, Range 21 E. 27

Chains This township bdy. was surveyed in 1879 by John L. Harris, U. S. D. S., and no retracement or resurvey of the same is of record.

Retracement for Resurvey.

From the original cor. of Ts. 11 & 12 N., Rs. 21 and 22 E., hereinafter described.

40.26 West, on a random line on E. 1/2 of S. bdy. of sec. 36. Fall 8 lks. N. of the original 1/4 sec. cor. of secs. 1 and 36, hereinafter described.

True course and dist. of E. 1/2 of S. bdy. of sec. 36 are therefore, S. 89° 53' W., 40.26 chs.

Thence,

40.28 West, on random line, on W. 1/2 of S. bdy. of sec. 36. Fall 42 lks. N. of original cor. of secs. 1, 2, 35 and 36, hereinafter described.

True course and dist. of W. 1/2 of S. bdy. of sec. 36 are therefore S. 89° 24' W., 40.28 chs.

41.81 West, on a random line, on E. 1/2 of S. bdy. of sec. 35. Fall 87 lks. S. of original 1/4 sec. cor. of secs. 2 and 35, hereinafter described.

True course and dist. of E. 1/2 of S. bdy. of sec. 35, are therefore N. 88° 48' W., 41.82 chs.

Thence,

40.33 West, on a random line, on W. 1/2 of S. bdy. of sec. 35. Fall 36 lks. N. of original cor. of secs. 2, 3, 34 and 35, hereinafter described.

True course and dist. of W. 1/2 of S. bdy. of sec. 35 are therefore S. 89° 29' W., 40.33 chs.

40.06 West, on a random line, on E. half of S. bdy. of sec. 34. Fall 34 lks. N. of original 1/4 sec. cor. of secs. 3 and 34, hereinafter described.

True course and dist. of E. 1/2 of S. bdy. of sec. 34 are therefore S. 89° 31' W., 40.06 chs.

Thence,

40.17 West, on random line, on W. 1/2 of S. bdy. of sec. 34. Fall 31 lks. N. of original cor. of secs. 3, 4, 33 and 34, hereinafter described.

True course and dist. of W. 1/2 of S. bdy. of sec. 34 are therefore, S. 89° 33' W., 40.17 chs.

40.83 West, on random line, on E. 1/2 of S. bdy. of sec. 33. Fall 127 lks. N. of point of original location of 1/4 sec. cor. of secs. 4 and 33, hereinafter described.

True course and dist. of E. 1/2 of S. bdy. of sec. 33 are therefore S. 88° 12' W., 40.85 chs.

Thence,

40.47 West, on random line, on W. 1/2 of S. bdy. of sec. 33. Fall 15 lks. S. of original cor. of secs. 4, 5, 32 and 33, hereinafter described.

True course and dist. of W. 1/2 of S. bdy. of sec. 33, are therefore N. 89° 47' W., 40.47 chs.

40.18 West, on random line, on E. 1/2 of S. bdy. of sec. 32. Fall 26 lks. S. of original 1/4 sec. cor. of secs. 5 and 32, hereinafter described.

True course and dist. of E. 1/2 of S. bdy. of sec. 32 are therefore, N. 89° 38' W., 40.18 chs.

Thence,

40.09 West on random line on W. 1/2 of S. bdy. of sec. 32. Fall 25 lks. S. of original cor. of secs. 5, 6, 31 and 32, hereinafter described.

True course and dist. of W. 1/2 of S. bdy. of Sec. 32 are therefore N. 89° 38' W., 40.09 chs.

28 Resurvey of part of South bdy. of Township 12 North, Range 21 E.

- Chains Thence,
 West, on random line, on E. $\frac{1}{2}$ of S. bdy. of sec. 31.
 28.80 Fall 14 lks. S. of original closing cor. of Ts. 11 N.,
 Rs. 20 and 21 E., established in 1883 by A. E. Shoemaker,
 U. S. D. S., and hereinafter described.
 True course of Tp. bdy. from cor. of secs. 31 and 32 to
 this closing cor. are therefore N. $89^{\circ} 43' W.$
 Continue line and measurement.
 40.16 Fall 20 lks. S. of the original $\frac{1}{2}$ sec. cor. of secs. 6 and
 31, hereinafter described.
 True course and dist. of E. $\frac{1}{2}$ of S. bdy. of sec. 31 are
 therefore N. $89^{\circ} 43' W.$, 40.16 chs.

RESURVEY.

The original cor. of Ts. 11 and 12 N., Rs. 21 and 22 E.,
 now designated as SE. cor. of T. 12 N., R. 21 E., only,
 is a cedar post 6 ins. square, projecting 28 ins.
 above ground, surrounded by mound of stone. Post is
 marked "T12N R21E S36" on NW. face, and "T12N R22E
 S31" on NE. face. The marking on the SE. and SW. faces
 is obliterated by decay.

Cor. is witnessed by three of the original bearing trees
 as follows:

A cedar, 24 ins. in diam., N. $82^{\circ} E.$, 64 lks.
 dist., marked "T12N R22E S31 BT."

A cedar, 24 ins. in diam., S. $36^{\circ} E.$, 56 lks. dist.
 marked "T11N R22E S6 BT."

A cedar, 17 ins. in diam., S. $12^{\circ} W.$, 60 lks.
 dist., marked "T11N R21E S1 BT."

No trace of the original NW. bearing tree.

The numbers in the markings on post and bearing trees
 are in Roman numerals. Reestablish this cor. as fol-
 lows:

Alongside old post, set an iron post, 3 ft. long, 3 ins.
 in diam., on bedrock, supported by a mound of stone,
 4 ft. base, 3 ft. high, for reestablished cor. of T.
 12 N., R. 21 E. (SE. cor) only, with brass cap, marked:

T 12 N
 R 21 E
 S 36
 T 11 N:R 21 E
 S 1
 1920

Obliterate marking on NE. face. of old post, and on the
 old bearing trees and establish a new bearing tree as
 follows:

On a cedar, 20 ins. in diam., N. $38^{\circ} W.$, 132 lks.
 dist.; mark "T12N R21E S36 BT."

Thence,

S. $89^{\circ} 53' W.$, on true line, on E. half of S. bdy. of
 sec. 36.

Over slightly rolling land, on top of mesa, thru thick
 timber and undergrowth.

- 20.00 Rim of mesa; brs. NW. and SE. Leave top of mesa; descend
 40 ft., over SW. slope.

- 30.40 Road from Shumway to Linden, brs. N. $25^{\circ} E.$, and S. $25^{\circ} W.$

- 30.60 Wash, 10 lks. wide, course S. Ascend 48 ft. over SE. slope.

- 32.89 Point of intersection of the Sectional Guide Meridian
 surveyed due North, thru T. 11 N., R. 21 E., as here-
 inafter described, and at which point closing cor. of
 secs. 1 and 2, is established.

- 40.26 Intersect the original $\frac{1}{2}$ sec. cor. of secs. 1 and 36,
 which is a cedar post, 3 ins. square, projecting 2 ft.
 above ground, firmly set in ground and in a mound of
 stone, marked " $\frac{1}{2}$ S" on N. face, and witnessed by the
 original bearing tree, described as follows:
 A cedar, 10 ins. in diam., S. $85^{\circ} E.$, 10 lks.
 dist., marked " $\frac{1}{2}$ S BT."

Resurvey of part of S. bdy. of Township 12 North, Range 21 East. 29

Chains This tree is corner to wire fence, extending S. 10° E. and west from same.
 Reestablish this cor. as follows: Alongside old wood post, and in same mound of stone, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap, marked:

$\frac{1}{4}$ S 36
1920

In addition to the original bearing tree, establish new bearing tree as follows:
 On a cedar, 20 ins. in diam., N. 54° E., 146 lks. dist., mark " $\frac{1}{4}$ S 36 BT."
 No other tree was available N. of line, for which reason the old bearing tree is retained as accessory.

- Thence,
 S. 89° 24' W., on true line, on W. $\frac{1}{2}$ of S. bdy. of sec. 36. Over rolling land, thru thick timber and undergrowth, parallel to fence 5 lks. S. of line. Ascend 17 ft., over east slope.
- 4.24 Spur, slopes S. Descend 103 ft., over W. slope.
 - 29.74 Foot of descent. Leave rolling and enter level land; leave thick timber and undergrowth, and enter land devoid of timber and undergrowth.
 - 32.63 (Midpoint of N. bdy. of sec. 2, T. 11 N., R. 21 E.) Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor. of sec. 2 only, with brass cap, marked:

$\frac{1}{4}$ S 2
1920

- 40.28 Raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor. Intersect the original cor. of secs. 1, 2, 35 and 36, which is a cedar post, 3 ins. square, projecting $3\frac{1}{2}$ ft. above ground, firmly set in a mound of stone; post marked with 1 notch on E. edge, and 5 notches on W. edge, and marking faintly visible on the faces, though illegible.
 No accessories to this cor. are recorded.
 Reestablish this cor. as follows: Alongside old wood post, and in same mound of stone, set an iron post 3 ft. long, 2 ins. in diam., on bed rock, for reestablished cor. of secs. 35 and 36 only, with brass cap, marked:

T 12 N | R 21 E
 S 35 | S 36
 T 11 N | R 21 E
 S 2
 1920

from which,
 A cedar, 12 ins. in diam., brs. N. 12° W., 280 lks. dist., mark "T12N R21E S35 BT."
 A cedar, 10 ins. in diam., brs. N. 77° E., 249 lks. dist., mark "T 12 N R 21E S36 BT."

This cor. is at fence cor. from which fences extend N., E., and W. The fence extending W. is a line of posts only.
 Land, rolling and level. Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Poor grass.

-
- 32.37 N. 88° 48' W., on true line, on E. $\frac{1}{2}$ of S. bdy. of sec. 35. Over level land, thru scattering timber and undergrowth, along line of fence posts. (00.01 chs. westing from closing cor. of secs. 1 and 2). Intersect the closing cor. of secs. 2 and 3, T. 11 N., R. 21 E., established as hereinafter described.

30 Resurvey of part of South bdy. of Township 12 North, Range 21 East

Chains

35.00 Leave level and enter rolling land. Desc. 35 ft. over W. slope.

41.82 Intersect the original 1/4 sec. cor. of secs. 2 and 35, which is a cedar post, 3 ins. square, 3 ft. above ground, firmly set in ground, and in a mound of stone, marked "1/4 S" on N. face, and witnessed by the original bearing tree described as follows:

A cedar, 20 ins. in diam., brs. S. 50° W., 120 lks. dist., marked "1/4 S BT."

Reestablish this cor. as follows: Alongside the old wood post, and in same mound of stone, set an iron post 3 ft. long, 1 in. in diam., 14 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 35 only, with brass cap marked:

1/4 S 35
1920

In addition to the original bearing tree, establish new bearing tree as follows:

On a pinon, 12 ins. in diam., N. 41 1/2° E., 12 lks. dist., mark "1/4 S 35 BT."

No other tree was available N. of line, for which reason the old bearing tree is retained as accessory.

Thence,

S. 89° 29' W., on true line on W. 1/2 of S. bdy. of sec. 35.

Over rolling land, thru scattering timber and undergrowth.

6.00 Old road, brs. N. 30° W. and S. 30° E.

30.76 (Midpoint of N. bdy. of sec. 3, T. 11 N., R. 21 E.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor. of sec. 3 only, with brass cap, marked:

1/4 S 3
1920

From which:

A cedar, 8 ins. in diam., brs. S. 43° W., 44 lks. dist., mark "1/4 S 3 BT."

A cedar, 6 ins. in diam., brs. S. 32 1/2° W., 88 lks. dist., mark "1/4 S 3 BT."

40.33 Intersect the original cor. of secs. 2, 3, 34 and 35, which is a cedar post, 3 ins. square, projecting 3 ft. above ground, firmly set in ground and in mound of stone. Post is marked "T12N R21E S35" on NE. face, "2" on SE. face, "T11N R21E S3" on SW. face; "34" on NW. face, 2 notches on E. edge, and 4 notches on W. edge.

No trace of the original bearing trees. The numbers in the marking on the post are scribed in Roman numerals.

Reestablish this cor. as follows: Alongside old wood post, and in same mound of stone, set an iron post, 3 ft. long, 2 ins. in diam., on bed rock, for reestablished cor. of secs. 34 and 35 only, with brass cap, marked:

T 12 N | R 21 E
S 34 | S 35
T 11 N R 21 E
S 3
1920

Obliterate marking on SW. face of old post, and establish bearing trees as follows:

On a cedar, 12 ins. in diam., N. 73° W., 48 lks. dist., mark "T11N R21E S34 BT."

On a cedar, 18 ins. in diam., N. 51° E., 60 lks. dist., mark "T11N R21 E S35 BT."

Land, level and rolling.

Soil, rocky, 3rd rate.

Undergrowth, thinly scattered scrub cedar and pinon.

Chains

post, and in same mound of stone, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground, for reestablished cor. of secs. 31 and 32 only, with brass cap, marked:

T 12 N	R 21 E
S 31	S 32
T 11 N R 21 E	
S 6	
1920	

Destroy marking on SE. and SW. faces of old post, and on old bearing tree, and establish new bearing trees, as follows:

On a cedar, 12 ins. in diam., N. 53° W., 43 lks. dist., mark "T12N R 21E S31 BT." and

On a cedar, 12 ins. in diam., N. 7° E., 25 lks. dist., mark "T12N R21E S32 BT."

Land, rolling.

Soil, rocky 3rd rate.

Undergrowth, scrub cedar and pinon, oakbrush.

Timber, cedar and pinon.

Fair grass.

N. 89° 43' W., on true line on E. $\frac{1}{2}$ of S. bdy. of sec. 31. Over rolling land, thru thick timber and undergrowth, along gently rolling N. slope.

28.80 Intersect original closing cor. of Ts. 11 N., R. 21 and 22 E., hereinafter described. Continue line and measurement.

40.16 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31, which is a cedar post 3 ins. square, projecting 3 ft. above ground, firmly set, marked " $\frac{1}{4}$ S" on N. face, and witnessed by the original bearing tree, described as follows:

A cedar, 24 ins. in diam., S. 79° W., 20 lks. dist., marked " $\frac{1}{4}$ S BT." This bearing tree is recorded in the notes of original survey as S. 88° E. There is no visible trace of the pits and mound of earth described in record as accessory to this cor.

Reestablish this cor. as follows: Alongside old wood post, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap, marked

$\frac{1}{4}$ S 31
1920.

In addition to the old bearing tree, establish new bearing tree, as follows:

On a cedar, 16 ins. in diam., N. 40° W., 27 lks. dist., mark " $\frac{1}{4}$ S 31 BT."

Old bearing tree is retained as accessory for the reason that no other tree N. of line is available.

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon.

Fair grass.

36 Resurvey of the West bdy. of Township 11 North, Range 21 East.

Chains	Retracement for Resurvey.
	<p>This Tp. bdy. was surveyed in 1883, by A. E. Shoemaker, U. S. D. S., and no retracement or resurvey of the same is of record.</p> <p>From reestablished cor. of Ts. 10 and 11 N., Rs. 20 and 21 E., hereinafter described.</p> <p>North, on a random line on S. $\frac{1}{2}$ of E. bdy. of sec. 36, T. 11 N., R. 20 E.</p>
39.80	<p>Fall 45 lks. E. of original point of location of $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore N. $0^{\circ} 39' W.$, 39.80 chs.</p> <p>Thence,</p> <p>North, on random line, on N. $\frac{1}{2}$ of E. bdy. of sec. 36.</p>
39.96	<p>Fall 25 lks. W. of original cor. of secs. 25, 30, 31 and 36, hereinafter described.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore N. $0^{\circ} 21' E.$, 39.96 chs.</p> <p>-----</p>
40.29	<p>North, on random line, on S. $\frac{1}{2}$ of E. bdy. of sec. 25.</p> <p>Fall 28 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, hereinafter described.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore N. $0^{\circ} 24' W.$, 40.29 chs.</p> <p>Thence,</p> <p>North, on random line, on N. $\frac{1}{2}$ of E. bdy. of sec. 25.</p>
39.30	<p>Fall 57 lks. W. of original point of location of the cor. of secs. 19, 24, 25 and 30, hereinafter described.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore N. $0^{\circ} 49' E.$, 39.30 chs.</p> <p>-----</p>
40.17	<p>North, on random line on S. $\frac{1}{2}$ of E. bdy. of sec. 24.</p> <p>Fall 16 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 19 and 24 hereinafter described.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore N. $0^{\circ} 14' W.$, 40.17 chs.</p> <p>Thence,</p> <p>North, on random line, on N. $\frac{1}{2}$ of E. bdy. of sec. 24.</p>
40.20	<p>Fall 9 lks. W. of original point of location of cor. of secs. 13, 18, 19 and 24, hereinafter described.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore N. $0^{\circ} 08' E.$, 40.20 chs.</p> <p>-----</p>
39.86	<p>North, on random line, on S. $\frac{1}{2}$ of E. bdy. of sec. 13.</p> <p>Fall 9 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, hereinafter described.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore N. $0^{\circ} 08' W.$, 39.86 chs.</p> <p>Thence,</p> <p>North on random line, on N. $\frac{1}{2}$ of E. bdy. of sec. 13.</p>
40.21	<p>Intersect original cor. of secs. 7, 12, 13 and 18, hereinafter described.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore North, 40.21 chs.</p> <p>-----</p>
39.98	<p>North, on random line, on S. $\frac{1}{2}$ of E. bdy. of sec. 12.</p> <p>Fall 17 lks. E. of original $\frac{1}{4}$ sec. cor. of secs. 7 and 12 hereinafter described.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore N. $0^{\circ} 15' W.$, 39.98 chs.</p> <p>Thence,</p> <p>North, on random line, on N. $\frac{1}{2}$ of E. bdy. of sec. 12.</p>
40.05	<p>Fall 6 lks. W. of original cor. of secs. 1, 6, 7 and 12, hereinafter described.</p>

Chains

True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore N. $0^{\circ}05'$ E., 40.05 chs.

40.25 North, on random line on S. $\frac{1}{2}$ of E. bdy. of sec. 1. Fall 10 lks. W. of original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described. True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore N. $0^{\circ}09'$ E., 40.25 chs.

14.75 Thence, North, on a random line, on N. $\frac{1}{2}$ of E. bdy. of sec. 1. Fall 5 lks. W. of original closing cor. of Ts. 11 N., Rs. 20 and 21 E., hereinafter described. True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 1, are therefore N. $0^{\circ}11'$ E., 14.75 chs.

RESURVEY.

From reestablished cor. of Ts. 10 and 11 N., Rs. 20 and 21 E., hereinbefore described, N. $0^{\circ}39'$ W., on true line, on W. bdy. of sec. 31. Over rolling land, thru. thick timber and undergrowth. Ascend 23 ft., over west slope.

6.50 Sp. r., slopes SE. Descend 40 ft., over E. slope.

20.00 Head of draw, course SE. Ascend 15 ft., over S. slope.

29.50 Main ridge, brs. E. and W. Descend 52 ft., over NW. slope to $\frac{1}{4}$ sec. cor.

32.40 Old road, brs. NW. and SE.

39.80 Intersect original point of location of $\frac{1}{4}$ sec. cor. of secs. 31 and 36, determined by reference to the original bearing trees, described as follows:

- A pinon, 14 ins. in diam., N. 74° W., 90 lks. dist., marked " $\frac{1}{4}$ SBT."
- A pinon, 12 ins. in diam., S. $50\frac{1}{2}^{\circ}$ E., 88 lks. dist., marked " $\frac{1}{4}$ S BT."

No trace of the other record accessories consisting of pits and mound of earth. The original stone cor. monument is lying on the ground at cor. point, and is a sandstone $16 \times 12 \times 6$ ins., marked " $\frac{1}{4}$ " on one face. Reestablish this cor. as follows: Reset the original stone 11 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished cor. of secs. 31 and 36, with brass cap, marked



In addition to the original bearing trees, establish new bearing trees as follows:

- On a cedar, 10 ins. in diam., N. 39° W., 52 lks. dist., mark " $\frac{1}{4}$ S36 BT."
- On a pinon, 8 ins. in diam., N. $63\frac{1}{2}^{\circ}$ E., 36 lks. dist., mark " $\frac{1}{4}$ S 31 BT."

Thence, N. $0^{\circ}21'$ E. on true line, continuing measurement of W. bdy. of sec. 31.

Descend 97 ft., over NW. slope.

52.00 Across opening.

62.00 Shallow draw, course NE.

63.00 Enter timber, brs. NE. and SW.

79.76 (39.96 chs. N. $0^{\circ}21'$ E. from $\frac{1}{4}$ sec. cor. of secs. 31 and 36), Intersect original cor. of secs. 25, 30, 31 and 36, which is a cedar post in poor state of preservation, marks and notches being almost obliterated by decay. Post is firmly set in a mound of earth and stone, and witnessed by two bearing trees, described as follows:

38 Resurvey of West bdy. of Township 11 North, Range 21 East.


Chains.

A cedar, 50 ins. in diam., N. 43° E., 136 lks. dist., marked "T11N R21E S30 BT." and

A cedar, 40 ins. in diam., S. 10° W., 140 lks. dist., marked "T11N R20E S36 BT."

The bearings of these trees agree with record, but the distances differ to a great extent. No trace of the pits is visible.

Reestablish this cor. as follows: Alongside the old wood post, set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 25, 30, 31 and 36, with brass cap, marked



In addition to the original bearing trees, establish new bearing trees as follows:

On a pinon, 12 ins. in diam., N. 34 1/4° W., 260 lks. dist., mark T11N R20E S25 BT.

On a cedar, 14 ins. in diam., S. 76 1/4° E., 2120 lks. dist., mark T11N R21E S31 BT.

Land, rolling.

Soil, sandy and rocky, 2nd and 3rd rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar, pinon and scattering yellow pine.

Fair grass.

N. 0° 24' W., on a true line, on W. bdy. of sec. 30.

Over rolling land, thru. scattering timber and undergrowth. Descend 51 ft., over N. slope.


1.90 Fence cor. from which fence lines extend N., E. and W. Road brs. S., E. and N. Thece along fence and road.

16.50 Wash, 30 lks. wide, course S. 70° E. Ascend 46 ft., over S. slope.

25.00 Enter thick timber, brs. E. and W.

39.94 (Midpoint of W. bdy. of sec. 30.) Under fence bearing N. and S.

Set an iron post 3 ft. long, 1 in. in diam., 12 ins. in the ground, supported by mound of stone, for reestablished 1/4 sec. cor. of sec. 30, with brass cap, marked



from which,

A pinon, 12 ins. in diam., brs. N. 22° E., 75 lks. dist. This tree is one of the original bearing trees to the 1/4 sec. cor. of secs. 25 and 30, and is marked "S BT."

Change marking on this tree to read "1/4 S BT 30".

40.29 Intersect original 1/4 sec. cor. of secs. 25 and 30, which is a flint stone 17x9x6 ins. marked "1/4" on W. face, firmly set in a mound of stone under fence bearing N. and S., and witnessed by the original bearing trees, described as follows:


A pinon, 12 ins. in diam., S. 74° W., 25 lks. dist., marked "1/4 S BT."

A pinon, 12 ins. in diam., N. 39° E., 44 lks. dist., originally marked "1/4 SBT." but changed as described above for accessory to 1/4 Sec. cor. of sec. 30 only.

Reestablish this cor. as follows: Alongside old stone, and in same mound of stone, set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground for reestablished 1/4 sec. cor. of sec. 25 only, with brass cap, marked

Resurvey of West bdy. of Township 11 North, Range 21 East.

Chains.



Change marking on the original SW. bearing tree to read "1/4 S BT 25" and establish a new bearing tree as follows:

On a pinon, 20 ins. in diam., S.34°W., 35 lks. dist., mark "1/4 S 25 BT."

Thence,

N.0° 49' E., on true line, continuing measurement, of W. bdy. of sec. 30. Along E. side of fence, bearing N. and S. Ascend 17 ft., over S. slope.

45.00

57.30

Spur, slopes NE. Descend 50 ft., over rolling E. slope.

Gulch, 15 lks. wide, 3 ft. deep, course NE.

Ascend 79 ft., over SE. slope.

75.30

79.59

Ridge, brs. NE. and SW. Descend over gradual N. slope.

(39.30 chs. N.0° 49' E. from 1/4 sec. cor. of sec. 25), Intersect point of original location of the cor. of secs. 19, 24, 25 and 30, determined by reference to the original bearing trees, described as follows:


A cedar, 12 ins. in diam., S. 12° E., 17 lks. dist., marked "T11N R21E S30 BT."

A cedar, 20 ins. in diam., N. 74° W., 50 lks. dist., marked "T11N R20E S24 BT."

A cedar, 12 ins. in diam., S. 52° W., 19 lks. dist., marked "T11N R20E S25 BT."

The original cor. monument, which is a cedar post 4 ins. square, 4 ft. long, marked on each face, and notched on each of the two edges is lying on the ground at cor. point. No trace of the old pits and mound of earth is visible.

Reestablish this cor. as follows: Reset the old wood post, 24 ins. in the ground, with 2 notches on S. edge, and 4 notches on N. edge, "T11NS19" on NE. face "R21E S30" on SE. face, "R20E S25" on SW. face, and "S24" on NW. face, and alongside old post set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 24 and 25 only, with brass cap, marked



Change marking on NE. face of old post to read "T11N"; obliterate marking on old S.E. bearing tree, and leave old NW. and SW. bearing trees as accessory to the re-established cor. From sec. cor., fence cor. brs. N. 17° W., 15 lks. dist., from which fences extend N. 10° E., W. and S.

Thence,

N.0° 14' W., on true line, continuing measurement of W. bdy. of sec. 30.

79.88

Intersect the closing cor. of secs. 19 and 30, hereinafter described in notes of survey of subdivision lines of T. 11 N., R. 21 E.

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon and oak.


Timber, cedar, pinon and scattering yellow pine.

Fair grass.

N.0° 14' W., on true line, on W. bdy. of sec. 19. Over rolling land, thru. thick timber and undergrowth. Descend 57 ft., over NE. slope.


40 Resurvey of West bdy. of township 11 North, Range 21 East.

Chains.
 16.70 Shallow draw, course NNE. Thence over nearly level bottom land.
 19.70 Leave thick timber and undergrowth, and enter open land.
 30.60 Barb wire fence, bears E. and W.
 31.50 Shallow draw, course NE. Thence over cultivated land.
 39.70 Leave cultivated land.
 39.88 (40.17 chs. N. 0°14' W., from cor. of secs. 24 and 25) Intersect original $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which is a sandstone 18x10x6 ins. above ground, firmly set in a mound of stone, marked " $\frac{1}{4}$ " on W. face. No trace of accessory described as mound of stone, W. of cor. Reestablish this cor. as follows; Reset old stone 12 ins. in ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 24 only, with brass cap, marked



from which,
 A cedar, 10 ins. in diam., brs. S. 52 $\frac{1}{2}$ ° W., 175 lks. dist., mark " $\frac{1}{4}$ S 24 BT."


Thence,
 N. 0°08' E., on true line, continuing measurement of W. bdy. of sec. 19.
 40.04 (Midpoint of W. bdy. of sec. 19), Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, supported by mound of stone for reestablished $\frac{1}{4}$ sec. cor. of sec. 19 only, with brass cap, marked



from which,
 A cedar, 40 ins. in diam., brs. E. 50° E., 51 lks. dist., mark " $\frac{1}{4}$ S 19 BT."

44.38 House of E.A. Reid head bears West 10 lks. dist.
 49.88 East end of corral, 40 ft. in diam.,
 57.73 Barb wire fence, bears N. 50° W. and S. 40° E.
 63.88 Low spur, slopes NE.
 68.18 Shallow draw, course NE.
 80.08 (40.20 chs. N. 0°08' E. from $\frac{1}{4}$ sec. cor. of sec. 24), Intersect point of original location of cor. of secs. 13, 18, 19 and 24, determined by reference to the original bearing trees described as follows:
 A cedar, 20 ins. in diam., N. 67° W., 15 lks. dist., marked "T11N R20E S13 BT."
 A cedar, 20 ins. in diam., N. 64° E., 38 lks. dist., marked "T11N R21E S18 BT."
 A cedar, 20 ins. in diam., S. 25° E., 60 lks. dist., marked "T11N R21E S19 BT."

No trace of old post, pits or mound of earth.
 Reestablish this cor. as follows: Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for reestablished cor. of secs. 13, 18, 19 and 24, with brass cap, marked



In addition to the original bearing trees, establish a new bearing tree as follows:
 On a cedar, 16 ins. in diam., S. 9 $\frac{1}{2}$ ° W., 161 lks. dist., mark "T11N R20E S24 BT."

Chains.

From sec. cor., fence cor. bears W. 15 lks. dist., from which fences extend W., N. and SE.
 Land, rolling.
 Soil in cultivated areas, sandy loam, 1st rate; elsewhere, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar, pinon, juniper, and very scattering yellow pine. Fair grass.

39.86

N. 0° 08' W., on true line, on W. bdy. of sec. 18.
 Over rolling land, thru. thick timber and scattering undergrowth, along E. side of fence, bearing N. and S.
 Descend 40 ft., over gradual N. slope, to
 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, which is a sandstone 24x18x8 ins., marked " $\frac{1}{4}$ " on W. face, firmly set in a mound of stone. No trace of mound of stone, W. of cor.
 Reestablish this cor. as follows: Reset old stone, 18 ins. in the ground, and alongside same, set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for re-established $\frac{1}{4}$ sec. cor. of secs. 13 and 18, with brass cap, marked



from which,
 A cedar, 16 ins. in diam., brs. N. 64 $\frac{1}{2}$ ° E., 68 lks. dist., mark " $\frac{1}{4}$ S 18 BT."
 A cedar, 14 ins. in diam., brs. S. 42 $\frac{3}{4}$ ° W., 83 lks. dist., mark " $\frac{1}{4}$ S 13 BT."

78.00
80.07

Thence,
 North, on true line, continuing measurement of W. bdy. of sec. 18. Along E. side of fence, bearing N. and S.
 Shallow draw, course NE.
 (40.21 chs. N. from $\frac{1}{4}$ sec. cor. of secs. 13 and 18), Intersect the original cor. of secs. 7, 12, 13 and 18, which is a sandstone, 27x12x10 ins., marked with 2 notches on N. face, and 4 notches on S. face, firmly set in a mound of stone. No trace of mound of stone, W. of cor.
 Reestablish this cor. as follows: Alongside old stone, and in same mound of stone, Set an iron post 3 ft. long, 2 ins. in diam., for re-established cor. of secs. 7, 12, 13 and 18, with brass cap, marked




from which,
 A cedar, 10 ins. in diam., brs. N. 46° W., 63 lks. dist., mark "T11N R20E S12 BT."
 A pinon, 15 ins. in diam., brs. S. 53 $\frac{1}{2}$ ° E., 18 lks. dist., mark "T11N R21E S18 BT."
 A pinon, 8 ins. in diam., brs. S. 73° W., 83 lks. dist., mark "T11N R20E S13 BT."
 A yellow pine, 24 ins. in diam., brs. N. 80° E., 100 lks. dist., mark "T11N R21E S7 BT."

Fence cor. brs. W. 10 lks. dist., from which fence extends W. and S.
 Soil, rocky, 3rd rate. Land, slightly rolling.
 Undergrowth, scrub cedar and pinon, and scattering scrub oak.
 Timber, cedar, pinyon and yellow pine.
 Fair grass.

48 Resurvey of West bdy. of Township 11 North, Range 21 East.


Chains.

N.0° 15' W., on true line, on W. bdy. of sec.7.
 Over gently rolling land, thru. thick timber and scattering undergrowth.
 Descend very gradual N.slope on low divide, sloping NW. and NE.
 6.20 Old road, brs.NW. and SE.
 38.00 Leave thick timber, brs.NE. and W. Thence thru. scattering timber and undergrowth.
 39.98 Intersect the original $\frac{1}{4}$ sec.cor. of secs.7 and 12. which is a sandstone, 14x10x6 ins. above ground, marked " $\frac{1}{4}$ " on W.face, firmly set in ground. No trace of pits and mound of earth.
 Reestablish this cor. as follows: Alongside old stone, set an iron post, 3 ft.long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ sec.cor. of secs.7 and 12, with brass cap, marked



from which,
 A cedar, 24 ins. in diam., brs.S.46 $\frac{1}{2}$ °E., 100 lks. dist., mark " $\frac{1}{4}$ S 7 BT."
 A pinon, 10 ins. in diam., brs.S.52°W., 25 lks. dist., mark " $\frac{1}{4}$ S12 BT."

Thence,
 N.0° 05' E., on true line, continuing measurement of W.bdy. of sec.7.
 Over rolling land.
 Descend 76 ft., over NW.slope.
 54.50 Dim road, brs.E. and W, At 1.00 ch. west, this road turns to SW.
 57.70 Rocky wash, 30 lks.wide, course NE. Ascend 98 ft., over S. slope.
 63.00 Enter thick timber, brs.E. and SW.
 65.00 Spur, slopes E. Descend 30 ft., over NE.slope.
 71.00 Head of gulch, course E. Ascend 75 ft. over SE.slope.
 75.00 ~~Spur slopes E. Descend 90 ft. over NE.slope.~~
 78.80 Rocky gulch, course SE. Ascend 90 ft., over SW.slope, to (40.05 chs. N.0° 5'E. from $\frac{1}{4}$ sec.cor.of secs. 7 and 12),
 80.03 Intersect the original cor. of secs. 1,6,7 and 12, which is a limestone, 20x12x8 ins, marked with 1 notch on N., face, and 5 notches on S.face, firmly set in a mound of stone. No trace of mound of stone, W.of cor.
 Reestablish this cor. as follows: Alongside old stone, and in same mound of stone set an iron post 3 ft.long, 2 ins. in diam., on bedrock, for reestablished cor.of secs. 1,6,7 and 12, with brass cap, marked




from which,
 A pinon, 12 ins. in diam., brs.N.28°W., 87 lks. dist., mark "T11N R20E S1 BT."
 A pinon, 14 ins. in diam., brs.N.5°E., 73 lks. dist., mark "T11N R21E S6 BT."
 Raise a mound of stone, 3 ft.base, and 1 $\frac{1}{2}$ ft.high, W.of cor.
 Land, rolling,
 Soil, rocky, 4th rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar and pinon, and very scattering yellow pine.
 Fair grass.

Resurvey of West bdy. of Township 11 North, Range 21 East. 43

Chains.

N.0°09'E., on a true line, on W. bdy. of sec. 6.
 Over rolling land, thru. thick timber and undergrowth.
 Ascend 37 ft., over rocky SW. slope.
 8.00 Ridge, brs. E. and W. Descend over gradual N. slope.
 14.70 Road from Pinedale to Taylor, brs. NE. and SW.
 40.25 Intersect the original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which
 is a sandstone 14x12x10 ins. above ground, marked "S1" on
 W. face, firmly set. No trace of old mound of stone, W.
 of cor.

Reestablish this cor. as follows: Alongside old stone,
 set an iron post, 3 ft. long, 1 in. in diam., 20 ins.
 in the ground, for reestablished $\frac{1}{4}$ sec. cor. of secs. 1
 and 6, with brass cap, marked




from which,
 A cedar, 10 ins. in diam., brs. N. 78° W., 63 lks.
 dist., mark "S 1 BT."
 A pinyon, 12 ins. in diam., brs. N. 61° E., 83 lks.
 dist., mark "S 6 BT."

Thence,
 N.0°11'E., on true line, continuing measurement of W. bdy.
 of sec. 6.

Over rolling land, thru. thick timber and undergrowth.
 Descend over very gradual N. slope.
 55.00 (14.75 chs. N.0°11'E., from $\frac{1}{4}$ sec. cor. of secs. 1 and 6),
 Intersect S. bdy. of T. 12 N., R. 21 E. at the closing cor.
 of Ts. 11 N., Rs. 20 and 21 E., monumented by a sandstone
 projecting 18x12x6 ins. above ground, firmly set, mark-
 ed with 6 notches on each of S., E. and W. faces. No
 accessories. This closing cor. is described in record
 as a wood post in mound of earth, with pits as access-
 ories. No trace of any corner answering to such de-
 scription being found in the vicinity, and as the
 resurvey of the S. bdy. of T. 12 N., R. 21 E., as here-
 inbefore described verifies the assumption that this
 stone is at the proper point for said closing cor.,
 the stone is accepted as marking the original position
 of the record closing corner.

Reestablish this cor. as follows: Alongside old stone,
 set an iron post 3 ft. long, 3 ins. in diam., 24 ins. in
 the ground for reestablished closing cor. of Ts. 11 N.,
 Rs. 20 and 21 E., with brass cap, marked

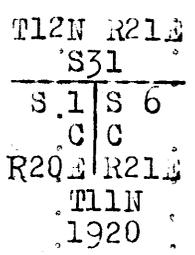

from which,
 A cedar, 8 ins. in diam., brs. S. 12° W., 19 lks.
 dist., mark "CC T11N R20E S1 BT."
 A cedar, 12 ins. in diam., brs. S. 43° E., 22 lks.
 dist., mark "CC T11N R21E S6 BT."

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
 Land, rolling.

Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinyon.
 Timber, cedar and pinyon, and very scattering yellow pine.
 Fair grass.

Boundaries of Township 11 North, Range 21 East.
 Latitudes, Departures, and Closing Errors.

Line designated,	True bearing.	Dist..	Latitudes.		Departures.	
			N.	S.	E.	W.
South boundary,	N. 89°39'E.	39.91	.24		39.99	
	N. 89°19'E.	39.59	.47		39.59	
	N. 89°20'E.	39.60	.46		39.60	
	S. 89°44'E.	39.98		.19	39.98	
	N. 89°50'E.	40.33	.12		40.33	
	East,	39.97			39.97	
	N. 89°51'E.	40.19	.10		40.19	
	S. 89°04'E.	39.98		.65	39.98	
	East,	39.56			39.56	
	N. 89°40'E.	40.33	.25		40.33	
	N. 89°47'E.	40.15	.15		40.15	
N. 89°44'E.	40.27	.19		40.27		
East boundary,	N. 0°04'W.	40.23	40.23			.05
	N. 0°06'E.	40.05	40.05		.07	
	N. 0°15'E.	40.00	40.00		.17	
	N. 0°10'W.	40.35	40.35			.12
	N. 0°14'E.	41.52	41.52		.17	
	N. 0°12'W.	40.30	40.30			.14
	N. 0°20'W.	40.78	40.78			.24
	N. 0°09'W.	40.81	40.81			.11
	N. 0°20'W.	40.81	40.81			.24
	N. 0°13'E.	40.97	40.97		.15	
	N. 0°12'W.	40.71	40.71			.14
N. 1°54'E.	41.56	41.54		1.38		
North boundary,	N. 89°30'W.	48.24	.42			48.24
	S. 0° 3'W.	33.85		33.85		.03
	S. 89°53'W.	40.26		.08		40.26
	S. 89°24'W.	40.28		.42		40.28
	N. 88°48'W.	41.82	.87			41.81
	S. 89°29'W.	40.33		.36		40.33
	S. 89°31'W.	40.06		.34		40.06
	S. 89°33'W.	40.17		.31		40.17
	S. 88°12'W.	40.85		1.28		40.83
	N. 89°47'W.	40.47	.15			40.47
	N. 89°38'W.	80.27	.51			80.27
N. 89°43'W.	28.80	.14			28.80	
West boundary,	S. 0°11'W.	14.75		14.75		.05
	S. 0°09'W.	40.25		40.25		.10
	S. 0°05'W.	40.05		40.05		.06
	S. 0°15'E.	39.98		39.98	.17	
	South,	40.21		40.21		
	S. 0°08'E.	39.86		39.86	.09	
	S. 0°08'W.	40.20		40.20		.09
	S. 0°14'E.	40.17		40.17	.16	
	S. 0°49'W.	39.30		39.30		.56
	S. 0°24'E.	40.29		40.29	.28	
	S. 0°21'W.	39.96		39.96		.24
S. 0°39'E.	39.80		39.80	.45		
Convergency,				0.50		
Totals,			492.12	492.80	483.03	483.69
				492.12		483.03
Error in latitude,				0.68		
Error in departure,						0.06

Survey of Subdivision of Township 11 North, Range 21 East.

Chains.

Preliminary to the subdivision of this township, survey a governing section line, from the cor. of secs. 25, 30, 31 and 36 on the East bdy. of the Tp., S. 89° 48' W., 400.00 chs., setting temp. 1/4 sec. and sec. cors. alternately at intervals of 40.00 chs. thereon.


The course of this line is obtained by calculation of the latitudes and departures of the boundary of the south tier of sections, based upon the resurvey of the E., W. and S. boundaries of the Tp., as hereinbefore described.

The positions of the permanent sec. cors. on said governing section line are then determined by the points of intersection therewith of the meridional section lines, which gives the true latitudinal intervals whereby the permanent 1/4 sec. cors. are established at midpoints between sec. cors.

40.43

From the reestablished cor. of secs. 1, 2, 35 and 36 on the South bdy. of the Tp., hereinbefore described, North, bet. secs. 35 and 36, on Sectional Guide Meridian, Over slightly rolling land, thru. thick timber and undergrowth. Descend 27 ft., over NW. slope, to (40.00 chs. south from intersection with governing sec. line),

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



from which,

A cedar, 4 ins. in diam., brs. N. 63° E., 41 lks. dist., mark "1/4 S 36 BT."

A cedar, 24 ins. in diam., brs. S. 73° W., 174 lks. dist., mark "1/4 S 35 BT."


75.40

Descend 34 ft., over NW. slope. Rocky ravine, 30 lks. wide, course west; ascend 17 ft., over south slope, to

80.43

Intersect Governing section line at 38 lks. S. 89° 48' W., from temp. cor. of secs. 25, 26, 35 and 36, At point of intersection,

Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap, marked.



from which,

A cedar, 24 ins. in diam., brs. N. 71° W., 16 lks. dist., mark "T11N R21E S26 BT."

A cedar, 20 ins. in diam., brs. N. 8° E., 75 lks. dist., mark "T11N R21E S25 BT."

A cedar, 8 ins. in diam., brs. S. 14° E., 83 lks. dist., mark "T11N R21E S36 BT."

A cedar, 8 ins. in diam., brs. S. 25° W., 60 lks. dist., mark "T11N R21E S35 BT."

Land, slightly rolling stony mesa, drains NW. into Showlow Creek.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar, pinon, and very scattering yellow pine.

Fair grass.

From the reestablished cor. of secs. 25, 30, 31 and 36, on East bdy. of the Tp., hereinbefore described,

46 Subdivision of Township 11 North, Range 21 East.

Chains.

40.19 S. 89° 48' W., on governing section line, bet. secs. 25 and 36. Over slightly rolling land, thru. thick timber and undergrowth.
Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$	S 25
	S 36
	1920

from which,
A cedar, 24 ins. in diam., brs. N. 8° W., 62 lks. dist., mark " $\frac{1}{4}$ S 25 BT."
A cedar, 8 ins. in diam., bears S. 50° W., 19 lks. dist., mark " $\frac{1}{4}$ S 36 BT."

56.00 Rocky ravine, 20 lks. wide, 10 ft. deep, course NW.
80.38 Intersect the cor. of secs. 25, 26, 35 and 36. Land, slightly rolling, stony mesa, malpais formation. Soil, rocky, 3rd rate. Undergrowth, scrub cedar, pinyon and oak. Timber, cedar, pinon, and very scattering yellow pine. Fair grass.

North, on Sectional Guide Meridian, bet. secs. 25 and 26. Over slightly rolling land, on top of mesa, thru. thick timber and undergrowth. Descend 54 ft., over gradual NW. slope, to


40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



from which,
A cedar, 12 ins. in diam., bears N. 84° W., 36 lks. dist., mark " $\frac{1}{4}$ S 26 BT."
A cedar, 8 ins. in diam., brs. S. 85° E., 57 lks. dist., mark " $\frac{1}{4}$ S 25 BT."

Descend 61 ft., over gradual N. slope.
59.50 South rim of gulch, brs. NW. and SE. Descend 43 ft., over steep rocky N. slope.
62.30 Gulch, 20 lks. wide, course NW. Ascend 65 ft., over rock S. slope.
73.50 North rim of gulch, brs. NW. and SE. Thence over level top of mesa.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap, marked



from which,
A cedar, 14 ins. in diam., brs. N. 89° W., 46 lks. dist., mark "T11N R21E S23 BT."
A cedar, 24 ins. in diam., brs. N. 70° E., 98 lks. dist., mark "T11N R21E S24 BT."
A cedar, 18 ins. in diam., brs. S. 17° E., 27 lks. dist., mark "T11N R21E S25 BT."
A cedar, 20 ins. in diam., brs. S. 71° W., 65 lks. dist., mark "T11N R21E S26 BT."


Land, rolling, broken and level.
Soil, rocky, 3rd rate.
undergrowth, scrub cedar, pinon and oak.
Timber, cedar, pinyon, and very scattering yellow pine.
Fair grass.

Subdivision of Township 11 North, Range 21 East.

BOOK 47

Chains


40.00 N. 89° 48' E., on a random line, bet. secs. 24 and 25.
 Set temp. 1/4 sec. cor.
 80.66 Intersect East bdy. of Tp., 11 lks. S. of the reestablished
 cor. of secs. 24 and 25, hereinbefore described.
 Thence,
 S. 89° 43' W., on true line, bet. secs. 24 and 25.
 Over rolling land, on top of mesa, thru. very scattering
 timber and undergrowth. Ascend 17 ft., over E. slope.
 5.00 Top of low ridge, bears N. and S., forming E. rim of a cir-
 cular basin. Descend 17 ft., over W. slope.
 17.00 Foot of descent. Enter nearly level, circular bottom of
 basin.
 23.00 Leave bottom of basin. Ascend 29 ft., over E. slope.
 30.00 Top of same low ridge, forming W. rim of said basin. Leave
 scattering timber and undergrowth, and enter thick
 timber and undergrowth. Descend 18 ft., over W. slope, to
 40.66 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for 1/4 sec. cor., with brass cap, marked



from which,
 A cedar, 18 ins. in diam., bears N. 55° E., 50 lks.
 dist., mark "1/4 S 24 BT."
 A cedar, 20 ins. in diam., bears S. 20° W., 40 lks.
 dist., mark "1/4 S 25 BT."


Continue over gently rolling top of mesa.
 80.66 Descend 70 ft., over west slope, to
 The cor. of secs. 23, 24, 25 and 26.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar, pinon, and very scattering yellow pine.
 Fair grass.

North, bet. secs. 23 and 24, on Sectional Guide Meridian.
 Over slightly rolling land on top of mesa, thru. thick
 timber and undergrowth.
 40.00 Descend 20 ft., over NW. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., with brass cap, marked



from which,
 A cedar, 5 ins. in diam., brs. S. 73° E., 27 lks. dist.,
 mark "1/4 S 24 BT."
 A cedar, 10 ins. in diam., brs. S. 27° W., 63 lks. dist.,
 mark "1/4 S 23 BT."

49.00 Rim of mesa, brs. NE. and SW. Leave slightly rolling top
 of mesa and thick timber and undergrowth, and enter
 rough rolling land, and scattering timber and under-
 growth. Descend 203 ft. over NW. slope, to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 13, 14, 23 and 24, with brass
 cap, marked



from which
 A pinon, 6 ins. in diam., brs. N. 10° W., 112 lks. dist.,
 mark "T11N R21E S14 BT."

48. Subdivision of Township 11 North, Range 21 East.

Chains.

A pinon, 6 ins. in diam., brs. N. 59° E., 118 lks. dist., mark "T11N R21E S13. BT."

A cedar, 4 ins. in diam., bears S. 77° E., 148 lks. dist., mark "T11N R21E S24 BT."

Raise a mound of stone 4 ft. base, 2 ft. high, W. of cor. Land, rolling.

Soil, rocky, 4th rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar, pinon, and scattering yellow pine.

Fair grass.

N. 89° 43' E., on a random line, bet. secs. 13 and 24.


40.00 Set temp. 1/4 sec. cor.

80.56 Intersect E. bdy. of Tp., 3 lks. S. of the reestablished cor. of secs. 13 and 24, hereinbefore described.

Thence, S. 89° 42' W., on true line, bet. secs. 13 and 24.

Over level stony mesa. Thru. scattering timber and undergrowth.

40.56 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in ground, for 1/4 sec. cor., with brass cap, marked



from which,

A cedar, 20 ins. in diam., brs. N. 57° W., 55 lks. dist., mark "1/4 S 13 BT."

A cedar, 10 ins. in diam., brs. S. 73° W., 99 lks. dist., mark "1/4 S 24 BT."

50.30 Rim of mesa, brs. NE. and SW. Leave level top of mesa. Enter roughly rolling land.

Descend 144 ft., over NW. slope, to

65.00 Leave roughly rolling land, and descend gradually, over slightly rolling NW. slope, to

80.56 The cor. of secs. 13, 14, 23 and 24.

Land, level and rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon, and oak.

Timber, cedar, pinyon and very scattering yellow pine.

Fair grass.

North, bet. secs. 13 and 14, on Sectional Guide Meridian. Over rolling land, thru. scattering timber and undergrowth.

3.60 Shallow draw, course west. Ascend 90 ft., over SW. slope.


10.00 Enter thick timber and undergrowth.

20.50 Spur, slopes W. Descend 71 ft., over NW. slope.

33.55 Old road, brs. NE. and SW.

37.50 Draw, course W.. Ascend 23 ft. over S. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



from which,

A cedar, 10 ins. in diam., brs. N. 26° W., 194 lks. dist., mark "1/4 S 14 BT."

A cedar, 8 ins. in diam., brs. S. 88° E., 380 lks. dist., mark "1/4 S 13 BT."

Ascend 17 ft., over S. slope.

42.00 Spur, slopes W. Descend 40 ft., over N. slope.

53.00 Rocky wash, 20 lks. wide, course NW. Thence over rolling W. slope.

71.15 Shallow draw, 20 lks. wide, course west.

Ascend 52 ft., over S. slope, to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass

Chains.

cap, marked,

T11N	R21E
S11	S12
S14	S13
1920	

from which,

- A cedar, 24 ins. in diam., brs. N. 70° W., 415 lks. dist., mark "T11N R21E S11 BT."
- A cedar, 14 ins. in diam., brs. N. 71° E., 115 lks. dist., mark "T11N R21E S12 BT."
- A cedar, 24 ins. in diam., brs. S. 71° W., 177 lks. dist., mark "T11N R21E S14 BT."

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinyon and oak.

Timber, cedar, pinyon and very scattering yellow pine.

Fair grass.

N. 89° 42' E., on a random line, bet. secs. 12 and 13.

40.00 Set temp. 1/4 sec. cor.

80.08 Intersect E. bdy. of Tp., 8 lks. N. of the reestablished cor. of secs. 12 and 13, hereinbefore described.

Thence, S. 89° 40' W., on true line, bet. secs. 12 and 13.

Over level mesa, thru. scattering timber and undergrowth.

40.08 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4	S 12
S 13	
1920	

from which,

- A cedar, 20 ins. in diam., brs. N. 39° W., 67 lks. dist., mark "1/4 S 12 BT."
- A cedar, 14 ins. in diam., brs. S. 51° W., 169 lks. dist., mark "1/4 S 13 BT."

44.00 Rim of mesa, brs. N. and S. Leave level top of mesa, and enter rolling land. Desc. 70 ft., over W. slope.

73.50 Wash, 10 lks. wide, course S. Asc. 40 ft., over E. slope, to

80.08 The cor. of secs. 11, 12, 13 and 14.

Land, level and rolling.

Soil, rocky, 3rd rate. Undergrowth, scrub cedar and pinyon.

Timber, cedar, pinyon, and very scattering yellow pine.

Fair grass.

North, bet. secs. 11 and 12, on Sectional Guide Meridian. Over slightly rolling land, thru. scattering timber and undergrowth, along W. slope.

7.00 Head of draw, course W.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

1/4	S 11	S 12
1920		

from which,

- A cedar, 24 ins. in diam., brs. N. 44° W., 480 lks. dist., mark "1/4 S 11 BT."
- A cedar, 12 ins. in diam., brs. N. 63° E., 326 lks. dist., mark "1/4 S 12 BT."

62.50 Shallow draw, course W. Asc. 57 ft., over S. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 1, 2, 11 and 12, with brass cap, marked

T11N	R21E
S 2	S 1
S 11	S 12
1920	

from which,

- A cedar, 0 ins. in diam., brs. N. 4° W., 140 lks. dist., mark "T11N R21E S2 BT."

- A cedar, 20 ins. in diam., brs. N. 76° E., 480 lks.

Chains.

dist., mark "T11N R21E S1 BT."
 A cedar, 21 ins. in diam., brs. S. 67° E., 284 lks.
 dist., mark "T11N R21E S12 BT."
 A cedar, 14 ins. in diam., brs. S. 32° W., 265 lks.
 dist., mark "T11N R21E S11 BT."

Land, slightly rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinyon and oak.
 Timber, cedar and pinyon.
 Fair grass.

N. 89° 46' E., on a random line, bet. secs. 1 and 12.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.26 Intersect E. bdy. of Tp., 2 lks. S. of reestablished cor. of
 secs. 1 and 12, hereinbefore described.
 Thence,
 S. 89° 45' W., on true line, bet. secs. 1 and 12.
 15.00 Over rolling, open land; desc. 28 ft., over SW. slope, to
 Foot of descent, brs. NW and SE. at E. side of draw; thence
 across bottom of draw draining SE.
 25.00 Leave draw bottom; asc. 23 ft., over E. slope.
 30.00 East rim of mesa, brs. NW and SE. Leave rolling land, and
 enter level top of mesa.
 40.26 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \text{ S } 1 \\ \hline \text{S } 12 \\ 1920 \end{array}$$
 from which,
 A cedar, 40 ins. in diam., brs. N. 27° E., 185 lks.
 dist., mark " $\frac{1}{4}$ S 1 BT."
 A pinyon, 8 ins. in diam., brs. S. 43° W., 13 lks.
 dist., mark " $\frac{1}{4}$ S 12 BT."

45.00 West rim of mesa, brs. NW and SE. Desc. 23 ft. over W. slope,
 to
 60.00 Foot of descent, brs. N. and S. Thence over level bench.
 80.26 The cor. of secs. 1, 2, 11 and 12.
 Land, rolling and level.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinyon.
 Fair grass.

North, on sectional Guide Meridian, bet. secs. 1 and 2.
 Over slightly rolling land, thru. scattering timber and
 undergrowth..

5.00 Fence cor., from which fence extends N. 12° W. and E., brs. E.
 about 4 chs. dist.
 16.10 Barb wire fence, brs. N. 12° W. and S. 12° E.
 22.50 Across flat, draining W.
 30.40 Road from Showlow to Shumway, brs. NE and SW.
 39.00 Enter thick timber, brs. E. and W. Leave flat; asc. 20 ft.,
 over S. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked


$$\begin{array}{c} \frac{1}{4} \text{ S } 1 \\ \hline \text{S } 2 \text{ S } 1 \\ 1920 \end{array}$$
 from which,
 A pinyon, 14 ins. in diam., brs. N. 20° E., 29 lks.
 dist., mark " $\frac{1}{4}$ S 1 BT."
 A pinyon, 10 ins. in diam., brs. S. 49° W., 95 lks.
 dist., mark " $\frac{1}{4}$ S 2 BT."

Subdivision lines of Township 11 North, Range 21 East.

BOOK 51

Chains.

54.77 Ascend 35 ft., over SE. slope.
 Intersect south bdy. of T.12 N., R.21 E., at 7.37 chs. N. 89°53'E., from the reestablished $\frac{1}{4}$ sec. cor. of sec. 31, hereinbefore described.
 At point of intersection, set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap, marked



from which,
 A cedar, 12 ins. in diam., brs. S.24°E., 117 lks. dist., mark "CC T11N R21E S1 BT."
 A cedar, 10 ins. in diam., brs. S.20°W., 107 lks. dist., mark "CC T11N R21E S2 BT."


Land, level, and slightly rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar and pinon.
 Fair grass.

From reestablished cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described, N.0°01' W., on true line, bet: secs. 34 and 35.
 Over slightly rolling top of mesa, thru. thick timber and undergrowth: Descend 60 ft., over gradual NE. slope.
 12.38 Barb wire fence, brs. E. and W.
 22.00 Leave thick timber and undergrowth, and enter scattering timber and undergrowth.
 28.54 Rocky drain, 10 lks. wide, course NE. Leave slightly rolling, and enter roughly rolling land.
 Ascend 28 ft. over SE. slope.
 32.00 Spur, slopes NE. Descend 10 ft., over NW. slope.
 35.00 Head of wash, course NE. Ascend 11 ft., over SE. slope, to
 40.23 (40.00 chs. S.0°1'E., from intersection with governing section line),
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked



from which,
 A cedar, 24 ins. in diam., brs. N.76°W., 89 lks. dist., mark " $\frac{1}{4}$ S 34 BT."
 A cedar, 6 ins. in diam., brs. N.27°E., 20 lks. dist., mark " $\frac{1}{4}$ S 35 BT."

41.00 Spur, slopes NE. Descend 95 ft., over N. slope.
 60.00 Wash, 20 lks. wide, course east. Ascend 101 ft. over S. slope.
 80.00 Ridge, brs. NW. and SE. Thence over top of same to
 80.23 Intersect governing section line, at 30 lks. S.89° 48'W., from temp. cor. of secs. 26, 27, 34 and 35. At point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap, marked



52 Subdivision of Township 11 North, Range 21 East.

Chains.

from which,

A cedar, 24 ins. in diam., brs. N. 33° W., 89 lks.
dist., mark "T11N R21E S27 BT."A cedar, 30 ins. in diam., brs. N. 83° E., 94 lks.
dist., mark "T11N R21E S26 BT."A cedar, 12 ins. in diam., brs. S. 16° E., 142 lks.
dist., mark "T11N R21E S35 BT."A cedar, 12 ins. in diam., brs. S. 70° W., 128 lks.
dist., mark "T11N R21E S 34 BT."

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar, pinon, and very scattering yellow pine.

Fair grass.

From cor. of secs. 25, 26, 35 and 36,
S. 89° 48' W., on Governing Section Line, bet. secs. 26 and 35.
Over slightly rolling top of mesa, thru. thick timber and
undergrowth.

- 11.00 Rim of mesa, brs. NW. and SE. Leave slightly rolling top
of mesa; enter broken land. Descend 130 ft., over steep
SW. slope.
- 15.00 Rocky gulch, 30 lks. wide, course NW. Ascend 74 ft., over
NE. slope.
- 20.00 Rim of mesa, bears NW. and SE. Thence across level top
of N. end of mesa, bearing N. and S.
- 30.00 Rim of mesa, bears N. and S.. Leave mesa and enter broken
land; descend 113 ft., over steep W. slope, to
- 39.90 East edge of Showlow Creek, course N. and S. Thence across
bed of said creek, with stream of running water, 50
lks. wide, 12 ins. deep, course N.
- 39.96 True point for $\frac{1}{4}$ sec. cor. falls in creek, where it is im-
practicable to monument the cor.; therefore, at a
point 200 lks. S. 89° 48' W. from cor. point, establish wit-
ness cor. thereto as hereinafter described.
- 41.00 West edge of Showlow Creek brs. N. and S. Leave creek bed;
ascend.
- 41.96 Set an iron post 3 ft. long, 1 in. in diam., on bed rock,
supported by a mound of stone 4 ft. base, 2½ ft. high,
for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap, marked

WC $\frac{1}{4}$ — S 26
S 35
1920

from which,

A pine, 12 ins. in diam., brs. N. 55° E., 110 lks.
dist., mark "WC $\frac{1}{4}$ S 26 BT."A pine, 16 ins. in diam., bears S. 18° W., 182 lks.
dist., mark "WC $\frac{1}{4}$ S 35 BT."

Ascend 20 ft., over SE. slope.

- 44.50 Toe of spur, slopes SE. Descend 10 ft., over SW. slope.
- 45:50 Rocky wash, 30 lks. wide, course SE. Ascend 102 ft., over
N. slope.
- 52.70 Point of spur, slopes N. Descend 20 ft., over NW. slope.
- 55.00 Same wash, course N. 60° E. Ascend 72 ft., over SW. slope.
- 78.00 Top of ridge, brs. NW. and SE. Thence on top of ridge to
- 79:92 The cor. of secs. 26, 27, 34 and 35.
Land, rolling and broken.
Soil, rocky, 4th rate.
Undergrowth, scrub cedar, pinon and oak.
Timber, cedar, pinon, juniper and yellow pine.
Fair grass.

N. 0° 01' W., on true line, bet. secs. 26 and 27.
Over rolling and broken land, thru. thick timber and under-
growth. Ascend gradually on top of ridge, bearing N.
and S.

- 5.00 Leave top, of ridge, bears N. 10° E. and S.

Chains.

40.00 Descend 40 ft., over NW.slope, to
Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S27} \left| \text{S26} \right. \\ \hline 1920 \end{array}$$

from which,

A cedar, 12 ins. in diam., brs.N.74°W., 19 lks.
dist., mark " $\frac{1}{4}$ S 27 BT."

A cedar, 14 ins. in diam.; brs. N.85°E., 31 lks.
dist., mark " $\frac{1}{4}$ S 26 BT."

Descend 71 ft., over NW.slope.

59.80 Old road, brs.NE. and SW;

73.50 Wash, course NW. Ascend 21 ft., over S.slope, to

80.00 Set an iron post 3 ft.long, 2 ins. in diam., 24 ins. in
the ground, for cor.of secs. 22,23, 26 and 27, with
brass cap, marked

$$\begin{array}{c} \text{T11N} \left| \text{R21E} \right. \\ \hline \text{S22} \left| \text{S23} \right. \\ \hline \text{S27} \left| \text{S26} \right. \\ \hline 1920 \end{array}$$

from which,

A yellow pine, 16 ins. in diam., brs.N.36°W., 276
lks.dist., mark "T11N R21E S22 BT."

A pinon, 14 ins. in diam., brs.N.34°E., 141 lks.
dist., mark "T11N R21E S23 BT."

A cedar, 8 ins. in diam., brs.S.61°E., 150 lks.
dist., mark "T11N R21E S26 BT."

A yellow pine, 10 ins. in diam., brs.S.58°W., 183
lks.dist., mark "T11N R21E S27 BT."

Land, rolling and broken.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar, pinon, and yellow pine.

Fair grass.

40.00 N.89° 48'E., on a random line, bet. secs.23 and 26.

Set temp. $\frac{1}{4}$ sec.cor.

79.96 Intersect N.and S. line, 4 lks.S.of cor.of secs.23,24,25
and 26.

Thence,

S.89°46'W., on a true line, bet. secs.23 and 26.

Over level, stony mesa, thru. thick timber and under-
growth.

7.00 Rim of mesa, brs.N. and SE. Leave level and enter broken
land. Descend 155 ft. over steep rough W.slope, into
canyon.

12.60 Showlow Creek, 100 lks.wide, with stream of running water,
10 lks.wide, 4 ins.deep, course N. Ascend 107 ft., over
E.slope.

17.00 W. rim of canyon, brs.N. and S. Ascend 53 ft., over
rolling E.slope, to

39.98 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$$\begin{array}{c} \text{S 23} \\ \hline \frac{1}{4} \\ \hline \text{S 26} \\ \hline 1920 \end{array}$$


from which,

54 Subdivision of Township 11 North, Range 21 East.

Chains.


A cedar, 11 ins. in diam., brs. N. 09° W., 40 lks.
 dist., mark "1/4 S 23 BT."
 A pinon, 8 ins. in diam., brs. S. 35° E., 100 lks.
 dist., mark "1/4 S 26 BT."
 40.00 Point of spur, slopes NE. Descend 15 ft., over rolling
 NW. slope.
 52.50 Draw, course NE. Ascend 17 ft. over SE. slope.
 55.00 Spur, slopes NE. Descend 21 ft. over NW. slope.
 60.00 Draw, course NE. Ascend 23 ft., over SE. slope.
 68.00 Spur, slopes NE. Descend very gradually over NW. slope to
 sec. cor.
 73.85 Road, brs. NE. and SW.
 79.96 The cor. of secs. 22, 23, 26 and 27.
 Land, rolling, broken and level.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar, pinon, and scattering yellow pine.
 Fair grass.

N. 0° 02' W., on Sectional Guide Meridian, between secs. 22
 and 23.
 Over slightly rolling land, thru. thick timber and under-
 growth. Descend gradually over NW. slope, to
 5.00 Rim, brs. NE and SW. Leave slightly rolling and broken
 land. Descend 125 ft., over NW. slope.
 13.00 Juniper wash, 1 chain wide, course NE. Ascend 66 ft., over
 SE. slope.
 29.50 Spur, slopes E. Descend 50 ft., over N. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for 1/4 sec. cor., with brass cap, marked



from which,

A cedar, 24 ins. in diam., brs. N. 54° W., 28 lks.
 dist., mark "1/4 S22 BT."
 A cedar, 4 ins. in diam., brs. S. 88° E., 57 lks.
 dist., mark "1/4 S 23 BT."
 Descend 28 ft., over N. slope.
 54.00 Draw, 30 lks. wide, course NE. Ascend 17 ft., over SE.
 slope.
 56.00 Spur, slopes E. Descend 10 ft., over N. slope.
 57.30 Wash, 10 lks. wide, course SE. Ascend 20 ft., over S. slope.
 65.07 Road, brs. NE. and SW.
 68.00 Spur, slopes N. 60° E. Descend 10 ft., over NW. slope, to
 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 14, 15, 22 and 23, with
 brass cap, marked



from which,

A cedar, 10 ins. in diam., brs. N. 71° W., 121 lks.
 dist., mark "T11N R21E S15 BT."
 A cedar, 14 ins. in diam., brs. N. 17° E., 78 lks.
 dist., mark "T11N R21E S14 BT."


Subdivision of Township 11. North, Range 21 East.

Chains.

A cedar, 16 ins. in diam., brs. S. 22° E., 29 lks. dist., mark "T11N R21E S23 BT."
 A cedar, 24 ins. in diam., brs. S. 77° W., 118 lks. dist., mark "T11N R21E S22 BT."

Land, rolling and broken.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinyon and oak.
 Timber, cedar, pinyon, and scattering yellow pine.
 Fair grass.

40.00 N. 89° 46' E., on a random line, bet. secs. 14 and 23.
 Set temp. 1/4 sec. cor.
 79.92 Intersect N. and S. line, 8 lks. N. of the cor. of secs. 13, 14, 23 and 24.
 Thence,
 S. 89° 49' W., on a true line, bet. secs. 14 and 23.
 Over nearly level land, known as "Lone Pine Flat" previously cultivated land, clear of timber or undergrowth.
 18.30 Descend 20 ft., to Showlow Creek, 150 lks. wide, 1 ft. deep, with stream of water. 10 lks. wide, 4 ins. deep; course N.; ascend 98 ft. to 1/4 sec. cor., over rolling E. slope.
 30.00 Road, brs. N. and S. Enter thick timber and undergrowth.
 36.00 Road brs. NE and SW.
 39.96 Spur, slopes N. Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



from which,
 A cedar, 24 ins. in diam., brs. N. 63° E., 68 lks. dist., mark "1/4 S 14 BT."
 A cedar, 10 ins. in diam., brs. S. 4° E., 134 lks. dist., mark "1/4 S 23 BT."

Descend 17 ft., over W. slope.
 51.80 Draw, course N. Ascend 40 ft., over E. slope.
 65.00 Point of spur, slopes N. Descend very gradually, over NW. slope, to
 79.92 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinyon and oak.
 Timber, cedar pinyon, and very scattering yellow pine.
 Fair grass.

40.00 N. 0° 02' W., on true line, bet. secs. 14 and 15.
 Over rolling land, thru. thick timber and undergrowth.
 Descend 50 ft., over N. slope, to
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



56 Subdivision of Township 11 North, Range 21 East.

Chains.

from which,

A cedar, 24 ins. in diam., brs. N. 74° W., 190 lks. dist., mark "S 15 BT."

A cedar, 14 ins. in diam., brs. S. 32° E., 78 lks. dist., mark "S 14 BT."

Descend 17 ft., over N. slope.

45.50 Head of draw, course NW.

Ascend 12 ft., over SW. slope.

50.00 Ridge, brs. NW and SE.

Descend 44 ft., over N. slope, to

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap, marked

T11N	R21E
S10	S11
S15	S14

1920

from which,

A cedar, 12 ins. in diam., brs. N. 31° W., 33 lks. dist., mark "T11N R21E S10 BT."

A cedar, 14 ins. in diam., brs. N. 80° E., 12 lks. dist., mark "T11N R21E S11 BT."

A cedar, 20 ins. in diam., brs. S. 12° E., 49 lks. dist., mark "T11N R21E S14 BT."

A cedar, 10 ins. in diam., brs. S. 15° W., 5 lks. dist., mark "T11N R21E S15 BT."

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinyon.

Timber, cedar, pinyon, and very scattering yellow pine.

Fair grass.

N. 89° 49' E., on a random line, bet. secs. 11 and 14.

40.00 Set temp. 1/4 sec. cor.

80.04 Intersect N. and S. line, 10 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Thence,

S. 89° 45' W., on a true line, bet. secs. 11 and 14.

Over rolling land, thru. scattering timber and dense undergrowth.

Descend 80 ft., over W. slope.

19.40 Road, brs. N. and S.

25.30 Rocky ravine, 10 lks. wide, course SW.

Ascend 28 ft., over S. slope.

32.30 Rim of canyon, brs. NW and SE.

Descend 68 ft., over broken SW. slope, to

40.02 Set an iron post 3 ft. long, 1 ins. in diam., on bedrock, supported by a mound of stone, 5 ft. base, 2 1/2 ft. high, for 1/4 sec. cor., with brass cap, marked

S 11
S 14
1920

Subdivision of Township 11 North, Range 21 East.

Chains.

Deposit marked stone in mound. Descend 40 ft., over broken SW. slope.

45.60 Showlow Creek, 200 lks. wide with stream of water, 30 lks. wide, 6 ft. deep, course N.15°W. Ascend 84 ft., over broken NE. slope.

52.10 Spur, slopes N. Descend 62 ft., over NW. slope.

60.60 Ravine, 10 lks. wide, course N. Ascend 44 ft. over E. slope.

62.50 Spur, slopes N. Descend 15 ft., over W. slope.

65.30 Ravine, 10 lks. wide, course N. Ascend 70 ft. over E. slope.

67.00 Spur, slopes N. Descend 10 ft., over W. slope, to

80.04 The cor. of secs. 10, 11, 14 and 15. Land, rolling and broken. Soil, rocky, 3rd rate. Undergrowth, scrub cedar and pines, and very scattering timber, cedar, pinyon, and very scattering yellow pine. Fair grass.

N.0°01' W., on a true line, bet. secs. 10 and 11. Over rolling and broken land, thru. thick timber and undergrowth, Descend 34 ft., over N. slope.

6.95 Wash, 10 lks. wide, course NE. Ascend 20 ft., over SE. slope.


15.00 Spur, slopes NE. Descend 29 ft., over NW. slope.

22.60 Rocky wash, 10 lks. wide, course NE. Ascend 12 ft., over SE. slope.

25.00 Spur, slopes NE. Descend 89 ft., over N. slope.

38.50 Showlow Creek, 100 lks. wide, with stream of water, 50 lks. wide, 6 ins. deep, course N.70°W. Ascend 14 ft., over S. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



from which,
 A yellow pine, 24 ins. in diam., brs. N.74°E., 184 lks. dist., mark "1/4 S 11 BT."
 A yellow pine, 24 ins. in diam., brs. S.18°W., 273 lks. dist., mark "1/4 S 10 BT."

41.50 Point of spur, slopes W., Descend 34 ft., over N. slope.


43.85 Showlow Creek, 100 lks. wide, with stream of water, 50 lks. wide, 6 ins. deep, course N.70°E. Ascend 87 ft., over steep south slope.

47.00 Spur, slopes NE. Descend 107 ft. over N. slope.

71.35 Showlow Creek, 100 lks. wide, with stream of water 50 lks. wide, course N.80°W. Ascend 23 ft., over W. slope, to

74.50 Wash, course SW. Ascend 50 ft., over SE. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap, marked



from which,
 A cedar, 8 ins. in diam., brs. N.46°W., 106 lks. dist., mark "T11N R21E S3 BT."
 A yellow pine, 12 ins. in diam., brs. S.6°E., 347 lks. dist., mark "T11N R21E S11 BT."
 A cedar, 10 ins. in diam., brs. S.72°W., 173 lks. dist., mark "T11N R21E S10 BT."

Land, rolling and broken. Soil, rocky, 4th rate.

58 Subdivision of Township North, Range 21 East.

Chains.

Undergrowth, scrub cedar and pinon.
Timber, cedar, pinon and scattering yellow pine.
Fair grass

40.00 N. 89° 45' E., on random line, bet. secs. 2 and 11.
Set temp. $\frac{1}{4}$ sec. cor.
80.10 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 1, 2,
11 and 12.
Thence,
S. 89° 49' W., on true line, bet. secs. 2 and 11.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 17 ft., over S. slope, on bench, bearing E. and W.
11.00 Rim of bench, brs. E. and N. 60° W., Leave bench. Descend 70
ft., over SW. slope.
18.00 Road, brs. N. and S.
35.00 Foot of descent, brs. NW. and SE, Thence across open flat.
40.05 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\frac{1}{4} \frac{S \ 2}{S \ 11}$$

1920

from which,

A cedar, 12 ins. in diam., brs. N. 48° E., 350 lks. dist.,
mark " $\frac{1}{4}$ S 2 BT."
A cedar, 20 ins. in diam., brs. S. 71° E., 400 lks. dist.,
mark " $\frac{1}{4}$ S 11 BT."
Continue over open flat.
51.60 Old road, brs. N. and S.
60.00 Leave flat; descend 62 ft., over NW. slope.
67.30 Rocky wash, course SW. Ascend 34 ft., over SE. slope, to
80.10 The cor. of secs. 2, 3, 10 and 11.
Land, rolling.
Soil, rocky, 3rd rate.
Undergrowth, scrub cedar and pinon.
Timber, cedar and pinon.
Fair grass.

N. 0° 01' W., on true line, bet. secs. 2 and 3.
Over rolling land, thru. scattering timber and undergrowth.
Ascend 33 ft., over SE. slope.
9.00 Spur, slopes SW. Descend 17 ft., over N. slope,
34.00 Shallow draw, course W. Ascend 23 ft., over S. slope to $\frac{1}{4}$
sec. cor.
35.35 Road, brs. E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$S \ 3 \ \frac{1}{4} \ S \ 2$$

1920

from which,

A cedar, 24 ins. in diam., brs. S. 72° E., 55 lks.
dist., mark " $\frac{1}{4}$ S 2 BT."
A pinon, 17 ins. in diam., brs. S. 68° W., 326 lks.
dist., mark " $\frac{1}{4}$ S 3 BT."
Ascend 34 ft., over SW. slope, to
55.27 Intersect South bdy. of T. 12 N., R. 21 E., at 9.46 chs., S.
88° 48' E., from reestablished $\frac{1}{4}$ sec. cor. of sec. 35, herein-
before described.
At point of intersection, set an iron post 3 ft. long, 2
ins. in diam., 24 ins. in the ground, for closing cor.
of secs. 2 and 3, with brass cap, marked

Chains.

T12N R21E	
S35	
S 3	S 2
C	C
T11N R21E	
1920	

from which,
 A pinon, 8 ins. in diam., brs. S. 68° E., 193 lks.
 dist., mark "CC T11N R21E S2 BT."
 A cedar, 8 ins. in diam., bears S. 67° W., 184 lks.
 dist., mark "CC T11N R21E S3 BT."

Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinyon.
 Fair grass.

From reestablished cor. of secs. 3, 4, 33 and 34, on S. bdy,
 of the Tp., hereinbefore described,
 N. 0° 01' W., on true line, bet. secs. 33 and 34.
 Over rolling land, thru. scattering timber and under-
 growth.

- 1.20 Wire fence, brs. E and W.
- 4.80 Shallow draw, course E. Ascend 77 ft., over S. slope.
- 6.00 Old road, brs. E. and W.
- 11.60 Wire fence, brs. E. and W. Corners about 2 chs. west;
thence N.
- 17:00 Ridge, brs. E. and W. Descend 40 ft., over N. slope, to
- 39.40 (40.00 chs. S. 0° 1' E.; from intersection with Governing
Sec. line.),

Set an iron post 3 ft. long, 1 in. in diam.; 26 ins. in
 the ground, for 1/4 sec. cor., with brass cap, marked.

S33 S34	
1920	

from which,
 A cedar, 8 ins. in diam., brs. N. 11° E., 220 lks.
 dist., mark "1/4 S 34 BT."
 A cedar, 40 ins. in diam., brs. west, 106 lks.
 dist., mark "1/4 S 33 BT."

- 39.45 Wire fence, brs. E. and W.
- 39.90 Wire fence, brs. E. and W.
- 40.00 Whence,
 House of E. Hatch, brs. N. 87° W., about 35.00 chs.
 dist.
 House of C. Rogers, brs. S. 86° W., about 50.00 chs.
 dist.

- 47.40 Descend 50 ft. over N. slope.
- 47.40 Wire fence, brs. NE. and SW. Enter cultivated land.
- 58.60 Wash, 20 lks. wide, 8 ft. deep, course NE.
- 65.60 Juniper wash, (dry) 25 lks. wide, 6 ft. deep, course NE.
- 79.40 Intersect Governing Section line at 48 lks. S. 89° 48' W. from
temp. cor. of secs. 27, 28, 33 and 34. At point of inter-
section,
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for cor. of secs. 27, 28, 33 and 34, with
brass cap, marked

T11N	R21E
S28	S27
S33	S34
1920	

from which,
 A cedar, 6 ins. in diam., brs. S. 37° W., 158 lks.
 dist., mark "T11N R21E S33 BT."

60 Subdivision of Township 11 North, Range 21 East.

Chains.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. Land, rolling and level. Soil, south 48 chs. rocky, 3rd rate; north 32 chs., sandy black loam, 1st rate. Undergrowth, scrub cedar and pinon, and oak. Timber, cedar, and pinon, scattering yellow pine. Fair grass.

From cor. of secs. 26, 27, 34 and 35, S. 89° 48' W., on Governing Section Line, bet. secs. 27 and 34.

21.00 Over rolling land, thru. thick timber and undergrowth. Descend gradually on top of spur, sloping W. Road, brs. N. and S. Showlow to Shumway.
40.09 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked

1/4 S 27
S 34
1920

from which,

A cedar, 14 ins. in diam., brs. N. 34° E., 261 lks. dist., mark "1/4 S 27 BT."

A cedar, 12 ins. in diam., brs. S. 31° E., 153 lks. dist., mark "1/4 S 34 BT."

43.00 Continue over top of spur, sloping W. Descend gradually. Point of same spur. Leave top of same; descend 20 ft., over W. slope, to

50.00 Road, brs. N. and S., Showlow to Taylor. Ascend 10 ft., over NE. slope.

55.00 Point of spur, slopes N. Descend 80 ft. over W. slope.

62.15 Telephone line, bears N. 35° W. to S. 35° E.

65.30 Wash, 10 lks. wide, and 3 ft. deep, course N. Thence over slightly rolling N. slope.

67.30 Barb wire fence, bears N. and S. Thence over cultivated land to sec. cor.

68.40 Juniper wash, 30 lks. wide, 3 ft. deep, course NE. thence over level land, to

80.18 The cor. of secs. 27, 28, 33 and 34. Land, rolling and level.

Soil, east 65 chs. rocky, 3rd rate; west 15 chs., sandy loam, 1st rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar and pinon, and very scattering yellow pine.

Fair grass.

N. 0° 01' W., on true line, bet. secs. 27 and 28.

Over level cultivated land.

1.70 Barb wire fence, brs. E. and W.

6.80 Wash, course E. Leave level cultivated land; enter rolling land; ascend 67 ft. over S. slope, thru. scattering timber and undergrowth.

22.03 Barb wire fence, brs. E. and W.

30.00 Spur, slopes E. Descend 20 ft., over N. slope, to 1/4 sec. cor.

35.15 Road from Taylor to Showlow, bears N. 85° W. and S. 85° E.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground for 1/4 sec. cor., with brass cap, marked

1/4 S 28 | S 27
1920

from which,

A cedar, 14 ins. in diam., brs. N. 39° W., 46 lks. dist., mark "1/4 S 28 BT."

A cedar, 28 ins. in diam., brs. N. 39° E., 95 lks. dist., mark "1/4 S 27 BT."

Subdivision of Township 11 North, Range 21 East.


61

Chains

- Descend 15 ft., over N. slope.
- 40.46 Telephone line, brs. N.25° W. and S.25° E.
- 41.18 Barb wire fence, brs. E and W.
- 43.80 Old Apache road, brs. N.25° W. and S.25° E. Leave rolling land, timber and undergrowth, and enter level open cultivated land.
- 50.75 Leave cultivated field and enter timber and undergrowth, brs. E. and W.
- 60.20 Leave timber and undergrowth, and enter open cultivated field.
- 65.00 Leave open cultivated land and enter timber and undergrowth, brs. E. and W.

Whence,

- House of Davis, brs. West, about 10 chs. dist.
- 69.20 Barb wire fence, brs. E. and W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap, marked



1920.

from which,

- A cedar, 12 ins. in diam., brs. N.61° W., 56 lks. dist., mark "11N R21E S21 BT."
- A cedar, 8 ins. in diam., brs. N.42° E., 72 lks. dist., mark "T11N R21E S22 BT."
- A cedar, 18 ins. in diam., brs. S.40° E., 79 lks. dist., mark "T11N R21E S27 BT."
- A cedar, 12 ins. in diam., brs. S.47° W., 40 lks. dist., mark "T11N R21E S28 BT."

Land, rolling and level.

Soil, south half rocky, 3rd rate; north half, sandy black loam, 1st rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon.

Fair grass.


- N.89° 48' E., on random line, bet. secs. 22 and 27.
- 40.00 Set temp. 1/4 sec. cor.
- 80.46 Intersect N. and S. line, 9 lks. S. of cor. of secs. 22, 23, 26 and 27.

Thence,

S.89° 44' W., on a true line, bet. secs. 22 and 27.

Over slightly rolling, rocky land, thru. thick timber and undergrowth.

- 3.00 Rim, brs. N. and S. Leave slightly rolling, and enter broken land; descend 81 ft., over rocky W. slope.
- 4.80 Juniper wash, 50 lks. wide, course NE. Ascend 60 ft., over E. slope, to
- 8.00 Rim, brs. NE. and SW. Leave broken and enter rolling land; enter scattering timber and undergrowth. Ascend 40 ft. over E. slope.
- 20.00 Point of spur, slopes NE. Descend 10 ft., over NW. slope.
- 30.00 Wash, course NE. Ascend 20 ft., over NE. slope, to 1/4 sec. cor.
- 35.00 Leave scattering and enter thick timber and undergrowth, brs. N. and S.
- 40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked



1920

from which,


- A cedar, 12 ins. in diam., brs. N.38° W., 148 lks. dist., mark 1/4 S 22 BT."
 - A cedar, 8 ins. in diam., brs. S.60° W., 40 lks. dist., mark "1/4 S 27 BT."
- Ascend gradually over rolling NE. slope to sec. cor.

62 Subdivision of Township 11 North, Range 21 East.

Chains.


64.65 Barb wire fence, brs.N. and S.
 66.00 Head of draw, course.NE.
 80.46 The cor.of secs.21,22, 27 and 28.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar, pinon, and very scattering yellow pine.
 Fair grass.

N.0° 01' W., on true line, bet. secs.21 and 22.
 Over rolling land, thru. thick timber and undergrowth;
 along E.slope.
 2.00 East edge of old dry lake, brs.west about 1 ch.dist. This
 lake is about 8 chs.in diameter.
 9.10 Barb wire fence, brs.E. and W.
 13.20 Road, brs. E. and W.
 28.50 Ridge, brs.SE. and NW. Descend 45 ft., over NE.slope, to
 40.00 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked



from which,
 . A cedar, 11 ins.in diam., brs.N.68°E., 21 lks.
 . dist., mark " $\frac{1}{4}$ S 22 BT."
 . A cedar, 6 ins. in diam., brs.S.65°W., 19 lks.
 . dist., mark " $\frac{1}{4}$ S 21 BT,"

Descend 34 ft. over B.slope.
 49.50 Draw, course NE. Ascend 11 ft. over SE.slope.
 54.50 Spur, slopes NE. Descend 28 ft., over NW.slope.
 58.50 Draw, course NE. Ascend 28 ft., over SE.slope.
 62.50 Spur, slopes NE. Descend 50 ft., over N.slope, to
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs.15,16,21 and 22, with
 brass cap, marked



from which,
 A cedar, 8 ins. in diam., brs.N.25°W., 19 lks.dist.,
 mark "T11N R21E S16 BT."
 A cedar, 12 ins. in diam., brs.N.50°E., 15 lks.dist.,
 mark "T11N R21E S15 BT."
 A cedar, 10 ins.in diam., brs.S.40°E., 27 lks.dist.,
 mark "T11N R21E S22 BT."
 A cedar, 10 ins.in diam., brs.S.38°W., 35 lks.dist.,
 mark "T11N R21E S21 BT."

Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon; and oak.
 Timber, cedar, pinon, and very scattering yellow pine.
 Fair grass.

N.89°44'E., on a random line, bet. secs.15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec.cor.
 80.46 Intersect N. and S. line, 3 lks.N.of the cor.of secs.14,
 15, 22 and 23.
 Thence,
 S.89°45'W., on true line, bet. secs.15 and 22.
 Over rolling land, thru. thick timber and undergrowth.
 Ascend slightly over NE.slope.
 15.00 Spur, slopes N. Descend 50 ft., over W.slope.
 33.00 Leave timber and undergrowth, and enter open land.
 36.00 Shallow draw, course NE. Ascend 10 ft., over E.slope, to

Subdivision of Township 11 North, Range 21 East.

63

Chains

40.23 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 15
S 22
1920

from which,

A cedar, 12 ins. in diam., brs. N. 28° E., 126 lks. dist., mark " $\frac{1}{4}$ S 15 BT."

A cedar, 24 ins. in diam., brs. S. 45° W., 128 lks. dist., mark " $\frac{1}{4}$ S 22 BT."

Ascend 32 ft., over E. slope.

45.00 Leave open land, and enter thick timber and undergrowth.

57.50 Spur, slopes N. Descend 23 ft., over west slope.

62.50 Draw, course N. Ascend 21 ft., over E. slope.

71.00 Spur slopes NE. Descend 11 ft., over W. slope.

73.20 Wash, course N. Ascend 20 ft., over E. slope, to

80.46 The cor. of secs. 15, 16, 21 and 22.

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar and pinon.

Fair grass.

N. 0° 01' W., on true line, bet. secs. 15 and 16.

Over rolling land, thru thick timber and undergrowth.

Descend 63 ft., over N. slope.

13.00 Rocky wash, course NE. Ascend 23 ft. over SE. slope.

22.00 Spur, slopes NE. Descend 50 ft., over NW. slope, to

40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

S 16 $\frac{1}{4}$ S 15
1920

from which,

A cedar, 12 ins. in diam., brs. S. 38° E., 28 lks. dist., mark " $\frac{1}{4}$ S 15 BT."

A cedar, 10 ins. in diam., brs. S. 79° W., 24 lks. dist., mark " $\frac{1}{4}$ S 16 BT."

Descend 22 ft., over NW. slope.

59.30 Draw, drains NE. Thence over slightly rolling NE. slope.

76.00 Shallow draw, course E. Leave timber and undergrowth and enter open land. Ascend slightly over S. slope, to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap, marked:

T 11 N | R 21 E
S 9 | S 10
S 16 | S 15
1920

from which,

A cedar, 6 ins. in diam., brs. N. 13° W., 175 lks. dist., mark "T11N R21E S 9 BT."

A cedar, 6 ins. in diam., brs. N. 53° E., 210 lks. dist., mark "T11N R21E S10 BT."

A cedar, 12 ins. in diam., brs. S. 2° E., 320 lks. dist., mark "T11N R21E S15 BT."

A cedar, 14 ins. in diam., brs. S. 70° W., 192 lks. dist., mark "T11N R21E S16 BT."

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon, and oak.

Timber, cedar and pinon.

Fair grass.

64

Subdivision of Township 11 North, Range 21 East.

- Chains. N. 89° 45' E., on random line, bet. secs. 10 and 15.
 40.00 Set temp. $\frac{1}{4}$ sec. cor. 7 lks. N. of the cor. of secs. 10,
 80.47 Intersect N. and S. Line, 7 lks. N. of the cor. of secs. 10,
 11, 14 and 15.
 Thence, S. 89° 43' W., on true line, bet. secs. 10 and 15.
 Over rolling land, thru thick timber and undergrowth.
 1.75 Shallow draw, course N. Ascend 51 ft. over E. slope.
 10.00 Spur, slopes N. Descend 62 ft., over W. slope.
 26.50 Wash, course N. Ascend 11 ft., over S. slope.
 38.00 Spur, slopes N. Descend.
 40.24 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$$\frac{1}{4} \begin{array}{c} S 10 \\ S 15 \\ 1920 \end{array}$$

from which,

- A cedar, 12 ins. in diam., brs. N. 24° E., 167
 lks. dist., mark " $\frac{1}{4}$ S 10 BT."
 A cedar, 12 ins. in diam., brs. S. 41° E., 74
 lks. dist., mark " $\frac{1}{4}$ S 15 BT."

Descend 47 ft., over west slope.

- 47.00 Draw, drains NE. Ascend 29 ft. over SE. slope. Leave
 timber and undergrowth, and enter open land.
 80.47 The cor. of secs. 9, 10, 15 and 16.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Fair grass.

- N. 0° 01' W., on true line, bet. secs. 9 and 10.
 Over open rolling land; ascend 15 ft. over SE. slope.
 5.00 Leave open land, and enter timber and undergrowth.
 16.00 Spur, slopes NE. Thence descend gradually, over slight-
 ly rolling E. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked:

$$S 9 \begin{array}{c} \uparrow \\ S 10 \\ 1920 \end{array}$$

from which,

- A juniper, 6 ins. in diam., brs. N. 9° E., 139
 lks. dist., marked " $\frac{1}{4}$ S 10 BT."
 A cedar, 16 ins. in diam., brs. N. 55° W., 130
 lks. dist., marked " $\frac{1}{4}$ S 9 BT."

Descend 25 ft. over NE. slope, to

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 3, 4, 9 and 10, with
 brass cap, marked:

$$\begin{array}{c} T 11 N \quad | \quad R 21 E \\ S 4 \quad | \quad S 3 \\ S 9 \quad | \quad S 10 \\ 1920 \end{array}$$

from which,

- A cedar, 14 ins. in diam., brs. N. 31° E., 107
 lks. dist., marked "T11N R21E S3 BT."
 A cedar, 16 ins. in diam., brs. S. 40 $\frac{3}{4}$ ° E., 133
 lks. dist., marked "T11N R21E S10 BT."
 A cedar, 8 ins. in diam., brs. S. 39 $\frac{3}{4}$ ° W., 106
 lks. dist., marked "T11N R21E S9 BT."
 A cedar, 16 ins. in diam., brs. N. 36 $\frac{3}{4}$ ° W., 106
 lks. dist., marked "T11N R21E S4 BT."

Land, rolling.

Subdivision of Township 11 North, Range 21 East.

Chains Soil, rocky 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar and pinon.
 Fair grass.

N. 89° 40' E., on a random line, bet. secs. 3 and 10.
 40.00 Set temp, 1/4 sec. cor.
 80.46 Intersect N. and S. line, 6 lks. N. of the cor. of secs. 2, 3, 10 and 11.

Thence,
 S. 89° 43' W., on true line, bet. secs. 3 and 10.
 Over rolling and broken land, thru scattering timber and undergrowth.

Ascend 16 ft., over rocky SE. slope.
 20.00 Point of spur, slopes S. Leave scattering, and enter thick timber and undergrowth, brs. N. and S.

Descend 38 ft., over W. slope, to
 40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked:

$$\begin{array}{c} \frac{1}{4} S 3 \\ \frac{1}{4} S 10 \\ 1920 \end{array}$$

from which,
 A cedar, 6 ins. in diam., brs. S. 2 1/2° E., 18 lks. dist., marked "1/4 S 10 BT."

A cedar, 4 ins. in diam., brs. N. 71 1/2° W., 38 lks. dist., marked "1/4 S 3 BT."

Descend 106 ft., over broken W. slope.
 50.60 Showlow Creek, 100 lks. wide, with stream of water, 50 lks. wide, 6 ins. deep, course NW.

Ascend 103 ft. over NE. slope.
 58.20 Point of spur, slopes NE. Descend 42 ft., over W. slope.

61.50 Rocky wash, course NE. Ascend 12 ft., over SE. slope.

65.20 Point of spur, slopes NE. Thence over N. slope, with little change of elevation.

80.46 The cor. of secs. 3, 4, 9 and 10.
 Land, rolling and broken. Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Fair grass.

N. 0° 01' W., on true line, bet. secs. 3 and 4.
 Over rolling land, thru thick timber and undergrowth.
 Descend 132 ft. over NE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ S 4 \quad \frac{1}{4} S 3 \\ 1920 \end{array}$$

from which,
 A walnut, 4 ins. in diam., brs. S. 50 1/2° E., 73 lks. dist., marked "1/4 S 3 BT."

A pine, 4 ins. in diam., brs. S. 56 1/2° W., 145 lks. dist., marked "1/4 S 4 BT."

40.25 Rocky gulch, 30 lks. wide, course NE.
 Ascend 50 ft., over SE. slope.

47.50 Spur, slopes N. 60° E. Descend 34 ft., over N. slope, to

55.08 Intersect S. bdy. of T. 12 N., R. 21 E., at 9.41 chs. N. 89° 31' E. from reestablished 1/4 sec. cor. of sec. 34, hereinbefore described.

At point of intersection:
 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground for closing cor. of secs. 3 and 4, marked on brass cap:

Chains

T 12 N R 21 E
 S 34
 S 4 S 3
 T 11 N R 21 E
 C: C
 1920

from which,

A pine, 6 ins. in diam., brs. S. $73\frac{1}{2}^{\circ}$ E., 48 lks. dist., mark "CCT11N R21E S3 BT."

A cedar, 4 ins. in diam., brs. S. $38\frac{1}{2}^{\circ}$ W., 114 lks. dist., mark "CC T11N R21E S4 BT."

Land, rolling. Soil, rocky, 4th rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon, and very scattering yellow pine.

Fair grass.

From reestablished cor. of secs. 4, 5, 32 and 33, on the south boundary of Tp., hereinbefore described.

N. $0^{\circ} 02' W.$, on a true line, bet. secs. 32 and 33.

Over level cultivated land.

- 6.00 Road, brs. NE. and SW.
 7.40 Juniper wash, 50 lks. wide, 10 ft. deep, course NE. Ascend 132 ft., over SE. slope. Leave open land, and enter rolling land and thick timber and undergrowth.
 9.60 Barb wire fence, brs. E. and W. Corners about 1 chain west; thence N. and SW.
 27.30 Barb wire fence, brs. E. and W., corners about 100 lks. west, thence south.
 35.00 Spur, slopes SE. Descend 26 ft., over NE slope.
 38.70 Head of rocky wash, course SE.
 39.35 (40.00 chs. S. $0^{\circ} 02' E.$, from intersection with Governing sec. line,)
 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

S 32 S 33
 1920

from which,

A cedar, 24 ins. in diam., brs. N. 85° E., 20 lks dist., mark " $\frac{1}{4}$ S 33 BT."

A juniper, 14 ins. in diam., brs. N. 64° W., 55 lks. dist., mark " $\frac{1}{4}$ S 32 BT."

Ascend 36 ft., over SE. slope.

- 44.90 Head of wash, course SE.
 46.98 Barb wire fence, brs. NW. and SE.
 48.50 Spur, slopes NE. Descend 43 ft., over N. slope.
 56.00 Shallow wash, course NE. Descend 84 ft., over N. slope to
 79.35 Intersect Governing Section line at 66 lks. S. $89^{\circ} 48'$ W., from temp. cor. of secs. 28, 29, 32 and 33.
 At point of intersection.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap, marked:

Subdivision of Township 11 North, Range 21 East.

Chains.

T11N	R21E
S29	S28
S32	S33
1920.	

from which,

- A cedar, 10 ins. in diam., brs. N.10°W., 242 lks. dist., mark "T11N R21E S29 BT."
- A cedar, 10 ins. in diam., brs. N.79°E., 149 lks. dist., mark "T11N R21E S28 BT."
- A cedar, 8 ins. in diam., brs. S.59°W., 329 lks. dist., mark "T11N R21E S32 BT."
- A cedar, 8 ins. in diam., brs. S.61°E., 261 lks. dist., mark "T11 N R21E S33 BT."

Land, level and rolling.
 Soil, south 8 chs. sandy loam, 1st rate; north 72 chs. rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar and pinon, and very scattering yellow pine.
 Fair grass.

From the cor. of secs. 27, 28, 33 and 34, S.89°48'W., on Governing Section Line, bet. secs. 28 and 33. Over slightly rolling, cultivated land. Ascend gradually over NE. slope.

- 8.36 Barb wire fence, brs. N. and S. Corners 2 chs. south; thence west paralleling line.
- 33.56 Barb wire fence, brs. N. and S. Leave cultivated land.
- 34.00 Road brs. N. and S.
- 36.00 Barb wire fence, brs. N. and S.
- House of J.L. Pierce, brs. S. about 2 chs. dist.
- 40.09 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 28
S 33
1920

from which,

- A cedar, 10 ins. in diam., brs. N.10°E., 64 lks. dist., mark " $\frac{1}{4}$ S 28 BT "
- A cedar, 6 ins. in diam., brs. S.47°W., 55 lks. dist., mark " $\frac{1}{4}$ S 33 BT."

Continue on gradual ascent of NE. slope, thru scattering timber and undergrowth, paralleling barb wire fence on north.

- 52.00 Leave timber and undergrowth. Thence over S. edge of cultivated land.
- 58.70 Leave cultivated land, and enter scattering timber and undergrowth.
- 59.00 Barb wire fence, brs. N. and S. fence cor. brs. N. about 2 chs. dist. from which fence lines extend N., S.E. and W.
- 69.80 Wash, 10 lks. wide, course N.
- 80.18 The cor. of secs. 28, 29, 32 and 33.

Land, rolling.
 Soil, east 60 chs. sandy loam, 1st rate; west 20 chs., gravelly and rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar, pinon and very scattering yellow pine.
 Fair grass.

N.0°02'W., on true line, bet. secs. 28 and 29. Over rolling land, thru. thick timber and undergrowth; descend 38 ft., over N. slope.

Chains.
 1.80 Barb wire fence, brs.E.and W.
 7.50 Shallow draw, course N. Ascend 80 ft., over S.slope.
 20.00 Ridge, brs.E. and W. Descend 41 ft., over rolling NE.slope.
 36.55 Wash, course NE. Ascend 20 ft., over SE.slope, to
 40.00 Set an iron post 3 ft.long, 1 in. in diam., 26 ins. in the
 ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

S29 $\frac{1}{4}$ S28
 1920

from which,

A pinon, 6 ins. in diam., brs.N.88°W., 42 lks.dist.,
 mark " $\frac{1}{4}$ S 29 BT."

A cedar, 10 ins.in diam., brs.S.82°E., 54 lks.dist.,
 mark " $\frac{1}{4}$ S 28 BT."

40.50 Spur, slopes NE. Descend 120 ft., over rolling NE.slope, to
 sec.cor.
 55.25 Wash, course NE.
 61.30 Fence cor.brs.W. 3 chs.dist., from which fence line extends
 N. and W.
 68.85 Road, brs.NE. and SW.
 80.00 Set an iron post, 3 ft.long, 2 ins. in diam., 24 ins. in
 the ground, for cor.of secs.20, 21, 28 and 29, with brass
 cap, marked

T11N | R21E
 S20 | S21
 S29 | S28
 1920

from which,

A cedar, 8 ins. in diam., brs.N.30° W., 52 lks.
 dist., mark "T11N R21E S20 BT."

A pinon; 5 ins.in diam., brs.N.55°E., 14 lks.
 dist., mark "T11N R21E S21 BT."

A pinon, 6 ins. in diam., brs.S.55°E., 13 lks.
 dist., mark "T11N R21E S28 BT."

A cedar, 10 ins. in diam., brs. S.78°W., 36 lks.
 dist., mark "T11N R21E S29 BT."

Land, rolling. Soil, rocky, 3rd rate.

Undergrowth, scrub cedar, pinon and oak.

Timber, cedar and pinon.

Fair grass.

40.00 N.89°48'E., on random line, bet. secs. 21 and 28.
 Set temp. $\frac{1}{4}$ sec.cor.
 80.32 Intersect N. and S.line, 13 lks.S. of cor.of secs.21, 22,
 27 and 28.
 Thence,
 S.89°43'W., on true line, bet. secs.21 and 28.
 Over slightly rolling land, thru. thick timber and scat-
 tering undergrowth.
 13.00 Old road, brs.NW. and SE.
 16.60 Telephone line, brs.NW. and SE.
 27.55 Barb wire fence, brs.N.and S.
 28.70 Road, brs.N. and S. Taylor to Linden.
 29.00 Ridge, brs.N. and S. Descend gradually over W.slope.
 32.00 Leave thick, and enter scsttering timber.
 36.30 Road, brs.NW. and SE., and joins road bearing E. and W.,
 at 3 chs.SE.
 40.16 Set an iron post, 3 ft.long, 1 in. in diam., 26 ins.in
 the ground, for $\frac{1}{4}$ sec.cor., with brass cap, marked

$\frac{1}{4}$ S 21
 S 28
 1920

from which,

A cedar, 14 ins.in diam., brs.North, 10 lks.dist.,
 mark " $\frac{1}{4}$ S 21 BT."

A pinon, 6 ins.in diam., brs.S.1°W., 37 lks.dist.,
 mark " $\frac{1}{4}$ S 28 BT."


Subdivision of Township 11 North, Range 21 East.

Chains

- 44.90 Shallow draw, course N.
- 58.20 Spur, slopes N.
- 59.30 Shallow draw, course N.
- 74.30 Shallow draw, course N.
- 77.80 Fence cor. brs. N. about 1½ chs. dist., from which fence lines extend N. and W.
- 80.32 The cor. of secs. 21, 22, 27, and 28.
Land, slightly rolling.
Soil, rocky, 3rd rate.
Undergrowth, scrub cedar and pinon.
Timber, cedar and pinon.
Fair grass.

N. 0° 02' W., on true line, bet. secs. 20 and 21.
Over rolling land, thru thick timber and undergrowth.
Descend 82 ft. over N. slope.

- 1.00 Barb wire fence, brs. E. and W.
- 22.00 Draw, course NE.
- 23.10 Enter cultivated land.
- 29.30 Leave cultivated land.
- 32.20 Draw, course N. 70° E. Ascend 11 ft., over S. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for ¼ sec. cor., with brass cap, marked:




from which,

A cedar, 20 ins. in diam., brs. N. 80° W., 231 lks. dist., mark "¼ S 20 BT."

A pinon, 10 ins. in diam., brs. S. 60° E., 113 lks. dist. mark "¼ S 21 BT."

Ascend 39 ft., over SE. slope.

- 42.00 Barb wire fence, brs. E. and W.
- 50.00 Spur, slopes NE. Descend 11 ft., over NW. slope.
- 57.60 Wash, course NE. Ascend 15 ft., over SE. slope.
- 70.00 Spur, slopes NE. Descend 63 ft., over NW. slope, to
- 75.00 Rim, brs. NE. and SW. Descend 45 ft., over steep NW. slope
- 77.40 Burton draw, 30 lks. wide, course NE.
Ascend 45 ft., over rocky SE. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, with brass cap, marked:

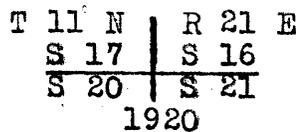

from which:

An oak, 6 ins. in diam., brs. N. 14° E., 70 lks. dist., mark "T11N R21E S16 BT."

A pine, 18 ins. in diam., brs. S. 75½° E., 17 lks. dist., mark "T11N R21E S21 BT."

A pine, 18 ins. in diam., brs. S. 52° W., 23 lks. dist., mark "T11N R21E S20 BT."

A pine, 10 ins. in diam., brs. N. 67½° W., 77 lks. dist., marked "T11N R21E S17 BT."

Land, rolling and broken.
Soil, rocky, 4th rate.
Undergrowth, scrub cedar, pinon and oak.
Timber, cedar, pinon, and scattering yellow pine.
Fair grass.

- 40.00 N. 89° 48' E., on random line, bet. secs. 16 and 21. Set temp. ¼ sec. cor.
- 80.44 Intersect N. and S. line, 3 lks. S. of the cor. of secs. 15, 16, 21 and 22.

- Chains Thence,
S. 89° 47' W., on true line, bet. secs. 16 and 21.
Over rolling land, thru thick timber and undergrowth.
Descend gradually over N. slope.
- 22.65 Road, brs. N. and S. (new route for county highway).
24.00 Wash, course N. 50° E. Ascend 16 ft., over E. slope.
27.25 Spur, slopes N. Descend 16 ft., over west slope.
35.80 Draw, course N. Ascend gradually over E. slope, to
40.22 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \text{ S } 16 \\ \frac{1}{4} \text{ S } 21 \\ 1920 \end{array}$$

from which,

- A cedar, 12 ins. in diam., brs. S. 32 $\frac{3}{4}$ ° W., 44
lks. dist., mark " $\frac{1}{4}$ S 21 BT."
- A cedar, 8 ins. in diam., brs. N. 77 $\frac{1}{2}$ ° W., 68
lks. dist., mark " $\frac{1}{4}$ S 16 BT."
- Ascend gradually over E. slope.
- 41.30 Road from Taylor to Linden, brs. N. and S.
42.40 Telephone line, brs. N. 20° W., and S. 20° E.
60.00 Low spur, slopes N. Descend 38 ft., over west slope.
65.45 Rocky ravine, 30 lks. wide, course N. Ascend 37 ft.,
over E. slope.
- 71.00 Spur, slopes N. Descend 46 ft., over NW. slope.
77.00 Burton Draw, course NE. Ascend 34 ft., over SE. slope, to
80.44 The cor. of secs. 16, 17, 20 and 21.
Land, rolling and broken.
Soil, rocky 3rd rate.
Undergrowth, cedar and pinon.
Timber, cedar, pinon, and scattering yellow pine.
Fair grass.

-
- N. 0° 02' W., bet. secs. 16 and 17.
Over rolling and broken land, thru thick timber and under-
growth. Ascend 28 ft., over SE. slope.
- 3.00 Rim, brs. NE. and SW. Thence over E. slope, to
9.00 Same rim, brs. NW. and SE. Descend 60 ft., over NE. slope
12.40 Rocky gulch; course SE. Ascend 62 ft., over S. slope.
15.00 Rim, brs. NW. and E. Thence over rolling east slope;
descend 74 ft. to
40.00 Set an iron post 3 ft. long, 1 in. in diam., 6 ins. in
the ground, supported by a mound of stone, for $\frac{1}{4}$ sec.
cor., with brass cap, marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 17 \quad | \quad \text{S } 16 \\ 1920 \end{array}$$

from which,

- A pine, 10 ins. in diam., brs. N. 72 $\frac{1}{2}$ ° E., 72
lks. dist., mark " $\frac{1}{4}$ S 16 BT."
- An oak, 6 ins. in diam., brs. S. 37 $\frac{1}{2}$ ° W., 76
lks. dist., mark " $\frac{1}{4}$ S 17 BT."
- 40.40 Head of draw, course SE. Ascend 16 ft., over S. slope.
55.00 Spur, slopes east; descend 14 ft., over N. slope.
60.20 Draw, course E. Ascend 22 ft., over SE. slope.
78.00 Ridge, brs. NE. and SW. Descend 10 ft., over NW. slope, to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
in the ground, for cor. of secs. 8, 9, 16 and 17, with
brass cap, marked:

$$\begin{array}{c} \text{T } 11 \text{ N } \quad | \quad \text{R } 21 \text{ E} \\ \text{S } 8 \quad | \quad \text{S } 9 \\ \text{S } 17 \quad | \quad \text{S } 16 \\ 1920 \end{array}$$

from which,

- A pine, 10 ins. in diam., brs. N. 38° E., 66 lks.
dist., mark "T11N R21E S9 BT."

Subdivision of Township 11 North, Range 21 East.

71

Chains A pine, 8 ins. in diam., brs. S. $8\frac{1}{2}^{\circ}$ E., 45 lks. dist., mark "T11N R21E S16 BT."
 A cedar, 12 ins. in diam., brs. S. $60\frac{1}{4}^{\circ}$ W., 125 lks. dist., mark "T11N R21E S17 BT."
 A cedar, 10 ins. in diam., brs. N. $85\frac{1}{2}^{\circ}$ W., 113 lks. dist., mark "T11N R21E S 8 BT."

Land, rolling and broken.
 Soil, rocky, 4th rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar, pinon, and yellow pine.
 Fair grass.

N. $89^{\circ} 50'$ E., on random line, bet. secs. 9 and 16.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.46 Intersect the cor. of secs. 8, 9, 16 and 17.
 Thence,
 S. $89^{\circ} 50'$ W., on a true line, bet. secs. 9 and 16.
 Over open, slightly rolling land. Ascend gradually.
 9.00 Leave open land, and enter thick timber and undergrowth, brs. N. and S.
 25.00 Ridge, brs. N. 30° E. and S. 30° W. Descend 70 ft., over W. slope.
 38.65 Burton Draw, 30 lks. wide, course N., at mouth of wash from W. Thence along wash.
 40.23 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$$\frac{1}{4} \begin{array}{c} S 9 \\ S 16 \\ 1920 \end{array}$$

from which,

A cedar, 4 ins. in diam., brs. N. 11° W., 138 lks. dist., mark " $\frac{1}{4}$ S 9 BT."
 A cedar, 4 ins. in diam., brs. S. 3° E., 150 lks. dist., mark " $\frac{1}{4}$ S 16 BT."

Ascend along wash, course E.
 45.00 Leave wash, course E. from SW. Thence along foot of S. slope.
 49.20 Shallow draw, course S. Ascend 89 ft., over E. slope.
 49.80 Road, brs. NW. and SE.
 67.15 Road from Taylor to Linden, brs. N. and S.
 67.45 Telephone line, brs. N. and S.
 80.46 The cor. of secs. 8, 9, 16 and 17.
 Land, rolling.
 Soil, sandy, gravelly and rocky, 2nd and 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Fair grass.

N. $0^{\circ} 02'$ W., on true line, bet. secs. 8 and 9.
 Over rolling land, thru thick timber and undergrowth.
 Descend 22 ft., over NW. slope.
 10.00 Shallow draw, course NE. Ascend 20 ft., over SE. slope.
 21.00 Spur, slopes E. Descend 15 ft., over N. slope.
 23.20 Shallow draw, course NE. Ascend 29 ft., over SE. slope.
 25.60 Spur, slopes E. Descend 15 ft., over N. slope.
 30.60 Head of draw, course east. Ascend 11 ft., over S. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$$S 8 \begin{array}{c} \frac{1}{4} \\ S 9 \\ 1920 \end{array}$$

from which,

Chains A cedar, 10 ins. diam., brs. S. $80\frac{1}{4}^{\circ}$ E., 75 lks.
dist., mark " $\frac{1}{4}$ S 9 BT."

A pine, 12 ins. diam., brs. S. $72\frac{1}{4}^{\circ}$ W., 196 lks.
dist., mark " $\frac{1}{4}$ S 8 BT."

Descend 45 ft., over NW. slope.

56.30 Shallow draw, course E. Thence over rolling E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, for cor. of secs. 4, 5, 8 and 9, with brass
cap marked:

T 11 N.	R 21 E
S 5	S 4
S 8	S 9
1920	

from which,

A cedar, 6 ins. in diam., brs. N. $9\frac{1}{2}^{\circ}$ E., 117
lks. dist., mark "T11N R21E S4 BT."

A cedar, 12 ins. in diam., brs. S. $16\frac{3}{4}^{\circ}$ E., 206
lks. dist., mark "T11N R21E S9 BT."

A cedar, 10 ins. in diam., brs. S. 48° W., 297
lks. dist., mark "T11N R21E S8 BT."

A cedar, 4 ins. in diam., brs. N. 77° W., 111
lks. dist., mark "T11N R21E S5 BT."

Land, rolling.

Soil, rocky; 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon, and very scattering yellow pine.

Fair grass.

N. $89^{\circ} 42'$ E., on random line, bet. secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.48 Fall 5 lks. N. of cor. of secs. 3, 4, 9 and 10.
Thence,

S. $89^{\circ} 44'$ W., on true line, bet. secs. 4 and 9.
Over rolling land, thru thick timber and undergrowth.
Ascend 10 ft., over east slope.

7.00 Ridge, brs. N. 10° E. and S. 10° W. Descend 87 ft.,
over west slope.

19.80 Rocky gulch, course NE.; ascend 47 ft., over SE. slope, to

40.24 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$ S 4
$\frac{1}{4}$ S 9
1920

from which,

A cedar, 18 ins. in diam., brs. N. $88\frac{1}{2}^{\circ}$ W., 98
lks. dist., mark " $\frac{1}{4}$ S 4 BT."

A pine, 10 ins. in diam., brs. S. 33° E., 67 lks.
dist., mark " $\frac{1}{4}$ S 9 BT."

Ascend 22 ft., over east slope.

56.15 Road, brs. N. and S.

60.00 Ridge, brs. N. and S. Descend 20 ft., over W. slope.

70.00 Draw, course N. Thence over flat, brs. N. and S.

71.80 Road, from Taylor to Linden, brs. N. and S.

74.40 Telephone line brs. N. 20° W., and S. 20° E.

77.00 Leave flat; ascend 15 ft., over E. slope, to

80.48 The cor. of secs. 4, 5, 8 and 9.

Land, rolling and level.

Soil, rocky, 3rd rate, except on flat, where there is a
black loam, 2nd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar, pinon, and very scattering yellow pine.

Fair grass.

N. $0^{\circ} 02'$ W., on true line, bet. secs. 4 and 5.

Over rolling land, thru scattering timber and undergrowth.

Subdivision of Township 11 North, Range 21 East.

73

- Chains Descend 62 ft., over NE. slope.
 9.70 Old road, brs. NE. and SW.
 13.93 Telephone line, brs. NW. and SE.
 23.30 Road, brs. NW. and SE. (Taylor to Showlow.)
 25.00 Shallow draw, course W. Ascend 40 ft., over rocky S. slope
 32.50 Spur, slopes NW. Descend 45 ft., over E. slope, to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$
 S 5 | S 4
 1920

from which,

A pine, 7 ins. in diam., brs. N. 75° W., 114 lks.
 dist., mark " $\frac{1}{4}$ S 5 BT."

A cedar, 6 ins. in diam., brs. S. 23 $\frac{1}{2}$ ° E., 97 lks.
 dist., mark " $\frac{1}{4}$ S 4 BT."

Descend 37 ft., over N. slope.

- 43.50 Rocky wash, 30 lks. wide, course N. 70° E. Ascend 48 ft.
 over S. slope.

- 52.00 Spur, slopes NE. Descend 11 ft., over N. slope, to

- 54.06 Intersect S. bdy. of T. 12 N., R. 21 E., at 9.96 chs. N.
 88° 12' E., from reestablished $\frac{1}{4}$ sec. cor. of sec.
 33, hereinbefore described.

Set an iron post, 3 ft. long, 2 in. in diam., over cross
 (X) on surface rock, supported in a mound of stone 5
 ft. base, 2 $\frac{1}{2}$ ft. high, for closing cor. of secs. 4 and
 5, on S. bdy. of T. 12 N., R. 21 E., with brass cap,
 marked:

T 12 N R 21 E
 S 33
 T 11 N | R 21 E
 S 5 | S 4
 C | C
 1920

From which,

A cedar, 16 ins. in diam., brs. S. 19° E., 38
 lks. dist., mark "CC T11N R21E S4 BT."

A pine, 8 ins. in diam., brs. S. 60° W., 92
 lks. dist., mark "CC T11N R21E S5 BT."

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon, and very scattering yellow pine.

Fair grass.

From reestablished cor. of secs. 5, 6, 31 and 32 on the
 S. bdy. of the Tp., hereinbefore described.

N. 0° 02' W., on true line, bet. secs. 31 and 32.

Over rolling land, thru thick timber and undergrowth.

Ascend 43 ft., over S. slope.

- 2.00 Point of spur, slopes SE. Descend 23 ft., over N. slope.

- 10.50 Rocky wash, course N. 70° E. Ascend 28 ft., over S. slope.

- 12.00 Point of spur, slopes E. from NW. Descend 25 ft., over N.
 slope.

- 17.00 Rocky wash, 15 lks. wide, course SE. Ascend 46 ft. over
 S. slope.

- 26.00 Spur, slopes SE. Descend 34 ft., over N. slope.

- 37.40 Rocky wash, 10 lks. wide, course SE. Ascend 10 ft., over
 S. slope.

- 39.34 (40.00 chs. S. 0° 02' E. from intersection with Governing
 Section Line).

Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$
 S 31 | S 32
 1920

Chains from which,
 A cedar, 8 ins. in diam., brs. N. 10° E., 46 lks.
 dist., mark "¼ S 32 BT."
 A pinon, 8 ins. in diam., brs. N. 37° W., 38 lks.
 dist., mark "¼ S 31 BT."
 Ascend 20 ft., over S. slope.
 50.00 Ridge, brs. N. 30° E. Descend 40 ft., over NW. slope.
 59.75 Draw, course N. 10° E. Descend 44 ft., over E. slope, to
 79.34 Intersect Governing Section line at 47 lks. S. 89° 48' W.
 from temp. cor. of secs. 29, 30, 31 and 32.
 At point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 29, 30, 31 and 32, with
 brass cap, marked:

T 11 N	R 21 E
S 30	S 29
S 31	S 32
1920	

from which,
 A juniper, 20 ins. in diam., brs. N. 29° W., 103
 lks. dist., mark "T11N R21E S30 BT."
 A pinon, 8 ins. in diam., brs. N. 28° E., 98 lks.
 dist., mark "T11N R21E S29 BT."
 A cedar, 18 ins. in diam., brs. S. 73° E., 126
 lks. dist., mark "T11N R21E S32 BT."
 A juniper, 14 ins. in diam., brs. S. 53° W., 9
 lks. dist., mark "T11N R21E S31 BT."
 Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar, pinon, juniper and yellow pine.
 Fair grass.

From cor. of secs. 28, 29, 32 and 33.
 S. 89° 48' W., on Governing Section Line, bet. secs. 29 and 32.
 Over rolling land, thru thick timber and undergrowth.
 Descend gradually over N. slope:
 2.70 Barb wire fence, brs. N. and S.
 17.70 Shallow draw, course NE.
 26.35 Old road, brs. NE. and SW.
 39.90½ Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for ¼ sec. cor., with brass cap, marked:

¼ S 29
¼ S 32
1920

from which,
 A cedar, 12 ins. in diam., brs. N. 58° W., 52 lks.
 dist., mark "¼ S 29 BT."
 A cedar, 14 ins. in diam., brs. S. 56° E., 51 lks.
 dist., mark "¼ S 32 BT."
 52.00 Shallow draw, course N. 70° E.; ascend 63 ft., over SE.
 slope.
 65.50 Road from Linden to Riches Ranch, brs. N. 20° W., and
 S. 20° E.
 66.00 Ridge, brs. NE. and S. Descend 34 ft., over W. slope.
 70.20 Shallow draw, course N. Ascend 20 ft., over E. slope to
 sec. cor.
 77.70 Barb wire fence, brs. N. and S. corners about 1.25 chs.
 N., thence W.
 79.81 The cor. of secs. 29, 30, 31 and 32.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar, pinon and very scattering yellow pine.
 Fair grass.

Subdivision of Township 11 North, Range 21 East.

75

- Chains From the cor. of secs. 29, 30, 31 and 32.
S. $89^{\circ} 48'$ W., on random line, bet. secs. 30 and 31.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.79 Intersect the W. bdy. of the Tp., 16 lks. N. of the re-established cor. of secs. 25, 30, 31 and 36, hereinbefore described.
- Thence,
N. $89^{\circ} 41'$ E. on a true line, bet. secs. 30 and 31.
Over rolling land, thru thick timber and undergrowth.
Descend 10 ft., over E. slope.
- 1.00 Old road, brs. NW. and SE.
- 5.35 Wash, 30 lks. wide, 3 ft. deep, course N.
Ascend 77 ft., over W. slope.
- 28.50 Ridge, brs. N. and S. Descend 52 ft., over E. slope.
- 35.00 Draw, course N. Ascend 20 ft., over W. slope.
- 35.65 Road from Linden to Taylor, brs. N. 20° E., and S. 20° W.
- 39.79 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$ S 30
 $\frac{1}{4}$ S 31
 1920

from which;

- A live oak, 8 ins. in diam., brs. N. 11° W., 58 lks. dist., mark " $\frac{1}{4}$ S 30 BT."
- A yellow pine, 9 ins. in diam., brs. S. 45° E., 87 lks. dist., mark " $\frac{1}{4}$ S 31 BT."
- Ascend 12 ft., over W. slope.
- 44.50 Spur, slopes N. 30° W. Descend 30 ft., over E. slope.
- 46.80 Wash, 20 lks. wide, 2 ft. deep, course NW.
Ascend 37 ft., over W. slope.
- 51.80 Spur, slopes N. Descend 40 ft., over E. slope.
- 62.00 Wash, course N. Ascend 15 ft., over W. slope.
- 69.00 Spur, slopes N. Descend 40 ft., over E. slope.
- 75.80 Shallow draw, course N. 30° E. Ascend 23 ft., over W. slope.
- 79.79 The cor. of secs. 29, 30, 31 and 32.
Land, rolling.
Soil, rocky 3rd rate.
Undergrowth, scrub cedar, pinon and oak.
timber, cedar, pinon, juniper and yellow pine.
Fair grass.

- N. $0^{\circ} 02'$ W., on true line, bet. secs. 29 and 30.
Over rolling land, thru thick timber and undergrowth.
Descend 23 ft., over N. slope.
- 1.00 Barb wire fence, brs. E. and W.
- 5.70 Wash, 10 lks. wide, course NE. Ascend 29 ft., over SE. slope
- 10.00 Spur, slopes NE. Descend 36 ft. over NW. slope.
- 18.20 Draw, course NE. Ascend 36 ft. over SE. slope.
- 23.50 Spur, slopes NE. Descend 56 ft., over NW. slope.
- 31.35 Draw, course NE. Ascend 25 ft., over SE. slope.
- 34.50 Spur, slopes NE. Descend 16 ft., over NW. slope.
- 38.45 Wash, 20 lks. wide, course NE. Ascend 16 ft., over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$
 S 30 S 29
 1920

from which,

- A cedar, 18 ins. in diam., brs. S. 33° W., 15 lks. dist., mark " $\frac{1}{4}$ S 30 BT."
- A live oak, 8 ins. in diam., brs. S. 81° E., 65 lks. dist., mark " $\frac{1}{4}$ S 29 BT."
- Thence along top of ridge, bearing NE. and SW.
- 51.60 Leave top of ridge; descend 105 ft., over NW. slope.

Chains

- 77.00 Shallow draw, course NE. Ascend 15 ft., over SE. slope.
- 77.75 Road, from Taylor to Linden, brs. NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 19, 30, 29 and 20, with brass cap, marked:

T 11 N	R 21 E
S 19	S 20
S 30	S 29

1920

from which,

- A juniper, 10 ins. in diam., brs. N. 83° W., 110 lks. dist., mark "T11N R21E S19 BT."
- A juniper, 24 ins. in diam., brs. N. 15° E., 85 lks. dist., mark "T11N R21E S20 BT."
- A juniper, 4 ins. in diam., brs. S. 69° E., 46 lks. dist., mark "T11N R21E S29 BT."
- A juniper, 30 ins. in diam., brs. S. 57° W., 78 lks. dist., mark "T11N R21E S30 BT."

Land, rolling.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon, juniper and yellow pine.

Fair grass.

- 40.00 N. 89° 48' E., on a random line, bet. secs. 20 and 29. Set temp. $\frac{1}{4}$ sec. cor.
- 79.76 Intersect N. and S. line, 4 lks. N. of the cor. of secs. 20, 21, 28 and 29.

Thence,

S. 89° 50' W., on a true line, bet. secs. 20 and 29. Over rolling land, thru thick timber and undergrowth. Along N. slope.

- 3.00 Barb wire fence, brs. N. and S.
- 7.80 Leave timber and undergrowth, and enter cultivated land.
- 10.40 Shallow draw, course N.
- 14.20 Leave cultivated field; enter thick timber, brs. N. and S.
- 15.80 Road, brs. N. and S.
- 18.00 A point from which House of Alvin Rhoton, brs. south, about 3.50 chs. dist.
- 20.60 Old corral on line.
- 22.40 Road, brs. N. and S. Ascend 62 ft., over east slope.
- 26.40 Spur, slopes N. Descend 65 ft., over west slope.
- 29.86 Wash, course NE. Ascend 62 ft., over east slope.
- 35.40 Ridge, slopes N. Descend 65 ft., over west slope.
- 36.06 Barb wire fence, brs. N. and S.
- 39.88 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$ S 20
$\frac{1}{4}$ S 29

1920

from which,

- A cedar, 14 ins. in diam., brs. N. 84° W., 26 lks. dist., mark " $\frac{1}{4}$ S 20 BT."
- A cedar, 20 ins. in diam., brs. S. 20° W., 34 lks. dist., mark " $\frac{1}{4}$ S 29 BT."
- 45.46 Barb wire fence, brs. NW. and SE. Leave timber and undergrowth, and enter cultivated field.
- 59.25 A point from which house of Leo Rich, brs. N. about 2 chs. dist.
- 60.90 Wash, 20 lks. wide, 3 ft. deep, course N.
- 62.40 Rich's well, brs. south 40 lks. dist.
- 64.30 Barb wire fence, brs. N. and S. Leave cultivated field; enter thick timber and undergrowth. Ascend 29 ft. over E. slope.
- 64.50 Road, brs. N. 20° E., and S. 20° W.

Subdivision of Township 11 North, Range 21 East.

77

Chains

- 66.25 NE. end of ridge, brs. NE. and SW. Descend 12 ft., over W. slope.
 75.45 Draw, course NE. Ascend 23 ft., over SE. slope to sec. cor.
 77.10 Taylor-Linden road, brs. NE. and SW.
 79.76 The cor. of secs. 19, 20, 29 and 30.
 Land, rolling.
 Soil, rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon.
 Timber, cedar and pinon.
 Fair grass.

- S. 89° 41' W., on true line, bet. secs. 19 and 30.
 Over rolling land, thru thick timber and undergrowth.
 Ascend 60 ft., over SE. slope.
 5.00 Spur, slopes NE. Descend 17 ft., over W. slope.
 7.80 Draw, course N. Descend 187 ft., over rolling N. slope.
 29.00 A point from which house of Burton, brs. N. 8° E.
 29.86 Barb wire fence, brs. N. and S. Fence cor. brs. S. 30 lks. dist., from which fence lines extend N., E., and W. Leave timber and undergrowth, and enter cultivated land.
 39.80 Wash, 20 lks. wide, course N.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$$\begin{array}{r} \frac{1}{4} S 19 \\ \frac{1}{4} S 30 \\ \hline 1920 \end{array}$$

from which,

- A cedar, 14 ins. in diam., brs. N. 83° W., 375 lks. dist., mark " $\frac{1}{4}$ S 19 BT."
 A cedar, 40 ins. in diam., brs. S. 3° E., 108 lks. dist., mark " $\frac{1}{4}$ S 30 BT."
 House of Burton bears N. 0° E.
 44.78 Barb wire fence, brs. N. and S. Fence cor. brs. S. about 50 lks. dist., from which fence lines extend E., W., and N.
 Continue over cultivated land.
 59.72 Barb wire fence, brs. N. and S. Fence cor. brs. S. about 30 lks. dist., from which fence lines extend N., S., and E.
 Leave cultivated land. Ascend 112 ft. over E. slope, thru thick timber and undergrowth.
 79.00 Spur, slopes N. Descend 10 ft., over W. slope, to
 79.64 Intersect the W. bdy. of the Tp., 29 lks. N. 0° 14' W., from the reestablished cor. of secs. 24 and 25, T. 11 N. R. 20 E., hereinbefore described.
 At point of intersection,
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for closing cor. of secs. 19 and 30, with brass cap, marked:

$$\begin{array}{r|l} T 11 N & T 11 N \\ & R 21 E \\ R 20 E & S 19 \\ S 24 & S 30 \quad C C \\ \hline & 1920 \end{array}$$

From which,

- A cedar, 10 ins. in diam., brs. N. 50° E., 25 lks. dist., mark "CC T11N R21E S19 BT."
 A cedar, 10 ins. in diam., brs. S. 55° E., 25 lks. dist., mark "CC T11N R21E S30 BT."
 Land, rolling.
 Soil, sandy loam, 1st rate where cultivated; elsewhere, gravelly and rocky, 3rd rate.
 Undergrowth, scrub cedar and pinon and oak.
 Timber, cedar and pinon. Fair grass.

Subdivision of Township 11 North, Range 21 East.

- Chains From cor. of secs. 19, 20, 29 and 30,
 N. $0^{\circ} 02' W.$, on true line, bet. secs. 19 and 20.
 Over rolling land, thru thick timber and undergrowth.
 Ascend 74 ft., over SE. slope.
- 6.40 Spur, slopes NE. Descend 157 ft., over NW. slope.
- 19.15 Road, brs. E. and W.
- 21.25 A point from which Burton school house brs. S. $67^{\circ} W.$,
 about 5 chs. dist.
- 22.85 Barb wire fence, brs. E. and W.
- 24.75 Burton draw, course NE. Ascend 23 ft., over S. slope.
- 32.75 Spur, slopes E. Descend gradually.
- 33.95 Leave timber and undergrowth, and enter cultivated land.
- 37.70 Wash, course E. Ascend gradually.
- 38.40 Leave cultivated land and enter thick timber and under-
 growth, brs. E. and W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

S 19 \uparrow S 20
 1920

from which,

A cedar, 4 ins. in diam., brs. N. $10^{\circ} W.$, 283
 lks. dist., mark " $\frac{1}{4}$ S. 19 BT."

A cedar, 10 ins. in diam., brs. S. $73^{\circ} E.$, 70
 lks. dist., mark " $\frac{1}{4}$ S. 20 BT."

Ascend 46 ft., over SE. slope.

- 42.40 Barb wire fence, brs. E. and W.
- 50.00 Spur, slopes E. Descend 15 ft., over NE. slope.
- 52.30 Draw, course E. Ascend 67 ft., over S. slope.
- 59.00 Spur, slopes E. Descend 25 ft., over rolling E. slope, to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground, for cor. of secs. 17, 18, 19 and 20, with
 brass cap, marked:

T 11 N | R 21 E
 S 18: | S 17
 S 19 | S 20
 1920

from which,

A cedar, 6 ins. in diam., brs. N. $68^{\circ} W.$, 74 lks.
 dist., mark "T11N R21E S18 BT."

A cedar, 10 ins. in diam., brs. N. $33^{\circ} E.$, 28 lks.
 dist., mark "T11N R21E S17 BT."

A cedar, 6 ins. in diam., brs. S. $74^{\circ} E.$, 98 lks.
 dist., mark "T11N R21E S20 BT."

A cedar, 8 ins. in diam., brs. S. $55^{\circ} W.$, 31 lks.
 dist., mark "T11N R21E S19 BT."

Land, rolling.

Soil, rocky, 3rd rate, except where cultivated where it
 is a sandy loam, 1st rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon.

Fair grass.

- N. $89^{\circ} 54' E.$, on a random line, bet. secs. 17 and 20.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.86 Intersect the cor. of secs. 16, 17, 20, and 21.
 Thence,
 S. $89^{\circ} 54' W.$, on true line, bet. secs. 17 and 20.
 Over rolling land, thru scattering timber and undergrowth
 Ascend 56 ft., over SE. slope.
- 3.00 Leave scattering, and enter thick timber and undergrowth,
 brs. NE. and SW.
- 14.00 Spur, slopes S. Descend 17 ft., over W. slope.
- 20.00 Small ravine, course S.
- 39.93 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$ S 17
 S 20
 1920

Subdivision of Township 11 North, Range 21 East.

79

Chains	from which,
	A cedar, 8 ins. in diam., brs. N. 67° W., 35 lks. dist., mark "1/4 S 17 BT."
	A cedar, 6 ins. in diam., brs. S. 30 3/4° W., 40 lks. dist., mark "1/4 S 20 BT."
51.35	Road, brs. N. and S.
53.50	Road, brs. NW. and SE.
55.00	Spur, slopes S. Descend 16 ft., over W. slope.
62.00	Leave timber and undergrowth, brs. N. and S. Enter open land.
65.00	Shallow draw, course SE. Ascend 40 ft., over E. slope to sec. cor.
70.00	Leave open land, and enter thick timber, brs. N. and S.
79.86	The cor. of secs. 17, 18, 19 and 20. Land, rolling. Soil, rocky, 3rd rate. Undergrowth, scrub cedar and pinon. Timber, cedar and pinon. Fair grass.

	West, on a random line, bet. secs. 18 and 19.
40.00	Set temp. 1/4 sec. cor.
79.57	Intersect the W. bdy. of the Tp., 13 lks. N. of the re-established cor. of secs. 13, 18, 19 and 24, hereinbefore described. Thence, N. 89° 54' E., on true line, bet. secs. 18 and 19. Over rolling land, thru thick timber and undergrowth. Descend 47 ft., over SE. slope.
21.80	Old road, brs. NE. and SW.
30.40	Barb wire fence, brs. NE. and SW.
33.80	Old road, brs. NE. and SW.
35.60	Leave timber and undergrowth, and enter cultivated land, brs. NE. and SW.
39.57	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked:
	$\begin{array}{r} \frac{1}{4} \text{ S } 18 \\ \frac{1}{4} \text{ S } 19 \\ 1920 \end{array}$
	from which,
	A cedar, 4 ins. in diam., brs. N. 54° E., 169 lks. dist., mark "1/4 S 18 BT."
	A cedar, 8 ins. in diam., brs. S. 68° E., 122 lks. dist., mark "1/4 S 19 BT."
41.22	Draw, course N. Ascend 125 ft., over NW. slope.
48.50	Leave cultivated land, and enter timber and undergrowth, brs. NE. and SW.
53.92	Barb wire fence, brs. NE. and SW.
75.60	Ridge, brs. N. and S. Descend 37 ft. over E. slope, to
79.57	The cor. of secs. 17, 18, 19 and 20. Land, rolling. Soil, rocky, 3rd rate, except where cultivated, where it is a black loam, 2nd rate. Undergrowth, scrub cedar and pinon. Timber, cedar and pinon. Fair grass.

	N. 0° 02' W., on true line, bet. secs. 17 and 18. Over rolling land, thru thick timber and undergrowth. Descend 50 ft., over E. slope, to
17.00	Top of ridge, brs. E. and S. Descend 70 ft., over N. slope
28.58	Barb wire fence, brs. E. and W. Leave timber and undergrowth, and enter cultivated land.
29.35	Old road, brs. NW. and SE.
34.50	Shallow draw, course east. Ascend gradual S. slope.
40.00	Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for 1/4 sec. cor., with brass cap, marked:

80

Subdivision of Township 11 North, Range 21 East.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 18 \quad | \quad \text{S } 17 \\ 1920 \end{array}$$

- from which,
- A cedar, 40 ins. in diam., brs. N. 57° E., 138 lks. dist., mark " $\frac{1}{4}$ S 17 BT."
 - A cedar, 10 ins. in diam., brs. N. 49° W., 142 lks. dist., mark " $\frac{1}{4}$ S 18 BT."
 - House of Sutton, brs. S. 70° E., 150 lks. dist.
- 41.40 Brush fence, brs. E. and W. Leave cultivated field and enter thick timber and undergrowth.
- 41.60 Road, brs. NW. and SE. Ascend 33 ft. over S. slope.
- 53.50 Spur, slopes NE. Descend 51 ft., over N. slope.
- 68.50 Draw, course E.
- 69.20 Old road, brs. E. and W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap, marked:

$$\begin{array}{c} \text{T } 11 \text{ N} \quad | \quad \text{R } 21 \text{ E} \\ \text{S } 7 \quad | \quad \text{S } 8 \\ \text{S } 18 \quad | \quad \text{S } 17 \\ 1920 \end{array}$$

- from which,
- A pinon, 12 ins. in diam., brs. N. 45° W., 61 lks. dist., mark "T11N R21E S7 BT."
 - A cedar, 10 ins. in diam., brs. N. 66° E., 38 lks. dist., mark "T11N R21E S8 BT."
 - A pinon, 10 ins. in diam., brs. S. 17° E., 68 lks. dist., mark "T11N R21E S17 BT."
 - A cedar, 10 ins. in diam., brs. S. 80° W., 42 lks. dist., mark "T11N R21E S18 BT."
- Land, rolling.
- Soil, rocky, 3rd rate, except where cultivated, and along draws, where is it a sandy black loam, 2nd rate.
- Undergrowth, scrub cedar and pinon.
- Timber, cedar and pinon.
- Fair grass.

-
- N. 89° 44' E., on a random line, bet. secs. 8 and 17.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.84 Intersect the cor. of secs. 8, 9, 16 and 17.
- Thence,
- S. 89° 44' W., on a true line, bet. secs. 8 and 17.
- Over rolling land, thru thick timber and undergrowth. Descend gradually, over NW. slope.
- 19.30 Head of shallow draw, course N. Ascend 55 ft., over E. slope.
- 26.00 Road, from Linden to Taylor, brs. N. and S.
- 33.00 Ridge, brs. N. and S. Descend 11 ft., over W. slope, to
- 39.92 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$$\begin{array}{c} \text{S } 8 \\ \frac{1}{4} \text{ S } 17 \\ 1920 \end{array}$$

- from which,
- A pine, 6 ins. in diam., brs. N. 13 $\frac{1}{2}$ ° W., 81 lks. dist., marked " $\frac{1}{4}$ S 8 BT."
 - A cedar, 8 ins. in diam., brs. S. 18 $\frac{1}{2}$ ° W., 214 lks. dist., marked " $\frac{1}{4}$ S 17 BT."
- 40.00 Bull Ranch draw, course N. Ascend 20 ft., over E. slope.
- 50.00 Spur, slopes NE. Descend 21 ft. over W. slope.
- 67.00 Draw, course NE. Ascend 30 ft., over NE. slope, to
- 79.84 The cor. of secs. 7, 8, 17 and 18.
- Land, rolling.
- Soil, rocky, 3rd rate, some sandy black loam, 2nd rate along draws.

Subdivision of Township 11 North, Range 21 East

81

Chains	Undergrowth, scrub cedar and pinon. Timber, cedar and pinon. Fair grass.

	West, on a random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.63	Intersect West bdy. of Tp., 7 lks. N. of the reestablished cor. of secs. 7, 12, 13, and 18, hereinbefore described.
	Thence, N. $89^{\circ} 57'$ E., on true line, bet. secs. 7 and 18. Over rolling land, thru thick timber and undergrowth. Descend gradually over E. slope.
5.15	Old road, brs. NW. and SE.
22.00	Top of bank of wash, brs. N. and S. Descend 28 ft., over rocky E. slope.
25.00	Rocky wash, 20 lks. wide, course N. Ascend 30 ft. over rocky W. slope, to
30.10	Top of bank of wash, brs. N. and S. Thence ascend gradually, over W. slope.
39.63	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:
	$\begin{array}{c} \frac{1}{4} \text{ S } 7 \\ \frac{1}{4} \text{ S } 18 \\ 1920 \end{array}$
	from which, A cedar, 14 ins. in diam., brs. N. 27° W., 28 lks. dist., mark " $\frac{1}{4}$ S 7 BT."
	A cedar, 10 ins. in diam., brs. S. 19° E., 35 lks. dist., mark " $\frac{1}{4}$ S 18 BT."
40.00	Spur, slopes N. Descend 52 ft., over E. slope.
56.70	Wash, 20 lks. wide, course NE. Ascend 27 ft., over SW. slope.
64.63	Spur, slopes NW. Descend along N. slope, to
79.63	The cor. of secs. 7, 8, 17, and 18. Land, rolling. Soil, rocky 3rd rate. Undergrowth, scrub cedar and pinon. Timber, cedar and pinon. Fair grass.

	N. $0^{\circ} 02'$ W., on true line, bet. secs. 7 and 8. Over rolling land, thru thick timber and undergrowth. Descend 50 ft., over N. slope, to $\frac{1}{4}$ sec. cor.
36.00	Dim road, brs. E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked
	$\begin{array}{c} \text{S } 7 \uparrow \text{ S } 8 \\ 1920 \end{array}$
	from which, A cedar, 14 ins. in diam., brs. N. 47° W., 16 lks. dist., mark " $\frac{1}{4}$ S 7 BT."
	A cedar, 12 ins. in diam., brs. S. 71° E., 12 lks. dist., mark " $\frac{1}{4}$ S 8 BT."
	Descend 150 ft., over NW. slope.
67.00	Rim of gulch, brs. NE. and SW. Descend 61 ft. over steep rocky, NW. slope.
69.80	Rocky wash, 20 lks. wide, course S. 70° E. Ascend 56 ft. over rocky S. slope.
74.00	Point of spur, slopes E. Descend 75 ft., over N. slope.
77.90	Same wash, course N. 80° W. Ascend 83 ft., over rocky S. slope.
79.50	Point of spur, slopes W. Descend 25 ft., over N. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in

Chains

the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap, marked:

T 11 N	R 21 E
S 6	S 5
S 7	S 8

1920

from which,

- A pinon, 11 ins. in diam., brs. N. 54° W., 60 lks. dist., mark "T11N R21E S6 BT."
- A pinon, 10 ins. in diam., brs. N. 47° E., 25 lks. dist., mark "T11N R21E S5 BT."
- A pinon, 12 ins. in diam., brs. S. 43° E., 37 lks. dist., mark "T11N R21E S8 BT."
- A pinon, 10 ins. in diam., brs. S. 62° W., 65 lks. dist., mark "T11N R21E S7 BT."

Land, rolling and broken.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar and pinon.

Fair grass.

-
- N. 89° 41' E., on a random line, bet. secs. 5 and 8.
 - 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 - 80.24 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 4, 5, 8, and 9.
 - Thence,
 - S. 89° 42' W., on a true line, bet. secs. 5 and 8.
 - Over rolling land, thru scattering undergrowth, and timber. Descend 25 ft., over W. slope.
 - 7.60 Road, brs. NE. and SW.
 - 10.00 Shallow draw, course N. Ascend 40 ft., over E. slope.
 - 18.85 Old road, brs. N. and S.
 - 21.50 Spur, slopes NE. Descend 20 ft., over W. slope.
 - 31.70 Road from Linden to Taylor, brs. N. and S.
 - 31.80 Bull Ranch Draw, course N. Ascend 35 ft., over E. slope, to
 - 40.12 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked

$\frac{1}{4}$ S 5	S 8
-------------------	-----

1920

from which,

- A pine, 8 ins. in diam., brs. N. 59 $\frac{1}{2}$ ° W., 38 lks. dist., mark " $\frac{1}{4}$ S 5 BT."
- A cedar, 8 ins. in diam., brs. S. 66° W., 54 lks. dist., mark " $\frac{1}{4}$ S 8 BT."
- 40.29 Spur, slopes N. Descend 10 ft., over W. slope.
- 45.00 Shallow draw, course N. 30° E. Ascend 57 ft., over E. slope.
- 55.00 Spur, slopes NE. Descend 17 ft., over W. slope.
- 64.50 Rocky wash, course N. Ascend 53 ft., over E. slope.
- 70.00 Spur, slopes N. Descend 74 ft., over NW. slope, to
- 80.24 Land, rolling.
- Soil, rocky, 3rd rate.
- Undergrowth, scrub cedar, pinon, oak.
- Timber, cedar and pinon.
- Poor grass.

-
- West, on a random line, bet. secs. 6 and 7.
 - 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 - 79.59 Intersect W. bdy. of Tp., 2 lks. N. of reestablished cor. of secs. 1, 6, 7, and 12, hereinbefore described.
 - Thence,
 - N. 89° 59' E., on a true line, bet. secs. 6 and 7.
 - Over rolling and broken land, thru thick timber and undergrowth. Descend 15 ft., over rocky S. slope.
 - 3.70 Rocky wash, course S. Ascend 62 ft., over SW. slope.

Subdivision of Township 11 North, Range 21 East.

Chains

- 14.70 Spur, slopes S. Descend 80 ft., over E. slope.
- 22.50 Rocky wash, 20 lks. wide, course S. Ascend 28 ft., over W. slope.
- 29.10 Spur, slopes S. Descend 69 ft., over SE. slope.
- 34.20 Bull Hollow wash, 30 lks. wide, course NE. Ascend 28 ft., over NW. slope, to
- 39.59 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$ S 6
 $\frac{1}{4}$ S 7
 1920

from which,

A cedar, 8 ins. in diam., brs. N. 45° E., 60 lks. dist., mark " $\frac{1}{4}$ S 6 BT."

A pinon, 8 ins. in diam., brs. S. 24° E., 23 lks. dist., mark " $\frac{1}{4}$ S 7 BT."

- Descend 33 ft., over E. slope.
- 43.30 Rocky wash, 30 lks. wide, course N. Ascend 39 ft., over W. slope.
- 50.50 Spur, slopes N. Descend 23 ft., over E. slope.
- 53.20 Small wash, 10 lks. wide, course N. Ascend 79 ft., over W. slope.
- 65.00 Spur, slopes NW. Descend 103 ft., over steep E. slope.
- 70.70 Rocky gulch, 40 lks. wide, course N. Ascend 60 ft., over steep W. slope.
- 76.40 Point of spur, slopes W. Descend 33 ft., over N. slope, to
- 79.59 The cor. of secs. 5, 6, 7 and 8.
 Land, rolling and broken.
 Soil, rocky, 4th rate.
 Undergrowth, scrub cedar, pinon and oak.
 Timber, cedar and pinon, and very scattering yellow pine.
 Fair grass.

N. 0° 02' W., on true line, bet. secs. 5 and 6.
 Over rolling and broken land; thru thick timber and undergrowth. Descend 60 ft., over steep N. slope.

- 2.10 Rocky gulch, course N. 70° W. Ascend 74 ft., over rocky S. slope.
- 9.90 Spur, slopes NE. Descend 50 ft., over N. slope.
- 14.60 S. rim of canyon, brs. NE. and SW. Descend 124 ft., over steep N. slope.
- 17.90 Bull Hollow wash, 50 lks. wide, course NE. Ascend 135 ft., over S. slope.
- 24.50 N. rim of canyon, brs. NE. and SW. Descend 11 ft. over gradual N. slope, to
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap, marked:

$\frac{1}{4}$
 S 6 ↓ S 5
 1920

from which,

A cedar, 6 ins. in diam., brs. S. 32° E., 25 lks. dist., mark " $\frac{1}{4}$ S 5 BT."

A cedar, 12 ins. in diam., brs. S. 66° W., 38 lks. dist., mark " $\frac{1}{4}$ S 6 BT."

- Descend 22 ft., over N. slope, to
- 54.50 Intersect South bdy. of T. 12 N., R. 21 E., at 10.25 chs. S. 89° 38' E., from reestablished $\frac{1}{4}$ sec. cor. of sec. 32, hereinbefore described.
 At point of intersection, set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for closing cor. of secs. 5 and 6, with brass cap, marked:

Chains

T 12 N.	R 21 E
S 32	
S 6	S 5
C	C
T 11 N.	R 21 E
1920	

from which,

A cedar, 8 ins. in diam., brs. S. 76° E., 33 lks.
dist., mark "CC T11N R21E S5 BT."

A cedar, 12 ins. in diam., brs. S. 72° W., 18 lks.
dist., mark "CC T11N R21E S6 BT."

Land, rolling and broken.

Soil, rocky, 3rd rate.

Undergrowth, scrub cedar and pinon.

Timber, cedar, pinon, and very scattering yellow pine.

Fair grass.

GENERAL DESCRIPTION.

This township is situated in the foothills of the Mogollon Mountains, and about 6 miles north of the Divide by that name. The approximate elevation is about 6000 feet. The mean magnetic declination of this Tp. is 14° E. The principal watercourse is Showlow Creek, which, carrying a permanent flow of water, drains north. The principal tributaries of this stream are Juniper Wash, Burton Draw, Bull Ranch Draw, and Bull Hollow wash, which, carrying intermittent streams of water, drain NE.

East of Showlow Creek, the land on Malpai Mesa, has a nearly level surface, covered with small stones, and Malpai outcroppings.

The remainder of that portion of the Tp., on the east side of Showlow Creek, is slightly rolling, with open nearly level flats in several of the NE. sections.

West of Showlow Creek the land is rolling and broken, with the exception of several valleys, which are nearly level. The NW. cor. of the Tp. is of limestone formation.

East of Showlow Creek the soil is a mixture of loam and clay, 3rd rate, and about 2 ft. to bedrock.

West of Showlow Creek, the soil ranges from a rocky 4th rate, on the slopes to black, sandy loam, 1st rate, in cultivated fields.

The township is embraced in the Sitgreaves National Forest. A thick growth of cedar and pinon covers the Tp., with the exception of the NE. cor., where the land becomes open in several sections, with thinly scattered clumps of timber and undergrowth. The above mentioned timber, with scattering junipers (in the SE. portion of the township) have a value only as fence posts. There is a good growth of pine in secs. 16 and 17, and in the secs. along the south bdy. west of Showlow Creek, which has a good commercial value. A scattering growth of pine is also found along Showlow Creek, and its tributaries.

The undergrowth in the township consists chiefly of young timber, cedar and pinon, scattering oak brush, and other low brush of unknown species.

No indication of any mineral in this township. At present, there are three wells in the township; two of them are in sec. 33, one on the homestead of E. Hatch, and one on the homestead of Chase Rogers. The third well

is in sec. 29 on the homestead of Leo. Rich; this well supplies at times the needs of all the settlers in this region.

SETTLEMENT: At present there are three settlers in sec. 33: Chase Rogers, E. R. Hatch and J. L. Pierce, whose improvements consist of buildings, fences, and cultivated land.

In sec. 20, there are three settlers, L. Rich, L. L. Perkins and Heber Rhoton, with improvements consisting of buildings, fences and cultivated land.

In sec. 19, there are two settlers: E. A. Reidhead and A. Burton, with improvements consisting of buildings, fences and cultivated land. The Burton School house is in the SE. cor. of this sec. Sec. 17 contains 1 settler, J. J. Sutton, with improvements consisting of a house, fences and cultivated land. In sec. 20, there are two settlers, L. Rich (well) and Alvin Rhoton, with houses, fences and cultivated land as improvements. Sec. 28 contains 2 settlers, James Rhoton and W. Davis. Davis's improvements consists of a house, fences and cultivated land. W. C. Gardner has a homestead in sec. 33 in the east part; improvements consisting of fences only. Mrs. J. Pierce has a homestead in sec. 33, with improvements consisting of fences and cultivated land.

ROADS: The principal roads thru. the township are the roads from Taylor to Showlow, and the road from Taylor to Linden. The route of the Showlow-Taylor road follows the old Holbrook-Ft. Apache wagon road. The above are good routes for automobiles or wagons. The main route from Pinedale to Taylor crosses the extreme NW. corner of the Tp. The main road from Shumway to Showlow crosses thru. the extreme NE. corner of sec. 1, and is paralleled by a telephone line. A telephone line parallels closely the Showlow to Taylor road thru. the township. Numerous other roads traverse the township, giving access to nearly every part of the same, except the southeastern portion, which is nearly inaccessible for wagons.

INDUSTRY: The industrial possibilities of the township are confined to agricultural pursuits and stockraising. Corn, grain and potatoes figure chiefly as the most promising crops to be raised. A good growth of gramma, filaree and six-weeks grass are found on the slopes and in the draws and valleys.

DRY LAKES: There are old dry lakes in secs. 17, 21, 24 and 25.

September 27, 1920. In camp near the cor. of secs. 13, 14, 23 and 24, T. 11 N., R. 21 E. in approximate longitude $110^{\circ}42'W.$, and latitude $34^{\circ}20'N.$ as determined by the mean of altitude observations on the Sun, herein-after described, at 7h. 10m. p.m. t., observe Polaris at Eastern elongation, making two observations, one each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined, with a nail in the peg, driven firmly in the ground, about 5 chs. north.

Sept. 28, 1920, at the same station, lay off the azimuth, $1^{\circ}21'20''$ to the west, and mark the meridian thus determined by a nail in a peg driven firmly in the ground about 5 chs. north.

Sept. 29, 1920. At the same station, make a meridian observation upon the sun for time, and latitude, observing simultaneously the altitude of the sun's upper limb, and the transit of the sun's west limb, reversing the telescope and observing simultaneously the

'86

altitude of the sun's upper limb and the transit of the sun's west limb, reversing the telescope and observing simultaneously the altitude of the sun's lower limb and the transit of the sun's east limb.

Mean observed altitude = $53^{\circ} 09' 59''$.
 Reduced latitude, = $34^{\circ} 19' 45''$

Mean watch time of obsn. = 11h.46m.10s.
 Watch slow of local mean time = 4m.5s.

October 3rd, 1920. At the same station as above, examine the adjustments of the instruments and correct all errors. Then test the solar apparatus, by comparing its indications hourly with the meridian established by observation on Polaris Sept. 27, 1920, previously described.

At 8h.00m. a.m., l.m.t., set off $34^{\circ} 20' N.$ on the latitude arc, and $3^{\circ} 58' S.$ on the decl. arc, and determine a meridian which is found to agree with the true meridian.

At apparent noon, with the latitude arc unchanged, observe the sun on the meridian. The resulting reading of the decl. arc is $4^{\circ} 03'$, which agrees with the computed decl.

At 4h.00m. p.m., l.m.t., with the latitude unchanged, set off $4^{\circ} 06' S.$ on the decl. arc, and determine a meridian which is found to agree with the true meridian.

As all of the observations during the usual hours of solar work come within $1' 30''$ of the true meridian, conclude that the adjustments of the instrument are satisfactory.

CERTIFICATE OF UNITED STATES CADASTRAL ENGINEER.

BOOK 3501

I, Sidney E. Blout, U. S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Groups 93 and 94, Arizona, bearing date of the 28th day of September, 1928, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ~~surveyed~~ ^{resurveyed} all those parts or portions of the

South boundary of Township 12 North, Range 21 East, East bdy. of Township 12 North, Range 21 East, South bdy. of Township 12 North, Range 22 East, South bdy. of Township 11 North, Range 21 East, and ~~surveyed all those~~ ^{parts or portions of the} Subdivision lines of Township 11 North, Range 21 East,

of the Gila and Salt River Base and Meridian, in the State of Arizona, and by diagram on page 2 hereof

the foregoing field notes ^{and} having been executed by me, and under my direction; and that all the corners of said ~~survey~~ ^{resurvey and} have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Groups 93 and 94,

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ~~resurvey and survey.~~

Place Phoenix, Arizona.

Sidney E. Blout
U. S. Cadastral Engineer.

Date October 21, 1921

APPROVAL

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

, 191

The foregoing field notes of the survey of

executed by under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

CERTIFICATE OF UNITED STATES TRANSITMAN.

BULL

I, Benjamin J. Kinsey, U. S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Groups 93 and 94 Arizona bearing date of the 28th day of September, 1918, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States: resurveyed all those parts or portions of the South and East Boundaries of T12N, R21E, the South boundary of T12N, R22E, and the East, West and South Boundaries of T11N R21E., and Surveyed all those parts or portions of the Subdivision lines of T11N R21E.

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes and by diagram on page 2 hereof as having been executed by me, and under my direction; and that all the corners of said resurvey and survey and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Groups 93 & 94 Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such resurvey and survey.

Place, Phoenix Arizona.
Date, Sept. 19, 1921.

Benjamin J. Kinsey
U.S. Transitman

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix Arizona, Nov. 15 1921.

The foregoing field notes of the resurvey of Parts of the South and East boundaries of T. 12 N., R. 21 E., Part of the South boundary of T. 12 N., R. 22 E. and All of the East, West and South boundaries of T. 11 N., R. 21 E., and of the Survey of

All of the Subdivision lines of Township 11 North Range 21 East of the Gila and Salt River Base and Meridian, in the State of Arizona.

executed by Benjamin J. Kinsey, U.S. Transitman

under his special instructions dated Sept. 28, 1918 for Groups Nos. 93 & 94 Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the resurveys and surveys they describe, are hereby approved.

Frank A. Frost
U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in this office has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.