

3544

Book "D"

4-679

BOOK 3544

FIELD NOTES

OF THE SURVEY OF THE

West boundary,

North boundary, and

Subdivision lines

of

TOWNSHIP 25 NORTH, RANGE 11 WEST,

(within the Hualpai Indian Reservation)

Of the Gila and Salt River Base and Meridian,

In the State of Arizona.

EXECUTED BY

Horace M. Muscott, Francis R. Ihrie and Claude F. Warner,

U. S. Transitmen,

In the capacity of U. S. Surveyors, under Special Instructions dated February 26, 1920, issued by the United States Surveyor General to govern surveys included in Group No. 108, Arizona, which were approved by the Commissioner of the General Land Office, March 10, 1920, and Assignment Instructions dated August 7, 1920, September 28, 1920.

Survey commenced September 9, 1920

Survey completed October 6, 1920.

3544

3544


1A

Book "D"

Group 108 - - - - Arizona.

BOOK 3544

INDEX DIAGRAM.

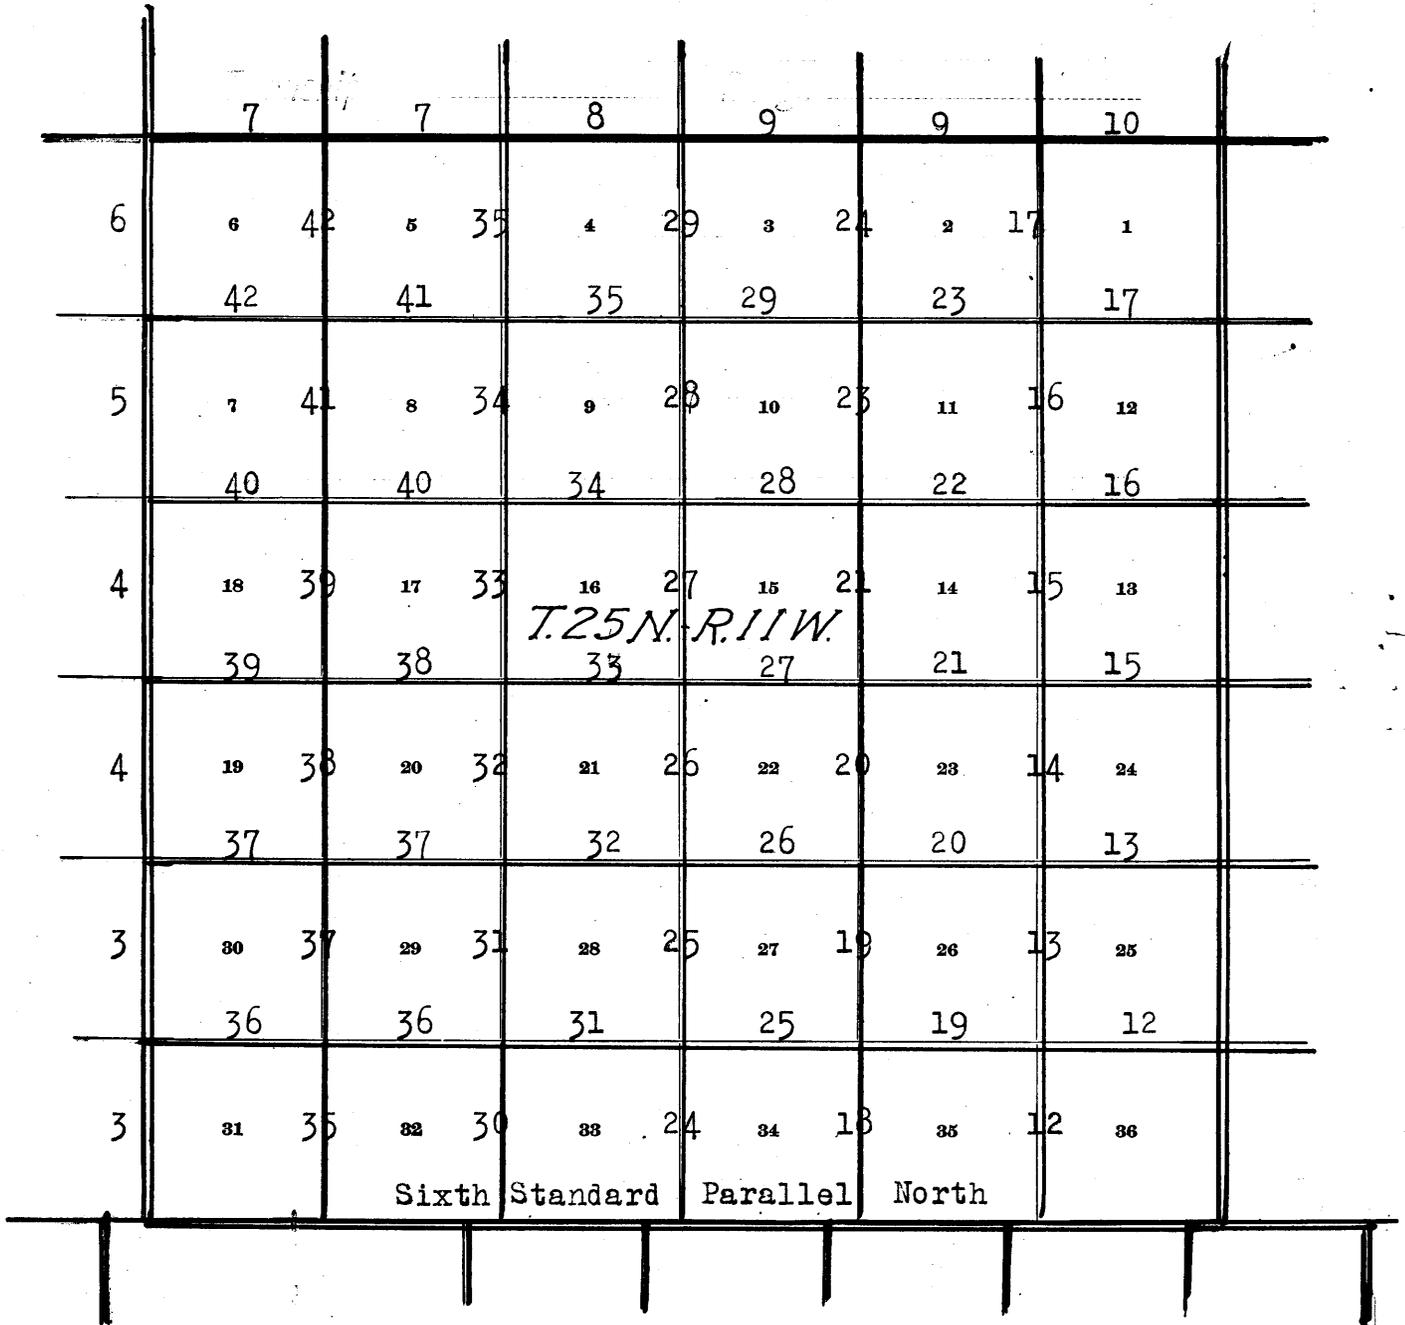

—— Lines surveyed under this group.

—— Lines surveyed under Group No.109.

Book "D"

Group 108 - Arizona.

Township 25 North, Range 11 West.

DATE DIAGRAM.

	9-30-20	9-29-20	9-28-20	9-28-20	9-27-20	9-25-20
9-16-20	6 10-5-20	5 10-6-20	4 10-6-20	3 10-4-20	2 10-1-20	1 9-24-20
9-16-20	7 10-4-20	8 10-4-20	9 9-29-20	10 9-25-20	11 9-23-20	12 9-18-20
9-10-20	18 9-21-20	17 9-30-20	16 9-21-20	15 9-20-20	14 9-17-20	13 9-15-20
9-10-20	19 9-16-20	20 9-20-20	21 9-20-20	22 9-20-20	23 9-15-20	24 9-13-20
9-9-20	30 9-14-20	29 9-16-20	28 9-17-20	27 9-16-20	26 9-11-20	25 9-11-20
9-9-20	31 9-14-20	32 9-17-20	33 9-16-20	34 9-11-20	35 9-10-20	36 9-10-20

Sixth Standard Parallel North

Green lines indicate surveys executed by Claude F. Warner, U. S. T., on dates shown thereon.

Red lines indicate surveys executed by Morace W. Muscott, U. S. T., on dates shown thereon.

Blue lines indicate surveys executed by Francis R. Ihrie, U. S. T., on dates shown thereon.

Surveys commenced Sept. 9, 1920 and executed with Young and Sons light mountain Transit No. 8489, and Buff Rocky Mountain Favorite Transit No. 9977. Both instruments are equipped with the Smith solar attachment and full vertical circle. Unless otherwise specified, all azimuth determinations are accomplished with the solar attachment.

Sept. 6, 1920, we examine the adjustments of the instruments and correct all errors; then to test the solar apparatus by comparing their indications resulting from observations made during a.m. and p.m. hours with a meridian established by Polaris observation, we proceed as follows:- At camp near the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, T. 25 N., R. 11 W., G. & S. R. B. & M., Arizona, lat. $35^{\circ}31\frac{1}{2}'$ N., long. $113^{\circ}25\frac{1}{2}'$ W. at 8h. 32.6m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a peg driven firmly in the ground, 5 chs. north.

Azimuth of Polaris at eastern elongation = $1^{\circ}22'43''$

Sept. 7, 1920: At 7h. 0m., a.m., l.m.t., lay off the azimuth of Polaris $1^{\circ}22\frac{1}{2}'$ to the west and mark the meridian thus determined by a tack in a peg driven firmly in the ground 5 chs. north.

At 9h 00m a.m., l.m.t., set off $35^{\circ}31\frac{1}{2}'$ on the latitude arcs. $6^{\circ}02'$ N., on the declination arcs and determine a meridian with each solar, which in each case agrees with the true meridian.

At apparent noon, with the lat. arcs unchanged, we observe the sun on the meridian with each solar; the resulting declination in each case is $5^{\circ}59'$ N., which agrees with the computed decl. of the sun.

At 3h 00m., p.m., l.m.t., with the latitude arcs unchanged, we set off $5^{\circ}56\frac{1}{2}'$ N., on the declination arcs and determine a meridian with each solar, which we find to agree with the true meridian, as all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, we conclude that the adjustments of the instruments are satisfactory.

Unless otherwise specified all measurements are made with a Lufkin steel tape 5 chs. in length, compared with a Lufkin standard 1 ch. steel tape and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

West Boundary of T. 25 N., R. 11 W.

Chains From the standard cor. of Ts. 25 N., Rs. 11 and 12 W.,
described in Book "B",
North, bet. secs. 31 and 36.
Over rolling land, thru scattering undergrowth.
Asc. 70 ft.
6.00 Spur, slopes E. Desc. 30 ft.
16.00 Head of ravine, course SE. Asc.
33.00 Low spur, slopes SW. Desc.
36.50 Draw, course SW. Asc.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 36 | S 31

1920

71.50 Dig pits 18 x 18 x 12 ins. N. and S. of post 3 ft. dist.
Thence over gently rolling land.
80.00 Draw, course S. 50° W.
Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
in the ground, for cor. of secs. 25, 30, 31 and 36,
marked on brass cap

T25N
 R12W | R11W
 S 25 | S 30
 S 36 | S 31
 1920

Dig pits 18 x 18 x 12 ins. NE., SE., SW. and NW. of post,
3 ft. dist.
Land; rolling, and gently rolling.
Soil; 2nd rate.
Timber; none.
Undergrowth; cactus and sagebrush.
Good grass.

18.00 North, bet. secs. 25 and 30.
Over rolling land, thru scattering timber and undergrowth.
Ascend gradually
National Old Trails Highway brs. N. 50° E., to Peach Springs
and S. 50° W. to Crozier.
23.00 Low ridge, bears NE. and SW. Desc. gradually.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 25 | S 30

1920

53.50 Dig pits 18 x 18 x 12 ins. N. and S. of post 3 ft. dist.
Thence over gently rolling land.
56.00 Draw, course W. Asc. gradually.
60.00 Road, bears E. and W.
Enter scattering timber.
78.80 Top of ascent brs. E. and W. Desc.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for cor. of secs. 19, 24, 25 and 30, marked
on brass cap

T25N
 R12W | R11W
 S 24 | S 19
 S 25 | S 30
 1920

from which
A pinyon, 10 ins. in diam., bears N. 39° E., 126 lks. dist.
marked T 25 N R11 W S19 B T

West Boundary of T. 25 N., R. 11 W.


Chains

- . A cedar, 8 ins. in diam., bears S. $34\frac{1}{2}^{\circ}$ E., 121 lks. dist. marked T 25 N R 11 W S 30 B T
- A pinyon, 6 ins. in diam., bears S. $42\frac{1}{2}^{\circ}$ W., 100 lks. dist marked T 25 N R 12 W S 25 B T
- A cedar, 12 ins. in diam., bears N. $74\frac{1}{2}^{\circ}$ W., 122 lks. dist. marked T 25 N R 12 W S 24 B T

Land; rolling and gently rolling.
 Soil; 3d rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; sagebrush and cactus.
 Good grass.

 North, bet. secs. 19 and 24.
 Over rolling land, thru scattering timber and undergrowth.
 Desc. 70 ft.
 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap


25.00
 40.00



- from which
- A pine, 16 ins. in diam., bears N. 71° E., 146 lks. dist. marked $\frac{1}{4}$ S 19 B T.
 - A cedar, 5 ins. in diam., bears S. 82° W., 170 lks. dist. marked $\frac{1}{4}$ S 24 B T

Continue gradual descent 40 ft.
 Road, bears SE. and NW., thence over gently rolling land.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 13, 18, 19 and 24, marked on brass cap

64.80
 80.00




- from which
- A cedar, 8 ins. in diam., bears N. $3/4^{\circ}$ E., 414 lks. dist. marked T 25 N R 11 W S 18 B T
 - A cedar, 6 ins. in diam., bears S. $40\frac{3}{4}^{\circ}$ E., 358 lks. dist. marked T 25 N R 11 W S 19 B T
 - A cedar, 10 ins. in diam., bears S. $47\frac{3}{4}^{\circ}$ W., 426 lks. dist. marked T 25 N R 12 W S 24 B T
 - A cedar, 6 ins. in diam., bears N. $8\frac{1}{2}^{\circ}$ W., 523 lks. dist., marked T 25 N R 12 W S 13 B T

Land; rolling and gently rolling, drains NE.
 Soil; 3d rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; sagebrush.
 Good grass.

 North, bet. secs. 13 and 18.
 Over rolling land, thru scattering timber and undergrowth.
 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

40.00




- from which
- A cedar, 8 ins. in diam., bears N. 89° E., 129 lks. dist. marked $\frac{1}{4}$ S 18 B T

West Boundary of T. 25 N., R. 11 W.

Chains


A cedar, 18 ins. in diam., bears N.20°W., 222 lks. dist. marked $\frac{1}{4}$ S 13 B T
 Thence over gently rolling land.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 7, 12, 13 and 18, marked on brass cap



from which
 A cedar, 8 ins. in diam., bears N.48 $\frac{1}{2}$ °E., 431 lks. dist. marked T 25 N R 11 W S 7 B T
 A cedar, 10 ins. in diam., bears S.86 $\frac{1}{2}$ °E., 380 lks. dist. marked T 25 N R 11 W S 18 B T
 A cedar, 8 ins. in diam., bears S.23 $\frac{1}{2}$ °W., 275 lks. dist. marked T 25 N R 12 W S 13 B T
 A cedar, 24 ins. in diam., bears N.15 $\frac{1}{2}$ °W., 360 lks. dist. marked T 25 N R 12 W S 12 B T
 Land; rolling, drains NE.
 Soil; rocky, 3d rate.
 Timber; scrub, cedar and pinyon.
 Undergrowth; sagebrush.
 Good grass.

40.00


 north, bet. secs. 7 and 12.
 Over rolling land, thru scattering timber.
 Set an iron post 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



from which
 A cedar, 18 ins. in diam., bears N.58°E., 50 lks. dist. marked $\frac{1}{4}$ S 7 B T
 A cedar, 24 ins. in diam., bears S.66°W., 348 lks. dist. marked $\frac{1}{4}$ S 12 B T

66.70
70.70
80.00

Desc. 55 ft.
 Dry tank, bears west, 2 chs. dist. Asc. 50 ft.
 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 1, 6, 7, and 12, marked on brass cap



from which
 A cedar, 8 ins. in diam., bears N.47 $\frac{1}{2}$ °E., 19 lks. dist. marked T 25 N R 11 W S 6 B T
 A cedar, 8 ins. in diam., bears S.19 $\frac{1}{2}$ °E., 55 lks. dist. marked T 25 N R 11 W S 7 B T
 A cedar, 6 ins. in diam., bears S.45°W., 134 lks. dist. marked T 25 N R 12 W S 12 B T
 A cedar, 14 ins. in diam., bears N.69 $\frac{1}{2}$ °W., 192 lks. dist. marked T 25 N R 12 W S 1 B T
 Land; rolling, drains NE.
 Soil; rocky, 3d rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; none.
 Good grass.

West Boundary of T.25 N., R.11 W.

Chains North, bet. secs. 1 and 6.
Over mountainous land, thru scattering timber and under-
growth.
Along W. slope.
3.50 Desc. 80 ft. over N. slope.
18.50 Wash, in canyon, bears W. about 80 lks. dist.
23.40 Asc. 126 ft. over S. slope, to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in
the ground to bed rock, supported in a mound of stone, for
¼ sec. cor., marked on brass cap

S 1	S 6
-----	-----

1920

from which

A pine, 10 ins. in diam., bears N. $27\frac{1}{2}^{\circ}$ E., 133 lks. dist.
marked ¼ S 6 B T

A cedar, 5 ins. in diam., bears N. $53\frac{3}{4}^{\circ}$ W., 165 lks. dist.
marked ¼ S 1 B T

Asc. 46 ft. over S. slope to

47.00 Spur slopes W. Desc. 160 ft. over gradual N. slope to

69.10 Top of sheer wall, 150 feet high, bears NE. and SW.

72.50 Canyon, course NE. Asc. 105 ft. to

78.00 Spur, slopes E.

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 15 ins.
in the ground to bed rock, supported in a mound of
stone, for cor. of T_s. 25 and 26 N., R_s. 11 and 12 W.,
marked on brass cap

T26N

R12W	R11W
------	------

S 36	S 31
------	------

S 1	S 6
-----	-----

T25N

1920

from which

A pine, 14 ins. in diam., bears N. $70^{\circ}\frac{3}{4}$ E., 158 lks.
dist. marked T 26 N R 11 W S 31 B T

A cedar 10 ins. in diam., bears S. $16\frac{3}{4}^{\circ}$ E., 14 lks.
dist. marked T 25 N R 11 W S 6 B T

A pine, 10 ins. in diam., bears S. $42\frac{3}{4}^{\circ}$ W., 18 lks.
dist., marked T 25 N R 12 W S 1 B T

A pine, 10 ins. in diam., bears N. $52\frac{3}{4}^{\circ}$ W., 115 lks.
dist., marked T 26 N R 12 W S 36 B T.

Land; mountainous, drains N.

Soil; rocky, 3d. and 4th. rates.

Timber; pinyon and scrub cedar.

Undergrowth; chamiso and spanish dagger.

North Boundary of T. 25 N., R. 11 W.

Chains From the cor. of Ts. 25 and 26 N., Rs. 10 and 11 W., described in Book "C"

West, on a random line along the N. bdy. of T. 25 N., R. 11 W., setting temp. $\frac{1}{4}$ sec. and sec. cors. at intervals of 40 chs. and at 479.69 chs. fall 42 lks. N. of the cor. of Ts. 25 and 26 N., Rs. 11 and 12 W., hereinbefore described. The falling answers to a correction of 0°3' or 7 lks. S. per mile, counting from the NE. cor. of the Tp.

From the cor. of Ts. 25 and 26 N., Rs. 11 and 12 W., N. 89°57' E., on a true line bet. secs. 6 and 31. Over rolling land, thru dense timber and undergrowth. Desc. 100 ft. over E. slope

2.30 Wash, 40 lks. wide, 1 ft. deep, course N. Asc. 168 ft. to

5.90 Top of perpendicular wall, 100 ft. high bears N. and S.

6.30 Desc. 160 ft. over gradual SE. slope.

24.00 Canyon, course N. 80° E. Asc. 50 ft.

29.70 Spur, slopes NE. Desc.

32.70 Confluence of two canyons from SE. and SW. to N. 50° E. Asc.

34.70 Spur, slopes NE. Desc.

38.20 Canyon, course N. Asc.

39.69 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

S 31
 $\frac{1}{4}$ S 6
1920

from which

A pine, 12 ins. in diam., bears N. 71 $\frac{3}{4}$ ° E., 161 lks. dist. marked $\frac{1}{4}$ S 31 B T

A pine, 10 ins. in diam., bears S. 62° W., 247 lks. dist. marked $\frac{1}{4}$ S 6 B T

Asc. 47 ft. over NW. slope.

45.30 Top of ascent. Desc. 215 ft. over rolling NE. slope.

79.69 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground, deposit a stone marked cross(x) at base of post; and raise a mound of stone around post, for cor. of secs. 5, 6, 31 and 32, marked on brass cap

T26N	R11W
S 31	S 32
S 6	S 5
T25N	
1920	

from which

A cedar, 10 ins. in diam., bears N. 1° E., 313 lks. dist. marked T 26 N R 11 W S 32 B T

A cedar, 6 ins. in diam., bears S. 20° E., 124 lks. dist. marked T 25 N R 11 W S 5 B T

No other trees within limits.

Land; rolling.
Soil; rocky, 4th rate.
Timber; scrub cedar and pinyon.
Undergrowth; sagebrush, palo-verde, catclaw and oak.

N. 89°57' E., on a true line bet. secs. 5 and 32. Over rolling mountainous land, thru scattering timber and undergrowth.

Asc. 37 ft. to

3.00 Top of ascent. Desc. 23 ft. to

9.10 Spur, slopes NE. Desc. 126 ft. over rolling NE. slope.

20.40 Foot of descent. Thence over rolling N. slope, descending 45 ft.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

S 32
 $\frac{1}{4}$ S 5
1920

from which

North Boundary of T. 25 N., R. 11 W.

Chains	<p>A cedar, 7 ins. in diam., bears N. 68° E., 98 lks. dist. marked $\frac{1}{4}$ S 32 B T</p> <p>A cedar, 6 ins. in diam., bears S. 5$\frac{1}{4}$° E., 146 lks. dist. marked $\frac{1}{4}$ S 5 B T</p>												
50.00	Wash, 30 lks. wide, course NE.												
53.00	Enter valley, bears N. and S.												
63.20	Wash, 60 lks. wide, course N.												
65.20	Wash, 50 lks. wide, course N.												
73.00	Leave valley and enter rolling hills. Asc. 40 ft.												
75.20	Desc. 20 ft.												
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 4, 5, 32 and 33, marked on brass cap												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T26N</td> <td>R11W</td> </tr> <tr> <td>S 32</td> <td>S 33</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S 5</td> <td>S 4</td> </tr> <tr> <td colspan="2" style="text-align: center;">T25N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1920</td> </tr> </table>	T26N	R11W	S 32	S 33			S 5	S 4	T25N		1920	
T26N	R11W												
S 32	S 33												
S 5	S 4												
T25N													
1920													
	<p>from which</p> <p>A cedar, 6 ins. in diam., bears S. 24$\frac{1}{2}$° W., 48 lks. dist. marked T 25 N R 11 W S 5 B T</p> <p>A cedar, 7 ins. in diam., bears N. 61$\frac{1}{4}$° W., 193 lks. dist. marked T 26 N R 11 W S 32 B T</p> <p>No other trees within limits.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor. Land; rolling mountainous.</p> <p>Soil; rocky, 4th. rate.</p> <p>Timber; pinyon and scrub cedar.</p> <p>Undergrowth; sagebrush and mesquite.</p> <p>Good grass.</p>												

	<p>N. 89° 57' E., on a true line bet. secs. 4 and 33.</p> <p>Over rolling and mountainous land, thru scattering timber and dense undergrowth.</p>												
13.80	Wash, course N. 20° W. Asc. 40 ft. to												
18.50	Spur, slopes N. 20° W. Desc. 26 ft. to												
23.70	Wash, 40 lks. wide, course N. 20° W. Asc. 90 ft. to												
29.40	Top of ascent. Along N. slope to												
37.00	Wash, 40 lks. wide, course N. 20° W. Asc. 32 ft. to												
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>S 33</td> </tr> <tr> <td>$\frac{1}{4}$ S 4</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>1920</td> </tr> </table>	S 33	$\frac{1}{4}$ S 4			1920							
S 33													
$\frac{1}{4}$ S 4													
1920													
	<p>from which</p> <p>A cedar, 6 ins. in diam., bears N. 19 $\frac{3}{4}$° E., 9 lks. dist. marked $\frac{1}{4}$ S 33 B T</p> <p>A cedar, 4 ins. in diam., bears S. 11$\frac{1}{2}$° E., 94 lks. dist. marked $\frac{1}{4}$ S 4 B T</p> <p>Asc. 40 ft. over SW. slope to</p>												
42.40	Spur, slopes N. 20° W. Desc. 97 ft. over NE. slope to												
51.50	Wash, 40 lks. wide, course N. 20° W., Asc. 140 ft. over SW. slope to												
62.60	Spur, slopes N. 60° W. Desc. 10 ft.												
63.90	Asc. 90 ft.												
75.00	Spur, slopes NE. Desc. 113 ft. over SE. slope to												
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 3, 4, 33 and 34, marked on brass cap												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T26N</td> <td>R11W</td> </tr> <tr> <td>S 33</td> <td>S 34</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S 4</td> <td>S 3</td> </tr> <tr> <td colspan="2" style="text-align: center;">T25N</td> </tr> </table>	T26N	R11W	S 33	S 34			S 4	S 3	T25N			
T26N	R11W												
S 33	S 34												
S 4	S 3												
T25N													
	<p>Raise a mound of stone, 3$\frac{1}{2}$ ft. base, 2$\frac{1}{2}$ ft. high W. of cor.</p>												

North Boundary of T. 25 N., R.11 W.

3544

Chains

Land; rolling and mountainous.
Soil; rocky, 3d rate.
Timber; scrub cedar and pinyon.
Undergrowth; sagebrush, catclaw and scrub oak.

N.89°57'E., on a true line bet. secs. 3 and 34.
Over rolling mountainous land, thru scattering timber
and undergrowth.

3.50 Desc. 63 ft. over SE. slope.
12.00 Wash, 50 lks. wide, course NE.
Wash, 50 lks. wide, course NW. Asc. 280 ft. over SW. slope
to

31.80 Spur, slopes SE. Desc. 166 ft. over NE. slope to
39.80 Drain, course NE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in
the ground to bed rock, supported in a mound of stone,
for 1/4 sec. cor., marked on brass cap

S 34
4
S 3
1920

from which

A pine, 8 ins. in diam., bears N. 12 1/2° E., 43 lks. dist.
marked 1/4 S 34 B T

A pine, 6 ins. in diam., bears S. 12° E., 165 lks. dist.
marked 1/4 S 3 B T

Asc. 34 ft. to

45.00 Desc. 100 ft. over NE. slope to

51.30 Wash in Peach Springs Canyon, 1 ch. wide, 2 ft. deep,
course NW. Asc. 370 ft. over SW. slope to cor.

54.20 3 strand wire fence bears NW and SE.

59.00 From this point cabin at lower Peach Springs, bears
N. 46° 20' W. about 25 chs. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground for cor. of secs. 2, 3, 34 and 35, marked on
brass cap

T26N | R11W
S 34 | S 35
S 3 | S 2
T25N

Raise a mound of stone, 3 1/2 ft. high W. of cor.

Land; rolling mountainous, drains N.

Soil; rocky, 4th rate.

Timber; pinyon and scrub cedar.

Undergrowth; scrub oak, catclaw and sagebrush.

N.89°57'E., on a true line bet. secs. 2 and 35.
Over rolling mountainous land, thru scattering timber
and undergrowth.

5.80 Asc. 88 ft. over SW. slope to
17.37 Spur, slopes NW. Desc. 45 ft. to

28.30 Asc. 75 ft. to

33.60 Top of ascent. Desc. 85 ft.

39.00 Asc. 55 ft.

40.00 Desc. 25 ft.

Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in
the ground to bed rock, deposit stone, marked cross(x)
at base of post and raise mound of stone around post
for 1/4 sec. cor., marked on brass cap

S 35
4
S 2
1920

Desc. 90 ft.

52.50 Canyon, course N. Asc. 14 ft. to

56.00 Spur, slopes N. Desc. 150 ft. to

62.00 Canyon, course N. 30° E., along broken N. slope.

73.50 Canyon, course N. 30° W. Asc. 158 ft. to

North Boundary of T. 25 N., R. 11 W.

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bed rock, deposit stone marked cross (x) at base of post and raise a mound of stone around post for cor. of secs. 1, 2, 35 and 36, marked on brass cap

T26N	R11W
S 35	S 36
S 2	S 1
T25N	
1920	

Land; rolling mountainous, drains N.
Soil; rocky, 4th rate.
Timber; pinyon and scrub cedar.
Undergrowth; sagebrush, catclaw, mesquite and scrub oak.

N. 89° 57' E., on a true line bet. secs. 1 and 36.
Over mountainous land, thru scattering timber and undergrowth.

6.60 Asc. 130 ft. over W. slope to Spur, slopes N. Desc. 27 ft. to

14.70 W. wall of canyon, 200 ft. high, bears N. and S.

17.20 Canyon, course N.

19.70 E. wall of canyon, 200 ft. high, bears N. and S.
Cont. asc. 90 ft. to

30.50 Spur, slopes N. 20° W. Desc. 25 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	S 36
	S 1
	1920

from which

A pine, 8 ins. in diam., bears North 14 lks. dist.
marked $\frac{1}{4}$ S 36 B T

A pine, 18 ins. in diam., bears S. 25 $\frac{1}{2}$ ° E., 24 lks. dist.
marked $\frac{1}{4}$ S 1 B T

56.00 Asc. 140 ft. over W. slope to Spur, slopes N. Desc. 70 ft. over E. slope to

60.50 Canyon, course N. Asc. 65 ft. over W. slope to

67.00 Spur; slopes N. Desc. 160 ft. to sec. cor.

74.00 Canyon, course N. Asc.

76.00 Spur, slopes N. Desc. 90 ft.

78.50 Wash, 30 lks. wide, course N. Asc.

80.00 The cor. of TS. 25 and 26 N., Rs. 10 and 11 W.

Land; mountainous.
Soil; rocky, 4th rate.
Timber; scrub cedar and pinyon.
Undergrowth; sagebrush, chamiso and scrub oak.

Boundaries of T. 25 N., R. 11 W.

3544

Latitudes, departures and closing errors.

Line designated.	True bearing.	Distance.	Latitudes.		Departures.	
			N.	S.	E.	W.
S. bdy. of Tp. (6th Std. Par. N)	West	480.00	:	:	:	480.00
W. bdy. of Tp.	North	480.00	480.00	:	:	:
N. bdy. of Tp.	N. 89° 57' E	479.69	.42	:	479.69	:
E. bdy. of Tp.	South	480.00	:	480.00	:	:
Convergency			:	:	.52	:
Totals			480.42	480.00	480.21	480.00
			480.00		480.00	
Error in latitude			.42			
Error in departure					.21	

Subdivision of T. 25 N. R. 11 W.

Chains marked $\frac{1}{4}$ S 36 B T
 42.00 Ridge, bears NE. and SW. Desc. 400 ft. over NW. slope.
 66.80 Wash, 30 lks. wide, course NE. Asc. 250 ft. over SE. slope
 to
 77.50 Top of ascent, thence on top of ridge to
 79.96 The cor. of secs. 25, 26, 35 and 36.

Land; rolling, drains NE.
 Soil; rocky, 3d rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; sagebrush, chamiso and cactus.

 N. 0° 01' W., bet. secs. 25 and 26.
 Over mountainous land, thru heavy timber and undergrowth.
 Desc. 220 ft. over N. slope to

11.00 Wash, course NE. Asc. 194 ft. over SE. slope.
 29.50 Spur, slopes E. Desc. 120 ft. over N. slope to
 36.50 Canyon, course NE. thence along E slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
 the ground to bed rock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 26 | S 25
 1920

From which

A pine, 12 ins. in diam., bears S. 73° E., 20 lks. dist.
 marked $\frac{1}{4}$ S 25 B T

A pine, 8 ins. in diam., bears S. 70 $\frac{1}{2}$ ° W., 46 lks. dist.
 marked $\frac{1}{4}$ S 26 B T

Desc. 310 ft. over N. slope to

66.00 Leave timber and enter Yampai Canyon.
 76.00 AT&SFRR right of way fence and telegraph line bear E and W.
 76.60 Drain, 30 lks. wide, 12 ft. deep course W.
 77.40 AT&SFRR brs. N. 85° E. to Nelson and S. 85° W., to Peach Springs
 79.10 Right of way fence and telegraph line brs. N. 85° E. and
 S. 85° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground for cor. of secs. 23, 24, 25 and 26, marked
 on brass cap

T25N | R11W
 S 23 | S 24
 S 26 | S 25
 1920

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.
 Land; mountainous to level.

Soil; S. half, rocky, 4th rate. N. half, 2nd. and 3d. rates.
 Timber; pinyon and scrub cedar.

Undergrowth; scattering sagebrush and spanish dagger.

 N. 89° 55' E., on a random line bet. secs. 24 and 25.

40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.88 Fall 23 lks. N. of the cor. of secs. 19, 24, 25 and 30,
 on E. bdy. of Tp., described in Book "C".

Thence

N. 89° 55' W., on a true line bet. secs. 24 and 25.
 Over rolling land, thru scattering timber and undergrowth.
 Asc. 70 ft. over E. slope.

21.00 Spur, slopes SW. Desc. 300 ft. over W. slope to
 39.94 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 24


 S 25
 1920

Subdivision of T. 25 N..R.11 W.

Chains From which
 . A pine. 14 ins. in diam., bears N.70°E., 110 lks. dist.
 marked $\frac{1}{4}$ S 24 B T
 A pine. 12 ins. in diam., bears S.53°E., 187 lks. dist.
 marked $\frac{1}{4}$ S 25 B T
 40.50 Enter Yampai Canyon, brs. NW and SE. Thence over nearly
 level land.
 45.00 Old Trails National Highway, bears SE. to Nelson and NW
 to Peach Springs.
 49.60 Old road, bears SE and W.
 49.73 AT&SFRR right of way wire fence, bears SE and NW.
 51.48 Telegraph line, bears SE. and NW.
 52.73 AT&SFRR bears S.80°E to Nelson and N.80°W to Peach Springs.
 65.40 Drain, 50 lks. wide, 10 ft. deep course W.
 67.38 AT&SFRR bears N.80°E. to Nelson and S.80°W. to Peach Springs.
 75.28 Wire fence parallel to R.R.
 79.88 The cor. of secs. 23, 24, 25 and 26.
 Land: E. half, rolling mountainous, W. half, level.
 Soil: E. half, rocky, W. half, loam.
 Timber: scrub cedar and pinyon.
 Undergrowth: sagebrush.


N.0°01'W., bet. secs. 23 and 24.

Over nearly level land across Yampai Canyon.
 2.05 Old road, bears E. and W.
 8.45 Old Trails National Highway brs. ^{E.} to Nelson and S.80°W. to
 Peach Springs.
 10.00 Leave canyon and enter hills and scattering timber
 bearing E and W.
 Asc. 75 ft. over S. slope to
 20.00 Flat spur, slopes SW along W slope to
 24.00 Asc. 170 ft. over S. slope to
 34.80 Main ridge, bears E. and W. Desc. 57 ft. over N. slope to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
 A pine, 5 ins. in diam., bears S.54 $\frac{1}{4}$ °E., 27 lks. dist.
 marked $\frac{1}{4}$ S 24 B T
 A pine, 7 ins. in diam., bears S.14°W., 69 lks. dist.
 marked $\frac{1}{4}$ S 23 B T


Desc. 80 ft. over rolling N. slope.
 62.00 Drain, course W.
 67.90 Road, Peach Springs to Pine Springs, bears N.60°E. and
 S.60°W.
 79.80 Drain, course W.
 80.00 Set an iron post; 3 ft. long, 2 ins. in diam., 18 ins. in
 the ground to bed rock, supported in a mound of stone,
 with stone marked cross (x) in mound for cor. of secs.
 13; 14, 23 and 24, marked on brass cap



From which
 A cedar, 10 ins. in diam., bears N.8 $\frac{1}{4}$ °E., 312 lks. dist.
 marked T 25 N R 11 W S 13 B T
 A pine, 14 ins. in diam., bears S.46 $\frac{1}{4}$ °E., 186 lks. dist.
 marked T 25 N R 11 W S 24 B T
 A cedar, 10 ins. in diam., bears S.66 $\frac{1}{4}$ °W., 212 lks. dist.
 marked T 25 N R 11 W S 23 B T No other trees
 within limits.
 Land: rolling, mountainous.
 Soil: 2nd to 4th rates.
 Timber: scattering pinyon and scrub cedar.
 Undergrowth: scrub oak.
 Some grass.

Subdivision of T 25 N., R. 11 W.

Chains S. 89°55'E., on a random line bet. secs. 13 and 24.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Fall 12 lks. N. of the cor. of secs. 13, 18, 19 and 24
 on E. bdy. of Tp., described in Book "C".
 Thence N. 89°50'W., on a true line bet. secs. 13 and 24. Over
 rolling land, thru scattering timber and undergrowth.
 Asc. 30 ft. to
 9.00 Spur, slopes SW. Desc. 155 ft. over NW slope.
 18.50 Foot of descent. Along N. slope.
 25.00 Desc. 150 ft. over W. slope.
 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
 A cedar, 12 ins. in diam., bears N. 31 $\frac{1}{2}$ °E., 28 lks. dist.
 marked $\frac{1}{4}$ S 13 B T
 A pine, 10 ins. in diam., bears S. 14°E., 40 lks. dist.
 marked $\frac{1}{4}$ S 24 B T


Over nearly level land.
 50.00 Road brs. N. 75°E to Blue Mountain Tank and Seligman and
 S 75° W to Peach Springs.

60.00 Drain, course NW
 79.40 Drain, course S. 60°W.
 80.02 The cor. of secs. 13, 14, 23 and 24.

Land; rolling and level.
 Soil; 3d. and 4th. rates.
 Timber; scrub cedar and pinyon.
 Undergrowth; scrub oak and spanish dagger.
 Some bunch grass.


 N. 0°01'W., bet. secs. 13 and 14.
 Over rolling land, thru scattering timber and undergrowth.

18.70 Desc. 175 ft. to
 27.30 Wash, 20 lks. wide, course NW. Asc. 86 ft. over SW. slope.
 37.00 Desc. 34 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
 A pine, 5 ins. in diam., bears N. 47 $\frac{1}{2}$ °E., 25 lks. dist.
 marked $\frac{1}{4}$ S 13 B T
 A pine, 10 ins. in diam., bears S. 7 $\frac{1}{2}$ °W., 60 lks. dist.
 marked $\frac{1}{4}$ S 14 B T

Asc. 120 ft. over S. slope to
 45.70 Spur, slopes W. Desc. 270 ft. over N slope to
 65.00 Foot of descent. Asc. 140 ft. to
 75.00 Top of ascent, along west slope to
 78.60 Desc. NE slope 30 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
 in the ground for cor. of secs. 11, 12, 13 and 14,
 marked on brass cap

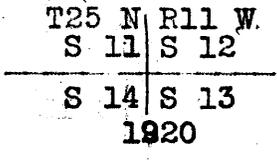

From which

Subdivision of T.25 N., R.11 W.

Chains . . . A pine, 10 ins. in diam., bears N.21 $\frac{1}{2}$ ⁰E., 74 lks. dist.
 marked T 25 N R 11 W S 12 B T
 A pine, 8 ins. in diam., bears S.88 $\frac{1}{2}$ ⁰E., 17 lks. dist.
 marked T 25 N R 11 W S 13 B T
 A pine, 8 ins. in diam., bears S. 15 $\frac{3}{4}$ ⁰W., 25 lks. dist.
 marked T 25 N R 11 W S 14 B T
 A pine, 8 ins. in diam., bears N.35 $\frac{3}{4}$ ⁰W., 33 lks. dist.
 marked T 25 N R 11 W S 11 B T

Land; mountainous, drains N.
 Soil; 4th rate.
 Timber; pinyon and scrub cedar.
 Undergrowth; sagebrush and spanish dagger.

 S.89⁰50'E., on a random line bet. secs. 12 and 13.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Fall 2 lks. S. of the cor. of secs. 7, 12, 13 and 18, on
 E. bdy. of Tp., described in Book "C".
 Thence
 N.89⁰51'W., on a true line bet. secs. 12 and 13.
 Over mountainous land, thru scattering timber and under-
 growth.
 Asc. 17 ft. over E. slope.
 3.00 Spur, slopes N. Desc. 80 ft. over W. slope to
 11.50 Canyon, course N. Asc. 93 ft. over E. slope to
 19.00 Spur, slopes N. Desc. 45 ft. to
 23.00 Canyon, course NW. Desc. 220 ft. over NW slope to
 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 12

 S 13
 1920

From which
 A pine, 12 ins. in diam., bears N.19 $\frac{3}{4}$ ⁰W., 92 lks. dist.
 marked $\frac{1}{4}$ S 12 B T
 A pine, 8 ins. in diam., bears S.9 $\frac{1}{2}$ ⁰E., 83 lks. dist.
 marked $\frac{1}{4}$ S 13 B T

Desc. 84 ft. to
 49.60 Canyon, course SW along S slope to
 56.10 Flat spur, slopes SW. Desc. 192 ft. to
 79.90 Drain, course NW
 80.10 The cor. of secs. 11, 12, 13 and 14.

Land; rough mountainous.
 Soil; rocky, 4th rate.
 Timber; pinyon and scrub cedar.
 Undergrowth; sagebrush, spanish dagger and cactus.

 N.0⁰01'W., bet. secs. 11 and 12.
 Over mountainous land, thru scattering timber and under-
 growth.

.40 Drain, course NW.
 6.50 Canyon, course W. Asc. 50 ft. to
 10.00 Spur, slopes W., thence along W. slope.
 15.00 Spur, slopes W. Desc. 75 ft. to
 27.00 Canyon, course W. Asc. 65 ft. to
 33.00 Spur, slopes NW. Desc. 85 ft. to
 39.60 Canyon, course NW
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 11 | S 12
 1920

From which

Subdivision of T. 25 N., R. 11 W.

Chains A pine, 16 ins. in diam., bears S. 24° E., 66 lks. dist. marked $\frac{1}{4}$ S 12 B T
 A pine, 12 ins. in diam., bears N. 70 $\frac{3}{4}$ ° W., 36 lks. dist. marked $\frac{1}{4}$ S 11 B T
 44.70 Canyon, course NW. Asc. 302 ft. to spur.
 50.00 Canyon, 2 chs. wide, with walls 250 ft. high, course NW.
 73.00 Flat spur, slopes NW. Desc. 57 ft. to
 78.50 Canyon, course NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bed rock, deposit stone marked cross (x) at base of post, and raise a mound of stone around post for cor. of secs. 1, 2, 11 and 12, marked on brass cap

T25N	R11W
S 2	S 1
S 11	S 12
1920	

From which
 A pine, 10 ins. in diam., bears N. $\frac{3}{4}$ ° E., 30 lks. dist. marked T 25 N R 11 W S 1 B T
 A pine, 6 ins. in diam., bears S. 66° E., 80 lks. dist. marked T 25 N R 11 W S 12 B T
 A pine, 8 ins. in diam., bears S. 4 $\frac{1}{2}$ ° W., 187 lks. dist. marked T 25 N R 11 W S 2 B T. No other trees within limits.

Land; rough mountainous.
 Soil; rocky, 4th rate.
 Timber; pinyon and scrub cedar.
 Undergrowth; catclaw, palo christo and cactus.

 S. 89° 51' E., on a random line bet. secs. 1 and 12.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Fall 12 lks. S. of the cor. of secs. 1, 6, 7 and 12 on E. bdy. of Tp., described in Book "C".
 Thence
 N. 89° 56' W., on a true line bet. secs. 1 and 12.
 Over mountainous land, thru scattering timber and undergrowth.
 Asc. 340 ft. over E. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

S 1
$\frac{1}{4}$ -----
S 12
1920

From which
 A pine, 8 ins. in diam., bears N. 55 $\frac{1}{2}$ ° E., 46 lks. dist., marked $\frac{1}{4}$ S 1 B T
 A pine, 10 ins. in diam., bears S. 10 $\frac{3}{4}$ ° W., 43 lks. dist. marked $\frac{1}{4}$ S 12 B T Desc. 80. ft.

53.80 Spur, slopes N. 60° W. ----- Continue descent 220 ft. over W. slope.
 80.00 The cor. of secs. 1, 2, 11 and 12.
 Land; rough mountainous.
 Soil; rocky, 4th rate.
 Timber; pinyon and scrub cedar.
 Undergrowth; scrub oak and spanish dagger.

 N. 0° 01' W., on a random line bet. secs. 1 and 2.
 40.00 Set temp $\frac{1}{4}$ sec. cor.
 79.90 Fall 3 lks. W. of the cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp. hereinbefore described.
 Thence
 South, on a true line bet. secs. 1 and 2.
 Over mountainous land, thru scattering timber and under-

Subdivision of T. 25 N., R. 11 W.

Chains	<p>Growth.</p> <p>Desc. 85 ft. over SW. slope to Canyon, course NW. Asc. 445 ft. over N. slope to $\frac{1}{4}$ cor. Fence, bears N.20°E. and S.20°W.</p> <p>14.40 27.80 39.90</p> <p>Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$ S 2 S 1 1920</p> <p>From which</p> <p>A pine, 10 ins. in diam., bears S. 38$\frac{3}{4}$°E., 208 lks. dist. marked $\frac{1}{4}$ S 1 B T</p> <p>A pinyon, 7 ins. in diam., bears N. 14$\frac{1}{4}$°W., 116 lks. dist. marked $\frac{1}{4}$ S 2 B T</p> <p>Asc. 19 ft. to</p> <p>43.20 Divide, bears E. and W. Thence over flat.</p> <p>57.40 Canyon, course W.</p> <p>60.00 Ridge, bears E. and W.</p> <p>73.10 Confluence of two canyons from SE and E to W.</p> <p>75.10 Spur, slopes NW.</p> <p>79.90 The cor. of secs. 1, 2, 11 and 12.</p> <p>Land; rough mountainous. Soil; rocky, 4th rate. Timber; pinyon and scrub cedar. Undergrowth; sagebrush and spanish dagger.</p> <p>-----</p> <p>From the Std. cor. of secs. 34 and 35 on S. bdy. of Tp. (6th Std. North) described in Book "B".</p> <p>N. 0°01'W., bet. secs. 34 and 35.</p> <p>Over rolling land, thru scattering timber and undergrowth.</p> <p>Desc. 23 ft. over gradual NW slope.</p> <p>7.00 Small canyon, course N. 20°E. Asc. 25 ft.</p> <p>20.00 Desc. 50 ft. over gradual NE slope.</p> <p>31.60 Desc. 270 ft. over steep N. slope to</p> <p>40.00 Mark a cross (x) on surface rock at exact cor. point and over same set an iron post, 3 ft. long, 1 in. in diam., supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap</p> <p style="text-align: center;">$\frac{1}{4}$ S 34 S 35 1920</p> <p>From which</p> <p>A pine, 8 ins. in diam., bears S. 75$\frac{3}{4}$°E., 47 lks. dist. marked $\frac{1}{4}$ S 35 B T</p> <p>A pine, 5 ins. in diam., bears N. 10°W., 32 lks. dist. marked $\frac{1}{4}$ S 34 B T</p> <p>Desc. 75 ft. over NE slope to</p> <p>43.80 Canyon, course NW. Asc. 30 ft. over S. slope.</p> <p>48.00 Desc. 160 ft. over NW slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 26, 27, 34 and 35, marked on brass cap</p> <p style="text-align: center;">T25N R11W S 27 S 26 ----- S 34 S 35 1920</p> <p>From which</p> <p>A pine, 8 ins. in diam., bears N. 53$\frac{1}{2}$°E., 98 lks. dist. marked T 25 N R 11 W S 26 B T</p> <p>A pine, 10 ins. in diam., bears N. 53$\frac{1}{2}$°E., 106 lks. dist. marked T 25 N R 11 W S 35 B T</p>
--------	--

Subdivision of T. 25 N., R. 11 W.

Chains

A pine, 12 ins. in diam., bears S. 65 $\frac{1}{2}$ $^{\circ}$ W., 310 lks. dist. marked T 25 N R 11 W S 34 B T
A cedar, 12 ins. in diam., bears N. 22 $\frac{1}{2}$ $^{\circ}$ W., 67 lks. dist. marked T 25 N R 11 W S 27 B T.

Land; rolling and mountainous.
Soil; rocky, 4th rate.
Timber; scrub cedar and pinyon.
Undergrowth; sagebrush and spanish dagger.

40.00 East, on a random line bet. secs. 26 and 35.
80.10 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line, 8 lks. N. of cor. of secs. 25, 26, 35 and 36.
Thence
N. 89 $^{\circ}$ 57' W., on a true line bet. secs. 26 and 35.
Over rolling land, thru scattering timber and undergrowth.
Desc. 140 ft. over NW. slope.
15.00 Canyon, course N. 80 $^{\circ}$ E. Thence along S. slope.
17.80 Canyon, course S. 80 $^{\circ}$ E. Asc. 60 ft.
21.40 Spur, slopes N. Desc. to
30.60 Canyon, course N. 85 $^{\circ}$ E. Asc. 110 ft.
40.05 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 26
S 35
1920

From which
A cedar, 12 ins. in diam., bears N. 33 $\frac{1}{2}$ $^{\circ}$ E., 46 lks. dist. marked $\frac{1}{4}$ S 26 B T.
A cedar, 10 ins. in diam., bears S. 11 $\frac{1}{2}$ $^{\circ}$ W., 119 lks. dist. marked $\frac{1}{4}$ S 35 B T.

Continue ascent 25 ft.
42.60 Spur, slopes N. Desc. 180 ft. over W. slope to
52.00 Small canyon, course NW. Asc. 87 ft. over E. slope to
59.70 Top of ascent. Desc. 230 ft. over W. slope down small canyon.
80.10 The cor. of secs. 26, 27, 34 and 35.
Land; rolling and mountainous.
Soil; rocky, 4th rate.
Timber; pinyon and scrub cedar.
Undergrowth; sagebrush and squaw brush.

N. 0 $^{\circ}$ 01' W., bet. secs. 26 and 27.
Over rolling land, thru scattering timber and undergrowth.
.50 Small wash, course W. Asc. 35 ft.
5.00 Desc. 60 ft.
17.00 Asc. 15 ft.
23.60 Spur, slopes NW. Desc. 115 ft.
37.50 Wash, course NW.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

S 27 | S 26
1920

From which
A cedar, 12 ins. in diam., bears N. 69 $\frac{1}{2}$ $^{\circ}$ E., 96 lks. dist. marked $\frac{1}{4}$ S 26 B T.
A cedar, 10 ins. in diam., bears N. 75 $\frac{1}{2}$ $^{\circ}$ W., 360 lks. dist. marked $\frac{1}{4}$ S 27 B T.

51.00 Enter Yampai Canyon, course W.
56.80 From this point Section House, bears W. 6 chs. dist.
57.70 A T & S F R R right of way fence bears E. and W.
60.30 Telegraph line, bears E. and W.
61.70 A T & S F R R bears E. to Peach Spring and W. to Crozier.
62.90 Telegraph line, bears E. and W.
64.80 Right of way fence bears E. and W.

Subdivision of T. 25 N., R. 11 W.

Chains							
66.40	Old Trails National Highway brs. E. to Peach Springs and W. to Crozier.						
79.30	Fence, bears E. and W.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., deposit a stone marked cross (X) at base of post and raise a mound of stone around post for cor. of secs. 22, 23, 26 and 27, marked on brass cap						
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T 25 N</td> <td>R 11 W</td> </tr> <tr> <td>S 22</td> <td>S 23</td> </tr> <tr> <td>S 27</td> <td>S 26</td> </tr> </table>	T 25 N	R 11 W	S 22	S 23	S 27	S 26
T 25 N	R 11 W						
S 22	S 23						
S 27	S 26						
	1920						
	From this, cor. water tank at Peach Springs Station brs. S. 73° 36' E. The N. E. gable of Peach Springs Station brs. S. 61° E.						
	Land; slightly rolling.						
	Soil; rocky, 4th rate.						
	Timber; scrub cedar.						
	Undergrowth; sagebrush, chamiso and cactus.						
	Fair grass.						

	S. 89° 57' E., on a random line bet. secs. 23 and 26.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
79.98	Intersect N. and S. line, 7 lks. S. of the cor. of secs. 25, 24, 25 and 26.						
	Thence: West, on a true line bet. secs. 25 and 26, over gently rolling land, thru scattering undergrowth.						
19.00	Old Trails National Highway brs. NE. to Nelson and SW. to Peach Springs.						
20.00	Asc. 20 ft. over gradual E. slope to						
24.40	Short spur, slopes S. Desc. 30 ft. over W. slope to						
31.00	Small draw, course S.						
39.99	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap						
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>$\frac{1}{4}$ S 23</td> </tr> <tr> <td>S 26</td> </tr> </table>	$\frac{1}{4}$ S 23	S 26				
$\frac{1}{4}$ S 23							
S 26							
	1920						
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor. From this cor., water tank, bears S. 24° 09' W. NE. gable of Peach Springs Station brs. S. 50° 40' W.						
53.40	Fence, bears N. and S. Asc. 35 ft. to spur.						
54.10	Road, bears N. and S.						
54.20	Fence, bears N. and S.						
57.00	Hualpai Indian Agent's house and corral, bear S. 5 chs. dist.						
67.70	Spur, slopes S. Desc. 30 ft. over W. slope to						
77.50	Ravine, 50 lks. wide, course S. Asc. 56 ft. over E. slope to						
79.98	The cor. of secs. 22, 23, 26 and 27.						
	Land; slightly rolling.						
	Soil; rocky, 3d rate.						
	Timber; none.						
	Undergrowth; sagebrush and chamiso.						
	Good grass.						

	N. 0° 01' W., bet. secs. 22 and 23.						
	Over-rolling land, thru scattering timber and undergrowth.						
20.00	Small wash, course SE. Asc. 78 ft. over S. slope to						
37.00	Ridge, bears E. and W., over top of ridge to						
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap						
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>S 22</td> <td>S 23</td> </tr> </table>	S 22	S 23				
S 22	S 23						
	1920						
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.						

BOOK 2544

Subdivision of T.25 N., R.11 W.

Chains
 65.00 Desc. .130 ft. over N. slope to
 Wash, 50 lks. wide, 4 ft. deep, course W.
 80.00 Continue over rolling land, ascending 100 ft. to
 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in
 the ground to bed rock, deposit a stone marked cross
 (x) at base of post and raise a mound of stone around
 post for cor. of secs. 14, 15, 22 and 23, marked on
 brass cap

T25N	R11W
S 15	S 14
S 22	S 23

1920

Land; slightly rolling.
 Soil; rocky, 3d. rate.
 Timber; scattering scrub cedar.
 Undergrowth; sagebrush, chamiso and cactus.
 Fair grass.

 East, on a random line bet. secs. 14 and 23.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect N. and S. line, 8 lks. S. of the cor. of secs.
 13, 14, 23 and 24.
 Thence S. 89°57'W., on a true line bet. secs. 14 and 23, over
 nearly level land, thru scattering timber and undergrowth.
 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap

S 14
S 23

1920

From which
 A cedar; 8 ins. in diam., bears N. 18 $\frac{1}{2}$ °E., 90 lks. dist.
 marked $\frac{1}{4}$ S 14 B T
 A cedar, 12 ins. in diam., bears S. 68 $\frac{1}{2}$ °E., 297 lks. dist.
 marked $\frac{1}{4}$ S 23 B T

46.00 Road, brs. N. to Pumping Plant and Blue Mountain Tank and
 S. to Peach Springs.
 48.40 Telephone line, bears N. and S.
 50.90 Four strand wire fence, bears N. and S.
 57.80 Drain, course SW.
 69.10 Drain, course SW.
 80.10 The cor. of secs. 14, 15, 22 and 23.
 Land; nearly level.
 Soil, gravelly, 3rd rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; sagebrush.
 Some bunchgrass.

 N. 0°01'W., bet. secs. 14 and 15.
 Over rolling land, thru scattering timber and undergrowth.
 3.70 Desc. .75 ft. over gradual N. slope.
 21.40 Wash, course SW. Asc. 30 ft. to
 24.40 Small spur, slopes SW. Desc.
 26.20 Wash, course SW. Asc. 40 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
 the ground to bed rock with stone marked cross (x)
 at base of post, supported in a mound of stone, for
 $\frac{1}{4}$ sec. cor., marked on brass cap

S 14	S 15
------	------

1920

Subdivision of T. 25 N., R. 11 W.

Chains
 Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.
 Asc. 30 ft. to ridge
 42.00 Fence, bears NE. and SW.
 50.00 Ridge, bears E. and W.
 56.30 Apex of round top hill, bears S. 70 lks. dist. Desc.
 over broken N. slope, 130 ft. to
 75.50 Wash, course NE. Thence along E. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in
 the ground for cor. of secs. 10, 11, 14 and 15, marked
 on brass cap

T25N	R11W
S 10	S 11
S 15	S 14
1920	

From which

A cedar, 12 ins. in diam., bears N. 58¾° E., 120 lks. dist.
 marked T 25 N R 11 W S 11 B T
 A cedar, 10 ins. in diam. bears S. 32¼° E., 95 lks. dist.
 marked T 25 N R 11 W S 14 B T
 A cedar, 8 ins. in diam., bears S. 80° W., 44 lks. dist.
 marked T 25 N R 11 W S 15 B T
 A pinyon, 12 ins. in diam., bears N. 40½° W., 182 lks. dist.
 marked T 25 N R 11 W S 10 B T

Land; rolling.

Soil; gravelly, 3d rate.

Timber; scrub cedar and pinyon.

Undergrowth; sagebrush, scrub oak and cactus.

 N. 89° 57' E., on a random line bet. secs. 11 and 14.

40.00 Set temp. ¼ sec. cor.

80.10 Intersect N. and S. line, 9 lks. N. of the cor. of secs.
 11, 12, 13 and 14.

Thence N. 89° 59' W., on a true line bet. secs. 11 and 14.

Over rolling land, thru scattering timber and undergrowth.

3.00 Ridge, bears N. and S. Desc. 220 ft. over W. slope to

18.40 Wash, course N.

26.80 Road, bears SE to Peach Springs and NW to Pumping Plant.

28.60 Road, bears N. to Peach Springs and S to Pumping Plant.

29.10 Wash, course NW

34.40 Corral fence, bears SE and NW.

36.20 Corral fence, bears SE and NW.

38.10 Pipe line from springs to tanks, flows N. Tanks
 2 chs. N.

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for ¼ sec. cor., marked on brass cap

¼	S 11
	S 14
1920	

From which

A cedar, 6 ins. in diam., bears N. 46¼° E., 59 lks. dist.
 marked ¼ S 11 B T

A palo-verde, 6 ins. in diam., bears S. 40° W., 39 lks. dist.
 marked ¼ S 14 B T

41.30 From this point Spring bears South, 40 lks. dist.

71.50 Wash, course N. Asc. 33 ft. over gradual E. slope.

80.10 The cor. of secs. 10, 11, 14 and 15.

Land; rolling, drains N.

Soil; gravelly, 3d rate.

Timber; scattering pinyon and scrub cedar.

Undergrowth; sagebrush, scrub oak and cactus.

Fair grass.

Subdivision of T. 25 N., R. 11 W.

BOOK 7544

Chains N.0001'W., bet.secs.10 and 11.
 Over rolling land, thru scattering timber and undergrowth.
 2.40 Small drain, course E.
 6.00 Spur, slopes E.
 12.00 Wash, course NE.
 14.20 Spur, slopes NE. Desc. 52 ft. to
 18.00 Wash, course NE. Desc. 80 ft. to
 35.20 Asc. 15 ft.
 36.00 Ridge, bears NE and SW. Desc. 34 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec.cor., marked on brass cap

$\frac{1}{4}$
 S 10 | S 11
 1920

From which
 A cedar, 6 ins. in diam., bears S.42 $\frac{1}{2}$ °E., 37 lks. dist.
 marked $\frac{1}{4}$ S 11 B T
 A pinyon, 10 ins. in diam., bears S.73 $\frac{1}{4}$ °W., 176 lks. dist.
 marked $\frac{1}{4}$ S 10 B T

41.00 Wash, course NE along E. slope to
 50.00 Spur, slopes NE. Desc. 100 ft. to
 59.50 Wash, course NE. Asc. 36 ft. to
 70.00 Spur, slopes E. Desc. 70 ft. to cor.
 71.94 From this point smoke stack at Peach Springs Pumping
 Station, bears N.0030'E.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins.
 in the ground to bed rock, supported in a mound of
 stone, for cor. of secs. 2, 3, 10 and 11, marked on brass cap

T25N | R11W
 S 3 | S 2
 S 10 | S 11
 1920

From which
 A pinyon, 5 ins. in diam., bears N.41°E., 150 lks. dist.
 marked T 25 N R 11 W S 2 B T
 A cedar, 6 ins. in diam., bears S.79°E., 67 lks. dist.
 marked T 25 N R 11 W S 11 B T
 A cedar, 6 ins. in diam., bears S.22°W., 112 lks. dist.
 marked T 25 N R 11 W S 10 B T
 A cedar, 6 ins. in diam., bears N.64°W., 105 lks. dist.
 marked T 25 N R 11 W S 3 B T
 Land; rolling, drains NE
 Soil; gravelly, 3d rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush. scrub oak, chamiso, and cactus.
 Fair grass,

 S.89°59'E., on a random line bet. secs. 2 and 11.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.10 Intersect N and S line, 16 lks. S. of cor. of secs. 1,
 2, 11 and 12.
 Thence S.89°54'W., on a true line bet. secs. 2 and 11
 Over mountainous land, thru scattering timber and under-
 growth.
 1.50 Canyon, 60 ft. deep, course NW along N slope to
 11.00 Spur, slopes NW. Desc. 640 ft. over W. slope to $\frac{1}{4}$ cor.
 23.30 Fence, bears N. and S.
 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 2
 S 11
 1920

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.
 Desc. 40 ft. over slight W. slope to 61 chs.

Subdivision of T.25 N., R.11 W.

Chains	
60.70	Road, bears NE to Peach Springs Pumping Plant and SW to Peach Springs
61.00	Wash, course NE. Asc. 100 ft. over E. slope to
80.10	The cor. of secs. 2,3,10 and 11. Land; mountainous, drains W. Soil; rocky, 4th rate. Timber; pinyon and scrub cedar. Undergrowth; palo-verde and scrub oak.

	North, on a random line bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Fall 20 lks. W. of the cor. of secs. 2,3,34 and 35 on N.bdy. of Tp., hereinbefore described Thence S. 6°09' W., on a true line bet. secs. 2 and 3. Over rolling land, thru scattering timber and undergrowth. Desc. 108 ft. over SW. slope to
5.00	Ravine, course W. Asc. 90 ft. over N. slope to
9.50	Spur, slopes W. Desc. 170 ft. over W. slope to
40.04	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
$\frac{1}{4}$ S 3 S 2 1920	
45.00	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Asc. 170 ft. over gradual N. slope to cor.
48.84	Well at Peach Springs Pumping Plant on line
49.04	South side of pump house at Peach Springs Pumping Plant.
52.74	From this point house at Peach Spring Pumping Plant bears E. 2 chs. dist.
54.60	Enter wash, course NW.
56.60	Leave wash, course NW.
60.40	Enter draw, course NW. Asc. 34 ft. in draw..
74.70	Leave draw, from SW to N. Asc. 46 ft. to
80.04	The cor. of secs. 2,3,10 and 11. Land; rolling, drains NW. Soil; gravelly, 3d. rate. Timber; cedar and pinyon. Undergrowth; sagebrush, chamiso, scrub oak and cactus Fair grass.

	From the Std. cor. of secs. 33 and 34 on S. bdy. of Tp. (6th Std. Par. North) described in Book "E". N. 0°02' W., bet. secs. 33 and 34. Over slightly rolling land, thru scattering timber and undergrowth. Desc. 60 ft. over gradual N. slope to
7.50	Wash, course NW. Desc. 25 ft. over rolling land to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap
$\frac{1}{4}$ S 33 S 34 1920	
	From which A cedar, 10 ins. in diam., bears N. 62 $\frac{3}{4}$ ° E., 77 lks. dist. marked $\frac{1}{4}$ S 34 B T A cedar, 8 ins. in diam., bears N. 77 $\frac{1}{2}$ ° W., 117 lks. dist. marked $\frac{1}{4}$ S 33 B T Desc. 40 ft. to

Subdivision of T. 25 N., R. 11 W.

BOOK 3544

Chains
 50.00 Wash, course NW. Asc. 40 ft. over S. slope to
 64.00 Ridge, bears SE and NW. Desc. 57 ft. to
 74.50 Wash, course W. Asc. 57 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
 the ground for cor. of secs. 27, 28, 33 and 34, marked
 on brass cap

T25N R11W	
S 28	S 27
S 33	S 34
1920	

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.
 Land; gently rolling, drains NW.
 Soil; gravelly, 3d rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; sagebrush, chamiso and cactus.
 Good grass.

 East, on a random line bet. secs. 27 and 34.
 40.00 Set temp. ¼ sec. cor.
 80.08 Intersect N. and S. line, 3 lks. S. of the cor. of secs.
 26, 27, 34 and 35.
 Thence S. 89° 59' W., on a true line bet. secs. 27 and 34.
 Over slightly rolling land, thru scattering timber and
 undergrowth.
 2.00 Wash, course N. Asc. 21 ft. to
 8.00 Spur, slopes NW. Desc. 143 ft. to
 34.30 Wash, course N. Asc. 66 ft. to
 40.04 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for ¼ sec. cor., marked on brass cap

¼ S 27	
¼ S 34	
1920	

From which

A cedar, 10 ins. in diam., bears N. 43¼° E., 110 lks. dist.
 marked ¼ S 27 B T
 A cedar, 12 ins. in diam., bears S. 42¼° W., 142 lks. dist.
 marked ¼ S 34 B T
 40.30 Spur, slopes NW. Desc. 110 ft. over SW. slope.
 55.00 Wash, course NW. Asc. 30 ft. to
 70.78 Desc. 20 ft. to
 80.08 The cor. of secs. 27, 28, 33 and 34.
 Land; slightly rolling, drains NW.
 Soil; gravelly, 3d rate.
 Timber; scrub cedar and pinyon.
 Undergrowth; sagebrush, chamiso and cactus.
 Good grass.

 N. 0° 02' W., bet. secs. 27 and 28.
 Over slightly rolling land, thru scattering undergrowth.
 Desc. 92 ft. over N. slope to
 11.60 Foot of descent brs. NE. & SW., Across Yampai Canyon, course SW.
 22.20 AT&SFRR right of way fence,
 bears NE and SW,
 23.60 Telegraph line, bears NE and SW.
 24.10 AT&SFRR brs. NE to Peach Springs and SW to Crozier.
 25.60 Telegraph line bears NE and SW.
 25.90 Right of way fence bears NE and SW.
 37.30 Old Trail National Highway brs. E. to Peach Spring and
 W. to Crozier.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for ¼ sec. cor., marked on brass cap

¼	
S 28	S 27

1920

Subdivision of T. 25 N., R. 11 W.

Chains Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
Asc. 90 ft. over S. slope.
52.40 Ridge, bears E. and W. Desc. 34 ft. over N. slope
62.00 Wash, course SE. Asc. slightly over S. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins.
in the ground for cor. of secs. 21, 22, 27 and 28,
marked on brass cap

T25N	R11W
S 21	S 22
S 28	S 27
1920	

Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.
Land; slightly rolling, drains W.
Soil; gravelly, 3d rate.
Timber, none.
Undergrowth; sagebrush, chamiso and cactus.
Fair grass.

N. 89° 59' E., on a random line bet. secs. 22 and 27.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.96 Intersect N. and S. line 5 lks. S. of the cor. of secs.
22, 23, 26 and 27.
Thence S. 89° 57' W., on a true line bet. secs. 22 and 27.
Over rolling land, thru scattering timber and undergrowth.
2.00 Three strand wire fence, bears SE and NW.
4.80 Drain, course SE. Asc. 50 ft. to
11.00 Spur, slopes SW. Desc. 57 ft. to
18.50 Drain, course S.
23.60 Continue desc. 65 ft. along S. slope.
39.98 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S	22
$\frac{1}{4}$ S	27
1920	

From which

A pine, 5 ins. in diam., bears N. 25 $\frac{1}{2}$ ° W., 51 lks. dist.
marked $\frac{1}{4}$ S 22 B T

A cedar, 6 ins. in diam., bears S. 55 $\frac{3}{4}$ ° E., 36 lks. dist.
marked $\frac{1}{4}$ S 27 B T

Continue descent.

47.00 Wash, 40 lks. wide, 1 ft. deep, course S. Asc. 30 ft.
51.00 Spur, slopes S. Desc.
54.00 Draw, course S. Thence along S. slope
63.50 Wash, 30 lks. wide, 1 ft. deep, course SE.
72.00 Spur, slopes S.
75.50 Spur, slopes S. Desc. 40 ft. to
79.96 The cor. of secs. 21, 22, 27 and 28.
Land; rolling.
Soil; gravelly, 2nd. and 3d. rates.
Timber; pinyon and scrub cedar.
Undergrowth; spanish dagger.
Good grass.

N. 00° 02' W., bet. secs. 21 and 22.

Over rolling land, thru scattering timber and undergrowth.
Asc. 50 ft. to

22.00 Ridge, bears E. and W. Desc. 115 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
the ground to bed rock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$	
S 21	S 22
1920	

From which

Subdivision of T. 25 N., R. 11 W.

Chains

A cedar, 8 ins. in diam., bears N.41°E., 130 lks. dist. marked $\frac{1}{4}$ S 22 B T
 A cedar, 10 ins. in diam., bears S.36 $\frac{1}{2}$ °W., 211 lks. dist. marked $\frac{1}{4}$ S 21 B T
 48.00 Desc. 30 ft. to
 54.00 Wash, course W. Asc. 50 ft. over S. slope to
 70.00 Spur, slopes W. Desc. 23 ft. over gradual N. slope to
 78.00 Desc. 65 ft. over steep N. slope to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock deposit stone marked cross (x) at base of post, and raise a mound of stone around post for cor. of secs. 15, 16, 21 and 22, marked on brass cap

T25N | R11W
 S 16 | S 15
 S 21 | S 22

1920

Raise a mound of stone 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor. Land; slightly rolling, drains W. Soil; gravelly, 3d. rate. Timber; scrub cedar. Undergrowth; sagebrush, chamiso and cactus. Fair grass.

 N.89°57'E., on a random line bet. secs. 15 and 22.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 14, 15, 22 and 23.
 Thence, S.89°58'W., on a true line bet. secs. 15 and 22. Over mountainous land, thru scattering timber and undergrowth, along S. slope.
 11.25 Short spur. slopes SW. Desc. 140 ft. over SW. slope to
 16.84 Wash, course W.
 23.25 Wash, course SW.
 25.34 Fence, bears N. and S.
 30.30 Desc. 55 ft. over W. slope to
 40.03 Set an iron post, 3 ft. long 1 in. diam., 18 ins. in the ground to bed rock deposit stone marked cross (x) at base of post, and raise a mound of stone around post for $\frac{1}{4}$ sec. cor., marked on brass cap

S 15
 $\frac{1}{4}$ -----
 S 22
 1920

41.00 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.
 Short spur, slopes S. Desc. 100 ft. over broken SW. slope.
 48.00 Wash, 80 lks. wide, 4 ft. deep, course NW. Asc. 210 ft. over NE. slope to
 59.00 Top of ascent. Thence over broken N. slope.
 73.35 Desc. 100 ft. over NW slope to
 80.06 The cor. of secs. 15, 16, 21 and 22.
 Land; mountainous.
 Soil; rocky, 4th rate.
 Timber; cedar and pine.
 Undergrowth; sagebrush, scrub oak and cactus.

 N.0°02'W., bet. secs. 15 and 16
 Over rolling land, thru scattering timber and undergrowth.
 Desc. 175 ft. over N. slope to
 9.00 Wash, 80 lks. wide, course NW. Asc. over broken SW slope crossing small spurs and draws, 80 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
 S 16 | S 15
 1920

Subdivision of T. 25 N., R. 11 W.

Chains From which
 A pinyon, 12 ins. in diam., bears N. 25½°E., 29 lks. dist.
 marked ¼ S 15 B T
 A cedar, 8 ins. in diam., bears N. 66½°W., 65 lks. dist.
 marked ¼ S 16 B T
 Asc. 36 ft. over S. slope to
 52.00 Spur, slopes W. Desc. 27 ft. over N. slope to
 56.00 Wash, course W. Asc. 90 ft. over rolling S. slope to
 80.00 Ridge, bears SE and SW.
 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground to bed rock, supported in a mound of stone,
 for cor. of secs. 9, 10, 15 and 16, marked on brass cap.

T25N	R11W
S 9	S 10
S 16	S 15

1920

From which
 A cedar, 5 ins. in diam., bears N. 29°E., 174 lks. dist.
 marked T 25 N R 11 W S 10 B T
 A cedar, 10 ins. in diam., bears S. 36°E., 56 lks. dist.
 marked T 25 N R 11 W S 15 B T
 A cedar, 6 ins. in diam., bears S. 65¾°W., 63 lks. dist.
 marked T 25 N R 11 W S 16 B T
 A cedar, 5 ins. in diam., bears N. 20°W., 171 lks. dist.
 marked T 25 N R 11 W S 9 B T
 Land; rolling, drains W.
 Soil; gravelly, 3d. rate.
 Timber; pinyon and cedar.
 Undergrowth; sagebrush, cactus, chamiso and scrub oak.
 Fair grass.

 N. 89°58'E., on a random line bet. secs. 10 and 15.
 40.00 Set temp. ¼ sec. cor.
 79.94 Intersect N and S line, 2 lks. S. of the cor of secs.
 10, 11, 14 and 15.
 Thence S. 89°57'W., on a true line bet. secs. 10 and 15.
 Over rolling land, thru scattering timber and undergrowth.
 Asc. 132 ft. over broken SE slope crossing numerous spurs
 and washes.
 36.00 Ridge, bears N. 20°E. and S. 20°W. Desc.
 38.00 Head of gulch, course NW.
 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for ¼ sec. cor., marked on brass cap

¼	S 10
¼	-----
¼	S 15

1920

From which
 A cedar, 10 ins. in diam., bears N. 13°E., 35 lks. dist.
 marked ¼ S 10 B T
 A pinyon, 10 ins. in diam., bears S. 65°W., 46 lks. dist.
 marked ¼ S 15 B T
 43.00 Ridge, bears SE and NW. Desc. 40 ft. over SW. slope to
 55.00 Wash, course NW. Asc.
 61.00 Spur, slopes NW. Desc. 112 ft. over SW slope to
 67.00 Wash, course NW. Asc. 66 ft. to
 79.94 The cor. of secs. 9, 10, 15 and 16.
 Land; rolling, drains NW.
 Soil; gravelly, 3d rate.
 Timber; scrub cedar and scattering pinyon.
 Undergrowth; sagebrush, chamiso, scrub oak and cactus.
 Fair grass.

 N. 0°02'W., bet. secs. 9 and 10.
 Over rolling land, thru scattering timber and undergrowth.
 1.80 Desc. 166 ft. over NE. slope to
 20.00 Wash, course NW. Asc. 85 ft. over broken SW. slope to
 36.00 Ridge, bears SE. and NW. Desc. 50 ft. over NE. slope to
 40.00 Set an iron post, 3 ft. long, 1 in in diam., 26 ins. in
 the ground for ¼ sec. cor., marked on brass cap

Subdivision of T. 25 N., R. 11 W.

3644

Chains

1/4
S 9 | S 10
1920

From which

- A pinyon, 6 ins. in diam., bears N. 52° E., 107 lks. dist. marked 1/4 S 10 B T
- A pinyon, 10 ins. in diam., bears N. 75 1/2° W., 6 lks. dist. marked 1/4 S 9 B T

- Desc. 114 ft. to
- 48.70 Wash, 80 lks. wide, course NW. Asc. 126 ft. over SW. slope to
- 63.50 Ridge, bears SE. and NW. Desc. 112 ft. over broken NE. slope to
- 74.00 Wash, course NW. Asc. 60 ft. over broken SW. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 3, 4, 9 and 10, marked on brass cap

T25N, R11W
S 4 | S 3
S 9 | S 10
1920

From which

- A palo-verde, 6 ins. in diam., bears N. 63 3/4° E., 135 lks. dist., marked T 25 N R 11 W S 3 B T
- A cedar, 6 ins. in diam., bears S. 8 1/2° E., 127 lks. dist. marked T 25 N R 11 W S 10 B T
- A palo-verde, 5 ins. in diam., bears S. 78° W., 115 lks. dist., marked T 25 N R 11 W S 9 B T
- A palo-verde, 6 ins. in diam., bears N. 17 1/2° W., 63 lks. dist., marked T 25 N R 11 W S 4 B T

Land; rolling, drains NW.
Soil; gravelly, 3d rate.
Timber; cedar, pinyon and palo-verde.
Undergrowth; sagebrush, scrub oak, chamiso and cactus.
Fair grass.

- N. 89° 57' E., on a random line bet. secs. 3 and 10.
- 40.00 Set temp. 1/4 sec. cor.
- 80.10 Intersect N and S line 15 lks. S of the cor of secs. 2, 3, 10 and 11.
- Thence S. 89° 51' W., on a true line bet. secs. 3 and 10.
- Over rolling land, thru scattering timber and undergrowth.
- Desc. 30 ft. to
- 5.50 Wash, course NW. Asc. 240 ft. over broken E. slope to
- 33.50 Ridge, bears N. and S.
- Desc. 58 ft. over W. slope to
- 39.60 Wash, course N. Asc.
- 40.05 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor., marked on brass cap

1/4 S 3

S 10
1920


From which

- A pinyon, 8 ins. in diam., bears N. 49° E., 49 lks. dist. marked 1/4 S 3 B T
- A cedar, 7 ins. in diam., bears S. 32° W., 27 lks. dist. marked 1/4 S 10 B T

- Continue ascent 117 ft. over E. slope to
- 48.60 Ridge, bears N. and S. Desc. 54 ft. to
- 52.60 Wash, course N. Asc. 105 ft. over E. slope to
- 65.60 Ridge, bears N. and S. Desc. 133 ft. over W. slope to
- 73.60 Small wash, course SW. Thence along S. slope.
- 80.10 The cor. of secs. 3, 4, 9 and 10.
- Land; rolling, drains N.
- Soil; gravelly, 3d rate.
- Timber; cedar, pinyon and palo-verde.
- Undergrowth; scrub oak, chamiso, sagebrush and cactus.
- Fair grass.

Subdivision of T. 25 N., R.11 W.

Chains N.0°08'E., on a random line bet. secs. 3 and 4.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.02 Fall 7 lks. E. of the cor. of secs. 3, 4, 33 and 34 on
 N.bdy. of Tp., hereinbefore described.
 Thence S.0°05'W., on a true line bet. secs. 3 and 4.
 Over rolling land, thru scattering timber and undergrowth.
 Desc. 25 ft. over SE. slope to
 1.00 Small wash, course E.
 3.50 Wash, course NE.
 6.00 Same wash, course NW. Asc. 250 ft. over NE. slope to
 32.70 Small spur, slopes NE. Desc. 10 ft. to
 33.80 Asc. 50 ft. over NE. slope to
 40.02 Set an iron post, 3 ft. long, $\frac{1}{4}$ in in diam., 18 ins. in
 the ground to bed rock, supported in a mound of stone,
 for $\frac{1}{4}$ sec. cor., marked on brass cap



From which

- A cedar, 14 ins. in diam., bears N. 12°E., 76 lks. dist.
marked $\frac{1}{4}$ S 3 B T
- A pinyon, 8 ins. in diam., bears S. 51 $\frac{1}{2}$ °W., 69 lks. dist.
marked $\frac{1}{4}$ S 4 B T


Asc. 270 ft. over broken E. slope to
 55.80 Ridge, bears SE and NW. Desc. 24 ft. to
 61.60 Wash, course W. Asc. 50 ft. to
 66.20 Ridge, bears SE and NW. Desc. 70 ft. to
 72.60 Wash, course W. Asc. 86 ft. to
 78.00 Ridge, bears E and W. Desc. 32 ft. to
 80.02 The cor. of secs. 3, 4, 9 and 10.

Land; rolling, drains W.
 Soil; gravelly, 3d rate.
 Timber; pinyon, cedar, and palo-verde.
 Undergrowth; scrub oak, sagebrush, chamiso and cactus.
 Fair grass.

 From the standard cor. of secs. 32 and 33 on S. bdy. of
 Tp. (6th Std. Par. North) described in Book "B",
 N.0°03'W., bet. secs. 32 and 33.

Over slightly rolling land, thru scattering timber and
 undergrowth;

Asc. 88 ft. over S. slope to
 5.90 Ridge, bears E. and W. Desc. 132 ft. over N. slope to
 15.80 Wash, course W. Asc. 20 ft. to
 22.00 Spur, slopes W. Desc. 52 ft. to
 27.30 Foot of descent.
 30.50 AT&SFRR right of way fence bears E. and W.
 31.60 Telegraph line, bears E. to Peach Springs and W. to Crázler
 32.30 AT&SFRR bears E. and W.
 33.50 Telegraph line, bears E. and W.
 34.70 Right of way fence, bears E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., in a mound
 of stone, deposit stone marked cross (x) at base of
 post, and raise a mound of stone around post, for
 $\frac{1}{4}$ sec. cor., marked on brass cap



Desc. 46 ft. over N. slope to
 44.00 Wash, 60 lks. wide, course W. Asc. 100 ft. over S. slope
 to
 72.00 Ridge, bears E. and W. Desc. 62 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. in dia. 26 ins. in
 the ground for cor. of secs. 28, 29, 32 and 33, marked
 on brass cap

BOOK 3544

Subdivision of T. 25 N., R. 11 W.

Chains

T25N | R11W
S 29 | S 28
S 32 | S 33

1920

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.
Land; slightly, rolling, drains W.
Soil; gravelly, 3d. rate.
Timber; scrub cedar.
Undergrowth; sagebrush, chamiso and cactus.
Fair grass.

East, on a random line bet. secs. 28 and 33.

- 40.00 Set temp. ¼ sec. cor.
- 79.94 Intersect N. and S. line, 8 lks. S. of the cor. of secs. 27, 28, 33 and 34.
- Thence S. 89° 57' W., on a true line bet. secs. 28 and 33.
- Over rolling land, thru scattering timber and undergrowth.
- 3.30 Desc. 100 ft. over broken NW. slope of spur, to
- 22.60 Wash, course NW. Asc.
- 25.60 Spur, slopes N. Desc. 25 ft. over W. slope to
- 30.00 Foot of descent. Thence over gently rolling land.
- 35.74 AT&SFRR right of way fence bears NE and SW.
- 37.80 Telegraph line, bears NE and SW.
- 38.54 AT&SFRR bears NE to Peach Springs and SW to Crozier.
- 39.97 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., marked on brass cap

¼ S 28
S 33
1920

Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.
40.94 Telegraph line, bears NE and SW.
41.44 Right of way fence, bears NE and SW.
45.00 Wash, course SW.
Asc. 65 ft. over E. slope to
68.50 Spur, slopes S. Desc. 46 ft. over W. slope to
77.70 Wash, course SE.
79.94 The cor. of secs. 28, 29, 32 and 33.
Land; rolling and gently rolling, drains NW.
Soil; gravelly, 3d. rate.
Timber; scrub cedar.
Undergrowth; sagebrush, chamiso and cactus.
Good grass.

N. 0° 03' W., bet. secs. 28 and 29.

- Over slightly rolling land, thru scattering undergrowth.
- 2.00 Wash, course SE. Asc. 72 ft. over SE. slope to
- 13.00 Ridge, bears NE and SW. Desc. 23 ft. over NW slope to
- 18.40 Small draw, course NE. Asc. 80 ft. over S. slope to
- 30.00 Spur, slopes E. Desc. 40 ft. to
- 37.16 Asc.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., marked on brass cap

¼
S 29 | S 28
1920

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.
Across top of ridge
41.00 Ridge, bears NE and SW. Desc. 25 ft. to
46.50 Road, bears E and W.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 20, 21, 28 and 29, marked on brass cap

T25N | R11W
S 20 | S 21
S 29 | S 28
1920

Subdivision of T. 25 N., R.11 W.

Chains	<p>Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor. Land; slightly rolling, drains SW. Soil; gravelly, 3d rate. Timber; none. Undergrowth; sagebrush, chamiso and cactus. Good grass.</p> <p>-----</p> <p>N.89°57'E., on a random line bet. secs. 21 and 28.</p> <p>40.00 Set temp. ¼ sec. cor.</p> <p>79.98 Fall 2 lks. N. of the cor. of secs. 21, 22, 27 and 29. Thence S.89°58'W., on a true line bet. secs. 21 and 28. Over rolling land, thru scattering timber and undergrowth. Asc. 40 ft. over E. slope to</p> <p>13.00 Spur, slopes S. Desc. 68 ft. over rolling W. slope to</p> <p>39.99 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for ¼ sec. cor., marked on brass cap</p> <p style="text-align: center;"> S --- 21 ¼ S 28 1920 </p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor. Continue over rolling land. Asc. 56 ft. to Top of low ridge forming drainage divide, brs. NE and SW. Thence along N. slope.</p> <p>72.40</p> <p>79.98 The cor. of secs. 20, 21, 28 and 29 Land; rolling, drains N. and S. Soil; gravelly, 2nd. and 3d. rate. Timber; pinyon and scrub cedar. Undergrowth; spanish dagger. Bunchgrass.</p> <p>-----</p> <p>N.0°03'W., bet. secs. 20 and 21. Over slightly rolling land, thru scattering timber and undergrowth.</p> <p>Desc. 60 ft. over N. slope to</p> <p>11.00 Wash, course NW. Asc. 46 ft. to</p> <p>17.90 Ridge, bears SE. and NW. Desc. 85 ft. over broken NE. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bed rock, deposit stone marked cross (x) at base of post, and raise a mound of stone around post. for ¼ sec. cor., marked on brass cap</p> <p style="text-align: center;"> ¼ S 20 S 21 1920 </p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor. Continue over rolling land.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 16, 17, 20 and 21, marked on brass cap</p> <p style="text-align: center;"> T25N R11W S 17 S 16 S 20 S 21 1920 </p> <p>From which</p> <p>A pinyon, 10 ins. in diam., bears N.70½°E., 64 lks. dist. marked T 25 N R 11 W S 16 B T</p> <p>A pinyon, 10 ins. in diam., bears S.84½°E., 52 lks. dist. marked T 25 N R 11 W S 21 B T</p> <p>A cedar, 16 ins. in diam., bears S.47½°W., 112 lks. dist. marked T 25 N R 11 W S 20 B T</p> <p>A pinyon, 12 ins. in diam., bears N.9½°W., 32 lks. dist. marked T 25 N R 11 W S 17 B T</p> <p>Land; slightly rolling, drains N. Soil; gravelly, 3d. rate. Timber; scrub cedar. Undergrowth; sagebrush, chamiso and cactus. Good grass.</p> <p>-----</p>
--------	--

Subdivision of T. 25 N., R.11 W.

BOOK 3544

Chains
40.00
79.90
2.00
12.00
19:00
37.00
39.95

N.89°58'E., on a random line bet.secs.16 and 21.
Set temp. $\frac{1}{4}$ sec.cor.
Intersect N and S line 2 lks. S of the cor.of secs.
15,16,21 and 22.
Thence S.89°57'W., on a true line bet.secs.16 and 21..
Over rolling land, thru scattering timber and undergrowth.
Along steep N. slope.
Desc. 126 ft. over W. slope to
Wash, course N. Asc. 84 ft. over E. slope to
Spur, slopes N. Desc. 120 ft. over W. slope to
Wash, 80 lks. wide, course N. Asc. 57 ft. to
Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec.cor., marked on brass cap

$\frac{1}{4}$ S 16
S 21
1920

From which
A cedar, 8 ins. in diam., bears N.34 $\frac{1}{2}$ °E., 82 lks.dist.
marked $\frac{1}{4}$ S 16 B T
A pine, 10 ins. in diam., bears S.52°W., 155 lks.dist.
marked $\frac{1}{4}$ S 21 B T
Asc.73 ft. over E.slope to
45.00 Ridge, bears N. and S. Desc. 93 ft. to
60.70 Wash, course NE. Asc.120 ft. over E.slope to
73.70 Ridge, bears N. and S. Desc.74 ft. over W. slope to
79.90 The cor. of secs. 16, 17, 20 and 21.
Land; rolling; drains N.
Soil; gravelly, 3d rate.
Timber; scrub cedar.
Undergrowth; sage brush, chamiso and cactus.
Fair grass.

N.0°03'W., bet.secs.16 and 17.
Over gently rolling land, thru scattering timber and
undergrowth.
Desc. over gradual N.slope.
18.00 Wash, course NE.
33.70 Wash, 20 lks. wide, course NE. from W. Asc. slightly
over SE. slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for $\frac{1}{4}$ sec.cor., marked on brass cap

$\frac{1}{4}$
S 17 | S 16
1920

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of
cor. Asc.:47 ft. to
45.80 Spur, slopes NE. Desc. 57 ft. over NW. slope to
62.90 Wash, course NE.
69.00 Desc. 78 ft. over N.E.slope to
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins..
in the ground to bed rock, supported in a mound of stone,
for cor. of secs. 8, 9, 19 and 17, marked on brass cap

T25N | R11W
S 8 | S 9
S 17 | S 16
1920


From which
A cedar, 6 ins. in diam., bears N.43 $\frac{1}{2}$ °E., 54 lks.dist.
marked T 25 N R 11 W S 9 B T
A cedar, 8 ins. in diam., bears S.42 $\frac{3}{4}$ °E., 269 lks.dist.
marked T 25 N R 11 W S 16 B T
A cedar, 10 ins. in diam., bears S.58 $\frac{1}{2}$ °W., 263 lks.dist.
marked T 25 N R 11 W S 17 B T
A cedar, 6 ins. in diam., bears N.58°W., 159 lks.dist.
marked T 25 N R 11 W S 8 B T

Subdivision of T.25 N., R.11 W.

Chains

Land; rolling, drains NE.
Soil; gravelly, 3d. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush, scrub oak and cactus.
Good grass.

40.00 N.89°57'E., on a random line bet, secs. 9 and 16.
Set temp. 1/4 sec. cor.
80.00 Intersect N and S line 14 lks, N. of the cor. of secs.
9, 10, 15 and 16.
Thence N.89°57'W.; on a true line bet. secs. 9 and 16.
Over rolling land; thru scattering timber and undergrowth.
Desc. 153 ft. over broken W. slope to
35.00 Ravine, course NW. Asc. 23 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for 1/4 sec. cor., marked on brass cap




From which


A cedar, 12 ins. in diam., bears N, 5 1/2° E., 71 lks. dist.
marked 1/4 S 9 B T No other trees within limits
Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.
41.00 Ridge, bears SE and NW. Desc. 117 ft. to
49.00 Foot of desc. Asc. 23 ft. to
55.00 Spur, slopes W. from NE. Desc. 187 ft. over W. slope to
66.00 Foot of descent.
69.80 Wash, 90 lks. wide, course NW. Asc. 23 ft. over NE slope to
80.00 The cor. of secs. 8, 9, 16 and 17.

Land; rolling, drains W.
Soil; gravelly, 3d. rate.
Timber; scrub cedar and pinyon.
Undergrowth; sagebrush, scrub oak and cactus.
Good grass.

10.00 N. 0°03' W., bet. secs. 8 and 9.
Over rolling land, thru scattering timber and undergrowth.
Desc. 46 ft. over NE slope to
Center of wash, 100 lks. wide, course NW. Asc. 135 ft. over broken
SW slope to
28.00 Spur, slopes W. Desc. 131 ft. over N. slope to
37.50 Wash, course W. Asc. 46 ft. to
40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
the ground for 1/4 sec. cor., marked on brass cap



40.50 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor.
56.60 Ridge, bears E. and W. Desc. 130 ft. over N. slope to
59.00 Wash, course W. Asc. 40 ft. over S. slope to
80.00 Ridge, bears E. and W. Desc. 116 ft. over N. slope to
Set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in
the ground to bed rock deposit stone marked cross (x)
at base of post and raise a mound of stone around
post ~~marked cross (x)~~ for cor. of secs. 4, 5,
8 and 9, marked on brass cap



Raise a mound of stone 2 ft. base, 1 1/2 ft. high W. of cor.
Land; rolling, drains NW.
Soil; gravelly, 3d. rate.
Timber; scrub cedar, pinyon and palo-verde.
Undergrowth; scrub oak, catclaw, sagebrush, chamiso and
cactus.

3544

Subdivision of T. 25 N., R. 11 W.

Chains	S.89°57'E., on a random line bet. secs. 4 and 9.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.14	Intersect N and S line, 9 lks. S of the cor. of secs. 3, 4, 9 and 10.
	Thence S.89°59'W., on a true line bet. secs. 4 and 9.
	Over rolling land, thru scattering timber and undergrowth.
	Desc. 106 ft. over SW slope to
11.60	Wash, course N., from SE. Asc. 34 ft. over E slope to
14.35	Ridge, bears SE and NW. Desc. 250 ft. over NW slope to
36.00	Wash, course NW. Asc.
40.07	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ - S - - $\frac{1}{4}$ - - - S 9 1920
	From which
	A cedar, 16 ins. in diam., bears N.58°W., 179 lks. dist. marked $\frac{1}{4}$ S 4 B T
	A cedar, 12 ins. in diam., bears S.16°E., 30 lks. dist. marked $\frac{1}{4}$ S 9 B T
	Continue asc. 25 ft. to
42.15	Spur, slopes NW. Desc. 72 ft. over W. slope to
47.65	Wash, course N. Asc. 192 ft. over NE slope to
58.35	Spur, slopes N. Desc. 42 ft. over broken NW slope to
65.65	Desc. 280 ft. over W slope to
80.14	The cor. of secs. 4, 5, 8 and 9.
	Land; rolling, drains NW.
	Soil; gravelly, 3d rate.
	Timber; cedar, piñon, and palo-verde.
	Undergrowth; scrub oak, chamiso, sagebrush and cactus.

	N.0°4'E., on a random line bet. secs. 4 and 5.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	Fail 9 lks. W. of the cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp., hereinbefore described.
	Thence S.0°08'W., on a true line bet. secs. 4 and 5.
	Over rolling land, thru scattering timber and undergrowth.
	Asc. 114 ft. over N. slope to
13.40	Spur, slopes W. Desc. 25 ft. to
17.00	Foot of descent. Thence over gently rolling land.
39.92	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap.
	$\frac{1}{4}$ S 5 S 4 1920
	Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor. Asc. slightly along broken W. slope
46.00	Small wash, course NW. Asc. 18 ft.
76.60	Spur, slopes W. Desc. 75 ft. to
78.40	Wash, course W.
79.92	The cor. of secs. 4, 5, 8 and 9.
	Land; rolling, drains W.
	Soil; gravelly, 3d. rate.
	Timber; scattering cedar, piñon and palo-verde.
	Undergrowth; scrub oak, catclaw, sagebrush, chamiso and cactus.

	From the standard cor. of secs. 31 and 32 on S. bdy. of Tp., (6th Std. Par. North) described in Book "B"
	N.0°03'W., bet. secs. 31 and 32.
	Over rolling land, thru scattering undergrowth.
16.60	AT&SFRR right of way fence, 4 strand, and telegraph line bear E. and W.
18.20	AT&SFRR bears E. to Nelson and W. to Crozier.
19.70	Right of way fence, wire fence and telegraph line bear E and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap


Subdivision of T. 25 N., R. 11 W.

Chains	
	$\frac{1}{4}$ S 31 S 32 1920
44.20	Raise a mound of stone 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Wash, 20 lks. wide, 1 ft. deep, course SW.
80.00	Thence along E. slope Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 29, 30, 31 and 32, marked on brass cap
	T25N R11 W S 30 S 29 S 31 S 32 1920
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor. Land; rolling, drains S. Soil; gravelly, 3d. rate. Timber; none. Undergrowth; some scrub oak and spanish dagger. Good bunch grass.
40.00	----- East, on a random line bet. secs. 29 and 32. Set temp $\frac{1}{4}$ sec. cor.
79.92	Intersect N and S line, 10 lks. S. of the cor. of secs. 28, 29, 32 and 33. Thence S. 89° 56' W., on a true line bet. secs. 29 and 32. Over rolling land, thru scattering undergrowth. Asc. 75 ft. over NE slope to
9.80	Small ridge, bears SE and NW. Desc. 30 ft. to
14.80	Foot of descent. Asc. gradually
22.80	Old road, bears SE. and NW. in draw, course SE.
29.80	Dim road, bears NE and SW.
34.00	Ridge, bears E and S. Desc. 40 ft. over W. slope to
39.96	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 29 S 32 1920
49.00	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.
55.00	Draw, course SW. Continue descent. Asc. 46 ft. to.
64.50	Spur, slopes S. Desc. 66 ft. over W. slope
77.50	Foot of descent. Thence over gently rolling land
79.92	Draw, course S. The cor. of secs. 29, 30, 31 and 32. Land; slightly rolling, drains SW. Soil; gravelly, 3d rate. Timber; none. Undergrowth; sagebrush, chamiso and cactus. Good grass.
40.00	----- West, on a random line bet. secs. 30 and 31. Set temp $\frac{1}{4}$ sec. cor.
79.94	Intersect the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp. hereinbefore described. Thence East, on a true line bet. secs. 30 and 31. Over rolling land. Asc. 80 ft. over W. slope to
39.94	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	S 30 $\frac{1}{4}$ S 31 1920
51.35	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.
62.00	Spurs, slope S. and W. Desc. 50 ft. to
70.00	Drain, course S. Asc. 50 ft. over W. slope to
79.94	Spur, slopes S. Desc. 30 ft. over E. slope to The cor. of secs. 29, 30, 31 and 32. Land; rolling, drains S. Soil; gravelly, 3d rate. Timber; none Undergrowth; none Good grass.

Subdivision of T. 25 N., R. 11 W.


BOOK 3544

Chains N. 0° 03' W., bet. secs. 29 and 30.
 Over rolling land,
 2.70 Drain, course S. 50° E. Asc. 85 ft. to
 35.00 Desc. 40 ft. to
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
 $\frac{1}{4}$
 S 30 S 29
 1920
 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.
 Desc. 85 ft.
 46.40 Old Trails National Highway, bears E. to Peach Springs
 and W. to Crozier.
 61.00 Foot of descent
 64.50 Road, bears E. to Peach Springs and W to Crozier.
 65.88 Asc. 55 ft. to
 76.00 Enter scattering timber and undergrowth. Divide of
 drainage from S. to N.
 Desc. 60 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
 in the ground for cor. of secs. 19, 20, 29 and 30,
 marked on brass cap



From which
 A pine, 8 ins. in diam., bears N. 46 $\frac{1}{4}$ ° E., 69 lks. dist.
 marked T 25 N R 11 W S 20 B T
 A pine, 6 ins. in diam., bears S. 21° E., 65 lks., dist.
 marked T 25 N R 11 W S 29 B T
 A pine, 12 ins. in diam., bears S. 41° W., 72 lks. dist.
 marked T 25 N R 11 W S 30 B T
 A pine, 18 ins. in diam., bears N. 69 $\frac{1}{4}$ ° W., 158 lks. dist.
 marked T 25 N R 11 W S 19 B T
 Land; rolling.
 Soil; gravelly, 3d rate.
 Timber; scattering pinyon and scrub cedar.
 Undergrowth; none. Good grass.

 N. 89° 56' E., on a random line bet. secs. 20 and 29.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N and S. line, 2 lks. N. of cor. of secs.
 20 21, 28 and 29.
 Thence S. 89° 57' W., on a true line bet. secs. 20 and 29.
 Over rolling land, thru scattering timber and undergrowth.
 Along divide bet. N and S drainage.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



From which
 A pine, 14 ins. in diam., bears N. 7 $\frac{1}{4}$ ° W., 97 lks. dist.
 marked $\frac{1}{4}$ S 20 B T
 A pine, 5 ins. in diam., bears S. 39° E., 108 lks. dist.
 marked $\frac{1}{4}$ S 29 B T
 80.00 The cor. of secs. 19, 20, 29 and 30.
 Land; rolling.
 Soil; gravelly, 2nd and 3d. rates.
 Timber; pinyon and scrub cedar.
 Undergrowth; spanish dagger.
 Good grass.

 West, on a random line bet. secs. 19 and 30.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.82 Fall 9 lks. N. of the cor. of secs. 19, 24, 25 and 30 on
 W. bdy. of Tp., hereinbefore described.

Subdivision of 25 N., R. 11 W.

Chains	Thence N.89°56'E., on a true line bet. secs. 19 and 30. Over level land draining south thru scattering timber and undergrowth.
32.82	Road, bears SE and NW.
39.82	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 19 ----- S 30 1920
	From which
	A cedar, 5 ins. in diam., bears N.43 $\frac{1}{2}$ °E., 41 lks. dist. marked $\frac{1}{4}$ S 19 B T
	A cedar, 30 ins. in diam., bears S. 29 $\frac{1}{2}$ °E., 55 lks. dist. marked $\frac{1}{4}$ S 30 B T
79.82	Thence over rolling spurs, sloping N. The cor. of secs. 19, 20, 29 and 30. Land; level and rolling. Soil; gravelly, 2nd. and 3d. rates. Timber; pinyon and scrub cedar. Undergrowth; spanish dagger. Good grass.

	N.0°03'W., bet. secs. 19 and 20. Over rolling land, thru scattering timber and undergrowth. Desc. 30 ft. to
3.30	Drain, course NW; thence over rolling land to $\frac{1}{4}$ cor.
18.80	Drain, course W.
28.30	Drain, course W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 19 S 20 1920
	From which
	A cedar, 5 ins. in diam., bears S.85 $\frac{1}{2}$ °E., 84 lks. dist. marked $\frac{1}{4}$ S 20 B T
	A cedar, 5 ins. in diam., bears S.87 $\frac{1}{2}$ °W., 62 lks. dist. marked $\frac{1}{4}$ S 19 B T
	Desc. 94 ft. to
67.20	Wash, 30 lks. wide, in canyon, course NW.
74.80	Wash, course W.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground for cor. of secs. 17, 18, 19 and 20, marked on brass cap
	T25N R11W S 18 S 17 S 19 S 20 1920
	From which
	A cedar, 5 ins. in diam., bears N.38 $\frac{1}{2}$ °E., 138 lks. dist. marked T 25 N R 11 W S 17 B T
	A cedar, 8 ins. in diam., bears S.73°E., 49 lks. dist. marked T 25 N R 11 W S 20 B T
	A cedar, 7 ins. in diam., bears S.46°W., 108 lks. dist. marked T 25 N R 11 W S 19 B T
	A cedar, 12 ins. in diam., bears N.80 $\frac{1}{2}$ °W., 39 lks. dist. marked T 25 N R 11 W S 18 B T
	Land; rolling; drains N. Soil; gravelly, 3d. rate. Timber; pinyon and scrub cedar. Undergrowth; spanish dagger and squaw brush.

40.00	N.89°57'E., on a random line bet. secs. 17 and 20 Set temp. $\frac{1}{4}$ sec. cor.
80.12	Intersect N and S line, 5 lks. N of the cor. of secs. 16, 17, 20 and 21
	Thence S: 89°59'W., on a true line bet. secs. 17 and 20 Over rolling land, thru scattering timber and undergrowth.

Subdivision of T. 25 N., R. 11 W.

BOOK 3544

Chains	Asc. 50 ft. over E. slope
5.00	Ridge, bears N and S.
7.20	Head of small ravine, course N. Asc.
10.50	Ridge, bears N and S. Desc. 37 ft. to
14.80	Wash, course NW. Asc. 25 ft. to
19.80	Spur, slopes NW. Desc. 100 ft. to
36.50	Wash, course NW. Asc.
40.06	Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 17 ----- S 20 1920.
	From which
	A pinyon, 10 ins. in diam., bears N. 44° E., 35 lks. dist. marked $\frac{1}{4}$ S 17 B T
	A cedar, 8 ins. in diam., bears S. 30° W., 52 lks. dist. marked $\frac{1}{4}$ S 20 B T Continue ascent.
42.80	Spur, slopes NW. Desc.
45.50	Wash, course NW. Asc. 40 ft.
52.80	Ridge, bears SE. and NW. Desc. 25 ft.
55.00	Wash, course NE. Asc. 20 ft.
59.20	Ridge, bears SE. and NW. Desc. 23 ft.
63.00	Wash, course NW. Asc. 20 ft.
66.50	Ridge, bears SE. and NW. Desc. 50 ft.
72.00	Wash, course NW. Asc. 30 ft.
77.00	Ridge, bears SE. and NW. Desc. 18 ft.
80.12	The cor. of secs. 17, 18, 19 and 20. Land; rolling, drains NW. Soil; gravelly, 3d. rate. Timber; scattering cedar and pinyon. Undergrowth; oak, chamiso, sagebrush and cactus. Fair grass.

40.00	S. 89° 56' W., on a random line bet. secs. 18 and 19. Set temp. $\frac{1}{4}$ sec. cor.
79.95	Fall 5 lks. S. of the cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp. hereinbefore described. Thence N. 89° 58' E., on a true line bet. secs. 18 and 19. Over rolling land, thru scattering timber and undergrowth.
14.25	Wash, 10 lks. wide, course North.
16.75	Wash, 10 lks. wide, course N. Asc. 50 ft. to
27.65	Top of asc, desc. 45 ft. to
31.50	Asc. 45 ft. to $\frac{1}{4}$ cor.
39.75	Set an iron post, 3 ft. long, 1 in in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
	$\frac{1}{4}$ S 18 ----- S 19 1920
	From which
	A cedar, 6 ins. in diam., bears N. 32 $\frac{1}{4}$ ° E., 13 lks. dist. marked $\frac{1}{4}$ S 18 B T
	A cedar, 6 ins. in diam., bears S. 18 $\frac{1}{4}$ ° W., 52 lks. dist. marked $\frac{1}{4}$ S 19 B T
	Desc. 70 ft. over E. slope to
60.75	Wash, 50 lks. wide, course N.
75.00	Wash, 20 lks. wide, course N. Asc. 30 ft. to cor.
79.75	The cor. of secs. 17, 18, 19 and 20 Land; rolling, drains N, Soil; gravelly, 3d. rate. Timber; pinyon and scrub cedar. Undergrowth; spanish dagger and scrub oak.

	N. 0° 03' W., bet. secs. 17 and 18.
	Over rolling land, thru scattering timber and undergrowth.
7.00	Spur, slopes NW. Desc. 100 ft, over NE. slope to
18.20	Wash, course NW, Asc. 35 ft. to
27.40	Spur, slopes NW. Desc. 80 ft, over N. slope to
40.00	Set an iron post, 3 ft. long, 1 in in diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

Subdivision of T. 25 N., R. 11 W.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 18 \text{ | } \text{S } 17 \\ 1920 \end{array}$$

From which

A cedar, 14 ins. in diam., bears S. 81°E ., 72 lks. dist. marked $\frac{1}{4}$ S 17 B TA cedar, 8 ins. in diam., bears N. $49\frac{3}{4}^{\circ}\text{W}$., 224. lks. dist. marked $\frac{1}{4}$ S 18, B T.

Desc. 23 ft. over NW. slope to

45.00 Wash, 40 lks. wide, course NE. Asc. 30 ft. to

48.50 Spur, slopes NE.

54.50 Wash, course NE. from W. Asc. over gradual SE slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground for cor. of secs. 7, 8, 18 and 18, marked on brass cap

$$\begin{array}{c} \text{T25N | R11W} \\ \text{S } 7 \text{ | } \text{S } 8 \\ \text{S } 18 \text{ | } \text{S } 17 \\ 1920 \end{array}$$

From which

A cedar, 10 ins. in diam., bears N. 39°E ., 110 lks. dist. marked T 25 N R 11 W S 8 B TA cedar, 16 ins. in diam., bears S. $33\frac{1}{2}^{\circ}\text{E}$., 22 lks. dist. marked T 25 N R 11 W S 17 B TA cedar, 12 ins. in diam., bears S. 60°W ., 51 lks. dist. marked T 25 N R 11 W S 18 B TA cedar, 8 ins. in diam., bears N. $62\frac{1}{2}^{\circ}\text{W}$., 145 lks. dist. marked T 25 N R 11 W S 7 B T

Land; rolling, drains N.

Soil; gravelly, 3d. rate.

Timber; cedar and pinyon.

Undergrowth; scrub oak, chamiso, sagebrush and cactus.

Fair grass.

N. $89^{\circ}59'\text{E}$., on a random line bet. secs. 8 and 17.40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect N and S line, 12 lks. S of the cor. of secs. 8, 9, 18 and 17.

Thence S. $89^{\circ}54'\text{W}$., on a true line bet. secs. 8 and 17.

Over rolling land, thru scattering timber and undergrowth.

7.00 Canyon, 40 ft. deep, course N. Asc. 14 ft.

15.00 Spur, slopes N. Desc. 122 ft. to

27.00 Small wash, course N. Asc. 145 ft. to

39.00 Spur, slopes N. 35°E . Desc. 14 ft. to40.07 Mark a cross (x) on surface rock at exact cor. point and over same set an iron post, 3 ft. long, 1 in. in diam. supported in a mound of stone; for $\frac{1}{4}$ sec. cor., marked on brass cap
$$\begin{array}{c} \text{S } 8 \\ \frac{1}{4} \text{ S } 17 \\ 1920 \end{array}$$

Desc. 150 ft. to

46.50 Wash, 2 chs. wide, course NE. Asc. 150 ft. to

52.00 Top of ascent, thence along S. slope to

62.43 Desc. 50 ft. to

70.40 Thence along S slope

80.14 The cor. of secs. 7, 8, 17 and 18.

Land; rolling, drains N.

Soil; gravelly, 3d rate.

Timber; pinyon pine and scrub cedar.

Undergrowth; catclaw, mesquite, scrub oak and palo-verde.

S. $89^{\circ}58'\text{W}$., on a random line bet. secs. 7 and 1840.00 Set temp. $\frac{1}{4}$ sec. cor.

79.49 Intersect the cor. of secs. 7, 12, 13 and 18, on the W. bdy of Tp. hereinbefore described.

Thence N. $89^{\circ}58'\text{E}$., on a true line bet secs. 7 and 18

Over rolling hills, thru scattering timber and undergrowth.

39.49 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

BOOK 8544

Subdivision of T. 25 N., R. 11 W.

Chains

 $\frac{1}{4}$ S 7
 $\frac{1}{4}$ S 18
 1920

From which

A pinyon, 12 ins. in diam., bears N. 82° E., 115 lks. dist.
marked $\frac{1}{4}$ S 7 B TA pinyon, 12 ins. in diam., bears S. $25\frac{1}{4}^{\circ}$ W., 10 lks. dist.
marked $\frac{1}{4}$ S 18 B T

Asc. 25 ft. to

46.30 Desc. over rolling SE slope to

79.49 The cor. of secs. 7, 8, 17 and 18.

Land; rolling hills.

Soil; gravelly, 3d. rate.

Timber; pinyon pine and scrub cedar.

Undergrowth; catclaw, mesquite, scrub oak and palo-verde.

N. 003° W., bet. secs. 7 and 8.

Over rolling land, thru scattering timber and undergrowth.

Asc. 150 ft. over SE. slope to

23.50 Ridge, bears NE, and SW. Desc. 105 ft. over NW slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap
 $\frac{1}{4}$
 S 7 | S 8

1920

From which

A cedar, 8 ins. in diam., bears N. 72° E., 71 lks. dist.
marked $\frac{1}{4}$ S 8 B TA cedar, 24 ins. in diam., bears S. $86\frac{1}{2}^{\circ}$ W., 73 lks. dist.
marked $\frac{1}{4}$ S 7 B T

43.00 Canyon, 40 ft. deep, course NE. Asc.

47.60 Spur, slopes NE. Desc.

48.60 Canyon, 40 ft. deep, course NE. Asc.

57.70 Spur, slopes NE. Desc.

60.00 Canyon, 50 ft. deep, course NE. Asc.

62.10 Spur, slopes NE. Desc.

65.00 Confluence of two canyons from SW. and W. to E. Asc.

74.50 Spur, slopes E. Desc.

79.50 Canyon, course E. Asc.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins.
in the ground for cor. of secs. 5, 6, 7 and 8, marked
on brass cap

T25N | R11W

S 6 | S 5

S 7 | S 8

1920

From which

A pinyon, 16 ins. in diam., bears N. $25\frac{3}{4}^{\circ}$ E., 101 lks. dist.
marked T 25 N R 11 W S 5 B TA pinyon, 18 ins. in diam., bears S. $19\frac{1}{4}^{\circ}$ E., 132 lks. dist.
marked T 25 N R 11 W S 8 B TA pinyon, 14 ins. in diam., bears S. $39\frac{3}{4}^{\circ}$ W., 60 lks. dist.
marked T 25 N R 11 W S 7 B TA cedar, 8 ins. in diam., bears N. 56° W., 85 lks. dist.
marked T 25 N R 11 W S 6 B T

Land; rolling, drains N.

Soil; gravelly, 3d. rate.

Timber; pinyon and cedar.

Undergrowth; catclaw, scrub oak, sagebrush and spanish
dagger.-----
N. $89^{\circ}54'$ E., on a random line bet. secs. 5 and 840.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect the cor. of secs. 4, 5, 8 and 9.

Thence S. $89^{\circ}54'$ W., on a true line bet. secs. 5 and 8.Over rolling hills, thru scattering timber and undergrowth.
Desc. 40 ft.

7.60 Wash, 20 lks. wide, course N. Asc. 111 ft. to

29.10 Spur, slopes NE. Desc. 73 ft. over NW. slope to

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

Subdivision of T. 25 N., R. 11 W.

Chains

$\frac{1}{4}$ S --- 5
S 8
1920

From which

A cedar, 8 ins. in diam., bears N. 16 $\frac{3}{4}$ ° W., 62 lks. dist.
marked $\frac{1}{4}$ S 5 B T

A cedar, 16 ins. in diam., bears S. 46 $\frac{1}{2}$ ° W., 43 lks. dist.
marked $\frac{1}{4}$ S 8 B T

Continue descent.

43.50 Confluence of two canyons from S. and SW. to N.

Asc. 140 ft. over SE. slope to

59.30 Spur, slopes S. along S. slope to

64.40 Wash, course S. Asc. 100 ft. over SE. slope to

80.04 The cor. of secs. 5, 6, 7 and 8.

Land; rolling hills.

Soil; gravelly, 3d. rate.

Timber; pinyon and cedar.

Undergrowth; mesquite, catclaw and sagebrush.

S. 89° 58' W., on a random line, bet. secs. 6 and 7.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.42 Fall 5 lks. N. of the cor. of secs. 1, 6, 7 and 12 on
W. bdy. of Tp. hereinbefore described.

Thence N. 89° 56' E., on a true line bet. secs. 6 and 7.

Over rolling land, thru scattering timber and undergrowth.

Asc. 115 ft.

39.42 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S --- 6
S 7
1920

From which

A cedar, 6 ins. in diam., bears N. 24° E., 28 lks. dist.
marked $\frac{1}{4}$ S 6 B T

A cedar, 6 ins. in diam., bears S. 60 $\frac{1}{2}$ ° W., 8 lks. dist.
marked $\frac{1}{4}$ S 7 B T

Continue ascent 45 ft.

63.60 Desc. 186 ft. over E. slope to

79.42 The cor. of secs. 5, 6, 7 and 8.

Land; rolling.

Soil; gravelly, 3d. rate.

Timber; pinyon and cedar.

Undergrowth; catclaw, scrub oak, sagebrush and spanish
dagger.

N. 0° 07' E., on a random line bet. secs. 5 and 6.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.05 Fall 9 lks. E. of the cor. of secs. 5, 6, 31 and 32 on
N. bdy. of Tp. hereinbefore described.

Thence S. 0° 03' W., on a true line bet. secs. 5 and 6.

Over rolling land, thru scattering timber and undergrowth.

Asc. 75 ft. over NW. slope to

3.00 Spur, slopes NE. Desc. 100 ft. over S. slope to

14.85 Wash, course NE. Asc. 54 ft. to

23.85 Wash, course NE. Asc. 30 ft. to

30.85 Wash, course NE. Asc. 40 ft. to

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S 6 | S 5
1920

From which

A cedar, 8 ins. in diam., bears N. 29 $\frac{1}{2}$ ° E., 45 lks. dist.
marked $\frac{1}{4}$ S 5 B T

A cedar, 12 ins. in diam., bears N. 24 $\frac{1}{2}$ ° W., 34 lks. dist.
marked $\frac{1}{4}$ S 6 B T

Asc. 200 ft. over rolling N. slope to

66.35 Spur, slopes E. Desc.

70.00 Canyon, 60 ft. deep, course E. Asc.

Subdivision of T. 25 N., R.11 W.

Chains

72.50

75.50

77.50

80.05

Spur, slopes E. Desc.

Canyon, 40 ft. deep, course E. Asc.

Spur, slopes E. Desc. 45 ft. to

The cor. of secs. 5,6,7 and 8..

Land; rolling.

Soil; gravelly, 3d. rate.

Timber; pinyon and cedar.

Undergrowth; catclaw, scrub oak, sage brush and spanish dagger.

 The continued satisfactory adjustment of the instruments thruout the survey of this township is indicated from field tests as given in Book "E".

GENERAL DESCRIPTION

The surface of this township is mostly of a gently rolling character, although there are some portions slightly mountainous. The northern part of the township drains in a northerly, and the southern part in a southeasterly direction. There are a few patches of good loam soil, but the greater portion is gravelly and rocky, ranging from 2nd to 4th rate.

The township is nearly all covered with a scattering growth of pinyon pine, and juniper timber. There are no running streams in the township, but water for stock can be procured from wells. There is also a spring in the SE $\frac{1}{4}$ of Sec.25.. Upper Peach Spring is located in Sec. 10. There is a well and pumphouse on line bet.secs. 2 and 3, with house close to it.

The A.T.& S.F.R.R. crosses the southern portion of the township; also the Old Trails National Highway. Peach Spring Station is located in Sec.26.

No apparent indications of mineral deposits were found. This township is within the Hualpai Indian Reservation.

BOOK 3544
46

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Francis R. Ihrie, U. S. Transitman, do hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 108, Arizona, bearing date of the 20th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivision lines

of

TOWNSHIP 25 NORTH, RANGE 11 WEST,

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 108, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

PLACE Wash. D.C.

Francis R. Ihrie
U. S. Transitman

DATE April 1, 1923

~~APPROVAL~~

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by

under his special instructions dated _____, 191____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

ECCK 3544

4-680

FIELD ASSISTANTS.
to
Claude F. Warner U.S. Transitman

NAMES.	CAPACITY.
Julius Owens	1st Chainman
I.C.Perkins	2nd Chainman
J.J.Hayden	Flagman
W.S.Archer	Axman
Geo.Demorest	Axman
L.M.Brown	Axman

BOOK 3544

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Claude F. Warner, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 108, Arizona, bearing date of the 20th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivision lines

of

TOWNSHIP 25 NORTH, RANGE 11 WEST,

of the Gila and Salt

River Base and Meridian, in the State of Arizona, and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 108, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place Helena, Mont

Claude F. Warner U.S. Transitman

Date Apr 11, 1923

APPROVAL

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

BOOK 3544

4-680

FIELD ASSISTANTS.
to

Horace Muscott U.S. Transitman

NAMES.	CAPACITY.
Ross Dykes	1st Chainman
E.C. Merrill	2nd Chainman
Ted Lizovich	Axman
Geo. Way	2nd Chainman
Homer Pepper	Flagman
I.C. Perkins	Moundsman

CERTIFICATE OF UNITED STATES TRANSITION.

I, Horace M. Muscott, U. S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 108, Arizona, bearing date of the 20th day of February, 1920, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the West boundary, North boundary and Subdivision lines of

TOWNSHIP 25 NORTH, RANGE 11 WEST,

of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in and by diagram on page 1 hereof the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 108, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place Los Angeles, Calif. Horace M. Muscott
U.S. Transitman.

Date March 22 1923

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, JUN 18 1923, 1923.

The foregoing field notes of the survey of the West boundary, North boundary, and Subdivision lines of

TOWNSHIP 25 NORTH, RANGE 11 WEST,

of the Gila and Salt River Base and Meridian, State of Arizona,

executed by Francis R. Inrie, Claude F. Warner, and Horace M. Muscott, U.S. Transitmen, under ~~his~~ special instructions dated February 20, 1920, for Group 108, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Francis R. Inrie
U. S. Surveyor General.

~~I and that the foregoing transcript of the field notes of the above described surveys~~
~~has been correctly copied from the original notes on file in this office.~~

U. S. Surveyor General.