

3684

BOOK HOOD

4-679

BOOK "E"

BOOK 3684

FIELD NOTES

OF THE SURVEY OF THE

EAST BOUNDARY,

WEST BOUNDARY

and

SUBDIVISION LINES

of

TOWNSHIP 36 NORTH, RANGE 10 WEST

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

William E. Meister, U.S. Surveyor

and

Charles E. Hunter, U.S. Transitman

In the capacity of U.S. Surveyor, under Special Instructions dated April 23, 1923,

issued by the United States Surveyor General to govern surveys included in Group

No. 122, Arizona, which were approved by the Commissioner of the General Land

Office, May 17, 1923, and Assignment Instructions dated Nov. 15, 1923

Survey commenced February 8, 1924.

Survey completed February 22, 1924.

3684


3684

1A

Book "E"

BOOK 3684

INDEX DIAGRAM.

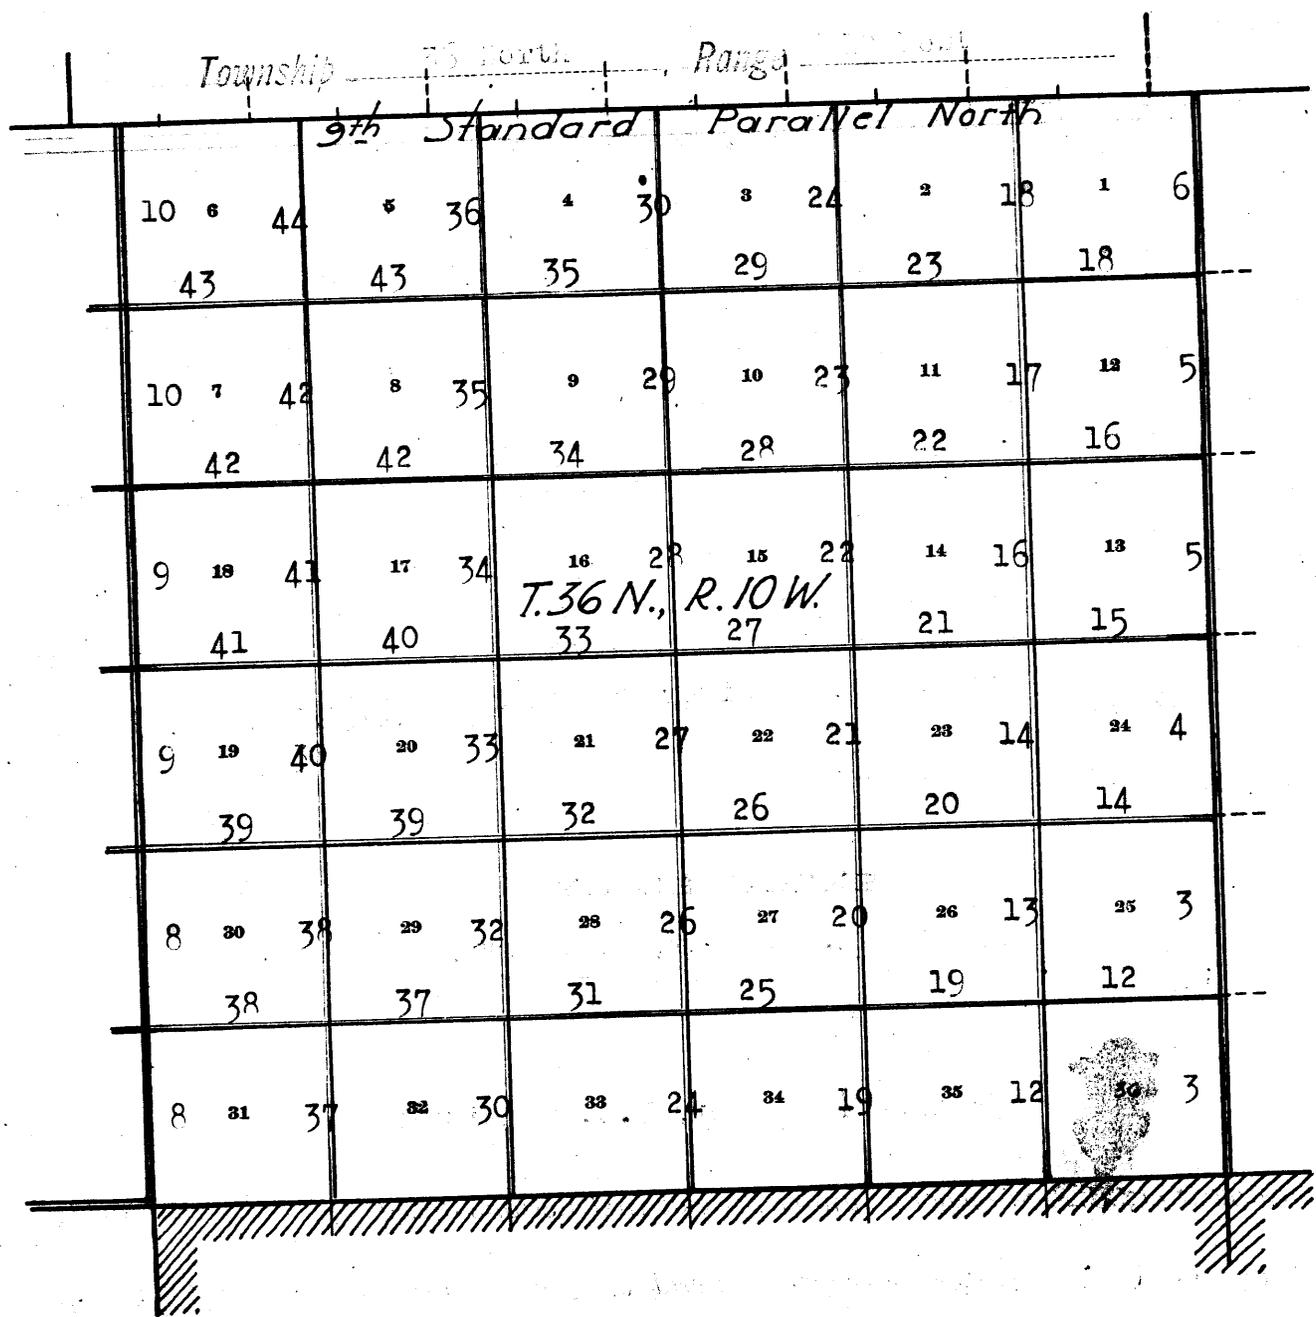

- Lines surveyed under this group.
- Accepted surveys.
- - - - - Unserved.
- //// Areas surveyed as per accepted plats on file.

BOOK 3684

DATE 4-679 b

~~INDEX~~ DIAGRAM.

Township 36 North Range 10 West
9th Std Par. N. surveyed in 1915

2-13-24	6 2-21-24	5 2-21-24	4 2-22-24	3 2-21-24	2 2-14-24	1 2-21-24
2-13-24	7 2-21-24	8 2-21-24	9 2-12-24	10 2-13-24	11 2-21-24	12 2-16-24
2-13-24	13 2-21-24	14 2-19-24	15 2-18-24	16 2-11-24	17 2-12-24	18 2-16-24
2-13-24	19 2-20-24	20 2-20-24	21 2-12-24	22 2-11-24	23 2-11-24	24 2-15-24
2-13-24	25 2-20-24	26 2-20-24	27 2-12-24	28 2-11-24	29 2-13-24	30 2-15-24
2-13-24	31 2-14-24	32 2-12-24	33 2-11-24	34 2-11-24	35 2-13-24	36 2-15-24

Surveyed in 1917

6-4817

Lines in red surveyed by William E. Hiester, U.S. Surveyor.

Lines in green surveyed by Charles E. Hunter, U.S. Transitman.

BOOK 3684

Survey commenced Feb. 8, 1924, and executed by William E. Hiester, U.S. Surveyor and Charles E. Hunter, U.S. Transitman, on dates shown on diagram on page 1 hereof, using Buff transit No. 9977 and Young and Sons transit No. 8535 respectively. Both instruments are equipped with full vertical circle and the Smith solar attachment, and were approved by the Assistant Supervisor of Surveys, conditional upon satisfactory field tests. Unless otherwise specified all azimuth determinations are accomplished with the solar attachments.

We examine the adjustments of the instruments and correct all errors, then to test the solar apparatus by comparing their indications resulting from solar observations made during a.m. and p.m. hours with a meridian determined from observation on Polaris, proceed as follows:

Feb. 8, 1924: in camp near the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, T.36 N., R.10 W., Gila and Salt River Base and Meridian, Arizona, in latitude $36^{\circ}30'N.$, longitude $113^{\circ}22'W.$, of Greenwich, at 10h 18.3m p.m. l.m.t., we observe Polaris at western elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point, in the line thus determined, on a peg driven firmly in the ground 8 chs. N.

Azimuth of Polaris at western elongation = $1^{\circ}22'$

Feb. 9: we lay off the azimuth of Polaris $1^{\circ}22'$ to the east and mark the meridian thus determined, by a tack in a stake driven firmly in the ground 8 chs. N.

At 9h 00m a.m. app.t., we set off $36^{\circ}30'N.$ on the latitude arcs., $14^{\circ}53\frac{1}{2}'S.$ on the declination arcs, and determine meridians with the solars which agree with the true meridian.

At app. noon with the latitude arcs unchanged, we observe the sun on the meridian, with each instrument, the resulting readings of the declination arcs are $14^{\circ}51\frac{1}{2}'S.$ which agrees with the computed declination of the sun.

At 3h 0m app.t., with the latitude arcs unchanged, we set off $14^{\circ}48\frac{1}{2}'S.$ on the declination arcs, and determine meridians with the solars which agree with the true meridian.

As all of the solar observations during the usual hours of solar work come within $1'30''$ of the true meridian, we conclude that the adjustments of the solars are satisfactory.

Unless otherwise specified all measurements are made with Lufkin steel tapes 5 chs. in length compared with a Lufkin standard steel tape and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurement properly reduced to true horizontal distances.

East Boundary of T.36 N., R.10 W.

Chains

The cor. of Ts. 35 and 36 N., Rs. 9 and 10 W., is an iron post; 3 ins. diam.; 12 ins. above ground, in a mound of stone, firmly set, properly marked, and witnessed by four bearing trees, one each NE., SE., SW. and NW. of cor.

Thence

North, bet. secs. 31 and 36.

Over rolling land, through heavy timber and dense undergrowth.

Asc. 60 ft. along W. slope of cliff.

12.00 Top of ascent. Desc. 34 ft. over N. slope.

17.00 Draw, course W. Asc. 70 ft. to $\frac{1}{4}$ cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 36 | S 31

1924

From which,

A pinyon, 8 ins. diam., bears N.70 $\frac{3}{4}$ °E., 38 lks. dist., marked $\frac{1}{4}$ S 31 B T

A pinyon, 6 ins. diam., bears N.6 $\frac{3}{4}$ °W., 75 lks. dist., marked $\frac{1}{4}$ S 36 B T

56.30 Draw, course NE. Asc.

61.60 Spur, slopes NE. Desc.

70.40 Draw, course E.

79.50 Spur, slopes E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 19 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 25, 30, 31 and 36, marked on brass cap

T36N 1
R10W | R9W
S 25 | S 30
S 36 | S 31

1924

From which,

A cedar, 16 ins. diam., bears N.46°E., 36 lks. dist. marked T 36 N R 9 W S 30 B T

A cedar, 14 ins. diam., bears S.41 $\frac{3}{4}$ °E., 59 lks. dist., marked T 36 N R 9 W S 31 B T

A cedar, 16 ins. diam., bears S.72 $\frac{1}{2}$ °W., 210 lks. dist. marked T 36 N R 10 W S 36 B T

A pinyon, 12 ins. diam., bears N.22°W., 127 lks. dist. marked T 36 N R 10 W S 25 B T

Land; rolling.

Soil; rocky, 3rd. and 4th. rates.

Timber; pinyon and cedar.

Undergrowth; sagebrush.

North, bet. secs. 25 and 30.

Over rolling land, through heavy timber and dense undergrowth.

Desc. 23 ft. over N. slope .

2.38 Draw, course E. Asc. slightly.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 25 | S 30

1924

From which,


A pinyon, 14 ins. diam., bears N.74 $\frac{1}{2}$ °E., 74 lks. dist.

Chains

marked $\frac{1}{4}$ S 30 B T
A pinyon, 10 ins. diam., bears S.80°W., 63 lks. dist.
marked $\frac{1}{4}$ S 25 B T

41.50
49.96
57.70
80.00

Spur, slopes NE. Desc. 54 ft. over NW. slope.
Draw, course NE. Asc. 43 ft. to
Top of ascent. Desc.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground for cor. of secs. 19, 24, 25 and 30, marked
on brass cap




From which,
A pinyon, 14 ins. diam., bears N.45 $\frac{1}{2}$ °E., 101 lks.
dist., marked T 36 N R 9 W S 19 B T
A pinyon, 8 ins. diam., bears S.44 $\frac{1}{2}$ °E., 101 lks.
dist., marked T 36 N R 9 W S 30 B T
A cedar, 10 ins. diam., bears S.25 $\frac{1}{4}$ °W., 67 lks.
dist., marked T 36 N R 10 W S 25 B T
A pinyon, 12 ins. diam., bears N.32°W., 44 lks. dist.
marked T 36 N R 10 W S 24 B T

Land; rolling.
Soil; rocky, 2nd. and 3rd. rates.
Timber; pinyon. and cedar.
Undergrowth; sagebrush.

North, bet. secs. 19 and 24.
Over rolling land, through heavy timber and dense under-
growth.

25.00
33.50
40.00


Draw, course NE. Asc.
Spur, slopes E. Desc.
Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 16 ins. diam., bears S.85 $\frac{1}{2}$ °E., 58 lks. dist.
marked $\frac{1}{4}$ S 19 B T
A pinyon, 8 ins. diam., bears N.42 $\frac{3}{4}$ °W., 44 lks.
dist., marked $\frac{1}{4}$ S 24 B T

60.00
71.30
80.00

Desc. N. slope.
Draw, course W. Asc. 90 ft. to
Top of knoll. Desc. 50 ft. over N. slope.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground for cor. of secs. 13, 18, 19 and 24, marked
on brass cap



From which,
A pinyon, 14 ins. diam., bears N.53°E., 123 lks.
dist., marked T 36 N R 9 W S 18 B T
A pinyon, 8 ins. diam., bears S.71 $\frac{1}{4}$ °E., 59 lks.
dist., marked T 36 N R 9 W S 19 B T
A cedar, 14 ins. diam., bears S.41 $\frac{1}{2}$ °W., 19 lks.
dist., marked T 36 N R 10 W S 24 B T
A cedar, 14 ins. diam., bears N.26 $\frac{3}{4}$ °W., 12 lks.
dist., marked T 36 N R 10 W S 13 B T


East Boundary of T.36 N.,R.10 W.

Chains

Land; rolling.
Soil; sandy and rocky, 2nd. and 3rd. rates.
Timber; pinyon and cedar.
Undergrowth; sagebrush.

North, bet. secs. 13 and 18.
Over rolling land, through heavy timber and dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




From which,
A cedar, 10 ins. diam., bears S.74 $\frac{1}{4}$ °E., 125 lks. dist. marked $\frac{1}{4}$ S 18 B T
A cedar, 10 ins. diam., bears N.24 3/4°W., 91 lks. dist., marked $\frac{1}{4}$ S 13 B T

45.00 Draw, course SE.

70.00 Draw, course NE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 7, 12, 13 and 18, marked on brass cap



From which,
A pinyon, 8 ins. diam., bears N.58 3/4°E., 106 lks. dist., marked T 36 N R 9 W S 7 B T
A cedar, 8 ins. diam., bears S.53°E., 109 lks. dist. marked T 36 N R 9 W S 18 B T
A pinyon, 14 ins. diam., bears S.49 $\frac{1}{2}$ °W., 37 lks. dist., marked T 36 N R 10 W S 13 B T
A pinyon, 6 ins. diam., bears N.8 $\frac{1}{2}$ °W., 6 lks. dist. marked T 36 N R 10 W S 12 B T

Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; pinyon and cedar.
Undergrowth; sagebrush.

North, bet. secs. 7 and 12.
Over rolling land, through heavy timber and dense undergrowth.

14.70 Draw, course SW. Asc. 86 ft.


22.00 Spur, slopes E. Desc. 74 ft.

29.15 Draw, course W. Asc. 25 ft.

33.50 Spur, slopes W. Desc. 44 ft.

37.30 Draw, course W. Asc. 28 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 13 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A pinyon, 10 ins. diam., bears S.50 3/4°E., 117 lks. dist., marked $\frac{1}{4}$ S 7 B T

East Boundary of T.36 N., R.10 W.

Chains


A pinyon, 12 ins. diam., bears S.28 $\frac{1}{4}$ °W., 32 lks. dist., marked $\frac{1}{4}$ S 12 B T

asc. SW. slope.

42.20
71.76

Spur, slopes W. Desc. 286 ft. to Top of precipitous cliff, bears NE. and SW. Set flag for triangulation and proceed to point on line below cliff. The vertical angle back to flag = +26°. Measure a base S.48°40'E., 1.75 chs. dist., to a point from which the flag on cliff, bears S.12°8'W.

Dist. by triangulation = 7.27 chs. which added to 71.76 = 79.03 chs.

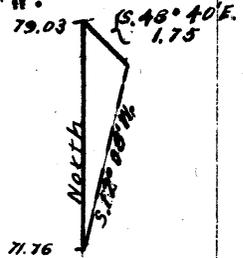


79.03

Triangulation point. Thence by chaining.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 1, 6, 7 and 12, marked on brass cap




Raise a mound of stone, 4 ft. base, 3 ft. high W. of cor.

Land; rolling and broken.
Soil; rocky, 3rd. and 4th. rates.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

North, bet. secs. 1 and 6.
Over broken land, through scattering undergrowth.
Desc. 330 ft. over NW. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high W. of cor.

Desc. 217 ft. over NW. slope.

60.83
66.50
68.41
79.19

Wash, 16 lks. wide, course NE.
Point of spur, slopes NE. Desc. 54 ft. to Same wash, 20 lks. wide, course NW.
Intersect the 9th. Standard Parallel North, 19.08 chs. S.89°45'E., of the S.C. of Ts. 37 N., Rs. 9 and 10 W. which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long, 3 ins. diam., 8 ins. in the ground to bed rock, supported in a mound of stone, for closing cor. of Ts. 36 N., Rs. 9 and 10 W., marked on brass cap



East Boundary of T.36 N., R.10 W

Chains

Raise a mound of stone, 4 ft. base, $3\frac{1}{2}$ ft. high S. of cor.


Land; rolling.
Soil; rocky, 3rd. and 4th. rates.
Timber; none.
Undergrowth; sagebrush.

Chains

The cor. of Ts. 35 and 36 N., Rs. 10 and 11 W., is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by four bearing trees, one each NE., SE., SW. and NW. of cor.


Thence
North, bet. secs. 31 and 36.
Over rolling land, through scattering timber.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 10 ins. diam., bears S. $52\frac{1}{2}^{\circ}$ E., 359 lks. dist.
marked $\frac{1}{4}$ S 31 B T
A cedar, 6 ins. diam., bears N. $15\frac{1}{2}^{\circ}$ W., 432 lks. dist.
marked $\frac{1}{4}$ S 36 B T

69.02 Road, bears S. 65° E. and N. 65° W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 25, 30, 31 and 36, marked on brass cap




Dig pits, 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.

Land; rolling.
Soil; clay loam, 2nd. rate.
Timber; cedar.
Undergrowth; none.


North, bet. secs. 25 and 30.
Over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

46.46 Wash, 3 ft. wide, course N. 80° E.
70.71 Wash, 3 ft. wide, course S. 85° E.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bed rock, supported in a mound of stone for cor. of secs. 19, 24, 25 and 30, marked on brass cap



Raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high W. of cor.


West Boundary of T.36 N., R.10 W.

Chains

Land; rolling.
Soil; clay loam, 2nd. rate.
Timber; none.
Undergrowth; sagebrush.


North, bet. secs. 19 and 24.
Over rolling land, through scattering cedar brush.

- 4.50 Wash, 10 lks. wide, course N.80°E.
- 5.00 Road, bears N.80°E.
- 10.00 Asc. 100 ft. over gentle S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

- 66.45 Desc. over NW. slope.
- 74.45 Wash, 12 lks. wide, course N.75°E.
- Asc. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., on rock ledge supported in a mound of stone, for cor. of secs. 13, 18, 19 and 24, marked on brass cap




Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high W. of cor.

Land; rolling.
Soil; gravelly, 2nd. rate.
Timber; none.
Undergrowth; cedar brush.

North, bet. secs. 13 and 18.
Over rolling land, through scattering cedar.

- 17.20 Wash, 10 lks. wide, course S.80°E. Asc.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone with marked cross (+) stone at base of post, for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 6 ins. diam., bears S.34°E., 490 lks. dist. marked $\frac{1}{4}$ S 18 BT

- 53.87 Draw, course N.70°E.
- 69.00 Wash, 12 lks. wide, course E.
- 79.85 Draw, course S.85°E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 7, 12, 13 and 18, marked on brass cap

West Boundary of T.36 N., R.10 W.

Chains

T36N	
R11W	R10W
S 12	S 7
S 13	S 18
1924	

Raise a mound of stone, 4 ft. base, $3\frac{1}{2}$ ft. high W. of cor.

Land; rolling.
Soil; rocky, 2nd. and 3rd. rates.
Timber; cedar.
Undergrowth; none.

North, bet. secs. 7 and 12.
Over rolling land, through scattering cedar.

13.00 Wash, 10 lks. wide, course S.75°E.
25.30 Draw, course S.65°E.
40.00 Set an iron post, 3 ft. long, 1 in. diam., on surface rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

4	
S 12	S 7
1924	

From which,
A cedar, 12 ins. diam., bears N.49 $\frac{1}{2}$ °E., 218 lks. dist. marked $\frac{1}{4}$ S 7 B T
A cedar, 8 ins. diam., bears N.4°W., 465 lks. dist. marked $\frac{1}{4}$ S 12 B T

53.00 Desc. 100 ft. over NW. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 1, 6, 7 and 12, marked on brass cap

T36N	
R11W	R10W
S 1	S 6
S 12	S 7
1924	

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high W. of cor.

Land; rolling.
Soil; sandy loam, 2nd. rate.
Timber; cedar.
Undergrowth; cedar brush.

North, bet. secs. 1 and 6.
Over rolling land, through scattering timber and undergrowth.

3.60 Wash, 15 lks. wide, course N.75°E.
5.00 Road, bears N.75°E. and S.75°W.
Asc. gradually.
27.50 Road, bears E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., on surface rock, with marked cross (+) stone alongside base of post and supported in a mound of stone, for $\frac{1}{4}$ sec. cor., marked on brass cap

4	
S 1	S 6
1924	

West Boundary of T.36 N.,R.10 W.

Chains
41.00

Draw, course S.80°E.

81.59

Intersect the 9th. Standard Parallel North, 20.24 chs. S.89°46'E., of the S.C. of Ts. 37 N.,Rs. 10 and 11 W. which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone, N. of cor.

At point of intersection, set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground for closing cor. of Ts. 36 N.,Rs. 10 and 11 W., marked on brass cap

T37N R10W	
S 31	
<hr/>	
S 1	S 6
R11W	R10W
T36N	
C C	
1924	

Raise a mound of stone, 5 ft. base, 4 ft. high S. of cor.

Land; rolling.
Soil; rocky, 2nd. and 3rd. rates.
Timber; pine and cedar.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains

The cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., is an iron post, 2 ins. diam., 10 ins. above ground, firmly set, properly marked, and witnessed by four pits, one in each sec. NE., SE., SW. and NW. of cor.

Thence

N.0°1'W., bet. secs. 35 and 36.

Over rolling land, through scattering timber and undergrowth.

24.78

Wash, 6 lks. wide, course NW.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 35 | S 36

1924

From which,

A cedar, 16 ins. diam., bears S.50 3/4°E., 28 lks. dist., marked $\frac{1}{4}$ S 36 B T

A cedar, 12 ins. diam., bears S.81 3/4°W., 110 lks. dist., marked $\frac{1}{4}$ S 35 B T

40.20

Wash, 6 lks. wide, course NW.

79.00

Wash, 6 lks. wide, course SW.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 25, 26, 35 and 36, marked on brass cap

T36N R10W
S 26 | S 25
S 35 | S 36
1924

From which,

A cedar, 3 ins. diam., bears N.43 3/4°E., 101 lks. dist., marked T 36 N R 10 W S 25 B T

A pinyon, 10 ins. diam., bears S.15 1/4°E., 438 lks. dist., marked T 36 N R 10 W S 36 B T

A cedar, 24 ins. diam., bears S.60°W., 329 lks. dist., marked T 36 N R 10 W S 35 B T

A cedar, 16 ins. diam., bears N.21 3/4°W., 248 lks. dist., marked T 36 N R 10 W S 26 B T

Land; rolling.

Soil; rocky, 4th. rate.

Timber; cedar and pinyon.

Undergrowth; sagebrush.


40.00

N.89°55'E., on a random line bet. secs. 25 and 36.

Set temp. $\frac{1}{4}$ sec. cor.

Precipitous cliffs in advance prevent chaining, triangulate as follows: Proceed to a point on top of rim from which the cor. of secs. 25, 26, 35 and 36, bears S.89°44'W. the vertical angle back to cor. = -16°. Also a flag on the cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., bears S.32°25'W.

By triangulation the dist, from cor. of secs. 25, 26, 35 and 36 to triangulation point on rim = 50.98 chs. and the triangulation point is 16 lks. N. of random line.

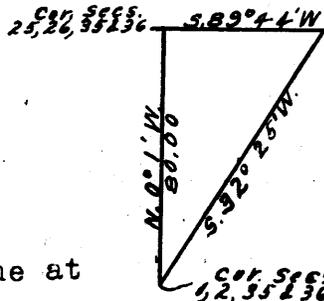

Offset South 16 lks. to random line at

50.98

Thence continue N.89°55'E. on random line.

80.08

Fall 11 lks. N. of the cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp., hereinbefore described.

Subdivision of T.36 N., R.10 W.

Chains


Thence West, on a true line bet. secs. 25 and 36. Over rolling land, through scattering timber and undergrowth.

13.40
29.10

Asc. E. slope. Top of ascent. Desc. 240 ft. over W. slope to Rim of cliffs, bears SE. and NW. Thence by triangulation as hereinbefore described, descending about 528 ft. to

40.04

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,

- A pinyon, 8 ins. diam., bears N.46 $\frac{1}{4}$ °E., 32 lks. dist., marked $\frac{1}{4}$ S 25 B T
- A pinyon, 6 ins. diam., bears S.33°E., 37 lks. dist., marked $\frac{1}{4}$ S 36 B T

Desc. 400 ft. over W. slope.

77.50
80.08

Wash, 6 lks. wide, course SW. The cor. of secs. 25, 26, 35 and 36.

Land; rolling and mountainous. Soil; rocky, 4th. rate. Timber; cedar and pinyon. Undergrowth; sagebrush.


N.0°1'W., bet. secs. 25 and 26. Over rolling land, through scattering timber and undergrowth.

.70
22.70

Fence, bears NE. and SW. Wash, 60 lks. wide, 20 ft. deep, course W.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




From which,

- A cedar, 14 ins. diam., bears N.27 $\frac{1}{2}$ °E., 295vlks. dist., marked $\frac{1}{4}$ S 25 B T
- A cedar, 12 ins. diam., bears S.85 $\frac{1}{2}$ °W., 244 lks. dist., marked $\frac{1}{4}$ S 26 B T

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 23, 24, 25 and 26, marked on brass cap




Dig pits, 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.

Land; rolling. Soil; rocky, 4th. rate. Timber; cedar and pinyon. Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains 40.00	East, on a random line bet. secs. 24 and 25. On account of precipitous cliffs on line ahead, it is impracticable to chain. Triangulate as follows: A flag on top of rim above cliffs, bears N.89°57'E. The vertical to flag is + 25°. Measure a base N.0°1'W. 40.00 chs. dist. to a point from which flag bears S.37°46'E. The three angles of the triangle are therefore 89°58', 37°45' and 52°17', the sum of which is 180°. Dist. by triangulation = 30.96 chs. Offset South 3 lks. to a point on random line at Thence East, on random line by chaining. Set temp. $\frac{1}{4}$ sec. cor. Fall 8 lks. S. of the cor. of secs. 19, 24, 25 and 30 on E. bdy. of Tp., hereinbefore described. Thence S.89°57'W., on a true line bet. secs. 24 and 25. Over rolling land, through scattering timber and undergrowth. Asc. gentle NE. slope. Top of ascent. Desc. 194 ft. over W. slope to Wash, course SW. Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap
30.96	
40.00	
80.20	
17.30	
30.61	
40.10	
	$\begin{array}{c} S' 24 \\ S' 25 \\ 1924 \end{array}$
	From which, A pinyon, 10 ins. diam., bears N.26 $\frac{1}{4}$ °E., 82 lks. dist., marked $\frac{1}{4}$ S 24 B T A pinyon, 12 ins. diam., bears S.75 $\frac{1}{4}$ °E., 34 lks. dist., marked $\frac{1}{4}$ S 25 BT Desc. 37 ft. over SW. slope to Draw, course SW. Asc. 85 ft. to Top of rim, bears N. and S. Desc. 100 ft. Thence by triangulation as hereinbefore described, descending 864 ft. to The cor. of secs. 23, 24, 25 and 26. Land; rolling and mountainous. Soil; rocky, 4th. rate. Timber; cedar and pinyon.
42.00	
46.90	
49.24	
80.20	
	$\begin{array}{c} \frac{1}{4} \\ S' 23 \quad \quad S' 24 \\ 1924 \end{array}$
	Raise a mound of stone, 3-ft. base, 2-ft. high W. of cor.
41.05	Fence, bears E. and W.

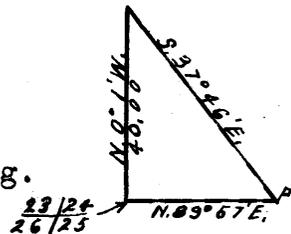

Subdivision of T.36 N., R.10 W.

Chains

75.20
80.00

Road, bears NE. and SW.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 13, 14, 23 and 24, marked on brass cap

T36N R10W
S 14 | S 13
S 23 | S 24
1924

From which,


- A cedar, 12 ins. diam., bears N.50 3/4°E., 181 lks. dist., marked T 36 N R 10 W S 13 B T
- A cedar, 8 ins. diam., bears S.36°E., 35 lks. dist. marked T 36 N R 10 W S 24 B T
- A cedar, 10 ins. diam., bears S.40 3/4°W., 107 lks. dist., marked T 36 N R 10 W S 23 B T
- A cedar, 30 ins. diam., bears N.67 1/2°W., 151 lks. dist. marked T 36 N R 10 W S 14 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.89°57'E., on a random line bet. secs. 13 and 24.

Precipitous cliffs on line ahead prevent chaining, triangulate as follows: Proceed to a point on rim on line ahead. The vertical angle back to cor. = - 35°. A flag at the 1/4 sec. cor. of secs. 23 and 24, bears S.39°45'W.

Dist. by triangulation = 33.30 chs.



33.30

Triangulation point. Thence by chaining.

40.00
80.00

Set temp. 1/4 sec. cor.
Fall 9 lks. N. of the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., hereinbefore described.

Thence
N.89°59'W., on a true line bet. secs. 13 and 24.
Over rolling land, through scattering timber and undergrowth.

16.43
28.20
40.00

Desc. 57 ft. over W. slope.
Draw, course NW. Asc. 84 ft. over NE. slope.
Desc. 72 ft. over W. slope.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for 1/4 sec. cor. marked on brass cap

S 13
1/4 S 24
1924

From which,

- A pinyon, 6 ins. diam., bears N.8 3/4°E., 38 lks. dist., marked 1/4 S 13 B T
- A pinyon, 8 ins. diam., bears S.16 1/4°W., 73 lks. dist., marked 1/4 S 24 B T

43.43
46.70

Desc. W. slope.
Rim of cliffs, bears SE. and NW.
Thence by triangulation as hereinbefore described, descending 1250 ft.

78:80
80:80

Road, bears NE. and SW.
The cor. of secs. 13, 14, 23 and 24.


Land; rolling and mountainous.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains


N.0°1'W., bet. secs. 13 and 14.
Over rolling land, through scattering timber and undergrowth.

- 27.50 Wash, course W.
- 35.94 A spring, bears N.85 $\frac{1}{2}$ °E., 30 chs. dist.
- 39.00 Wash, 20 lks. wide, course W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A pinyon, 14 ins. diam., bears S.33 $\frac{1}{4}$ °E., 41 lks. dist. marked $\frac{1}{4}$ S 13 B T
A cedar, 12 ins. diam., bears S.72 $\frac{1}{4}$ °W., 50 lks. dist. marked $\frac{1}{4}$ S 14 B T

- 63.20 Road, bears SE. and NW.
- 7 $\frac{1}{2}$.00 Head of draw, course NW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 11, 12, 13 and 14, marked on brass cap




From which,
A cedar, 16 ins. diam., bears N.58°E., 104 lks. dist. marked T 36 N R 10 W S 12 B T
A cedar, 12 ins. diam., bears S.64 $\frac{3}{4}$ °E., 169 lks. dist., marked T 36 N R 10 W S 13 B T
A pinyon, 12 ins. diam., bears S.64 $\frac{3}{4}$ °W., 110 lks. dist., marked T 36 N R 10 W S 14 B T
A cedar, 10 ins. diam., bears N.63 $\frac{3}{4}$ °W., 73 lks. dist., marked T 36 N R 10 W S 11 B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

S.89°59'E., on a random line bet. secs. 12 and 13.

Precipitous cliffs on line ahead prevent chaining. Triangulate as follows: Proceed to a point on line on top of rim. The vertical angle back to cor. = - 17 $\frac{1}{2}$ °. A flag at the 44.51 ch. point bet. secs. 13 and 14 bears S.53°47'W. The three angles of the triangle are therefore 89°58', 53°48' and 36°14', the sum of which is 180°.

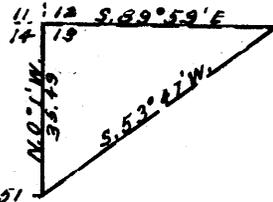

Dist. by triangulation = 48.45 chs.

- 48.45 Triangulation point.

Thence by chaining.

- 80.14 Fall 3 lks. S. of the cor. of secs. 7, 12, 13 and 18 on E. bdy. of Tp., hereinbefore described.

Thence


West, on a true line bet. secs. 12 and 13.
Over rolling land, through scattering timber and undergrowth.

- 23.60 Asc. gentle SE. slope.
- 31.73 Top of ascent. Desc. 186 ft. over W. slope to Set an iron post, 3 ft. long, 1 in. diam., on ledge,

Subdivision of T.36 N., R.10 W.

Chains

supported in a mound of stone, for witness cor. to the 1/4 sec. cor. marked on brass cap



From which,
 A cedar, 20 ins. diam., bears N.80 3/4°E., 150 lks. dist., marked W C 1/4 S 12 B T
 A pinyon, 10 ins. diam., bears S.26 1/2°E., 145 lks. dist., marked W C 1/4 S 13 B T

Thence by triangulation as hereinbefore described, descending 950 ft. over precipitous W. slope.
 The true point for 1/4 sec. cor. (Inaccessible)
 The cor. of secs. 11, 12, 13 and 14.


40.07
80.14

Land; rolling and mountainous.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°1'W., bet. secs. 11 and 12.
 Over rolling land, through scattering timber and undergrowth.

Along W. slope.
 Draw, course W.
 Draw, course W.
 Draw, course SW.
 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for 1/4 sec. cor. marked on brass cap


10.00
17.88
38.04
40.00



From which,
 A cedar, 16 ins. diam., bears N.65 1/4°E., 87 lks. dist. marked 1/4 S 12 B T
 A cedar, 8 ins. diam., bears N.61 1/4°W., 61 lks. dist. marked 1/4 S 11 B T

65.17
80.00

Draw, course SW.
 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 1, 2, 11 and 12, marked on brass cap



From which,
 A pinyon, 12 ins. diam., bears N.12 1/2°E., 35 lks. dist. marked T 36 N R 10 W S 1 B T
 A cedar, 18 ins. diam., bears S.55°E., 3 lks. dist. marked T 36 N R 10 W S 12 B T
 A pinyon, 10 ins. diam., bears S.37 3/4°W., 224 lks. dist., marked T 36 N R 10 W S 11 B T
 A pinyon, 10 ins. diam., bears N.62 1/4°W., 44 lks. dist. marked T 36 N R 10 W S 2 B T

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.


Chains	East, on a random line bet. secs. 1 and 12. Set temp. $\frac{1}{4}$ sec. cor.
40.00	
80.12	Fall 5 lks. S. of the cor. of secs. 1, 6, 7 and 12 on E. bdy. of Tp., hereinbefore described.
	Thence S. $89^{\circ}58'W.$, on a true line bet. secs. 1 and 12. Over rolling land, through scattering undergrowth. Desc. 576 ft. over W. slope to
40.06	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground with marked cross (+) stone alongside for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4} \quad \frac{S \ 1}{S \ 12}$ 1924
	From which, A cedar, 8 ins. diam., bears N. $73\frac{1}{2}^{\circ}W.$, 106 lks. dist. marked $\frac{1}{4}$ S 1 B T
80.12	The cor. of secs. 1, 2, 11 and 12. Land; rolling. Soil; rocky, 3rd. rate. Timber; none. Undergrowth; sagebrush and oak.
	N. $0^{\circ}1'W.$, bet. secs. 1 and 2. Over rolling land, through scattering timber and undergrowth.
2.50	Head of draw, course SW. Asc. 360 ft. over SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bed rock, with marked cross (+) stone alongside, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 2 S 1
	1924
70.14	Asc. 460 ft. over SW. slope of cinder cone. Top of cinder cone. Desc. 140 ft. over NE. slope.
79.62	Intersect the 9th Standard Parallel North, 18.72 chs. S. $89^{\circ}43'E.$ of the S.C. of secs. 35 and 36, T.37 N., R.10 W. which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, witnessed by a mound of stone N. of cor.
	At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for closing cor. of secs. 1 and 2, marked on brass cap
	T37N R10W S 36 S 2 S 1 T36N R10W C C 1924
	Raise a mound of stone, 4 ft. base, 3 ft. high S. of cor.
	Land; rolling. Soil; rocky, 4th. rate. Timber; cedar and pinyon. Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains The cor. of secs. 2, 3, 34 and 35 on S. bdy. of Tp., is an iron post, 2 ins. diam., 10 ins. above ground, firmly set, properly marked, and witnessed by four pits one in each sec. NE., SE., SW. and NW. of cor.

Thence
N.0°1'W., bet. secs. 34 and 35.
Over rolling land.

37.20 Road, bears N.40°W. and S.40°E.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.

40.15 Fence, bears E. and W. Fence cor. bears E. 30 lks. dist. from which fence runs north.


42.00 House, bears west about 5 chs.

45.91 Small corral, bears W. 80 lks. dist.

47.00 Reservoir, bears W. about 4 chs.

79.90 Fence, bears E. and W. From fence cor. 40 lks. E. a two wire fence runs south.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 26, 27, 34 and 35, marked on brass cap



Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.


Land; rolling.
Soil; clay loam, 2nd. rate.
Timber; none.
Undergrowth; none.

40.00 N.89°55'E., on a random line bet. secs. 26 and 35.
Set temp. $\frac{1}{4}$ sec. cor.

80.02 Fall 6 lks. W. of the cor. of secs. 25, 26, 35 and 36.

Thence
S.89°58'W., on a true line bet. secs. 26 and 35.
Over rolling land, through scattering timber and undergrowth.

32.20 Road, bears SE. and NW.
40.01 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.

70.00 Fence, bears N.89°25'E. and S.89°25'W.
80.02 The cor. of secs. 26, 27, 34 and 35.

Land; rolling.
Soil; gumbo, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains	N.0°1'W., bet. secs. 26 and 27. Over rolling land.
24.70	Fence, bears E. and W. Enter field.
33.90	Leave field.
37.80	Road, bears N.70°W. and S.70°E.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 27 S 26 1924
	Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.
52.35	Road, bears S.45°E. and N.45°W.
59.20	Fence, bears E. and W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 22, 23, 26 and 27, marked on brass cap
	T36N R10W S 22 S 23 S 27 S 26 1924
	From which, A cedar, 8 ins. diam., bears S.47 $\frac{1}{2}$ °E., 583 lks. dist. marked T 36 N R 10 W S 26 B T Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE. SW. and NW. of cor. 3 ft. dist.
	Land; rolling. Soil; clay loam, 2nd. rate. Timber; none. Undergrowth; none.
40.00	N.89°58'E., on a random line bet. secs. 23 and 26. Set temp. $\frac{1}{4}$ sec. cor.
80.04	Fall 2 lks. S. of the cor. of secs. 23, 24, 25 and 26. Thence S.89°57'W., on a true line bet. secs. 23 and 26. Over rolling land, through scattering timber and undergrowth. Desc. gentle W. slope.
38.00	Road, bears NE. and SW.
40.02	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 23 S 26 1924
	From which, A pinyon, 12 ins. diam., bears N.87°E., 639 lks. dist. marked $\frac{1}{4}$ S 23 B T A cedar, 14 ins. diam., bears S.84 $\frac{1}{4}$ °E., 571 lks. dist. marked $\frac{1}{4}$ S 26 B T
71.34	Leave scattering timber, bears N. and S.
80.04	Fence, bears N. and S. The cor. of secs. 22, 23, 26 and 27.
	Land; rolling. Soil; clay loam, 2nd. rate. Timber; cedar and pinyon. Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains	N.0°1'W., bet. secs. 22 and 23. Over rolling land, through scattering undergrowth.
6.10	Fence, bears E. and W. Enter field.
13.65	Fence, bears E. and W. Leave field.
19.02	Road, bears SE. and NW.
33.00	Draw, course W.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 22 S 23 1924
	Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.
40.98	Fence, bears E. and W.
57.00	Fence, bears NE. and SW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 14, 15, 22 and 23, marked on brass cap
	T36N, R10W S 15 S 14 S 22 S 23 1924
	Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.
	Land; rolling. Soil; clay loam, 2nd. rate. Timber; none. Undergrowth; sagebrush.
40.00	N.89°57'E., on a random line bet. secs. 14 and 23. Set temp. $\frac{1}{4}$ sec. cor.
80.02	Fall 7 lks. N. of the cor. of secs. 13, 14, 23 and 24.
	Thence West, on a true line bet. secs. 14 and 23. Over rolling land, through heavy timber and scattering undergrowth.
16.60	Desc. 70 ft. over gradual W. slope to Draw, course NW.
20.20	Fence, bears N. and S.
25.00	Timber becomes scattering.
29.35	Spur, slopes W. Desc. 46 ft. over W. slope.
31.00	Leave timber, bears N. and S.
34.40	Wash, 6 lks. wide, course SW.
40.01	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 14 S 23 1924
	Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.
78.80	Fence, bears N. and S.
80.02	The cor. of secs. 14, 15, 22 and 23.
	Land; rolling. Soil; clay loam, 2nd. rate. Timber; cedar and pinyon. Undergrowth; sagebrush.


Subdivision of T.36 N., R.10 W.

Chains	<p>N.0°1'W., bet. secs. 14 and 15. Over gently rolling land, through scattering undergrowth.</p> <p>3.20 Fence, bears E. and NW. 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap</p> <div style="text-align: center;"> </div> <p>Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.</p> <p>64.30 Road, bears NE. and SW. 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground with marked cross (+) stone alongside for cor. of secs. 10, 11, 14 and 15, marked on brass cap</p> <div style="text-align: center;"> </div> <p>From which, A cedar, 14 ins. diam., bears N.1°E., 334 lks. dist. marked T 36 N R 10 W S 11 B T A cedar, 16 ins. diam., bears S.69 $\frac{3}{4}$°E., 206 lks. dist., marked T 36 N R 10 W S 14 B T A pinyon, ins. diam., bears N.8 $\frac{3}{4}$°W., 532 lks. dist., marked T 36 N R 10 W S 10 B T</p> <p>Land; rolling. Soil; clay loam, 2nd. rate. Timber; none. Undergrowth; sagebrush.</p>
40.00 79.98	<p>East, on a random line bet. secs. 11 and 14. Set temp. $\frac{1}{4}$ sec. cor. Fall 14 lks. N. of the cor. of secs. 11, 12, 13 and 14.</p> <p>Thence N.89°54'W., on a true line bet. secs. 11 and 14. Over rolling land, through scattering undergrowth. Desc. 32 ft. over W. slope to</p> <p>3.50 Draw, course N.35°W. 9.40 Road, bears S.20°E. and N.20°W. 24.90 Spur, bears N.30°W. and S.30°E. Desc. 114 ft. over W. slope. 27.00 Rim of small break, bears N. and S. Continue descent. 35.00 Foot of descent. 39.99 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap</p> <div style="text-align: center;"> </div> <p>From which, A cedar, 16 ins. diam., bears N.3°E., 505 lks. dist. marked $\frac{1}{4}$ S 11 B T A pinyon, 10 ins. diam., bears S.85°E., 778 lks. dist. marked $\frac{1}{4}$ S 14 B T</p>
78.90 79.98	<p>Road, bears N. and S. The cor. of secs. 10, 11, 14 and 15.</p> <p>Land; rolling. Soil; clay loam, 2nd. rate. Timber; none. Undergrowth; sagebrush.</p>

Subdivision of T.36 N., R.10 W.


Chains N.0°1'W., bet. secs. 10 and 11.
 Over rolling land, through scattering timber and undergrowth.

15.00 Leave timber, bears E. and W.
 24.73 Road, bears NE. and SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high W. of cor.

50.40 road, bears SE. and NW.
 74.00 Low spur, slopes NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 2, 3, 10 and 11, marked on brass cap



Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.


Land; rolling.
 Soil; clay loam, 2nd. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

40.00 S.89°54'E., on a random line bet. secs. 2 and 11.
 80.04 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 5 lks. S. of the cor. of secs. 1, 2, 11 and 12.

Thence
 N.89°56'W., on a true line bet. secs. 2 and 11.
 Over rolling land, through scattering timber and undergrowth.

1.00 Desc. 60 ft. over W. slope.
 Wash, 16 lks. wide, course S.
 Asc. 60 ft.

12.70 Desc. 180 ft. over W. slope.
 30.00 Foot of descent. Leave timber, bears N. and S.
 40.02 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
 a cedar, 14 ins. diam., bears S.77 $\frac{3}{4}$ °E., 452 lks. dist., marked $\frac{1}{4}$ S 11 B T
 Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.

79.50 Wash, 5 lks. wide, course NW.
 80.04 The cor. of secs. 2, 3, 10 and 11.

Land; rolling.
 Soil; clay loam, 2nd. rate.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains N.0°1'W., bet. secs. 2 and 3.
Over rolling land, through scattering undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
 S 3 | S 2
 1924

From which,
 A cedar, 14 ins. diam., bears N.26 3/4°E., 537 lks. dist., marked $\frac{1}{4}$ S 2 B T
 A cedar, 12 ins. diam., bears N.47 1/2°W., 572 lks. dist., marked $\frac{1}{4}$ S 3 B T

40.45 Wash, 5 lks. wide, course NW.
 45.50 Draw, course W.
 55.00 Enter brokenland and scattering timber, bears E. and W.
 64.60 Wash, 14 lks. wide, course W. Asc.
 72.00 Spur, slopes W. Desc.
 79.40 Wash, 22 lks. wide, course W.
 79.93 Intersect the 9th. Standard Parallel North, 18.81 chs. S.89°45'E. of the S.C. of secs. 34 and 35, T.37 N., R.10 W., which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by pits.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for closing cor. of secs. 2 and 3, marked on brass cap



From which,
 A cedar, 12 ins. diam., bears S.52°E., 209 lks. dist. marked T 36 N R 10 W S 2 C C B T
 A cedar, 14 ins. diam., bears S.58 1/2°W., 186 lks. dist. marked T 36 N R 10 W S 3 C C B T


Land; rolling and broken.
 Soil; rocky, 3rd. and 4th. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

The cor. of secs. 3, 4, 33 and 34 on S. bdy. of Tp., is an iron post, 2 ins. diam., 10 ins. above ground, firmly set, properly marked, and witnessed by a mound of stone W. of cor. and two bearing trees one NE. and one SE. of cor.

Thence
 N.0°2'W., bet. secs. 33 and 34.
 Over rolling land, through scattering timber and undergrowth.

.60 Fence, bears E. and W.
 24.00 Wash, 30 lks. wide, 10 ft. deep, course NE.
 39.68 Fence, bears E. and W.
 40.00 True point for $\frac{1}{4}$ sec. cor.

40.50 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for witness cor. to the $\frac{1}{4}$ sec. cor. marked on brass cap



Subdivision of T.36 N., R.10 W.

Chains	Dig pits 18 x 18 x 12 ins. one each on line N. and S. of cor. 3 ft. dist.
44.10	Wash, 30 lks. wide, 10 ft. deep, course N. Thence in wash.
50.40	Leave wash, course NE.
52.70	Road, bears NE. and SW.
76.29	Road, bears NE. and SW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 27, 28, 33 and 34, marked on brass cap
	T36N. R10W S 28 S 27 S 33 S 34 1924
	From which, A cedar, 14 ins. diam., bears N. $33\frac{1}{4}^{\circ}$ E., 101 lks. dist. marked T 36 N R 10 W S 27 B T A cedar, 12 ins. diam., bears S. $68\frac{1}{2}^{\circ}$ E., 131 lks. dist. marked T 36 N R 10 W S 34 B T A cedar, 10 ins. diam., bears S. $81\frac{3}{4}^{\circ}$ W., 497 lks. dist., marked T 36 N R 10 W S 33 B T A cedar, 12 ins. diam., bears N. $14\frac{3}{4}^{\circ}$ W., 515 lks. dist., marked T 36 N R 10 W S 28 B T
	Land; rolling. Soil; rocky gumbo, 3rd. rate. Timber; cedar. Undergrowth; sagebrush.
40.00	N. $89^{\circ}55'$ E., on a random line bet. secs. 27 and 34. Set temp. $\frac{1}{4}$ sec. cor.
80.00	Fall 6 lks. S. of the cor. of secs. 26, 27, 34 and 35.
	Thence S. $89^{\circ}52'$ W., on a true line bet. secs. 27 and 34. Over gently rolling land, through scattering timber and undergrowth.
23.40	Road, bears N. and S.
39.30	Fence cor. bears S. 50 lks. dist. from which fences run E., W., and S.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 27 S 34 1924
	From which, A cedar, 14 ins. diam., bears N. 21° W., 46 lks. dist. marked $\frac{1}{4}$ S 27 B T A cedar, 16 ins. diam., bears S. $13\frac{1}{2}^{\circ}$ W., 113 lks. dist. marked $\frac{1}{4}$ S 34 B T
42.45	Fence, bears N. and S.
42.75	Road, Wolf Hole to Bundyville, bears N. and SE.
43.35	Fence, bears SE. and NW.
47.75	Hollmak's House, bears N. 335 lks.
50.15	Fence, bears NE. and SW.
58.36	Road, bears NE. and SW.
60.06	Wash, 18 lks. wide, 10 ft. deep, course NE.
63.41	Wash, 30 lks. wide, 10 ft. deep, course NE.
69.21	Fence, bears N. and S.
70.90	Road, bears NE. and SW.
80.00	The cor. of secs. 27, 28, 33 and 34.
	Land; rolling. Soil; rocky loam, 3rd. rate. Timber; cedar. Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains	N.0°31'W., bet. secs. 27 and 28. Over rolling land, through scattering timber and undergrowth.
24.70	Road, bears SE. and NW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 28 S 27 1924
	From which, A cedar, 12 ins. diam., bears N.66 $\frac{1}{4}$ °E., 48 lks. dist., marked $\frac{1}{4}$ S 27 B T A cedar, 12 ins. diam., bears S.37 $\frac{3}{4}$ °W., 60 lks. dist., marked $\frac{1}{4}$ S 28 B T
47.50	Road, bears NE. and SW.
77.50	Road, bears E. and W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground for cor. of secs. 21, 22, 27 and 28, marked on brass cap
	T36N R10W S 21 S 22 S 28 S 27 1924
	Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.
	Land; rolling. Soil; rocky gumbo, 3rd. rate. Timber; cedar. Undergrowth; sagebrush.
40.00	N.89°52'E., on a random line bet. secs. 22 and 27. Set temp. $\frac{1}{4}$ sec. cor.
79.92	Fall 5 lks. W. of the cor. of secs. 22, 23, 26 and 27.
	Thence S.89°54'W., on a true line bet. secs. 22 and 27. Over rolling land, through scattering undergrowth.
17.84	Road, bears NE. and SW.
22.30	Wash, 10 lks. wide, course NE.
33.00	Wash, 10 lks. wide, course N.
39.20	Fence, bears N. and S.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap
	$\frac{1}{4}$ S 22 S 27 1924
	Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.
40.00	Tank, bears N. about 7 chs. dist.
40.75	Fence, bears N. and S.
45.00	Clyde Rosenberry's House on line, barn bears N. about 3 chs. dist.
46.54	Fence, bears N. and S.
46.87	Road, bears N. and S.
55.90	Draw, course NE. Asc. gentle E. slope.
56.10	Road, bears NE. and SW.
68.30	Top of ascent. Desc. gentle W. slope.
75.30	Draw, course N.
79.92	The cor. of secs. 21, 22, 27 and 28.

Subdivision of T.36 N., R.10 W.

Chains

Land; rolling.
Soil; loam, 2nd. rate.
Timber; none.
Undergrowth; sagebrush.

N.0°2'W. bet. secs. 21 and 22.
Over rolling land, through scattering timber and undergrowth.

- 5.00 Road, bears NE. and SW.
- 5.09 Fence, bears NE. and SW.
- 10.00 Wash, 10 lks. wide, 6 ft. deep, course NE.
- 12.39 Wash, course NE.
- 38.84 Fence, bears E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 21 | S 22

1924

From which,
A cedar, 10 ins. diam., bears N.26 $\frac{1}{2}$ °E., 193 lks. dist. marked $\frac{1}{4}$ S 22 B T
A cedar, 16 ins. diam., bears N.38 $\frac{1}{4}$ °W., 91 lks. dist. marked $\frac{1}{4}$ S 21 B T
Roseberry's House, bears S.81°15'E., 818 lks. dist.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 15, 16, 21, and 22, marked on brass cap

T36N R10W
S 16 | S 15
S 21 | S 22
1924

Raise a mound of stone, 4 ft. base, 3 ft. high W. of cor.
Read's House, bears S.65°E., 12.20 chs. dist.

Land; rolling.
Soil; rocky gumbo, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

- 40.00 N.89°54'E., on a random line bet. secs. 15 and 22. Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Fall 2 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence
S.89°53'W., on a true line bet. secs. 15 and 22.
Over gently rolling land, through scattering undergrowth.

- 38.80 Top of old dam, bears N. and S.
- 39.10 Wash, 30 lks. wide, 7 ft. deep, course NW.
- 39.96 True point for $\frac{1}{4}$ sec. cor.

- 41.11 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 15
S 22 | W C
1924

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high N. of cor.

- 43.35 Fence, bears NE. and SW.
- 60.35 Fence, bears N. and S.

Chains

63.00 Barn and corrals, bear S. 5 chs. dist.
66.92 Road, bears SE. and NW.
79.92 The cor. of secs. 15, 16, 21 and 22.

Land; rolling.
Soil; loam, 2nd. rate.
Timber; none.
Undergrowth; sagebrush.

N.0°2'W., bet. secs. 15 and 16.
Over rolling land, through scattering timber and undergrowth.

19.97 Road, Wolf Hole to pundyville, bears SE. and NW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 16 | S 15

1924

From which,
A cedar, 14 ins. diam., bears S.83 3/4°E., 63 lks. dist., marked $\frac{1}{4}$ S 15 B T
A cedar, 6 ins. diam., bears N.47 3/4°W., 93 lks. dist., marked $\frac{1}{4}$ S 16 B T

45.41 Desc. 63 ft. to
Wash, 75 lks. wide, 8 ft. deep, course NW.
Asc. 60 ft.

51.64 Spur, slopes NW. Desc.
58.38 Road, bears E. and W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 9, 10, 15 and 16, marked on brass cap

T36N R10W

S 9 | S 10

S 16 | S 15

1924

Raise a mound of stone, 3 1/2 ft. base, 2 ft. high W. of cor.

Land; rolling.
Soil; gumbo, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 N.89°53'E., on a random line bet. secs. 10 and 15.
79.94 Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 10, 11, 14 and 15.

Thence
S.89°53'W., on a true line bet. secs. 10 and 15.
Over rolling land, through scattering timber and undergrowth.

22.00 Draw, course N.
29.60 Road, bears NE. and SW.
35.00 Asc. E. slope.
39.97 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

S 10

S 15

1924

Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.


Subdivision of T.36 N., R.10 W.

Chains Asc. 24 ft. over E. slope.
 42.00 Spur, slopes N. Desc. 30 ft.
 44.25 Wash, 6 lks. wide, course N.
 48.30 Wash, 6 lks. wide, course N.
 69.50 Spur, slopes N. Desc. 80 ft. to
 79.94 The cor. of secs. 9, 10, 15 and 16.

Land; rolling.
 Soil; loam, 2nd. and 3rd. rates.
 Timber; cedar.
 Undergrowth; sagebrush.


N.0°2'W., bet. secs. 9 and 10.
 Over rolling land, through scattering undergrowth.

40.00 Set an iron post, 3 ft. long, $\frac{1}{2}$ in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high W. of cor.

Asc. 40 ft. to
 51.60 Desc. 56 ft.
 53.93 Wash, 70 lks. wide, 6 ft. deep, course NE.
 Asc. 175 ft. over SE. slope.
 74.25 Top of ascent. Desc. 63 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 3, 4, 9 and 10, marked on brasscap




Raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high W. of cor.

Land; rolling.
 Soil; gumbo, 4th. rate.
 Timber; none.
 Undergrowth; sagebrush.

40.00 N.89°53'E., on a random line bet. secs. 3 and 10.
 79.92 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 11 lks. S. of the cor. of secs. 2, 3, 10 and 11.

Thence
 S.89°48'W., on a true line bet. secs. 3 and 10.
 Over rolling land, through scattering undergrowth.

8.50 Road, bears N.10°W. and S.10°E.
 39.30 Wash, 50 lks. wide, 14 ft. deep, course N.20°W.
 39.96 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



Dig pits 18 x 18 x 12 ins. one each on line N. and W. of cor. 3 ft. dist.

Subdivision of T.36 N., R.10 W.

Chains
40.60
45.00
49.90
79.92

Wash, 80 lks. wide, 20 ft. deep, course N.45°E.
Asc. over SE. slope.
Enoch Beach's Dugout, bears N.10½°E.
The cor. of secs. 3, 4, 9 and 10.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; none.
Undergrowth; sagebrush.

13.70
24.42
40.00

N.0°2'W., bet. secs. 3 and 4.
Over rolling land, through scattering undergrowth.
Desc. 63 ft. over NE. slope.
Draw, course E. Asc.
Dugout, bears N.85½°E.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground for ¼ sec. cor. marked on brass cap

S 4 S 3


1924

Dig pits 18 x 18 x 12 ins. one each on line W. and S.
of cor.

49.13
64.30
69.00
80.55

Desc. over NW. slope.
Road, bears E. and W.
Road, bears NE. and SW.
Enter scattering timber, bears E. and W.
Intersect the 9th. Standard Parallel North, 18.76 chs.
S.89°41'E., of the S.C. of secs. 33 and 34, T.37 N.,
R.10 W., which is an iron post, 3 ins. diam., 12 ins.
above ground, firmly set, properly marked, and witnessed
by two bearing trees, one each NE. and NW. of cor.

at point of intersection, set an iron post, 3 ft. long,
2 ins. diam., 28 ins. in the ground for closing cor.
of secs. 3 and 4, marked on brass cap



1924

From which,
A cedar, 40 ins. diam., bears S.6¼°E., 155 lks.
dist., marked T 36 N R 10 W S 3 C C B T
A cedar, 8 ins. diam., bears S.44 ¾°W., 28 lks.
dist., marked T 36 N R 10 W S 4 C C B T

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar and pinyon.
Undergrowth; sagebrush.

The cor. of secs. 4, 5, 32 and 33 on N.S. bdy. of Tp.,
is an iron post, 2 ins. diam., 12 ins. above ground,
firmly set, properly marked, and witnessed by four pits
one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.

13.10
40.00

Thence
N.0°3'W., bet. secs. 32 and 33.
Over gently rolling land, through scattering timber and
undergrowth.
Wash, 15 lks. wide, 5 ft. deep, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the

Subdivision of T.36 N., R.10 W.

Chains

ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

S 32 | S 33

1924

From which,

A cedar, 6 ins. diam., bears S.8°E., 18 lks. dist. marked $\frac{1}{4}$ S 33 B T

A cedar, 16 ins. diam., bears N.26 $\frac{3}{4}$ °W., 158 lks. dist., marked $\frac{1}{4}$ S 32 B T

Road, bears NE. and SW.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 28, 29, 32 and 33, marked on brass cap

T36N R10W

S 29 | S 28

S 32 | S 33

1924

From which,

A cedar, 10 ins. diam., bears N.71 $\frac{1}{2}$ °E., 28 lks. dist. marked T 36 N R 10 W S 28 B T

A cedar, 14 ins. diam., bears S.17 $\frac{1}{2}$ °E., 139 lks. dist., marked T 36 N R 10, W S 33 B T

A cedar, 12 ins. diam., bears S.46 $\frac{1}{2}$ °W., 106 lks. dist. marked T 36 N R 10 W S 32 B T

A cedar, 14 ins. diam., bears N.43 $\frac{1}{2}$ °W., 181 lks. dist. marked T 36 N R 10 W S 29 B T

Land; rolling.

Soil; rocky loam, 3rd. rate.

Timber; cedar.

Undergrowth; sagebrush.

N.89°55'E., on a random line bet. secs. 28 and 33.

Set temp. $\frac{1}{4}$ sec. cor.

Fall 9 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Thence

S.89°59'W., on a true line bet. secs. 28 and 33.

Over rolling land, through scattering timber and undergrowth.

Asc. 70 ft. over S. slope.

Spur, slopes NE. Desc. 70 ft. to

Wash, 10 lks. wide, 4 ft. deep, course NE.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 28

S 33

1924

From which,

A cedar, 12 ins. diam., bears N.48 $\frac{3}{4}$ °W., 148 lks. dist., marked $\frac{1}{4}$ S 28 B T

A cedar, 12 ins. diam., bears S.36 $\frac{1}{2}$ °W., 498 lks. dist., marked $\frac{1}{4}$ S 33 B T

Asc. gentle NE. slope.

The cor. of secs. 28, 29, 32 and 33.

Land; rolling.

Soil; rocky loam, 3rd. rate.

Timber; cedar.

Undergrowth; sagebrush.

48.00
80.00

40.00
79.90

20.00
35.30
39.95


79.90

Subdivision of T.36 N., R.10 W.

Chains


N.0°3'W., bet. secs. 28 and 29.
Over rolling land, through scattering timber and undergrowth.

- 18.40 Desc. gentle NE. slope.
- 19.20 Road, bears NE. and SW.
- 19.20 Wash, 10 lks. wide, 3 ft. deep, course NE.
- 33.80 Asc. gentle S. slope.
- 33.80 Desc.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



- From which,
- A cedar, 12 ins. diam., bears N.58°E., 440 lks. dist. marked $\frac{1}{4}$ S 28 B T
 - A cedar, 12 ins. diam., bears S.86 $\frac{1}{4}$ °W., 79 lks. dist. marked $\frac{1}{4}$ S 29 B T

- 52.50 Wash, 10 lks. wide, 4 ft. deep, course NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 20, 21, 28 and 29, marked on brass cap




- From which,
- A cedar, 14 ins. diam., bears N.44 $\frac{3}{4}$ °E., 190 lks. dist., marked T 36 N R 10 W S 21 B T
 - A cedar, 20 ins. diam., bears S.43 $\frac{1}{4}$ °E., 451 lks. dist., marked T 36 N R 10 W S 28 B T
 - A cedar, 24 ins. diam., bears S.78 $\frac{1}{2}$ °W., 261 lks. dist., marked T 36 N R 10 W S 29 B T
 - A cedar, 5 ins. diam., bears N.00°30'W., 143 lks. dist., marked T 36 N R 10 W S 20 B T

Land; rolling.
Soil; rocky loam, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

- 40.00 N.89°59'E., on a random line bet. secs. 21 and 28.
- 79.94 Set temp. $\frac{1}{4}$ sec. cor.
Fall 5 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence
S.89°57'W., on a true line bet. secs. 21 and 28.
Over rolling land, through scattering timber and undergrowth.

- 3.15 Desc.
- 5.26 Road, bears NE. and SW.
- 7.76 Fence, bears NE. and SW.
- 36.15 Wash, 6 lks. wide, 3 ft. deep, course NE.
- 38.00 Wash, 6 lks. wide, 3 ft. deep, course NE.
- 39.97 Enter plowed field.
- Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



- From which,
- A cedar, 12 ins. diam., bears N.60 $\frac{3}{4}$ °W., 760 lks. dist., marked $\frac{1}{4}$ S 21 B T
 - A cedar, 10 ins. diam., bears S.68 $\frac{3}{4}$ °E., 543 lks. dist., marked $\frac{1}{4}$ S 28 B T

Subdivision of T.36 N., R.10 W.


Chains
42.90
48.00
79.94

Leave field.
Fence, bears SE. and NW.
The cor. of secs. 20, 21, 28 and 29.

Land; rolling.
Soil; rocky loam, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

9.59
20.00
35.00
40.00


N.0°3'W., bet. secs. 20 and 21.
Over rolling land, through scattering timber and undergrowth.
Desc. 35 ft. over NE. slope.
Wash, 6 lks. wide, 8 ft. deep, course NE.
Asc. 100 ft.
Top of ascent.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

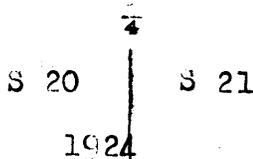

From which,
A cedar, 10 ins. diam., bears S.81 $3\frac{1}{4}$ °E., 79 lks. dist., marked $\frac{1}{4}$ S 21 B T
A cedar, ins. diam., bears N.48 $\frac{1}{4}$ °W., 209 lks. dist., marked $\frac{1}{4}$ S 20 B T

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for cor. of secs. 16, 17, 20 and 21, marked on brass cap



From which,
A cedar, 12 ins. diam., bears N.87 $3\frac{1}{4}$ °E., 281 lks. dist., marked T 36 N R 10 W S 16 B T
A cedar, 10 ins. diam., bears S.39 $\frac{1}{2}$ °E., 97 lks. dist. marked T 36 N R 10 W S 21 B T
A cedar, 7 ins. diam., bears S.46 $3\frac{1}{4}$ °W., 290 lks. dist., marked T 36 N R 10 W S 20 B T
A cedar, 8 ins. diam., bears N.57 $\frac{1}{2}$ °W., 235 lks. dist. marked T 36 N R 10 W S 17 B T

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.


40.00
79.92

N.89°57'E., on a random line bet. secs. 16 and 21.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 4 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence
S.89°59'W., on a true line bet. secs. 16 and 21.
Over rolling land, through scattering timber and undergrowth.

39.96

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,
A cedar, 8 ins. diam., bears N.70 $\frac{1}{4}$ °W., 336 lks. dist. Marked $\frac{1}{4}$ S 16 B T

Subdivision of T.36 N., R.10 W.


Chains A cedar, 12 ins. diam., bears S.82 3/4°W., 310 lks. dist., marked 1/4 S 21 B T

79.92 Asc. gentle NE. slope:
The cor. of secs. 16, 17, 20 and 21.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 16 and 17.
Over rolling land, through scattering timber and undergrowth.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock, supported in a mound of stone, for 1/4 sec. cor. marked on brass cap



1924

From which,
A cedar, 12 ins. diam., bears N.44 1/4°E., 86 lks. dist., marked 1/4 S 16 B T
A cedar, 12 ins. diam., bears S.68 3/4°W., 119 lks. dist., marked 1/4 S 17 B T

45.00 Asc.
Desc. over NE. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground for cor. of secs. 8, 9, 16 and 17, marked on brass cap



From which,
A cedar, 14 ins. diam., bears S.29 3/4°E., 338 lks. dist., marked T 36 N R 10 W S 16 B T
Raise a mound of stone, 4 ft. base, 2 ft. high W. of cor.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 N.89°59'E., on a random line bet. secs. 9 and 16.
Set temp. 1/4 sec. cor.
79.86 Fall 26 lks. N. of the cor. of secs. 9, 10, 15 and 16.

Thence
N.89°50'W., on a true line bet. secs. 9 and 16.
Over rolling land, through scattering timber and undergrowth.

3.20 Desc. 22 ft. over W. slope.
Wash, 50 lks. wide, 3 ft. deep, course N. Asc. 70 ft. over E. slope.
12.30 Spur, slopes N. Desc. 34 ft.
17.18 Draw, course NW.
22.20 Draw, course NE. Asc. 60 ft. to 1/4 cor.
30.92 Road, bears SE. and NW.
39.93 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground for 1/4 sec. cor. marked on brass cap

Subdivision of T.36 N., R.10 W.

Chains

$$\begin{array}{r} \frac{1}{4} \text{ S } 9 \\ \hline \text{S } 16 \\ 1924 \end{array}$$

From which,
 A cedar, 16 ins. diam., bears S.45 $\frac{1}{4}$ °E., 452 lks.
 dist., marked $\frac{1}{4}$ S 16 B T
 A cedar, 15 ins. diam., bears S.2 $\frac{1}{4}$ °E., 369 lks. dist.
 marked $\frac{1}{4}$ S 16 B T
 No bearing tree available in sec. 9.

62.45 Road, bears SE. and NW.
 79.86 The cor. of secs. 8, 9, 16 and 17.

Land; rolling.
 Soil; loam, 2nd. and 3rd. rates.
 Timber; cedar and pinyon.
 Undergrowth; sagebrush.

N.0°3'W., bet. secs. 8 and 9.
 Over gently rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4}$$

$$\begin{array}{c} \text{S } 8 \quad | \quad \text{S } 9 \\ \hline 1924 \end{array}$$

From which,
 A cedar, 12 ins. diam., bears S.82 $\frac{1}{4}$ °E., 147 lks.
 dist., marked $\frac{1}{4}$ S 9 B T
 A cedar, 18 ins. diam., bears S.76 $\frac{1}{2}$ °W., 273 lks.
 dist., marked $\frac{1}{4}$ S 8 B T

49.02 Main Street School House, bears N.20°44'W.
 59.10 Road, Wolf Hole to Bundyville, bears SE. and NW.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 4, 5, 8 and 9, marked on brass cap

T36N R10W

$$\begin{array}{c} \text{S } 5 \quad | \quad \text{S } 4 \\ \hline \text{S } 8 \quad | \quad \text{S } 9 \\ 1924 \end{array}$$

From which,
 A cedar, 14 ins. diam., bears S.47 3/4°E., 383 lks.
 dist., marked T 36 N R 10 W S 9 B T
 A cedar, 10 ins. diam., bears S.69 $\frac{1}{2}$ °W., 323 lks.
 dist., marked T 36 N R 10 W S 8 B T
 NE. cor. of Ranch House, bears N.51°55'W.
 Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.

Land; rolling.
 Soil; rocky, 3rd. rate.
 Timber; cedar.
 Undergrowth; sagebrush.


40.00 S.89°50'E., on a random line bet. secs. 4 and 9.
 79.84 Set temp. $\frac{1}{4}$ sec. cor.
 Fall 14 lks. N. of the cor. of secs. 3, 4, 9 and 10.

Thence
 N.89°56'W., on a true line bet. secs. 4 and 9.
 Over rolling land, through scattering undergrowth.
 Asc. 28 ft. over E. slope.
 2.50 Spur, slopes N. Desc.
 18.00 Enter scattering timber, bears N. and S.
 29.10 Desc. 70 ft. over W. slope to

Subdivision of T.36 N., R.10 W.

Chains
39.92

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,

A cedar, 22 ins. diam., bears N.76°E., 358 lks. dist. marked $\frac{1}{4}$ S 4 B T

A cedar, 36 ins. diam., bears S.32 $\frac{1}{4}$ °W., 500, lks. dist., marked $\frac{1}{4}$ S 9 B T

43.40
57.00
79.84


Wash, 30 lks. wide, 5 ft. deep, course SE. Asc. 70 ft. over E. slope. Low spur, slopes N. Desc. gentle W. slope. The cor. of secs. 4, 5, 8 and 9.

Land; rolling. Soil; loam, 2nd. rate. Timber; cedar and pinyon. Undergrowth; sagebrush.

13.00
40.00

N.0°3'W., bet. secs. 4 and 5. Over rolling land, through scattering timber and undergrowth. Desc. 40 ft. over NE. slope. Draw, course NE. Asc. 80 ft. to $\frac{1}{4}$ cor.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap



From which,


A cedar, 8 ins. diam., bears S.12 $\frac{1}{4}$ °E., 195 lks. dist., marked $\frac{1}{4}$ S 4 B T

A cedar, 18 ins. diam., bears S.14 3/4°W., 188 lks. dist., marked $\frac{1}{4}$ S 5 B T

60.70
80.85

Road, bears E. and W. Intersect the 9th. Standard Parallel North, 18.97 chs. S.89°46'E., of the S.C. of secs. 32 and 33, T.37 N., R.10 W., which is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, properly marked, and witnessed by two bearing trees, NE. and NW. of cor.

At point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bed rock, supported in a mound of stone, for closing cor. of secs. 4 and 5, marked on brass cap



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high S. of cor.

Main Street School House, bears S.43°53'W.

NE. cor. of Walking X Ranch House, bears S.48°21'W.


Land; rolling. Soil; rocky, 4th. rate. Timber; cedar. Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains The cor. of secs. 5, 6, 31 and 32 on S. bdy. of Tp., is an iron post, 2 ins. diam., 14 ins. above ground, in a mound of stone, firmly set, properly marked, and witnessed by four bearing trees, one in each sec. NE., SE., SW. and NW. of cor.

Thence
N.0°3'W., bet. secs. 31 and 32.
Over gentle rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




1924

From which,
A cedar, 16 ins. diam., bears N.15 $\frac{1}{4}$ °E., 193 lks. dist. marked $\frac{1}{4}$ S 32 B T
A cedar, 18 ins. diam., bears S.77 $\frac{1}{4}$ °W., 260 lks. dist. marked $\frac{1}{4}$ S 31 B T

40.90 Road, bears SE. and NW.

51.90 Road, bears SE. and NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 29, 30, 31 and 32, marked on brass cap



1924

From which,
A pinyon, 12 ins. diam., bears N.49 $\frac{3}{4}$ °E., 125 lks. dist., marked T 36 N R 10 W S 29 B T
A cedar, 12 ins. diam., bears S.74 $\frac{1}{4}$ °E., 124 lks. dist., marked T 36 N R 10 W S 32 B T
A cedar, ins. diam., bears S.37°W., 181 lks. dist. marked T 36 N R 10 W S 31 B T
A cedar ins. diam., bears N.61 $\frac{3}{4}$ °W., 132 lks. dist., marked T 36 N R 10 W S 30 B T

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.


40.00 N.89°55'E., on a random line bet. secs. 29 and 32.

Set temp. $\frac{1}{4}$ sec. cor.

80.04 Fall 7 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence
S.89°58'W., on a true line bet. secs. 29 and 32.
Over gently rolling land, through scattering timber and undergrowth.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



1924

From which,
A cedar, 14 ins. diam., bears N.51 $\frac{3}{4}$ °E., 325 lks. dist., marked $\frac{1}{4}$ S 29 B T
A cedar, 12 ins. diam., bears S.49°_., 67 lks. dist. marked $\frac{1}{4}$ S 32 B T

80.04 The cor. of secs. 29, 30, 31 and 32.

Subdivision of T.36 N., R.10 W.

Chains Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 S.89°55'W., on a random line bet. secs. 30 and 31
Set temp. $\frac{1}{4}$ sec. cor.
79.08 Fall 16 lks. S. of the cor. of secs. 25, 30, 31 and 36
on W. bdy. of Tp., hereinbefore described.

Thence.
S.89°58'E., on a true line bet. secs. 30 and 31.
Over rolling land, through scattering timber and under-
growth.
.60 Fence, bears N. and S. From fence cor. 150 lks. S.
fence runs E.
3.90 Road, bears NE. and SW.
39.08 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 30
S 31
1924

From which,
A cedar, 12 ins. diam., bears N.8 $\frac{1}{4}$ °E., 122 lks. dist.
marked $\frac{1}{4}$ S 30 B T
A cedar, 6 ins. diam., bears S.5 $\frac{3}{4}$ °E., 110 lks.
dist., marked $\frac{1}{4}$ S 31 B T

62.33 Fence, bears N. and S.
67.33 Road, bears SE. and NW.
79.08 The cor. of secs. 29, 30, 31 and 32.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 29 and 30.
Over rolling land, through scattering timber and under-
growth. Desc. gentle NE. slope.

9.73 Royal's House, bears N.74°15'W. 8.92 chs. dist.
12.90 Road, bears NE. and SW.
13.60 Wash, 10 lks. wide, 2 ft. deep, course NE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
the ground with marked cross (+) stone alongside
for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 30 | S 29
1924

From which,
A cedar, 8 ins. diam., bears N.76 $\frac{1}{4}$ °E., 355 lks. dist.
marked $\frac{1}{4}$ S 29 B T

72.30 Wash, 15 lks. wide, 2 ft. deep, course NE.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in
the ground for cor. of secs. 19, 20, 29 and 30, marked
on brass cap

T36N R10W
S 19 | S 20
S 30 | S 29
1924

From which,
A cedar, 16 ins. diam., bears N.17 $\frac{3}{4}$ °E., 620 lks.
dist., marked T 36 N R 10 W S 20 B T

Subdivision of T.36 N., R.10 W.

Chains

A cedar, 14 ins. diam., bears N.42½°W., 595 lks. dist. marked T 36 N R.10 W S 19 B T
 Raise a mound of stone, 3 ft. base, 1½ ft. high W. of cor.

Land; rolling.
 Soil; rocky, 3rd. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

40.00
 80.02

N.89°58'E., on a random line bet. secs. 20 and 29.
 Set temp. ¼ sec. cor.
 Intersect the cor. of secs. 20, 21, 28 and 29.

Thence
 S.89°58'W., on a true line bet. secs. 20 and 29.
 Over rolling land, through scattering timber and undergrowth.

18.14
 40.01

Draw, course NE.
 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for ¼ sec. cor. marked on brass cap

S 20
 S 29
 1924

From which,
 A cedar, 16 ins. diam., bears N.64½°E., 261 lks. dist., marked ¼ S 20 B T
 A cedar, 12 ins. diam., bears S.88¼°E., 358 lks. dist., marked ¼ S 29 B T

71.58
 80.02

Draw, course NE.
 The cor. of secs. 19, 20, 29 and 30.

Land; rolling.
 Soil; rocky, 4th. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

40.00
 78.96

N.89°58'W., on a random line bet. secs. 19 and 30.
 Set temp. ¼ sec. cor.
 Intersect the cor. of secs. 19, 24, 25 and 30 on W. bdy. of Tp., hereinbefore described.

Thence
 S.89°58'E., on a true line bet. secs. 19 and 30.
 Over gently rolling land, through scattering timber and undergrowth.

38.96

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for ¼ sec. cor. marked on brasscap

S 19
 S 30
 1924

From which,
 A cedar, 8 ins. diam., bears N.23¼°W., 105 lks. dist. marked ¼ S 19 B T
 A cedar, 18 ins. diam., bears S.82 ¾°E., 276 lks. dist., marked ¼ S 30 B T

63.00
 71.26
 78.96

Wash, 15 lks. wide, 4 ft. deep, course SE.
 Road, bears SE. and NW.
 The cor. of secs. 19, 20, 29 and 30.

Land; rolling. Soil; rocky, 3rd. rate.
 Timber; cedar.
 Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains N.0°3'W., bet. secs. 19 and 20.
Over gently rolling land, through scattering timber and undergrowth;

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 19 | S 20
1924

From which,
A cedar, 10 ins. diam., bears S.26°E., 132 lks. dist. marked $\frac{1}{4}$ S 20 B T
A cedar, 12 ins. diam., bears S.9 $\frac{1}{2}$ °W., 436 lks. dist. marked $\frac{1}{4}$ S 19 B T

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for cor. of secs. 17, 18, 19 and 20, marked on brass cap

T36N R10W
S 18 | S 17
S 19 | S 20
1924

From which,
A cedar, 12 ins. diam., bears N.72 $\frac{1}{2}$ °E., 448 lks. dist. marked T 36 N R 10 W S 17 B T
A cedar, 3 ins. diam., bears N.34°W., 137 lks. dist. marked B T

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 N.89°58'E., on a random line bet. secs. 17 and 20.
79.96 Set temp. $\frac{1}{4}$ sec. cor.
Fall 2 lks. S. of the cor. of secs. 16, 17, 20 and 21.

Thence
S.89°57'W., on a true line bet. secs. 17 and 20.
Over rolling land, through scattering timber and undergrowth.

10.00 Asc. 140 ft. over SE. slope of cinder cone.
38.44 Top of ascent.
39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 17
S 20
1924

Raise a mound of stone, 4 ft. base, 2 ft. high N. of cor.

79.96 Desc. SW. slope.
The cor. of secs. 17, 18, 19 and 20.

Land; rolling.
Soil; rocky, 4th. rate.
Timber; cedar.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains
40.00 N.89°58'W., on a random line bet. secs. 18 and 19.
79.06 Set temp. $\frac{1}{4}$ sec. cor.
Intersect the cor. of secs. 13, 18, 19 and 24 on W. bdy. of Tp., hereinbefore described.

Thence
S.89°58'E., on a true line bet. secs. 18 and 19.
Over gently rolling land, through scattering timber and undergrowth.

9.06 Draw, course NE.
39.06 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked of brass cap

$\frac{1}{4}$ $\frac{S\ 18}{S\ 19}$
1924

From which,
A cedar, 12 ins. diam., bears N.76°E., 409 lks. dist., marked $\frac{1}{4}$ S 18 B T
Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.

51.46 Road, bears SE. and NW.
51.96 Head of draw, course NW.
79.06 The cor. of secs. 17, 18, 19 and 20.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 17 and 18.
Over gently rolling land, through scattering timber and undergrowth. Desc. gentle N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$
S 18 | S 17
1924

From which,
A cedar, 12 ins. diam., bears N.77 $\frac{3}{4}$ °E., 358 lks. dist., marked $\frac{1}{4}$ S 17 B T
A cedar, 20 ins. diam., bears S.83°W., 227 lks. dist., marked $\frac{1}{4}$ S 18 B T

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 7, 8, 17 and 18, marked on brass cap

T36N, R10W
S 7 | S 8
S 18 | S 17
1924

Dig pits 18 x 18 x 12 ins. one in each sec. NE., SE., SW. and NW. of cor. 3 ft. dist.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

Subdivision of T.36 N., R.10 W.

Chains N.89°57'E., on a random line bet. secs. 8 and 17.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
80.00 Fall 10 lks. S. of the cor. of secs. 8, 9, 16 and 17.

Thence
S.89°53'W., on a true line bet. secs. 8 and 17.
Over rolling land, through scattering timber and undergrowth.
Asc. gentle E. slope.
30.00 Low ridge, bears N. and S.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S 8}{S 17}$
1924

From which,
A cedar, 12 ins. diam., bears N.7 $\frac{1}{2}$ °W., 385 lks. dist., marked $\frac{1}{4}$ S 8 B T
Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.

60.70 Wash, 15 lks. wide, 3 ft. deep, course NE.
Asc. gentle SE. slope.
80.00 The cor. of secs. 7, 8, 17 and 18.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00 N.89°58'W., on a random line bet. secs. 7 and 18.
Set temp. $\frac{1}{4}$ sec. cor.
78.90 Fall 2 lks. S. of the cor. of secs. 7, 12, 13 and 18 on W. bdy. of Tp., hereinbefore described.

Thence
S.89°57'E., on a true line bet. secs. 7 and 18.
Over gently rolling land, through scattering undergrowth.
38.90 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S 7}{S 18}$
1924

Dig pits 18 x 18 x 12 ins. one each on line E. and W. of cor. 3 ft. dist.

50.00 Road, bears N. and S.
58.00 Road, bears NE. and SW.
78.90 The cor. of secs. 7, 8, 17 and 18.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; none.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 7 and 8.
Over gently rolling land, through scattering timber and undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ S 7 | S 8
1924

Subdivision of T.36 N., R.10 W.

Chains

Raise a mound of stone, 4 ft. base, 2 ft. high W. of cor.

46.40
68.10
80.00

Wash, 30 lks. wide, 6 ft. deep, course NE.
Road, bears NE. and SW.
Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground for cor. of secs. 5, 6, 7 and 8, marked on brass cap

T36N R10W
S 6 | S 5
S 7 | S 8
1924

Dig pits 18 x 18 x 12 ins. one in each sec. NE., S., SW. and NW. of cor. 3 ft. dist.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
79.96

N.89°53'E., on a random line bet. secs. 5 and 8.
Set temp. $\frac{1}{4}$ sec. cor.
Fall 3 lks. N. of the cor. of secs. 4, 5, 8 and 9.

Thence
S.89°54'W., on a true line bet. secs. 5 and 8.
Over rolling land, through scattering timber and undergrowth.

20.20
34.00
39.98

Road, Wolf Hole to Bundyville, bears SE. and NW.
Wash, 45 lks. wide, 2 ft. deep, course NE.
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed rock, with marked cross (+) stone alongside, in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S 5}{S 8}$
1924

71.00
79.96

Road, bears NE. and SW.
The cor. of secs. 5, 6, 7 and 8.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

40.00
78.81

N.89°57'W., on a random line bet. secs. 6 and 7,
Set temp. $\frac{1}{4}$ sec. cor.
Fall 5 lks. S. of the cor. of secs. 1, 6, 7 and 12 on W. bdy. of Tp., hereinbefore described.

Thence
S.89°55'E., on a true line bet. secs. 6 and 7.
Over gently rolling land, through scattering timber and undergrowth.

38.81

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bed rock, supported in a mound of stone, for $\frac{1}{4}$ sec. cor. marked on brass cap

$\frac{1}{4}$ $\frac{S 6}{S 7}$
1924

Raise a mound of stone, 4 ft. base, 2 ft. high N. of cor.

Subdivision of T.36 N., R.10 W.

Chains

70.81
78.81

Desc. over NE. slope.
Road, bears SW. and NW.
The cor. of secs. 5, 6, 7 and 8.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

N.0°3'W., bet. secs. 5 and 6.
Over rolling land, through scattering timber and under-
growth.

21.00
24.30
28.50
29.80

Road, bears E. and W.
Fence, bears E. and W.
Wash, 10 lks. wide, 4 ft. deep, course E.
Center of Walking X Reservoir, bears E. about 12 chs.
dist.

40.00

Asc. 70 ft. over S. slope.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in
the ground to bed rock, supported in a mound of stone,
for $\frac{1}{4}$ sec. cor. marked on brass cap

4
S 6 | S 5

1924

From which,

A cedar, 14 ins. diam., bears N.4 3/4°E., 410 lks.
dist., marked $\frac{1}{4}$ S 5 B T

A cedar, 12 ins. diam., bears S.47 3/4°W., 269 lks.
dist., marked $\frac{1}{4}$ S 6 B T

School house, bears N.80°E.

Walking X Ranch House, bears S.82°25'E.

73.48
79.78
81.33

Fence, bears NE. and SW.
Road, bears SE. and NW.
Intersect the 9th. Standard Parallel North, 19.00 chs.
S.89°43'E., of the S.C. of secs. 31 and 32, T.37 N.,
R.10 W. which is an iron post, 3 fns. diam., 12 ins.
above ground, firmly set, properly marked, and witness-
ed by a mound of stone N. of cor.

At point of intersection, set an iron post, 3 ft. long,
2 ins. diam., 20 ins. in the ground to bed rock, sup-
ported in a mound of stone, for closing cor. of secs.
5 and 6, marked on brass cap

T37N R10W

S 32

S 6 | S 5

T36N R10W

C C

1924

Raise a mound of stone, 4 ft. base, 2 ft. high N. of
cor.

Land; rolling.
Soil; rocky, 3rd. rate.
Timber; cedar.
Undergrowth; sagebrush.

Retracement of a Portion of the 9th.
Standard Parallel North, through Rs. 9 and 10 W.

The west half of each mile of the 9th. standard Parallel North through R.10 W. and also the west half of the south bdy. of sec. 31 of R.9 W., was retraced for alinement only, in order that the closing cors. of T.36 N., R.10 W. might be placed on line. These new bearings have all been given in the notes where the closings were made on the 9th. standard parallel.

Boundaries of T.36 N., R.10 W.

Latitudes, departures and closing errors.

Line designated	True bearing.	Dist- ance.	Latitudes.		Departures.	
			N.	S.	E.	W.
South Bdy.	S. 89° 55' W.	479.08		.70		479.08
West Bdy.	North	481.59	481.59			
North Bdy. (9th.S.Par.N.)	S. 89° 46' E.	19.76		.16	19.76	
	East	40.00			40.00	
	S. 89° 43' E.	40.00		.20	40.00	
	East	40.00			40.00	
	S. 89° 46' E.	40.00		.16	40.00	
	East	40.00			40.00	
	S. 89° 41' E.	40.00		.22	40.00	
	East	40.00			40.00	
	S. 89° 45' E.	40.00		.17	40.00	
	East	40.00			40.00	
	S. 89° 43' E.	40.00		.20	40.00	
	East	40.00			40.00	
	S. 89° 45' E.	19.08		.17	19.08	
East Bdy.	South	479.19		479.19		
Convergency					.54	
Totals			481.59	481.17	479.38	479.08
Error in latitude			481.17		479.08	
			0.42			
Error in departure					0.30	

The continued satisfactory adjustment of the instruments throughout the survey of this township is indicated from field tests as given in Book "F".

GENERAL DESCRIPTION.

The land within the boundaries of this township is mostly rolling, with the exception of the east tier of sections which is rough and mountainous and is known as the Hurricane Ledge the top of which is about 2000 ft. above the rolling land and is thickly covered with pinyon and cedar timber. The Hurricane Ledge portion of this township is not agricultural land. Below the ledge nearly the entire township is covered with a scattering growth of cedar timber; land is mostly agricultural in character. There are several farms in this part of the township. -- There are no running streams or springs known within this township but the settlers have established watering holes, or reservoirs for their supply of water, which is mostly used for watering stock. The land at the present time is used for dry farming and stock raising. A good road passes through the township, from the northern part of Sec. 6 to Sec. 36, leading from Wolf Hole to Mt. Trumbull.

CERTIFICATE OF UNITED STATES TRANSITMAN.

I, Charles E. Hunter ^{Transitman}, U.S. ~~Surveyor~~, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona bearing date of the 23rd day of April, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____

 the subdivision lines of _____

 Township 36 North, Range 10 West _____

 _____ of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona _____ Charles E. Hunter
 Date: October 25, 1925. _____ U. S. Transitman.

~~APPROVAL:~~

~~Officer of the United States Surveyor General,~~

~~The foregoing field notes of the survey of _____~~

executed by _____
 under his special instructions dated _____, 19____, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____
 _____, has been correctly copied from the original notes on file in this office.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, William E. Hiester, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group 122, Arizona bearing date of the 23rd. day of April, 1923, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____
The East Boundary, West Boundary and

Subdivision lines of

Township 36 North, Range 10 West

 _____ of the Gila and Salt
River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 122, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix Arizona William E. Hiester
 Date: Oct 27, 1925 U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SUPERVISOR OF SURVEYS.

Denver, Colorado, March 8, 1926

The foregoing field notes of the survey of _____
East Boundary, West Boundary and

Subdivision lines of

Township 36 North, Range 10 West of the
Gila and Salt River Base and Meridian in
the State of Arizona, executed by
William E. Hiester, U.S. Surveyor and
Charles E. Hunter, U.S. Transitman

~~executed by~~ _____
 under ~~the~~ special instructions dated April 23, 1923 for Group 122, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Wm. H. Johnson
U. S. Supervisor of Surveys

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____~~
~~_____ has been correctly copied from the original notes on file in this office.~~