

BOOK 3804

FIELD NOTES

OF THE RESURVEY OF THE

*6th Standard Parallel North, thru Range 29 East,
the South Boundary of Tp. 26 N., R. 29 E., and
East and North Boundaries of Tp. 25 N., R. 29 E.*

AND OF THE SURVEY OF

the Subdivision Lines of

Township 25 North, Range 29 East

of the Gila and Salt River Base & Meridian,

In the State of *ARIZONA*

EXECUTED BY

Sidney E. Blout
U.S. Cadastral Engineer

*In the capacity of U. S. Surveyor, under Special Instructions dated March 11, 1919,
issued by the United States Surveyor General to govern surveys included in Group
No. 96 Arizona, which were approved by the Commissioner of the General Land
Office, May 5, 1919, and Assignment Instructions dated March 28, 1927.*

Resurvey and Survey commenced April 21, 1927

Resurvey and Survey completed May 12, 1927


3804



3804

Book "B"
Group 96 - Arizona.

BOOK 3804

INDEX DIAGRAM.

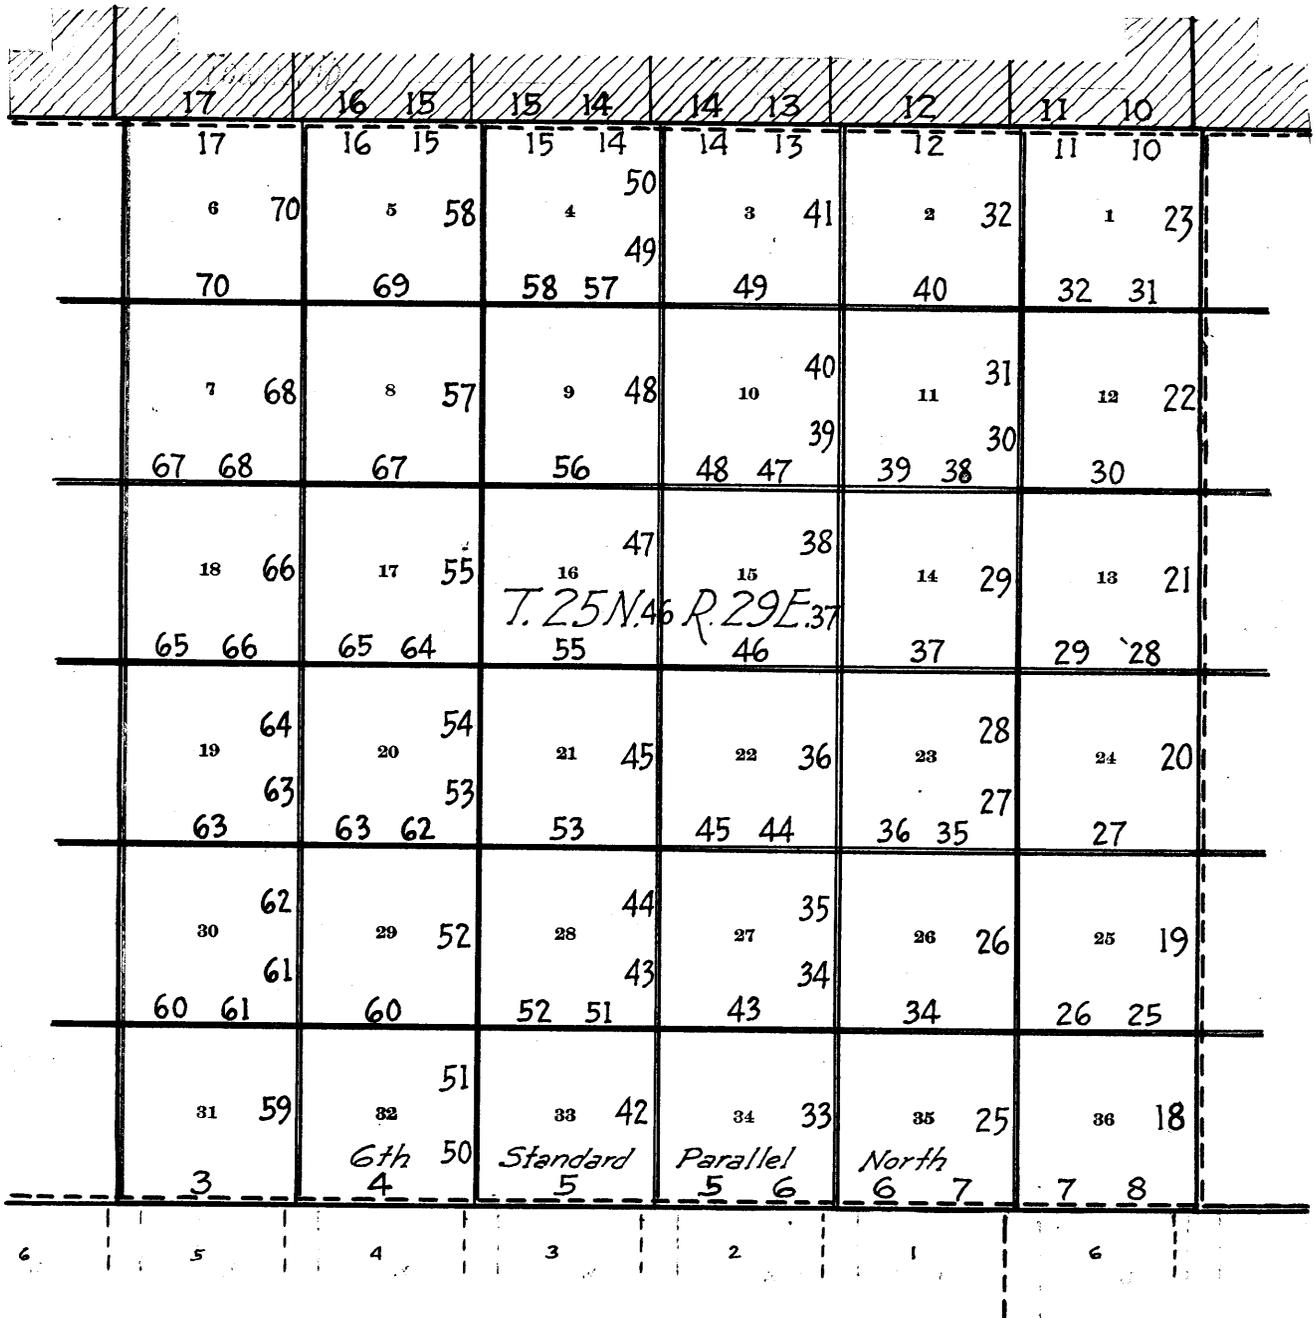

-  Surveyed under this group.
-  Resurveyed under this group.
-  Accepted surveys, retracements or resurveys.
-  Unsurveyed.
-  Areas surveyed as per accepted plats on file.

Book "B"
 Group 96 Arizona
 Township 25 North, Range 29 East
 DATE DIAGRAM
 1927

| | | | | | | | |
|--|------|------|------|------|------|------|------|
| | 30 | 32 | 33 | 34 | 35 | 36 | |
| | 5-12 | 5-12 | 5-11 | 5-6 | 5-6 | 5-6 | |
| | 6 | 5 | 4 | 3 | 2 | 1 | |
| | 5-12 | 5-12 | 5-11 | 5-9 | 5-6 | 5-6 | 5-6 |
| | 7 | 8 | 9 | 10 | 11 | 12 | |
| | 5-10 | 5-10 | 5-9 | 5-5 | 5-4 | 5-3 | 5-6 |
| | 8 | 17 | 16 | 15 | 14 | 13 | |
| | 5-10 | 5-6 | 5-6 | 5-5 | 5-4 | 5-3 | 5-3 |
| | 9 | 20 | 21 | 22 | 23 | 24 | |
| | 5-6 | 5-6 | 4-30 | 4-29 | 4-28 | 4-27 | 5-3 |
| | 30 | 29 | 28 | 27 | 26 | 25 | |
| | 5-2 | 5-2 | 4-30 | 4-29 | 4-28 | 4-27 | 4-27 |
| | 31 | 32 | 33 | 34 | 35 | 36 | |
| | 5-2 | 4-30 | 4-29 | 4-28 | 4-27 | 4-27 | 4-27 |
| | 4-21 | 4-21 | 4-21 | 4-21 | 4-22 | 4-22 | |

6th Std. Parallel North

For dates of survey of this line see Book "A"

Surveyed by Sidney E. Blout, U.S. Cadastral Engineer on dates shown thereon.

Resurveyed by Sidney E. Blout, U.S. Cadastral Engineer on dates shown thereon.

The, resurveys, and surveys, hereinafter, described were executed on dates shown on diagram on page 1 hereof by Sidney E Blout, U.S. Cadastral Engineer, using an A Lietz transit No. 6166 with improved Smith solar attachment. The horizontal limb is provided with two double verniers placed opposite to each other reading to single minutes of arc which is also the least count of the verniers of the latitude and declination arcs. All azimuth determinations are accomplished with the solar attachment except the special observations on Polaris and the sun for meridian upon which to test the solar apparatus as stated in the field notes.

The instrument was examined, tested on the true meridian at the Federal Building at Phoenix Arizona, found correct, and was approved by the District Cadastral Engineer for Arizona and California, March 28, 1927, conditional upon satisfactory field tests.

April 18, 1927: Examine the adjustments of the instrument and find no errors then to test the solar apparatus by comparing its indications, resulting from solar observations made during a.m., and p.m. hours with a meridian established by observations on Polaris proceed as follows;

Set up instrument on the meridian, established April 5, 1927 at camp near the center of sec. 22, T25N., R28E. in latitude $35^{\circ}33'N.$, and longitude $109^{\circ}21'37"W.$, described in Book A and at $2^{h}00^m$ p.m., app. time April 18, set off $35^{\circ}33'N.$ on the lat. arc, $10^{\circ}43'N.$ on the decl. arc and determine a meridian with the solar which agrees with the true meridian.

April 19, 1927: At $10^{h}00^m$ a.m., app. time, set off $35^{\circ}33'N.$ on the lat. arc $11^{\circ}00\frac{1}{2}'N.$ on the decl. arc and determine a meridian with the solar, which also agrees with the true meridian established by the Polaris observation.

At apparent noon with the lat. arc unchanged, observe the sun on the meridian and obtain a reading of $11^{\circ}02'N$ on the decl. arc, which agrees with the computed decl. of the sun.

As all the solar observations, made during a.m., and p.m. hours, define positions for meridians which agree with the true meridian established by the Polaris observations, conclude that the adjustments of the instrument are satisfactory.

All measurements are made with a Lallie 5-chain steel tape compared with a Chesterman standard steel tape and found correct. The measurements are made on the slope the vertical angles being determined with a clinometer and the slope measurements properly reduced to true horizontal distances for entry in the final field notes.

Resurvey of the 6th. Standard Parallel North, through Range 29 East

| | |
|--------|---|
| Chains | <p>The 6th. Std. Par. N., thru. R. 29 E., was surveyed in 1883 by Frank Follman, U.S.D.S., and no retracement or resurvey is of record.</p> |
| | <p>-----</p> |
| | <p>From the reestablished Std. cor. of Ts. 25 N., Rs. 28 and 29 E</p> |
| | <p>I. described in Book "A"</p> |
| | <p>East on true line on S. bdy. of sec. 31.</p> |
| | <p>Over rolling sandy land, slopes SW. thru. scattering timber and brush undergrowth.</p> |
| 34.50 | <p>Ravine 8 lks. wide, course SW.</p> |
| | <p>Ascend gradually over W. slope.</p> |
| 40.00 | <p>Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in the ground to bedrock, supported in a mound of stone for reestablished Std. $\frac{1}{4}$ sec. cor., marked on brass cap</p> |
| | <p style="text-align: center;">S C <u>$\frac{1}{4}$ S 31</u></p> |
| | <p style="text-align: center;">1927</p> |
| | <p>from which</p> |
| | <p>A pinion 8 ins. in diam. bears N 8° E. 161 lks. dist.</p> |
| | <p>marked $\frac{1}{4}$ S 31 SC BT.</p> |
| | <p>A pinion 8 ins. in diam. bears N 69° E. 123 lks. dist.,</p> |
| | <p>marked $\frac{1}{4}$ S 31 SC BT.</p> |
| | <p>Diligent search in this vicinity fails to reveal any trace of the orig. Std. $\frac{1}{4}$ sec. cor.</p> |
| 40.90 | <p>Road bears NE. and SW.</p> |
| 43.00 | <p>Shallow ravine, course SW.</p> |
| | <p>Ascend gradually over NW. slope.</p> |
| 45.00 | <p>Leave timber bears NE. 5.00 chs. and SW. 2.00 chs. dist.</p> |
| | <p>Enter dense sagebrush undergrowth.</p> |
| 47.00 | <p>Leave dense undergrowth, bears NE. 2.00 chs. and SW. 4.00 chs. dist.,</p> |
| | <p>Enter scattering timber.</p> |
| 80.00 | <p>Set an iron post 3 ft. long, 2 ins. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for reestablished Std. cor. of secs. 31 and 32. marked on brass cap</p> |
| | <p style="text-align: center;">S C T25N R29E <u>• S31 S32</u></p> |
| | <p style="text-align: center;">1927</p> |
| | <p>from which</p> |
| | <p>A pinion 8 ins. in diam. bears N 42$\frac{1}{2}$° E. 54 lks. dist.,</p> |
| | <p>marked T25N., R29E., S32 SC BT.</p> |
| | <p>A pinion 8 ins. in diam. bears N 36$\frac{3}{4}$° W. 41 lks. dist.,</p> |
| | <p>marked T25N., R29E., S31 SC BT.</p> |
| | <p>From this cor. the original Std. cor. of secs. 31 and 32</p> |
| | <p>which is a sand stone 4x6x6 ins. above ground, marked SC on N., with 5 grooves on E., and 1 groove on W. faces and witnessed by two bearing trees, bears S 86° 29' W. 196 lks. dist.,</p> |
| | <p>Destroy the old corner stone and obliterate the marks on the bearing trees.</p> |
| | <p>Land, rolling.</p> |
| | <p>Soil, sandy clay loam 2nd. and 3rd. rate.</p> |
| | <p>Timber, oak, pinion and Norway pine.</p> |
| | <p>Undergrowth, scrub oak and sagebrush.</p> |

Survey of the 6th. Standard Parallel North, Through Range 29 East.

| | |
|--------|--|
| Chains | East on true line on S.bdy.of sec.32. Over rolling sandy land, thru scattering timber and brush undergrowth. |
| 10.00 | Leave timber bears North 5.00 chs. and South 4.00 chs. dist. |
| 35.00 | Enter sagebrush flat. |
| 40.00 | Leave flat, bears North 3.00 chs. and South 8.00 chs. dist. |
| | Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for Std. $\frac{1}{4}$ sec. cor., marked on brass cap |
| | S C. <u>$\frac{1}{4}$ S 32</u> 1927 |
| | from which |
| | A pinion 10 ins. in diam. bears N 7° E., 85 lks. dist., marked $\frac{1}{4}$ S32 SC BT. |
| | A pinion 8 ins. in diam. bears N55 $\frac{1}{2}$ ° W. 136 lks. dist., marked $\frac{1}{4}$ S32 SC BT. |
| | From this cor. the orig. Std. $\frac{1}{4}$ sec. cor. which is a sandstone 5x8x24 ins. in a mound of earth and stone, marked SC $\frac{1}{4}$ on N. face and witnessed by one bearing tree N. of line, bears S86° W. 171 lks. dist. |
| | Destroy the old stone and obliterate marks on the old bearing tree. |
| | Descend gradually 40 ft. over NE. slope. |
| 55.40 | Road from St. Michaels to Houck Ariz. bears NE. and SW. |
| 56.00 | Wash, course N20° E. |
| | Ascend 30 ft. over NW. slope. |
| 62.00 | Road to Indian hogan bears NE. and SW. |
| 70.00 | Top of ascent on ridge bears NE and SW. thence over rolling land, slopes N. |
| 80.00 | Set an iron post 3 ft. long, 2 ins. in diam. 8 ins. in the ground to bedrock, supported in a mound of stone for reestablished Std. cor. of secs. 32 and 33 marked on brass cap |
| | S C T25N R29E <u>S32 S33</u> 1927 |
| | from which |
| | A pine 24 ins. in diam. bears N2° E. 66 lks. dist., marked T25N., R29E., S33 SC BT. |
| | A pinion 20 ins. in diam. bears N47° W. 142 lks. dist., marked T25N., R29E., S32 SC BT. |
| | From this cor. the orig. Std. cor. of secs. 32 and 33, which is a sand stone 12x2x14. ins. above ground, marked SC on N. with 4 grooves on E. and 2 grooves on W. faces and witnessed by two pine bearing trees NE. and NW. of cor., bears S81:59° W. 143 lks. dist. |
| | Destroy the old stone cor. and obliterate marks on the two old bearing trees. |
| | Land, rolling. Soil, sandy 2nd. and 3rd. rate. Timber, oak, juniper, pinion, and pine. Undergrowth, sagebrush. |

Resurvey of the 6th. Standard Parallel North, through Range 29 East.

Chains East on true line on S. bdy. of sec. 33.
 . Over rolling sandy land, slopes N. thru. scattering timber
 and brush undergrowth.
 3.40 Road at forks, bears N and SE and SW.
 40.00 Set an iron post 3 ft. long 1 in. in diam. 26 ins. in the
 ground for reestablished Std. $\frac{1}{4}$ sec. cor., marked
 on brass cap

S C
 $\frac{1}{4}$ S33

1927

from which

A pinion 10 ins. in diam. bears N40 $\frac{1}{2}$ °E. 29 lks. dist.,
 marked $\frac{1}{4}$ S33 SC BT.
 A pinion 8 ins. in diam. bears N78°W. 31 lks. dist.,
 marked $\frac{1}{4}$ S33 SC BT.

Diligent search in this vicinity fails to reveal the orig.
 Std. $\frac{1}{4}$ sec. cor. which is described as a post.
 The orig. bearing tree, which is a dead pine 20 ins. in
 diam. lying on the ground, bears S71°40'W. 160 lks.
 dist.; Obliterate marks on this tree.

66.00 Leave timber bears NW. 5.00 chs. and SE.
 Enter sagebrush flat.
 70.00 Leave sagebrush flat, bears NW. 5.00 chs. and SE.
 Enter scattering timber.
 76.75 Road to St. Michaels Ariz. bears NW. and SE.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the
 ground to bedrock, supported in a mound of stone
 for reestablished Std. cor. of secs. 33 and 34.
 marked on brass cap

S C
 T25N | R29E
 S33 | S34

1927

from which

A pinion 10 ins. in diam. bears N8 $\frac{1}{4}$ °E. 116 lks. dist.,
 marked T25N., R29E.; S34 SC BT.
 A pinion 12 ins. in diam. bears N $\frac{3}{4}$ °W. 116 lks. dist.,
 marked T25N., R29E., S33 SC BT.

From this cor. the orig. Std. cor. of secs. 33 and 34,
 which is a sand stone 4x6x12 ins. above ground
 marked SC on N. with 3 grooves on E. and W. faces
 and witnessed by two pine bearing trees NE. and
 SW. of cor, bears S70°01'W. 117 lks. dist.

Destroy the old stone monument and obliterate the marks
 on the old bearing trees.

Land, rolling.
 Soil, sandy 2nd. rate.
 Timber, cedar, pinion, and yellow pine.
 Undergrowth, scrub oak and sagebrush.

East on true line on S. bdy. of sec. 34
 Over rolling sandy and stony land, through scattering
 timber and heavy undergrowth.
 1.00 Leave timber bears NE. and SW.
 12.00 Enter timber bears NW. and SE.
 24.00 Leave timber bears N80°E. and S60°W

Resurvey of the 6th. Standard Parallel North, through Range 29 East.

Chains

40.00

Enter N. side of sagebrush flat.

Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for reestablished Std. $\frac{1}{4}$ sec. cor., marked on brass cap

S C
 $\frac{1}{4}$ S 34

1927

from which

A pinion 8 ins. in diam. bears N $44\frac{1}{2}^{\circ}$ E. 80 lks. dist., marked $\frac{1}{4}$ S34 SC BT.A pinion 8 ins. in diam. bears N 6° W. 79 lks. dist., marked $\frac{1}{4}$ S34 SC BT.From this cor. the orig. Std. $\frac{1}{4}$ sec. cor., which is a sandstone 5x8x14 ins. above ground marked SC $\frac{1}{4}$ on N. face and witnessed by two pine bearing trees bears S $63^{\circ}26'$ W. 100 lks. dist.

Destroy the old cor. stone and obliterate the marks on the two old bearing trees.

Enter scattering timber, bears NW. and SE.

70.00 Descend 50 ft. over NE. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 18 ins. in the ground to bedrock supported in a mound of stone for reestablished Std. cor. of secs. 34 and 35., marked on brass cap

S C
T25N | R29E
S34 | S35

1927

from which

A yellow pine 36 ins. in diam. bears N $74\frac{1}{2}^{\circ}$ E. 145 lks. dist. marked T25N., R29E., S35 SC. BT.A yellow pine 14 ins. in diam. bears N $39\frac{1}{2}^{\circ}$ W. 277 lks. dist. marked T25N., R29E., S34 SC BT.From this cor. the orig. Std. cor. of secs. 34 and 35, which is a sand stone 2x6x20 ins. marked SC on N. with 2 grooves on E. and 4 grooves on W. faces, witnessed by two bearing trees one each SE. and NW. and mound of stone N., bears S $67^{\circ}05'$ W. 105 lks. dist.

Destroy the old cor. monument and obliterate the marks on the two old bearing trees.

Land, rolling.

Soil, sandy and stony 2nd. and 4th. rate.

Timber, cedar, pinion and yellow pine.

Undergrowth, scrub oak and sagebrush.

6.50

East on true line on S. bdy. of sec. 35.
Descend 50 ft. over SE. slope over stony land, thru scattering timber.Bottom of box canyon, bears NW. and SE.
Cross creek 300 lks. wide bet. banks 30 ft. high, course SE.

20.00

Ascend 50 ft. over SW. slope.
Top of E. rim of canyon, bears NW. and SE.
Enter rolling sandy land.

Resurvey of the 6th. Standard Parallel North, Through Range 29 East.

Chains

- 37.00 West edge of box canyon bears NE. and SW.
Descend 50 ft. over SE. slope.
- 38.00 Wash 20 lks. wide in botton of canyon, course SW.
Ascend 50 ft. over W. slope
- 39.00 Top of ascent on E. side of canyon
Enter rolling land.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in the
ground to bedrock, supported in a mound of stone
for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap

| |
|--------------------------------------|
| S C |
| <u>$\frac{1}{4}$ S 35</u> |

1927

from which

- A yellow pine 24 ins. in diam. bears $N31\frac{1}{2}^{\circ}E$. 69 lks. dist.,
marked $\frac{1}{4}$ S35 SC BT.
- A yellow pine 18 ins. in diam. bears $N67\frac{1}{2}^{\circ}W$. 60 lks. dist.,
marked $\frac{1}{4}$ S35 SC BT.

Diligent search in this vicinity fails to reveal any
trace of the orig. Std. $\frac{1}{4}$ sec. cor.

- 63.00 Leave timber bears N. and S.
Enter sagebrush flat.
- 70.70 Road leads to Indian hogans bears $N20^{\circ}E$. and $S20^{\circ}W$.
- 70.90 Shallow draw course SW.
Enter scattering pine, pinion and scrub oak timber.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in
the ground for reestablished Std. cor. of secs 35
and 36. marked on brass cap

| |
|------------------|
| S C |
| T25N R29E |
| <u>S35 S36</u> |

1927

from which

- A pinion 18 ins. in diam. bears $N62\frac{1}{2}^{\circ}E$. 566 lks. dist.,
marked T25N., R29E., S36 SC BT.
- No other bearing trees within limits.
Raise a mound of stone 2 ft. base $1\frac{1}{2}$ ft. high N. of cor.
From this cor. the orig. Std. cor. of secs. 35 and 36, which
is a sand stone 8x12x24 ins. above ground, mkd.
SC on N. with 1 groove on E. and 5 grooves on W.
faces, bears $S73^{\circ}18'W$. 46 lks. dist.; No trace of
the two bearing trees or pits and mound described
in the original field notes can be found.
- Destroy the old cor. stone.

Land, rolling and broken.
Soil, sandy and stony 2nd. and 3rd. rate.
Timber, oak, cedar, pinion, and Yellow pine.
Undergrowth, scrub oak and sagebrush.

East on true line on S. bdy. of sec. 36.
Over rolling sandy land, slopes NW. thru heavy sagebrush
undergrowth and scattering timber.

Resurvey of the 6th. Standard Parallel North, through Range 29 East.

Chains
 10.00 Leave heavy sagebrush undergrowth, bears NW. and SE.
 Enter medium growth timber.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in
 the ground to bedrock, supported in a mound of stone
 for reestablished Std. $\frac{1}{4}$ sec. cor., marked on brass
 cap

S C
 $\frac{1}{4}$ S 36

1927

from which

A pinion 8 ins. in diam. bears N26°E. 154 lks. dist.,
 marked $\frac{1}{4}$ S36 SC BT.
 A pinion 8 ins. in diam. bears N81 $\frac{1}{4}$ °W 159 lks. dist.,
 marked $\frac{1}{4}$ S36 SC BT.

Diligent search in this vicinity fails to reveal any trace
 of the orig. Std. $\frac{1}{4}$ sec. cor.

50.00 Descend 30 ft. over E. slope.

53.00 Wash, course S.

Ascend 30 ft. over E. slope.

70.00 Descend gradually over SE. slope.

76.00 Bottom of swale, course SW.

Ascend gradually over NW. slope

79.60 Road leads to Indian hogans, bears NE. and SW.

80.00 Set an iron post 3 ft. long, 3 ins. in diam. 14 ins. in the
 ground to bedrock, supported in a mound of stone
 for reestablished Std. cor. of Ts. 25 N., Rs. 29 and
 30 E., marked on brass cap

S C
 T25N
 R29E | R30E
 S36 | S31

1927

from which,

A pinion 14 ins. in diam. bears N38 $\frac{1}{4}$ °E. 212 lks. dist.,
 marked T25N., R30E., S31 SC BT.

A pinion 8 ins. in diam. bears N39 $\frac{1}{2}$ °W. 96 lks. dist.
 marked T25N., R29E., S36 SC BT.

From this cor the orig. Std. cor. of Ts. 25 N., Rs. 29 and 30 E.
 which is a sand stone 6x10x20 ins. above ground
 marked SC on N. with 6 grooves on N, E, and W.
 faces and witnessed by three bearing trees and
 trace of three pits and mound of earth, bears
 S51°20'W. 25 lks. dist.

Destroy the old cor. monument and obliterate the marks
 on the orig. bearing trees.

Land, rolling.

Soil, sandy clay loam, 1st. and 2nd. rate.

Timber, cedar, oak, pinion and yellow pine.

Undergrowth, scrub oak and sagebrush.

Resurvey of the South Boundary of T.26 N.,R.29 E.

| Chains | |
|--------|---|
| | The south boundary of T.26N.,R.29 E.,was surveyed in 1883 by Frank Follman,U.S.D.S.,and no subsequent retracement or resurvey is of record. |
| | ----- <u>RETRACEMENT FOR RESURVEY.</u> ----- |
| | From the cor.of Ts.26 N.,Rs.28 and 29 E.,described in Book "A" |
| 39.65 | East on a random line on S.bdy.of sec.31 ($W\frac{1}{2}$) Intersect the old $\frac{1}{4}$ sec. cor. of secs.6 and 31,hereinafter described. True course and dist.of $W\frac{1}{2}$ of S.bdy.of sec.31 are therefore West 39.65 chs. |
| | From $\frac{1}{4}$ sec. cor. |
| 40.29 | East on a random line on S.bdy.of sec.31 ($E\frac{1}{2}$) Fall 15 lks. N.of point of orig.location of cor. of secs. 5,6,31,and 32.,hereinafter described. True course and dist.of $E\frac{1}{2}$ of S.bdy.of sec.31 are therefore N $89^{\circ}47'W$. 40.29 chs. |
| | ----- |
| | From point of orig.location of cor. of secs.5,6,31,and 32 |
| 40.39 | East on a random line on S.bdy.of sec.32 ($W\frac{1}{2}$) Fall 16 lks. N.of old $\frac{1}{4}$ sec. cor. of secs.5 and 32 hereinafter described. True course and dist. of $W\frac{1}{2}$ of S.bdy.of sec.32 are therefore, N $89^{\circ}46'W$.40.39 chs. |
| | From $\frac{1}{4}$ sec. cor. |
| 40.11 | East on a random line on S.bdy.of sec.32 ($E\frac{1}{2}$) Fall 21 lks. N.of the orig.cor. of secs.4,5,32,and 33 hereinafter described. True course and dist.of $E\frac{1}{2}$ of S.bdy.of sec.32,are therefore N $89^{\circ}42'W$. 40.11 chs. |
| | ----- |
| | East on a random line on S.bdy.of sec.33 ($W\frac{1}{2}$) |
| 40.25 | Fall 5 lks.N.of point of orig.location of $\frac{1}{4}$ sec. cor.of secs.4 and 33.,hereinafter described. True course and dist.of $W\frac{1}{2}$ of S.bdy.of sec.33 are therefore N $89^{\circ}56'W$.40.25 chs. |
| | From point of orig.location of $\frac{1}{4}$ sec.cor. of secs 4 and 33 |
| 40.23 | East on a random line on S.bdy.of sec.33 ($E\frac{1}{2}$) Fall 9 lks. N.of the point of orig. cor. of secs.3,4,33, and 34,hereinafter described. True course and dist. of $E\frac{1}{2}$ of S.bdy.of sec.33 are therefore N $89^{\circ}52'W$. 40.23 chs. |
| | ----- |
| | From the point of orig.cor.of secs.3,4,33,and 34. |
| 40.17 | East on a random line on S.bdy.of sec.34 ($W\frac{1}{2}$) Fall 4 lks. S.of the orig. $\frac{1}{4}$ sec. cor. of secs.3 and 34 hereinafter described. True course and dist. of $W\frac{1}{2}$ of S.bdy.of sec.34 are therefore S $89^{\circ}57'W$.40.17 chs. |
| | From old $\frac{1}{4}$ sec. cor. |
| 40.03 | East on a random line on S.bdy.of sec.34 ($E\frac{1}{2}$) Fall 24 lks. S.of the orig.cor. of secs.2,3,34.and 35 hereinafter described. True course and dist.of $E\frac{1}{2}$ of S.bdy.of sec.34 are, therefore S $89^{\circ}39'W$. 40.03 chs. |
| | ----- |
| | East on a random line on S.bdy.of sec.35 ($W\frac{1}{2}$) |
| 40.13 | Fall 23 lks. S.of the orig. $\frac{1}{4}$ sec. cor. of secs.2 and 35., hereinafter described. |

Resurvey of the South Boundary of T.26 N., R.29 E.

| | |
|--------|---|
| Chains | True course and dist. of $W. \frac{1}{2}$ of S. bdy. of sec. 35 are therefore S $89^{\circ}40'W$. 40.13 chs. From old $\frac{1}{4}$ sec. cor. East on a random line on S. bdy. of sec. 35 ($E \frac{1}{2}$) |
| 39.96 | Fall 22 lks. S. of point of orig. cor. of secs. 1, 2, 35, and 36, hereinafter described. True course and dist. of $E. \frac{1}{2}$ of S. bdy. of sec. 35 are therefore S $89^{\circ}41'W$. 39.96 chs. |
| 40.09 | From point of orig. cor. of secs. 1, 2, 35, and 36, East on a random line on S. bdy. of sec. 36 ($W \frac{1}{2}$) Fall 21 lks. S. of the orig. $\frac{1}{4}$ sec. cor. of secs. 1 and 36 hereinafter described. True course and dist. of $W. \frac{1}{2}$ of S. bdy. of sec. 36 are therefore, S $89^{\circ}42'W$. 40.09 chs. From old $\frac{1}{4}$ sec. cor. |
| 39.95 | East on a random line on S. bdy. of sec. 36. ($E \frac{1}{2}$) Fall 2 lks. S. of point of orig. cor. of Ts. 25 and 26 N., Rs. 29 and 30 E., hereinafter described. True course and dist. of $E. \frac{1}{2}$ of S. bdy. of sec. 36 are therefore, S $89^{\circ}58'W$. 39.95 chs. |

RESURVEY

Point of original location of cor. of Ts. 25 and 26 N., Rs. 29 and 30 E., determined by reference to the orig. bearing trees

- An oak 24 ins. in diam., bears $N44 \frac{1}{2}^{\circ}E$. 59 lks. dist., marked as of record.
- A yellow pine 36 ins. in diam. bears $S30^{\circ}W$. 150 lks. dist., marked as of record.
- A yellow pine 14 ins. in diam. bears $N35^{\circ}W$. 20 lks. dist., marked as of record.

At point of orig. location, Set an iron post 3 ft. long 3 ins. in diam. 26 ins. in the ground for cor. of Ts. 26 N., Rs. 29 and 30 E. only, marked on brass cap

| |
|-------------|
| T 26 N |
| R29E R30E |
| S36 S31 |
| <u>S 1</u> |
| T25N R29E |

1927

Obliterate marks on the old SW. bearing tree
Thence

- S $89^{\circ}58'W$. on true line on S. bdy. of sec. 36 ($E \frac{1}{2}$)
Over rolling sandy land, through open pine and pinion timber and scattering undergrowth.
- 37.90 (Midway bet. NE. and NW. cors. of sec. 1)
Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor. on N. bdy. of sec. 1 T25N. marked on brass cap

$\frac{1}{4}$ S1

1927

from which
A yellow pine 12 ins. in diam. bears $S 39^{\circ}E$. 56 lks. dist., marked $\frac{1}{4}$ S 1 BT.

Resurvey of the South Boundary of T.26 N., R.29 E.

Chains 39.95 A yellow pine 32 ins. in diam. bears S72°W. 116 lks. dist., marked $\frac{1}{4}$ S1 BT.
 Intersect the orig. $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a red sandstone 6x12x8 ins. above ground, marked $\frac{1}{4}$ S. on N. face, with two bearing trees as follows;
 A yellow pine 34 ins. in diam. bears N26°E. 32 lks. dist., marked $\frac{1}{4}$ S BT.
 A yellow pine 30 ins. in diam. bears S57 $\frac{1}{2}$ °E. 83 lks. dist. marked $\frac{1}{4}$ S BT.
 Alongside of the old stone cor. set an iron post 3 ft. long 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 36 only, marked on brass cap

$\frac{1}{4}$ S 36

1927

Obliterate the marks on the old SE. bearing tree and re-mark old NE. bearing tree $\frac{1}{4}$ S36 BT.

Establish one new bearing tree as follows;

A yellow pine 30 ins. in diam. bears N50°W. 153 lks. dist., marked $\frac{1}{4}$ S36 BT.

Thence

S 89°42'W. on true line on S. bdy. of sec. 36 (W $\frac{1}{2}$)

Over nearly level sandy land, thru scattering timber and brush undergrowth.

14.89 Leave timber, bears NE. and SW. Descend slightly over NW. slope.

31.59 Pole fence along E. edge of narrow valley, bears NE. about 6.00 chs. and SW. 4.00 chs. dist.

32.30 Enter cultivated land, bears NE. and SW. Drain in center of valley, course NE.

33.09 Ascend gradually over NE. slope.

Same fence along W. side of valley, bears NW. about 5.00 chs and SE. 150 lks. dist.

Leave cultivated land, bears NW. and SE., enter scattering undergrowth.

36.89 Old foundation for house bears N. 30 lks. dist.

38.02 Intersect subdivision line bet. secs. 1 and 2., T25N.; Closing cor. of secs. 1 and 2 established at this point as hereinafter described.

Continue line and measurement.

40.09 Intersect point of orig. location of cor. of secs. 1, 2, 35, and 36, determined by reference to the orig. NW. bearing tree.

A yellow pine 36 ins. in diam. bears N 36°W. 230 lks. dist. marked as described in the record.

The stump of a burned pine corresponding to the old SE. bearing tree, bears S54°E. 52 lks. dist.

At point of orig. location of cor. of secs. 1, 2, 35, and 36, set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 35 and 36 only, marked on brass cap

T26N | R29E
S35 | S36

S 2

T25N R29E

1927

I Blaze and re-mark old NW. bearing tree T26N., R29E., S35 BT. and establish one new bearing tree as follows;
 An oak 14 ins. in diam. bears N54 $\frac{1}{2}$ °E. 25 lks. dist., marked T26N., R29E., S36 BT.

Land, rolling.

Soil, sandy clay loam 2nd. and 3rd. rate.

Timber, oak, juniper, and yellow pine.

Undergrowth, sagebrush.

Resurvey of the South Boundary of T.26 N., R.29 E.

| Chains | |
|--------|---|
| | S 89°41'W. on true line on S. bdy. of sec. 35 (E $\frac{1}{2}$) Over rolling sandy land thru. medium growth timber and scattering undergrowth. |
| 24.96 | Swale course SW. |
| 38.04 | (Midway bet. NE. and NW. cors. of sec. 2) Set an iron post 3 ft. long 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor. on N. bdy. of sec. 2., T25N marked on brass cap |
| | <u>$\frac{1}{4}$ S 2</u> |
| | 1927 |
| | from which |
| | A yellow pine 22 ins. in diam. bears S38 $\frac{1}{2}$ °E. 187 lks. dist. marked $\frac{1}{4}$ S2 BT. |
| | A yellow pine 30 ins. in diam. bears S46°W. 93 lks. dist., marked $\frac{1}{4}$ S2 BT. |
| 39.66 | Dim road bears N. and S. |
| 39.96 | Intersect the orig. $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a brown sandstone 4x10x8 ins. above ground, marked $\frac{1}{4}$ S on N. face with two bearing trees as follows; |
| | A yellow pine 30 ins. in diam. bears N12 $\frac{1}{2}$ °W. 87 lks. dist., marked $\frac{1}{4}$ S |
| | A yellow pine 30 ins. in diam. bears S42°W. 14 lks. dist., marked $\frac{1}{4}$ S BT. |
| | Alongside of the old stone cor., Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 35 only, marked on brass cap |
| | <u>$\frac{1}{4}$ S 35</u> |
| | 1927 |
| | Obliterate the marks on the old SW. bearing tree and blaze and re-mark the old NW. bearing tree $\frac{1}{4}$ S35 BT. |
| | Establish new bearing tree as follows; |
| | A yellow pine 30 ins. in diam. bears N32°W. 96 lks. dist. marked $\frac{1}{4}$ S35 BT. |
| | Thence |
| | S 89°40'W. on true line on S. bdy. of sec. 35 (W $\frac{1}{2}$) Over rolling sandy land, slopes SW., thru scattering timber |
| 13.13 | Leave timber bears NE. and SW. Descend 15 ft. over NW. slope. |
| 18.63 | Wash 10 lks. wide course SW. Ascend slightly over SE. slope. |
| 20.00 | Main road from St. Michaels Ariz. to Wide Ruins, bears NE. and SW. |
| | The NW. cor. of fenced field bears S. 100 lks. dist. |
| 21.33 | Drain, course S. Ascend gradually over E. slope. |
| 30.23 | Road bears N. and S. |
| 38.19 | Intersect subdivision line bet. secs. 2 and 3.; The closing cor. of said secs. established here as hereinafter described. |
| | Continue line and measurement. |
| 40.13 | Intersect the orig. cor. of secs. 2, 3, 34, and 35., which is a sandstone 4x6x12 ins. above ground, marked with 2 notches on E. and 4 notches on W. edges, with two bearing trees as follows. |
| | A yellow pine 36 ins. in diam. bears S5°E. 24 lks. dist., marked as described in the record. |
| | An oak 8 ins. in diam. bears N73 $\frac{1}{2}$ °W. 17 lks. dist., marked as described in the record. |
| | Alongside the old stone cor., |

Resurvey of the South Boundary of T.26 N., R.29 E.

Chains

Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 34 and 35 only, marked on brass cap

T26N | R29E.
S34 | S35

S 3
T25N R29E
1927

Obliterate the marks on the old SE. bearing tree and blaze and re-mark the old NW. bearing tree, T26N., R29E., S34. BT.

Establish one new bearing tree as follows;
A yellow pine 18 ins. in diam. bears N65 1/4° E. 114 lks. dist. marked T26N., R29E., S35 BT.

Land, rolling.
Soil, shallow sandy clay loam 2nd. and 3rd. rate.
Timber, oak, pinion, and yellow pine.
Undergrowth, sagebrush.

S 89°39' W. on true line on S. bdy. of sec. 34 (E 1/2)
Over rolling sandy land, thru. scattering timber and undergrowth.

11.03
38.09

Old road bears NW. and SE.
Midway bet. NE. and NW. cors. of sec. 3, T25N.)
Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for 1/4 sec. cor. on N. bdy. of sec. 3. T25N. marked on brass cap

1/4 S 3

1927

from which

A yellow pine 30 ins. in diam. bears S40 1/2° E. 262 lks. dist. marked 1/4 S3 BT.

A yellow pine 6 ins. in diam. bears S16 1/4° W. 202 lks. dist., marked 1/4 S3 BT.

40.03

Intersect the orig. 1/4 sec. cor. of secs. 3 and 34, which is a sand stone 4x16x8 ins. above ground, marked 1/4 S on N. face with one bearing tree as follows;

A yellow pine 20 ins. in diam. bears N11° W. 156 lks. dist., marked 1/4 S BT.

Alongside of old stone cor.
Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for 1/4 sec. cor. of sec. 34 only, marked on brass cap

1/4 S 34

1927

Re-mark the old bearing tree 1/4 S34 BT. and establish one new bearing tree as follows;
A yellow pine 30 ins. in diam. bears N16 1/2° E. 9 lks. dist. marked 1/4 S34 BT.

Thence

Resurvey of the South Boundary of T.26 N., R.29 E.

Chains

S 89°57'W. on true line on S.bdy.of sec.34 ($W\frac{1}{2}$)
 Over rolling sandy land, thru scattering timber and undergrowth.

31.22 Drain course NW.
 38.09 Intersect the subdivision line bet. secs.3 and 4, T25N
 The closing cor. of said secs.established at this point as hereinafter described.
 Continue line and measurement.

40.17 Intersect point of orig.cor. of secs.3,4,33,and 34, determined by reference to the original bearing trees.

A pine 36 ins. in diam.bears N 76°E.35 lks. dist., marked as described in the record.
 An oak 12 ins. in diam. bears S 57°W.62 lks. dist., marked as described in the record.
 At point of orig.cor. of secs.3,4,33,and 34, Set an iron 3 ft. long, 2 ins. in diam.26 ins. in the ground for cor. of secs.33 and 34 only,marked on brass cap

T26N | R29E
 S33 | S34

S 4
 T25N R29E

1927

Obliterate the marks on the old SW.bearing tree and establish one new bearing tree as follows;

An oak 10 ins. in diam. bears N49½°W.104 lks. dist., marked T26N.,R29E.,S33 BT.

Land,rolling.
 Soil,sandy clay loam 2nd. rate.
 Timber,pinion oak,and yellow pine.
 Undergrowth,sagebrush.

N 89°52'W. on true line on S.bdy.of sec.33 ($E\frac{1}{2}$)
 Over rolling sandy land, thru.open timber and scattering undergrowth.

25.23 Road bears NW. and SE.
 37.87 (Midway bet. the NE. and NW.cor.of sec.4)
 Set an iron post 3 ft. long, 1 in. in diam.28 ins. in the ground for ¼ sec. cor. on N.bdy.of sec.4.,marked on brass cap

¼ S 4

1927

from which

A yellow pine 30 ins. in diam. bears S 3½°E.217 lks. dist., marked ¼ S4 BT.
 A jack pine 6 ins. in diam. bears S 30½°W.77 lks. dist., marked ¼ S4 BT.

39.83 Drain,course N.
 40.23 Intersect point of original location of the ¼ sec. cor. of secs.4 and 33,determined by reference to one of the orig.bearing trees

A yellow pine 24 ins. in diam.bears S89°E.220 lks. dist., marked ¼ S BT.
 At point of orig.location of the ¼ sec. cor. of secs.4 and 33, Set an iron post 3 ft. long,1 in. in diam.26 ins. in the ground for ¼ sec. cor. of

Resurvey of the South Boundary of T.26 N., R.29 E.

Chains

sec.33 only, marked on brass cap

1/4 S 33

1927

Obliterate marks on the old bearing tree and mark two new bearing trees as follows;

A yellow pine 32 ins. in diam. bears N82 1/4°W. 485 lks. dist. marked 1/4 S33 BT.

A yellow pine 30 ins. in diam. bears N85 1/2°E. 276 lks. dist. marked 1/4 S33 BT.

Thence

N 89°56'W. on true line on S.bdy. of sec.33

Over nearly level land, thru scattering timber and undergrowth.

37.60 Intersect the subdivision line bet. secs.4 and 5, T25N Closing cor. of said secs. established at this point as hereinafter described.

Continue line and measurement.

40.25 Intersect the orig. cor. of secs.4,5,32, and 33, which is a red sandstone 3x18x14 ins. above ground, marked with 4 notches on E. and 2 notches on W. edges with two bearing trees as follows;

A dead oak 30 ins. in diam. bears N81°E. 143 lks. dist., marked as described in the record.

A dead oak 8 ins. in diam. bears N40°W. 61 lks. dist., marked as described in the record.

Alongside the old stone cor.,

Set an iron post 3 ft. long 2 ins. in diam. 26 ins. in the ground for cor. of secs.32 and 33 only, marked on brass cap

T26N | R29E

S32 | S33

S 5

T25N R29E

1927

from which

A Norway pine 20 ins. in diam. bears N69°E. 40 lks. dist., marked T26N., R29E., S33 BT.

An oak 10 ins. in diam. bears N40 1/2°W. 68 lks. dist., marked T26N., R29E., S32 BT.

Land, level and rolling.

Soil, sandy clay loam 2nd. and 3rd. rate.

Timber, oak, pinion and yellow pine.

Undergrowth, scrub oak and sagebrush.

N 89°42'W. on true line on S.bdy. of sec.32 (E 1/2)

Over rolling sandy land, thru open timber and scattering brush undergrowth.

24.11 East side of circular brush goat corral 70 lks. in diam.

24.81 West side of corral.

27.56 Dim road bears N. and S.

37.41 (Midway bet. the NE. and NW. cors. of sec.5 T25N.)

Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for 1/4 sec. cor. on N.bdy. of sec.5 marked on brass cap

Resurvey of the South Boundary of T.26 N., R.29 E.

Chains

 $\frac{1}{4}$ S 5

1927

from which

- A pinion 12 ins. in diam. bears S75°E.70 lks. dist.,
marked $\frac{1}{4}$ S5 BT.
- A pinion 8 ins. in diam. bears S69 $\frac{3}{4}$ °W.120 lks. dist.,
marked $\frac{1}{4}$ S5 BT.
- 40.11 Intersect the orig. $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is
a yellow pine 18 ins. in diam., marked $\frac{1}{4}$ S
on N. face with one bearing tree as follows;
An oak stump 8 ins. in diam. bears S7°W.14 lks. dist.,
marked BT.
Change the orig. cor. to $\frac{1}{4}$ sec. cor. of sec. 32 only, as
follows;
Re-mark tree $\frac{1}{4}$ S32 on N. face
- Obliterate the marks on the old oak stump and establish
two new bearing trees as follows;
A Norway pine 12 ins. in diam. bears N15 $\frac{1}{4}$ °E.49 lks. dist.
marked $\frac{1}{4}$ S32 BT.
A pinion 8 ins. in diam. bears N54 $\frac{3}{4}$ °W.93 lks. dist.,
marked $\frac{1}{4}$ S32 BT.
- Thence
N 89°46'W. on true line on S. bdy. of sec. 32 (W $\frac{1}{2}$)
Over rolling stony land, thru. scattering timber and brush
undergrowth.
- 4.89 Drain 5 lks. wide course N.
5.39 Leave timber bears N. and S.
37.37 Intersect the subdivision line bet. secs. 5 and 6, T25N
Closing cor. of secs. 5 and 6 established at this point
as hereinafter described.
- Continue line and measurement.
- 40.39 Intersect point of original location of the cor. of secs.
5, 6, 31, and 32, determined by reference to
one of the orig. bearing trees.
A yellow pine 36 ins. in diam. dead and fallen down,
bears S52°W.373 lks. dist.
At point of orig. location of cor. of secs. 5, 6, 31, and 32
Set an iron post 3 ft. long, 2 ins. in diam. 24 ins. in
the ground to bedrock, for cor. of secs. 31 and
32 only, marked on brass cap

T26N | R29E

S31 | S32

S 6

T25N | R29E

1927

- Obliterate marks on the old bearing tree and establish
two new bearing trees as follows;
- A yellow pine 30 ins. in diam. bears N81°E.649 lks. dist.
marked T26N., R29E., S32 BT.
- A pinion 8 ins. in diam. bears N26°W.445 lks. dist.,
marked T26N., R29E., S31 BT.
- Land, rolling.
Soil, sandy clay loam 2nd. and 3rd. rate.
Timber, oak, pinion and yellow pine.
Undergrowth, oak and sage brush.

Resurvey of the South Boundary of T.26 N., R.29 E.

Chains

4.00 N 89°47'W. on true line on S. bdy. of sec. 31 ($E\frac{1}{2}$)
 Over rolling sandy land, thru. scattering timber and
 undergrowth.
 4.09 Dim road bears N. and S.
 27.39 Road, bears N. and S.
 33.46 Road bears NE. and SW.
 36.98 (40.00 chs. W. from NE. cor. of sec. 6)
 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor. on N. bdy. of sec. 6, marked
 on brass cap

 $\frac{1}{4}$ S 6

1927

from which,
 A yellow pine 18 ins. in diam. bears S44 $\frac{3}{4}$ °E157 lks. dist.,
 marked $\frac{1}{4}$ S6 BT.
 A yellow pine 16 ins. in diam. bears S55 $\frac{1}{2}$ °W. 161 lks. dist.,
 marked $\frac{1}{4}$ S6 BT.
 40.29 Intersect the orig. $\frac{1}{4}$ sec. cor. of secs. 6 and 31., which
 is a dead oak 4 ins. in diam., marked $\frac{1}{4}$ S on
 N. face with one bearing tree as follows
 A yellow pine 26 ins. in diam. bears S20°E. 159 lks. dist.,
 marked $\frac{1}{4}$ S BT.
 Alongside of old tree cor.
 Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in the
 ground to bedrock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor. of sec. 31. only, of sec. 31 only.,
 marked on brass cap

 $\frac{1}{4}$ S 31

1927

Leave the old bearing tree marked as described for cor.
 accessory and establish one new bearing tree as
 follows;
 A pinion 10 ins. in diam. bears N17°W. 42 lks. dist.,
 marked $\frac{1}{4}$ S31 BT.
 Thence
 West on true line on S. bdy. of sec. 31 ($W\frac{1}{2}$)
 Over rolling stony land thru. scattering timber & undergrowth,
 5.50 Wash, course N.
 35.83 Intersect the closing cor. of Ts. 25 N., Rs. 28 and 29 E.,
 as described in Book "A"
 Continue line and measurement.
 39.65 Intersect the cor. of Ts. 26 N., Rs. 28 and 29 E., as
 described in Book "A".

Land, rolling
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, pinion and yellow pine.
 Undergrowth, scrub oak and sagebrush.

Resurvey of the East Boundary of T.25 N., R.29 E.

Chains

The East boundary of T.25 N., R.29 E., was surveyed in 1883 by Frank Follman, U.S. D.S.; No retracement or resurvey is of record.

From the Std. cor. of Ts. 25 N., Rs. 29 and 30 E., hereinbefore described,

North on a random line along E. bdy. of Tp. setting temp $\frac{1}{4}$ sec. and sec. cors. alternately at intervals of 40.00 chs. until at

482.04 Intersect the S. bdy. of T. 26 N., R. 30 E., 2.17 chs. S $89^{\circ}39' E$ of the reconstructed cor. of Ts. 26 N., Rs. 29 and 30 E., hereinbefore described.

Return to the Std. cor. of Ts. 25 N., Rs. 29 and 30 E. Thence

North on true line bet. secs. 31 and 36.

Over rolling sandy land, thru scattering timber and undergrowth.

.50 Road leads to Indian hogans, bears NE. and SW.

7.00 Swale, course SW.

Ascend 20 ft. over SE. slope.

15.00 Point of stony ridge bears NE. and SW.


Descend gradually over NW. slope

30.30 Dim road bears NE. and SW.

32.60 Bottom of draw, course W.

Ascend gradually over S. slope

40.00 Set an iron post 3 ft. long, 1 in. in diam. over cross (x) on exposed bedrock, supported in a mound of stone for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap.



1927

from which

A pinion 8 ins. in diam. bears N $16\frac{1}{2}^{\circ} E$. 21 lks. dist., marked $\frac{1}{4}$ S31 BT.

A pinion 6 ins. in diam. bears N $72^{\circ} W$. 92 lks. dist., marked $\frac{1}{4}$ S36 BT.

From this cor. the old $\frac{1}{4}$ sec. cor. of secs. 31 and 36 which is a sandstone $20 \times 14 \times 4, 8$ ins. above ground firmly set, properly marked and witnessed by two bearing trees properly marked bears S $73^{\circ} 23' W$. 70 lks. dist.

Destroy the old cor. and obliterate the marks on the two old bearing trees.

41.20 Dim road bears NW. and SE.


46.00 Leave timber, bears NE. and SW.

Enter sagebrush flat, bears NE. and SW.

68.00 Draw course SW.

78.00 Leave flat bears NE. and SW.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 18 ins. in the ground for reestablished cor. of secs. 25, 30, 31, and 36, marked on brass cap



1927

from which

Resurvey of the East Boundary of T.25 N.,R.29 E.


Chains

- A yellow pine 40 ins. in diam. bears N 17°E.330 lks. dist. marked T25N.,R30E.,S30 BT.
- A pinion 9 ins. in diam.bears S53½°E.535 lks. dist., marked T25N.,R30E.,S31 BT.
- A yellow pine 18 ins. in diam. bears S52¼°W.155 lks. dist. marked T25N.,R29E.,S36 BT.
- A yellow pine 24 ins. in diam.bears N65½°W.116 lks. dist., marked T25N.,R29E.,S25 BT.

Diligent search in this vicinity fails to reveal the old cor. of secs.25,30,31,and 36.

Land,rolling.
 Soil,sandy and stony,2nd.3rd.,and 4th.rate.
 Timber,oak,pinion and yellow pine.
 Undergrowth,scrub oak and sagebrush.

- 2.00 North on true line bet. secs.25 and 30.
- 5.00 Over rolling sandy land,thru scattering undergrowth.
- 28.80 Enter scattering timber,bears NE. and SW.
- 40.00 Ascend gradually over SW.slope.
- Road bears E. and W.
- Set an iron post 3 ft. long, 1 in. in diam.26 ins. in the ground for reestablished ¼ sec. cor.,marked on brass cap




from which

- A pinion 10 ins. in diam. bears N27½°E.26 lks. dist., marked ¼ S30 BT.
- A pinion 8 ins. in diam. bears N78°W.30 lks. dist., marked ¼ S25 BT.

From this cor.the old ¼ sec. cor. of secs.25 and 30,which is a decayed post marked ¼ S lying on old earth mound and witnessed by one bearing tree,bears N30°57'W.116 lks. dist.

- 60.00 Destroy the old post and obliterate the marks on the old bearing tree.
- 69.70 Descend 30 ft. over NW. slope.
- Bottom of draw,course SW.
- Ascend 70 ft. over SE.slope.
- 80.00 Top of stony spur,bears SW.
- Set an iron post 3 ft. long,2 ins. in diam.12 ins. in the ground to bedrock,supported in a mound of stone for reestablished cor.of secs.19,24,25, and 30.,marked on brass cap



from which

Resurvey of the East Boundary of T.25 N., R.29 E.

Chains


- A pinion 6 ins. in diam. bears N 54½°E.93 lks. dist. marked T25N.,R30E.,S19 BT.
- A pinion 10 ins. in diam.bears S40°E.69 lks. dist., marked T25N.,R30E.,S30 BT.
- A yellow pine 14 ins. in diam. bears S61½°W.67 lks. dist. marked T25N.,R29E.,S25 BT.
- A pinion 8 ins. in diam. bears N51°W.106 lks. dist., marked T25N.,R29E.,S24 BT.

From this cor.the old cor. of secs.19,24,25,and 30, which is a sand stone 36x14x20 ins. above ground properly marked and witnessed by two pine bearing trees,properly marked,bears N74½°W.137 lks. dist.

Destroy the old cor.stone and obliterate the marks on the two old bearing trees.

Land,rolling and hilly.
Soil,sandy and stony 3rd, and 4th.rate.
Timber,oak,cedar,pinion and yellow pine.
Undergrowth,scrub oak and sagebrush.

- 18.00 North on true line bet. secs. 19 and 24.
- 18.70 Descend 63 ft. over NW. slope over rolling stony land, thru.heavy timber and scattering undergrowth.
- 40.00 Road to Indian hogans bears NE. and SW.
- Bottom of wash 10 lks. wide,course SW.
- Ascend gradually over SE. slope.
- Set an iron post 3 ft. long, 1 in. in diam.18 ins. in the ground to bedrock,supported in a mound of stone for reestablished ¼ sec. cor.,marked on brass cap



from which


- A pinion 6 ins. in diam.bears S 33¼°E.22 lks. dist., marked ¼ S19 BT.
- A pinion 8 ins. in diam. bears N 47½°W.65 lks. dist., marked ¼ S24 BT.

From this cor.the old ¼ sec. cor. of secs.19 and 24, which is a sandstone 6x12x12 ins. above ground firmly set,properly marked and witnessed by a mound of stone W.and one bearing tree properly marked

Destroy the old cor.stone and obliterate the marks on the old bearing tree.

Ascend 125 ft. over SE. slope over stony land.

- 63.00 Slope changes from SE.to W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam.28 ins. in the ground for reestablished cor. of secs.13,18,19, and 24.,marked on brass cap



1927

Resurvey of the East Boundary of T.25 N.,R.29 E.

Chains

from which


- A pinion 10 ins. in diam.bears N 80½°E.23 lks. dist., marked T25N.,R30E.,S18 BT.
- A pinion 6 ins. in diam.bears S 60½°E.61 lks. dist., marked T25N.,R30E.,S19 BT.
- A pinion 8 ins. in diam.bears S 49½°W.28 lks. dist., marked T25N.,R29E.,S24 BT.
- A pinion 8 ins. in diam. bears N 81°W.35 lks. dist., marked T25N.,R29E.,S13 Bt.

From this cor.the old cor. of secs.13,18,19,and 24,which is a pine post 4 ins. sq.properly marked,set in a mound of stone and witnessed by two bearing trees,properly marked.,bears N 75°W.177 lks. dist.
 Destroy the old cor.post and obliterate the marks on the two old bearing trees.

Land,rolling and hilly.
 Soil,sandy and stony,3rd. and 4th.rate.
 Timber,oak,cedar,pinion and Yellow pine.
 Undergrowth,scrub oak and sagebrush.

40.00

North on true line bet. secs.13 and 18.
 Over rolling stony land,slopes W.thru heavy timber and brush undergrowth.
 Set an iron post 3 ft. long,1 in. in diam.20 ins. in the ground for reestablished ¼ sec. cor.marked on brass cap



from which

- A pinion 10 ins. in diam.bears S88¼°E 99 lks. dist., marked ¼ S18 BT.
- A pinion 10 ins. in diam. bears N 58½°W.99 lks. dist., marked ¼ S13 BT.

From this cor.the old ¼ sec. cor. of secs.13 and 18,which is a sand stone 12x10x6 ins.ins.above ground marked ¼ S on W.face,witnessed by two bearing trees.properly marked.

Destroy the old stone cor. and obliterate the marks on the two old bearing trees.

50.00


Leave timber bears NE. and SW.
 Enter sagebrush flat,bears NE. and SW.

62.00

Leave flat bears NE. and SW.
 Enter scattering timber bears NE. and SW.

80.00

Set an iron post 3 ft. long.2 ins. in diam.26 ins. in the ground for reestablished cor. of secs.7,12,13, and 18.,marked on brass cap



from which

Resurvey of the East Boundary of T.25 N., R.29 E.

Chains

- A pinion 8 ins. in diam. bears N 38 $\frac{1}{4}$ °E 275 lks. dist., marked T25N., R30E., S7 BT.
- A pinion 8 ins. in diam. bears S 72 $\frac{1}{2}$ °E 28 lks. dist., marked T25N., R30E., S18 BT.
- A pinion 6 ins. in diam. bears S 42 $\frac{1}{2}$ °W. 148 lks. dist., marked T25N., R29E., S13 BT.
- A pinion 12 ins. in diam. bears N55 $\frac{1}{2}$ °W. 118 lks. dist., marked T25N., R29E., S12 BT.


From this cor. the old cor. of secs. 7, 12, 13, and 18, which is a sand stone 14x12x8 ins. above ground with pine post alongside, properly marked and witnessed by to bearing trees, bears N63°35'W. 196 lks. dist.

Destroy the old cor. stone and post and obliterate the marks on the two old bearing trees.

Land, rolling.
 Soil, sandy 2nd. and 3rd. rate.
 Timber, cedar, oak, pinion and yellow pine.
 Undergrowth, scrub oak and sagebrush.

North on true line bet. secs. 7 and 12.
 Over rolling sandy land, slopes SW. thru. scattering timber and dense undergrowth.

- 7.90 Road bears E. and W.
- 8.40 Drain, course W.
- 19.50 Drain, course SW.
- 23.40 Road bears NE. and SW.
- 40:00 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for reestablished $\frac{1}{4}$ sec. cor., marked on brass cap




from which

- A pinion 10 ins. in diam. bears N71 $\frac{1}{2}$ °E. 206 lks. dist., marked $\frac{1}{4}$ S7 BT.
- A pinion. 4 ins. in diam. bears N57 $\frac{1}{4}$ °W. 464 lks. dist., marked BT only.

From this cor. the old $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which is a sandstone 10x4x12 ins. above ground, firmly set, marked $\frac{1}{4}$ S on W. face, and witnessed by one bearing tree properly marked, bears N57 $\frac{1}{4}$ °W. 223 lks. dist.

Destroy the old stone cor. and obliterate the marks on the old bearing tree.

- 47.00 Leave timber bears NE. and SW.
- Enter sagebrush flat, bears NE. and SW.
- Leave flat, bears NE. and SW.
- Enter scattering timber bears NE. and SW.
- 76.30 Road bears NW. and SE.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for reestablished cor. of secs. 1, 6, 7, and 12., marked on brass cap



1927

Resurvey of the East Boundary of T.25 N.,R.29 E.

Chains

from which

A pinion 6 ins. in diam.bears N 59 $\frac{1}{4}$ °E.122 lks. dist.,
marked T25N.,R30E.,S6 BT.

A pine 24 ins. in diam. bears S 8 $\frac{1}{2}$ °E.240 lks. dist.,
marked T25N.,R30E.,S7 BT.

A pinion 12 ins. in diam. bears S61 $\frac{1}{4}$ °W.62 lks. dist.,
marked T25N.,R29E.,S12 BT.

A pinion 8 ins. in diam. bears N69°W.66 lks. dist.,
marked T25N.,R29E.,S1 BT.

From this cor.the old cor. of secs.1,6,7,and 12,which is
a sand stone 20x10x6 ins. above ground,firmly
set,properly marked and witnessed by two pine
bearing trees,bears N 49°W.240 lks. dist.

Destroy the old cor.stone and obliterate the marks on
the two old bearing trees.


Land,rolling and level.
Soil,sandy 1st. and 2nd. rate:
Timber,oak,cedar,pinion and yellow pine.
Undergrowth,scrub oak and sagebrush.

.90
31.60
40.00

North on true line bet. sec. 1 and 6.
Over rolling sandy land,thru.scatterng timber and dense
undergrowth.

Road bears NE. and SW.
Road bears NE. and SW.

Set an iron post 3 ft. long, 1 in. in diam.26 ins. in the
ground for reestablished $\frac{1}{4}$ sec. cor.,marked on
brass cap



49.00
71.00
82.04

from which

A yellow pine 30 ins. in diam.bears N16°E.457 lks. dist.,
marked $\frac{1}{4}$ S6 BT.

A pinion 8 ins. in diam. bears N79°W.120 lks. dist.,
marked $\frac{1}{4}$ S1 BT.

From this cor.the old $\frac{1}{4}$ sec. cor. of secs.1 and 6,which
is a sand stone 12x8x7 ins.above ground with
pine post alongside,properly marked and
witnessed by two pine bearing trees.

Destroy the old post and stone cor.and obliterate the
marks on the two old bearing trees.

Leave timber bears NE. and SW.
Enter sagebrush flat.

Leave flat,bears NE. and SW.
Enter scattering timber,bears NE. and SW.
Descend gradually over NW. slope.

Indian hogan bears E.400 lks. dist.

Intersect the S.bdy.of T26N.,R30E.,217 lks. S89°39'E.of
the reconstructed cor. of Ts.26 N.,Rs.29 and 30
E.,hereinbefore described.;At point of intersect-
ion,

Set an iron post 3 ft. long, 3 ins. in diam.14 ins. in
the ground to bedrock,supported in a mound of
stone for closing cor. of Ts.25 N.,Rs.29 and 30
E.,marked on brass cap

Resurvey of the East Boundary of T.25 N., R.29 E.

Chains

T26N R30E
S31

S 1 S 6
R29E R30E

T25N
CC

1927

from which

A yellow pine 14 ins. in diam. bears S 32 $\frac{1}{2}$ ° E. 38 lks. dist.,
marked T25N., R30E., S6 CC BT.

A yellow pine 18 ins. in diam. bears S44 $\frac{1}{4}$ ° W. 295 lks. dist.
marked T25N., R29E., S1 CC BT.

Land, rolling and level.
Soil, shallow sandy loam 2nd. rate.
Timber, cedar, oak, pinion and yellow pine.
Undergrowth, sagebrush.

Boundaries of Township 25 North, Range 29 East.
Latitudes, Departures, and Closing Errors.


| Lines designated | True course | Dist. | Latitudes | | Departures | |
|---|--------------------|--------|-----------|--------|------------|--------|
| | | | N | S | E | W |
| South bdy of Tp. (6th. Std. Par. N.) | West | 480.00 | | | | 480.00 |
| West bdy. of Tp. | North | 481.84 | 481.84 | | | |
| North bdy. of Tp. | East | 35.83 | | | 35.83 | |
| | S89°47'E | 40.29 | | .15 | 40.29 | |
| | S89°46'E | 40.39 | | .16 | 40.39 | |
| | S89°42'E | 40.11 | | .21 | 40.11 | |
| | S89°56'E. | 40.25 | | .05 | 40.25 | |
| | S89°52'E | 40.23 | | .09 | 40.23 | |
| | N89°57'E. | 40.17 | .04 | | 40.17 | |
| | N89°39'E | 40.03 | .24 | | 40.03 | |
| | N89°40'E | 40.13 | .23 | | 40.13 | |
| | N89°41'E | 39.96 | .22 | | 39.96 | |
| N89°42'E | 40.09 | .21 | | 40.09 | | |
| N89°58'E. | 39.95 | .02 | | 39.95 | | |
| 25., 29. | S89°39'E | 2.17 | | .01 | 2.17 | |
| East bdy. of Tp. | South | 482.04 | | 482.04 | | |
| Convergency | | | | | .51 | |
| Totals | | | 482.80 | 482.71 | 480.11 | 480.00 |
| | | | 482.71 | | 480.00 | |
| | Error in latitude | | 0.09 | | 0.11 | |
| | Error in departure | | | | 0.11 | |

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains


From the Std. cor. of secs. 35 and 36 on S. bdy. of Tp. herein- before described

- 7.90 N 0°01' W. bet. secs. 35 and 36.
- 12.00 Over rolling sandy land, thru. heavy undergrowth.
- 22.40 Drain, course SW., ascend gradually over SE. slope
- 35.00 Enter timber bears NE. and SW.
- 40.00 Road bears NE. and SW.
- Descend gradually over NW. slope.
- Set an iron post 3 ft. long; 1 in. in diam. 14 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor., marked on brass cap



from which

- A pinion 8 ins. in diam. bears S75 1/2° E. 18 lks. dist., marked 1/4 S36 BT.
- A pinion 12 ins. in diam. bears N68° W. 6 lks. dist., marked 1/4 S35 BT.
- 43.80 Drain, course SW.
- 50.00 Ascend 20 ft. over SE. slope
- Top of ascent on point of spur, slopes W.
- Descend
- 61.00 Ravine 5 lks. wide, course W.
- 71.00 Drain course W.
- 80.00 Set an iron post 3 ft. long 2 ins. in diam. 26 ins. in the ground for cor. of secs. 25, 26, 35, and 36., marked on brass cap



from which

- A pinion 12 ins. in diam. bears N31° E. 20 lks. dist., marked T25N., R29E., S25 BT.
- A pinion 8 ins. in diam. bears S74 1/2° E. 36 lks. dist., marked T25N., R29E., S36 BT.
- A pinion 8 ins. in diam. bears S61 1/4° W. 104 lks. dist., marked T25N., R29 E., S35 BT.
- A pinion 10 ins. in diam. bears N71 1/2° W. 95 lks. dist. marked T25N., R29E., S26 BT.


Land, rolling.
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, pinion and yellow pine.
 Undergrowth, sagebrush.

- 40.00 East on a random line bet. secs. 25 and 36.
- 79.96 Set temp. 1/4 sec. cor.
- Intersect the E. bdy. of Tp. 5 lks. S. of the reestablished cor. of secs. 25, 30, 31, and 36., hereinbefore described,

Thence
 S 89° 58' W. on true line bet. secs. 25 and 36.

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains
 2.00 Over rolling sandy land, thru scattering undergrowth.
 Enter scattering timber bears NE. and SW.
 12.96 Leave timber bears NE. and SW.
 Enter sagebrush flat, bears NE. and SW.
 16.96 Drain, course SW.
 28.96 Leave sagebrush flat, bears N. and S.
 Enter timber bears NE. and S.; Ascend gradually over SE.
 slope.
 34.96 Top of slope, thence over rolling land.
 39.98 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap




from which

A pinion 6 ins. in diam. bears N63 $\frac{1}{2}$ °E. 16 lks. dist.,
 marked $\frac{1}{4}$ S25 BT.
 A pinion 8 ins. in diam. bears S14 $\frac{1}{2}$ °E. 17 lks. dist.,
 marked $\frac{1}{4}$ S36 BT.
 53.96 Road bears NE. and SW.
 79.96 The cor. of secs. 25, 26, 35, and 36.

Land, rolling.
 Soil, shallow sandy clay loam 2nd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.


N 0°1'W. bet. secs. 25 and 26.
 Over rolling sandy land, slopes SW. thru scattering timber
 and heavy undergrowth.
 16.50 Draw, course SW. in small valley, bears E. and W., extends
 E. of line about 2500 chs. dist.
 36.10 Old road bears NW. and SE.
 Leave valley, bears E. and W.; Ascend 50 ft. over S. slope
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in
 the ground supported in a mound of stone for $\frac{1}{4}$
 sec. cor. marked on brass cap



from which

A pinion 8 ins. in diam. bears S43 $\frac{1}{2}$ °E. 9 lks dist.,
 marked $\frac{1}{4}$ S25 BT.
 A pinion 8 ins. in diam. bears S74 $\frac{1}{2}$ °W. 15 lks. dist.,
 marked $\frac{1}{4}$ S26 BT.
 Top of ascent on spur slopes SW., thence over rolling
 stony land, slopes W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the
 ground for cor. of secs. 23, 24, 25, and 26., marked
 on brass cap



Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

from which

- A pinion 8 ins. in diam. bears N45°E.80 lks. dist., marked T25N.,R29E.,S24 BT.
- A pinion 14 ins. in diam. bears S46¼°E.70 lks.dist., marked T25N..R29E.,S25 BT.
- A yellow pine 24 ins. in diam. bears S49¼°W.180 lks.dist. marked T25N.,R29E.,S26 BT.
- A yellow pine 20 ins. in diam. bears N16¼°W.145 lks. dist. marked T25N.,R29E.,S23 BT.

Land,rolling.
 Soil,sandy and stony 2nd. and 3rd. rate.
 Timber,oak,cedar,pinion and yellow pine.
 Undergrowth,sagebrush.

- 40.00 N 89°58'E. on a random line bet. secs.24 and 25.
Set temp.¼ sec. cor.
- 80.14 Intersect the E.bdy.of Tp.8 lks. N.of the reestablished cor. of secs,19,24,25,and 30,hereinbefore described.
- Thence
N 89°59'W. on true line bet. secs.24 and 25.
Descend 90 ft. over NW.slope over stony hilly land,thru scattering timber, and undergrowth.
- 11.04 Road at foot of descent in narrow valley,bears NE. and SW.
- 11.64 Leave hilly land,bears NE. and SW.,enter rolling land.
Ravine 8 lks. wide,course SW.
- 40.07 Ascend gradually over SE.slope.
Set an iron post 3 ft. long, 1 in. in diam.14 ins. in the ground to bedrock,supported in a mound of stone for ¼ sec. cor.,marked on brass cap

¼ S 24
 ¼ S 25
 .1927

.from which

- 41.00 A pinion 8 ins. in diam. bears N75½°E.58 lks. dist., marked ¼ S24 BT.
- 54.14 A pinion 12 ins. in diam. bears S84¼°W.64 lks. dist., marked ¼ S25 BT
- 70.00 Top of spur slopes SW.;
- 80.14 Descend gradually over NW. slope.
Leave timber bears NE. and SW.
Enter scattering timber bears NW. and SE.
The cor. of secs.23,24,25,and 26.

Land,rolling and hilly.
 Soil,sandy and stony 3rd, and 4th.rate.
 Timber,oak,cedar,pinion and yellow pine.
 Undergrowth,sagebrush.

- 3.00 N 0°1'W. bet. secs. 23 and 24.
Over rolling sandy land,thru scattering timber and undergrowth.
Wash 6 lks. wide in bottom of draw 4.00 chs .wide,course W.
Ascend over SW.slope

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

- 20.00 Point of spur, bears SW.
Descend gradually over NW. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S23} | \text{S24} \end{array}$$

1927

from which

- A pine 8 ins. in diam. bears S 63° E. 38 lks. dist.,
marked $\frac{1}{4}$ S24 BT.
A pine 14 ins. in diam. bears S $52\frac{1}{2}^{\circ}$ W. 99 lks. dist.,
marked $\frac{1}{4}$ S23 BT.
43.40 Wash 10 lks wide, water clear 2 ins. deep on gravelly
bottom, course SW.
55.00 Begin gradual ascent over SE. slope.
63.00 Drain, course SE.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 12 ins. in
the ground to bedrock, supported in a mound of
stone for cor. of secs. 13, 14, 23, and 24., marked on
brass cap

$$\begin{array}{c} \text{T25N} | \text{R29E} \\ \text{S14} | \text{S13} \\ \hline \text{S23} | \text{S24} \end{array}$$

1927

from which

- A pinion 8 ins. in diam. bears N $15\frac{1}{2}^{\circ}$ E. 140 lks. dist.,
marked T25N., R29E., S13 BT.
A pinion 8 ins. in diam. bears S 62° E. 51 lks. dist.,
marked T25N., R29E., S24 BT.
A pinion 13 ins. in diam. bears S $37\frac{1}{2}^{\circ}$ W. 96 lks. dist.,
marked T25N., R29E., S23 BT.
A pinion 8 ins. in diam. bears N $46\frac{1}{2}^{\circ}$ W. 135 lks. dist.,
marked T25N., R29E., S14 BT.

Land, rolling and hilly.

Soil, sandy and stony 3 rd. and 4 th. rate.

Timber, oak, cedar, pinion and pine.

Undergrowth, sagebrush and scrub oak.

- 40.00 S $89^{\circ}59'$ E. on a random line bet. secs. 13 and 24.
Set temp. $\frac{1}{4}$ sec. cor.
80.28 Intersect the E. bdy. of Tp. 3 lks. N. of the reestablished
cor. of secs. 13, 18, 19, and 24., hereinbefore
described.

Thence

N $89^{\circ}58'$ W. on true line bet. secs. 13 and 24.Descend NW. slope over rolling stony land, thru heavy
timber and undergrowth.

- 18.28 Foot of descent in swale 200 lks. wide, course SW.

Ascend over SE. slope.

- 30.00 Top of spur bears SW.

Descend gradually over NW. slope.

- 40.14 Set an iron post 3 ft. long 1 in. in diam. 28 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

$\frac{1}{4}$ S 13
 $\frac{1}{4}$ S 24
1927

from which

- A pinion 8 ins. in diam. bears N55 $\frac{1}{2}$ °W. 51 lks. dist., marked $\frac{1}{4}$ S13 BT.
- A pinion 8 ins. in diam. bears S 37 $\frac{1}{2}$ °W. 86 lks. dist., marked $\frac{1}{4}$ S24 BT.
- 43.08 Ravine 10 lks. wide, course S30°W. Ascend over SE. slope.
- 51.28 Top of stony spur bears SW.. Descend over NW. slope 70 ft.
- 64.28 East edge of valley, bears N. and S., leave timber bears NE. and SW.
- 66.28 Ravine 10 lks. wide 1 ft. deep, course SW.
- 77.28 West edge of valley bears NE. and SW.; Ascend 30 ft. over E. slope.
- 80.28 Enter heavy timber bears NE. and SW. The cor. of secs. 13, 14, 23, and 24.

Land, rolling and hilly.
Soil, sandy and stony 2nd. and 3rd. rate.
Timber, oak, cedar, pinion and pine.
Undergrowth, sagebrush.

- N 0°1'W. bet. secs. 13 and 14. Ascend SE. slope over rolling stony land, thru. heavy timber and undergrowth.
- 28.00 East edge of sagebrush flat, bears NE. and SW. Leave timber, bears NE. and SW.
- 34.00 West edge of sagebrush flat, bears NE. and SW. Enter scattering timber
- 36.90 Road bears N55°E. and S55°W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S14 | S13
1927

from which

- A pinion 12 ins. in diam. bears S36 $\frac{3}{4}$ °E. 121 lks. dist., marked $\frac{1}{4}$ S13 BT.
- A pinion 10 ins. in diam. bears S 89 $\frac{1}{2}$ °W. 132 lks. dist., marked $\frac{1}{4}$ S14 BT.
- 45.94 Road bears N65°E. and S65°W.
- 46.50 Drain course SW.
- 60.50 Descend gradually over NW. slope.
- 70.88 Ravine 5 lks. wide course S65°W. Ascend gradually over SE. slope to
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 11, 12, 13, and 14., marked on brass cap

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

| | |
|------|------|
| T25N | R29E |
| S11 | S12 |
| S14 | S13 |
| 1927 | |

from which

- A yellow pine 36 ins. in diam. bears $N38\frac{1}{2}^{\circ}E$ 173 lks. dist. marked T25N., R29E., S12 BT.
- A yellow pine 34 ins. in diam. bears $S3\frac{1}{2}^{\circ}E$. 49 lks. dist., marked T25N., R29E., S13 BT.
- A yellow pine 34 ins. in diam. bears $S83\frac{1}{4}^{\circ}W$. 105 lks. dist. marked T25N., R29E., S14 BT.
- A yellow pine 12 ins. in diam. bears $N34^{\circ}W$. 182 lks. dist. marked T25N., R29E., S11 BT.

Land, rolling and hilly.
 Soil, sandy, 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

- 40.00 S $89^{\circ}58'E$. on a random line bet. secs. 12 and 13.
 Set temp. $\frac{1}{4}$ sec. cor.
- 80.12 Intersect the E. bdy. of Tp. at the reestablished cor. of secs. 7, 12, 13, and 18, hereinbefore described.
- Thence
 N $89^{\circ}58'W$. on true line bet. secs. 12 and 13.
 Over rolling land, slopes NW. thru scattering timber and heavy undergrowth.
- 8.12 Drain course NW. Ascend
 20.00 Descend over NW. slope
 25.62 Ravine course SW.
 Road in ravine bears NE. and SW.
 Ascend over SE. slope.
- 40.06 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

| | |
|---------------------|--|
| $\frac{1}{4}$ S. 12 | |
| E 13 | |
| 1927 | |

from which

- A pinion 8 ins. in diam. bears $N29^{\circ}W$. 22 lks. dist., marked $\frac{1}{4}$ S12 BT.
- A pinion 16 ins. in diam. bears $S51\frac{1}{2}^{\circ}E$. 116 lks. dist., marked $\frac{1}{4}$ S13 BT.
- 40.22 Drain course S.
 40.62 Brush goat corral 25 lks. in diam. on line.
 74.25 Ravine 6 lks. wide course $S25^{\circ}W$.
 Ascend over SE. slope to
 80.12 The cor. of secs. 11, 12, 13, and 14.

Land, rolling.
 Soil, sandy and stony 2nd. and 4th. rate.
 Timber, yellow pine, cedar, and pinion.
 Undergrowth, sagebrush.

N $0^{\circ}1'W$. bet. secs. 11 and 12.
 Ascend S. slope over stony land, through scattering timber and undergrowth

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains


7.50 Brush shed bears E. 20 lks. dist.

12.00 A pole corral 150 lks. sq. bears W. about 6.00 chs. dist.

20.60 Road bears N65°E. and S65°W.

27.00 West end of valley 12.00 chs. wide bears SE.
Ascend 30 ft. over SE. slope.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for ¼ sec. cor., marked on brass cap



from which

A yellow pine 10 ins. in diam. bears N 52½°E. 99 lks. dist. marked ¼ S12 BT.

A yellow pine 20 ins. in diam. bears N 26¼°W. 179 lks. dist. marked ¼ S11 BT.

An indian hogan bears N 3½°W. 6.00 chs. dist.

A barn bears N 15½°W. 6.00 chs. dist.


46.20 A stockade corral bears W. 3.00 chs. dist.

60.00 Enter heavy yellow pine timber bears NE. and SW.

65.40 Drain course S60°W.

72.90 Drain, course S40°W.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 1, 2, 11, and 12, marked on brass cap



from which

A yellow pine 30 ins. in diam. bears N64°E. 61 lks. dist. marked T25N., R29E., S1 BT.

A yellow pine 12 ins. in diam. bears S58°E. 120 lks. dist. marked T25N., R29E., S12 BT.

A yellow pine 20 ins. in diam. bears S60¼°W. 33 lks. dist. marked T25N., R29E., S11 BT.

A yellow pine 32 ins. in diam. bears N38°W. 97 lks. dist. marked T25N., R29E., S2 BT.

Land, rolling and hilly.
Soil, sandy and stony 3rd. and 4 th. rate.
Timber, cedar, oak, yellow pine and pinion.
Undergrowth, sagebrush and scrub oak.

S 89°58'E. on a random line bet. secs. 1 and 12

40.00 Set temp. ¼ sec. cor.

80.10 Intersect E. bdy. of Tp. 5 lks. S. of the reestablished cor. of secs. 1, 6, 7, and 12, hereinbefore described.

Thence
West on true line bet. secs. 1 and 12.
Over rolling sandy land, thru. heavy pine timber and scattering undergrowth.

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

1.60 Road bears NE. and SW.
 5.10 Road bears N55°W. and S55°E.
 10.00 Leave heavy timber bears NE. and SW.
 40.05 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in
 the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 1 \\ S 12 \end{array}$$

1927

from which

A pine 12 ins. in diam. bears N 6 $\frac{1}{2}$ °W. 81 lks. dist.,
 marked $\frac{1}{4}$ S1 BT.
 A yellow pine 22 ins. in diam. bears S 68 $\frac{1}{2}$ °E. 114 lks. dist.
 marked $\frac{1}{4}$ S12 BT.
 41.40 Drain, course S20°W.
 44.10 Leave timber bears N10°E. and S10°W.
 Enter sagebrush flat bears NE. and SW.
 52.10 Leave sagebrush flat bears N. and S.
 Enter timber bears NE. and SW.
 58.10 Leave timber bears NE. and SW.
 69.10 Road bears N20°E. and S20°W.
 70.10 Drain course, S40°W.
 Enter scattering timber bears NE. and SW.
 73.10 Brush sheep corral 60 lks. sq. on line.
 80.10 The cor. of secs. 1, 2, 11, and 12.

Land, rolling.

Soil, sandy clay loam. 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

N 0°1'W. bet. secs. 1 and 2.
 Over rolling sandy land, thru. scattering timber and under-
 growth.
 10.00 Drain, course S10°W.
 Leave timber bears NE. and SW., Enter dense sagebrush
 undergrowth.
 34.00 Leave dense undergrowth, Enter scattering timber.
 38.00 Swale, course S45°W.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 2 \\ S 1 \end{array}$$

1927

from which

A yellow pine 22 ins. in diam. bears S31 $\frac{1}{2}$ °E. 130 lks. dist.
 marked $\frac{1}{4}$ S1 BT.
 A yellow pine 18 ins. in diam. bears West 103 lks. dist.,
 marked $\frac{1}{4}$ S2 BT.
 41.35 Road bears N70°W. and S70°E.
 61.50 Drain, course S45°W.
 81.84 Intersect the S. bdy. of T 26 N., R29E. 2.07 chs. N89°42'E.
 of the reconstructed cor. of secs. 35 and 36.
 hereinbefore described. At point of intersection,
 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the
 ground for closing cor. of secs. 1 and 2, marked
 on brass cap

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

T26N R29E
 S36
 S 2 | S 1
 T25N | R29E
 C C
 1927


from which

An oak 6 ins. in diam. bears S 6°E. 153 lks. dist.,
 marked T25N., R29E., S1 CC BT.
 A pinion 8 ins. in diam. bears S 46 $\frac{3}{4}$ °W. 227 lks. dist.,
 marked T25N., R29E., S2 CC BT.

Land, rolling.
 Soil, sandy clay loam 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

11.70
 40.00


From the reestablished Std. cor. of secs. 34 and 35 on S.
 bdy. of Tp., hereinbefore described.
 N 0°1'W. bet. secs. 34 and 35.
 Descend 50 ft. over rocky NE. slope, thru scattering timber
 Bottom of rocky canyon, cross dry bed of creek 100 lks
 wide, course S70°E°
 Ascend 100 ft. over SE. slope.
 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the
 ground to bedrock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

56.00
 66.00
 78.90
 80.00

A pinion 10 ins. in diam. bears N6 $\frac{1}{2}$ °E. 28 lks. dist.,
 marked $\frac{1}{4}$ S35 BT.
 A pinion 14 ins. in diam. bears S25 $\frac{3}{4}$ °W. 260 lks. dist.,
 marked $\frac{1}{4}$ S34 BT.
 Descend gradually over SE. slope.
 Swale 400 lks. wide, course SE.
 Leave timber bears NE. and SW.
 Enter sagebrush flat.
 Dim road bears NE. and SW.
 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
 the ground for cor. of secs. 26, 27, 34, and 35,
 marked on brass cap



from which

A pinion 4 ins. in diam. bears N34°E. 111 lks. dist.,
 marked BT. only
 A pinion 18 ins. in diam. bears S50°E. 370 lks. dist.,

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

marked T25N.,R29E.,S35 BT.
 A pinion 12 ins. in diam. bears S78 $\frac{1}{2}$ °W. 323 lks. dist.,
 marked T25N.,R29E.,S34 BT.
 A pinion 14 ins. in diam. bears N59 $\frac{1}{4}$ °W. 314 lks. dist.,
 marked T25N.,R29E.,S27 BT.

Land, rolling and broken.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, cedar, oak, and pinion.
 Undergrowth, sagebrush.

40.00 East on a random line bet. secs. 26 and 35.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line 3 lks. N. of the cor. of secs.
 25, 26, 35, and 36.
 Thence
 N 89°59'W. on true line bet. secs. 26 and 35.
 Descend 80 ft. over NW. slope over stony land, thru heavy
 pine timber and scattering undergrowth.
 11.00 Foot of descent in narrow valley, bears NE. and SW.
 Leave timber bears NE. and SW.
 Over level land.
 20.06 Creek bed 30 lks. wide; water in pools, course SW.
 Leave level land, bears NE. and SW.
 Ascend 50 ft. over SE. slope over sandstone ledges.
 35.06 Top of ascent; leave broken stony land, bears NE. and SW.
 Enter rolling sandy land and scattering timber bears
 NE. and SW.
 40.03 Set an iron post 3 ft. long; 1 in. in diam. 6 ins. in the
 ground to bedrock, supported in a mound of stone
 for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{\frac{1}{4} S 26}{S 35}$$

1927

from which


A pinion 14 ins. in diam. bears N77 $\frac{1}{2}$ °E. 124 lks. dist.,
 marked $\frac{1}{4}$ S26 BT.
 A pinion 12 ins. in diam. bears S52 $\frac{1}{2}$ °E. 53 lks. dist.,
 marked $\frac{1}{4}$ S35 BT.
 48.56 Drain 6 lks. wide, course SE.
 74.95 Leave timber bears NE. and SW.
 Enter sagebrush flat, bears NE. and SW.
 76.56 Drain, course SE.
 79.36 Dim road, bears NE. and SW.
 80.06 The cor. of secs. 26, 27, 34, and 35.

Land, rolling and broken.
 Soil, sandy and stony 2nd, 3rd, and 4th. rate.
 Timber, oak, juniper, pinion and yellow pine.
 Undergrowth, sagebrush.

19.70 N 0°1'W. bet. secs. 26 and 27.
 Over rolling sandy land, thru dense sagebrush undergrowth
 Trail bears NE. and SW.
 22.00 Leave dense sagebrush undergrowth, bears E. and W.
 Enter scattering timber bears NE. and W.
 25.00 Leave timber bears E. and W.
 Descend gradually over N. slope, thru heavy undergrowth.

Survey of the Subdivision lines of Township 25 North., Range 29 East

| | |
|--------|---|
| Chains | |
| 40.00 | Set an iron post 3 ft. long, 1 in. in diam. with marked stone at the base, 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap |
| | $\begin{array}{c} \frac{1}{4} \\ \\ S27 S26 \\ \\ 1927 \end{array}$ |
| 45.00 | Swale, course W. |
| | Ascend 30 ft. over S. slope. |
| 52.00 | Enter timber bears E. and W. at top of slope. |
| | Descend gradually over NW. slope. |
| 69.00 | Drain, course SW. |
| | Ascend gradually over SE. slope. |
| 80.00 | Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 22, 23, 26, and 27, marked on brass cap |
| | $\begin{array}{c} T25N R29E \\ S22 S23 \\ \hline S27 S26 \\ \\ 1927 \end{array}$ |
| | from which: |
| | A yellow pine 18 ins. in diam. bears N33 $\frac{1}{2}$ °E. 116 lks. dist., marked T25N., R29E., S23 BT. |
| | A yellow pine 12 ins. in diam. bears S5 $\frac{3}{4}$ °E. 70 lks. dist., marked T25N., R29E., S26 BT. |
| | A yellow pine 34 ins. in diam. bears S52 $\frac{3}{4}$ °W. 39 lks. dist., marked T25N., R29E., S27 BT. |
| | A yellow pine 36 ins. in diam. bears N21°W. 197 lks. dist., marked T25N., R29 E. S22 BT. |
| | Land, rolling. Soil, sandy and stony 2nd, 3rd., and 4th. rate. Timber, oak, cedar, pinion, and yellow pine. Undergrowth, sagebrush. |
| 40.00 | S 89°59'E. on a random line bet. secs. 23 and 26. |
| 80.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| | Intersect N. and S. line 10 lks. S. of the cor. of secs. 23, 24, 25, and 26. |
| | Thence |
| | S 89°57'W. on true line bet. secs. 23 and 26. |
| | Over rolling sandy land, slopes NW. thru. scattering timber and undergrowth. |
| 4.00 | Drain, course SW. |
| 10.00 | Leave timber bears NE. and SW. |
| | Enter level valley, bears NE. and SW. |
| 18.20 | Wash 8 lks. wide 2 ft. deep course SW. |
| 27.80 | Drain course SW. |
| | Ascend gradually over NE. slope. |
| 35.00 | Rocky spur, bears NE; Enter timber bears NW. and SE. |
| 40.00 | Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap |



Survey of the Subdivision lines of Township 25 North., Range. 29 East


Chains

from which

- A yellow pine 28 ins. in diam. bears N60°W.42 lks. dist., marked $\frac{1}{4}$ S23 BT.
- A pinion 12 ins. in diam. bears S58 $\frac{1}{2}$ °W.196 lks. dist., marked $\frac{1}{4}$ S26 BT.
- Descend over NW.slope.
- 53.70 Old road bears NW. and SE.
- 57.00 Enter level valley,bears N70°E. and S70°W.
- 61.00 Leave valley,bears N70°E. and S70°W.
- Ascend gradually over SE. slope.
- 69.50 Top of low spur,bears SW.
- Descend
- 70.00 Swale 400 lks. wide,course SW.
- Ascend gradually over SE.slope
- 77.50 Top of ascent on spur slopes SW.
- Descend 20 ft.to
- 80.00 The cor. of secs.22,23,26,and 27.


Land,rolling and hilly.
Soil,sandy and stony,2nd.3rd.and 4th. rate.
Timber,oak,cedar,pinion and yellow pine.
Undergrowth,sagebrush.

- N 0°1'W. bet. secs.22 and 23.
- Ascend 34 ft. over Stony SW.slope,through scattering timber and undergrowth.
- 3.60 An indian sweat house bears E.10 lks. dist.
- 5.00 Top of spur.slopes.W.thence along W.slope.
- 10.60 Drain course W.
- 34.95 Road,bears N45°E. and S45°W.
- 38.40 Drain course S60°W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam.28 ins. in the ground for $\frac{1}{4}$ sec. cor.,marked on brass cap



from which

- A yellow pine 32 ins. in diam. bears N53°E.134 lks. dist., marked $\frac{1}{4}$ S23 BT.
- A yellow pine 29 ins. in diam. bears N40°W.120 lks. dist. marked $\frac{1}{4}$ S22 BT.
- 77.90 Head of draw,course S60°W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam.over cross (x) on bedrock,supported in a mound of stone for cor. of secs.14,15,22,and 23,marked on brass cap



from which

- A yellow pine 34 ins. in diam. bears N75 $\frac{1}{2}$ °E.179 lks. dist. marked T25N.,R29E.,S14 BT.
- A yellow pine 32 ins. in diam. bears S48 $\frac{1}{2}$ °E.266 lks.dist.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

marked T25N., R29E., S23 BT.
 A yellow pine 20 ins. in diam. bears S43 $\frac{1}{2}$ °W. 216 lks. dist.,
 marked T25N., R29E., S22 BT.
 A yellow pine 18 ins. in diam. bears N22 $\frac{3}{4}$ °W. 117 lks. dist.,
 marked T25N., R29E., S15 BT.

Land, broken and rolling.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

40.00

N 89°57'E. on a random line bet. secs. 14 and 23.

80.00

Set temp. $\frac{1}{4}$ sec. cor.Intersect N. and S. line 5 lks. N. of the cor. of secs. 13,
14, 23, and 24.

Thence

S 89°59'W. on true line bet. secs. 14 and 23.

Over rolling stony land, through heavy timber and under-
growth.

9.97

Road bears N5°W. and S5°E.

24.50

Drain, course S35°W.

33.60

Drain, course S23°W.

40.00

Set an iron post 3 ft. long, 1 in. in diam. 16 ins. in the
ground to bedrock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor., marked on brass cap
$$\frac{1}{4} \frac{S 14}{S 23}$$

1927

from which

A pinion 8 ins. in diam. bears N15 $\frac{1}{4}$ °E. 28 lks. dist.,
marked $\frac{1}{4}$ S14 BT.A pinion 8 ins. in diam. bears S33°E. 28 lks. dist.,
marked $\frac{1}{4}$ S23 BT.

51.50

Drain, course S20°W.

56.00

Leave timber bears N. and S.

60.00

North edge of sagebrush flat, bears NE. and SW.

Enter timber bears NE. and SW.

65.70

Old Indian hogan, bears N. 100 lks. dist.

72.00

Descend 50 ft. over NW. slope to

80.00

The cor. of secs. 14, 15, 22, and 23.

Land, rolling.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

N 0°1'W. bet. secs. 14 and 15.

Descend NW. slope over rolling stony land, thru. heavy
timber and undergrowth.

5.00

Bottom of canyon 30 ft. below cor., cross creek 20 lks.
wide 3 ins. deep, course S55°W.

Ascend 70 ft. over stony SE. slope.

17.00

Old brush fence bears N65°E. and S65°W.

25.00

S. edge of barren sandstone reef, bears NE. 5.00 chs and
SW. 4.00 chs. dist.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

| | |
|--------|--|
| Chains | |
| 35.00 | Leave sandstone reef, bears E. 5.00 chs. and W. 3.00 chs. dist Enter sandy land. |
| 40.00 | Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap |
| | $\begin{array}{c} \frac{1}{4} \\ \\ S15 S14 \\ \\ 1927 \end{array}$ |
| | from which |
| | A pinion 8 ins. in diam. bears $N61\frac{3}{4}^{\circ}E.73$ lks. dist., marked $\frac{1}{4}$ S14 BT. |
| | A pinion 12 ins. in diam. bears $N71^{\circ}W:155$ lks. dist., marked $\frac{1}{4}$ S15 BT. |
| 46.00 | Drain, course $S70^{\circ}E.$ |
| | Ascend |
| 75.00 | Leave timber, bears NE. and SW., enter sagebrush flat. |
| 80.00 | Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 10, 11, 14, and 15, marked on brass cap |
| | $\begin{array}{c} T25N R29E \\ \hline S10 S11 \\ \hline S15 S14 \\ \\ 1927 \end{array}$ |
| | from which |
| | A pinion 8 ins. in diam. bears $N77^{\circ}E.63$ lks. dist., marked T25N., R29E., S11 BT. |
| | A pinion 10 ins. in diam. bears $S63\frac{1}{2}^{\circ}E.65$ lks. dist., marked T25N., R29E., S14 BT. |
| | A pinion 2 ins. in diam. bears $S43\frac{1}{2}^{\circ}W.35$ lks. dist., marked BT. only. |
| | A pinion 10 ins. in diam. bears $N73^{\circ}W.9$ lks. dist. marked T25N., R29E., S10 BT. |
| | Land, rolling and broken. Soil, sandy and stony 3rd. and 4th. rate. Timber, oak, cedar, pinion and yellow pine. Undergrowth, sagebrush. |
| 40.00 | N $89^{\circ}59'E.$ on a random line bet. secs. 11 and 14. Set temp. $\frac{1}{4}$ sec. cor. |
| 80.00 | Intersect N. and S. line 2 lks. S. of the cor. of secs. 11, 12, 13, and 14. |
| | Thence |
| | S $89^{\circ}58'W.$ on true line bet. secs. 11 and 14. |
| | Ascend 30 ft. over SE. slope over stony land, thru heavy timber and undergrowth. |
| 10.00 | Point of spur bears SW. |
| | Descend gradually over SW. slope. |
| 15.00 | Foot of descent, enter rolling land, bears NE. and SW. |
| 18.00 | A pole corral about 150 lks. sq. bears N. 7.00 chs. dist. |
| | Leave timber bears NE. and SW., enter sagebrush flat. |
| 27.00 | Leave flat, enter scattering timber bears NE. and SW. |
| | A log corral in process of construction bears S. 2.00 chs. dist. |
| 35.00 | Descend 30 ft. over NW. slope |

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

40.00 Set an iron post 3 ft. long, 1 in. in diam. over cross (x) on exposed ledge, supported in a mound of stone. for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 11 \\ \hline S 14 \end{array}$$
 1927

from which

A yellow pine 8 ins. in diam. bears N56°E. 45 lks. dist., marked $\frac{1}{4}$ S11 BT.

A yellow pine 16 ins. in diam. bears S9 $\frac{1}{4}$ °E. 28 lks. dist., marked $\frac{1}{4}$ S14 BT.

48.00 Bottom of canyon, cross brook 10 lks. wide 2 ins. deep, course S25°W.

Ascend 50 ft. over E. slope.

54.80 Top of spur bears S.

Descend

61.60 Ravine, course S18 $\frac{1}{2}$ °E.

Ascend

75.00 Top of ascent, leave timber bears NE. and SW.

Enter sagebrush flat bears N. and SW.

80.00 The cor. of secs. 10, 11, 14, and 15.

Land, rolling and broken.
 Soil, sandy and rocky, 3rd. and 4th. rate.
 Timber, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

N. 0° 1' W. bet. secs. 10 and 11.

12.00 Over rolling sandy land, thru dense sagebrush undergrowth Dim road, bears E. and W.

33.00 Leave sagebrush flat, bears NE. and SW.

Enter heavy timber


35.40 Wire fence, bears N40°E. and S40°W.

Leave timber bears NE. and SW.

39.80 Leave undergrowth, bears NE. and SW.

Enter cultivated land, bears NE. 4.00 chs. and SW. about 2.00 chs. dist.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

A yellow pine 16 ins. in diam. bears S73 $\frac{1}{2}$ °E. 176 lks. dist. marked $\frac{1}{4}$ S11 BT.

A yellow pine 14 ins. in diam. bears S25°W. 93 lks. dist. marked $\frac{1}{4}$ S10 BT.

41.94 Wash 10 lks. wide course S45°W.

46.00 Leave cultivated land, bears NE about 15.00 chs. and SW. 5.00 chs. dist.

47.20 Road bears N45°E. and S45°W.

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

65.94 Wire fence, bears N25°E. and S25°W.
 73.00 Wash 8 lks. wide, course S30°E.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
 the ground for cor. of secs. 2, 3, 10, and 11., marked
 on brass cap

T25N | R29E
 S 3 | S12
 S10 | S11

1927

from which

A yellow pine 18 ins. in diam. bears N2½°E. 224 lks. dist.,
 marked T25N., R29E., S2 BT.
 A yellow pine 32 ins. in diam. bears S67°E. 94 lks. dist.,
 marked T25N., R29E., S11 BT.
 A yellow pine 20 ins. in diam. bears S12½°W. 63 lks. dist.
 marked T25N., R29E., S10 BT.
 A yellow pine 34 ins. in diam. bears N47½°W. 192 lks. dist.
 marked T25N., R29E., S3 BT.

Land, rolling.
 Soil, sandy, 1st. 2nd, and 3rd. rate.
 Timber, pinion and yellow pine,
 Undergrowth, sagebrush.

40.00 N 89°58'E. On a random line bet. secs. 2 and 11
 Set temp. ¼ sec. cor.
 80.26 Intersect N. and S. line at the cor. of secs. 1, 2, 11, and
 12.

Thence

S 89°58'W. on true line bet. secs. 2 and 11.
 Over rolling sandy land, thru scattering timber and
 undergrowth.

2.00 Drain, course S15°W.
 7.00 Leave timber bears NE. and SW., enter sagebrush flat
 28.26 Leave flat, bears NE. and SW., Enter timber
 35.26 The SE. cor. of cultivated field of about 10 acres in area
 bears N. about 10 .00 chs. dist.
 40.13 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in
 the ground for ¼ sec. cor. marked on brass cap

¼ S 2
 S 11

1927

from which

A pinion 6 ins. in diam. bears N33°E. 166 lks. dist.,
 marked ¼ S2 BT.
 A pinion 10 ins. in diam. bears S 63½°E. 82 lks. dist.,
 marked ¼ S11 BT.
 49.26 Ravine 8 lks. wide course S40°W.
 55.25 Leave timber bears NE. and SW.
 Enter sagebrush flat, bears NE. and SW.
 76.25 West edge of flat bears NE. and SW.
 Descend gradually over NW. slope
 80.26 The cor. of secs. 2, 3, 10, and 11.


Land, rolling.
 Soil, sandy and stony 2nd. and 3rd. rate.

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains


Timber, pinion and yellow pine.
Undergrowth, sagebrush.

- N 0°1'W. bet. secs. 2 and 3.
Over rolling sandy land, through scattering pine timber and undergrowth.
- 2.30 Ravine 8 lks. wide course S20°W.
- 10.00 Same ravine 8 lks. wide, course S20°E., thence along W. slope
- 33.40 Same ravine 10 lks. wide, course S10°W.; Ascend gradually.
- 36.00 Wire fence bears E. 3.00 chs. and W. 50 lks. dist.
The SW. cor. of alfalfa field 2.00 chs. wide bears E. about 3.00 chs. dist.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



from which

- A yellow pine 36 ins. in diam. bears S58 $\frac{1}{2}$ °E. 268 lks. dist., marked $\frac{1}{4}$ S2 BT.
- A yellow pine 40 ins. in diam. bears N50°W. 154 lks. dist., marked $\frac{1}{4}$ S3 BT.
- 43.15 Cor. of wire fence bears E. 4.00 chs. dist. and S15°W.
End of alfalfa field bears E. 2.00 chs. dist.
- 43.30 Road bears N45°E. and S45°W.
- 43.40 Log cabin bears E. about 15.00 chs. dist.
- 62.10 Road bears N45°E. and S30°W.
- 62.20 A point about 7.00 chs. W. of SW. cor. of fenced field 7.00 chs. wide and 18.00 chs. long.
- 81.60 Intersect the S. bdy. of T26N., R29E. 194 lks. N89°40'E. of the reconstructed cor. of secs. 34 and 35, hereinbefore described. At point of intersection,
Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for closing cor. of secs. 2 and 3, marked on brass cap



from which


- An oak 12 ins. in diam. bears S22°E. 288 lks. dist., marked T25N., R29E., S2 CC BT.
- A yellow pine 24 ins. in diam. bears S43 $\frac{1}{2}$ °W. 198 lks. dist. marked T25N., R29E., S3 CC BT.

Land, rolling.
Soil, sandy 1st. and 2nd. rate.
Timber, oak, cedar, pinion and yellow pine.
Undergrowth, sagebrush.

Survey of the Subdivision lines of Township 25 North., Range 29 East


Chains

- From the reestablished Std. cor. of secs. 33 and 34 on S. bdy. of Tp. hereinbefore described, N 0° 2' W. bet. secs. 33 and 34. Over rolling sandy land, thru. scattering timber and heavy sagebrush undergrowth.
- 13.00 North edge of mesa.; Descend 30 ft. over NE. slope.
- 15.60 Pole fence bears NE. and SW.
- 17.30 Leave timber and undergrowth at foot of descent in valley bears E. and W. Enter cultivated land, bears E. about 6.00 chs. and W. 12.00 chs. dist.
- 24.80 Leave cultivated land, bears E. about 5.00 chs. and W. 20.00 chs. dist. Enter scattering sagebrush undergrowth.
- 25.27 Pole fence bears N80°W. and S80°E.
- 26.30 The SW. cor. of log cabin on line. From this point, another log. cabin bears W. 3.00 chs. dist.
- 36.00 Road bears E. and W.
- 38.00 Ravine 30 lks. wide 25 ft. deep, course E.; Ascend 50 ft. over S. slope; Leave valley bears E. and W. Enter scattering timber bears E. and W.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor. marked on brass cap



from which

- A yellow pine 24 ins. in diam. bears N33°E. 370 lks. dist., marked 1/4 S34. BT.
- A pinion 8 ins. in diam. bears N12°W. 415 lks. dist., marked 1/4 S33. BT.
- Ascend 25 ft. over S. slope
- 45.00 Top of spur, bears SE. Descend 20 ft. into canyon.
- 54.60 Bottom of canyon in dry creek bed 110 lks. wide, course S30°E.
- 67.00 Leave canyon. Ascend 25 ft. over SW. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. over cross (x) in exposed bedrock, supported in a mound of stone for cor. of secs. 27, 28, 33, and 34, marked on brass cap



from which


- A yellow pine 20 ins. in diam. bears N63 1/2°E. 119 lks. dist., marked T25N., R29E., S27. BT.
- A pinion 10 ins. in diam. bears S69°E. 222 lks. dist., marked T25N., R29E., S34. BT.
- A pinion 8 ins. in diam. bears S28°W. 176 lks. dist., marked T25N., R29E., S33. BT.
- A yellow pine 20 ins. in diam. bears N38 1/2°W. 110 lks. dist., marked T25N., R29E., S28. BT.

Land, rolling and broken.
 Soil, sandy and stony 2nd. 3rd. and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains Undergrowth, sagebrush.

40.00. East on a random line bet. secs. 27 and 34.
 80.02. Set temp. $\frac{1}{4}$ sec. cor.
 Intersect N. and S. line 8 lks. S. of the cor. of secs. 26, 27, 34, and 35.
 Thence
 S $89^{\circ}57'W.$ on true line bet. secs. 27 and 34.
 Descend 25 ft. over NW. slope, over broken stony land, thru scattering timber and undergrowth.
 14.62 Dim road bears NE. and SW.
 22.12 Ravine, course SW.
 Ascend 25 ft. over SE. slope.
 25.00 Point of spur bears SW.; Descend 30 ft.
 30.00 Bottom of canyon in wash 50 lks. wide, course $S30^{\circ}W.$
 Ascend 30 ft.
 32.50 Top of ascent on W. side of canyon,
 Leave broken land, bears NE. and SW., enter rolling land.
 40.01 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap




from which

A pinion 12 ins. in diam. bears $N30^{\circ}W.$ 58 lks. dist., marked $\frac{1}{4}$ S27 BT.
 A pinion 10 ins. in diam. bears $S23\frac{1}{4}^{\circ}W.$ 23 lks. dist., marked $\frac{1}{4}$ S34 BT.
 46.00 Swale 200 lks. wide course SW.
 60.22 Draw course SW.
 80.02 The cor. of secs. 27, 28, 33, and 34.

Land, rolling and broken.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

N $0^{\circ}2'W.$ bet. secs. 27 and 28.
 Over rolling stony land, slopes SW. thru scattering timber and undergrowth.
 10.00 Bottom of box canyon 30 ft. deep in bend from NW. to SW.
 11.00 Mouth of ravine from NE.
 Ascend 50 ft. over SW. slope over sandstone ledges.
 20.00 Top of spur bears SE., thence over rolling land.
 29.00 Ravine, course SE.
 Leave timber bears NE. and SW., Enter sagebrush flat.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

A pinion 8 ins. in diam. bears $N70^{\circ}E.$ 84 lks. dist., marked $\frac{1}{4}$ S27 BT

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains
 47.00 A pinion 8 ins. in diam. bears S54 $\frac{1}{4}$ °W. 179 lks. dist., marked $\frac{1}{4}$ S28 BT.
 Leave sagebrush flat, bears NE. and SW.
 Enter heavy timber bears NE. and SW.
 56.00 Leave timber, bears NE. and SW., enter sagebrush flat, bears NE. and SW.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 21, 22, 27, and 28., marked on brass cap

T25N | R29E
 S21 | S22

 S28 | S27

1927

from which

A pinion 12 ins. in diam. bears N89 $\frac{3}{4}$ °E. 200 lks. dist., marked T25N., R29E., S22 BT.
 A pinion 12 ins. in diam. bears S43 $\frac{3}{4}$ °E. 285 lks. dist.; marked T25N., R29E., S27 BT.
 A pinion 12 ins. in diam. bears S64 $\frac{1}{2}$ °W. 183 lks. dist., marked T25N., R29E., S28 BT.
 A pinion 8 ins. in diam. bears N63°W. 260 lks. dist., marked T25N., R29E., S21 BT.

Land, rolling and broken.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

40.00 N 89°57'E. on a random line bet. secs. 22 and 27.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.06 Intersect N. and S. line 3 lks. N. of the cor. of secs. 22, 23, 26, and 27.
 Thence
 S 89°58'W. on true line bet. secs. 22 and 27.
 Descend 30 ft. over W. slope over stony land, thru scattering timber and undergrowth.
 1.66 Creek 100 lks. wide in bottom of canyon.; Stream clear water 10 lks. wide 4 ins. deep, course S.
 Ascend 30 ft. over E. slope over sandstone ledges.
 10.00 Top of ascent on W. side of canyon.
 Leave broken stony land, bears N. and S., enter rolling sandy land
 17.50 Leave timber bears N. and S.
 20.20 Swale 100 lks. wide, course SE.
 Enter timber bears NE. and SW.
 40.03 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 22
 S 27

1927

from which

A pinion 8 ins. in diam. bears N61 $\frac{1}{2}$ °W. 109 lks. dist., marked $\frac{1}{4}$ S22 BT.
 A pinion 8 ins. in diam. bears S82 $\frac{3}{4}$ °W. 115 lks. dist., marked $\frac{1}{4}$ S27 BT

Survey of the Subdivision lines of Township 25 North., Range 29 East.

| | | | | | | | |
|----------------|---|------|------|-----|-----|-----------|--|
| Chains | <p>53.36 Drain, course SE.; Leave timber bears N. and S. Enter sagebrush flat.</p> <p>80.06 The cor. of secs. 21, 22, 27, and 28.</p> <p style="text-align: center;">Land, broken and rolling. Soil, sandy and stony 2nd., 3rd., and 4th. rate. Timber, oak, cedar, pinion and yellow pine. Undergrowth, sagebrush.</p> <hr/> <p>N 0° 2' W. bet. secs. 21 and 22. Over rolling sandy land, thru heavy sagebrush undergrowth Road from St. Michaels to Houck Arizona, bears NE. and SW. in bottom of swale, course SW.</p> <p>13.20 Swale, course SW.</p> <p>24.50 Dim road to Indian hogans bears E. and W.</p> <p>30.30 Enter heavy pinion timber bears NE. and SW.</p> <p>33.00 Set an iron post 3 ft. long, 1 in. in diam. 29 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap</p> <div style="text-align: center;"> $\frac{1}{4}$ ↓ S21 S22 ↓ 1927 </div> <p>from which</p> <p>A pinion 10 ins. in diam. bears N28° E. 127 lks. dist., marked $\frac{1}{4}$ S22 BT.</p> <p>A pinion 8 ins. in diam. bears S36° W. 81 lks. dist., marked $\frac{1}{4}$ S21 BT.</p> <p>58.00 Leave timber, bears N20° W. and S20° E. Enter sagebrush flat. bears NW. and SE.</p> <p>60.40 Head of swale, course SE.</p> <p>80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 15, 16, 21, and 22, marked on brass cap</p> <div style="text-align: center;"> <table border="1"> <tr><td>T25N</td><td>R29E</td></tr> <tr><td>S16</td><td>S15</td></tr> <tr><td colspan="2">S21 S22</td></tr> </table> <p>1927</p> </div> <p>from which</p> <p>A pinion 6 ins. in diam. bears S52$\frac{3}{4}$° E. 502 lks. dist., marked T25N., R29E., S22 BT.</p> <p>A pinion 4 ins. in diam. bears S8$\frac{3}{4}$° W. 347 lks. dist., marked T25N., R29E., S21 BT.</p> <p>No other bearing trees within limits.; Deposit a marked stone alongside base of post.</p> <p style="text-align: center;">Land, rolling. Soil, sandy and stony 2nd. and 3rd. rate. Timber, cedar, pinion, oak, and yellow pine. Undergrowth, sagebrush.</p> | T25N | R29E | S16 | S15 | S21 S22 | |
| T25N | R29E | | | | | | |
| S16 | S15 | | | | | | |
| S21 S22 | | | | | | | |
| 40.00 80.04 | <p>N 89° 58' E. on a random line bet. secs. 15 and 22. Set temp. $\frac{1}{4}$ sec. cor.</p> <p>Intersect N. and S. line at the cor. of secs. 14, 15, 22, and 23</p> | | | | | | |

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

Thence
 S 89°58'W. on true line bet. secs. 15 and 22.
 Descend 35 ft. over broken stony NW. slope, thru scattering timber and undergrowth.
 4.64 Wash 30 lks. wide 2 ft. deep in bottom of canyon, course S10°W.
 Ascend 70 ft. over SE. slope
 15.00 Top of flat topped spur, bears SE.
 Descend 60 ft. over SW. slope over sandstone ledges.
 22.04 Wash 30 lks. wide 3 ft. deep in bottom of canyon, cross stream of clear water 10 lks. wide 6 ins. deep, course S25°E.
 Ascend 70 ft. over E. slope.
 25.00 Pole fence bears N35°W. and S35°E.
 29.74 Road to Indian hogans, bears N45°W. and S45°E.
 40.02 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 15 \\ S 22 \end{array}$$

1927

from which

A pinion 8 ins. in diam. bears N56°E. 8 lks. dist., marked $\frac{1}{4}$ S15 BT.
 A pinion 7 ins. in diam. bears S 3°W. 20 lks. dist., marked $\frac{1}{4}$ S22 BT.
 A deserted Indian cabin bears N18°W. 7.00 chs. dist.
 A log barn, bears N1°45'W. 9.00 chs. dist.
 41.00 Leave timber bears NW. and SE.
 Enter sagebrush undergrowth.
 49.00 A brush house bears S. 4.00 chs. dist.
 50.00 Top of slope, leave broken stony land, bears NW. and SE.
 Enter nearly level sagebrush flat.
 51.94 An Indian hogan, bears N. 3.00 chs. dist.
 71.79 Road from St. Michaels to Houck Arizona, bears N20°W. and S20°E.
 80.04 The cor. of secs. 15, 16, 21, and 22.

Land, rolling and broken.
 Soil, sandy and stony clay loam 2nd., 3rd., and 4th. rate.
 Timber, pinion and yellow pine.
 Undergrowth, sagebrush.

N 0°2'W. bet. secs. 15 and 16.
 Over rolling sandy land, thru heavy sagebrush undergrowth.
 18.90 Road from St. Michaels to Houck Arizona, bears N40°W. and S40°E.
 23.00 Leave heavy sagebrush undergrowth, bears NW. and SE.
 Enter timber bears N55°W. and S55°E.
 29.80 Ravine 6 lks. wide 15 ft. deep, course S70°E.
 Ascend over SE. slope.
 32.00 Old brush corral 50 lks. in diam. bears E. 100 lks. dist.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 20 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 16 \\ S 15 \end{array}$$

1927

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

from which

- A pinion 12 ins. in diam. bears S76°E.122 lks. dist., marked $\frac{1}{4}$ S15 BT.
- A pinion 8 ins. in diam. bears S42 $\frac{1}{2}$ °W.141 lks. dist., marked $\frac{1}{4}$ S16 BT.
- 55.00 Ravine 150 lks. wide in bottom of canyon, course S23 $\frac{1}{2}$ °E. Ascend 25 ft. over SW. slope
- 59.00 Top of spur, bears SW. Descend 25 ft.
- 61.00 Same ravine, course SW. in bend in canyon from NW. to SW.
- 65.00 Ascend 25 ft. over SW. slope.
- 76.00 Top of spur, bears SW. Descend 25 ft. over NW. slope
- 79.50 Bottom of canyon, cross same ravine 20 lks. wide, course S45°W.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 9, 10, 15, and 16., marked on brass cap

| | |
|------|------|
| T25N | R29E |
| S 9 | S10 |
| | |
| S16 | S15 |

 1927

from which

- A yellow pine 18 ins. in diam. bears N54 $\frac{3}{4}$ °E.210 lks. dist. marked T25N.,R29E.,S10 BT.
- A yellow pine 18 ins. in diam. bears S44°E.100 lks. dist., marked T25N.,R29E.,S15 BT.
- A yellow pine 20 ins. in diam. bears S69 $\frac{3}{4}$ °W.108 lks. dist. marked T25N.,R29E.,S16 BT.
- A yellow pine 36 ins. in diam. bears N26°W.201 lks. dist., marked T25N.,R29E.,S9 BT.

Land, rolling and broken.
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

- 40.00 N 89°58'E. on a random line bet. secs. 10 and 15. Set temp. $\frac{1}{4}$ sec. cor.
- 80.10 Intersect N. and S. line 10 lks. N. of the cor. of secs. 10, 11, 14, and 15
- Thence N 89°58'W. on true line bet. secs. 10 and 15. Over rolling sandy land, slopes NW. thru scattering timber and heavy sagebrush undergrowth.
- 34.90 West side of sagebrush flat, bears NE. and SW.
- 40.05 Leave dense undergrowth, enter scattering undergrowth. Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap

| |
|--------------------|
| $\frac{1}{4}$ S 10 |
| S 15 |

 1927

from which

- A yellow pine 32 ins. in diam. bears N45 $\frac{1}{4}$ °E.34 lks. dist., marked $\frac{1}{4}$ S10 BT.


Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

A yellow pine 22 ins. in diam. bears $S5\frac{1}{2}^{\circ}E.$ 48 lks. dist., marked $\frac{1}{4}$ S15 BT.
 40.50 Box canyon 150 lks. wide 35 ft. deep course $S5^{\circ}W.$
 48.00 Top of W.rim of canyon, bears N. and S., thence over rolling sandy land.
 59.10 Leave timber bears NE. and SW.
 Enter sagebrush flat bears NE. and SW.
 74.00 West edge of sagebrush flat, bears N. and SW.
 Enter scattering timber bears NE. and SW.
 Descend 35 ft. over W.slope into canyon.
 79.50 Wash 10 lks. wide in bottom of canyon, course S.
 80.10 The cor. of secs. 9, 10, 15, and 16.

Land, rolling and broken.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.


N $0^{\circ}2'W.$ bet. secs. 9 and 10.
 Over level land in bottom of canyon, thru scattering timber
 4.90 Wash 10 lks. wide 3 ft. deep, course SE.
 Ascend 25 ft. over broken stony SW.slope.
 10.00 Top of spur bears SW.
 Descend 20 ft. over NW. slope.
 12.80 Same wash 12 lks. wide in canyon, course SW.
 Ascend 20 ft. over SE. slope.
 14.00 Top of spur, bears E. thence over NE.slope.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



1927

from which

A yellow pine 18 ins. in diam. bears $N27\frac{1}{2}^{\circ}E.$ 22 lks. dist. marked $\frac{1}{4}$ S10 BT.
 A yellow pine 16 ins. in diam. bears $S22\frac{1}{2}^{\circ}W.$ 129 lks. dist. marked $\frac{1}{4}$ S9 BT.
 43.25 Road from St. Michaels to Houck Arizona, bears $N35^{\circ}E.$ and $S35^{\circ}W.$
 44.00 Road from St. Michaels Ariz. to Wide Ruins, bears E. and W.
 46.50 Draw, course E.
 55.00 Road bears $N55^{\circ}W.$ and $S55^{\circ}E.$
 73.80 Ravine 6 lks. wide, course E.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 3, 4, 9, and 10, marked on brass cap



1927

from which

An oak 8 ins. in diam. bears $N18\frac{1}{2}^{\circ}E.$ 215 lks. dist., marked T25N., R29E., S3 BT.
 An oak 8 ins. in diam. bears $S45\frac{1}{2}^{\circ}E.$ 127 lks. dist., marked T25N., R29E., S10 BT.

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains


A yellow pine 22 ins. in diam. bears S 65°W.197 lks. dist. marked T25N.,R29E.,S9 BT.
A yellow pine 34 ins. in diam. bears N47½°W.164 lks. dist. marked T25N.,R29E.,S4 BT.

Land,rolling and broken.
Soil,sandy and stony 3rd. and 4th. rate.
Timber,cedar,oak,pinion, and yellow pine.
Undergrowth,sagebrush.

40.00
80.00

6.50
20.00
30.00
40.00

S 89°58'E. on a random line bet. secs. 3 and 10.
Set temp.¼ sec. cor.
Intersect N. and S. line 10 lks. S.of the cor. of secs. 2,3,10,and 11.
Thence
S 89°58'W.on true line bet. secs.3 and 10.
Over rolling sandy land,slopes SE.thru.scattering undergrowth
Road bears N20°E. and S20°E.
Enter scattering timber bears NE. and SW.at top of SE, slope.,thence over S.slope.
Descend gradually over W.slope.
Set an iron post 3 ft. long, 1 in. in diam.28 ins.in the ground for ¼ sec. cor.,marked on brass cap



from which

42.00
44.00
50.30
51.00
53.00

71.20
73.70
76.00

80.00

A yellow pine 22 ins. in diam. bears N2½°E.35 lks. dist. marked ¼ S3 BT.
A yellow pine 26 ins. in diam. bears S16¼°W.82 lks. dist. marked ¼ S10 BT.
Ravine 7 lks. wide,course S57°W.
Road from St.Michaels Ariz.to Wide Ruins Ariz.,bears N15°E. and S15°W.
Road to Indian hogan bears N20°W. and S20°E.
Draw 50 lks. wide,course S,Asc.
Top of low spur.bears S.
Descend 30 ft. over W. slope.
Ravine 5 lks. wide,course S15°W.
Road to Indian hogan,bears N.and S.
Draw,course S70°E.
Ascend gradually over NE.slope to
The cor. of secs.3,4,9,and 10.

Land,rolling.
Soil,sandy clay loam.2nd. and 3rd. rate.
Timber,oak,cedar,pinion and yellow pine.
Undergrowth,sagebrush.

2.20

N 0°2'W.bet. secs. 3 and 4.
Over rolling sandy land,thru.scattering timber and undergrowth.
Descend gradually over NE.slope
Circular log corral 50 lks. in diam.on line.Leave timber bears E. and W.3.00 chs. dist.
Enter sagebrush flat.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

- 7.20 Leave flat, bears E. and W. about 5.00 chs. dist.; Enter scattering timber.
 20.00 Ascend gradually over SW. slope.
 28.00 Indian hogan bears E. 4.00 chs. dist.
 37.00 Road to Indian hogan bears E. and S70°W.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\begin{array}{c} \frac{1}{4} \\ | \\ S\ 4\ | \ S\ 3 \end{array}$$

1927

from which

- A yellow pine 8 ins. in diam. bears N39 $\frac{1}{2}$ °E. 64 lks. dist., marked $\frac{1}{4}$ S3 BT.
 A yellow pine 18 ins. in diam. bears S52 $\frac{1}{4}$ °W. 179 lks. dist. marked $\frac{1}{4}$ S4 BT.
 58.50 Dim road bears N40°W. and S40°E.
 64.60 Summit of the Defiance Plateau, bears NE. and SW. Descend gradually over NW. slope.
 Road bears N75°W. and S75°E.
 72.00 Draw, course N30°E.
 75.50 Old road bears E. and W.
 81.58 Intersect the S. bdy. of T26N., R29E. 208 lks. N89°57'E. of the reconstructed cor. of secs. 33 and 34, hereinbefore described. At point of intersection, Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for closing cor. of secs. 3 and 4., marked on brass cap

$$\begin{array}{c} T26N\ R29E \\ S\ 34 \\ \hline S\ 4\ | \ S\ 3 \\ T25N\ | \ R29E \\ C\ C \end{array}$$

1927

from which

- A yellow pine 12 ins. in diam. bears S70 $\frac{3}{4}$ °E. 165 lks. dist. marked T25N., R29E., S3 CC BT.
 A yellow pine 14 ins. in diam. bears S25 $\frac{3}{4}$ °W. 96 lks. dist. marked T25N.; R29E., S4 CC BT.

Land, rolling.
 Soil, sandy, 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion, and yellow pine.
 Undergrowth, sagebrush.

From the reestablished Std. cor. of secs. 32 and 33 on S. bdy. of Tp. hereinbefore described

N 0°3'W. bet. secs. 32 and 33.


Over rolling sandy mesa land, thru. scattering timber, and undergrowth.

- 10.30 Brush barn on line.
 11.30 Road to Indian hogan bears NE. and SW.
 15.00 Indian hogan bears E. 4.00 chs. dist.
 Descend 23 ft. over N. slope of mesa.
 17.00 Road bears NW. and SE.
 Leave timber bears N80°E. and S80°W.
 26.00 Old road bears NE. and SW.
 32.40 Wash 20 lks. wide 4 ft. deep, course E.

Survey of the Subdivision lines of Township 25 North., Range 29 East


Chains

36.00 Road bears NE. and SW.
 39.00 Wash 20 lks. wide, 5 ft. deep, course E.
 Ascend gradually over S. slope thru scattering timber:
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in
 the ground to bedrock, supported in a mound of
 stone for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

A yellow pine 12 ins. in diam. bears $S54\frac{1}{2}^{\circ}E.$ 150 lks. dist.
 marked $\frac{1}{4}$ S33 BT.
 A yellow pine 40 ins. in diam. bears $S30\frac{1}{2}^{\circ}W.$ 200 lks. dist.
 marked $\frac{1}{4}$ S32 BT.
 45.50 Drain, course E.
 56.00 Indian bake-oven, bears E. 60 lks. dist.
 66.00 Draw, course E.
 70.00 Enter valley, bears E. and W.
 75.66 Road bears NW. and SE., leads from St. Michaels to Houck
 Arizona.
 77.00 Stockade corral bears W. 3.00 chs. dist.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 22 ins. in the
 ground for cor. of secs. 28, 29, 32, and 33., marked
 on brass cap



from which

A yellow pine 36 ins. in diam. bears $N48\frac{3}{4}^{\circ}E.$ 405 lks. dist.,
 marked T25N., R29E., S28 BT.
 A yellow pine 40 ins. in diam. bears $S25\frac{1}{4}^{\circ}E.$ 287 lks. dist.
 marked T25N., R29E., S33 BT.
 A yellow pine 34 ins. in diam. bears $S57^{\circ}W.$ 290 lks. dist.,
 marked T25N., R29E., S32 BT.
 A yellow pine 6 ins. in diam. bears $N83\frac{1}{2}^{\circ}W.$ 338 lks. dist.
 marked T25N., R29E., S29 BT.

Land, rolling and hilly.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion, and yellow pine.
 Undergrowth, sagebrush.

40.00 East on a random line bet. secs. 28 and 33.
 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect N. and S. line 8 lks. S. of the cor. of secs.
 27, 28, 33, and 34.
 Thence
 S $89^{\circ}57'W.$ on true line bet. secs. 28 and 33.
 Descend 50 ft. over broken stony land, thru scattering
 timber and undergrowth.
 2.50 Foot of descent in box canyon, wash 100 lks. wide, course
 SE.
 Ascend 50 ft. over W. side of canyon over sandstone
 ledges

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

- 10.00 Top of ascent. leave broken stony land, bears NE. and SW. Enter rolling sandy land.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 28
S 33

1927

from which

- A pine 8 ins. in diam. bears N $20\frac{1}{4}^{\circ}$ W. 119 lks. dist., marked $\frac{1}{4}$ S28 BT.
- A pine 8 ins. in diam. bears S 53° E. 116 lks. dist., marked $\frac{1}{4}$ S33 BT.
- Descend 40 ft. over SW. slope.
- 76.50 Wash 10 lks. wide, water clear 6 ins. deep, course SE.
- Ascend gradually over NE. slope to
- 80.00 The cor. of secs. 28, 29, 32, and 33.

Land, rolling and broken.
Soil, sandy and stony 3rd. and 4th. rate.
Timber, pinion and yellow pine.
Undergrowth, sagebrush.

- N $0^{\circ}3'$ W. bet. secs. 28 and 29.
- Descend NE. slope over rolling sandy land, thru scattering timber, and undergrowth.
- 5.10 Wash 20 lks. wide, water clear, 4 ins. deep, course S 20° E.
- Ascend 60 ft. over stony SW. slope.
- 8.00 Top of ascent. Enter rolling sagebrush flat.
- Leave timber bears NW. and SE.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 10 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$
S29 | S28

1927

from which

- An oak 12 ins. in diam. bears S $62\frac{1}{2}^{\circ}$ E. 248 lks. dist., marked $\frac{1}{4}$ S28 BT.
- A yellow pine 18 ins. in diam. bears N $37\frac{1}{4}^{\circ}$ W. 275 lks. dist., marked $\frac{1}{4}$ S29 BT.
- 57.00 A log barn bears W. about 4.00 chs. dist.
- 59.50 A log cabin bears W. 2.00 lks. dist.
- 60.00 Leave sagebrush flat, bears NW. and SE. Descend over NE. slope, thru scattering timber., bears NW. and SE.
- 66.00 Swale, course SE., Ascend gradually over SW. slope
- 70.00 Descend gradually over NE. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 20, 21, 28, and 29., marked on brass cap

T25N | R29E
S20 | S21
S29 | S28

1927

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

from which

- A yellow pine 18 ins. in diam. bears N 60 $\frac{1}{4}$ °E. 223 lks. dist. marked T25N., R29E., S21 BT.
- A yellow pine 24 ins. in diam. bears S31 $\frac{1}{2}$ °E. 141 lks. dist. marked T25N., R29E., S28 BT.
- A pinion 6 ins. in diam. bears S21 $\frac{3}{4}$ °W. 104 lks. dist., marked T25N., R29E., S29 BT.
- A yellow pine 24 ins. in diam. bears N22 $\frac{3}{4}$ °W. 115 lks. dist. marked T25N., R29E., S20 BT.

Land, rolling and hilly.
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, pinion and yellow pine.
 Undergrowth, sagebrush.

- 40.00 N 89°57'E. on a random line bet. secs. 21 and 28
- 79.90 Set temp. $\frac{1}{4}$ sec. cor.
Intersect N. and S. line 2 lks. N. of the cor. of secs. 21, 22, 27, and 28.

Thence
 S 89°58'W. on true line bet. secs. 21 and 28.
 Over rolling sandy land, thru scattering timber and heavy sagebrush undergrowth.

- 11.90 Drain, course SW.
- 12.60 Road from St. Michaels to Houck Ariz. bears NE. and SW.
- 19.90 Swale 300 lks. wide, course SE. thence over S. slope.
- 24.30 North side of brush corral 60 lks. sq.
- 35.90 Swale, course SW.
- 39.95 Ascend gradually over SE. slope.
Set an iron post 3 ft. long, 1 in. in diam. 6 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 21
 S 28

1927

from which

- A yellow pine 6 ins. in diam. bears N65 $\frac{1}{2}$ °E. 88 lks. dist., marked $\frac{1}{4}$ S21 BT.
- A yellow pine 20 ins. in diam. bears S 58°W. 239 lks. dist. marked $\frac{1}{4}$ S28 BT.


- 50.00 Descend 50 ft. over rocky SW. slope.
- 57.20 Wash 100 lks. wide, stream of clear water 3 ins. deep, course SE.
- 65.00 Ascend 40 ft. over NE. slope to Top of spur slopes NE., Descend
- 71.90 Bottom of draw 100 lks. wide, course NE., Ascend over SE. slope.
- 79.90 The cor. of secs. 20, 21, 28, and 29.

Land, rolling and hilly.
 Soil, sandy and stony 3rd. and 4th. rate.
 Timber, oak, cedar, pinion, and yellow pine.
 Undergrowth, sagebrush.

N 0°3'W. bet. secs. 20 and 21.
 Descend NE. slope over rolling stony land, thru scattering timber and undergrowth.


Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains
 4.00 Leave timber bears NW. and SE.
 12.50 Brush fence, bears NW. and SE.
 18.00 Pole fence bears N67°E. and S67°W. Leave rolling stony land bears NW. and SE.; enter level sandy valley.
 Ruins of stone house bears N67°E. 450 lks. dist.
 26.90 Wash 10 lks. wide 4 ft. deep, course SE.
 32.00 Stone cabin bears W. 8.00 chs. dist.
 35.00 Leave level valley, bears NW. and SE.
 Enter rolling stony land.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor. marked on brass cap



from which

A pinion 6 ins. in diam. bears N31 $\frac{1}{4}$ °E. 113 lks. dist., marked $\frac{1}{4}$ S21 BT.
 A yellow pine 24 ins. in diam. bears S38°W. 353 lks. dist., marked $\frac{1}{4}$ S20 BT.
 The SE. cor. of cabin bears N83°35'W. about 9.00 chs. dist.
 40.20 Pole fence bears N89°E. and S89°W.
 Descend over NW. slope.
 45.50 Draw 10 lks. wide, course SW.
 46.45 Pole fence, bears N49°W. and S49°E.
 50.00 Enter scattering timber bears NE. and W.
 Ascend 60 ft. over SE. slope.
 69.10 Old Indian hogan bears E. 20 lks. dist.
 76.60 Dim road bears E. and W.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 18 ins. in the ground to bedrock, supported in a mound of stone for cor. of secs. 16, 17, 20, and 21, marked on brass cap



from which


A yellow pine 26 ins. in diam. bears N4 $\frac{1}{4}$ °E. 105 lks. dist., marked T25N., R29E., S16 BT.
 A yellow pine 29 ins. in diam. bears S22 $\frac{3}{4}$ °E. 78 lks. dist., marked T25N., R29E., S21 BT.
 A pinion 10 ins. in diam. bears S40 $\frac{1}{2}$ °W. 99 lks. dist., marked T25N., R29E., S20 BT.
 A pinion 8 ins. in diam. bears N73 $\frac{1}{2}$ °W. 133 lks. dist., marked T25N., R29E., S17 BT.

Land, level, rolling, and hilly.
 Soil, sandy and stony 2nd., 3rd., and 4th. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush.

40.00 N 89°58'E. on a random line bet. secs. 16 and 21.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.92 Intersect N. and S. line 5 lks. S. of the cor. of secs. 15, 16, 21, and 22.
 Thence

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains
 S 89°56'W. on true line bet. secs. 16 and 21.
 Over rolling sandy land, thru; heavy sagebrush undergrowth.
 9.00 Leave dense undergrowth, bears NE. and SW.
 Enter pinion timber.
 20.00 Leave timber, bears N. and S.
 Enter dense sagebrush undergrowth.
 39.00 Leave dense undergrowth, bears NE. and SW.
 Enter oak, pinion, and pine timber.
 39.96 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the
 ground for $\frac{1}{4}$ sec. cor. marked on brass cap




1927

from which

A pinion 10 ins. in diam. bears N26°E. 136 lks. dist.,
 marked $\frac{1}{4}$ S16 BT.
 A pinion 10 ins. in diam. bears S58°W. 157 lks. dist.,
 marked $\frac{1}{4}$ S21 BT.
 53.00 Descend gradually over NW. slope over stony hilly land.
 60.40 Draw, course S45°W.
 64.00 Ravine 6 lks. wide, course S15°W.
 Ascend 50 ft. over SE. slope to
 79.92 The cor. of secs. 16, 17, 20, and 21.

Land, rolling and hilly.
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion, and yellow pine.
 Undergrowth, sagebrush.

N 0°3'W. bet. secs. 16 and 17.
 Ascend gradually over SW. slope over rolling sandy land,
 thru. scattering timber and dense undergrowth.
 10.00 Leave timber bears NE. and SW., thence over sagebrush flat.
 16.00 Road bears N72°W. and S72°E.
 32.90 Road from St. Michaels to Wide Ruins Ariz. bears N55°E. and
 S55°W.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap



1927

from which

A pinion 6 ins. in diam. bears S56 $\frac{1}{2}$ °E. 126 lks. dist.,
 marked $\frac{1}{4}$ S16 BT.
 A pinion 6 ins. in diam. bears N21 $\frac{1}{2}$ °W. 242 lks. dist.,
 marked $\frac{1}{4}$ S17 BT.
 54.00 Leave dense undergrowth, bears NE. and SW.
 Enter heavy pine timber. bears SE. and SW.
 Descend over NW. slope.
 59.00 Ravine, course S52°W.
 Ascend
 63.00 Top, of spur slopes SW.
 Descend over NW. slope.
 68.00 Draw 100 lks. wide course S55°W.
 Ascend
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

the ground for cor. of secs. 8, 9, 16 and 17, marked on brass cap

| | |
|------|------|
| T25N | R29E |
| S 8 | S 9 |
| S17 | S16 |
| 1927 | |

from which

- A yellow pine 28 ins. in diam. bears $N59\frac{1}{2}^{\circ}E.$ 227 lks. dist. marked T25N., R29E., S9 BT.
- An oak 8 ins. in diam. bears $S6\frac{1}{4}^{\circ}E.$ 227 lks. dist., marked T25N., R29E., S16 BT.
- An oak 10 ins. in diam. bears $S17^{\circ}W.$ 64 lks. dist., marked T25N., R29E., S17 BT.
- An oak 6 ins. in diam. bears $N61^{\circ}W.$ 68 lks. dist., marked T25N., R29E., S8 BT.,

Land, rolling.

Soil, sandy and stony 2nd. and 3rd. rate.

Timber, oak, pinion and yellow pine.

Undergrowth, sagebrush.

- 40.00 N $89^{\circ}56'E.$ on a random line bet. secs. 9 and 16.
Set temp. $\frac{1}{4}$ sec. cor.
- 79.90 Intersect N. and S. line at the cor. of secs. 9, 10, 15, and 16.
- Thence
S $89^{\circ}56'W.$ on true line bet. secs. 9 and 16.
Ascend 20 ft. over NE. slope over stony hilly land, thru. scattering timber and heavy undergrowth.
- 1.00 Leave hilly land, bears N. and S.
Enter rolling sandy land.
- 8.40 Head of draw, course $S45^{\circ}E.$
- 10.60 Road from St. Michaels to Houck Arizona, bears N. and S.
- 13.90 Leave timber bears N. and S., enter sagebrush flat
- 16.90 Road bears N. and S. along E. edge of flat, bears NE. and SW.
- 24.90 Leave flat, bears NW. and SE., enter scattering timber.
Descend 40 ft. over NW. slope.
- 34.42 Dim road bears N. and S.
- 39.95 Set an iron post 3 ft. long, 1 in. in diam. 26 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

| | |
|---------------|------|
| $\frac{1}{4}$ | S 9 |
| | S 16 |

1927

from which

- A yellow pine 10 ins. in diam. bears $N24^{\circ}E.$ 39 lks. dist., marked $\frac{1}{4}$ S9 BT.
- A yellow pine 26 ins. in diam. bears $S68^{\circ}W.$ 131 lks. dist., marked $\frac{1}{4}$ S16 BT.
- 40.55 Road from St. Michaels Arizona to Wide Ruins, bears $N35^{\circ}E.$ and $S35^{\circ}W.$
- 49.90 Leave timber, bears N. and S.; Enter sagebrush flat.
- 63.90 Leave flat bears N. and S., Enter timber bears NE. and SW.
- 73.90 W. side of brush corral 40 lks. sq.
- 79.90 The cor. of secs. 8, 9, 16, and 17.

Land, rolling and level.

Soil, sandy and stony 2nd. and 3rd. rate.


Timber, oak, pinion, and yellow pine

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains


Undergrowth, sagebrush.

- N 0°3'W. bet. secs. 8 and 9.
 Descend gradually over NW. slope over rolling stony land,
 thru. medium growth timber, and scattering under-
 growth.
- 15.00 Ravine 10 lks. wide, course S20°W.
 Ascend gradually over SE. slope.
- 22.50 Stone bake-oven bears E. 250 lks. dist.
- 30.70 Draw, course S60°E. Ascend
- 36.00 Road bears N65°E. and S65°W.
 Leave timber, bears E. and W., Enter sagebrush flat.
- 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in
 the ground for $\frac{1}{4}$ Sec. cor., marked on brass cap



from which

- A pine 8 ins. in diam. bears N78°E. 276 lks. dist.,
 marked $\frac{1}{4}$ S9 BT.
- An oak 6 ins. in diam. bears S20 $\frac{1}{4}$ °W. 240 lks. dist.,
 marked $\frac{1}{4}$ S8 BT.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
 the ground for cor. of secs. 4, 5, 8, and 9., marked on
 brass cap



from which

- A pine 8 ins. in diam. bears N31 $\frac{1}{2}$ °E. 193 lks. dist.,
 marked T25N., R29E., S4 BT.
- An oak 6 ins. in diam. bears S68 $\frac{1}{2}$ °E. 237 lks. dist.,
 marked T25N., R29E., S9 BT.
- A yellow pine 14 ins. in diam. bears S47 $\frac{1}{4}$ °W. 433 lks. dist.
 marked T25N., R29E., S8 BT.
- A yellow pine 14 ins. in diam. bears N44°W. 251 lks. dist.,
 marked T25N., R29E., S5 BT.

Land, rolling.
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion, and yellow pine.
 Undergrowth, oak and sagebrush.

- 40.00 N 89°56'E. on a random line bet. secs. 4 and 9.
 Set temp. $\frac{1}{4}$ sec. cor.
- 79.88 Intersect N. and S. line 5 lks. N. of the cor. of secs.
 3, 4, 9, and 10
- Thence
 S 89°58'W. on true line bet. secs. 4 and 9.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

Over rolling sandy land, thru scattering timber and undergrowth
 9.85 Ravine 6 lks. wide, course S25°E.
 22.00 Head of draw, course S60°W.
 24.00 Dim road bears N25°W. and S25°E.
 Leave timber, bears NE. and SW., Enter sagebrush flat
 31.30 Road bears N20°E. and S20°W.
 39.94 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for ¼ sec. cor., marked on brass cap

¼ S 4
 S 9
 1927

from which

A yellow pine 28 ins. in diam. bears N15°W. 248 lks. dist., marked ¼ S4 BT.
 A pinion 8 ins. in diam. bears S87½°W. 237 lks. dist., marked ¼ S9 BT.
 45.00 Leave sagebrush flat, bears NE. and SW.
 Enter timber bears NE. and SW.
 51.90 Ravine 4 lks. wide, course S45°W.
 57.50 Ravine 5 lks. wide, course S12°W. Ascend gradually over SE. slope.
 72.00 Top of ascent.
 Leave timber bears N 3.00 chs. and S.
 Enter sagebrush flat, bears N. and S.
 79.88 The cor. of secs. 4, 5, 8, and 9.

Land, rolling and level.
 Soil, sandy clay loam. 1st. and 2nd. rate.
 Timber, oak, cedar, pinion, and yellow pine.
 Undergrowth, sagebrush.

N 0°3'W. bet. secs. 4 and 5.
 Over rolling sandy land, thru heavy sagebrush undergrowth.
 2.00 Enter scattering timber, bears NW. and SE.
 13.00 Drain, course S50°W. Asc.
 20.00 S. edge of sagebrush flat, bears NE. and SW.
 Leave timber, bears E. and W.
 37.60 Road bears N70°W. and S70°E.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for ¼ sec. cor., marked on brass cap

¼
 S 5 | S 4

1927

from which

A pinion 6 ins. in diam. bears N23¼°E. 226 lks. dist., marked ¼ S4 BT.
 A pinion 8 ins. in diam. bears N23°W. 214 lks. dist., marked ¼ S5 BT.
 44.00 Leave sagebrush flat bears NE. and SW.
 Enter scattering timber bears NE. and W.
 44.60 Road, bears N82°E. and S82°W. on summit of the Defiance Plateau, bears NE. and SW.
 60.00 Descend gradually over N. slope.
 82.04 Intersect the S. bdy. of T26N., R29E. 265 lks. S89°56'E. of the reconstructed cor. of secs. 32 and 33, herein-

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

before described. At point of intersection,
Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
the ground for closing cor. of secs. 4 and 5.,
marked on brass cap.

T26N R29E
S 33
S 5 | S 4
T25N R29E
C C
1927

from which

- A yellow pine 14 ins. in diam. bears S42 $\frac{1}{2}$ °E. 226 lks. dist. marked T25N., R29E., S4 CC BT.
- A yellow pine 20 ins. in diam. bears S84 $\frac{1}{4}$ °W. 163 lks. dist. marked T25N., R29E., S5 CC BT.

Land, rolling and level.
Soil, sandy clay loam, 1 st. and 3 rd. rate.
Timber, oak, cedar, pinion, and yellow pine.
Undergrowth, sagebrush and scrub oak.

From the reestablished Std. cor. of secs. 31 and 32 on S.
bdy. of Tp. hereinbefore described
N 0°3'W. bet. secs. 31 and 32
Over rolling stony land, thru. open pine timber and
scattering undergrowth.

- 14.00
- 27.00
- 33.00
- 37.50
- 40.00

- Draw, course E.
- Draw 5 lks. wide, course N70°E.
- Trail, bears NE. and SW.
- Draw, course SE. ascend gradually.
- Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for $\frac{1}{4}$ sec. cor. marked on brass cap

†
S31 | S32
1927

from which

- A yellow pine 10 ins. in diam. bears N65 $\frac{1}{2}$ °E. 238 lks. dist. marked $\frac{1}{4}$ S32 BT.
- A yellow pine 8 ins. in diam. bears S57 $\frac{1}{2}$ °W. 154 lks. dist. marked $\frac{1}{4}$ S31 BT.

- 46.50
- 58.70
- 60.00
- 60.30
- 80.00

- Brush goat corral 70 lks. sq. bears E. 100 lks. dist.
- Wash 8 lks. wide 1 ft. deep, course NE.
- Road bears NW. and SE.
- Ravine 10 lks. wide 3 ft. deep, course SE.
- Ascend 50 ft. over SW. slope.
- Set an iron post 3 ft. long, 2 ins. in diam. over cross (x) on exposed bedrock, supported in a mound of stone for cor. of secs. 29, 30, 31, and 32., marked on brass cap

T25N | R29E
S30 | S29
S31 | S32
1927

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

from which

A yellow pine 18 ins. in diam. bears N51°E.74 lks. dist.,
marked T25N.,R29E.,S29 BT.

A pinion 12 ins. in diam. bears S47°E.162 lks. dist.,
marked T25N.,R29E.,S32 BT.

An oak 8 ins. in diam. bears S53°W.100 lks. dist.,
marked T25N.,R29E.,S31 BT.

A pinion 8 ins. in diam. bears N48°W.81 lks. dist.,
marked T25N.,R29E.,S30 BT.

Land, rolling.

Soil, sandy and stony clay loam 2nd., 3rd., and 4th. rate

Timber, oak, cedar, pinion, and yellow pine.

Undergrowth, sagebrush and scrub oak.

- 40.00 East on a random line bet. secs. 29 and 32.
Set temp. $\frac{1}{4}$ sec. cor.
80.04 Intersect. N. and S. line 8 lks. N. of the cor. of secs.
28, 29, 32, and 33.
Thence
N 89°57'W. on true line bet. secs. 29 and 32.
Over rolling stony land, thru open timber and scattering
undergrowth.
.64 Road bears NE. and SW., leads from St. Michaels to Houck
Arizona
1.54 Road bears NW. and SE.
18.64 Draw 50 lks. wide course NE. Ascend
35.54 Dim road bears NE. and SW.
40.02 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the
ground to bedrock, supported in a mound of stone
for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 29
 $\frac{1}{4}$ S 32
1927

from which

A yellow pine 20 ins. in diam. bears N16 $\frac{1}{2}$ °E.108 lks. dist.,
marked $\frac{1}{4}$ S29 BT.

A pinion 8 ins. in diam. bears S26°E.74 lks. dist.,
marked $\frac{1}{4}$ S32 BT.

45.00 Leave timber bears NE. and SW.

Enter sagebrush flat.

62.00 Leave sagebrush flat bears N. and S.

Enter scattering timber bears NE. and SW.

80.04 The cor. of secs. 29, 30, 31, and 32.

Land, rolling.

Soil, stony clay loam, 3 rd. rate.

Timber oak, cedar, pinion and yellow pine.

Undergrowth, sagebrush.

- 40.00 West on a random line bet. secs. 30 and 31.
Set temp. $\frac{1}{4}$ sec. cor.
79.88 Intersect W. bdy. of Tp. 12 lks. S. of the cor. of secs. 25, 30, 31, and 36, described in Book "A"
Thence
S 89°55'E. on true line bet. secs. 30 and 31.

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains
 13.48 Over rolling sandy land, thru scattering pine timber and heavy undergrowth.
 39.88 Road bears N45°W. and S45°E.
 Set an iron post 3 ft. long, 1 in. in diam. 14 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor., marked on brass cap

1/4 S 30
 S 31

1927

from which

A yellow pine 8 ins. in diam. bears N27°E. 93 lks. dist., marked 1/4 S30 BT.
 A yellow pine 10 ins. in diam. bears S25 1/4°W. 133 lks. dist. marked 1/4 S31 BT.
 54.48 Same road bears N30°E. and S30°W.
 79.88 The cor. of secs. 29, 30, 31, and 32.

Land, rolling.
 Soil, sandy and stony clay loam 3rd. and 4th. rate.
 Timber, oak, pinion and yellow pine.
 Undergrowth, scrub oak and sagebrush.

N 0°3'W. bet. secs. 29 and 30.
 Over rolling stony land, thru medium growth timber and scattering undergrowth.

12.05 Road bears N55°E. and S55°W.
 25.00 Leave rolling land, bears NW. and SE.
 Descend 30 ft. over NE. slope over hilly land.
 27.75 Brush fence bears N60°E. and N50°W.
 Leave timber bears NW. and SE.
 35.00 The SW. cor. of cultivated field 4.00 chs. wide and 5.00 chs. long, bears E. 3.00 chs dist.
 39.00 Wash 10 lks. wide 4 ft. deep, course S70°E.
 Enter rolling bottom land in valley, bears NW. and SE:
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 12 ins. in the ground to bedrock, supported in a mound of stone for 1/4 sec. cor., marked on brass cap

1/4
 S 30 | S 29

1927

from which

A yellow pine 36 ins. in diam. bears N43 1/2°E. 221 lks. dist. marked 1/4 S29 BT.
 A yellow pine 36 ins. in diam. bears S70°W. 259 lks. dist. marked 1/4 S30 BT.
 A cultivated field 250 lks. sq. bears E. 4.00 chs. dist.
 The NW. cor. of log house bears S81 1/4°E. about 18.00 chs. dist.
 An Indian hogan bears S75 1/2°E. about 20.00 chs. dist.
 45.00 West edge of draw, course S30°E, from N20°E.
 50.00 Same draw, 10 lks. wide, course SE.
 West end of cultivated field 5.00 chs. wide and 10.00 chs long, extends SE.
 50.25 Wash 20 lks. wide 4 ft. deep, course S30°E.
 52.70 Wire fence bears N65°E. and S65°W.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains
 54.40 Road bears N30°W. and S30°E., Leave valley bears NW. and SE.
 Ascend 60 ft. over SW. slope over stony hilly land.
 54.50 Enter scattering timber, bears NW. and SE.
 60.00 Leave hilly land, bears NW. and SE., enter rolling land.
 70.90 Same road bears N30°E. and S30°W.
 75.80 Draw, course S30°W., Asc.
 80.00 Set an iron post 3 ft. long, 2 ins. in diam. 26 ins. in the ground for cor. of secs. 19, 20, 29, and 30., marked on brass cap

| | |
|------|------|
| T25N | R29E |
| S19 | S20 |
| S30 | S29 |
| 1927 | |

from which

- A yellow pine 36 ins. in diam. bears N45°E. 573 lks. dist., marked T25N., R29E., S20 BT.
- A yellow pine 20 ins. in diam. bears S5°E. 433 lks. dist., marked T25N., R29E., S29 BT.
- A yellow pine 24 ins. in diam. bears S57½°W. 240 lks. dist., marked T25N., R29E., S30 BT.
- A pinion 6 ins. in diam. bears N70¼°W. 98 lks. dist., marked T25N., R29E., S19 BT.

Land, rolling and hilly.
 Soil, sandy and stony, 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, sagebrush and scrub oak.

40.00 S 89°57'E. on a random line bet. secs. 20 and 29.
 Set temp. ¼ sec. cor.
 80.00 Intersect N. and S. line at the cor. of secs. 20, 21, 28, and 29.

Thence

N 89°57'W. on true line bet. secs. 20 and 29.
 Over rolling stony land, thru scattering timber and undergrowth

18.90 Road bears N10°W. and S20°E.
 21.00 Road bears NE. and SW.
 23.00 Road bears N30°W. and S30°E.
 40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for ¼ sec. cor., marked on brass cap

| | |
|--------|--|
| ¼ S 20 | |
| S 29 | |

1927.

from which

- A pinion 6 ins. in diam. bears N31¼°E. 123 lks. dist., marked ¼ S20 BT.
- A yellow pine 8 ins. in diam. bears S21¼°E. 248 lks. dist., marked ¼ S29 BT.

Descend gradually over SW. slope
 55.00 Wash 10 lks. wide 2 ft. deep, course S20°W.
 Ascend over SE. slope.
 65.00 Top of ascent, thence over nearly level land.
 75.00 Enter heavy timber, bears NE. and SW.
 77.00 Road bears N20°E. and S20°W.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

78.00 Bottom of draw ,25 lks. wide, course SW.
Leave heavy timber, bears N. and S.
Ascend gradually over SE. slope.

80.00 The cor. of secs. 19, 20, 29, and 30.

Land, rolling.
Soil, sandy and stony 2nd. and 3rd. rate.
Timber, oak, cedar, pinion and yellow pine.
Undergrowth, sagebrush.

40.00 N 89°55'W. on a random line bet. secs. 19 and 30.
Set temp. $\frac{1}{4}$ sec. cor.

79.82 Intersect W. bdy. of Tp. at the cor. of secs. 19, 24, 25, and 30., described in Book "A"

Thence

S 89°55'E. on true line bet. secs. 19 and 30.

Over nearly level sandy land, thru heavy sagebrush undergrowth

24.80 Leave flat, bears NW. and SE.

Enter scattering timber.

36.32 Ravine 4 lks. wide course S15°E., Ascend gradually over rolling SW. slope.

39.82 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 19
S 30

1927

from which

A yellow pine 12 ins. in diam. bears N12 $\frac{1}{4}$ °E. 59 lks. dist. marked $\frac{1}{4}$ S19 BT.

A pinion 6 ins. in diam. bears S72 $\frac{1}{4}$ °W. 80 lks. dist., marked $\frac{1}{4}$ S30 BT.

44.82 Leave timber bears NW. and SE.

52.32 Road bears N50°E. and S50°W.

60.00 Enter scattering timber bears NE. and SW.

67.62 Ravine 8 lks. wide 3 ft. deep, course S25°E.

Ascend gradually over SW. slope.

68.52 Road bears N25°W. and S25°E.

76.82 Leave timber bears NE. and SW.

79.82 The cor. of secs. 19, 20, 29, and 30.

Land, level and rolling.
Soil, sandy clay loam, 2nd. and 3rd. rate.
Timber, oak, cedar, pinion and yellow pine.
Undergrowth, sagebrush.

N 0°3'W. bet. secs. 19 and 20.

Over rolling land, thru scattering timber and sagebrush undergrowth

21.00 Draw, course SW.

Ascend gradually over SE. slope

22.75 Road bears N55°E. and S55°W.

32.00 South edge of sagebrush flat 450 lks. wide., bears E. and W.

Leave timber

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

- 34.00 Road bears E. and W.
Enter scattering timber, bears NE. and SW.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in
the ground. for $\frac{1}{4}$ sec. cor. marked on brass cap.

$$\begin{array}{c} \frac{1}{4} \\ \text{S19} \mid \text{S20} \\ | \end{array}$$

1927

from which

- An oak 6 ins. in diam. bears $N9\frac{1}{4}^{\circ}E$. 40 lks. dist.,
marked $\frac{1}{4}$ S20 BT.
An oak 6 ins. in diam. bears $S72\frac{1}{2}^{\circ}W$. 99 lks. dist.,
marked $\frac{1}{4}$ S19 BT.
50.30 Drain, course E.
58.00 Leave timber, bears E. and W.
59.00 Road bears $N65^{\circ}E$. and $S65^{\circ}W$.
64.00 South edge of old lake bed, bears E. and W. 5.00 chs. dist.
66.80 Road bears $S60^{\circ}E$. and $N60^{\circ}W$.
67.00 Leave old lake bed, bears NW. and SE.
69.00 Enter scattering timber bears SE. and SW.
79.50 Ravine 6 lks. wide 1 ft. deep, course $N62\frac{1}{4}^{\circ}E$.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 12 ins. in the
ground to bedrock, supported in a mound of stone
for cor. of secs. 17, 18, 19, and 20., marked on brass
cap

$$\begin{array}{c} \text{T25N} \mid \text{R29E} \\ \text{S18} \mid \text{S17} \\ \hline \text{S19} \mid \text{S20} \end{array}$$

1927

from which

- A yellow pine 28 ins. in diam. bears $N42\frac{1}{2}^{\circ}E$. 169 lks. dist.
marked T25N., R29E., S17 BT.
A yellow pine 20 ins. in diam. bears $S40\frac{1}{4}^{\circ}E$. 108 lks. dist.
marked T25N., R29E., S20 BT.
A yellow pine 6 ins. in diam. bears $S66\frac{3}{4}^{\circ}W$. 60 lks. dist.,
marked T25N., R29E., S19 BT.
A yellow pine 8 ins. in diam. bears $N42\frac{1}{4}^{\circ}W$. 203 lks. dist.,
marked T25N., R29E., S18 BT.

Land, rolling.
Soil, sandy and stony 2nd. and 3rd. rate.
Timber, oak, cedar, pinion and yellow pine.
Undergrowth, scrub oak and sagebrush.

- 40.00 S $89^{\circ}57'E$. on a random line bet. secs. 17 and 20
Set temp. $\frac{1}{4}$ sec. cor.
79.92 Intersect N. and S. line 2 lks. N. of the cor. of secs.
16, 17, 20, and 21.
Thence
N $89^{\circ}56'W$. on true line bet. secs. 17 and 20.
Over rolling stony land, slopes S. thru heavy timber and
undergrowth.
3.92 Leave timber bears NW. and SE.
20.00 Descend 42 ft. over SW. slope.
25.92 Pole fence bears N. and S.

Survey of the Subdivision lines of Township 25 North., Range 29 East

- Chains
- 26.92 Foot of descent. Enter valley bears NW. and SE.
- 29.52 Wash 40 lks. wide 2 ft. deep, course S20°E.; Stream of clear water 15 lks. wide 4 ins. deep in wash.
- 35.92 Road bears N20°W. and S20°E. Leave valley bears N20°W. and S20°E. Ascend 40 ft. over rocky NE. slope.
- 39.00 Top of spur, bears NE.
- 39.96 Enter scattering timber bears N. and S. Set an iron post 3 ft. long, 1 in. in diam. over cross (x) on bedrock; supported in a mound of stone for ¼ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 17 \\ S 20 \end{array}$$
 1927

from which

- A yellow pine 40 ins. in diam. bears N26½°W. 67 lks. dist., marked ¼ S17 BT.
- A yellow pine 26 ins. in diam. bears S43°W. 33 lks. dist., marked ¼ S20 BT.
- An old stone chimney, bears N21¼°E. 4.00 chs. dist.
- A log cabin bears S34°E. about 20.00 chs. dist.
- A log cabin bears S34°E. about 7.00 chs. dist.
- 46.12 Road from St. Michaels to Wide Ruins Ariz. bears N40°E. and S40°W.
- 49.92 Descend gradually over NW. slope. Ravine 6 lks. wide 2 ft. deep, course N55°E. Ascend over rolling SE. slope.
- 62.00 Descend gradually over NW. slope.
- 78.12 Ravine 5 lks. wide course N65°E.
- 79.92 The cor. of secs. 17, 18, 19, and 20.

Land, level and rolling.
 Soil, sandy and stony 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, oak and sagebrush.

- 40.00 N 89°55'W. on a random line bet. secs. 18 and 19. Set temp. ¼ sec. cor.
- 79.78 Intersect W. bdy. of Tp. 5 lks. S. of the cor. of secs. 13, 18, 19, and 24, described in Book "A"
- Thence S 89°53'E. on true line bet. secs. 18 and 19. Over rolling sandy land, thru. scattering timber and sagebrush undergrowth.
- 3.38 Road bears N. and S.
- 12.78 Leave timber bears N 2.00 chs. and S. Enter sagebrush flat.
- 27.58 Road bears N70°W. and S70°E. Ascend gradually over SW. slope.
- 32.58 East edge of sagebrush flat bears NW. and SE., Enter scattering timber and oak brush undergrowth.
- 35.00 Road bears N45°W. and S45°E. Descend over SE. slope.
- 39.78 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for ¼ sec. cor. marked on brass cap

$$\frac{1}{4} \begin{array}{l} S 18 \\ S 19 \end{array}$$
 1927

from which

Survey of the Subdivision lines of Township 25 North., Range 29 East.


Chains

A yellow pine 28 ins. in diam. bears N49°E.97 lks. dist.,
marked $\frac{1}{4}$ S18 BT.
A yellow pine 32 ins. in diam. bears S64 $\frac{1}{2}$ °E.194 lks. dist.,
marked $\frac{1}{4}$ S19 BT.
69.81 Draw, course S50°E.
72.28 Dim road bears N45°W. and S45°E.
79.78 The cor. of secs.17,18,19, and 20

Land, rolling.
Soil, sandy and stony, 2nd. and 3rd. rate.
Timber, oak, pinion and yellow pine.
Undergrowth, scrub oak and sagebrush.


N 0°3'W. bet. secs.17 and 18.
Over rolling stony land, slopes SE. thru medium growth
timber and scattering undergrowth.

12.00 Top of spur, bears E:
Descend gradually over N. slope.
21.00 Old road bears N60°W. and S60°E.
23.40 Ravine 4 lks. wide 1 ft. deep, course S70°E.
Ascend over SW. slope.
35.80 Top of low spur; bears SE.; Road on spur bears N20°W. and S
S20°E.
Descend over NE. slope.
36.60 Draw, course S45°E. Ascend gradually
40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in
the ground for $\frac{1}{4}$ sec. cor., marked on brass cap



from which

A yellow pine 30 ins. in diam. bears N36 $\frac{1}{2}$ °E.98 lks. dist.
marked $\frac{1}{4}$ S17 BT.
A pinion 16 ins. in diam. bears N21°W.145 lks. dist.,
marked $\frac{1}{4}$ S18 BT.
45.00 A goat corral 50 lks. sq. bears E.3.00 chs. dist.
66.00 Draw, course S60°E. Ascend gradually over SW. slope.
80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
the ground for cor. of secs.7,8,17, and 18.,
marked on brass cap



from which

A pinion 10 ins. in diam. bears N51 $\frac{1}{2}$ °E.110 lks. dist.,
marked T25N.,R29E.,S8 BT.
A yellow pine 10 ins. in diam. bears S75 $\frac{1}{2}$ °E.277 lks. dist.
marked T25N.,R29E.,S17 BT.
A yellow pine 8 ins. in diam. bears S63 $\frac{1}{2}$ °W.377 lks. dist.
marked T25N.,R29E.,S18 BT.
A pinion 6 ins. in diam. bears N19 $\frac{1}{4}$ °W.124 lks. dist.,
marked T25N.,R29E.,S7 BT.

Land, rolling.
Soil, sandy and stony 2nd. and 3rd. rate

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

Timber, oak, cedar, pinion and yellow pine.
Undergrowth, scrub oak and sagebrush.

S 89°56'E. on a random line bet. secs. 8 and 17.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.96 Intersect N. and S. line 8 lks. N. of the cor. of secs.
8, 9, 16, and 17.
Thence
N 89°59'W. on true line bet. secs. 8 and 17.
Descend gradually over W. slope over rolling stony land,
thru. medium growth pine timber and undergrowth.
6.06 Ravine 5 lks. wide 1 ft. deep, course S10°E.
Ascend over SE. slope.
19.96 Top of spur bears SE.; Descend over SW. slope.
29.96 An Indian sweat house bears S. 2.00 chs. dist.
31.96 Ravine 4 lks. wide, course S10°E.
Ascend over E. slope.
37.96 Top of low spur slopes SE.
Descend over SW. slope.
39.98 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \frac{S 8}{S 17}$$

1927

from which

A yellow pine 8 ins. in diam. bears N19 $\frac{1}{2}$ °W. 94 lks. dist.,
marked $\frac{1}{4}$ S8 BT.
A yellow pine 26 ins. in diam. bears S43°E. 135 lks. dist.,
marked $\frac{1}{4}$ S17 BT.
43.96 Ravine 5 lks. wide 1 ft. deep, course S40°E.
Ascend gradually over NE. slope.
44.86 Road, bears N25°W. and S25°E.
57.96 Leave timber bears NW. and SE. enter sagebrush flat.
67.56 Old road bears N25°W. and S25°E.
Leave flat, bears NW. and SE.
Enter scattering timber
70.96 The NE. cor. of brush corral 40 lks. sq.
74.96 Bottom of draw, course S35°E.
Ascend gradually.
79.96 The cor. of secs. 7, 8, 17, and 18.

Land, rolling.
Soil, sandy and stony 2nd. and 3rd. rate.
Timber, oak, cedar, pinion and yellow pine.
Undergrowth, scrub oak and sagebrush.

N 89°53'W. on a random line bet. secs. 7 and 18.
40.00 Set temp. $\frac{1}{4}$ sec. cor.
79.64 Intersect W. bdy. of Tp. 26 lks. S. of the cor. of secs.
of secs. 7, 12, 13, and 18, described in Book "A"
Thence
S 89°42'E. on true line bet. secs. 7 and 18.
Ascend NW. slope over rolling sandy land, thru. scattering
timber and sagebrush undergrowth.
27.60 Leave timber bears NE. and SW.; Enter heavy sagebrush
undergrowth.
37.73 Old road, bears NW. and SE.

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

39.64 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 7 \\ S 18 \end{array}$$

1927

from which

A pinion 10 ins. in diam. bears N34°W. 258 lks. dist., marked $\frac{1}{4}$ S7 BT.

A pinion 8 ins. in diam. bears S79°E. 409 lks. dist., marked $\frac{1}{4}$ S18 BT.

42.14 Leave dense undergrowth, bears N15°W. and S15°E. Enter timber

60.00 Summit of the Defiance Plateau, bears NE. and SW. Descend gradually over SE. slope.

71.96 Draw 5 lks. wide, course S25°E.

Ascend gradually over SW. slope to

79.64 The cor. of secs. 7, 8, 17, and 18.

Land, rolling.

Soil, sandy and stony clay loam 2nd. and 3rd. rate.

Timber, oak, cedar, pinion, and yellow pine.

Undergrowth, sagebrush and scrub oak.

N 0°3'W. bet. secs. 7 and 8.

7.00 Over rolling sandy land in west edge of sagebrush flat Enter scattering pinion and oak timber bears NE. and SW.

12.00 Summit of the Defiance Plateau, bears NE. and SW., thence over nearly level land.

14.80 Old road bears N45°W. and S45°E.

Descend gradually over NW. slope.

26.80 Road bears N62°W. and S62°E.

31.20 Road bears N69°W. and S69°E.

40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 7 \\ S 8 \end{array}$$

1927

from which

A pine 8 ins. in diam. bears N57 $\frac{1}{2}$ °E. 94 lks. dist., marked $\frac{1}{4}$ S8 BT.

A pine 10 ins. in diam. bears N43°W. 40 lks. dist., marked $\frac{1}{4}$ S7 BT.

56.70 Swale, 200 lks. wide, course S60°W.

75.00 Draw, course SW. Ascend.

79.60 Leave timber bears NE. and SW.

Enter sagebrush flat.

80.00 Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in the ground for cor. of secs. 5, 6, 7, and 8., marked on brass cap

$$\begin{array}{c} T25N | R29E \\ S 6 | S 5 \\ \hline S 7 | S 8 \end{array}$$

1927

from which

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

A pine 6 ins. in diam. bears N73 $\frac{1}{2}$ °E. 112 lks. dist.,
 marked T25N., R29E., S5 BT.
 A pine 12 ins. in diam. bears S48°E. 116 lks. dist.,
 marked T25N., R29E., S8 BT.
 A pine 8 ins. in diam. bears S24°W. 63 lks. dist.,
 marked T25N., R29E., S7 BT.
 A yellow pine 26 ins. in diam. bears N61°W. 399 lks. dist.,
 marked T25N., R29E., S6 BT.

Land, rolling.
 Soil, sandy 2nd. and 3rd. rate.
 Timber, oak, cedar, pinion and yellow pine.
 Undergrowth, scrub oak and sagebrush.

40.00 S 89°59'E. on a random line bet. secs. 5 and 8.
 Set temp $\frac{1}{4}$ sec. cor.
 79.96 Intersect N. and S. line 10 lks. N. of the cor. of secs.
 4, 5, 8, and 9.
 Thence
 N 89°55'W. on true line bet. secs. 5 and 8.
 Over rolling sandy land, slopes SW., thru. dense sagebrush
 undergrowth.
 3.00 Enter scattering timber bears N70°E. and S.
 7.75 Draw, course S10°W.
 14.00 Leave timber, bears NE. and SW., Enter sagebrush flat.
 33.00 Enter timber bears NE. and SW.
 37.30 Summit of the Defiance Plateau, bears NE. and SW.
 Road bears N45°W. and S45°E.
 39.98 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the
 ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$\frac{1}{4}$ S 5
 S 8
 1927

from which

A yellow pine 16 ins. in diam. bears N47 $\frac{1}{2}$ °E. 258 lks. dist.
 marked $\frac{1}{4}$ S5 BT.
 A pinion 8 ins. in diam. bears S69 $\frac{1}{2}$ °E. 302 lks. dist.,
 marked $\frac{1}{4}$ S8 BT.
 An Indian hogan, bears N28°W. 14.00 chs. dist.
 Descend gradually over NW. slope.
 42.50 Road bears N20°W. and S20°E.
 70.00 Leave timber bears NE. and SW., Enter s. edge of sagebrush
 flat.
 79.96 The cor. of secs. 5, 6, 7, and 8.

Land, rolling.
 Soil, sandy 2nd. rate.
 Timber, oak, cedar, yellow pine and pinion.
 Undergrowth, sagebrush and scrub oak.

40.00 N 89°42'W. on a random line bet. secs. 6 and 7.
 Set temp. $\frac{1}{4}$ sec. cor.
 79.50 Intersect W. bdy. of Tp. 5 lks. S. of the cor. of
 secs. 1, 6, 7, and 12, described in book "A"

Thence

Survey of the Subdivision lines of Township 25 North., Range 29 East.

Chains

- S 89°40'E. on true line bet. secs. 6 and 7.
Ascend gradually over NW. slope over rolling sandy and
gravelly land, thru pinion and pine timber and
scattering undergrowth.
32.50 Leave timber bears NE. and SW. Enter sagebrush flat.
39.50 Set an iron post 3 ft. long; 1 in. in diam. 28 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 6 \\ S 7 \end{array}$$

1927.

from which

- A pine 14 ins. in diam. bears N70 $\frac{1}{2}$ °W. 492 lks. dist.,
marked $\frac{1}{4}$ S6 BT.
A pinion 8 ins. in diam. bears S31°W. 253 lks. dist.,
marked $\frac{1}{4}$ S7 BT.
49.50 Leave sagebrush flat, bears NE. and SW.
Enter scattering pinion and oak timber, bears NE. 7.00 chs.
and SW. 6.00 chs. dist.
54.50 Leave timber bears NE. and SW.
Enter sagebrush flat.
58.00 Road bears N. and S.
79.50 The cor. of secs. 5, 6, 7, and 8.

Land, rolling.

Soil, sandy clay loam. 2 nd. rate.

Timber, oak, yellow pine and pinion.

Undergrowth, scrub oak and sagebrush.

- N 0°3'W. bet. secs. 5 and 6.
Over rolling sandy land, thru heavy sagebrush undergrowth
Descend gradually over NW. slope.
13.00 Enter pinion and pine timber, bears N45°W. and S20°E.
29.00 Ravine 8 lks. wide 1 ft. deep, course N30°W.
Leave timber bears NE. and NW. Enter W. edge of flat.
Ascend over W. slope.
40.00 Set an iron post 3 ft. long, 1 in. in diam. 28 ins. in the
ground for $\frac{1}{4}$ sec. cor., marked on brass cap

$$\frac{1}{4} \begin{array}{c} S 6 \\ S 5 \end{array}$$

1927

from which

- A yellow pine 12 ins. in diam. bears S82 $\frac{1}{2}$ °E. 640 lks. dist.
marked $\frac{1}{4}$ S5 BT.
A yellow pine 30 ins. in diam. bears N25 $\frac{1}{4}$ °W. 394 lks. dist.
marked $\frac{1}{4}$ S6 BT.
52.20 Draw 10 lks. wide, course S65°W. Enter timber bears E and W
Ascend gradually over SW. slope.
64.70 Road bears N30°W. and S30°E.
82.14 Intersect the S. bdy. of T26N., R29E. 302 lks. S89°46'E. of the
reconstructed cor. of secs. 31 and 32, hereinbefore
described. At point of intersection,
Set an iron post 3 ft. long, 2 ins. in diam. 28 ins. in
the ground for closing cor. of secs. 5 and 6.,
marked on brass cap

Survey of the Subdivision lines of Township 25 North., Range 29 East

Chains

T26N R29E
 S32

S 6 | S 5
 T25N | R29E
 C C

1927

from which

- A yellow pine 26 ins. in diam. bears S 9°E.440 lks. dist.
 marked T25N.,R29E.,S5 CC BT.
 A pinion 8 ins. in diam. bears S14½°W.334 lks. dist.,
 marked T25N.,R29E.,S6 CC BT

Land,rolling.

Soil,sandy and stony 3rd. rate.

Timber,oak,cedar,pinion,and Yellow pine.

Undergrowth,scrub oak and sagebrush.

The continued satisfactory adjustment of the solar apparatus of the instrument used in the execution of the surveys described in the foregoing notes, is indicated from field tests described in Book "C" of this group.

GENERAL DESCRIPTION.

This township lies on the Defiance Plateau at an elevation of about 7000 feet.

The surface is rolling, draining southerly, except a portion in the northwestern part which drains north-westerly.

The soil is sandy and stony, 2nd, 3rd and 4th rate.

The timber, consisting of oak, cedar, pinyon and yellow pine, is scattering over most of the township.

The undergrowth is sagebrush and scrub oak in dense and scattering growths in all sections.

There are no permanent running streams of water, or springs, in the township.

There are no indications of valuable mineral deposits.

A few small areas in various parts of the township have been periodically cultivated by the Navajo Indians, and a few cabins, corrals and fences constitute the only improvements.

The township is traversed by numerous roads.

CERTIFICATE OF U.S. CADASTRAL ENGINEERS.

I, Sidney E. Blout U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General, for Group No. 96, Arizona bearing date of the 11th day of March, 1919, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, **RESURVEYED** all those parts or portions of the 6th Standard Parallel North thru Range 29 East, the South Bdy. of Township 26 N., R. 29 E., and East and North Bdrs. of Township 25 North, Range 29 East and **SURVEYED** all those parts or portions of the Subdivision Lines of Township 25 North, Range 29 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of ^{said resurvey} and survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General, for Group 96, Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such **resurvey and survey**.

Place: Phoenix, Arizona.
 Date: February 27, 1928.

Sidney E. Blout
 U.S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., April 23, 1928.

The foregoing field notes of the **RESURVEY** of the 6th Standard Parallel North thru Range 29 East, the South Bdy. of Tp., 26 N., R. 29 E. and the East and North Bdrs. of Tp. 25 N., R. 29 E. and of the **SURVEY** of the Subdivision Lines of Township 25 North, Range 29 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Sidney E. Blout, U.S. Cadastral Engineer.

under his special instructions dated March 11, 1919 for Group 96 Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the **resurveys and surveys** they describe, are hereby approved.

Samuel Johnson
 U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in _____ has been correctly copied from the original notes on file in this office.