

FIELD NOTES

OF THE RESURVEY TOP

the First Standard Parallel South thru Range 9 East

East Boundary

North Boundary

and

Subdivision Lines of

Township 5 South, Range 9 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Dupree R. Averill, U.S. Surveyor

Roger F. Wilson, U.S. Transitman

Otis O. Gould, U.S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated January 5, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, January 17, 1928, and Assignment Instructions dated February 1, 1928.

Resurvey commenced February 20, 1928.

Resurvey completed February 27, 1928.

INDEX DIAGRAM.

Township , Range


6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

1A

Book "C"
 Group 150 Arizona
 Township 5 South, Range 9 East

INDEX DIAGRAM

BOOK 3836

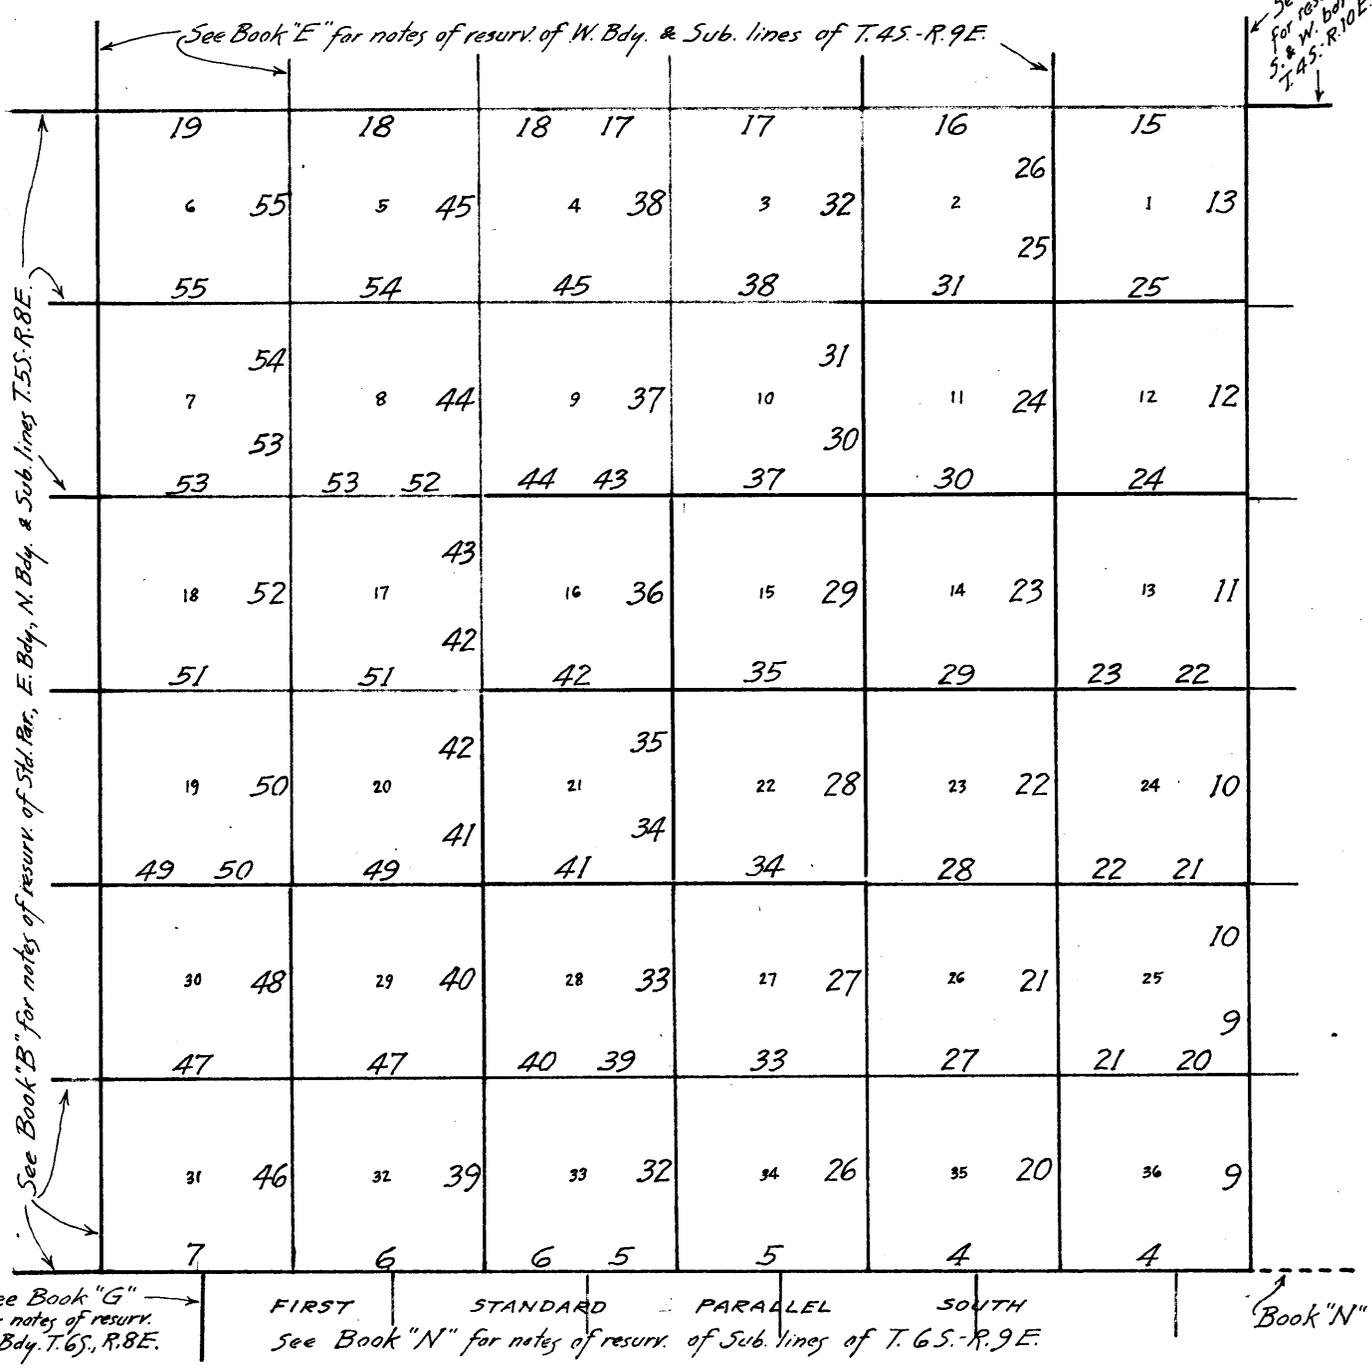

- Resurveyed by Dupree P. Averill, U.S. Surveyor, under instructions Group 150.
- Resurveyed by Roger F. Wilson, U.S. Transitman, under instructions Group 150.
- Resurveyed by Otis O. Gould, U.S. Transitman, under instructions Group 150.
- - - - - Retraced " " " " " " " " " " " "
- Accepted surveys, resurveys and retracements.

The resurveys herein described were commenced February 20, 1928, and executed by Dupree R. Averill, U.S. Surveyor, and Roger F. Wilson and Otis O. Gould, U.S. Transitmen, using Buff Solar transits Nos. 17992, 9984 and 10125, respectively. The instruments are equipped with Smith solar attachments and otherwise conform to the standard requirements of the General Land Office. Unless otherwise specified all azimuth determinations are accomplished with the solar attachment.

PRELIMINARY FIELD TEST
of
Buff Transit No. 17992
by
Dupree R. Averill, U.S. Surveyor.

February 11, 1928: at camp near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude $33^{\circ}02'N$. and longitude $111^{\circ}22\frac{1}{2}'W$., examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 10h 09m p.m., l.m.t., observe Polaris at western elongation, making four observations two each with the telescope in direct and reversed positions and marking the mean point in the line thus determined by a tack set in top of a peg, driven firmly in the ground about 5 chs. N.

Azimuth of Polaris at western elongation is $1^{\circ}17'07''$.

February 12: lay off the azimuth of Polaris, $1^{\circ}17'$ to the east and mark the meridian thus determined by a nail driven in a peg about 5 chs. N.

February 19: at 9h 0m a.m., app. t., set off $33^{\circ}02'N$ on the latitude arc, $11^{\circ}31\frac{1}{2}'S$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $11^{\circ}29'S$., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $11^{\circ}26'S$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

No corrections for vertical angles, to reduce slope measurements to true horizontal distances were required in this township.

PRELIMINARY FIELD TEST
of
Buff transit No. 9984
by
Roger F. Wilson, U. S. Transitman

February 19, 1928: at the same station, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meri-

dian, Arizona, latitude $33^{\circ}02'N.$ and longitude $111^{\circ}22\frac{1}{2}'W.$, examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off $33^{\circ}02'N.$ on the latitude arc; $11^{\circ}31\frac{1}{2}'S.$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $11^{\circ}29'S.$, which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $11^{\circ}26'S.$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

No corrections for vertical angles to reduce slope measurements to true horizontal distances were necessary in this township.

PRELIMINARY FIELD TEST

of

Buff transit No. 10125

by

Otis O. Gould, U.S. Transitman.

February 19, 1928: at the same station, near the center of sec. 36, T.4 S., R.9 E., G. and S.R. Base and Meridian, Arizona, latitude $33^{\circ}02'N.$ and longitude $111^{\circ}22\frac{1}{2}'W.$, examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0m a.m., app.t., set off $33^{\circ}02'N.$ on the latitude arc, $11^{\circ}31\frac{1}{2}'S.$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $11^{\circ}29'S.$ which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $11^{\circ}26'S.$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

No corrections for vertical angles to reduce slope measurements to true horizontal distances were necessary in this township.

Resurvey of the First Standard Parallel South
thru
Range 9 East.

chairs

The First Stand. Par. S. thru R.9 E., was surveyed by R.W. Norris, U.S.D.S.; in 1869. The survey was made from west to east and terminated with the establishment of the stand. cor. for Rs.9 and 10 E.

In 1891, D. Drummond, U.S.D.S., retraced and resurveyed the 1st Stand. Par. S. thru R.9 E., reconstructing or reestablishing stand. cors. and 2 sec. cors. where needed.

In 1884, J. B. Mc Laughlin, U.S.D.S., reestablished, (or reconstructed) the stand. cor. of T.5 S., Rs.9 and 10 E., after retracement of the W.bdy. of T.5 S., R.10 E., thence ran east on a survey of the 1st Stand. Par. S., thru R.10 E.

In 1911, W.H. Elliott, U.S.S., retraced and resurveyed the W.bdy. of T.5 S., R.10 E., and reestablished (or reconstructed) the Stand. cor. of Rs.9 and 10 E., in connection with his subsequent survey of the W. part of T.5 S., R.10 E.

No other resurvey or retracement of the 1st stand. par. S. in R.9 E. is of record.

The following notes describe a dependent resurvey of the 1st stand. par. S. thru R.9 E., preserving the alignment bet. the orig. stand. cor. of T.5 S., Rs.9 and 10 E. and the accepted point for stand. cor. of T.5 S., Rs.8 and 9 E.

Retracement for Resurvey

From true point for stand. cor. of T.5 S., Rs.8 and 9 E., described in book "B".

East on a random line on 1st stand. par. S., thru R.9 E., making diligent search for orig. cors. and 1/4 sec. cors. at record distances, without success, and setting temp. cors. at such distances.

467.40 Fall 5.03 chs. N. of the (Elliott) stand. cor. of T.5 S., Rs.9 and 10 E.

Resurvey

The stand. cor. of T.5 S., Rs.9 and 10 E., as reconstructed by Surveyor Elliott, is an ironwood stake 4 ins. sq. 2 ft. long lying on a mound of earth and witnessed by pits N., E. and W., The visible marks on stake are R IXEIXLXVI on one side and RXE on another side.

In the mound of earth, set an iron post 3 ft. long 3 ins. diam. 33 ins. in ground, deposit stake alongside of post, for stand. cor. of T.5 S., Rs.9 and 10 E., with brass cap marked

S C
T 5 S
R 9 E R 10 E
S 36 S 31

1928

and set 2 iron posts, each 3 ft. long 1 in. diam. 33 ins in ground at points N.45°E., and N.45°W., 64 lks. dist., each similarly marked, with addition of WC in quadrants of brass caps nearest the true cor.

4.

Resurvey of the First Standard Parallel South
thru
Range 9 East.

chains

A stand. cor. of T.5 S., Rs.9 and 10 E, which is a stake 3 ins. diam. 3 ft. long, lying on a mound of earth and witnessed by pits N., E. and W., marked but marks illegible, bears N.76°28'E., 11.28 chs. dist. This cor. was overlooked by Surveyor Elliott, in 1911, but as all effective disposals in T.5 S., Rs.9 and 10 E. are based on the Elliott cor., destroy the above cor.mon.

Thence, N.89°23'W. on true line on S. bdy. of sec. 36.

Over level land, thru timber and brush.

35.00 Wash, 15 lks. wide, course NW.

38.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 36

1928

and set 2 similar iron posts, one each N.45°W. and S.45°E., 64 lks. dist., similar set and marked, with addition of WC in quadrants of brass caps nearest true cor.

77.90 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for stand. cor. of secs. 35 and 36, with brass cap marked

S C
T 5 S R 9 E
S 35 | S 36

1928

and set 2 iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground at points N.45°E., and N.45°W., 64 lks. dist., for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Ironwood.

Undergrowth: Greasewood, mesquite, cacti and grass.

N.89°23'W. on true line on S. bdy. sec. 35.

Over level land, thru timber and brush.

8.20 Wash, 20 lks. wide, course NW.

13.50 Wash, 20 lks. wide, course NW.

38.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 35

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked with addition of WC in quadrants of brass caps nearest true cor.

True cor. is set in wash, 15 lks. wide, course N.70°W.

75.00 Old road, bears N. and S.

77.90 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground

Resurvey of the First Standard Parallel South
thru
Range 9 East.

chains

for stand. cor. of secs. 34 and 35, with brass cap marked

S C
T 5 S R 9 E
S 34 | S 35

1928

At points N.45°E. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest true corner.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Ironwood.
Undergrowth: Greasewood, mesquite, cacti and grass.

N.89°23'W. on true line on S. bdy. of sec. 34.
Over level land, thru timber and brush.

38.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 34

1928

At points N.45°E. and S.45°W., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest true corner.

77.90 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for stand. cor. of secs. 33 and 34, with brass cap marked

S C
T 5 S R 9 E
S 33 | S 34

1928

At points N.45°E. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest true corner.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Ironwood.
Undergrowth: Greasewood, mesquite, cacti and grass.

N.89°23'W. on true line on S. bdy. of sec. 33.
Over level land, thru timber and brush.

38.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 33

1928

At points N.45°E. and N.45°W., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest true corner.

6.

Resurvey of the First Standard Parallel South
thru
Range 9 East.

chains

77.90 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for stand. cor. of secs. 32 and 33, with brass cap marked

S C
T 5 S R 9 E
S 32 | S 33

1928

At points N.45°E. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest true corner.

Land: Level.

Soil: Clayloam, 2d rate.

Timber: Ironwood.

Undergrowth: Greasewood, mesquite, cacti and grass.

N.89°23'W. on true line on S. bdy. of sec. 32.
Over level land, thru timber and brush.

26.15 Center of Florence Canal, 40 lks. wide, course S.20°W.
Leave timber, continue thru brush.

28.20 Unimproved road, bears NE. and SW. alongside canal.

38.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 32

1928

At points N.45°E. and N.45°W., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked with addition of WC in quadrants of brass caps nearest the true corner.

42.70 Unimproved road, bears NE. and SW. to ranch house.

55.88 Yard fence, bears S.5°W. and N.5°E., 35 lks. thence W.

59.05 Yard fence, bears S.5°W. and N.5°E., 34 lks., thence E.

59.60 Canal, 15 lks. wide, course SW.

61.25 Same road, bears N. and S.

61.38 Fence, extends S.5°W. and N.5°E. 40 lks., thence W., continue along north side of cleared field.

77.90 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for stand. cor. of secs. 31 and 32, with brass cap marked

S C
T 5 S R 9 E
S 31 | S 32

1928

At points N.45°E., and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 2d rate.

Timber: Ironwood, in E. 20 chs.

Undergrowth: Greasewood, mesquite and cacti.

8.

Resurvey of the East Boundary
of
T. 5 S., R. 9 E.

chains	
	The East Boundary of T.5 S.,R.9 E. was surveyed by R.W. Norris, U.S.D.S., in 1869. The survey was made on a true line from south to north, between Tp. cors. of his own establishment.
	In 1911, W.H. Elliott, U.S.S., retraced and resurveyed the E. bdy. of T.5 S., R.9 E., in connection with his subsequent survey of the west part of subdivisions in T.5 S., R.10 E.
	No other resurvey or retracement of the E.bdy. of T.5 S., R.9 E. is of record.
	The following notes describe a dependent resurvey of the E.bdy. of T.5 S., R.9 E., preserving the alinement bet. all orig. (Elliott) cors. and $\frac{1}{4}$ sec. cors. existing, or recovered points for such cors.
	----- Retracement for resurvey true point for-----
	From the cor. of Ts. 4 and 5 S., Rs.9 and 10 E., hereinafter described.
	S.0°50'W. on random line, on E. bdy. of sec. 1.
40.00	Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.
80.14	Fall 16 lks. W. of cor. of secs. 1 and 12.

	Thence, S.0°50'W. on random line on E. bdy. sec. 12.
.95	Intersect closing cor. secs. 6 and 7, T.5 S., R.10 E.
40.10	Fall 9 lks. W. of $\frac{1}{4}$ sec. cor.
80.32	Fall 11 lks. W. of cor. of secs. 12 and 13.

	Thence, S.0°50'W. on random line on E. bdy. sec. 13.
.79	Intersect closing cor. secs. 7 and 18, T.5 S., R.10 E.
40.17	Fall 3 lks. E. of $\frac{1}{4}$ sec. cor.
80.37	Fall 7 lks. W. of cor. of secs. 13, 18, 19 and 24.

	Thence, S.0°50'W. on random line bet. secs. 19 and 24.
40.26	Fall 4 lks. W. of point for $\frac{1}{4}$ sec. cor.
80.54	Fall 5 lks. W. of point for cor. of secs. 19, 24, 25 and 30.

	Thence, S.0°50'W. on random line bet. secs. 25 and 30.
40.00	Find no trace of $\frac{1}{4}$ sec. cor.; set temp. cor.
80.46	Fall 2 lks. W. of point for cor. of secs. 25, 30, 31 and 36.

	Thence, S.0°50'W. on random line bet. secs. 31 and 36.
40.26	Fall 3 lks. W. of point for $\frac{1}{4}$ sec. cor.
80.36	Fall 7 lks. W. of the stand. cor. of T.5 S., Rs.9 and 10 E., hereinbefore described.

Resurvey of the First Standard Parallel South
thru
Range 9 East.

3886

chains	<p>N.89°23'W. on true line on S. bdy. of sec. 31. Over level land, along north side of cleared field.</p> <p>Fence extending E. and W. bears N.,45 lks. dist.</p> <p>34.75 Fence extends S. and N.,16 lks. to cor., thence E.; continue thru brush.</p> <p>36.00 Road, bears N.85°E. and S.85°W., 3 chs., thence west.</p> <p>37.80 Cor. of fences extending N. and W. bears N.,42 lks.dist.</p> <p>38.95 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for stand. $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center; margin: 10px 0;"> <p>S C <u>$\frac{1}{4}$ S 31</u> 1928</p> </div> <p>At points N.45°E. and N.45°W., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.</p> <p>55.00 Fence, extends E. and W. Continue along N. side.</p> <p>77.45 Fence, extends N. and S.,50 lks. to cor. of fences, thence E.</p> <p>77.90 The stand. cor. of T.5 S., Rs. 8 and 9 E., described in Book "B".</p> <p style="margin-left: 40px;">Land: Level. Soil: Clayloam, 2d rate, and 1st rate. No timber. Undergrowth: Greasewood, mesquite, sage and cacti.</p> <hr style="border-top: 1px dashed black;"/>
--------	---

Resurvey of the East Boundary
of
T. 5 S., R. 9 E.

chains

RESURVEY

Thence,
N.0°46'E. on true line bet. secs. 31 and 36. (S½.)
Over level land, thru timber and brush.


19.48 Old winding road, bears NW. and SE.

24.20 Wash, 10 lks. wide, course NW.

32.00 Wash, 12 lks. wide, course W.

40.10 Point for ¼ sec. cor., determined from charred remains
of stake in a mound of earth midway between filled in
pits N. and S.

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for ¼ sec. cor., with brass cap marked




From which; the new bearing trees:
An ironwood, 16 ins. diam. bears S.41½°E., 310 lks. dist.
marked ¼ S 31 BT.
An ironwood, 20 ins. diam. bears N.59½°W., 376 lks. dist.
marked ¼ S 36 BT.

Thence, N.0°46'E., on true line bet. secs. 31 and 36. (N½.)
Over level land, thru timber and brush.

35.00 Wash, 15 lks. wide, course NW.

40.26 Point for cor. of secs. 25, 30, 31 and 36, determined from
deposit of charcoal in mound of earth between filled in
pits NE., SE., SW., and NW.

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 25, 30, 31 and 36, with brass cap marked

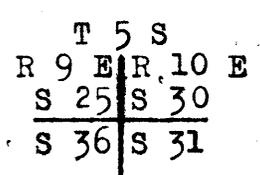

At points N.45°W; and S.45°E., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam. 33 ins. in ground
for wit. cors., similarly marked with addition of WC in
quadrants of brass caps nearest the true corner.


Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Ironwood and paloverde.
Undergrowth: Greasewood, mesquite, cacti and grass.

N.0°49'E. on true line bet. secs. 25 and 30.
Over level land, thru timber and brush.

11.60 Wash, 10 lks. wide, course W.

20.00 Wash, 10 lks. wide, course W.

40.23 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for ¼ sec. cor., with brass cap marked



10.

Resurvey of the East Boundary
of
T. 5 S., R. 9 E.

chains

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked with addition of WC in quadrants of brass caps nearest the true corner.

40.48 Wash, 10 lks. wide, course N.70°W.


46.23 Old winding road, bears NW. and SE.

61.90 Old road, bears NE. and SW.

78.60 Wash, 10 lks. wide, course NW.

80.46 Point for cor. of secs. 19, 24, 25 and 30, determined from charcoal in earth mound and orig. bearing trees.

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 19, 24, 25 and 30, with brass cap marked



1928 from which

The old bearing trees:

An ironwood, 12 ins. diam. bears N.79 1/2°E., 45 lks. dist. marked T 5 S R 10 E S 19 BT.

An ironwood, 10 ins. diam. bears N.74 1/2°W., 174 lks. dist. marked T 5 S R 9 E S 24 BT.

And set 2 iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, at points N.45°W. and S.45°E., 64 lks. dist., for wit. cors. to true cor., similarly marked, with addition of WC in quadrants of brass caps nearest true cor.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Ironwood and paloverde.


Undergrowth: Greasewood, mesquite, cacti and grass.

N.0°49'E. on true line bet. secs. 19 and 24. (S 1/2.)
Over level land, thru timber and brush.

2.70 Old winding road, bears NW. and SE.

40.28 Point for 1/4 sec. cor., determined from mound of earth between filled in pits to N. and S.

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set 2 similar iron posts, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Thence, N.0°47'E. on true line bet. secs. 19 and 24. (N 1/2.)

19.50 Wash, 10 lks. wide, course W.


40.26 The cor. of secs. 13, 18, 19 and 24, remains of a stake in

Resurvey of the East Boundary
of
T. 5 S., R. 9 E.

chains

earth mound, witnessed by pits, crosswise in the sections.

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 13, 18, 19 and 24, with brass cap marked



at points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Ironwood and paloverde.
Undergrowth: Greasewood, mesquite, cacti and grass.

N.0°42'E. on true line on E.bdy. sec. 13. (S½.)
Over level land, thru scattering desert growth.

38.76 Wash, 8 lks. wide, course W.

40.20 The ¼ sec. cor., which is a mesquite stake, 12 ins. long, 3 ins. in diam., scribe marks no longer legible, lying on the ground between pits, N. and S. As this is now the ¼ sec. cor. sec. 13, only, in place of stake, which is deposited alongside:

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for ¼ sec. cor. sec. 13, only, with brass cap marked



at points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.


Thence, N.0°52'E. on true line on E.bdy. sec. 13. (N½.)

36.42 Center of highway, No. 80, bears S.30¼°E. to Tucson and N.30¼°W. to Florence.

38.50 Old winding road, bears SE. and NW.

39.38 The clos. cor. of secs. 7 and 18, T.5 S., R.10 E., which is a stake 6 ins. sq., 10 ins. above ground, marked S7 on N., CC on E. and S.18 on S. side. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for clos cor. of secs. 7 and 18, T.5 S., R.10 E., with brass cap marked



and raise

a mound of stone 2 ft. base 1½ ft. high east of corner.


40.17 The orig. cor. of secs. 7, 12, 13 and 18, which is an iron-wood stake 6 ins. sq., 12 ins. above ground, scribe marks no longer legible. This is now the cor. of secs.

Resurvey of the East Boundary
of

T. 5 S., R. 9 E.

chains 12 and 13, only. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 36 ins. in ground for cor. of secs. 12 and 13, only, with brass cap marked



At points N.45°W. and S.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.


Land: Level.
Soil: Clayloam, gravelly, 2d rate.
Timber: Ironwood and paloverde.
Undergrowth: Greasewood, mesquite, cacti.

N.0°49'E. on true line on E.bdy. of sec. 12. (S 1/2)
Over level land, thru desert growth.

- 10.00 Wash, 10 lks. wide, course NW.
- 12.64 Old winding road, bears NW. and SE.
- 21.00 Wash, 40 lks. wide, course N.; thence along wash.
- 26.70 Leave wash, course N.15°W.

40.22 The 1/4 sec. cor., which is a mesquite stake, 3 ins. sq., 3 ins. above ground, scribe marks no longer visible. As this is now the 1/4 sec. cor. of sec. 12, only; in place of stake, which is deposited alongside:

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., sec. 12, only, with brass cap marked




At points N.45°W. and S.45°W., 64 lks. dist., set similar iron posts, for wit. cors., similar set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

Thence, N.0°42'E. on true line on E.bdy. of sec. 12. (N 1/2)

- 20.20 Wash, 15 lks. wide, course W.
- 21.20 Old winding road, bears E. and W.

39.15 The clos. cor. of secs. 6 and 7, T.5 S., R.10 E., which is the remains of a stake in small mound of dirt, witnessed by a mound of dirt E., and pits N., S. and E. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for clos. cor. of secs. 6 and 7, T.5 S., R.10 E., with brass cap marked




and raise a mound of stone 2 ft. base 1 1/2 ft. high east of corner.

Resurvey of the East Boundary
of
T. 5 S., R. 9 E.

chains

40.10 The charred remains of orig. cor. of secs. 1,6,7 and 12, in a mound of earth, witnessed by mound of earth to W. and pits NW, and SW. This is now the cor. of secs. 1 and 12, only; in place of remains of orig. cor., which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 1 and 12, only, with brass cap marked

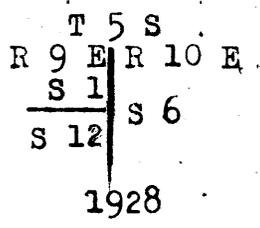

At points N.45°W. and S.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clay loam, gravelly, 1st and 2d rate.
Timber: Ironwood and paloverde.
Undergrowth: Greasewood, mesquite, cacti.

N.0°43'E. on true line on E. bdy. of sec. 1.
Over level land, thru desert growth.

- 1.25 Wash, 20 lks. wide, course W.
- 21.50 Old winding road, bears E. and W.
- 32.00 Florence Canal, 60 lks. wide, course SW. (new)
- 33.64 Telephone line, cor. pole bears S.61°22'W.
- 33.94 Old road, bears NE. and SW.
- 40.07 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor. sec. 1, only, with brass cap marked



a marked (X) stone alongside of post, at base.

Administration building at Ariz. state prison bears N.25 1/2°W.
A residence bears N.60°W., about 20 chs. dist.
A cemetery bears E., about 5 chs. dist.

- 40.90 Winding road, bears NE. and W.
- 52.10 Canal, 40 lks. wide, course SW. Enter field (old Florence Canal)
- 53.50 Fence, bears E. and W.
- 68.63 Fence, bears E. and W.
- 79.80 Fence, bears E. and W. Leave field.

80.14 True point for cor. of Ts.4 and 5 S., Rs.9 and 10 E., determined from point for wit. cor., which has been accurately recovered from bearings given in the resurvey record of the W. bdy. of T.5 S., R.10 E., by Surveyor Elliott, in 1911.

As the irrigation ditch no longer runs thru true point for cor., at that point,

Set an iron post 3 ft. long 3 ins. diam. 37 ins. in ground for cor. of Ts.4 and 5 S., Rs.9 and 10 E., with brass

14.

Resurvey of the East Boundary
of
T. 5 S., R. 9 E.

chains

cap marked

	T 4 S	
R 9 E	S 10 E	
S 36	S 31	
S 1	S 6	

T 5 S

1928

at points N.45°E. and N.45°W., 90 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 34 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

(Elliott's)

The point for wit. cor. of Ts.4 and 5 S., Rs.9 and 10 E., bears E., 42 lks. dist.

Flag pole on Administration building of Arizona state prison bears S.38°06'W.

Flag pole at Florence High School bears S.59°35'W.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Ironwood.

Undergrowth: Greasewood, mesquite and cacti, where not cleared.

Resurvey of the North Boundary
of
T. 5 S., R. 9 E.

3836

chains

The north boundary of T.5 S., R.9 E. was surveyed by R. W. Norris, U.S.D.S., in 1869. The survey was made from west to east on a true line and the Tp. cor. established at its termination.

There is no retracement or resurvey of the north boundary of T.5 S., R.9 E. of record.

The following notes describe a dependent resurvey of the N.bdy. of T.5 S., R.9 E., preserving the alinement bet. the NE. Tp. cor., accepted point for cor. of secs. 2,3,34 and 35, and the NW. cor., and reestablishing all other $\frac{1}{4}$ sec. and sec. cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts.4 and 5 S., Rs.8 and 9, E., described in Book "B".

East on a random line thru R. 9 E., setting temp. cors. at intervals of 40.00 chs. and making diligent search for orig. cors. at such distances, without success.

317.36 Fall 83 lks. N. of accepted point for cor. of secs. 2,3, 34 and 35.

477.52 Fall 125 lks. N. of the cor. of Ts.4 and 5 S., Rs.9 and 10 E., hereinbefore described.


RESURVEY

Thence, N.89°51'W. on true line bet secs. 1 and 36.

Over level land, along S. side of Florence-Winkelman highway. Cultivation to N. and S.

- 10.40 Cor. of fences extending E.,W. and N., bears N., 110 lks. dist.
- 11.50 E. end of pavement, on highway. State prison grounds to S.
- 11.60 Improved road, bears S. to main building of state prison.
- 12.20 SW. cor. of house bears N., 160 lks. dist.
- 14.40 SW. cor. of building bears N., 190 lks. dist.
- 38.65 House bears N., 210 lks. dist.

40.04 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

34 ins. in ground, and set 2 similar iron posts, at points N. and S., each 90 lks. dist., similarly marked, with addition of WC in halves of brass caps nearest the true corner.

West end of pavement on highway bears N., 30 lks. dist. Telephone lines extending E. and W. bears S., 18 lks. dist.

40.30 Improved road, bears N. and S., marks E. limits of Florence townsite. Continue on a blank line thru city of Florence, along S. side of 80 ft. highway, between residences.

79.00 Main street of Florence, Highway No. 80, bears N. and S.

80.08 Point for cor. of secs. 1,2,35 and 36, being within the city limits, is not remonumented.

16.

Resurvey of the North Boundary
of
T. 5 S., R. 9 E.

chains

Land: Level.
Soil: Clay loam, 1st rate.
No timber.
Land under cultivation.

N.89°51'W. on true line bet. secs. 2 and 35.
Over level land, thru city of Florence, along street.

19.40 Street extending N. and S. West limits of city of Florence.

19.90 Cor. of fences extending N. and W. bears N. 100 lks. dist.

20.30 Cor. of fences extending S. and W. bears S. 20 lks. dist.
Continue along road between cultivated fields.

27.00 Cor. of fences extending E., W. and N. bears N. 80 lks. dist.

39.64 Cor. of fences extending E., W. and N. bears N., 51 lks. dist.

39.69 Cor. of fences extending E. and S. bears S. 34 lks. dist.;
cor. of fences extending N., S. and W. bears S., 49 lks. dist.

40.04 Set an iron post 3 ft. long 1 in. diam. 44 ins. in ground
on S. side of road, for $\frac{1}{4}$ sec. cor., with brass cap
marked

$\frac{1}{4}$ S 35
S 2

1928

At points N.45°E. and S.45°W., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam. 34 ins. in ground
for wit. cors., with brass caps similarly marked, with
addition of WC in quadrants nearest the true corner.

44.70 Cor. of fences extending E., W. and S. bears S., 50 lks. dist.

49.70 Cor. of fences extending N. and E. bears N., 60 lks. dist.

54.70 Cor. of fences extending N. and W. bears N., 55 lks. dist.

56.20 House bears N., about 6 chs. dist.

58.10 Cor. of fences extending N. and E. bears N., 55 lks. dist.

59.80 Cor. of fences extending N., E. and W. bears N., 55 lks. dist.

61.10 Cor. of fences extending E., W. and N., bears N., 50 lks. dist.

61.60 SE. cor. of house bears N., about 7.50 chs. dist.

78.50 Road bears E. and NW.; continue over field.

80.08 Accepted point for cor. of secs. 2, 3, 34 and 35, deter-
mined from collateral evidence, i.e., property fence
line extending N. and S.

Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground,
Under fence extending N. and S., for cor. of secs. 2, 3,
34 and 35, with brass cap marked

T 4 S R 9 E
S 34 S 35
S 3 S 2
T 5 S

1928

At points N. and S., each 45 lks. dist., set iron posts,
3 ft. long 1 in. diam. 34 ins. in ground, similarly
marked, with addition of WC in halves of brass caps
nearest the true corner.

Cor. of fences extending N., S. and E. bears S. 55 lks. dist.

Cor. of fences extending S. and NW. bears N. 125 lks. dist.

Resurvey of the North Boundary
of
T. 5 S., R. 9 E.

3836

chains


Land: Level.
Soil: Clay loam, 1st rate.
Land cleared and under cultivation.

N.89°51'W. on true line bet. secs. 3 and 34.
Over level land, thru cultivated field.

20.00 House bears N., about 15 chs. dist.

27.54 Dry ditch, 5 lks. wide, course N.

39.67 Set an iron post 3 ft. long 1 in. diam. 44 ins. in ground,
in grain field, for 1/4 sec. cor., with brass cap marked




1928 and deposit

a marked (X) stone alongside of post, at base.

63.35 Fence, extends NE. and SW.; leave cultivated field, con-
tinue thru desert growth.

63.50 Left bank of Gila River bottom land, bears NE. and SW.;
continue over bottom land, thru scattering timber.

79.34 Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground
for cor. of secs. 3,4,33 and 34, with brass cap marked



1928 and deposit

a marked (X) stone alongside of post, at base.

A cottonwood, 10 ins. diam. bears S.81 1/2°E., 116 lks. dist.
marked T 5 S R 9 E S 3 BT.

A cottonwood, 12 ins. diam. bears N.85 1/2°W., 338 lks. dist.
marked T 4 S R 9 E S 33 BT.


No other trees in limits.

Land: Level.
Soil: Claylike loam and silt, 1st rate.
Undergrowth: Soapweed, greasewood and willow.
Timber: Cottonwoods.

N.89°51'W. on true line bet. secs. 4 and 33.
Over bottom land, thru scattering timber and brush.

9.10 Fence, bears NE. and SW.

39.67 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928 from which

A cottonwood, 10 ins. diam. bears S.61 1/2°W., 310 lks. dist.
marked 1/4 S 4 BT.

Resurvey of the North Boundary
of

T. 5 S., R. 9 E.


chains

A cottonwood, 8 ins. diam. bears N.68°W., 190 lks. dist.
marked $\frac{1}{4}$ S 33 BT.

51.16 Left bank of Gila River, 140 lks. wide, course SW. (water)

62.55 Gila River, 140 lks. wide, course SW. (water)

79.34 Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground
for cor. of secs. 4, 5, 32 and 33, with brass cap marked.



1928 and deposit

a marked (X) stone alongside of post, at base.


At a point N.89°51'W., 5.00 chs. dist., set an iron
post 3 ft. long 1 in. diam. 34 ins. in ground, for wit.
cor., similarly marked, with addition of WC on E. side
of brass cap.

Land: Level.
Soil: Sandy loam and clay, 2d rate.
Timber: Cottonwoods.
Undergrowth: Willow, mesquite and soapweed.

N.89°51'W. on true line bet. secs. 5 and 32.
Over bottom land, thru scattering timber and brush.

5.00 The wit. cor. to cor. of secs. 4, 5, 32 and 33, described
above.

39.67 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked




1928 from which

A cottonwood, 12 ins. diam. bears S.5 $\frac{1}{2}$ °E., 97 lks. dist.
marked $\frac{1}{4}$ S 5 BT.

A cottonwood, 10 ins. diam. bears N.77 $\frac{1}{2}$ °W. 42 lks. dist.
marked $\frac{1}{4}$ S 32 BT.

79.34 Set an iron post 3 ft. long 2 ins. diam. 34 ins. in
ground, for cor. of secs. 5, 6, 31 and 32, with brass cap
marked



1928 and deposit

a marked (X) stone alongside of post, at base.

At a point N.89°51'W., 7.00 chs. dist., set a similar
iron post, similarly set and marked, with addition of
WC on E. side of brass cap.

Land: Level.
Soil: Sandy loam and clay. 2d rate.
Timber: Scattering cottonwoods.
Undergrowth: willow, mesquite and soapweed.

Resurvey of the North Boundary
of
T. 5 S., R. 9 E.

BOOK 3836

chains N.89°51'W. on true line bet. secs. 6 and 31.
Over bottom land, thru scattering timber and brush.

6.40 North(right)bank of Gila river bottom land, 8 ft. high,
bears NE. and SW.; continue over level land, thru
desert growth.

7.00 The wit. cor. to cor. of secs. 5,6,31 and 32,

9.42 Fence, bears N. and S.

10.00 Canal, 10 lks. wide, course SW.

37.00 A house bears S., about 13 chsi dist.

37.74 Old winding road, bears NW. and SE.

39.67 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 31
S 6

1928

similar

At points N.45°E. and S.45°W., 64 lks. dist., set iron
posts, similarly set and marked, with addition of WC in
quadrants of brass caps nearest the true corner.

40.00 Fence, extends N. and S. 180 lks. to cor. of fences ex-
tending E., W. and S.

48.32 Old winding road, bears NE. and SW.

78.83 Fence, extending NE., 18 lks. to cor. of fences, thence E.
and SW., 30 lks. to cor. of fences, thence S.

79.34 The cor. of Ts. 4 and 5 S., Rs.8 and 9 E., described in
Book "B".

Land: Level.
Soil: Clay loam and sandy, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Boundaries of Township 5 South, Range 9 East.
Latitudes, departures and closing errors.

Line designated	True course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
SOUTH BOUNDARY (1st. Sta. P. 5)	N.89°23'W.	467.40	5.03			467.40
West Boundary	N.1°14'W.	161.24	161.20			3.47
	N.0°05'W.	317.08	317.08			.46
North Boundary	S.89°51'E.	477.52		1.25	477.52	
East Boundary	S.0°43'W.	80.14		80.14		1.00
	S.0°42'W.	40.10		40.10		.49
	S.0°49'W.	40.22		40.22		.57
	S.0°52'W.	40.17		40.17		.61
East Boundary	S.0°42'W.	40.20		40.20		.49
	S.0°47'W.	40.26		40.26		.55
	S.0°49'W.	120.74		120.74		1.72
	S.0°48'W.	40.26		40.26		.56
	S.0°46'W.	40.10		40.10		.54
Convergency					.47	
Totals			483.31	483.44	477.99	477.86
				483.31	477.86	
Error in Latitude				0.13		
Error in Departure					0.13	

20.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

The subdivision lines of T.5 S., R.9 E., were surveyed in 1869, by R.W. Norris, U.S.D.S.

No retracement or resurvey of subdivision lines in T.5 S., R.9 E. is of record.

The following notes describe a dependent resurvey of subdivision lines of T.5 S., R.9 E., controlling cors. being variously determined, from orig. cors., local cors., collateral evidence and proportion.

From the stand. cor. of secs. 35 and 36, on S.bdy. of Tp. hereinbefore described.

N.1°17'E. on true line bet. secs. 35 and 36.
Over level land, thru timber and scattering brush.

18.00 Wash, 10 lks. wide, course NW.

40.15 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked,

$\frac{1}{4}$
S 35 | S 36
1928

at points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, similarly set and marked, with addition of WC in quadrants nearest the true cor., for wit. cors.

54.60 Wash, 10 lks. wide, course W.

59.85 Old winding road, bears N.70°W. and S.70°E.

80.30 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 25, 26, 35 and 36, with brass cap marked

T 5 S R 9 E
S 26 | S 25
S 35 | S 36

1928

At points N.45°W. and S.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clayloam and gravelly, 1st and 2d rate.

Timber: Ironwood and paloverde.

Undergrowth: Greasewood, mesquite, cacti and grass.

From the cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp. hereinbefore described.

N.89°27'W. on true line bet. secs. 25 and 36.
Over level land, thru timber and brush.


2.10 Wash, 15 lks. wide, course NW.

38.57 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

3336

chains



1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.


77.14 The cor. of secs. 25, 26, 35 and 36.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Ironwood and paloverde.
Undergrowth: Greasewood, mesquite, cacti and grass.

N.0°32'E. on true line bet. secs. 25 and 26.
Over level land, thru desert growth.

31.80 Wash, 30 lks. wide, course NW.


40.14 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

80.28 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 23, 24, 25 and 26, with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., with brass caps similarly marked, and WC in quadrants nearest the true corner.

Land: Level.
Soil: Clay loam and adobe.. 1st and 2d rate.
Timber: Paloverde.
Undergrowth: Greasewood, mesquite, cacti and grass.

From the cor. of secs. 19, 24, 25 and 30, on E.bdy. of Tp., hereinbefore described.

N.89°34'W. on true line bet. secs. 24 and 25.
Over level land, thru desert growth.

9.20 Old winding road, bears N. and S.

10.65 Wash, 10 lks. wide, course N.80°W.

38.78 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground

22.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \begin{array}{c} S 24 \\ S 25 \end{array}$$

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

75.00

Wash, 10 lks. wide, course NW.

77.58

The cor. of secs. 23, 24, 25 and 26.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Paloverde.

Undergrowth: Greasewood, mesquite, cacti and grass.

N.1200'E. on true line bet. secs. 23 and 24.
Over level land, thru desert growth.

2.20 Wash, 10 lks. wide, course NW.

28.00 Wash, 15 lks. wide, course NW.

40.14 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \begin{array}{c} S 23 | S 24 \end{array}$$

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

80.28 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 13, 14, 23 and 24, with brass cap marked

$$\begin{array}{c} T 5 S R 9 E \\ S 14 | S 13 \\ S 23 | S 24 \end{array}$$

1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., hereinbefore described.

N.89°42'W. on true line bet. secs. 13 and 24.
Over level land, thru desert growth.

25.40

Old winding road, bears N. and S.

Resurvey of the subdivisions
of
T. 5 S., R. 9 E.

chains

38.65 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

S 13
+ S 24

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked with addition of WC in quadrants of brass caps nearest the true corner.

66.60 Wash, 20 lks. wide, course NW.

77.30 The cor. of secs. 13, 14, 23 and 24.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite, cacti.

N.0°46'E. on true line bet. secs. 13 and 14.
Over level land, thru desert growth.

6.70 Wash, 20 lks. wide, course W.

26.50 Old winding road, bears N.5°E. and S.5°W.

40.14 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

+
S 14 | S 13

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

55.10 Wash, 10 lks. wide, course W.

80.28 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 11, 12, 13 and 14, with brass cap marked

T 5 | S R 9 E
S 11 | S 12
S 14 | S 13

1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains	<p>From the cor. of secs. 12 and 13, only, on E.bdy. of Tp., hereinbefore described.</p> <p>N.89°45'W. on true line bet. secs. 12 and 13. Over level land, thru desert growth.</p> <p>2.20 Center of highway, No.80, bears N.30°W. to Florence and S.30°E. to Tucson.</p> <p>9.50 Old winding road, bears N. and S.</p> <p>24.40 Wash, 10 lks. wide, course S.</p> <p>38.62 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \text{ S } 12 \\ \text{S } 13 \end{array}$ <p>1928</p> <p>At points N.45°W. and S.45°E., 64 lks. ^{33 ins. in ground,} dist., set similar iron posts, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest true corner.</p> <p>48.05 Place cor. of boundary Old road, bears N. and S. ^(about 10 acres)</p> <p>73.08 Old winding road, bears N. and S.</p> <p>77.24 The cor. of secs. 11,12,13 and 14.</p> <p>Land: Level. Soil: Clay loam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and cacti.</p> <hr style="border-top: 1px dashed black;"/> <p>N.0°06'E. on true line bet. secs. 11 and 12. Over level land, thru desert growth.</p> <p>6.60 Wash, 10 lks. wide, course NW.</p> <p>12.70 Wash, 20 lks. wide, course W.</p> <p>40.14 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked</p> $\begin{array}{c} \frac{1}{4} \\ \text{S } 11 \text{ } \text{S } 12 \end{array}$ <p>1928</p> <p>At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in in quadrants of brass caps nearest the true corner.</p> <p>55.10 NW. cor. of fenced cemetery (area about 10 acres) bears S.23°E., 11.18 chs. dist. New Florence-Casa Grande Canal, 50 lks wide, course SW.</p> <p>64.40 Unimproved road, bears NE. and SW.</p> <p>70.20 / Old Florence Canal, 35 lks. wide, course SW.</p> <p>71.00 Highway, bears NW. to Florence and SW. to Casa Grande.</p> <p>79.20 A house bears W., 1.64 chs. dist.</p> <p>80.09 Cor. of fences extending S. and W.,</p>
--------	--


Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

8886

chains

80.28 Accepted point for cor. of secs. 1,2,11 and 12, at proportionate dist. in latitude, at a point N. of cor. of old fences, extending S. and W.

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 1,2,11 and 12, with brass cap marked



1928


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and mesquite.
Undergrowth: Greasewood, mesquite, cacti.

From the cor. of secs. 1 and 12, only, on E.bdy. of Tp., hereinbefore described.

N.89°46'W. on true line bet. secs. 1 and 12.
Over level land, thru desert growth.

27.50 Wash, 1 chain wide, course S.30°E.

39.06 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground for 1/4 sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

40.00 A house bears N., 410 lks. dist.

56.10 New Florence-Casa Grande Canal, 60 lks. wide, course SW.

68.40 Highway No. 80, bears NW. to Florence and SE. to Tucson.

76.60 Old Florence Canal, 40 lks. wide, course SW.

77.78 Highway, bears N. to Florence and S. to Casa Grande.

78.12 The cor. of secs. 1,2,11 and 12.

Land: Level.
Soil: Clayloam and rocky, 2d rate.
Timber: Scattering paloverde and mesquite.
Undergrowth: Greasewood, mesquite and cacti.

N.0°41'W. on true line bet. secs. 1 and 2.
Over level land, along W. side of main street of Florence.
(continuation).

.40 Power line, bears E. and W.

12.00 Junction of roads, bears N. to Florence, SE. to Tucson (highway No.80) and S. to Casa Grande.

Enter Florence city limits, bears E. and W.

30.00 Florence Union High School bears W., about 4 chs. dist.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

40.14 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground on W. side of highway, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 2 | S 1
1928

Continue bearing and measure on blank line along W. side of highway, between residences of Florence.

79.98 The point for cor. of secs. 1, 2, 35 and 36 on N. bdy. of Tp. in the city of Florence, hereinbefore described.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Land is generally under improvement.

From the stand. cor. of secs. 34 and 35, on S. bdy. of Tp. hereinbefore described.

N. $1^{\circ}33'$ E. on true line bet. secs. 34 and 35. over level land, thru desert growth.

13.00 Wash, 20 lks. wide, course N. 60° W.

14.20 Old winding road, bears NW. and SE.

17.10 Old winding road, bears NE. and SW.

40.44 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 34 | S 35
1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

57.52 Wash, 30 lks. wide, course N. 75° W.

78.45 Wash, 30 lks. wide, course N. 50° W.

80.88 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 26, 27, 34 and 35, with brass cap marked

T 5 S R 9 E
S 27 | S 26
S 34 | S 35

1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clay loam and gravelly, 1st and 2d rate.
Timber: Ironwood, mesquite and paloverde.
Undergrowth: Greasewood, mesquite, cacti and grass.

Resurvey of the Subdivisions
of


T. 5 S., R. 9 E.

3886

chains

From the cor. of secs. 25, 26, 35 and 36.
N. 89° 00' W. on true line bet. secs. 26 and 35.
Over level land, thru desert growth.

38.73 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

43.62 Old winding road, bears NW. and SE.

53.10 Wash, 10 lks. wide, course NW.

58.72 Old winding road, bears N. and S.

77.46 The cor. of secs. 26, 27, 34 and 35.


Land: Level.
Soil: Clay loam, gravelly, 1st and 2d rate.
Timber: Ironwood, paloverde and mesquite.
Undergrowth: Greasewood, mesquite, cacti and grass.

N. 0° 28' E. on true line bet. secs. 26 and 27.
Over level land, thru desert growth.

7.50 Wash, 10 lks. wide, course NW.

16.40 Old winding road, bears N. 80° W. and S. 80° E.


40.42 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

80.84 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 22, 23, 26 and 27, with brass cap marked



1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set iron-posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Paloverde and mesquite.
Undergrowth: Greasewood, mesquite, cacti and grass.


Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

From the cor. of secs. 23, 24, 25 and 26.
N. 88° 37' W. on true line bet. secs. 23 and 26.
Over level land, thru desert growth.

38.81

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked with addition of WC in quadrants of brass caps nearest the true corner.

44.90

Wash, 20 lks. wide, course N. 20° E.

47.60

Old winding road, bears N. 20° E. and S. 20° W.

77.62

The cor. of secs. 22, 23, 26 and 27.

Land: Level.

Soil: Clay loam, 1st and 2d rate.


Timber: Paloverde and mesquite.

Undergrowth: Greasewood, mesquite, cacti and grass.

N. 1° 08' E. on true line bet. secs. 22 and 23.
Over level land, thru desert growth.

40.43

Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928


At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

68.60

Wash, 20 lks. wide, course N. 70° W.

80.86

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 14, 15, 22 and 23, with brass cap marked



1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Paloverde and mesquite.

Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.


BOOK 3886

chains

From the cor. of secs. 13, 14, 23 and 24.
N.88°10'W. on true line bet. secs. 14 and 23.
Over level land, thru scattering timber and brush.

14.17 Old winding road, bears N.20°E. and S.20°W.

38.71 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set, and marked, with addition of WC in quadrants of brass caps nearest the true corner.

70.65 Wash, 20 lks. wide, course NW.

77.42 The cor. of secs. 14, 15, 22 and 23.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: Paloverde and mesquite.
Undergrowth: Greasewood, mesquite and cacti.


N.1°33'E. on true line bet. secs. 14 and 15.
Over level land, thru brush and scattering timber.

12.20 New Florence-Casa Grande Canal, 50 lks. wide, course S.20°W.

18.00 Fence, extending N.20°E. and S.20°W.

40.30 Unimproved road, bears N.20°E. and S.20°W.

40.44 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for 1/4 sec. cor., with brass cap marked




1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked with addition of WC in quadrants of brass caps nearest the true corner.

69.73 Old Florence Canal, 40 lks. wide, course S.30°W.

80.88 Accepted point for cor. of secs. 10, 11, 14 and 15, at E. end of center line of highway, bears W. to Casa Grande and NE., in curve, to Florence.

As this is not a suitable place to reestablish a permanent cor. monument, at points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to cor. of secs. 10, 11, 14 and 15, with brass caps marked



And WC in quadrants of brass caps nearest the true cor.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

Land: Level.
Soil: Clay loam and gravelly, 1st and 2d rate.
Timber: Paloverde and mesquite.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 11, 12, 13 and 14.
N. 87° 45' W. on true line bet. secs. 11 and 14.
Over level land, thru desert growth. Scattering timber.

38.26 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} S 11 \\ \frac{1}{4} S 14 \end{array}$$

1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set
similar iron posts, for wit. cors., similarly set and
marked, with addition of WC in quadrants of brass caps
nearest the true corner.

52.60 New Florence-Casa Grande Canal, 60 lks. wide, course S. 20° W.

54.00 Fence, extends N. 20° E. and S. 20° W.

55.40 Unimproved road, bears NE. and SW. along canal.

72.80 Old Florence Canal, 40 lks. wide, course SW.
point for

76.52 The $\frac{1}{4}$ cor. of secs. 10, 11, 14 and 15.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Mesquite.
Undergrowth: Greasewood, mesquite and cacti.

From point for cor. of secs. 10, 11, 14 and 15.
N. 2° 25' W. on true line bet. secs. 10 and 11.
Over level land, thru desert growth.

16.52 Fence, extends E. and W. 4.00 chs. to cor. of fences,
thence N.

36.80 Fence, extends E. and W., 370 lks. to cor. of fences,
thence N. and S.

39.27 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ S 10 | S 11 \end{array}$$

1928

At points N. 48° W. and S. 48° E., 64 lks. dist., set simi-
lar iron posts, for wit. cors., similarly set and marked,
with addition of WC in quadrants of brass caps nearest
the true corner.

51.32 Fence, extends E. and W., 3.60 chs. to cor. of fences,
thence N. and S.

76.49 Fence, extends E. and W., 2.50 chs. to cor. of fences,
thence S.

76.53 Telephone line, extends E. and W.

Resurvey of the Subdivisions

of


T. 5 S., R. 9 E.

BOOK 3836

chains

77.20 Winding road, bears SW. and NE.

78.54 Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground for cor. of secs. 2,3,10 and 11, with brass cap marked



1928 and raise

a mound of stone 2 ft. base 1 1/2 ft. high west of corner.

Land: Level.
 Soil: Clayloam, gravelly, 1st and 2d rate.
 Timber: Mesquite.
 Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 1,2,11 and 12.


N.89°08'W. on true line bet. secs. 2 and 11.
Over level land, thru scattering timber and brush.

11.00 Cross to S. side of fence, bears N.88°W. and S.88°E.

20.34 Fence, extends S. and N., 15 lks. to cor. of fences, thence N. and E.

20.84 Ditch, course S.

39.91 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

Power lines extending E. and W. bears S., 30 lks. dist.

41.74 Cor. of fence extending E., W. and S. bears S., 30 lks. dist.

42.00 A ranch house bears N.

79.40 Winding road, bears NE. and SW.

79.82 The cor. of secs. 2,3,10 and 11.

Land: Level.
 Soil: Clay loam, 1st and 2d rate.
 Timber: Mesquite.
 Undergrowth: Greasewood, mesquite.

Resurvey of the Subdivisions
of
T. 5 S. R. 9 E.

chains

N.0°55'W. on true line bet. secs. 2 and 3.
Over rolling land, thru desert growth.

23.00 Wash, 15 lks. wide, course NW.

34.00 Ditch, 10 lks. wide, course W.

35.30 Improved road, bears E. and W.

35.71 Fence, extends E. and W., 90 lks. to cor. of fences,
thence, W. and N.; enter cultivation and level land.

39.27 Set an iron post 3 ft. long 1 in. diam. 48 ins. inground,
in ploughed field, for $\frac{1}{4}$ sec. cor., with brass cap
marked

$\frac{1}{4}$
S 3 | S 2
1928

From which

A mesquite, 9 ins. diam. bears S.11°E., 4.65 chs. dist.
marked $\frac{1}{4}$ S 2 BT.

A mesquite, 8 ins. diam. bears S.57°W., 2.45 chs. dist.
marked $\frac{1}{4}$ S 3 BT.

Continue line, with ploughed field in sec. 2.

57.31 Fence, extends E. and W. 100 lks. to cor. of fences, thence
N. and S.

79.04 The cor. of secs. 2, 3, 34 and 35, on N.bdy. of Tp., here-
inbefore described.

Land: S $\frac{1}{2}$, rolling; N $\frac{1}{2}$, level.
Soil: Clay loam, 1st and 2d rate.
Timber: Mesquite.
Undergrowth: Greasewood and mesquite.

From the stand. cor. of secs. 33 and 34, on S.bdy. of Tp.,
hereinbefore described.

N.1°28'E. on true line bet. secs. 33 and 34.
Over level land, thru desert growth.

21.00 Wash, 15 lks. wide, course W.

40.31 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 33 | S 34
1928

64 lks. dist.,
At points N.45°W. and S.45°E., set similar iron posts,
for wit. cors., similarly set and marked, with addition
of WC in quadrants of brass caps nearest the true cor.

48.40 Wash, 20 lks. wide, course NW.

80.62 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground
for cor. of secs. 27, 28, 33 and 34, with brass cap marked

T 5 S R 9 E
S 28 | S 27
S 33 | S 34
1928

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

At points N.45°W. and S.45°E., 64 lks.dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Ironwood, paloverde, mesquite.


Undergrowth: Greasewood, mesquite, cacti and grass.

From the cor. of secs. 26,27,34 and 35.
N.89°30'W. on true line bet. secs. 27 and 34.
Over level land, thru desert growth.

1.50 Wash, 20 lks. wide, course NW.

30.10 Wash, 25 lks. wide, course NW.

38.97 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks.dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

77.94 The cor. of secs. 27,28,33 and 34.

Land: Level.

Soil: Clayloam and gravelly, 1st and 2d rate.

Timber: Paloverde, Ironwood and mesquite.


Undergrowth: Greasewood, mesquite, cacti and grass.

N.0°32'E. on true line bet. secs. 27 and 28.
Over level land, thru brush and scattering timber.

31.80 Wash, 15 lks. wide, course N.80°W.

35.60 Wash, 15 lks. wide, course N.80°W.

40.30 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar posts, for wit. cors., similarly set and marked with addition of WC in quadrants of brass caps nearest the true corner.

45.00 An adobe house bears W., about 20 chs. dist.

70.70 Old winding road, bears NW. and SE.

80.60 Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 21,22,27 and 28, with brass cap marked

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

T 5 S R 9 E
S 21 | S 22
S 28 | S 27

1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Adobe house (same) bears S.30°W., about 35 chs. dist.

Land: Level.

Soil: Clay loam, gravelly, 1st and 2d rate.

Timber: Ironwood, paloverde and mesquite.

Undergrowth: Greasewood, mesquite, cacti and grass.

From the cor. of secs. 22, 23, 26 and 27.
N.89°40'W. on true line bet. secs. 22 and 27.
Over level land, thru desert growth.

38.93 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 22
S 27

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

A ranch house bears S.58°W.

77.86 The cor. of secs. 21, 22, 27 and 28.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Paloverde, mesquite and ironwood.

Undergrowth: Greasewood, mesquite, cacti and grass.

N.1°15'E. on true line bet. secs. 21 and 22.
Over level land, thru desert growth.

12.18 An old house bears E., 3.00 chs. dist.

16.18 Old fence, extends NE. and SW.

17.50 New Florence-Casa Grande Canal, 45 lks. wide, course SW.

40.31 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 21 | S 22

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Resurvey of the Subdivisions
of

T. 5 S., R. 9 E.

BOOK 2826

chains

- 64.60 Old Florence Canal, 35 lks. wide, course SW.
- 68.00 Fence, bears NE. and SW. Cor. of fences extending N. and SW. bears NE., 175 lks. dist.
- 80.17 Cor. of fences, extend S. and W.
- 80.62 Accepted point for cor. of secs. 15, 16, 21 and 22, determined from collateral evidence, i.e., center line of road extending E. and W. and projection of fence lines extending N. and S.

Set an iron post 3 ft. long 2 ins. diam. 48 ins. in ground for cor. of secs. 15, 16, 21 and 22, with brass cap marked

T	5	S	R	9	E
S	16	S	15		
S	21	S	22		

1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Mesquite and paloverde.

Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 14, 15, 22 and 23.
N.89°55'W. on true line bet. secs. 15 and 22.
Over level land, thru desert growth.

- 30.42 New Florence-Casa Grande Canal, 40 lks. wide, course SW.
- 31.80 Winding road, bears NE. and SW.
- 38.85 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S	15
	S	22

1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

- 52.40 Old winding road, bears NE. and SW.
- 57.52 Cor. of fences extending N. and W., bears S., 180 lks. dist.
- 67.60 Old Florence Canal, 30 lks. wide, course SW.
- 69.00 Junction of roads, extending NE. and SW. and W.
- 69.42 Cor. of fences extending W. and NE. bears N., 28 lks. dist.
- 77.70 The cor. of secs. 15, 16, 21 and 22.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Mesquite.


Undergrowth: Greasewood, mesquite and cacti.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains


N.0°03'W1 on true line bet. secs. 15 and 16.
Over level land, thru cultivated field.

- .45 Cor. of fences extending N., E. and W.; continue on fence line.
- .67 Ditch, 5 lks. wide, course W.
- 10.30 Fence, extends E. and W.
- 10.57 Lane, extends E. and W.
- 10.87 Fence, extends E. and W. Cor. of fences extending E., W. and N. bears W., 8 lks. dist.; cor. of fences extending E., W. and N., bears W., 68 lks. dist. A lane extends N., between fences.
- 40.57 Cor. of fences extending S. and W. bears W., 76 lks. dist.
- 40.63 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground for 1/4 sec. cor., with brass cap marked
- 40.67 Fence, extends E. and W. Cor. of fences extending N., S. and E. bears W., 14 lks. dist.
- 40.87 A lane extending W., bears W., 50 lks. dist.
- 41.07 Cor. of fences extending N., S. and W. bears W., 14 lks. dist.
- 80.46 Cor. of fences extending N., S. and E.
- 80.81 Cor. of fences extending W. and S.
- 81.26 The cor. of secs. 9, 10, 15 and 16, which is a concrete hub buried in center line of highway (bears E. to Florence and W. to Casa Grande). This cor. is a perpetuation of the orig. cor. as made by county highway engineers.



At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to cor. of secs. 9, 10, 15 and 16, with brass caps marked



And the marks WC in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clay loam, gravelly, 1st and 2d rate.
Timber: Land is under cultivation.

Resurvey of the Subdivisions
of

T. 5 S., R. 9. E.

chains	point for.
	From the cor. of secs. 10, 11, 14 and 15. N.89°37'W. on true line bet. secs. 10 and 15. Over level land, along CasaGrande- Florence highway.
19.80	Cor. of fences extending S. and W. bears S., 45 lks. dist.
39.99	Point for $\frac{1}{4}$ sec. cor. falls in graded highway, a place not suitable for permanent reestablishment of cor. monument.
	At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked
	$\begin{array}{c} \frac{1}{4} S 10 \\ \frac{1}{4} S 15 \\ \hline 1928 \end{array}$
	and WC in quadrants of brass caps nearest the true cor.
59.20	Lane, extends S. from highway.
79.98	The cor. of secs. 9, 10, 15 and 16.
	Land: Level. Soil: Clay loam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.
----- N.2°46'W. on true line bet. secs. 9 and 10. Over level land, thru desert growth.	
.40	Cor. of fences extending N. and W. bears W., 43 lks. dist. line.
21.30	Cor. of fences extending S. and W. bears W., 1 ch. dist.
38.19	Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S 9 S 10 \\ \hline 1928 \end{array}$
	From which A mesquite, 16 ins. diam, bears N.64°E., 299 lks. dist. marked $\frac{1}{4}$ S 10 BT. A mesquite, 8 ins. diam. bears N.21°W., 285 lks. dist. marked $\frac{1}{4}$ S 9 BT.
76.38	The orig. cor. of secs. 3, 4, 9 and 10, which is an old mesquite stake lying alongside old mound of earth, perpetuated, locally, by an iron pipe 2 ins. diam. 12 ins. above ground. No marks remain visible on the stake.
	In place of stake and iron pipe, which are deposited alongside, set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground, for cor. of secs. 3, 4, 9 and 10, with brass cap marked
	$\begin{array}{c} T 5 S R 9 E \\ S 4 S 3 \\ \hline S 9 S 10 \\ \hline 1928 \end{array}$
	and raise
	a mound of stone 3 ft. base 2 ft. high west of corner.
	Land: Level. Soil: Clay loam, 1st and 2d rate. Timber: mesquite. Undergrowth; greasewood, mesquite.

Resurvey of the Subdivisions
of

T. 5 S., R. 9. E.

chains

From the cor. of secs. 2, 3, 10 and 11.
S. 88° 51' W. on true line bet. secs. 3 and 10.
Over level land, thru desert growth.

23.30 Old winding road, bears N. and S.

40.13 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground,
deposit marked (X) stone alongside of post, for $\frac{1}{4}$ sec.
cor., with brass cap marked

$$\frac{1}{4} \begin{array}{c} S 3 \\ S 10 \end{array}$$

1928

and raise

a mound of stone 3 ft. base 2 ft. high north of corner.

Power line, extending E. and W. bears S., 43 lks. dist.
Telephone line extending E. and W. bears S., 120 lks. dist.

54.56 Telephone line extends N. and S.

69.30 Wash, 20 lks. wide, course NW.

71.25 Old winding road, bears NW. and SE.

71.82 Power line, extends E. and W.

80.26 The cor. of secs. 3, 4, 9 and 10.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: Mesquite.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 16' W. on true line bet. secs. 3 and 4.
Over rolling land, thru desert growth.

.38 Power and telephone lines, extend E. and W.

4.80 Improved road, bears NE and SW.

6.00 Fence, extends E. and W.; cor. of fences extending E. and
SW. bears W., 25 lks. dist.; enter cultivated land.
continue over level land.

39.97 Set an iron post 3 ft. long 1 in. diam. 44 ins. in ground,
in cultivated field, for $\frac{1}{4}$ sec. cor., with brass cap
marked

$$\frac{1}{4} \begin{array}{c} S 4 \\ S 3 \end{array}$$

1928

and deposit

a marked (X) stone alongside of post, at base.

44.80 Unimproved road, bears E. and W.

45.00 Ditch, 5 lks. wide, course W.

64.50 Fence, extends NE. and SW.; leave cultivated land.

65.00 Enter Gila River bottom land, bears NE. and SW.

80.78 The cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., here-
inbefore described.

Land: Level and rolling.

Soil: Clay loam, 1st and 2d rate.

Timber: Mesquite.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions

of

T. 5. S., R. 9. E.

BOOK 3886

chains

From the stand. cor. of secs. 32 and 33, on S.bdy. of Tp., hereinbefore described.

N.1°40'E. on true line bet. secs. 32 and 33. Over level land, thru timber and desert undergrowth.

40.51 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4
S 32 | S 33
1928

at points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

63.50 New Florence-Casa Grande Canal, 70 lks. wide, course S.30°W.

65.00 Old winding road, bears NE. and SW., along canal.

78.72 Wash, 10 lks. wide, course NW.

81.02 Accepted point for cor. of secs. 28, 29, 32 and 33, at proportional dist. in latitude on projection of authentic sectional fence line from N.

Set an iron post 3 ft. long 2 ins. diam. 33 ins. in ground for cor. of secs. 28, 29, 32 and 33, with brass cap marked

T 5 S R 9 E
S 29 | S 28
S 32 | S 33

1928

At points N.45°W. and S.45°E., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: Ironwood, mesquite and paloverde.
Undergrowth: Greasewood, mesquite and cacti.

From the cor. of secs. 27, 28, 33 and 34. N.89°06'W. on true line bet. secs. 28 and 33. Over level land, thru desert growth.

38.80 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 28
S 33
1928

At points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

71.00 New Florence-Casa Grande Canal, course SW.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

72.00 Winding road, bears NE. and SW., along side of canal.

77.60 The cor. of secs. 28, 29, 32 and 33.

Land: Level.
Soil: Clay loam, gravelly, 1st and 2 rate.
Timber: Ironwood, paloverde and mesquite.
Undergrowth: Greasewood, mesquite and cacti.


N.0°04'E. on true line bet. secs. 28 and 29.

1.06 Cor. of fences extending N. and W.; continue on fence line.

20.00 House and windmill bear W., about 2' chs. dist.

40.00 Center of Indian Service Canal (concrete), 30 lks. wide, course W.

40.49 Set an iron post 3' ft. long 1 in. diam. 36 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



At points N.45°E. and N.45°W., 64 lks. dist., set similar iron posts 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

41.00 Cor. of fences extending S. and W. bears W., 2 lks. dist.

41.75 Road, unimproved, bears N. and E.; continue along road.

41.98 Cor. of fences extending N. and E. bears E., 51 lks. dist.

51.28 Cor. of fences extending N., E. and S. bears W., 20 lks. dist.

52.25 Center of canal (old Florence canal), 25 lks. wide, course SW.


53.50 Cor. of fences extending SW. and W., bears W., 35 lks. dist.

54.48 Cor. of fences extending NE. and N., bears E., 55 lks. dist.

61.08 Cor. of fences extending S. and W., bears W., 30 lks. dist.

80.98 The cor. of secs. 20, 21, 28 and 29; which is an iron pin in concrete hub under surface of Casa Grande-Florence highway; bears N. and W. This is a perpetuation by the county highway engineers of the orig. cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors. to cor. of secs. 20, 21, 28 and 29, with brass caps marked



1928

and WC in quadrants of brass caps nearest the true cor.

Land: Level.
Soil: Clay loam, 1st and 2d rate.
Timber: mesquite.
Undergrowth; greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains	From the cor. of secs. 21, 22, 27 and 28. N. 88° 56' W. on true line bet. secs. 21 and 28. Over level land, thru desert growth.
9.75	Cor. of fences extending N. and E. bears N., 93 lks. dist.
10.00	Old winding road, bears NW. and SE.
12.15	New Florence-Casa Grande Canal, 50 lks. wide, course SW. bridge over canal bears NE. about 2 chs. dist.
15.45	Winding road, bears N. and S., along side of canal.
18.15	Fence, extends N. and S.; cor. of fences extending S. and W., bears N., 185 lks. dist.
39.13	Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground for 1/4 sec. cor., with brass cap marked
	$\begin{array}{c} \frac{1}{4} \text{ S } 21 \\ \hline \frac{1}{4} \text{ S } 28 \end{array}$
	1928
	At points N. 45° W. and S. 45° E., 64 lks. dist., set simi- lar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.
49.30	Old Florence Canal, 30 lks. wide, course SW.
50.58	Fence, extends N. and S.; cor. of fences extending N., S. and W. bears N., 52 lks. dist.
77.80	Cor. of fences extending N. and E. and S.
78.26	The cor. of secs. 20, 21, 28 and 29.
	Land: Level. Soil: Clay loam, 1st and 2d rate. Timber: Mesquite. Undergrowth: Greasewood and mesquite.

	N. 0° 22' W. on true line bet. secs. 20 and 21. Over level land, along center line of Casa Grande-Florence highway.
.60	Cor. pole of telephone line extending N. and W. bears W., 73 lks. dist.
34.00	An adobe house bears E., 2 chs. dist.
40.06	Cor. of fences extending N., S. and E. bears E., 44 lks. dist.
40.28	Point for 1/4 sect cor. falls in center line of improved highway, a place not suitable for permanent reestablish- ment of cor. monument.
	At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts; each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked
	$\begin{array}{c} \frac{1}{4} \\ \hline \text{S } 20 \text{ S } 21 \end{array}$
	1928

and WC in quadrants of brass caps nearest true point for cor.

42.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

80.11 Cor. of fences extending S. and E. bears E., 45 lks. dist.

80.56 The cor. of secs. 16, 17, 20 and 21, which is a concrete hub in center line of Casa Grande-Florence highway, at intersection of secondary roads extending E. and W. This cor. is a perpetuation, by the county highway engineers, of true point for cor.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors. to cor. of secs. 16, 17 20 and 21, with brass caps marked

T 5	S R 9	E
S 17	S 16	
S 20	S 21	

1928

and WC in quadrants of brass caps nearest the true cor.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood and mesquite.

From the cor. of secs. 15, 16, 21 and 22.
N.88°58'W. on true line bet. secs. 16 and 21:
Over level land, along lane thru desert growth.

40.30 Set an iron post 3 ft. long 1 in. diam. 48 ins. in ground, in road bearing E. and W., for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 16
	S 21

1928

at points N.45°W. and S.45°E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Cor. of fences extending E., W. and S. bears S., 39 lks. dist.
Cor. of fences extending E., W. and N. bears N., 49 lks. dist.
Cultivated land in SW $\frac{1}{4}$ sec. 16, only.

80.60 The cor. of secs. 16, 17, 20 and 21.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood and mesquite.

N.0°10'E. on true line bet. secs. 16 and 17. -Florence
Over level land, along center line of Casa Grande highway.
Cultivated land in sec. 16, only.

.50 Cor. of fences extending N. and E. bears E., 46 lks. dist.

6.62 Unimproved road extends to SW., from highway.


20.42 Cor. of fences extending N., S. and E. bears E., 46 lks. dist.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains
39.95
40.06

Center of culvert in highway, course W.
Point for cor. falls in graded highway, a place not suitable for preestablishment of permanent cor. monument;

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked



and WC in quadrants of brass caps nearest the true point for cor.

Cor. of fences extending N., S. and E. bears E., 46 lks. dist.; cultivation NE. and SE.

Cor. of fences extending N. and W. bears W., 48 lks. dist.; cultivation in NW., only.

Telephone lines, extending N. and S., bear W., 36 lks. dist.


78.30 A house bears W., about 2 chs. dist.

79.68 Cor. of fences extending S. and E., bears E., 46 lks. dist.

79.71 Cor. of fences extending S. and W., bears W., 46 lks. dist.

80.12 The cor. of secs. 8, 9, 16 and 17, which is a concrete hub, 2 ins. under ground, in center line of highway bearing S. to Casa Grande and E. to Florence, at intersection of improved road from W.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 34 ins. in ground for wit. cors. to cor. of secs. 8, 9, 16 and 17, with brass caps marked



and WC in quadrants of brass caps nearest the true cor.

The above concrete hub is a perpetuation by the county highway engineers of true point for corner.

Land: Level.


Soil: Clay loam, 1st rate.

No timber. Land in sec. 16 is cultivated, also N 1/2 in sec. 17. S 1/2 sec. 17 is greasewood and mesquite.

From the cor. of secs. 9, 10, 15 and 16.
N.89°40'W. on true line bet. secs. 9 and 16.
Over level land, along Casa Grande-Florence highway.

40.10 Point for 1/4 sec. cor. falls in graded highway, a place not suitable for reestablishment of permanent cor. monument.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground, for wit. cors. to 1/4 sec. cor., with brass caps marked



Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

and WC in quadrants of brass caps nearest true point for cor.

- 40.56 Cor. of fences extending E., W. and S. bears S. 43 lks. dist.;
- 41.20 Cor. of fences extending E., W. and N. bears N., 43 lks. dist.
- 80.20 The cor. of secs. 8, 9, 16 and 17.

Land: Level.
 Soil: Clay loam, 1st rate.
 Timber: None.
 Undergrowth: Greasewood and mesquite, where not cleared.


N. 0° 16' W. on true line bet. secs. 8 and 9.
 Over level land, thru desert growth in sec. 8, cultivated field in sec. 9., S 1/2 SW 1/4.

- .41 Cor. pole of telephone lines extending E. and S. bears W., 37 lks. dist..
- .50 Cor. of fences extending N. and E. bears E., 4 lks. dist.
- 20.13 Cor. of fences extending S. and E. bears E., 50 lks. dist.
- 39.61 Set an iron post 3 ft. long 1 in. diam. 33 ins. in ground, deposit marked (X) stone alongside of post at base, for 1/4 sec. cor., with brass cap marked



a mound of stone 3 ft. base 2 ft. high west of corner.

- 40.32 Wash, 10 lks. wide, course NW.
- 54.52 Improved road, bears E. and W.
- 55.02 Power lines, extend E. and W.
- 56.02 Fence, extends E. and W.; cor. of fences extending W., N. and E. bears W., 1.00 ch. dist. Cleared land to W.
- 67.70 Ditch, 8 lks. wide, course N., from E.
- 68.62 Cor. of fences extending W., N. and S. bears W., 40 lks. dist.
- 74.22 Ditch, course NW., from S.
- 79.22 Accepted point for cor. of secs. 4, 5, 8 and 9, determined from collateral evidence, i.e., fence cor., fences extending E., W. and S. Alongside cor. post of fence,
Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground for cor. of secs. 4, 5, 8 and 9, with brass cap marked



- From which:
- A mesquite, 4 ins. diam. bears N. 10 3/4° E., 92 lks. dist. marked BT.
 - A mesquite, 4 ins. diam. bears S. 75 1/4° E., 28 lks. dist. marked BT.
 - A mesquite, 4 ins. diam. bears S. 85° W., 66 lks. dist. marked BT.
 - A mesquite, 4 ins. diam. bears N. 58 1/2° W. 126 lks. dist. marked BT.

Land: Level. Soil: Clay loam, 1st rate.
 Timber: none. Undergrowth; greasewood, mesquite.

Resurvey of the Subdivisions

of

T. 5 S., R. 9. E.

chains

From the cor. of secs. 3, 4, 9 and 10.
N. 87° 30' W. on true line bet. secs. 4 and 9.
Over level land, thru desert growth.

- 9.00 Power and telephone lines, extend E. and W.
- 10.60 Improved road, bears NE. and SW.
- 11.20 Fence, extends NE. and SW.; continue along S. side of cultivated field.
- 25.00 Leave cultivated field, continue over cleared land.
- 36.52 Cor. of fences extending S. and W., bears S., 136 lks. dist.

38.43 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground, deposit marked (X) stone alongside post, for 1/4 sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} S 4 \\ \frac{1}{4} S 9 \\ \hline 1928 \end{array}$$

From which
 A mesquite, 4 ins. diam. bears N. 31° W., 320 lks. dist.
 marked BT.
 No other tree in limits.

39.83 Fence, extends N. and S.; cor. of fences extending S. and W. bears N., 240 lks. dist., cor. of fences extending N. and E. bears S., 230 lks. dist.

52.00 Leave cleared land, continue thru dense mesquite brush, bears N. and S.

66.93 Old fence, extends N. and S.

76.86 The cor. of secs. 4, 5, 8 and 9.

Land: Level.
 Soil: Clayloam and sandy, 1st and 2d rate.
 Timber: Mesquite.
 Undergrowth: Mesquite and greasewood.

N. 2° 08' W. on true line bet. secs. 4 and 5.
Over level land, thru dense mesquite brush.

.24 Cor. of fences extending S. and E. bears E., 45 lks. dist.

38.61 Set an iron post 3 ft. long 1 in. diam. 35 ins. in ground for 1/4 sec. cor., with brass cap marked

$$\begin{array}{r} \frac{1}{4} S 5 \\ \frac{1}{4} S 4 \\ \hline 1928 \end{array}$$

From which
 A mesquite, 7 ins. diam. bears S. 67 1/2° E., 79 lks. dist.
 marked 1/4 S 4 BT.
 A mesquite, 6 ins. diam. bears N. 83 1/4° W., 77 lks. dist.
 marked 1/4 S 5 BT.

47.37 Fence, extends E. and W.

49.50 Left bank of Gila River wash, bears E. and W.; continue over bottom land, thru brush.

68.50 The Gila River, 2 chs. wide, course SW. (water)

77.66 The cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp., hereinbefore described.

Land: Level.
 Soil: Clayloam and sandy, 1st and 2d rate.
 Timber: Cottonwood in bottom land.
 Undergrowth: Mesquite, greasewood, willow, soapweed.

8836

Resurvey of the Subdivisions
of

T. 5 S., R. 9 E.

chains

From the stand. cor. of secs. 31 and 32, on S.bdy. of Tp., hereinbefore described.

N. 1° 55' E. on true line bet. secs. 31 and 32. (S 1/2.)
Over level land, thru cultivated field.

.45 Fence, extends E. and W.; leave cultivation, continue thru heavy brush.

1.20 Old road, bears E. and W.; intersection of roads bearing N., E. and W. bears E., 1.40 lks. dist.

40.52 Point for 1/4 sec. cor. at proportionate dist., alignment determined by collateral evidence, i.e.: center line of road bearing W. and S. and property fencing to N.

Set an iron post 3 ft. long 1 in. diam. 39 ins. in ground in road, for 1/4 sec. cor., with brass cap marked

1/4
S 31 | S 32
1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Thence, N. 0° 15' W. on true line bet. secs. 31 and 32. (N 1/2.)
Along center line of road, bears W. and S.

.30 Cor. of fences extending N. and W. bears W., 46 lks. dist.

1.05 Cor. of fences extending N. and E. bears E., 46 lks. dist.
Cultivated land to NE.

19.50 Cor. of fences extending N., S. and W. bears W., 46 lks. dist.
Cultivated land to NW.

40.00 Ditch, 8 lks. wide, course W.

40.16 Cor. of fences extending E. and S. bears E., 47 lks. dist.

Cor. of fences extending W. and S. bears W., 47 lks. dist.

40.50 Point for cor. of secs. 29, 30, 31 and 32, at proportionate dist. in latitude, departure determined from collateral evidence, i.e., center line of road extending N. and S. and property fencing to N. and S.

Set an iron post 3 ft. long 2 ins. diam. 36 ins. in ground at intersection of roads extending N., S., E. and W., for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T 5 S R 9 E
S 30 | S 29
S 31 | S 32
1928

At points N. 55° W., and S. 55° E., 55 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

No timber.

Undergrowth: Mesquite and greasewood.

Resurvey of the Subdivisions
of

T. 5. S., R. 9. E.

chains	From the cor. of secs. 28, 29, 32 and 33.
	N. 89° 25' W. on true line bet. secs. 29 and 32. Over level land, thru heavy brush.
8.90	Old winding road, bears NE. and SW.
28.60	Old Florence canal, 30 lks. wide, course SW.
28.80	Intersection of winding road, extends NE. and SW., and improved road, to W.; continue along S. side of road.
28.90	Cor. of fences extending NE. and W. bears N., 70 lks. dist. cultivated land to NE.
38.78	Dist. for $\frac{1}{4}$ sec. cor. determined by collateral evidence, i.e., fences extending N. and S. from E. and W. fences.
	Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground on S. side of road, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 29 \\ \frac{1}{4} \text{ S } 32 \\ \hline 1928 \end{array}$
	At points N. 45° E. and S. 45° W., 64 lks. dist., set similar iron posts for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.
	Cor. of fences extending N., E. and W. bears N., 67 lks. dist.
	Cor. of fences extending S. and W. bears S., 10 lks. dist.
	Continue along road, between cultivated fields.
50.00	Hay shed bears S., 5 chs. dist.
69.04	Cor. of fences extending E., W. and S. bears S., 22 lks. dist.
79.12	The cor. of secs. 29, 30, 31 and 32.
	Land: Level. Soil: Clayloam, 1st rate. Undergrowth: Greasewood and mesquite. No timber.

	From the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., described in book "B".
	S. 89° 49' E. on true line bet. secs. 30 and 31.
	Over level land, along winding road in lane, thru brush.
	Cultivated land to N. and S. of lane.
41.00	Point for $\frac{1}{4}$ sec. cor. is determined as to departure from collateral evidence, i.e., fences extending N. and S. from E. and W. fences.
	Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 30 \\ \frac{1}{4} \text{ S } 31 \\ \hline 1928 \end{array}$
	At points N. 45° E. and N. 45° W., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.
	Cor. of fences extending E. and S. bears S., 23 lks. dist.
	Cor. of fences extending N., S. and W. bears S., 54 lks. dist.
	Cor. of fences extending E., W. and N. bears N., 49 lks. dist.
	Ditch, course W., bears S., 39 lks. dist.
	Ditch, course W., bears N., 55 lks. dist.
	Cultivated land to N. and S.
71.21	Cor. of fences extending S., E. and W. bears S., 28 lks. dist.
80.71	The cor. of secs. 29, 30, 31 and 32.
	Land: Level. Soil: Clayloam, 1st rate. Undergrowth: mesquite brush and greasewood in lane. No timber.

BOOK 8886

Resurvey of the subdivisions
of

T. 5 S., R. 9 E.

chains

From the cor. of secs. 29, 30, 31 and 32.
N.0°22'W. on true line bet. secs. 29 and 30.
Over level land, along road in lane, between cultivated fields.

- .44 Cor. of fences extending N. and E., bears E., 44 lks. dist.
cor. of fences extending N. and W. bears W., 44 lks. dist.
- .53 Ditch, 8 lks. wide, course W.
- 2.00 An old house bears W., 2 chs. dist.
- 40.00 Center of Indian Service (Pima Lateral) concrete canal,
35 lks. wide, course W. Center line of bridge over canal.
- 40.50 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground,
in road, for $\frac{1}{4}$ sec. cor., with brass cap marked

 $\frac{1}{4}$

S 30 | S 29

1928

At points N.45°W. and N.45°E., 64 lks. dist., set similar iron posts, 33 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

A cross (X) marked on NW. concrete bulwark of bridge bears S.35 $\frac{3}{4}$ °W., 32 lks. dist.

The "2" of "1926" on NE. concrete bulwark of bridge bears S.26 $\frac{3}{4}$ °E., 29 lks. dist.

Roads extending E. and W. from N. and S. road.

- 40.71 Cor. of fences extending N., S. and W. bears W., 49 lks. dist.
- 41.08 Cor. of fences extending N., S. and E. bears E., 42 lks. dist.
- 80.60 Cor. of fences extending E. and S., bears E., 50 lks. dist.
Cor. of fences extending W. and S. bears W., 50 lks. dist.
- 81.00 Accepted point for cor. of secs. 19, 20, 29 and 30, determined from collateral evidence, i.e., center line of Casa Grande-Florence highway, (bears E. and W.) at intersection of secondary road bearing S.; and property fence corners.

As this point comes in graded highway, a place not suitable for reestablishment of permanent cor. monument,

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist. set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to cor. of secs. 19, 20, 29 and 30, with brass caps marked

T 5 S R 9 E

S 19 | S 20

S 30 | S 29

1928

and WC in quadrants of brass caps nearest true point for cor.

Land: Level.

Soil: Clay loam, 1st rate.

Land in secs. 29 and 30 is under cultivation.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

BOOK 2886

Chains	
	<p>From the cor. of secs. 20, 21, 28 and 29. N. 89° 22' W. on true line bet. secs. 20 and 29. Over level land, along Casa Grande-Florence highway, thru desert growth.</p>
39.74	<p>Cor. of fences extending S. and W. bears S., 59 lks. dist. Land to SW. is under cultivation.</p>
39.88	<p>Point for $\frac{1}{4}$ sec. cor. falls in graded highway, a place not suitable for reestablishment of permanent cor. monument, True cor. point is also on culvert of ditch, course N.</p> <p>At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors., to $\frac{1}{4}$ sec. cor., with brass caps marked</p> <div style="text-align: center;"> $\frac{1}{4} \frac{S\ 20}{S\ 29}$ <p>1928</p> </div> <p>And WC in quadrants of brass caps nearest true point for cor.</p>
76.00	<p>House and windmill bears S., 2 chs. dist.</p>
79.76	<p>True point for cor. of secs. 19, 20, 29 and 30.</p> <p>Land: level. Soil: Clay loam, 1st rate. Timber: None. Undergrowth: Mesquite, greasewood and sage.</p> <hr style="border-top: 1px dashed black;"/> <p>From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., described in book "B".</p> <p>N. 89° 28' E. on true line bet. secs. 19 and 30. ($W\frac{1}{2}$) Over level land, along Casa Grande-Florence highway, between cultivated fields.</p>
21.11	<p>Cor. of fences extending E., W. and S. bears S. 50 lks. dist.</p>
40.80	<p>House bears N., about 4 chs. dist.</p>
41.09	<p>A fence extends N. from E. and W. fence, about 5 chs. N.</p>
41.43	<p>Point for $\frac{1}{4}$ sec. cor. at prop. dist., alinement determined from center line of Casa Grande-Florence highway.</p> <p>As this point comes in center of highway, a place not suitable for reestablishment of permanent cor. monument,</p> <p>At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p> <div style="text-align: center;"> $\frac{1}{4} \frac{S\ 19}{S\ 30}$ <p>1928</p> </div> <p>and WC in quadrants of brass caps nearest true point for cor.</p> <p>True point for cor. comes on concrete culvert of irrigation ditch, 10 lks. wide, course N. 30° W.</p>

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

Chains

Thence, S. 89° 24' E. on true line bet. secs. 19 and 30. (E¹/₂).
Along highway, between cultivated fields.

.74
1.00

Cor. of fences extending N., E. and W. bears N., 66 lks. dist.
Cor. of fences extending S., E. and W. bears S., 60 lks. dist.

40.57

The true point for cor. of secs. 19, 20, 29 and 30.

Land: Level.

Soil: Clay loam, 1st and 2d rate. Under cultivation.

Undergrowth: Mesquite along roadside.

From true point for cor. of secs. 19, 20, 29 and 30.

N. 0° 42' W. on true line bet. secs. 19 and 20.

Over level land, thru desert growth. Cultivated land in sec. 19.

.15
.60

An unimproved road bears NE. from highway

Telephone lines extend E. and W.; cor. of fences extending N. and W. bears W., 55 lks. dist.

39.82

Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground for ¹/₄ sec. cor., with brass cap marked

¹/₄

S 19 | S 20

1928

At points N. 45° E. and S. 45° W., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

Cor. of fences extending N., S. and W. bears W., 71 lks. dist.
Ditch, course N., bears E., 40 lks. dist.

66.15

Same ditch, 5 lks. wide, course W., from S.

72.15

Old winding road, bears NW. and SE.

79.07

Cor. of fences extending W. and S. bears W., 91 lks. dist.

79.64

Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground for cor. of secs. 17, 18, 19 and 20, with brass cap marked

T 5 S R 9 E

S 18 | S 17

S 19 | S 20

1928

At points N. 45° E. and S. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam. 34 ins. in ground, for wit. cors., similarly marked, with addition of WC in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.
Cultivated land in sec. 19.

Resurvey of the Subdivisions
of

T. 5 S. R. 9 E.

chains	From the cor. of secs. 16,17,20 and 21. S.89°56'W. on true line bet. secs. 17 and 20. Over level land, thru desert growth.
.38	Telephone line, extends N. and S.
40.12	Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground for 1/4 sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 17}{S 20}$
	1928
	At points N.45°E. and S.45°W., 64 lks.dist., set simi- lar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.
67.70	Wash, 60 lks. wide, course NW.
75.20	Shack bears N., 2.50 chs. dist.
80.24	The cor. of secs. 17,18,19 and 20. Land: Level. Soil: Clay loam, 1st and 2d rate. Timber: None. Undergrowth: Mesquite, greasewood and sage.

	From the cor. of secs. 13,18,19 and 24, on W.bdy. of Tp., described in book "B". N.89°42'E. on true line bet. secs. 18 and 19. Over level land, cleared in sec. 18, cultivated in sec.19.
.44	Fence, extends N. and S.; cor. of fences extending N.,S. and E. bears S.,107 lks.dist.
40.48	Fence, extends N. and S.; cor. of fences extending N.,S. E.and W. bears S.,70 lks.dist.
40.78	Set an iron post 3 ft. long 1 in. diam. 34 ins.in ground for 1/4 sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 18}{S 19}$
	1928
	At points N.45°E. and S.45°W., 64 lks.dist., set simi- lar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.
80.50	Unimproved road, extends NW. and SE.
81.10	The cor. of secs. 17,18,19 and 20. Land: Level. Soil: Clay loam, 1st and 2d rate. Timber: Mesquite. Undergrowth: Land is cleared or under cultivation.W 1/2 Greasewood and mesquite in E 1/2 sec. 18.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.


chains

N.0°12'E. on true line bet. secs. 17 and 18.
Over level land, thru desert growth.

11.00 Wash, 40 lks. wide, course NW.

35.20 Wash, 20 lks. wide, course NW.

39.82 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground,
(in wash 40 lks. wide, course NW.) for 1/4 sec. cor., with
brass cap marked




At points N.45°E. and S.45°W., 64 lks. dist., set simi-
lar iron posts, for wit. cors., similarly set and
marked, with addition of WC in quadrants of brass caps,
nearest the true corner.

54.90 Ditch, 10 lks. wide, course W.

67.10 Old winding road, bears E. and W.

79.64 The orig. cor. of secs. 7, 8, 17 and 18, which is a rotted
mesquite stake in old mound of earth. No marks remain
on the stake. In place of stake, which is deposited
alongside,

Set an iron post 3 ft. long 2 ins. diam. 34 ins. in ground
for cor. of secs. 7, 8, 17 and 18, with brass cap marked



At points N.45°E. and S.45°W., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam. 34 ins. in ground,
for wit. cors., similarly marked, with addition of WC
in quadrants of brass caps nearest the true corner.

Land: Level.

Soil: Clay loam and gravelly, 1st and 2d rate.

Timber: Mesquite.

Undergrowth: Greasewood and mesquite.


From the cor. of secs. 8, 9, 16 and 17,
S.89°35'W. on true line bet. secs. 8 and 17.
Over level land, along county improved road.

20.70 Cor. of fences extending E., W. and S. bears S., 40 lks. dist.

39.29 Cor. of fences extending E. and S. bears S., 31 lks. dist.

39.94 County improved road, extending NW. and E. bears N.,
13 lks. dist., in curve.

40.07 Set an iron post 3 ft. long 1 in. diam. 36 ins. in ground
for 1/4 sec. cor., with brass cap marked



Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

BOOK 3886

chains

At points N.45°E. and S.45°W., 64 lks.dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.

Some indian ruins bears N., 6 to 10 chs. dist.
NE $\frac{1}{4}$ of sec. 17 is cleared land.
Continue over rolling land, thru desert growth.


- 47.70 Unimproved road, bears NE. and SW.
- 76.80 Old winding road, bears N. and S.
- 80.14 The cor. of secs. 7,8,17 and 18.

Land: Level, and rolling.
Soil: Clay loam, 1st and 2d rate.
Undergrowth: Mesquite and greasewood.
Timber: None.

From the cor. of secs. 7,12,13 and 18, on W.bdy. of Tp., described in book "B".

N.89°30'E. on true line bet. secs. 7 and 18.
Over rolling land, thru desert growth, along improved road.

- 7.90 County improved road, bears NE. and W..
- 38.55 Wash, 50 lks. wide, course NW.
- 40.85 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



At points N.45°E. and S.45°W., 64 lks.dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the true corner.


- 81.46 The cor. of secs. 7,8,17 and 18.

Land: Rolling.
Soil: Clay loam and gravelly, 1st and 2d rate.
Timber: Mesquite.
Undergrowth: Greasewood and mesquite.

N.0°20'W, on true line bet. secs. 7 and 8.

Over rolling land, thru desert growth.

- 8.20 Improved road, bears E. and W.
- 22.30 Old winding road, bears NW. and SE.
- 39.34 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground, deposit marked (X) stone alongside of post, for $\frac{1}{4}$ sec. cor., with brass cap marked



Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

chains

and, raise a mound of stone 2 ft. base 1½ ft. high W. of cor.

- 43.40 Power lines, extend E. and W.
- 49.36 Old road, bears E. and W.
- 49.66 Fence, extends E. and W.; continue over level land.
- 54.86 Enter cultivated land., bears E. and W.
- 78.68 Set an iron post 3 ft. long .2 ins. diam. 36 ins. in ground, (on NE. side of cultivated field,) for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T	5	S	R	9	E.
	S	6	S	5	
	S	7	S	8	

1928

From which

A cottonwood, 40 ins. diam. bears S.62°W. 422 lks. dist. marked T 5 S R 9 E S 7 BT.

A cottonwood, 14 ins. diam. bears N.27°W. 237 lks. dist. marked T 5 S R 9 E S 6 BT.

No other tree in limits.

Deposit marked (X) stone alongside of post, at base.

Land: Rolling and level.

Soil: Clay loam and gravelly, 1st and 2d rate.

Timber: Mesquite.

Undergrowth: Greasewood and mesquite.

From the cor. of secs. 4, 5, 8 and 9.
S.89°13'W. on true line bet. secs. 5 and 8.
Over level land, thru dense mesquite brush.

- 20.50 Fence, extends N. and S.; leave brush, enter cultivated field, bears N. and S.
- 20.70 Ditch, 8 lks. wide, course N.
- 40.14 Set an iron post 3 ft. long 1 in. diam. 44 ins. in ground (in ploughed field) for ¼ sec. cor., with brass cap marked

¼	S	5
	S	8

1928

From which

A mesquite, 7 ins. diam. bears S.24°W., 152 lks. dist. marked ¼ S 8 BT.

A mesquite, 7 ins. diam. bears N.40°W., 103 lks. dist. marked ¼ S 5 BT.

- 40.80 Fence, extends N. and S.; cor. of fences extending N., S. and E., bears S., 20 lks. dist.
- 60.10 Fence, extends NE. and SW.
- 64.50 Fence, extends N. and S.
- 80.11 Fence, extends NW. and SE.
- 80.28 The cor. of secs. 5, 6, 7 and 8.

Land: Level. Soil: Clay loam, 1st rate.

Timber: Mesquite. Undergrowth: mesquite and greasewood.

Resurvey of the Subdivisions
of
T. 5 S., R. 9 E.

BOOK 8888

chains	<p>true point for From the cor. of secs. 1,6,7 and 12, on W.bdy. of Tp., described in book "B".</p> <p>N.89°56'E. on true line bet. secs. 6 and 7. Over bottom land of Gila River wash, thru brush.</p> <p>20.30 Left bank of Gila River wash, bears NE. and SW., continue over level land, thru dense brush and scattering timber.</p> <p>40.89 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground (deposit marked (X) stone alongside of post) for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\frac{\frac{1}{4} S 6}{S 7}$ <p>1928</p> <p>From which A cottonwood, 12 ins. diam. bears N.10°W., 20 lks. dist. marked $\frac{1}{4}$ S 6 BT. A cottonwood, 9 ins. diam. bears S.9°W., 82 lks. dist. marked $\frac{1}{4}$ S 7 BT.</p> <p>76.18 Fence, extends NE. and SW.; leave timber and brush, continue over cultivated field.</p> <p>81.18 The cor. of secs. 5,6,7 and 8.</p> <p>Land: Level. Soil: Clay loam, 1st rate. Timber: Cottonwood and mesquite. Undergrowth: Cottonwood, greasewood and willow.</p> <hr/> <p>N.1°27'W. on true line bet. secs. 5 and 6. Over level land, in plowed field.</p> <p>.20 Fence, extends NW. and SE.</p> <p>.61 Cor. of fence extending N. and SE. bears W., 34 lks. dist.</p> <p>19.20 Fence extends NE. and SW.; cor. of fences extending NE. and S., bears SW., 10 lks. dist.; leave field, enter dense undergrowth and scattering cottonwood timber.</p> <p>39.34 Set an iron post 3 ft. long 1 in. diam. 34 ins. in ground (deposit marked (X) stone alongside of post) for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\frac{\frac{1}{4}}{S 6 S 5}$ <p>1928</p> <p>From which A cottonwood, 10 ins. diam. bears E., 30 lks. dist. marked $\frac{1}{4}$ S 5 BT. A cottonwood, 8 ins. diam. bears N.69½°W., 94 lks. dist. marked $\frac{1}{4}$ S 6 BT.</p> <p>54.00 Left bank of Gila River wash, bears E. and W.; continue over bottom land.</p> <p>79.05 The cor. of secs. 5,6,31 and 32, on N. bdy. of Tp., here- inbefore described.</p> <p>Land: Level. Soil: Clayloam and gravel, 1st and 2d rate Timber; Cottonwood. Undergrowth; mesquite, greasewood.</p>
--------	---

T. 5 S., R. 9 E.

The continued satisfactory adjustment of the solar apparatus of the instruments used in the execution of the resurveys and surveys described in the foregoing notes is indicated from field tests of said instruments described in book "D" of this group.

GENERAL DESCRIPTION

This township is situated in the valley of the Gila River and the surface is level with the exception of some slightly rolling land in the north tier of sections.

The drainage is northwesterly to the Gila River.

The soil is a clay loam and generally 1st rate and tillable. Subsoil is of firmer texture, but can be penetrated.

The SE portion of the township is covered with a scattering growth of ironwood, palo verde and mesquite trees. The north portion, along the Gila River is covered with a scattering growth of cottonwoods. The SW. portion is pretty well cleared of timber but still carries some scrub mesquite trees.

Undergrowth is mostly greasewood, with dense growths of mesquite brush in the north portion, adjoining the Gila River. Cacti is growing in the SE. portion, and sage covers the cleared land which has been abandoned. There is enuf grass in the SE. portion to support a bit of sheep grazing in the springtime of each year.

There is no surface water, save in the two canals which flow diagonally thru the township, NE. to SW., to the Florence or Picacho reservoir, farther south. The Gila River carries a shallow flow of water thru the winter and early spring months, only.

Land under successful cultivation is chiefly in the SW. portion of the township, where irrigation is possible.

Unimproved lanes follow many of the section lines, the Florence-Casa Grande highway follows certain section lines from NE. to SW., and there is an improved winding road bearing E. and W. in the northern part of the township.

Most of the townsite of Florence, county seat of Pinal county, lies in secs. 1 and 2.

There are no indications of mineral activity in the township.

BOOK 3836

4-680

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<u>To Dupree R. Averill</u>	
Frank Burgess	First chairman
Dave Cummins	Second chairman
Cecil Emmons	Flagman
Elliott Pierson	Cornerman
<u>To Roger F. Wilson</u>	
Howard Beard	First chairman
Robert Depue	Second chairman
Ben Randall	Flagman
Clair Pierson	Cornerman
<u>To Otis O. Gould</u>	
Fred Pender	First chairman
Earl Endicott	Second chairman
Glenn Thomas	Flagman
Mark Anderson	Axman
M.E. Brassfield	Cornerman

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Roger F. Wilson ~~U.S. Transitman~~, hereby certify upon honor that, in pursuance of special instructions received from the ~~District Cadastral Engineer~~, for Group 150, Arizona bearing date of the 5th day of January, 19 28, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re} surveyed all those parts or portions of THE First Standard Parallel South in Range 9 East the East Boundary and Subdivision Lines of Township 5 South, Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said ^{re} survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the ~~District Cadastral Engineer~~, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ^{re} survey.

Place: Phoenix, Arizona.

Date: June 2, 1928.

Roger F. Wilson
 U. S. Transitman

~~APPROVAL:~~

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL,~~

....., 19

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated~~, 10, ~~having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Surveyor General.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~, ~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General.~~

4-680

Form 888

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<i>See Page 57 hereof</i>	

60
BOOK 3836

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Otis O. Gould ~~U.S. Transitman~~, hereby certify upon honor that, in pursuance of special instructions received from the ~~District Cadastral Engineer~~, for Group 150, Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re} surveyed all those parts or portions of

the North Boundary

and

Subdivision Lines of

Township 5 South, Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said ^{re} survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the ~~District Cadastral Engineer~~, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ^{re} survey.

Place: Phoenix, Arizona.

Date: May 12, 1928.

Otis O. Gould
U.S. Transitman

~~APPROVAL.~~

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL,~~

~~, 19~~

~~The foregoing field notes of the survey of~~

~~executed by~~

~~under his special instructions dated~~, ~~19~~, ~~having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.~~

~~U. S. Surveyor General.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~

~~, has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General.~~

BOOK 3836

4-680

FIELD ASSISTANTS.

NAMES.	CAPACITY.
<i>See Page 57 hereof</i>	

CERTIFICATE OF UNITED STATES SURVEYOR.

BOOK 3836

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 5th day of January, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the East Boundary and Subdivision Lines of Township 5 South, Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: May 14, 1928.

Dupree R. Averill, U. S. Surveyor.

APPROVAL.

OFFICE OF THE U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., JUL 15 1929, 192

The foregoing field notes of the survey of the First Standard Parallel South thru Range 9 East East Boundary, North Boundary and Subdivision Lines of Township 5 South, Range 9 East of the Gila and Salt River Base and Meridian, in the State of Arizona executed by Dupree R. Averill, U.S. Surveyor and assisted by Roger F. Wilson and Otis O. Could, U.S. Transitmen under special instructions dated January 5, 1928 for Group 150, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file