

BOOK 3842

FIELD NOTES

OF THE RESURVEY OF

South Boundary

East Boundary

West Boundary

and

Subdivision Lines of

Township 7 South, Range 7 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Roger F. Wilson U.S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated February 18, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, March 8, 1928, and Assignment Instructions dated March 10, 1928

Resurvey commenced March 23, 1928


Resurvey completed April 4, 1928

3842

3842

~~INDEX DIAGRAM.~~

~~Township~~, ~~Range~~

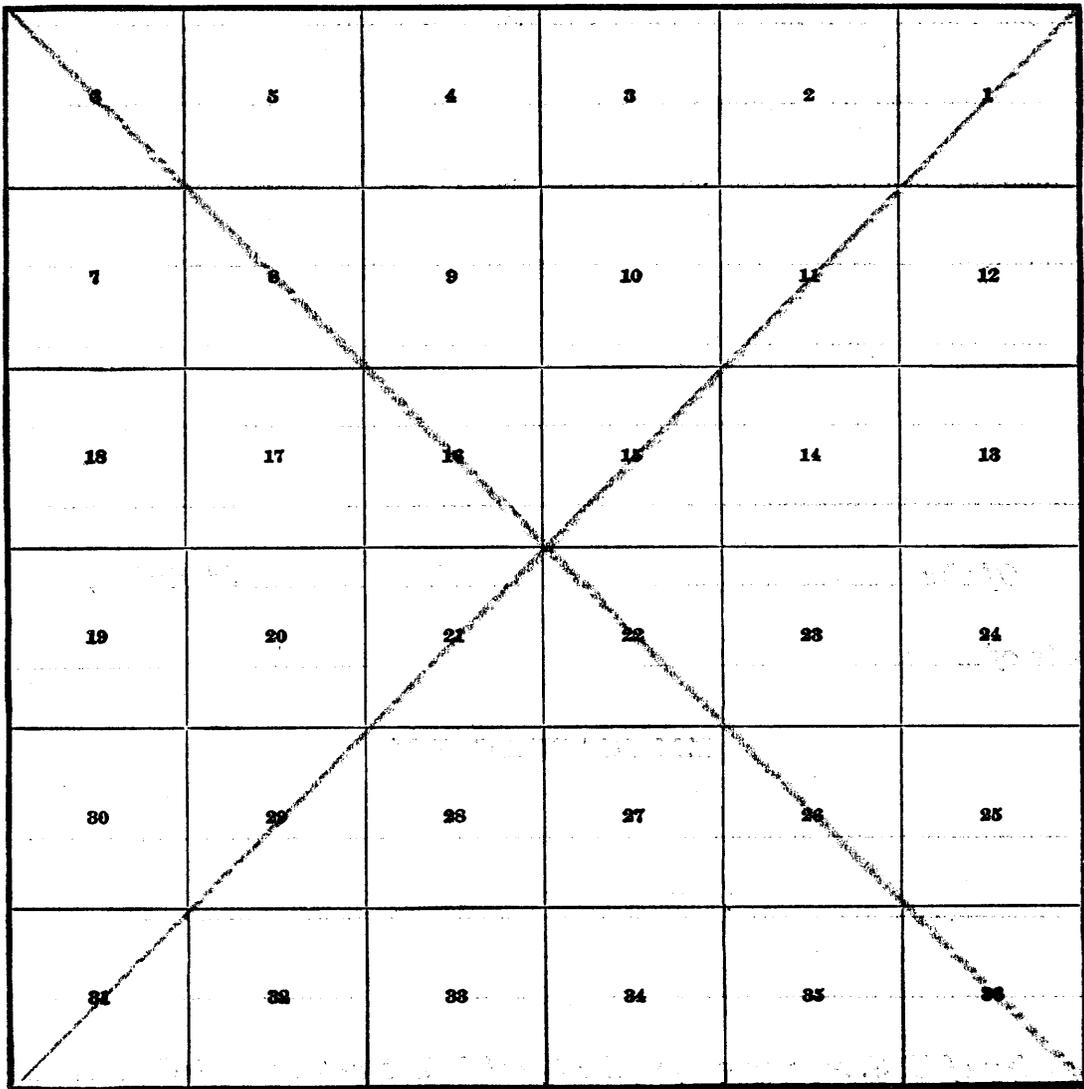

Book "I"
Group 150 Arizona
Township 7 South Range 7 East

INDEX DIAGRAM

BOOK 3842

See Book "G" for notes of resurv. S. & W. bds. T.6S. R.8E.

For notes of resurv. of S. bdy, W. bdy & Sub. lines T.6S. R.7E. see Book "H"

See Book "K" for notes of resurv. S. bdy, N. bdy & Sub. lines of T.7S. R.6E.

16	6	51	5	42	4	36	3	30	2	24	1	7
	50	50		42		36		30	29		23	
16	7	49	8	41	9	35	10	29	11	23	12	7
15	48	49	48	41	40	35		28		22		6
15	18	47	17	40	16	34	15	28	14	21	13	6
	47	47	46	39		34	33	27	27		21	5
14	19	46	20	39	21	33	22	27	23	20	24	5
	45	45	39	38		32		26	26		20	
14	30	44	29	38	28	32	27	26	26	19	25	4
	44	43	38	37		31		25	25		19	3
13	31	43	32	37	33	31	34	24	35	18	36	3
	12	11	11	10		30	10		9		9	

Resurveyed by Dupree R. Averill, U.S. Surveyor, under instructions Group 150.

Resurveyed by Roger F. Wilson, U.S. Transitman, under instructions Group 150.

Resurveyed by Otis O. Gould, U.S. Transitman, under instructions Group 150.

Accepted surveys, retracements and resurveys.

The resurveys herein described were commenced March 23, 1928, and executed by Roger F. Wilson, U.S. Transitman, using Buff solar transit No. 9984. This instrument is equipped with Smith solar attachment and otherwise conforms to the standard requirements of the General Land Office. All azimuth determinations are accomplished with the solar attachment.

Preliminary Field Test.

March 25, 1928: at the station (described on page 1 of book A of this group) near the center of sec. 29, T.6 S., R.6 E., G. and S.R. Base and Meridian, Arizona; latitude $32^{\circ}52\frac{1}{2}'$ N. and longitude $111^{\circ}45'$ W.; examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 9h 0 m a.m. app.t., set off $32^{\circ}52\frac{1}{2}'$ on the latitude arc, $1^{\circ}55'$ N. on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $1^{\circ}58'$ N., which agrees with the computed declination of the sun.

At 3h 0m p.m., app.t., with the latitude arc unchanged, set off $2^{\circ}01'$ N. on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

All measurements are made with a Lallie steel tape, 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are taken on the slope, the vertical angles read with a clinometer and the slope measurements properly reduced to true horizontal distances, for final entry in the notes.

Resurvey of the East Boundary
of
T. 7 S., R. 7 E.

chains

The east boundary of this township was surveyed in 1887,
by R. C. Powers, U.S.D.S.

In 1913, J.B. Wright, U.S.S., retraced and resurveyed the east boundary of this township, in connection with his survey of subdivision lines in T.7 S., R.8 E. Mr. Wright perpetuated all orig. cors., with the exception of cors. of secs. 1,6,7 and 12, and 7,12,13 and 18, with the regulation iron posts, and established closing cors. for secs. 13-24, 24-25 and 25-36, T.7 S., R.8 E., making the orig. cors. which were common to 4 sections, refer to T.7 S., R.7 E., only.

There is no other retracement or resurvey of the East boundary of T. 7 S., R. 7 E. of record.

The following notes describe a dependent resurvey of the east boundary of T.7 S., R.7 E., preserving the alignment between original corner points.

Retracement for Resurvey

From the point for cor. of Ts.6 and 7 S., Rs.7 and 8 E., described in book "G" of this group.

S.0°23'W. on a random line bet. secs. 1 and 6. (N½)

39.97 Fall 1 lk. E. of the ¼ sec. cor.

Thence, S.0°28'W. on a random line bet. secs.1 and 6. (S½)

40.12 Fall 4 lks. W. of the cor. of secs. 1,6,7 and 12.

Thence, S.0°15'W. on random line bet. secs.7 and 12 (N½)

40.16 Fall 6 lks. E. of the ¼ sec. cor.

Thence, S.0°3'E. on random line bet. secs.7 and 12. (S½)

40.14 Fall 8 lks. E. of the cor. of secs. 7,12,13 and 18.

Thence, S.0°24'E. on random line on E. bdy. of sec.13.

40.15 Fall 35 lks. E. of the ¼ sec. cor. of sec. 13, only.

79.71 Fall 24 lks. E. of the closing cor. of secs. 18 and 19,
T.7 S., R.8 E.

80.30 Fall 24 lks. E. of the cor. of secs. 13 and 24, only.

Thence, S.0°08'W. on random line on E. bdy. of sec.24.

40.18 Fall 6 lks. E. of the ¼ sec. cor. sec. 24, only.

79.53 Fall 12 lks. E. of the closing cor. of secs. 19 and 30,
T.7 S., R.8 E.

80.36 Fall 12 lks. E. of the cor. of secs. 24 and 25, only.

Thence, S.0°39'E. on random line on E. bdy. of sec.25. (N½)

40.24 Fall 4 lks. E. of the ¼ sec. cor. sec. 25, only.

Thence, S.0°12'E. on random line on E. bdy. sec.25. (S½)

38.96 Fall 2 lks. E. of the closing cor. of secs. 30 and 31,
T.7 S., R.8 E.

40.16 Fall 2 lks. E. of the cor. of secs. 30 and 31, only.

Thence, S.0°37'W. on random line on E. bdy. of sec. 36.

39.95 Fall 3 lks. E. of the ¼ sec. cor. sec. 36, only.


79.87 Fall 13 lks. E. of the cor. of Ts.7 and 8 S., Rs.7 and 8 E.,
hereinafter described.

Resurvey of the East Boundary
of
T. 7 S., R. 7 E.

chains

Resurvey

The cor. of Ts. 7 and 8 S., Rs. 7 and 8 E. is an iron post 3 ft. long 3 ins. diam., 24 ins. in ground, with brass cap marked




*5.

Cor. is set in intersection of unimproved roads extending N., E. and W. Reset the iron post 35 ins. in ground and deposit a 1 quart bottle alongside post, at base.

Thence, N. 0° 46' E. on true line on E. bdy. of sec. 36. (S 1/2) Over level land, along roadway, thru undergrowth.

- .36 Cor. of fences extending N. and W. bears W., 26 lks. dist.
- .45 Cor. of fences extending N. and E. bears E., 53 lks. dist.
- 1.60 Well and pump house bears W., 160 lks. dist.

39.92 The 1/4 sec. cor. sec. 36, only, which is an iron post 1 in. diam., 14 ins. above ground, with brass cap marked




Reset this post, which is 3 ft. long, 33 ins. in ground and deposit a 1 quart bottle alongside post, at base.

Thence, N. 0° 40' E. on true line on E. bdy. sec. 36. (N 1/2) Over level land, along roadway, thru undergrowth.

From corner,

- Fence extending N. and S. bears W., 28 lks. dist.
- Fence extending N. and S. bears E., 46 lks. dist.
- 39.66 Cor. of fences extending W. and S. bears W., 24 lks. dist.

39.95 The cor. of secs. 25 and 36, which is an iron post 3 ins. diam., with brass cap flush with ground, in roadway, and marked



Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

Thence N. 0° 10' W. on true line on E. bdy. sec. 25. (S 1/2) Over level land, along roadway, thru undergrowth.

- .47 Cor. of fences extending N. and W. bears W., 45 lks. dist.
- .75 Cor. of fences extending S. and E. bears E., 48 lks. dist.

1.20 The closing cor. of secs. 30 and 31, T. 7 S., R. 8 E., which is an iron post 2 ins. diam., 8 ins. above ground in roadway intersection, roads extend N., S. and E., with brass cap marked

Resurvey of the East Boundary

of

T. 7 S. R. 7 E.

chains

T 7 S
 R 7 E | R 8 E
 | S 30
 CC | S 31
 |
 S 25
 ———
 S 36

1913

Reset this iron post, which is 3 ft. long, 33 ins. in ground and deposit a 1 quart bottle alongside post, at base.

- 1.57 Cor. pole of power lines extending N. and E. bears E., 36 lks. dist.
 1.70 A house and well bear W., about 5 chs. dist.
 1.73 Cor. of fences extending N. and E. bears E., 48 lks. dist.
 40.16 The $\frac{1}{4}$ sec. cor. sec. 25, only, which is an iron post 1 in. diam., 10 ins. above ground, with brass cap marked

$\frac{1}{4}$
 S 25 |
 1913

Reset this post, which is 3 ft. long, 33 ins. in ground and deposit a 1 qt. bottle alongside post, at base.

Fence extending N. and S. bears W., 54 lks. dist.
 Fence extending N. and S. bears E., 46 lks. dist.
 Power line extending N. and S. bears E., 22 lks. dist.

Thence, N. 0° 35' W. on true line on E. bdy. of sec. 25. (N $\frac{1}{2}$)
 Over level land, along roadway, thru undergrowth.

- 4.70 Cor. of fences extending N., S. and E. bears E., 49 lks. dist.
 39.77 Cor. of fences extending W. and S. bears W., 45 lks. dist.

- 40.24 The cor. of secs. 24 and 25, only, which is an iron post 3 ins. diam., 12 ins. above ground, with brass cap marked

T 7 S
 R 7 E | R 8 E
 | S 19
 | S 30
 S 24
 ———
 S 25

1913

Alongside is the orig. cor. of secs. 19, 24, 25 and 30, which is a stake 4 ins. sq, 2 ft. above ground, with scribe marks no longer legible. Reset the iron post, which is 3 ft. long, 33 ins. in ground, deposit the stake, which is 3 ft. long alongside post and also deposit a 1 quart bottle alongside post, at base.

Power lines extending N. and S. bear E., 33 lks. dist.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.


Resurvey of the East Boundary
of
T. 7 S., R. 7 E.

BOOK 3842

chains

N.0°13'E. on true line on E. bdy. of sec. 24.
Over level land, along roadway, thru undergrowth.


.83 The closing cor. of secs. 19 and 30, T.7 S.,R.8 E., which
is an iron post 2 ins. diam., 8 ins. above ground, with
brass cap marked

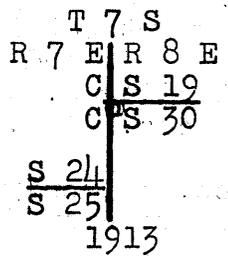

Reset this post, which is 3 ft. long, 33 ins.in ground
and deposit a 1 qt. bottle alongside post, at base.
Cor. comes in intersection of roads extending N.,S.and E.

1.28 Cor. of fences extending N. and E. bears E.,43 lks.dist.

40.18 The 1/4 sec. cor. sec. 24, only, which is an iron post, 1
ins. diam., 30 ins. above ground, with brass cap marked



Reset this post, which is 3 ft. long, 33 ins. in ground,
and deposit a 1 qt. bottle alongside post, at base.


49.32 Fence extending N. and S. bears E.,42 lks.dist.

56.80 Road bears NW: from N. and S. road.

Wash, 10 lks. wide, course NW.

80.36 The cor. of secs. 13 and 24, only, which is a deposit of
charcoal, 4 to 10 ins. under ground, in roadway.

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 13 and 24, only, with brass cap marked



and deposit a 1 quart bottle alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°34'W. on true line on E. bdy. of sec. 13.(S.1/2)
Over level land, along roadway, thru undergrowth.

0.12 Cor. of fences extending S. and E. bears E., 46 lks.dist.


0.47 Cor. of fences extending N. and W. bears W., 45 lks.dist.
Land in sec. 13 is under cultivation.

0.59 The closing cor. of secs. 18 and 19, which is an iron post
2 ins. diam., 8 ins. above ground, with brass cap marked

Resurvey of the East Boundary

of
T. 7 S., R. 7 E.

chains



1.04
10.50

Reset this post, which is 3 ft. long, 33 ins. in ground and deposit a 1 quart bottle alongside post, at base. Power lines extending N. and S. bear E., 38 lks. dist. Cor. of fences extending N. and E. bears E., 46 lks. dist. A house bears E., 2 chs. dist.

40.15

The 1/4 sec. cor. sec. 13, only, which is an iron post 1 in. diam., 10 ins. above ground, with brass cap marked



Alongside is the orig. 1/4 sec. cor., which is a mesquite stake 4 ins. sq, 2 ft. above ground, marked 1/4 S on W. Reset the post, which is 3 ft. long, 33 ins. in ground, deposit the stake alongside post, and also deposit a one quart bottle alongside post, at base. N. end of cultivated land, in sec. 13. Cor. of fences extending N., S. and W. bears W., 46 lks. dist. Cor. of fences extending N., S. and E. bears E., 45 lks. dist. Power lines extending N. and S. bear E., 38 lks. dist.

Thence, N. 0° 6' E. on true line on E. bdy. of sec. 13. (N. 1/2) Over level land, along roadway, thru undergrowth.


9.00
39.62
39.70

Ranch house and outbuildings bear W., about 20 chs. dist. Cor. of fences extending S. and E. bears E., 49 lks. dist. Cor. of fences extending S. and W. bears W., 46 lks. dist.

40.15

The cor. of secs. 7, 12, 13 and 18, which is a mesquite stake 4 ins. square, 8 ins. above ground, with scribe marks no longer legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 7, 12, 13 and 18, with brass cap marked



and deposit a one quart bottle alongside post, at base. Power lines extending N. and S. bear E., 39 lks. dist. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.

N. 0° 04' E. on true line bet. secs. 7 and 12. (S 1/2) Over level land, along roadway, thru undergrowth.

0.43
27.00
40.10

Cor. of fences extending N. and W. bears W., 46 lks. dist. Cor. of fences extending N. and E. bears E., 40 lks. dist. Cor. of fences extending N., S. and E. bears E., 48 lks. dist.

40.14

The 1/4 sec. cor., which is an iron post 1 in. diam., 10 ins. above ground, with brass cap marked

Resurvey of the East Boundary
of
T. 7 S. R. 7 E.

BOOK 3842

chains

$\frac{1}{4}$
S 12 | S 7
1913

Reset this post, which is 3 ft. long, 33 ins. in ground and deposit a one quart bottle alongside post, at base.

Power lines extending N. and S. bear E., 48 lks. dist.
Fence extending N. and S. bears W., 45 lks. dist.

Thence, N. 0° 20' E. on true line bet. secs. 7 and 12. (N $\frac{1}{2}$)
Over level land, thru undergrowth, along roadway.

- 9.30 Cor. of fences extending S. and E. bears E., 48 lks. dist.
- 39.69 Cor. of fences extending S. and W. bears W., 45 lks. dist.

40.16 The cor. of secs. 1, 6, 7 and 12, which is a mesquite stake 4 ins. square, 3 ins. above ground. No scribe marks legible. In place of stake which is deposited alongside,
Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 1, 6, 7 and 12, with brass cap marked

T. 7 S
R 7 E | R 8 E
S 1 | S 6
S 12 | S 7
1928

and deposit a quart bottle and marked (X) stone alongside post, at base.

Power lines extending N. and S. bear E., 39 lks. dist.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N. 0° 24' E. on true line bet. secs. 1 and 6.
Over level land, along roadway, thru undergrowth.

- 0.45 Cor. of fences extending N. and W. bears W., 45 lks. dist.
- 8.20 Cor. of fences extending S. and N. 75° W. bears W., 45 lks. dist.
- 39.10 Cor. pole of power lines extending N., S. and W. bears E., 39 lks. dist.

40.12 The $\frac{1}{4}$ sec. cor., which is an iron post 1 in. diam., 16 ins. above ground, with brass cap marked

$\frac{1}{4}$
S 1 | S 6
1913

Reset this post, which is 3 ft. long, 33 ins. in ground and deposit a one quart bottle alongside post, at base.

From which the original bearing tree
A mesquite, 20 ins. diam., bears S. 89° W., 26 lks. dist. marked $\frac{1}{4}$ S 1 BT.
Power lines extending N. and S. bear E., 39 lks. dist.
Cor. of fences extending N. and W. bears W., 58 lks. dist.

- 60.50 Cor. of fences extending N., S. and W. bears W., 55 lks. dist.
- 77.80 A house bears W., 130 lks. dist.
- 79.62 Cor. of fences extending S. and W. bears W., 47 lks. dist.
- 80.09 The cor. of Ts. 6 and 7 S., Rs. 7 and 8 E., described in book "G".

Resurvey of the South Boundary

of

T. 7 S. R. 7 E.

chains

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Mesquite, greasewood, and sage.

The south boundary of this township was surveyed in 1887, by R. C. Powers, U.S.D.S.

There is no retracement or resurvey of the south boundary of this township of record.

The following notes describe a dependent resurvey of the South boundary of T.7 S., R.7 E., preserving the alignment between orig. cors. and $\frac{1}{4}$ sec. cors., and reestablishing lost $\frac{1}{4}$ sec. cors. by direct proportion. (and cor. of secs. 5, 6, 31 and 32)

Retracement for Resurvey

From the cor. of Ts.7 and 8 S., Rs.7 and 8 E., hereinbefore described.

West on a random line bet. secs. 1 and 36.

40.00 Find no trace of $\frac{1}{4}$ sec. cor.; set temp. cor.

80.62 Fall 40 lks. S. of the cor. of secs. 1, 2, 35 and 36.

Thence, west on a random line bet. secs. 2 and 35.

40.00 Find no trace of $\frac{1}{4}$ sec. cor.; set temp. cor.

80.40 Fall 44 lks. N. of the cor. of secs. 2, 3, 34 and 35.

Thence, west on a random line bet. secs. 3 and 34.

40.00 Find no trace of $\frac{1}{4}$ sec. cor.; set temp. cor.

80.36 Fall 60 lks. N. of the cor. of secs. 3, 4, 33 and 34.

Thence, west on a random line bet. secs. 4 and 33.

40.18 Fall 22 lks. S. of the $\frac{1}{4}$ sec. cor.

80.29 Fall 19 lks. S. of the cor. of secs. 4, 5, 32 and 33.

Thence, west on a random line bet. secs. 5 and 32 and 6 and 31.

40.00 Find no trace of $\frac{1}{4}$ sec. cor.; set temp. cor.

80.00 Find no trace of cor. of secs. 5, 6, 31 and 32; set temp. cor.

120.51 Fall 45 lks. S. of the $\frac{1}{4}$ sec. cor. bet secs. 6 and 31.

Thence, west on a random line bet. secs. 6 and 31. ($W\frac{1}{2}$)

38.81 Fall 3 lks. S. of the cor. of Ts.7 and 8 S., Rs.6 and 7 E., hereinafter described.

Resurvey of the South Boundary
of
T. 7 S., R. 7 E.

BOOK 3842


chains

Resurvey

From the cor. of Ts.7 and 8 S., Rs.7 and 8 E., hereinbefore described.
N.89°43'W. on true line bet. secs. 1 and 36.
Over level land, along unimproved road, thru scattering undergrowth.

- 20.07 Cor. of fences extending N. and E. bears N. 45 lks. dist.
- 23.07 Telephone lines, extend N.53½°W. and S.53½°E.
- 23.90 Highway, extends N.53½°W. to Casa Grande and S.53½°E. to Tucson, at intersection of road extending E.; continue over level land, thru undergrowth.
- 24.60 Right of way fence, extends N.53½°W. and S.53½°E.
- 25.95 Telegraph and Telephone lines, extend N.53½°W. and S.53½°E.
- 27.20 Southern Pacific Railroad, bears N.53°40'W. and S.53°40'E.
- 29.78 Right of way fence, extends N.53½°W. and S.53½°E.
- 29.89 Telephone lines, extend N.53½°W. and S.53½°E.
- 36.70 Wash, 10 lks. wide, course NW.

40.31 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground, for ¼ sec. cor., with brass cap marked




1928

and deposit a one quart bottle alongside post, at base.

80.62 The cor. of secs. 1,2,35 and 36, which is a mesquite stake, 6 ins. sq, 18 ins. long, lying on ground, with scribe marks no longer legible. Other parts of stake dug up at true cor. point. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 1,2,35 and 36, with brass cap marked



1928


and deposit a one quart bottle alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

S.89°41'W. on true line bet. secs. 2 and 35.
Over level land, thru scattering undergrowth.

2.90 Old winding road, bears NW. and SE.

40.20 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for ¼ sec. cor., with brass cap marked



1928

and deposit a one quart bottle alongside post, at base.

80.40 The cor. of secs. 2,3,34 and 35, which is a mesquite stake 4 ins. sq, 18 ins. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Resurvey of the South Boundary
of
T. 7 S., R. 7 E.

chains

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 2, 3, 34 and 35, with brass cap marked

T 7 S R 7 E
S 34 | S 35
S 3 | S 2
T 8 S
1928

and deposit a one quart. bottle alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

S. 89° 34' W. on true line bet. secs. 3 and 34.
Over level land, thru undergrowth.

25.00 Ditch, 20 lks. wide, course SW.

40.18 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 34
S 3
1928

and deposit a one quart bottle alongside post, at base.

Cor. of fences extending N. and S. bears N., 47 lks. dist.

79.88 Cor. of fences extending N. and E. bears N., 48 lks. dist.

80.36 The cor. of secs. 3, 4, 33 and 34, which is the remains of a mesquite stake buried in center line of improved road extending N. and S. As this is not a satisfactory place for permanent cor. monument,

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 3, 4, 33 and 34, with brass caps marked

T 7 S R 7 E
S 33 | S 34
S 4 | S 3
T 8 S
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 89° 41' W. on true line bet. secs. 4 and 33. (E $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.18 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 24 ins. long, on ground, scribe marks no legible. Parts of stake dug up at true cor. point. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 33
S 4
1928

Resurvey of the South Boundary

BOOK 3842

T. 77 S. R. 7 E.

chains

and deposit a one quart bottle alongside post, at base.

Thence, S.89°57'W. on true line bet. secs. 4 and 33. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.11 The cor. of secs. 4, 5, 32 and 33, which is a mesquite stake
4 ins. square, 2 ft. above ground, scribe marks not leg-
ible. In place of post, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 4, 5, 32 and 33, with brass cap marked

T 7 S R 7 E
S 32 | S 33
S 5 | S 4
T 8 S
1928

and deposit a one quart bottle alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.89°47'W. on true line bet. secs. 5 and 32.
Over level land, thru scattering undergrowth.

.56
6.70 Cor. of old fences extending S. and W. bears S., 55 lks. dist.
Wash, 10 lks. wide, course NW.

40.17 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 32
S 5
1928

and deposit a one quart bottle alongside post, at base.

40.29 Cor. of old fences extending S. and W. bears S., 32 lks. dist.
79.86 Cor. of old fences extending S. and E. bears S., 76 lks. dist.
Cor. of old fences extending E., W. and N. bears S., 14 lks. dist.

80.34 Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 5, 6, 31 and 32, with brass cap marked

T 7 S R 7 E
S 31 | S 32
S 6 | S 5
T 8 S
1928

and deposit a one quart bottle alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the South Boundary

of

T. 7 S., R. 7 E.


chains

N.89°47'W. on true line bet. secs. 6 and 31. (E½)
Over level land, thru scattering undergrowth.

40.17

The ¼ sec. cor., which is a mesquite stake 3 ins. square, 18 ins. above ground, scribe marks not legible. Alongside is a redwood post, 4x6 ins., 2 ft. above ground. In place of cor. stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for ¼ sec. cor., with brass cap marked



1928

and deposit a one quart bottle alongside post, at base. Cor. is on old fence line, extends E. and W. Thence, N.89°57'W. on true line bet. secs. 6 and 31. (W½) Over level land, thru scattering undergrowth.


20.21

Wash, 30 lks. wide, course NW.

38.81

The cor. of Ts. 7 and 8 S., Rs. 6 and 7 E., which is a mesquite stake 4 ins. square, 2 ft. above ground, scribe marks not legible. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 3 ins. diam., 33 ins. in ground for cor. of Ts. 7 and 8 S., Rs. 6 and 7 E., with brass cap marked



1928

and deposit a one quart bottle alongside post, at base. Cor. of fences extending S. and E. bears S., 2 lks. dist.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, and sage.

Resurvey of the West Boundary
of
T. 7 S., R. 7 E.

BOOK 3842

chains

The west boundary of this township was surveyed in 1887, by R.C. Powers, U.S.D.S. There is no retracement or re-survey of this line, of record.
The following notes describe a dependent resurvey of the west boundary of T.7 S.,R.7 E., preserving the alinement between orig. cors. or accepted local reestablishments of cors., and restoring the lost cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts.7 and 8 S.,Rs.6 and 7 E., hereinbefore described.
North on a random line bet. secs. 31 and 36.
40.22 Fall 3 lks. W. of the $\frac{1}{4}$ sec. cor.
80.20 Fall 1 lk. W. of the cor. of secs. 25,30,31 and 36.

Thence, north on a random line bet. secs. 25 and 30.
40.00 Find no trace of $\frac{1}{4}$ sec. cor.; set temp. cor.
80.18 Fall 24 lks.W.of the accepted cor.of secs.19,24,25 and 30.

Thence, north on a random line bet. secs. 19 and 24.
40.26 Intersect the $\frac{1}{4}$ sec. cor.
80.42 Fall 12 lks. E. of the cor. of secs. 13,18,19 and 24.


Thence, north on a random line bet. secs. 13 and 18.
40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.
80.50 Intersect he cor. of secs. 7,12,13 and 18.

Thence, north on a random line bet. secs. 7 and 12.
40.20 Fall 29 lks. W. of the Accepted $\frac{1}{4}$ sec. cor.
80.42 Fall 58 lks. W. of accepted cor. of secs. 1,6,7 and 12.

Thence, north on a random line bet. secs. 1 and 6.
40.00 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.
80.30 Fall 72 lks. E. of the cor. of Ts.6 and 7 S.,
Rs.6 and 7 E., described in book "H".

Resurvey

From the cor. of Ts.7 and 8 S., Rs.6 and 7 E., hereinbefore described.
N.0°03'E. on true line bet. secs. 31 and 36. ($S\frac{1}{2}$)
Over level land, thru scattering undergrowth.
20.90 Wash, 15 lks. wide, course NW.
40.22 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 18 ins. above ground and marked $\frac{1}{4}$ S 36 on W., S 31 on E. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



and deposit a one quart bottle alongside post, at base.
Thence, N.0°02'W. on true line bet. secs. 31 and 36. ($N\frac{1}{2}$)
Over level land, thru scattering undergrowth.
39.98 The cor. of secs. 25,30,31 and 36, which is a mesquite stake, 6 ins. square, 24 ins. above ground, marked S 30 on NE., S.36 on SW. and S 25 on NW., with 5 notches on N. edge. No other marks visible. In place of stake, which is deposited alongside, Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground for cor. of secs. 25,30,31and 36, with brass cap marked

Resurvey of the West Boundary

of

T. 7 S. R. 7 E.

chains

T 7 S
R 6 E | R 7 E
S 25 | S 30
S 36 | S 31
1928.

and deposit a one quart bottle alongside post, at base.

Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Greasewood, mesquite, sage.

40.09

N.0°10'E. on true line bet. secs. 25 and 30.
Over level land, thru scattering undergrowth.
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 25 | S 30
1928

58.70
80.18

and deposit a one quart bottle alongside post, at base.
Wash, 10 lks. wide, course NW.
The accepted cor. of secs. 19, 24, 25 and 30, which is a
redwood post, 8 ins. square, 14 ins. above ground, set
in concrete. No marks on post. In place of post, which
is badly decayed, and in the concrete foundation,
Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 19, 24, 25 and 30, with brass cap marked

T 7 S -
R 6 E | R 7 E
S 24 | S 19
S 25 | S 30
1928

and deposit a concrete block alongside post, at base.
Cor. of fences extending N. and E. bears E., 45 lks. dist.

Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Greasewood, mesquite, sage.

4.90
24.20
40.26

North on true line bet. secs. 19 and 24. ($S\frac{1}{2}$)
Over level land, thru scattering undergrowth.
Wash, 10 lks. wide, course NW.
Cross to E. side of fence, extends N.1°W. and S.1°E.
The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square,
18 ins. above ground, scribe marks not legible. Along-
side, is a redwood post, 4x8 ins., 24 ins. above ground,
unmarked, set in concrete. In place of stake, which is
buried alongside, and alongside of the redwood post and
concrete block,
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 24 | S 19
1928

40.16


and deposit a one pint bottle alongside post, at base.
Thence, N.0°10'W. on true line bet. secs. 19 and 24. ($N\frac{1}{2}$)
Over level land, thru scattering undergrowth.
The cor. of secs. 13, 18, 19 and 24, which is a rotted stake
4 ins. square, lying on the ground. Alongside is an
unmarked granite rock, 12x8x4 ins. In place of stake
and rock, (the rock is marked with a cross (X)) which
are deposited alongside,

Resurvey of the West Boundary
of
T. 7 S., R. 7 E.

BOOK 3842


Chains

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 13, 18, 19 and 24, with brass cap marked




Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Greasewood, mesquite, sage.

- .90 North on true line bet. secs. 13 and 18. Over level land, thru scattering undergrowth.
- 33.00 Fence, extends E. and W.; cor. of fences extending S. 1° E. and E. bears W., 2.03 chs. dist.
- 40.25 Old winding road, extends N. and SW.; continue along roadway to north.
- 40.25 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked



At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts for wit. cors.; similarly set an marked, with addition of WC in portions of brass caps toward the corner.

- 40.34 Cor. of fences extending N. and W. bears W., 42 lks. dist.
- 42.20 Well and pumping plant bears W., $1\frac{1}{2}$ chs. dist.
- 43.80 Cor. pole of transmission line extending N. and W. to pumping plant bears E., 46 lks. dist.
- 44.05 Ranch house bears W., $1\frac{1}{2}$ chs. dist.
- 60.41 Cor. pole of telephone line extending N. and W. bears W., 30 lks. dist.
- 80.12 Cor. of fences extending S. and W. bears W., 41 lks. dist. Fence encloses cultivated field, to SW.
- 80.50 Cor. pole of power lines extending N., S. and W. bears E., 40 lks. dist.
- 80.50 The cor. of secs. 7, 12, 13 and 18, which is the charred remains of a mesquite stake buried in center of unimproved roadway extending N. and S., at intersection of road extending E. and W. As this is not a suitable place for reconstruction of permanent corner monument, At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 7, 12, 13 and 18, with brass caps marked



and WC in quadrants of brass caps nearest the corner.

Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Mesquite, greasewood and sage.

- .36 N. 0° 25' E. on true line bet. secs. 7 and 12. Over level land, along unimproved roadway, thru undergrowth.
- .46 Cor. pole of telephone lines extending N., S. and W. bears W., 39 lks. dist.
- .46 Cor. of fences extending N. and W. bears W., 46 lks. dist.
- .85 Cor. of fences extending N. and E. bears E., 46 lks. dist.
- .85 Pumping plant bears W., $1\frac{1}{2}$ chs. dist.

Resurvey of the *West Boundary* Subdivisions of T. 7 S. R. 7 E.

chains

- 1.50 A house bears E., 70 lks. dist.
- 1.90 A house bears W., 1 ch. dist.
- 9.97 Cor. of fences extending N., S. and S. $53\frac{1}{2}^{\circ}$ E. bears E., 46 lks. dist.
- 10.12 Telephone lines extend N. $53\frac{1}{2}^{\circ}$ W. and S. $53\frac{1}{2}^{\circ}$ E.
- 10.49 Cor. of fences extending N., S. and N. $53\frac{1}{2}^{\circ}$ W. bears W., 44 lks. dist.
- 12.12 Southern Pacific Railroad, bears N. $53^{\circ}43'$ W. and S. $53^{\circ}43'$ E.
- 13.04 Telegraph lines extend N. 54° W. and S. 54° E.
- 13.72 Cor. of fences extending S. and S. 54° E. bears E., 40 lks. dist.
- 14.24 Cor. of fences extending S. and N. 54° W. bears W., 44 lks. dist.
- 14.50 Highway, bears N. 54° W. to Casa Grande and S. 54° E. to Tucson.
- 14.95 Telephone lines, extend N. 54° W. and S. 54° E.
- Cor. of fences extending N. and S. 54° E. bears E., 47 lks. dist.
- 19.90 Cor. of fences extending N., S. and E. bears E., 47 lks. dist.
- 40.11 Cor. of fences extending S. and E. bears E., 44 lks. dist.
- 40.20 The accepted $\frac{1}{4}$ sec. cor., which is an iron pipe 2 ins. diam., 6 ins. above ground. This is a local reestablishment. In place of pipe, which is deposited alongside, Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 12 | S 7
1928

At points N. 45° W. and S. 45° E., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps nearest the corner.

- Cor. of fences extending N. and W. bears W., 46 lks. dist.
- Cor. pole of power lines extending N., S. and W. bears E., 38 lks. dist.
- 79.96 Cor. of fences extending S. and W. bears W., 46 lks. dist.
- 80.42 The accepted cor. of secs. 1, 6, 7 and 12, which is an iron pipe 2 ins. diam., 6 ins. above ground. This is a local reestablishment. In place of pipe, which is deposited alongside, Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 1, 6, 7 and 12, with brass cap marked

T 7 S
R 6 E R 7 E
S 1 | S 6
S 12 | S 7
1928

At points S. 45° E. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., for wit. cors., similarly set and marked, with addition of WC in quadrants of brass caps toward the corner.

Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Greasewood, mesquite, sage.

- N. $0^{\circ}31'$ W. on true line bet. secs. 1 and 6.
- 3.70 Over level land, thru undergrowth; leave roadway, bears E. Wash, 8 lks. wide, course NW.
- 7.85 Wash, 10 lks. wide, course NW.
- 14.60 Casa Grande-Florence canal, 20 lks. wide, course SW.
- 40.15 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 1 | S 6
1928

At points S. 45° E. and N. 45° W., 64 lks. dist., set similar iron posts, for wit. cors., similarly set and marked, with addition of WC in portions of brass caps toward the corner.

- 80.30 The cor. of Ts. 6 and 7 S., Rs. 6 and 7 E., described in book "H".
Land: Level. Soil: Clayloam, 1st and 2d rate.
Timber: None. Undergrowth: Greasewood, mesquite, sage.

Boundaries of Township & 7 South, Range 7 **BOOK** 3842

Latitudes, Departures and Closing Errors.

Lines designated	True Course	Distance	Latitudes		Departures	
			N.	S.	E.	W.
S. bdy. of Tp.	N. 89° 43' W.	80.62	.40			80.62
	S. 89° 41' W.	80.40		.71		80.40
	S. 89° 34' W.	80.36		.61		80.36
	N. 89° 41' W.	40.18	.22			40.18
	S. 89° 57' W.	40.11		.03		40.11
	N. 89° 47' W.	120.51	.45			120.51
	N. 89° 57' W.	38.81	.03			38.81
W. bdy. of Tp.	N. 0° 03' E.	40.22	40.22		.03	
	N. 0° 02' W.	39.98	39.98			.02
	N. 0° 10' E.	80.18	80.18		.23	
	North	40.26	40.26			
	N. 0° 10' W.	40.16	40.16			.12
	North	80.50	80.50			
	N. 0° 25' E.	80.42	80.42		.58	
N. 0° 31' W.	80.30	80.30			.72	
N. bdy. of Tp.	S. 89° 51' E.	240.55		.63	240.55	
	N. 89° 57' E.	80.30	.07		80.30	
	S. 89° 48' E.	80.44		.28	80.44	
	Rest	80.44			80.44	
E. bdy. of Tp.	S. 0° 24' W.	80.09		80.09		.56
	S. 0° 20' W.	40.16		40.16		.23
	S. 0° 04' W.	40.14		40.14		.05
	S. 0° 06' W.	40.15		40.15		.07
	S. 0° 34' E.	40.15		40.15	.40	
	S. 0° 13' W.	80.36		80.36		.30
	S. 0° 35' E.	40.24		40.24	.41	
	S. 0° 10' E.	40.16		40.16	.12	
	S. 0° 40' W.	39.95		39.95		.47
S. 0° 46' W.	39.92		39.92		.53	
Convergency					.47	
Totals			483.19	483.31	483.97	484.06
Error in Latitude				0.12		
Error in Departure					.01	0.09

Resurvey of the Subdivisions

o f
T. 7 S., R. 7 E.

chains

The subdivision lines of this township were surveyed in 1887 by R.C. Powers, U.S.D.S.

There is no retracement or resurvey of the subdivision lines of this township of record.

The following notes describe a dependent resurvey of the subdivision lines of T.7 S., R.7 E., perpetuating all orig. cors., accepted local cors. or accepted points for cors., and reestablishing all lost cors. by proper proportion.

From the cor. of secs. 1,2,35 and 36, on S. bdy. of Tp., hereinbefore described.

N.0°39'E. on true line bet. secs. 35 and 36.
Over level land, thru scattering undergrowth.

- 36.71 Telephone lines Extend N.53½°W. and S.53½°E.
36.81 Right of way fence, extends N.53½°W. and S.53½°E.
38.67 Southern Pacific Railroad, bears N.53°41'W. and S.53°41'E.
39.45 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for ¼ sec. cor., with brass cap marked

¼
S 35 | S 36
1928

and deposit a one quart bottle alongside post, at base.

- 39.58 Telegraph lines, extend N.53½°W. and S.53½°E.
40.55 Right of way fence, extends N.53½°W. and S.53½°E.
41.22 Highway, bears N.53½°W. to Casa Grande and S.53½°E. to Tucson.
41.65 Telephone lines, extend N.53½°W. and S.53½°E.
53.10 Wash, 10 lks. wide, course NW.

- 78.90 The cor. of secs. 25,26,35 and 36, which is the remains of a mesquite stake 4 ins. square in center line of unimproved roadway extending E. and W., at intersection of roadway extending N. As this point is subject to future grading for road construction and not a suitable place for reconstruction of permanent cor. monument, reset the remains of orig. cor. to 12 ins. under ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 25, 26, 35 and 36, with brass caps marked

T 7 S R 7 E
S 26 | S 25
S 35 | S 36
1928

and WC in quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 7 S. R. 7 E.

chains	From the cor. of secs. 25 and 36, only, on E. bdy. of Tp., hereinbefore described. S. 89°34'W. on true line bet. secs. 25 and 36. Over level land, thru undergrowth, along unimproved roadway.
30.20	Cor. of fences extending S. and E. bears S., 46 lks. dist.
40.33	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked $\begin{array}{r} \frac{1}{4} S 25 \\ \frac{1}{4} S 36 \\ \hline 1928 \end{array}$ and deposit a one quart bottle alongside post, at base. Fence extending E. and W. bears N., 44 lks. dist.
80.66	The cor. of secs. 25, 26, 35 and 36. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.

	N. 0°17'W. on true line bet. secs. 25 and 26. Over level land, thru brush, along unimproved roadway. Cultivated land in sec. 26.
.44	Cor. of fences extending N. and W. bears W., 47 lks. dist.
2.45	Cor. of fences extending N. and E. bears E., 44 lks. dist. A house bears W., 2 chs. dist.; and another house bears W. about 4 chs. dist.
4.35	A barn bears W., 2 chs. dist.
16.37	Cor. of fences extending N., S. and W. bears W., 59 lks. dist.
40.02	Cor. of fences extending S. and W. bears W., 74 lks. dist. N. end of cultivated land in sec. 26.
40.35	Point for 1/4 sec. cor.; falls in roadway. At points N. 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked $\begin{array}{r} \frac{1}{4} \\ S 26 S 25 \\ \hline 1928 \end{array}$ and WC in portions of brass caps nearest point for cor. Fence extending N. and S. bears E., 24 lks. dist.
80.26	Cor. of fences extending S. and E. bears E., 51 lks. dist.
80.70	The cor. of secs. 23, 24, 25 and 26, which is the charred remains of a mesquite stake, buried in ground. Along- side is a pine post, 2x4 ins., 10 ft. above ground. At points N. 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 23, 24, 25 and 26, with brass caps marked $\begin{array}{r} T 7 S R 7 E \\ S 23 S 24 \\ S 26 S 25 \\ \hline 1928 \end{array}$ and WC in quadrants of brass caps nearest the corner.

Resurvey of the Subdivisions

of

T. 7 S. R. 7 E.

chains

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 24 and 25, only, on E. bdy. of Tp.,
 hereinbefore described.

S.89°54'W. on true line bet. secs. 24 and 25.

Over level land, along unimproved roadway, thru brush.

40.19 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
 for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 24
 $\frac{1}{4}$ S 25

1928

and deposit a one pint bottle alongside post, at base.
 Fence extending E. and W. bears S., 43 lks. dist.

80.38 The cor. of secs. 23, 24, 25 and 26.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

N.0°49'W. on true line bet. secs. 23 and 24. ($S\frac{1}{2}$)
 Over level land, thru brush, along unimproved road.

40.09 The $\frac{1}{4}$ sec. cor., which is a mesquite stake, 4 ins. square,
 2 ft. above ground, scribe marks not legible. Reset
 orig. cor., which is 2 $\frac{1}{2}$ ft. long, 36 ins. in ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
 dist., set iron posts, each 3 ft. long 1 in. diam., 33
 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
 caps marked

$\frac{1}{4}$
 S 23 | S 24

1928

and WC in portions of brass caps nearest the corner.

Thence, N.1°27'E. on true line bet. secs. 23 and 24. ($N\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

41.02 The cor. of secs. 13, 14, 23 and 24, which is the remains
 of a mesquite stake 4 ins. sq, 6 ins. long, lying on
 ground. Scribe marks illegible. Other parts of stake
 found in ground at cor. point. Reset the orig. cor. to
 12 ins. under ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
 dist., set iron posts, each 3 ft. long 1 in. diam., 33
 ins. in ground for wit. cors. to cor. of secs. 13, 14, 23
 and 24, with brass caps marked

T 7 S R 7 E
 S 14 | S 13
 S 23 | S 24
 1928

and WC in quadrants of brass caps nearest the corner.

Land: Level. Soil: Clayloam, 1st and 2d rate.
 Timber: None. Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 7 S. R. 7 E.

BOOK 3842

chains	
	From the cor. of secs. 13 and 24, only, on E. bdy. of Tp., hereinbefore described.
	N.89°05'W. on true line bet. secs. 13 and 24. (E $\frac{1}{2}$)
	Over level land, along roadway, thru undergrowth.
18.70	Cultivated land in sec. 13.
20.40	A house bears N., 1 $\frac{1}{2}$ chs. dist.
	Cor. of fences extending N., E. and W. bears N., 47 lks. dist.
40.16	The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, buried in ground. No scribe marks visible. In place of stake, which is deposited alongside,
	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{1}{4} \text{ S } 13 \\ \frac{1}{4} \text{ S } 24 \\ \hline 1928 \end{array}$
	and deposit a one pint bottle alongside post, at base.
	Cor. of fences extending N., E. and W. bears N., 47 lks. dist.
	West end of cultivated land in sec. 13.
	Thence, S.89°47'W. on true line bet. secs. 13 and 24. (W $\frac{1}{2}$)
	Over level land, along roadway, thru undergrowth.
40.00	The cor. of secs. 13, 14, 23 and 24.
	Land: Level.
	Soil: Clayloam, 1st and 2d rate.
	Timber: None.
	Undergrowth: Greasewood, mesquite and sage.

	N.0°04'W. on true line bet. secs. 13 and 14.
	Over level land, thru undergrowth, along unimproved roadway.
.45	Cor. of fences extending N. and E. bears E., 45 lks. dist.
39.75	The $\frac{1}{4}$ sec. cor., which is a mesquite post 4 ins. square, 1 ft. above ground, scribe marks illegible. Reset orig. cor., which is 2 ft. long, 36 ins. in ground, and
	At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked
	$\begin{array}{r} \frac{1}{4} \\ \text{S } 14 \text{ S } 13 \\ \hline 1928 \end{array}$
	and WC in portions of brass caps nearest the corner.
	Cor. of fences extending S. and E. bears E., 45 lks. dist.
	Continue measure on same course, bet secs. 13 and 14
55.55	Road, extends N. and SE.
59.60	Cor. of fences extending N. and W. bears W., 59 lks. dist.
69.35	A house bears W., 3 $\frac{1}{2}$ chs. dist.
79.09	Cor. of fences extending S. and W. bears W., 45 lks. dist.
79.51	The cor. of secs. 11, 12, 13 and 14, which is a mesquite stake 4 ins. square, 2 ft. above ground, with scribe marks not legible. Reset this orig. cor., which is 2 $\frac{1}{2}$ ft. long, 36 ins. in ground, and
	At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 11, 12, 13 and 14, with brass caps marked

Resurvey of the Subdivisions
of

T. 7 S., R. 7 E.

Chains

T 7 S R 7 E
S 11 | S 12
S 14 | S 13
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp.,
hereinbefore described.

S. 89°30'W. on true line bet. secs. 12 and 13. (E $\frac{1}{2}$)

Over level land, thru undergrowth, along roadway.

19.96 Cor. of fences extending E., W. and S. bears S., 31 lks. dist.

39.70 The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite post,
4 ins. square, buried in ground. In place of post, which
is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 12
S 13
1928

deposit a marked (X) stone and 3 ft. of 1 in. link
chain, alongside of post, at base.

Cor. of fences extending E. and N., bears N., 46 lks. dist.

Cor. of fences extending W. and N., bears N., 73 lks. dist.

Thence, N. 89°46'W. on true line bet. secs. 12 and 13. (W $\frac{1}{2}$)

Over level land, thru undergrowth: along unimproved roadway.

.27 Cor. of fences extending E., W. and S. bears S., 12 lks. dist.

30.12 Cor. of fences extending N. and E. bears N., 63 lks. dist.

30.30 Cor. of fences extending S. and E. bears S., 28 lks. dist.

Old winding road, bears S. and N. 20°W.

40.10 The cor. of secs. 11, 12, 13 and 14.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 9°24'E. on true line bet. secs. 11 and 12.

Over level land, thru undergrowth, along roadway.

40.05 Old fence, extends E. and W.; cor. of fences extending E.
N. and S. bears W., 77 lks. dist.

40.11 Point for $\frac{1}{4}$ sec. cor.

At points N. 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$
S 11 | S 12
1928


and WC in quadrants of brass caps nearest point for cor.

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains


- 46.00 An abandoned house bears W., 4 chs. dist.
 - 60.25 Cor. of fences extending S. and W. bears W., 61 lks. dist.
 - 80.22 Accepted point for cor. of secs. 1, 2, 11 and 12, determined from collateral evidence, i.e., center line of roads extending N., S., E. and W., at intersection, and property fencing to NW. and NE.
- At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 1, 2, 11 and 12, with brass caps marked



and WC in quadrants of brass caps nearest point for cor.

Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

- From the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., hereinbefore described.
 S.89°11'W. on true line bet. secs. 1 and 12. (E $\frac{1}{2}$)
 Over level land, thru undergrowth, along unimproved road.
- 34.70 Cor. of fences extending E., W. and N. bears N., 46 lks. dist.
 - 35.40 A house bears N., 80 lks. dist.
 - 38.40 A house bears N., 90 lks. dist.
 - 39.28 The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, 4 ins. square, buried in roadway. In place of stake, which is deposited alongside,
- Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked




and deposit a one pint bottle alongside post, at base.
 Cor. of fences extending E. and S. bears S., 46 lks. dist.
 Cor. of fences extending N., W. and E. bears N., 47 lks. dist.


From cor., a new bearing tree:
 A mesquite, 20 ins. diam., bears S.89°E., 69 lks. dist.
 marked $\frac{1}{4}$ S 12 BT.

Thence, N.89°33'W. on true line bet. secs. 1 and 12. (W $\frac{1}{2}$)
 Over level land, thru undergrowth, along unimproved road.

- 9.50 Pump house bears N., 1 ch. dist.
 - 10.00 A house bears N., 1 ch. dist.
 - 20.30 Cor. of fences extending E., W. and N. bears N., 46 lks. dist.
 - 40.20 The point for cor. of secs. 1, 2, 11 and 12.
- Land: Level.
 Soil: Clayloam, 1st and 2d rate.
 Timber: None.
 Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 7 S. R. 7 E.

chains	
	From point for cor. of secs. 1,2,11 and 12. N.0°19'W: on true line bet. secs. land 2. Over level land, thru undergrowth, along unimproved road. Cultivated land in sec. 1.
.46	Cor. of fences extending N. and E. bears E., 46 lks. dist.
20.42	Cor. of fences extending N. and W. bears W., 46 lks. dist.
39.45	Cor. of fences extending S. and W. bears W., 6 lks. dist.
40.00	Cor. of fences extending S. and E. bears E., 48 lks. dist.
	The accepted $\frac{1}{4}$ sec. cor., which is an iron pin, 1 in. diam., 2 ins. above ground, at intersection of roads extending N., S., E. and W.
	At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked
	 <p>S 2 S 1</p>
	1928
	and WC in portions of brass caps nearest the corner. Transmission line, overhead, bears E. and W. Continue measure on same course on true line bet. secs. 1 and 2. Cultivated land in sec. 1.
40.30	Cor. of fences extending N. and E. bears E., 45 lks. dist.
42.50	A house bears E., 6 chs. dist.
60.66	Cor. of fences extending N., S. and E. bears E., 46 lks. dist.
79.91	Cor. of fences extending S. and E. bears E., 46 lks. dist.
80.00	Telephone line, extends E. and W.
80.37	The point for cor. of secs. 1,2,35 and 36, on N. bdy. of Tp., described in book "H".
	Land: Level. Soil: Clayloam, 1st and 2 d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.

	From the cor. of secs. 2,3,34 and 35, on S. bdy. of Tp., hereinbefore described. N.0°54'E. on true line bet. secs. 34 and 35. Over level land, thru scattering undergrowth.
27.50	Wash, 25 lks. wide, course SW.
39.75	Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	 <p>S 34 S 35</p>
	1928
	and deposit a one quart bottle alongside post, at base.
79.50	The cor. of secs. 26,27,34 and 35, which is a mesquite stake 6 ins. square, 2 ft. above ground and marked. S 26 on NE., S 35 on SE., T 7 S S 34 on SW. and R 7 E S 27 on NW. side. In place of stake, which is buried alongside,
	Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 26,27,34 and 35, with brass cap marked

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains

T 7 S R 7 E
S 27 | S 26
S 34 | S 35
1928

and deposit a one quart bottle alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 25, 26, 35 and 36.
N. 89° 51' W. on true line bet. secs. 26 and 35.
Over level land, along unimproved road, thru undergrowth.

40.04 Cor. of fences extending N. and E. bears N., 57 lks. dist.

40.07 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked

1/4 S 26
1/4 S 35
1928

and deposit a one quart bottle alongside post, at base.

- 51.36 Telephone line, extends N. 53 1/2° W. and S. 53 1/2° E.
- 52.10 Highway, extends S. 53 1/2° E. to Tucson and N. 53 1/2° W. to Casa Grande.
- 52.87 Right of way fence, extends N. 53 1/2° W. and S. 53 1/2° E.
- 54.19 Telegraph lines, extend N. 53 1/2° W. and S. 53 1/2° E.
- 55.45 Southern Pacific Railroad, extends N. 53° 41' W. and S. 53° 41' E.
- 58.03 Right of way fence, extends N. 53 1/2° W. and S. 53 1/2° E.
- 58.14 Telephone lines, extend N. 53 1/2° W. and S. 53 1/2° E.,
Continue over level land, thru undergrowth.
- 80.14 The cor. of secs. 26, 27, 34 and 35.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

N. 0° 38' W. on true line bet. secs. 26 and 27. (S 1/2)
Over level land, thru undergrowth.

- .46 Cor. of fences extending N. and W. bears W., 46 lks. dist.
- 1.20 A water tank and pump house bears W., 1 ch. dist.
- 1.70 Reservoir bears W., 1 ch. dist.
- 16.24 Telephone lines, extend N. 53 1/2° W. and S. 53 1/2° E.
- 16.34 Right of way fence, extends N. 53 1/2° W. and S. 53 1/2° E.; cor.
of fences extending S. and N. 53 1/2° W. bears NW., 40 lks. dist.
- 18.24 Southern Pacific Railroad, bears N. 53° 41' W. and S. 53° 41' E.
- 19.20 Telegraph lines, extend N. 53 1/2° W. and S. 53 1/2° E.
- 20.16 Right of way fence, extends N. 53 1/2° W. and S. 53 1/2° E.
- 20.63 Highway, bears N. 53 1/2° W. to Casa Grande and S. 53 1/2° E. to Tucson.
- 21.27 Telephone lines, extend N. 53 1/2° W. and S. 53 1/2° E.
- 26.60 Ditch, 20 lks. wide, course N. 53 1/2° W.

40.41 The 1/4 sec. cor., which is a mesquite stake 4 ins. square,
16 ins. above ground, marked 1/4 s 27 on W. and S 26 on E.
side. Bury this stake, which is 2 1/2 ft. long, to 6 ins.
under ground and

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked

1/4
S 27 | S 26
1928

Resurvey of the Subdivisions
of
T. 7. S., R. 7. E.


chains

and WC in portions of brass caps nearest the corner.

Thence, N.0°15'W. on true line bet. secs. 26 and 27. (N½)
Over level land, thru undergrowth.

40.22 The cor. of secs. 22, 23, 26 and 27, which is a mesquite stake 4 ins. square 16 ins. above ground and marked S 23 on NE., S 26 R 7 E on SE., S 27 T 7 S on SW. and S 22 on NW. side. Alongside is a mesquite stake 3 ins. square, 2 ft. long, lying on ground, scribe marks illegible. This is the orig. sec. cor., which has been perpetuated, locally, by the first described corner. Bury both cors., which are 2 ft. long, to 6 ins. under ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 22, 23, 26 and 27, with brass caps marked




and WC in quadrants of brass caps nearest the corner.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 23, 24, 25 and 26.
N.89°54'W. on true line bet. secs. 23 and 26.
Over level land, along unimproved road, thru undergrowth.

40.18 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for ¼ sec. cor., with brass cap marked



and deposit a 1 quart bottle alongside post, at base.

80.36 The cor. of secs. 22, 23, 26 and 27.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, mesquite and sage.

N.0°45'E. on true line bet. secs. 22 and 23. (S½)
Over level land, thru undergrowth.

40.24 The ¼ sec. cor., which is a mesquite stake 6 ins. square 14 ins. above ground, marked ¼ S 22 on W., S 23 on E. this is a local perpetuation. The orig. cor. is a mesquite stake 3 ins. square, 12 ins. long, lying alongside post, with scribe marks illegible. Bury both posts to 6 ins. under ground and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked

Resurvey of the Subdivisions
of
T. 7 S., R. 7. E.

BOOK 3842

chains

$\frac{1}{4}$
S 22 | S 23
1928

and WC in portions of brass caps nearest the corner.

Thence, N.0°03'W. on true line bet. secs. 22 and 23. (N $\frac{1}{2}$)
Over level land, thru undergrowth.

40.31 The cor. of secs. 14, 15, 22 and 23, which is a mesquite stake 4 ins. square, 18 ins. above ground and marked S 14 on NE., S 7 S S 23 on SE., R 7 E S 22 on SW. and S 15 on NW. side. Reset this stake, which is 30 ins. long, 36 ins. in ground and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 14, 15, 22 and 23, with brass caps marked

T 7 S R 7 E
S 15 | S 14
S 22 | S 23
1928

and WC in quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 13, 14, 23 and 24.
S.89°46'W. on true line bet. secs. 14 and 23.
Over level land, along old road, thru undergrowth.

40.23 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 14
S 23
1928

and deposit a one pint bottle alongside post, at base.

80.46 The cor. of secs. 14, 15, 22 and 23.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

N.0°05'E. on true line bet. secs. 14 and 15.
Over level land, thru undergrowth.

40.03 The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, 4 ins. square, 12 ins. long, set flush with ground. No marks visible on stake. Reset stake 18 ins. in ground,

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 15 | S 14
1928

Resurvey of the Subdivisions
of

T. 7 S., R. 7 E.

chains

and WC in quadrants of brass caps nearest the corner.

Continue measure on same course, true line bet. secs. 14 and 15.

80.06 The cor. of secs. 10, 11, 14 and 15, which is a mesquite stake 4 ins. square, 18 ins. above ground, with scribe marks visible but no longer legible. Alongside is an iron post 2 ins. diam., 6 ins. above ground. Reset stake and post, which are 2 ft. long, 30 ins. in ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam, 33 ins. in ground for wit. cors. to cor. of secs. 10, 11, 14 and 15, with brass caps marked.

T 7 S R 7 E
S 10 | S 11
S 15 | S 14
1928.

and WC in quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 11, 12, 13 and 14.

N.89°46'W. on true line bet. secs. 11 and 14.

Over level land, along old road, thru undergrowth.

10.00 Cor. of fences extending S. and E. bears S., 37 lks. dist.

22.00 A ranch house bears N., 4½ chs. dist.

40.15 The ¼ sec. cor., which is a mesquite stake 4 ins. square, 18 ins. above ground, with scribe marks illegible. alongside is an iron pipe 2 ins. diam., 6 ins. above ground. Reset the stake and pipe, which are 2 ft. long, 33 ins. in ground, and alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for ¼ sec. cor., with brass cap marked

¼ S 11
¼ S 14

1928

and deposit a one pint bottle alongside post, at base.

Cor. of fences extending N. and W. bears N., 45 lks. dist.

Continue measure on same course on true line bet. secs. 11 and 14.

66.00 A house bears N., 2½ chs. dist.

80.29 The cor. of secs. 10, 11, 14 and 15.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842


chains

N.0°06'W. on true line bet. secs. 10 and 11.
Over level land, along old road, thru undergrowth.

49 Cor. of fences extending N. and E. bears E., 48 lks. dist.

40.09 The 1/4 sec. cor., which is a mesquite stake 4 ins. square,
18 ins. above ground, scribe marks not legible. Along-
side is an iron pipe 2 ins. diam., 6 ins. above ground.
Reset the stake and pipe, which are 2 ft. long, 30
ins. in ground and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked




1928

and WC in portions of brass caps nearest the corner.
Cor. of fences extending N., S. and E. bears E., 45 lks. dist.
S. end of fence extending N. bears W., 46 lks. dist.
Continue measure on same course, true line bet. secs. 10 and 11.

79.75 Cor. of fences extending S. and E. bears E., 43 lks. dist.
Cor. of fences extending S. and W. bears W., 45 lks. dist.

80.22 The cor. of secs. 2, 3, 10 and 11, which is an iron pipe 2
ins. diam., 6 ins. above ground. This is a local per-
petuation of orig. point for cor. Reset pipe, which is
2 ft. long, 30 ins. in ground and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 2, 3, 10
and 11, with brass caps marked



and WC in quadrants of brass caps nearest the corner.


Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

From the point for cor. of secs. 1, 2, 11 and 12.
N.89°08'W. on true line bet. secs. 2 and 11. (E 1/2)
Over level land, along old road, thru undergrowth.

17.30 A house bears N., 4 chs. dist.
21.20 Cor. of fences extending N. and E. bears N., 70 lks. dist.
40.09 E. end of fence extending W. bears S., 42 lks. dist.

40.20 The 1/4 sec. cor., which is an iron pipe 2 ins. diam., 4
ins. above ground. This is a local perpetuation of orig.
point for cor. In place of pipe, which is deposited
alongside,

Set an iron post, 3 ft. long 1 in. diam., 33 ins. in ground
for 1/4 sec. cor., with brass cap marked



1928

and deposit a one quart bottle alongside post, at base.

Resurvey of the Subdivisions
of

T. 7 S. R. 7 E.

chains

	Thence, S.89°30'W. on true line bet. secs. 2 and 11. ($W\frac{1}{2}$) Over level land, along old road, thru undergrowth.
20.20	Cor. of fences extending N. and W. bears N., 70 lks. dist.
40.86	The cor. of secs. 2, 3, 10 and 11. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.
	N.0°06'W. on true line bet. secs. 2 and 3. ($S\frac{1}{2}$) Over level land, along old roadway, thru undergrowth.
.46	Cor. of fences extending N. and E. bears E., 45 lks. dist.
40.15	Cor. of fences extending N., S. and E. bears E., 30 lks. dist. Cor. of fences extending N. and W. bears W., 61 lks. dist. Cor. pole of power line extending N. and E. bears W., 38 lks. dist.
40.15	Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, i.e., property fences extending E. and W. and N. and S. At points N., 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{1}{4}$ S 3 S 2 1928 and WC in portions of brass caps nearest point for cor.
	Thence, N.0°20'E. on true line bet secs. 2 and 3. ($N\frac{1}{2}$) Over level land, along old road, thru undergrowth.
9.00	A house bears W., 3 chs. dist.
20.09	Cor. of fences extending N., S. and E. bears E., 45 lks. dist.
39.77	Cor. of fences extending S. and W. bears W., 45 lks. dist. Cor. of fences extending S. and E. bears E., 47 lks. dist.
40.25	The cor. of secs. 2, 3, 34 and 35, on N. bdy. of Tp., des- cribed in book "H". Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Mesquite, greasewood and sage.
	From the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., hereinbefore described. N.0°55'E. on true line bet. secs. 33 and 34. Over level land, along graded road, thru undergrowth.
39.83	Point for $\frac{1}{4}$ sec. cor., falls in graded road. At points N. 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked S 33 S 34 1928 and WC in portions of brass caps nearest point for cor.
40.08	Cor. of fences extending N., S. and E. bears E., 45 lks. dist.
59.64	Cor. of fences extending N. and W. bears W., 45 lks. dist.
70.34	An adobe house bears E., 5 chs. dist.

Resurvey of the Subdivisions
of
T. 7 S. R. 7 E.


BOOK 3842

chains

79.20 Cor. of fences extending S. and E. bears E., 46 lks. dist.
Cor. of fences extending S. and W. bears W., 46 lks. dist.

79.66 The orig. point for cor. of secs. 27, 28, 33 and 34, which
is identified by deposit of charcoal under surface of
graded road extending N. and S., at intersection of
roads extending E. and W.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 27, 28,
33 and 34, with brass caps marked




and WC in quadrants of brass caps nearest the point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 26, 27, 34 and 35.
S.89°47'W. on true line bet. secs. 27 and 34. (E½)
Over level land, along old road, thru undergrowth.
Cultivated land in sec. 27.

39.95 Point for ¼ sec. cor., determined from collateral evidence,
i.e., center line of roadway extending E. and W. and
property fence extending S.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to ¼ sec. cor., with brass
caps marked



and WC in portions of brass caps nearest point for cor.

Cor. of fences extending S. and W. bears S., 45 lks. dist.
Fence extending E. and W. bears N., 45 lks. dist.

Thence, S.89°31'W. on true line bet. secs. 27 and 34. (W½)
Over level land, along improved road. Cultivated land in
sec. 27.

40.37 The point for cor. of secs. 27, 28, 33 and 34.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, sage and mesquite.

From point for cor. of secs. 27, 28, 33 and 34.
N.0°32'W. on true line bet. secs. 27 and 28.
Over level land, along improved road; cultivated land in
sec. 27.

.44 Cor. of fences extending N. and E. bears E., 44 lks. dist.

40.59 Point for ¼ sec. cor. falls in improved road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

chains

ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 28 | S 27
1928

and WC on portions of brass caps nearest point for cor.

Cor. of fences extending N. and W. bears W., 48 lks. dist.

Cor. of fences extending N., S. and E. bears E., 45 lks. dist.

Continue along improved road between cultivated fields.

40.86 Ditch, 8 lks. wide, course W., 50 lks., thence N.

61.04 Cor. of fences extending S. and W. bears W., 46 lks. dist.
N. end of cultivation in sec. 28.

Cor. of fences extending S. and E. bears E., 47 lks. dist.
N. end of cultivation in sec. 27.

65.60 To Tec Hotel bears W., 50 lks. dist.

74.30 Telephone line, extends S. 54° E. and N. 54° W.

78.18 Southern Pacific Railroad, bears S. $53^\circ 42'$ E. and N. $53^\circ 42'$ W.

79.14 Telegraph lines extend S. 54° E. and N. 54° W.

81.18 The cor. of secs. 21, 22, 27 and 28, which is a mesquite stake 4 ins. square 12 ins. long, buried in ground. No marks visible on stake. Reset to 6 ins. under ground,

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 21, 22, 27 and 28, with brass caps marked

T 7 S R 7 E
S 21 | S 22
S 28 | S 27
1928

and WC on quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 22, 23, 26 and 27.

N. $89^\circ 56'$ W. on true line bet. secs. 22 and 27.

Over level land, along old winding road, thru undergrowth.

40.14 The $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake 4 ins. square, 12 ins. long, scribe marks illegible, lying on ground. Other remains of stake dug up at orig. cor. point. In place of stake, which is deposited along-side,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 22
S 27
1928

deposit an iron pin, 1 in. diam., 12 ins. long, along-side post, at base.

Continue measure on same course, true line bet. secs. 22 and 27.

77.90 Telephone lines, extend S. 54° E. and N. 54° W.

78.65 Highway, bears N. 54° W. to Casa Grande and S. 54° E. to Tucson.

80.41 The cor. of secs. 21, 22, 27 and 28.

Resurvey of the Subdivisions
of
T. 7. S., R. 7. E.

BOOK 3842


chains

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°42'E. on true line bet. secs. 21 and 22. (S $\frac{1}{2}$)
Over level land, thru undergrowth.

- 1.25 Highway, extends S.54°E. to Tucson and N.54°W. to Casa Grande.
 - 1.87 Telephone lines, extend S.54°E. and N.54°W.
 - 2.10 A gasoline filling station, bears E., 70 lks. dist.
 - 4.30 Ditch, 7 lks. wide, course N.10°W.
 - 4.80 Ditch, 8 lks. wide, course S.80°E.
- 39.95 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 16 ins. above ground, with scribe marks illegible. Reset this stake, which is 2 ft. long, 30 ins. in ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked




and WQ on portions of brass caps nearest the corner.

Thence, N.0°21'E. on true line bet. secs. 21 and 22. (N $\frac{1}{2}$)
Over level land, thru undergrowth.

- 35.40 Old road, extends SW. and N.
- 40.19 The cor. of secs. 15, 16, 21 and 22, which is a mesquite stake 4 ins. square 2 ft. above ground, marked T 7 S S 15 on NE., S 22 on SE., S 21 on SW. and R 7 E S 16 on NW. side. Reset this stake, which is 3 ft. long, 42 ins. in ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 15, 16, 21 and 22, with brass caps marked



and WC on quadrants of brass caps nearest the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 14, 15, 22 and 23.
S.89°39'W. on true line bet. secs. 15 and 22. (E $\frac{1}{2}$)
Over level land, along winding road, thru undergrowth.

- 14.00 Intersection of old roads extending N., S., E. and W.
- 40.01 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 6 ins. square, 12 ins. above ground, marked $\frac{1}{4}$ S 15 on N. and S 22 on S. side. In place of stake, which is buried alongside,
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

Resurvey of the Subdivisions

of

T. 7. S. R. 7. E.

chains

$$\frac{1}{4} \text{ S } 15$$

$$\frac{1}{4} \text{ S } 22$$

1928

and deposit a one-pint bottle alongside post, at base.

Thence, S.89°48'W. on true line bet. secs. 15 and 22. (W $\frac{1}{4}$)
Over level land, along winding road, thru undergrowth.

.50 Large hole, possibly a well under construction, bears
N., 125 lks. dist.

40.00 Intersection of old roads extending N., S. and E.

40.13 The cor. of secs. 15;16,21 and 22.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N.0°18'W. on true line bet. secs. 15 and 16. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.24 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
18 ins. above ground, marked $\frac{1}{4}$ S on W. side, alongside
is a redwood post 8 ins. square, 2 $\frac{1}{2}$ ft. above ground,
marked $\frac{1}{4}$ S 16 on W. and $\frac{1}{4}$ S 15 on E. side. Reset
the stake, which is 2 $\frac{1}{2}$ ft. long, 36 ins. in ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$$\frac{1}{4}$$

$$\text{S } 16 \mid \text{S } 15$$

1928

and WC on portions of brass caps nearest the corner.

Thence, N.1°06'W. on true line bet. secs. 15 and 16. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.00 The cor. of secs. 9,10,15 and 16, which is a mesquite
stake 4 ins. square 2 ft. long, lying on ground, scribe
marks illegible. Alongside is a redwood post 8 ins.
square, 3 ft. above ground and marked S 10 on NE., S 15
on SE., S 16 on SW. and S 9 on NW. side. Reset the
stake 30 ins. in ground, at true cor. point, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 9, 10,
15 and 16, with brass caps marked

$$\text{T } 7 \text{ S } \text{R } 7 \text{ E}$$

$$\text{S } 9 \mid \text{S } 10$$

$$\text{S } 16 \mid \text{S } 15$$

1928

and WC on quadrants of brass caps nearest the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of

BOOK 3842

T. 7 S. R. 7 E.

chains From the cor. of secs. 10, 11, 14 and 15.
S.89°07'W. on true line bet. secs. 10 and 15. (E $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.94 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
16 ins. above ground, scribe marks illegible. In place
of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 10
S 15

1928

and deposit a one pint bottle alongside post, at base.

Thence, N.89°21'W. on true line bet. secs. 10 and 15. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.19 The cor. of secs. 9, 10, 15 and 16.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N.0°38'E. on true line bet. secs. 9 and 10. (S $\frac{1}{2}$)
Over level land, thru undergrowth.

6.00 Old road, bears N.80°W. and S.80°E.

40.16 The $\frac{1}{4}$ sec. cor., which is a rotted mesquite stake, 2 ins.
square, 14 ins long, lying on ground; scribe marks il-
legible. Alongside is a redwood post 4 ins. square 2 $\frac{1}{2}$
ft. above ground, marked $\frac{1}{4}$ S 10 on E. and $\frac{1}{4}$ S 9 on W.
side. Bury the remains of orig. cor. stake 6 ins. un-
der ground, alongside redwood post, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$
S 9 | S 10

1928

and WC on quadrants of brass caps toward the corner.
Thence, N.0°09'W. on true line bet. secs. 9 and 10. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.21 The cor. of secs. 3, 4, 9 and 10, which is the remains of
a mesquite stake, 4 ins. square, 6 ins. long, in a
mound of earth. Reset stake to 10 ins. under ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 3, 4, 9
and 10, with brass caps marked.

T 7 S R 7 E
S 4 | S 3
S 9 | S 10

1928

and WC in quadrants of brass caps toward the corner.
A monument on NE. of 3 buttes in sec. 9 bears S.47°30'W.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions

of

T. 7 S., R. 7 E.

chains

From the cor. of secs. 2, 3, 10 and 11.
S. 89° 31' W. on true line bet. secs. 3 and 10. (S 1/2)
Over level land, along roadway, thru undergrowth.

6.10
20.40

Cor. of fences extending N. and W. bears N., 45 lks. dist.
Cor. of fences extending N. and E. bears N., 45 lks. dist.

40.29

The 1/4 sec. cor., which is a rotted mesquite stake, 2 ins. square, 14 ins. long, lying on ground. Alongside is an iron pipe 1 1/2 ins. diam., 14 ins. above ground. In place of stake and pipe, which are buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 3
S 10

1928

West end of fence extending E. bears S., 64 lks. dist.

Thence, N. 89° 37' W. on true line bet. secs. 3 and 10. (W 1/2)
Over level land, along old road, thru undergrowth.

40.39

The cor. of secs. 3, 4, 9 and 10.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

N. 0° 14' E. on true line bet. secs. 3 and 4. (S 1/2)
Over level land, thru undergrowth.

40.21

The 1/4 sec. cor., which is a charred stake 4 ins. square, 2 ins. above ground. Top of stake has been obliterated. Reset this stake, which is 12 ins. long, 18 ins. in ground,

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked

1/4
S 4 | S 3

1928

and WC in portions of brass caps nearest the corner.

Thence, N. 0° 03' E. on true line bet. secs. 3 and 4. (N 1/2)
Over level land, thru scattering undergrowth.

40.23

The cor. of secs. 3, 4, 33 and 34, on N. bdy. of Tp., described in book "H".

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 7. S., R. 7. E.

chains


From the cor. of secs. 28, 29, 32 and 33, on S. bdy. of Tp.,
hereinbefore described.

N.1°50'E. on true line bet. secs. 32 and 33. (S½)
Over level land, thru scattering undergrowth.

39.73

The ¼ sec. cor., which is a mesquite stake 4 ins. square,
16 ins. above ground, marked ¼ S 32 on W. and S 33 on E.
side, In place of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for ¼ sec. cor., with brass cap marked



and deposit a 1 quart bottle alongside post, at base.

Thence, N.0°17'E. on true line bet. secs. 32 and 33. (N½)
Over level land, thru scattering undergrowth, along old road.

20.23

Cor. of fences extending N. and W. bears W., 48 lks. dist.
Cor. of fences extending N. and E. bears E., 44 lks. dist.

26.27

Cor. of fences extending N., S. and W. bears W., 46 lks. dist.

31.45

A ramshackle house and water tank bears E., 3 chs. dist.


39.78

Cor. of fences extending S. and W. bears W., 46 lks. dist.
Cor. of fences extending S. and E. bears E., 43 lks. dist.

40.12

The cor. of secs. 28, 29, 32 and 33, which is a mesquite
stake 4 ins. square, 1 ft. above ground and marked S 28
on NE., S 33 on SE., S. 32 on SW. and S 29 on NW. side.
In place of stake, which is buried alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 28, 29, 32 and 33, with brass cap marked



and deposit a one quart bottle alongside post, at base.


- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 27, 28, 33 and 34.
N.89°42'W. on true line bet. secs. 28 and 33. (E½)
Over level land, along road, thru scattering undergrowth.

40.08

The ¼ sec. cor., which is a mesquite stake 4 ins. square,
2 ft. above ground marked ¼ on N. side. In place of
stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for ¼ sec. cor., with brass cap marked



Fence extending E. and W. bears S., 48 lks. dist.
Thence, N.89°47'W. on true line bet. secs. 28 and 33. (W½)
Over level land, along road, thru scattering undergrowth.

1.00

A house bears S., about 10 chs. dist.

Resurvey of the Subdivisions
of

T. 7 S. R. 7 E.

chains

40.05 The cor. of secs. 28, 29, 32, and 33.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

N. 0° 45' W. on true line bet. secs. 28 and 29.
Over level land, thru scattering undergrowth.

40.63 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S 29 | S 28

1928

and deposit a one quart bottle alongside post, at base.

81.25 The cor. of secs. 20, 21, 28 and 29, which is a mesquite s
stake 5 ins. square 14 ins. above ground and marked
T 7 S S 21 on NE., S 28 on SE., S 29 on SW. and R 7 E
S 20 on NW. side. In place of stake, which is buried
alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 20, 21, 28 and 29, with brass cap marked

T 7 S R 7 E

S 20 | S 21

S 29 | S 28

1928

and deposit a one quart bottle alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 21, 22, 27 and 28.
N. 89° 37' W. on true line bet. secs. 21 and 28.
Over level land, thru scattering undergrowth.

2.84 Telegraph lines, extend S. 54° E. and N. 54° W.
3.76 Southern Pacific Railroad, siding, bears S. 53° 42' E. and
N. 53° 42' W.

4.12 Southern Pacific Railroad, bears S. 53° 42' E. and N. 53° 42' W.

9.34 Telephone lines, extend N. 54° W. and S. 54° E.

20.40 Leave undergrowth, enter cultivated field, bears N. and S.
A ditch, 5 lks. wide, course N.

40.20 The $\frac{1}{4}$ sec. cor., which is an iron pipe 2 ins. diam., 4 ins.
above ground, in cultivated field. In place of pipe,
which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 36 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 21
S 28

1928

and deposit a one quart bottle alongside post, at base.
Continue measure on same course, true line bet. secs. 21 and 28.

Resurvey of the Subdivisions
of
T. 7. S., R. 7. E.

BOOK 3842

chains

40.68 Fence extends N. and S.; leave cultivated land, enter scattering undergrowth, bears N. and S.

41.60 An old well bears N., 1 ch. dist.

80.40 The cor. of secs. 20, 21, 28 and 29.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 33' E. on true line bet. secs. 20 and 21.
Over level land, thru scattering undergrowth.

40.00 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S 20 | S 21

1928

and deposit a one quart bottle alongside post, at base.

53.25 Telephone lines, extend S. 54° E. and N. 54° W.

53.35 Right of way fence, extends S. 54° E. and N. 54° W.

55.22 Southern Pacific Railroad, bears S. 53° 42' E. and N. 53° 42' W.

56.14 Telegraph lines, extend S. 54° E. and N. 54° W.

57.09 Right of way fence, extends S. 54° E. and N. 54° W.

57.60 Highway, extends S. 54° E. to Tucson and N. 54° W. to Casa Grande.

58.15 Telephone lines, extend S. 54° E. and N. 54° W.

Continue along improved road, extends N.

80.00 Point for cor. of secs. 16, 17, 20 and 21, falls in improved road.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 16, 17, 20 and 21, with brass caps marked

T 7 S R 7 E

S 17 | S 16

S 20 | S 21

1928

and WC on quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 15, 16, 21 and 22.
N. 89° 44' W. on true line bet. secs. 16 and 21.
Over level land, thru scattering undergrowth.

40.20 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 16
S 21

1928

and deposit a 5 oz bottle alongside post, at base.

80.40 The point for cor. of secs. 16, 17, 20 and 21.

Resurvey of the Subdivisions
of

T. 7 S. R. 7 E.

chains

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

From point for cor. of secs. 16, 17, 20 and 21.
N.0°40'W. on true line bet. secs. 16 and 17.
Over level land, along improved road, thru undergrowth.

40.00 Point for $\frac{1}{4}$ sec. cor. falls in improved road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 17 | S 16
1928

and WC in portions of brass caps toward the point for cor. The monument on NE. of 3 buttes bears N.22°55'E., in sec. 9.

47.60 Wash, 10 lks. wide, course N.80°W.

78.20 Graded road turns to NE.; foot of SE. of Tolve Buttes, ascend 30 ft. over rocky slope.

78.80 W. end of gravel pit at base of butte.

80.00 The cor. of secs. 8, 9, 16 and 17, which is a mound of stone 3 ft. base and 1 ft. high.

Set an iron post 3 ft. long 2 ins. diam., 30 ins. in ground for cor. of secs. 8, 9, 16 and 17, with brass cap marked

T 7 S R 7 E
S 8 | S 9
S 17 | S 16
1928

and rebuild the mound of stone 2 $\frac{1}{2}$ ft. base 2 ft. high west of corner.

Land: Level and rolling.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 9, 10, 15 and 16.
N.89°44'W. on true line bet. secs. 9 and 16. (E $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.24 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 6 ins. above ground in a mound of stone 3 ft. base and 1 ft. high. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 9
S 16
1928

and rebuild the mound of stone 2 ft. base 1 $\frac{1}{2}$ ft. high N. of corner.

Thence, S.89°52'W. on true line bet. secs. 9 and 16. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains


- 18.20 Old road, bears NE. and SW.
- 19.80 Gravel pit, 40 lks. wide.
- 20.00 Base of butte, bears NE. and SW.; ascend 100 ft. over E. slope; leave level for rolling land.
- 27.80 Crest of butte, bears NE. and SW.; descend 80 ft.
- 35.00 Base of butte, bears NE. and SW.; continue over rolling land.
- 36.25 Improved road, bears NE. and SW.
- 40.07 The cor. of secs. 8,9,16 and 17.

Land: Level, and rolling.
Soil: Clayloam, 1st and 2d rate, and rocky, 3d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

N.0°09'E. on true line bet. secs. 8 and 9.
Over rolling land, thru scattering undergrowth.
Ascend 40 ft. over SE. slope.


- 2.70 Crest of butte, bears E. and W.; slopes E.; desc. 65 ft.
- 7.80 Base of butte, bears E. and W.; continue over level land, along graded road, bears N. and SE.
- 23.63 Cor. of fences extending N. and W. bears W., 24 lks. dist.
- 40.25 Point for $\frac{1}{4}$ sec. cor. falls in improved road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked



- and WC on portions of brass caps toward point for corner.
- 47.00 Cor. of fences extending N., S. and W. bears W., 29 lks. dist.
- 60.19 A deserted house bears W., 2 $\frac{1}{2}$ chs. dist.
- 80.50 Cor. of fences extending S. and W. bears W., 38 lks. dist.
- The cor. of secs. 4,5,8 and 9, which is an iron pipe 2 ins. diam., buried under surface of graded road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 4,5,8 and 9, with brass caps marked



and WC on quadrants of brass caps toward the corner.

Land: Rolling and level.
Soil: Rocky, 3d rate. Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Scattering sage and mesquite.

42.

Resurvey of the Subdivisions
of
T. 7. S., R. 7. E.

Chains

- From the cor. of secs. 3, 4, 9 and 10.
N. 89° 46' W. on true line bet. secs. 4 and 9.
Over level land, along winding road, thru undergrowth,
- 39.78 Cor. of fences extending N. and W. bears N., 24 lks. dist.
- 40.23 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$ S 4
 $\frac{1}{4}$ S 9
1928
- and deposit a one pint mason jar alongside post, at base.
- 62.05 A deserted house bears N., 1 ch. dist.
- 80.46 The cor. of secs. 4, 5, 8 and 9.
- Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.
-
- N. 0° 09' E. on true line bet. secs. 4 and 5.
Over level land, along improved road, thru undergrowth.
A road extends to NE., thru sec. 5.
- .09 Cor. of fences extending N. and E. bears E., 38 lks. dist.
- 19.66 Cor. of fences extending S. and E. bears E., 40 lks. dist.
- 39.94 Cor. of fences extending N. and W. bears W., 44 lks. dist.
- 40.20 Point for $\frac{1}{4}$ sec. cor. falls in improved road.
- At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked
- $\frac{1}{4}$
S 5 | S 4
1928
- and WC on portions of brass caps toward the corner.
- 79.77 Cor. of fences extending S. and W. bears W., 45 lks. dist.
- 80.26 The point for cor. of secs. 4, 5, 32 and 33, on N. bdy. of Tp.,
described in book "H".
- Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.
-

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains

From the cor. of secs. 5,6,31 and 32, on S. bdy. of Tp.,
hereinbefore described.
N.1°01'E. on true line bet. secs. 31 and 32. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.04

The $\frac{1}{4}$ sec. cor., which is a mesquite stake, 4 ins. square,
1 ft. above ground and marked $\frac{1}{4}$ S 31 on W., S 32 on E.
side. In place of stake, which is buried alongside,
Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec.cor.,with brass cap marked

$\frac{1}{4}$
S 31 | S 32
1928

Thence, N.0°59'E. on true line bet. secs. 31 and 32. (N $\frac{1}{2}$)
Over level land, thru undergrowth, along winding road.

40.18

The cor. of secs. 29,30,31 and 32, which is a mesquite
stake 5 ins. square, 1 $\frac{1}{2}$ ft. above ground and marked R 7 E
S 29 on NE., S 32 on SE., T 7 S S 31 on SW., S 30 on NW.
side. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins.in ground
for cor. of secs. 29,30,31 and 32, with brass cap marked

T 7 S R 7 E
S 30 | S 29
S 31 | S 32
1928

and deposit a one quart bottle alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 28,29,32 and 33.
N.89°36'W. on true line bet. secs. 29 and 32.
Over level land, along unimproved road, thru undergrowth.

19.20

Cor. of fences extending E.,W.and S. bears S.,29 lks.dist.

38.00

A house bears N., 75 lks.dist.

40.17

Cor. of fences extending S. and E. bears S.,44 lks.dist.
Cor. of fences extending N. and W. bears N.,69 lks.dist.

40.20

The $\frac{1}{4}$ sec. cor., which is an iron pipe 2 ins. diam., 1 in.
above ground. This cor. is a local reestablishment.
In place of pipe, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 29
S 32
1928

and deposit a one quart bottle alongside post, at base.
Continue measure on same course, true line bet.secs.29and 32.

80.40

The cor. of secs. 29,30,31 and 32.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions

o f
T. 7 S. R. 7 E.

- Chains
- From the cor. of secs. 25, 30, 31 and 36, on W. bdy. of Tp., hereinbefore described.
S. 89° 52' E. on true line bet. secs. 30 and 31. ($W\frac{1}{2}$)
Over level land, thru undergrowth, along old road.
- 40.14 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. diam., 14 ins. above ground and marked $\frac{1}{4}$ S 30 on N., S 31 on S. side. In place of stake, which is buried alongside,
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\begin{array}{r} \frac{1}{4} \text{ S } 30 \\ \frac{1}{4} \text{ S } 31 \\ \hline 1928 \end{array}$$
- and deposit a one quart bottle alongside post, at base.
Thence, S. 89° 54' E. on true line bet. secs. 30 and 31. ($E\frac{1}{2}$)
Over level land, thru undergrowth, along old road.
- 40.24 The cor. of secs. 29, 30, 31 and 32.
- Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.
-
- N. 0° 41' W. on true line bet. secs. 29 and 30.
Over level land, thru undergrowth, along disused roadway.
- .47 Cor. of fences extending N. and E. bears E., 47 lks. dist.
20.10 Cor. of fences extending S. and E. bears E., 47 lks. dist.
34.00 Old winding road, bears NW. and SE.
37.00 Old winding road, bears NE. and SW. (same road)
39.70 Old road, bears E. and W.; intersection of old roads extending E. and W., N. and SW. bears W., 24 lks. dist.
- 40.06 The $\frac{1}{4}$ sec. cor., which is an iron pipe $1\frac{1}{2}$ in. diam., 1 in. above ground. This is a local reestablishment. In place of pipe, which is buried alongside,
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\begin{array}{r} \frac{1}{4} \\ \text{S } 30 \text{ | } \text{S } 29 \\ \hline 1928 \end{array}$$
- and deposit a one quart bottle alongside post, at base.
Continue measure, same course, on true line bet. secs. 29 and 30. (From $\frac{1}{4}$ sec. cor.,
Cor. of fences extending N. and W. bears W., 47 lks. dist.
- 41.00 A well bears W., 70 lks. dist.
42.30 A house bears W., 1 ch. dist. Abandoned.
79.67 Cor. of fences extending S. and W. bears W., 47 lks. dist.
- 80.14 The cor. of secs. 19, 20, 29 and 30, which is a redwood post 10 ins. square 18 ins. above ground, set in concrete. This is a local perpetuation of orig. point for cor. In place of post, which is buried alongside,
Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T 7 S R 7 E.

S 19 | S 20

S 30 | S 29

1928

Resurvey of the Subdivisions
of
T. 7 S. R. 7 E.

BOOK 3842

chains

and deposit a one quart bottle alongside post, at base.
Cor. of fences extending N. and W. bears W., 1 lk. dist.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

From the cor. of secs. 20, 21, 28 and 29.
S. 89° 38' W. on true line bet. secs. 20 and 29.
Over level land, thru scattering undergrowth.

40.13

The 1/4 sec. cor., which is an iron pipe 2 ins. diam., 2 ins. above ground. This is a local reestablishment. In place of pipe, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 20
1/4 S 29

1928

and deposit a marked (X) stone alongside post, at base.
Continue measure, same course, on true line bet. secs. 20 and 29.

80.25

The cor. of secs. 19, 20, 29 and 30.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., hereinbefore described.

S. 89° 52' E. on true line bet. secs. 19 and 30.
Over level land, thru scattering undergrowth, along fence, and north side of old road, extending E.

38.96

The 1/4 sec. cor., which is a mesquite stake 3 ins. square, 14 ins. above ground, scribe marks illegible. Alongside is a pine stake 4 ins. square, 16 ins. above ground and marked 1/4 S 19 on N., 1/4 S 30 on S. side. In place of both stakes, which are deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for 1/4 sec. cor., with brass cap marked

1/4 S 19
1/4 S 30

1928

and deposit a marked (X) stone alongside post, at base.
Cor. comes under fence extending E. and W.
Cor. of fences extending S. and E. bears S., 45 lks. dist.
Continue measure, same course, on true line bet. secs. 19 and 30.

42.96

Cor. of fences extending E., W. and N.

79.16

The cor. of secs. 19, 20, 29 and 30.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

Resurvey of the Subdivisions
of
T. 7. S., R. 7. E.

chains N.0°47'E. on true line bet. secs. 19 and 20. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.
Along east side of fence extending N.

40.17 The $\frac{1}{4}$ sec. cor., which is a redwood post 2 $\frac{1}{2}$ x10x8 ins.
above ground, set in concrete. No marks on post. This
cor. is a local perpetuation of orig. point for cor.
In place of post, which is deposited alongside,
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 19 | S 20
1928

and deposit a one pint bottle alongside post, at base.
Cor. of fences extending S. and W. bears W., 1 lks. dist.

Thence, N.0°26'E. on true line bet. secs. 19 and 20. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

17.90 Old road, extends NW. and SE.

40.07 The cor. of secs. 17, 18, 19 and 20, which is a mesquite
stake, 3 ins. square, 12 ins. above ground, scribe marks
illegible. Alongside is a redwood post 10 ins. square,
18 ins. above ground, set in concrete. In place of orig.
stake, which is buried alongside, and on the N. side of
redwood stake,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground
for cor. of secs. 17, 18, 19 and 20, with brass cap marked

T 7 S R 7 E
S 18 | S 17
S 19 | S 20
1928

And deposit concrete blocks around post, at base.

- Land: Level.
- Soil: Clayloam, 1st and 2d rate.
- Timber: None.
- Undergrowth: Mesquite, greasewood and sage.

point for
From the cor. of secs. 16, 17, 20 and 21.
S.89°44'W. on true line bet. secs. 17 and 20.
Over level land, thru scattering undergrowth.

- 6.50 Wash, 15 lks. wide, 2 ft. deep, course N.30°W.
- 13.50 A shack bears N., 80 lks. dist.
- 29.86 Telephone lines extend N.54°W. and S.54°E.
- 30.50 Highway, bears N.54°W. and S.54°E.; NW. to Casa Grande and
SE. to Tucson.
- 31.28 Right of way fence, extends N.54°W. and S.54°E.
- 32.55 Telegraph lines, extend S.54°E. and N.54°W.
- 33.80 Southern Pacific Railroad, bears N.53°42'W. and S.53°42'E.
- 36.35 Right of way fence, extends N.54°W. and S.54°E.
- 36.50 Telephone lines, extend N.54°W. and S.54°E.

40.09 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground,
deposit marked (X) stone alongside post, at base, for
 $\frac{1}{4}$ sec. cor., with brass cap marked

S 17
S 20
1928

From which, the new bearing tree:

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains

A mesquite, 10 ins. diam., bears S.24°W., 17 lks.dist.
marked $\frac{1}{4}$ S 20 BT.
No other tree.

80.18 The cor. of secs. 17,18,19 and 20.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 13,18,19 and 24, on W. bdy. of Tp.,
hereinbefore described.
S.89°44'E. on true line bet. secs. 18 and 19.
Over level land, thru scattering undergrowth.

39.32 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 18
S 19
1928

and deposit concrete blocks alongside post, at base.

40.18 Fence, extends N. and S.; cor. of fences extending W. and
S. bears N., 31 lks.dist.

80.12 The cor. of secs. 17,18,19 and 20.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, sage and greasewood.

N.0°07'E. on true line bet. secs. 17 and 18.
Over level land, thru scattering undergrowth.

- 2.10 Old winding road, bears E. and W.
- 32.22 Telephone lines, extend N.54°W. and S.54°E.
- 32.31 Right of way fence, extends N.54°W. and S.54°E.
- 34.19 Southern Pacific Railroad, bears N.53°42'W. and S.53°42'E.
- 35.12 Telegraph lines, extend N.54°W. and S.54°E.
- 36.07 Right of way fence, extends N.54°W. and S.54°E.
- 36.60 Highway, extends N.54°W. to Casa Grande and S.54°E. to Tucson.
- 37.14 Telephone lines, extend N.54°W. and S.54°E.
- 40.00 Cor. of fences extending N. and W. bears W., 24 lks.dist.
Cor. of fences extending E. and N., 53°W. bears W., about
4 chs. dist.
Cor. of fences extending N. and E. bears E., 67 lks.dist.
These are old fences, with no wire. No longer in service.

40.20 Set an iron post 3 ft. long 1 in. diam., 33 ins.in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S. 18 | S 17
1928

and deposit a one quart bottle alongside post, at base.

- 58.80 Cor. of fences extending S. and E. bears E., 65 lks.dist.
- 77.40 Wash, 10 lks. wide, course NW.
- 79.98 Cor. of fences extending S. and W. bears W., 44 lks.dist.

80.40 The cor. of secs. 7,8,17 and 18, which is an iron pipe

Resurvey of the Subdivisions
of

T. 7 S., R. 7 E.

chains

3 ins. diam., 18 ins. above ground. This is a local perpetuation of orig. point for cor. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 7, 8, 17 and 18, with brass cap marked

T	7	S	R	7	E
	S	7	S	8	
	S	18	S	17	
				1928	

and deposit a one quart bottle alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 8, 9, 16 and 17.

N. 89° 17' W. on true line bet. secs. 8 and 17. (E $\frac{1}{2}$)

Over nearly level land, thru scattering undergrowth.

Descend 10 ft. along SW. slope of butte.

5.00 Foot of butte, bears NW. and SE.; continue over level land.

40.15 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 3 ins. square, 18 ins. above ground, with scribe marks illegible. In place of stake, which is buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S	8
$\frac{1}{4}$	S	17
		1928

and deposit a one quart bottle alongside post, at base.

Thence, S. 89° 21' W. on true line bet. secs. 8 and 17. (W $\frac{1}{2}$)
Over level land, thru undergrowth,

4.20 Wash, 8 lks. wide, course N. 80° W.

17.90 Cor. of fences extending N. and W. bears N., 7 lks. dist.

22.10 Wash, 10 lks. wide, course N. 80° W.

38.88 The cor. of secs. 7, 8, 17 and 18.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, sage and greasewood.

From the cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., hereinbefore described.

S. 89° 38' E. on true line bet. secs. 7 and 18.

Over level land, along unimproved road, thru undergrowth.

13.96 Telephone lines, extend N. 54° W. and S. 54° E. E. end of unimproved roadway extending W.

14.10 Right of way fence, extends N. 54° W. and S. 54° E., cor. of fences extending N. 54° W., S. 54° E. and W. bears N. 54° W., 50 lks. dist.

16.61 Southern Pacific Railroad, bears N. 53° 43' W. and S. 53° 43' E.

17.99 Telegraph lines extend S. 54° E. and N. 54° W.

19.32 Right of way fence, extends S. 54° E. and N. 54° W.

19.96 Highway, extends S. 54° E. to Tucson and N. 54° W. to Casa Grande.

20.74 Telephone lines, extend S. 54° E. and N. 54° W.

20.86 Cor. of fences extending E. and S. 54° E. bears S., 5 lks. dist.

Cor. of fences extending N. and N. 54° W. bears N. 54° W., 50 lks. dist.

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains

39.36

Continue along unimproved lane, thru undergrowth.
Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 7
S 18

1928

and deposit a one pint bottle alongside post, at base.
Fence extending E. and W. bears S., 16 lks. dist.

80.22

The cor. of secs. 7, 8, 17 and 18.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, sage and mesquite.

N.0°17'E. on true line bet. secs. 7 and 8. (S $\frac{1}{2}$)
Over level land, along unimproved roadway, thru undergrowth.

.47

Cor. of fences extending N. and E. bears E., 46 lks. dist.

20.10

Cor. of fences extending S. and E. bears E., 46 lks. dist.

40.23

The $\frac{1}{4}$ sec. cor., which is a mesquite stake 5 ins. square, 12 ins. above ground, scribe marks illegible. Alongside is an iron pipe, 2 ins. diam., 6 ins. above ground. In place of pipe and stake, which are buried alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 7 | S 8

1928

Thence, N.0°33'W. on true line bet. secs. 7 and 8. (N $\frac{1}{2}$)
Over level land, thru undergrowth, along E. edge of cleared land, extends N. and W.

40.33

The cor. of secs. 5, 6, 7 and 8, which is an iron pipe 2 ins. diam., 3 ins. above ground, unmarked. Buried in the ground are remains of the orig. stake corner. In place of pipe, which is buried alongside,

Set an iron post 3 ft. long 2 ins. diam., 33 ins. in ground for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T 7 S R 7 E
S 6 | S 5
S 7 | S 8

1928

and deposit a one quart bottle alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

Resurvey of the Subdivisions
of

T. 7 S., R. 7 E.

chains

From the cor. of secs. 4, 5, 8 and 9.
West on true line bet. secs. 5 and 8.
Over level land, along unimproved road, thru undergrowth.
39.68 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 5 \\ S 8 \end{array}$$

1928

and deposit a one quart bottle alongside post, at base.

40.25 Cor. of fences extending N. and W. bears N., 34 lks. dist.

40.60 A house bears N., 50 lks. dist.

60.51 Cor. of fences extending N. and E. bears N., 35 lks. dist.

79.36 The cor. of secs. 4, 5, 8 and 9.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From cor. of secs. 1, 6, 7 and 12, on W. bdy. of Tp., hereinbefore described,
S. 89° 42' E. on true line bet. secs. 6 and 7.
Over level land, along unimproved road, thru undergrowth.

.40 Power lines, extend N. and S.

39.45 The $\frac{1}{4}$ sec. cor., which is a fir post, 4 ins. square, 3 ft.
above ground, unmarked. In place of post, which is set
alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 6 \\ S 7 \end{array}$$

1928

and deposit a one quart bottle alongside post, at base.

Continue measure, same course, on true line bet. secs. 6 and 7.

60.00 Cleared land in sec. 7, extends S. and E.

79.47 The cor. of secs. 5, 6, 7 and 8.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 36' W. on true line bet. secs. 5 and 6. ($S\frac{1}{2}$)
Over level land, thru scattering undergrowth.

40.31 The $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square,
2 ft. above ground, marked $\frac{1}{4}$ on W. side. In place of
stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground
for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 6 | S 5 \end{array}$$

1928

and deposit a one pint bottle alongside post, at base.

Resurvey of the Subdivisions
of
T. 7 S., R. 7 E.

BOOK 3842

chains

Thence, N. $0^{\circ}39'W$. on true line bet. secs. 5 and 6.
Over level land, thru undergrowth.

31.10 Casa Grande-Florence canal, 20 lks. wide, course S. $80^{\circ}W$.
31.80 Cor. of fences extending N. and W. bears W., 50 lks. dist.
35.40 A house bears E., 75 lks. dist.
39.75 Cor. of fences extending S. and E. bears E., 42 lks. dist.
Cor. of fences extending S. and W. bears W., 42 lks. dist.

40.20 The point for cor. of secs. 5, 6, 31 and 32, on N. bdy. of Tp.,
described in book "H".

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, sage and mesquite.

Final test of Buff & Buff Transit No. 9984
used by
Roger F. Wilson, U.S. Transitman

April 4, 1928: at the station (described on page 1 of
book A of this group) near the center of sec. 29,
T. 6 S., R. 6 E., G. and S. R. Base and Meridian, Arizona;
latitude $32^{\circ}52\frac{1}{2}'N$. and longitude $111^{\circ}45'W$., make final
test of the solar apparatus as follows:

At 9h 0m a.m., app.t., set off $32^{\circ}52\frac{1}{2}'N$. on the latitude
arc, $5^{\circ}47\frac{1}{2}'N$. on the declination arc and determine a
meridian with the solar, which agrees with the true
meridian.

At app. noon, with latitude arc unchanged, observe the
sun on the meridian; the resultant reading of the declin-
ation arc is $5^{\circ}50'N$., which agrees with the computed
declination of the sun.

At 3h 0m p.m. app.t., with latitude arc unchanged, set
off $5^{\circ}53'N$. on the declination arc and determine a meri-
dian with the solar, which agrees with the true meri-
dian.

As all solar observations during the usual hours of
solar work come within $1'30''$ of the true meridian, con-
clude that the adjustments of the instrument have been
satisfactorily maintained.

April 4, 1928

T. 7 S., R. 7 E.

General Description

This township is situated in the valley of the Santa Cruz Wash which is part of the valley of the Gila River, and drainage is northwesterly. Land is level except for 4 small hills, (Toltec Buttes) in secs. 8 and 9, and one butte near the center of sec. 7. Highest elevation of level land is 1542 feet at SE. cor. and lowest is 1456 ft. at NW. cor. of Tp. Elevation of highest Butte is 1625 ft. Soil is a claylike loam, tillable, 1st and 2d rate, and fit for agricultural purposes where irrigation water can be secured. There is no surface water in the township, except the Casa Grande-Florence Canal, which has its course southwesterly thru the 1st and 2d tiers of sections. Underground water may be reached at depths varying from 30 to 300 ft.

There is no timber. Undergrowth consists of mesquite, greasewood and sage, the mesquite growing to a size commensurate to scrub timber and having some value as firewood.

There is but little land under cultivation, at present, due to the scarcity of irrigation water

The townsite of Toltec, in secs. 27 and 28, consists of a hotel and half a dozen houses

The Southern Pacific Railroad has a main line thru the township, running on a tangent from NW. to SE. An improved highway runs parallel to the Railroad line, thru the township. There are other roads following certain section lines in the township, but these are mostly unimproved roads, and little traveled.

The American Boy Mine, on the NE. of the Toltec Buttes, is the only mineral claim in the township, and is idle.

The other buttes furnish gravel and rock for roadbuilding.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Roger F. Wilson, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 18th day of February, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the South Boundary

East Boundary

West Boundary

and Subdivision Lines of

Township 7 South, Range 7 East of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Ariz.

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: San Francisco, California. Date: July 9, 1928.

Roger F. Wilson, U. S. Transitman.

APPROVAL.

OFFICE OF THE SUPERVISOR OF SURVEYS,

Denver, Colo., JUL 15 1929, 192

The foregoing field notes of the survey of the South Boundary,

East Boundary

West Boundary

and Subdivision Lines of

Township 7 South Range 7 East

of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Roger F. Wilson, U.S. Transitman

under his special instructions dated February 18, 1928 for Group 150, Ariz., having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.