

FIELD NOTES

OF THE RESURVEY OF

the First Standard Parallel South

thru Parts of Ranges 5 and 6 East

the West Boundary

and

Subdivision Lines of

Township 6 South, Range 5 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Dupree R. Averill, U.S. Surveyor

and

Otis O. Gould, U.S. Transitman

In the capacity of U. S. Surveyor, under Special Instructions dated February 18, 1928, issued by the District Cadastral Engineer to govern surveys included in Group No. 150 Arizona, which were approved by the Commissioner of the General Land Office, March 8, 1928, and Assignment Instructions dated March 10, 1928.

Resurvey commenced April 16, 1928.


Resurvey completed April 21, 1928.

3846

3846

~~INDEX DIAGRAM.~~

Township _____, *Range* _____

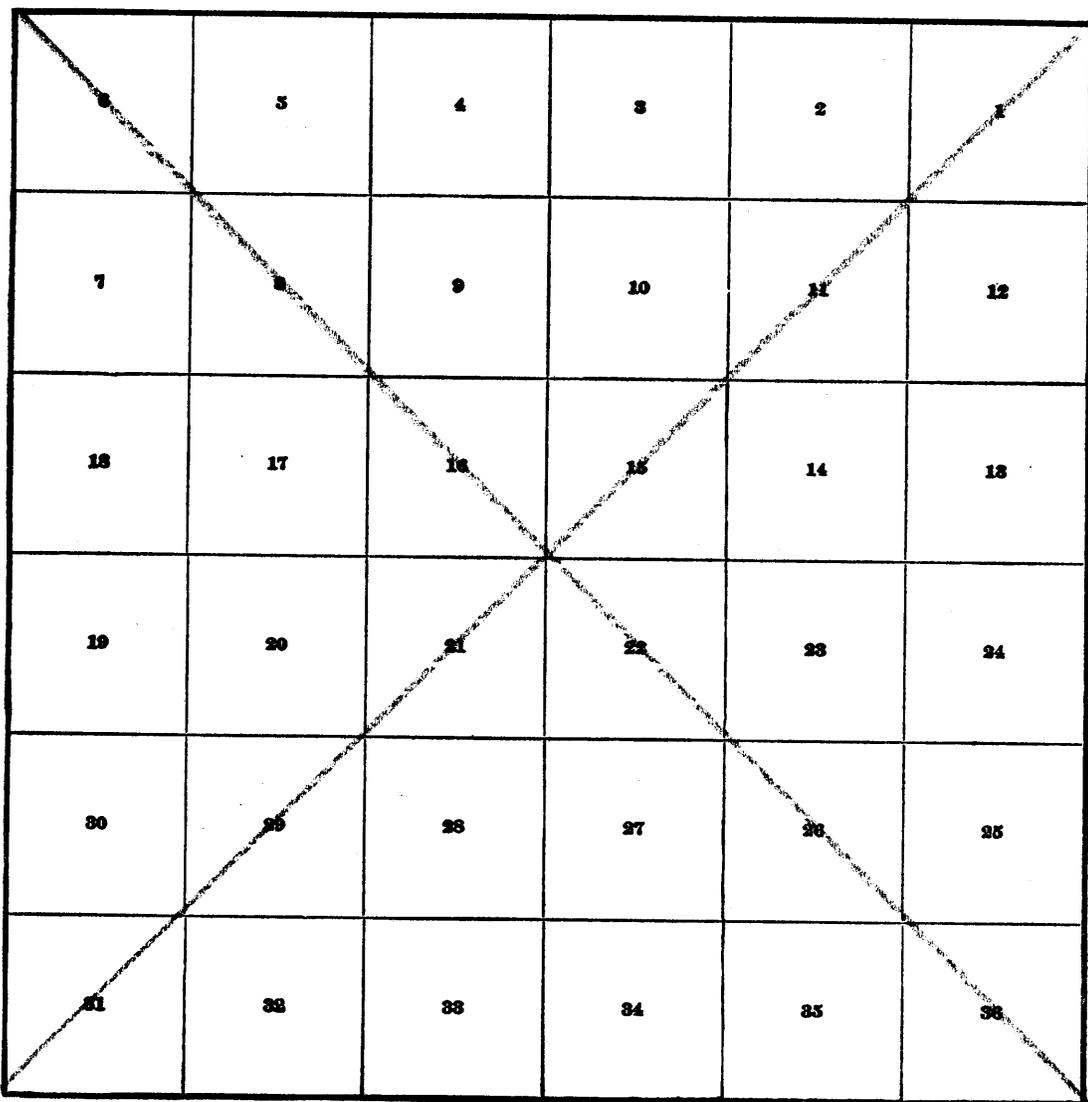

Book "M"
 Group 150 Arizona
 Township 6 South Range 5 East

INDEX DIAGRAM

BOOK 3846

		T.5S.-R.5E.										R.5E. R.6E.		T.5S.R.6E.	
31	32 FIRST	33 STANDARD		34 PARALLEL		35 SOUTH		36			31	32			
	4	4	5	5	6	6					7				
1	12 6 48	5 40	4 34	3 28	2 21	1									
	47	39	33	27	20										
	47	47	39	33	27										
12	11 7 46	8 38	9 32	10 27	11 20	12									
	46	45	38	32	26	19									
	46	45	38	32	26	19									
13	10 18 45	17 37	16 31	15 25	14 18	13									
	44	44	37	31	25	18									
	44	44	37	31	25	18	17								
24	10 19 43	20 36	21 30	22 24	23 17	24									
	43	42	36	30	23	16									
	43	42	36	30	23	16									
25	9 30 42	29 35	28 29	27 23	26 15	25									
	41	41	35	29	22	15									
	41	41	35	29	22	15									
36	9 31 40	32 34	33 28	34 21	35 14	36									

See Book "L" for resurv. W. bdy. and Sub. lines of T.6S. R.6E.

See Book "J" for resurv. E. bdy., N. bdy. and Sub. lines of T.7S. R.5E.

See Book "K" for resurv. of N. bdy. T.7S. R.6E.

- Resurveyed by Dupree R. Averill, U.S. Surveyor, under instructions Group 150.
- Resurveyed by Otis O. Gould, U.S. Transitman, under instructions Group 150.
- Accepted surveys, retracements and resurveys.

chains

The resurveys herein described were commenced April 16, 1928, and executed by Dupree R. Averill, U.S. Surveyor, and Otis O. Gould, U.S. Transitman, using Buff Solar Transits Nos. 17992 and 10125, respectively. The instruments are equipped with Smith solar attachments and otherwise conform to the standard requirements of the General Land Office. All azimuth determinations are accomplished with the solar attachment.

Preliminary Field Test of Buff transit No. 17992,
by
Dupree R. Averill.

April 15, 1928: At the station (described on Page 1 of book "A") near the center of sec. 29, T.6 S., R.6 E., G. and S.R. base and Meridian, Arizona, in latitude $32^{\circ}52\frac{1}{2}'N.$ and longitude $111^{\circ}45'W.$, and on the meridian established by Polaris observation of January 28, 1928; examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus, proceed as follows:

At 9h 0m a.m. app.t., set off $32^{\circ}52\frac{1}{2}'$ on the latitude arc, $9^{\circ}51'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $9^{\circ}54'N.$, which agrees with the computed declination of the sun.

At 3h 0m p.m. app.t., with latitude arc unchanged, set off $9^{\circ}56\frac{1}{2}'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

T. 6 S., R. 5 E.

chains

Preliminary Field Test of Buff Transit No. 10125,
by
Otis O. Gould.

April 15, 1928: At the station and on the meridian hereinbefore described, examine the adjustments of the instrument and find no errors; then to test the workings of the solar apparatus, proceed as follows:

At 9h 0m a.m. app.t., set off $32^{\circ}52\frac{1}{2}'$ on the latitude arc, $9^{\circ}51'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $9^{\circ}54'N.$, which agrees with the computed declination of the sun.

At 3h 0m p.m. app.t., with latitude arc unchanged, set off $9^{\circ}56\frac{1}{2}'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument is in adjustment.

April 15, 1928.

All measurements are made with a Lallie steel tape 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are taken on the slope, but there are no slope angles in this township of sufficient degree to necessitate reading of angles and subsequent reduction to true horizontal distances.

Resurvey of Portions of the 1st Stand. Par. S.,
thru
Rs. 5 and 6 E.

chains

The First Standard Parallel South thru Rs. 5 and 6 E., was surveyed in 1868, by G.P. Ingalls and W.F. Ingalls, U.S. Deputy Surveyors.

In 1887, R.C. Powers, U.S.D.S., retraced and resurveyed the 1st Stand. Par. S., thru Rs. 5 and 6 E., reconstructing orig. cors. found, and making proper reestablishment of missing cors.

In 1913, W.H. Elliott, U.S.S., retraced and resurveyed the S. bdy. of sec. 31 and part of the S. bdy. of sec. 32, 1st Stand. Par. S. in R. 5 E., in connection with resurvey of the E. bdy. of T. 6 S., R. 5 E., reconstructing orig. cors. with the regulation iron posts.

In 1916, J.F. Hesse, U.S.S., retraced and resurveyed the 1st Stand. Par. S., thru R. 6 E., reconstructing orig. cors. with the regulation iron posts.

There is no other retracement or resurvey of the 1st stand. Par. S., thru Rs. 5 and 6 E., of record.

The following notes describe a dependent resurvey of the portions of the 1st stand. par. S. in Rs. 5 and 6 E. which are closed on by exterior and subdivision lines of T. 6 S., R. 5 E., preserving the alinement bet. orig. cors. and reestablishing miss cors. by direct proportion.

Retracement for Resurvey.

From the stand. cor. of secs. 31 and 32, T. 5 S., R. 5 E., hereinafter described.
East, on a random line on S. bdy. of secs. 32 and 33.

1.31 Intersect the closing cor. of Ts. 6 S., Rs. 4 and 5 E., hereinafter described.

40.00 Find no trace of stand. $\frac{1}{4}$ sec. cor. Set temp. cor.

80.00 Find no trace of stand. cor. of secs. 32 and 33. Set temp. cor.

120.54 Intersect the orig. stand. $\frac{1}{4}$ sec. cor. on S. bdy. sec. 33.

Thence, East, on a random line on S. bdy. of secs. 33 and 34.

40.00 Find no trace of stand. cor. of secs. 33 and 34. Set temp. cor.

80.00 Find no trace of stand. $\frac{1}{4}$ sec. cor. Set temp. cor.

118.62 Intersect the stand. cor. of secs. 34 and 35.

Thence, East, on a random line on S. bdy. of sec. 35.

40.00 Find no trace of stand. $\frac{1}{4}$ sec. cor. Set temp. cor.

82.80 Fall 7 lks. S. of the stand. cor. of secs. 35 and 36.

Thence, East, on a random line on S. bdy. of sec. 36.

40.34 Fall 26 lks. N. of the stand. $\frac{1}{4}$ sec. cor.

80.46 Fall 34 lks. N. of the stand. cor. of Ts. 5 S., Rs. 5 and 6 E., hereinafter described.

Thence, East, on a random line on S. bdy. of sec. 31, T. 5 S., R. 6 E.

40.17 Fall 48 lks. S. of the stand. $\frac{1}{4}$ sec. cor.

80.25 Fall 96 lks. S. of the stand. cor. of secs. 31 and 32, hereinafter described.

Resurvey of Portions of the 1st Stand. Par. S.,
 Ranges 5 and 6 East.

chains

Resurvey

The stand. cor. of secs. 31 and 32, T.5 S., R.5 E., is an iron post 3 ins. diam., 12 ins. above ground, with brass cap marked

S C
 T 5 S R 5 E
S 31 | S 32

1916

Reset this post, which is 3 ft. long, 3/4 ins. in ground, and deposit a marked (X) stone alongside post, at base.

Thence, East, on true line, on S. bdy. of sec. 32. Over level land, thru scattering undergrowth, along old winding road.

1.31 The closing cor. of Ts. 6 S., Rs. 4 and 5 E., hereinafter described.

40.18 Set an iron post 3 ft. long 1 in. diam., 3/4 ins. in ground for stand. 1/4 sec. cor., with brass cap marked

S C
1/4 S 32

1928

Deposit a marked (X) stone alongside post, at base. Old winding road extending E. and W. bears S., 65 lks. dist.

79.00 A shack bears N., 1 1/2 chs. dist.

80.36 Set an iron post 3 ft. long 2 ins. diam., 3/4 ins. in ground for stand. cor. of secs. 32 and 33, with brass cap marked

S C
 T 5 S R 5 E
S 32 | S 33

1928

Deposit a marked (X) stone alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

East on true line on S. bdy. of sec. 33. (W 1/2)
 Over level land, thru scattering undergrowth, along old road.

4.65 Cor. of fences extending S. and E. bears S., 47 lks. dist.
 13.44 Telephone lines extend N. 54° W. and S. 54° E.
 14.27 Highway, extends N. 54° W. to Maricopa and S. 54° E. to Casa Grande.
 15.07 Telephone lines, extend N. 54° W. and S. 54° E.
 15.17 Right of way fence, extends N. 54° W. and S. 54° E.
 17.93 Southern Pacific Railroad, bears N. 53° 50' W. and S. 53° 50' E.
 19.27 Telephone and telegraph lines, extend N. 54° W. and S. 54° E.
 20.47 Right of way fence, extends N. 54° W. and S. 54° E.;
 continue thru desert growth.
 29.67 Old road, extends NW. and SE.

40.18 The stand. 1/4 sec. cor., which is a mesquite stake 4 ins. square, 3 ft. long, lying on ground, marked 1/4 S on N. side. In place of stake, which is set alongside,

Set an iron post 3 ft. long 1 in. diam., 3/4 ins. in ground for stand. 1/4 sec. cor., with brass cap marked

Resurvey of Portions of the 1st Stand. Par. S.,

Ranges 5 and 6 East.

2846

chains

S C
1/4 S 33

1928

Deposit a marked (X) stone alongside post, at base.

Thence, East, on true line, on S. bdy. of sec. 33. (E 1/2)
Over level land, thru scattering undergrowth.

39.54 Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground
for stand. cor. of secs. 33 and 34, with brass cap marked

S C
T 5 S R 5 E
S 33 | S 34

1928

Deposit a marked (X) stone alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

East, on true line, on S. bdy. of sec. 34.
Over level land, thru scattering undergrowth.

0.29 Cor. of fences extending S. and E. bears N., 4 lks. dist.

39.54 Set an iron post 3 ft. long 1 in. diam., 35 ins. in ground
for stand. 1/4 sec. cor., with brass cap marked

S C
1/4 S 34

1928

Deposit a marked (X) stone alongside post, at base.

39.81 Cor. of fences extending S. and W. bears N., 28 lks. dist.
76.90 A house bears S., 5 chs. dist.
77.70 A house bears N., 2 chs. dist.

79.08 The stand. cor. of secs. 34 and 35, which is the remains
of a mesquite stake, 4 ins. square, buried in ground.
Alongside is an iron pipe 1 in. diam., 4 ins. above
ground. In place of stake and pipe, which are deposited
alongside,

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground
for stand. cor. of secs. 34 and 35, with brass cap marked

S C
T 5 S R 5 E
S 34 | S 35

1928

Deposit a marked (X) stone alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

Resurvey of Portions of the 1st. Stand. Par. S.,
 Ranges 5 and 6 East.

chains

N.89°57'E., on true line, on S. bdy. of sec. 35.
 Over level land, thru scattering undergrowth.

41.40 Set an iron post 3 ft. long 1 in. diam., 35 ins. in ground
 for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 35

1928

Deposit a marked (X) stone alongside post, at base.

82.80 The stand. cor. of secs. 35 and 36, which is the remains
 of a mesquite stake, 4 ins. square, 6 ins. above ground.
 No marks visible. In place of stake, which is deposited
 alongside,

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground
 for stand. cor. of secs. 35 and 36, with brass cap marked

S C
 T 5 S R 5 E
S 35 | S 36

1928

Deposit a marked (X) stone alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

S.89°38'E., on true line, on S. bdy. of sec. 36. (W $\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

40.34 The stand. $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins.
 square, 2 $\frac{1}{2}$ ft. long, lying on ground beside a small
 mound of earth, marked S C $\frac{1}{4}$ S on N. side. In place
 of stake, which is deposited alongside,

Set an iron post 3 ft. long 1 in. diam., 35 ins. in ground
 for stand. $\frac{1}{4}$ sec. cor., with brass cap marked

S C
 $\frac{1}{4}$ S 36

1928

Deposit a marked (X) stone alongside post, at base.

Thence, S.89°53'E., on true line, on S. bdy. of sec. 36. (E $\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

35.12 Wash, 20 lks. wide, course S.

40.12 The stand. cor. of ~~Ts. 5 S., Rs. 5~~ and 6 E., which is an
 iron post 3 ins. diam., 10 ins. above ground, with brass
 cap marked

S C
 T 5 S
 R 5 E R 6 E
S 36 | S 31

1916

Reset this post, which is 3 ft. long, 34 ins. in ground,
 and deposit a marked (X) stone alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite, sage.

Resurvey of Portions of the 1st Stand. Par. S.
 in
 Ranges 5 and 6 East.

2948

chains

N.89°19'E., on true line, on S. boundary of sec. 31, (W $\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

0.20 Wash, 20 lks. wide, course S.

25.80 Wash, 40 lks. wide, course S.

31.90 Winding road, extends NW. and SE.

40.17 The stand. $\frac{1}{4}$ sec. cor., which is an iron post 1 in. diam.,
 10 ins. above ground, with brass cap marked

S C
 $\frac{1}{4}$ S 31

1916

Witnessed by pits E. and W. and a mound of earth N.

Reset this post, which is 3 ft. long, $\frac{3}{4}$ ins. in ground,
 and deposit a marked (X) stone alongside post, at base.

Thence, N.89°19'E., on true line, on S. boundary of sec. 31. (E $\frac{1}{2}$)
 Over level land, thru scattering undergrowth.

39.76 Old winding road, extends N. and S.

40.08 The stand. cor. of secs. 31 and 32, which is an iron post,
 3 ins. diam., 8 ins. above ground, with brass cap marked

S C
 T 5 S R 6 E
 S 31 | S 32

1916

Reset this post, which is 3 ft. long, $\frac{3}{4}$ ins. in ground,
 and deposit a marked (X) stone alongside post, at base.

The closing cor. of Ts. 6 S., Rs. 5 and 6 E., described in
 book "L" of this group, bears N.89°26'E., 85 lks. dist.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Mesquite, greasewood and sage.

Resurvey of the West Boundary
of
T. 6 S., R. 5 E.

chains

The West boundary of this township was surveyed in 1887, by R.C. Powers, U.S. Deputy Surveyor.

In 1913, W.H. Elliott, U.S.S., retraced and resurveyed the W. bdy. of this township, in connection with his survey of T.6 S., R.4 E., reconstructing orig. cors. found and reestablishing missing cors. with the regulation iron posts.

The following notes describe a retracement and dependent resurvey of the West Boundary of T.6 S., R.5 E., preserving that alinement bet. old cors. and reestablishing missing cors. by direct proportion.

Retracement for Resurvey

From the cor. of Ts. 6 and 7 S., Rs. 4 and 5 E., described in book "J" of this group.

N.0°03'W., on a random line, bet. secs. 31 and 36.

40.24 Find no trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

80.36 Fall 19 lks. E. of the cor. of secs. 25, 30, 31 and 36.

Thence, N.0°21'E., on a random line, bet. secs. 25 and 30. ($S\frac{1}{2}$)

40.18 Fall 14 lks. E. of the $\frac{1}{4}$ sec. cor.

40.18 Thence, N.0°9'E., on a random line, bet. secs. 25 and 30. ($N\frac{1}{2}$)
Fall 4 lks. E. of the cor. of secs. 19, 24, 25 and 30.

39.99 Thence, N.0°17'E., on random line, bet. secs. 19 and 24. ($S\frac{1}{2}$)
Fall 13 lks. E. of the $\frac{1}{4}$ sec. cor.

39.99 Thence, N.0°10'E., on random line, bet. secs. 19 and 24. ($N\frac{1}{2}$)
Fall 9 lks. E. of the cor. of secs. 13, 18, 19 and 24.

Thence, N.1°26'W., on random line, bet. secs. 13 and 18.

40.61 Find No trace of $\frac{1}{4}$ sec. cor. Set temp. cor.

79.59 Fall 14 lks. W. of the closing cor. of secs. 12 and 13,
T.6 S., R.4 E.

80.88 Fall 14 lks. W. of the cor. of secs. 7 and 18, only. (orig. cor. of secs. 7, 12, 13 and 18.)

Thence, N.0°25'E., on random line, on W. bdy. of sec. 7. ($S\frac{1}{2}$)

40.22 Fall 13 lks. E. of the $\frac{1}{4}$ sec. cor. sec. 7, only.

Thence, N.0°25'E., on random line, on W. bdy. of sec. 7. ($N\frac{1}{2}$)

38.74 Fall 6 lks. E. of the closing cor. of secs. 1 and 12,
T.6 S., R.4 E.

40.19 Fall 6 lks. E. of the cor. of secs. 6 and 7, only. (Orig. cor. of secs. 1, 6, 7 and 12.)

40.30 Thence, N.0°53'E., on random line, on W. bdy. of sec. 6. ($S\frac{1}{2}$)
Fall 1 lk. W. of the $\frac{1}{4}$ sec. cor. sec. 6, only.

42.55 Thence, N.0°53'E., on random line, on W. bdy. of sec. 6. ($N\frac{1}{2}$)
Fall 9 lks. E. of the closing cor. of Ts. 6 S., Rs. 4 and 5 E., hereinafter described.

Resurvey of the West Boundary
of

BOOK 3846

T. 6 S. R. 5 E.

chains

Resurvey.

From the cor. of Ts. 6 and 7 S., Rs. 4 and 5 E., described in book "J" of this group.
N.0°11'W. on true line bet. secs. 31 and 36.
Over level land, thru scattering undergrowth.

40.18 Set an iron post 3 ft. long 1 in. diam., 33 ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 36 | S 31
1928

Deposit a marked (X) stone alongside post, at base.

80.36 The cor. of secs. 25, 30, 31 and 36, which is an iron post 3 ins. diam., 16 ins. above ground, with brass cap marked

T 6 S
R 4 E | R 5 E
S 25 | S 30
S 36 | S 31
1913

Reset this post, which is 3 ft. long, 34 ins. in ground, and deposit a marked (X) stone alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Mesquite, greasewood and sage.

N.0°09'E. on true line bet. secs. 25 and 30. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

0.45 Cor. of fences extending N. and E. bears E., 45 lks. dist.

40.18 The $\frac{1}{4}$ sec. cor., which is an iron post 1 in. diam., 12 ins. above ground, with brass cap marked

$\frac{1}{4}$
S 25 | S 30
1913

Reset this post, which is 3 ft. long, 34 ins. in ground, and deposit a marked (X) stone alongside post, at base.

Thence, N.0°06'E. on true line bet. secs. 25 and 30. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

39.77 Cor. of fences extending S. and E., bears E., 41 lks. dist.

40.18 The cor. of secs. 19, 24, 25 and 30, which is a mesquite stake, 4 ins. square, 16 ins. above ground, and marked T VI S S XIX on NE., R V E S XXX on SE., R IV S XXIV on NW. and S XXV on SW. side. In place of stake, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 34 ins. in ground for cor. of secs. 19, 24, 25 and 30, with brass cap marked

T 6 S
R 4 E | R 5 E
S 24 | S 19
S 25 | S 30
1928

Deposit a marked (X) stone alongside post, at base.

Resurvey of the West Boundary
of
T. 6 S., R. 5 E.

chains	
	<p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber: Undergrowth: Greasewood, mesquite, sage.</p> <hr/>
	<p>N.0° 6'E. on true line bet. secs. 19 and 24. (S$\frac{1}{2}$) Over level land, thru scattering undergrowth.</p>
0.30	Center line of improved road, extends E. and W.*
0.52	Cor. of fences extending N. and E. bears E., 48 lks. dist.
39.99	The $\frac{1}{4}$ sec. cor., which is an iron post 1 in. diam., 10 ins. above ground, with brass cap marked
	$\frac{1}{4}$ $\begin{array}{c} \text{S } 24 \mid \text{S } 19 \\ 1913 \end{array}$
	<p>Reset this post, which is 3 ft. long, $\frac{3}{4}$ ins. in ground, and deposit a marked (X) stone alongside post, at base.</p>
	<p>Thence, N.0° 02'E. on true line bet. secs. 19 and 24. (N$\frac{1}{2}$) Over level land, thru scattering undergrowth.</p>
39.55	Cor. of fences extending S. and E. bears E., 45 lks. dist.
39.99	The cor. of secs. 13, 18, 19 and 24, which is an iron post 3 ins. diam., 12 ins. above ground, with brass cap marked
	$\begin{array}{c} \text{T } 6 \text{ S} \\ \text{R } 4 \text{ E} \mid \text{R } 5 \text{ E} \\ \text{S } 13 \mid \text{S } 18 \\ \text{S } 24 \mid \text{S } 19 \\ 1913 \end{array}$
	<p>Reset this post, which is 3 ft. long, $\frac{3}{4}$ ins. in ground, and deposit a marked (X) stone alongside post, at base.</p>
	<p>Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite, sage.</p> <hr/>
	<p>N.1° 20'W. on true line, on W. bdy. of sec. 18. Over level land, thru scattering undergrowth.</p>
40.44	Set an iron post 3 ft. long 1 in. diam., $\frac{3}{4}$ ins. in ground for $\frac{1}{4}$ sec. cor., with brass cap marked of sec. 18, only,
	$\frac{1}{4}$ $\begin{array}{c} \mid \text{S } 18 \\ 1928 \end{array}$
	<p>Deposit a marked (X) stone alongside post, at base.</p>
79.59	The closing cor. of secs. 12 and 13, T. 6 S., R. 4 E., which is an iron post 2 ins. diam., 14 ins. above ground, with brass cap marked
	$\begin{array}{c} \text{T } 6 \text{ S} \\ \text{R } 4 \text{ E} \mid \text{R } 5 \text{ E} \\ \text{S } 12 \text{ C} \mid \text{S } 18 \\ \text{S } 13 \text{ C} \mid \\ 1913 \end{array}$
	<p>Reset this post, which is 3 ft. long, $\frac{3}{4}$ ins. in ground, and deposit a marked (X) stone alongside post, at base.</p>
80.88	The cor. of secs. 7 and 18, only, which is an iron post 3 ins. diam., 10 ins. above ground, with brass cap marked

Resurvey of the West Boundary
of
T. 6 S., R. 5 E.

BOOK 3846

chains

T 6 S	
R 4 E	R 5 E
S 12	S 7
S 13	S 18
1913	

Reset this post, which is 3 ft. long, 3/4 ins. in ground, and deposit a marked (X) stone alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

N.0°14'E. on true line on W. bdy. of sec. 7. (S 1/2)
Over level land, thru scattering undergrowth.

16.20 Wash, 20 lks. wide, course NW.

40.22 The 1/4 sec. cor. sec. 7, only, which is an iron post 1 in. in diam., 8 ins. above ground, with brass cap marked

1/4
S 7
1913

Reset this post, which is 3 ft. long, 3/4 ins. in ground, and deposit a marked (X) stone alongside post, at base.

Thence, N.0°20'E. on true line on W. bdy. of sec. 7. (N 1/2)
Over level land, thru scattering undergrowth.

38.74 The closing cor. of secs. 1 and 12, T.6 S., R.4 E., which is an iron post 2 ins. diam., 14 ins. above ground, with brass cap marked

T 6 S	
S 1 C	R 5 E
R 4 E	S 7
S 12 C	
1913	

Reset this post, which is 3 ft. long, 3/4 ins. in ground, and deposit a marked (X) stone alongside post, at base.

40.19 The cor. of secs. 6 and 7, only, which is an iron post, 3 ins. diam., 8 ins. above ground, with brass cap marked

T 6 S
R 5 E
S 6
S 7
1913

Reset this post, which is 3 ft. long, 3/4 ins. in ground, and deposit a marked (X) stone alongside post, at base.

Cor. of fences extending N. and W. bears W., 40 lks. dist.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the West Boundary
of
T. 6 S., R. 5 E.

chains

N.0°54'E. on true line on W. bdy. of sec. 6. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth:
cultivated land to W. and N.

3.50 A well bears W., 2 $\frac{1}{2}$ chs. dist.
18.50 Cor. of fences extending S. and W. bears W., 40 lks. dist.
N. end of cultivated land to W.

38.40 Santa Cruz Wash, 20 lks. wide, course NW.

40.30 The $\frac{1}{4}$ sec. cor. sec. 6, only, which is an iron post 1 in.
diam., 14 ins. above ground, with brass cap marked

$\frac{1}{4}$
S 6

1913

Reset this post, which is 3 ft. long $\frac{3}{4}$ ins. in ground,
and deposit a marked (X) stone alongside post, at base.

Thence, N.0°45'E. on true line on W. bdy. of sec. 6. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

42.55 The closing cor. of Ts. 6 S., Rs. 4 and 5 E., which is an
iron post 3 ins. diam., 10 ins. above ground, with
brass cap marked

T 5 S R 5 E
S 31 S 32
C C
S 1 S 6
R 4 E R 5 E
T 6 S
1916

Reset this post, which is 3 ft. long, $\frac{3}{4}$ ins. in ground,
and deposit a marked (X) stone alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

BOOK 8246

T. 6 S., R. 5 E.

chains		Boundaries of T. 6 S., R. 5 E.					
Latitudes, Departures and Closing Errors.							
Line designated	True course	Distance	Latitudes		Departures		
			N.	S.	E.	W.	
S. bdy. of Tp.	S. 89° 47' W.	80.12		.30		80.12	
	N. 89° 59' W.	240.72	.07			240.72	
	N. 89° 57' W.	40.21	.03			40.21	
	N. 89° 58' W.	40.16	.02			40.16	
	S. 89° 58' W.	79.40		.05		79.40	
W. bdy. of Tp.	N. 0° 11' W.	80.36	80.36			.26	
	N. 0° 09' E.	40.18	40.18		.10		
	N. 0° 06' E.	40.18	40.18		.07		
	N. 0° 06' E.	39.99	39.99		.07		
	N. 0° 02' E.	39.99	39.99		.02		
	N. 1° 20' W.	80.88	80.86			1.88	
	N. 0° 14' E.	40.22	40.22		.16		
	N. 0° 20' E.	40.19	40.19		.23		
	N. 0° 54' E.	40.30	40.30		.63		
N. bdy. of Tp. (1st. Std. Par. S.)	East	237.85			237.85		
	N. 89° 57' E.	82.80	.07		82.80		
	S. 89° 38' E.	40.34		.26	40.34		
	S. 89° 53' E.	40.12		.08	40.12		
	N. 89° 19' E.	80.25	.96		80.25		
E. bdy. of Tp.	N. 89° 26' E.	.85	.01		.85		
	S. 0° 25' W.	84.22		84.22		.61	
	S. 0° 33' W.	80.56		80.56		.77	
	S. 0° 54' W.	79.84		79.84		1.25	
	S. 0° 19' E.	80.30		80.30	.44		
Convergency.	South	160.00		160.00			
Totals			485.98	485.61	484.96	485.38	
Error in Latitude			485.61		484.96		
Error in Departure			0.37			0.42	

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

The subdivision lines of this township were surveyed in 1887, by R.C. Powers, U.S.D.S.

There is no retracement or resurvey of the subdivision lines of this township of record.

The following notes describe a dependent resurvey of the subdivision lines of T.6 S., R.5 E., reconstructing all original or accepted local cors. and reestablishing lost cors. by proper proportion or from collateral evidence.

Where true points for cors. fall in places liable to future grading for road construction and therefore not suitable for reestablishment or reconstruction of permanent cor. monuments, wit. cors. are established, as described.

From the cor. of secs. 1,2,35 and 36, on S. bdy. of Tp., described in book "J" of this group.
N.0°18'W. on true line bet. secs. 35 and 36.
Over level land, thru scattering undergrowth.

39.60 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron post, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 35 | S 36
1928

and WC on portions of brass caps toward point for cor. Continue along unimproved road.

49.10 Cor. of fences extending N. and W. bears W., 45 lks. dist.
76.10 A house bears W., 3 chs. dist.
78.70 Cor. of fences extending S. and W., bears W., 50 lks. dist.

79.20 The accepted local cor. of secs. 25,26,35 and 36, which is an iron pipe 1 in. diam., buried under surface of unimproved roadways extending N.,S.,E. and W., at intersection.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 25, 26, 35 and 36, with brass caps marked

T 6 S R 5 E
S 26 | S 25
S 35 | S 36
1928

and WC on quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S. R. 5 E.

Book 8846

chains	<p>From point for cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp., described in book "L" of this group. S. 89°00'W. on true line bet. secs. 25 and 36. (W$\frac{1}{2}$) Over level land, thru scattering undergrowth, along unimproved road.</p>
40.44	<p>The accepted local $\frac{1}{4}$ sec. cor., which is an iron pipe, 1 in. diam., 3 ins. above ground. At points N. 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p> <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S\ 25}{S\ 36}$ 1928 </p> <p>and WC on portions of brass caps toward the corner. Cor. of fences extending N. and W. bears N., 44 lks. dist. Thence, S. 89°20'W. on true line bet. secs. 25 and 36. (W$\frac{1}{2}$) Over level land, thru scattering undergrowth, along unimproved road.</p>
40.09	<p>The cor. of secs. 25, 26, 35 and 36.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite, sage.</p> <hr style="border-top: 1px dashed black;"/>
0.39 0.45 2.50	<p>N. 0°30'E. on true line bet. secs. 25 and 26. (S$\frac{1}{2}$) Over level land, along unimproved road, thru scattering undergrowth; cultivated land in sec. 26.</p> <p>Cor. of fences extending N. and W. bears W., 32 lks. dist. Cor. of fences extending N. and E. bears E., 46 lks. dist. A house bears W., 2$\frac{1}{2}$ chs. dist.</p>
40.96	<p>The point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, i.e., property fence cors. and center line of roadway extending N. and S.</p> <p>At points N. 45°E., S. 45°E., S. 45°W. and N. 45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p> <p style="text-align: center;"> $\frac{1}{4}$ S 26 S 25 1928 </p> <p>and WC on portions of brass caps toward point for cor. Cor. of fences extending S. and E. bears E., 40 lks. dist. Cor. of fences extending S. and W. bears W., 47 lks. dist. N. end of cultivated land in sec. 26.</p> <p>Thence, N. 0°30'E. on true line bet. secs. 25 and 26. (N$\frac{1}{2}$) Over level land, along unimproved road, thru scattering undergrowth.</p>
0.72	<p>Cor. of fences extending N. and E. bears E., 68 lks. dist.</p>
40.11	<p>Cor. of fences extending S. and E. bears E., 51 lks. dist. Power lines extending E. and W., overhead.</p>
40.50	<p>The accepted local cor. of secs. 23, 24, 25 and 26, which is an iron pipe 1 in. diam., buried in ground at intersection of improved road extending E. and W., and unimproved road extending N. and S.</p>

Resurvey of the Subdivisions

of

T. 6 S., R. 5 E.

chains

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 23, 24, 25 and 26, with brass caps marked

T 6 S R 5 E

S 23 | S 24

S 26 | S 25

1928

and WC on quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 19, 24, 25 and 30, on E. bdy. of Tp., described in book "L" of this group.

N.89°05'W. on true line bet. secs. 24 and 25. (E½)

Over level land, along improved road, between cultivated fields.

19.00 A house bears N., 2 chs. dist.

39.68 The point for ¼ sec. cor., determined from collateral evidence, i.e., center line of improved road, and property fences extending N. and S.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked

$$\frac{1}{4} \frac{S \ 24}{S \ 25}$$

1928

and WC on portions of brass caps toward point for cor.

Cor. of fences extending N., E. and W. bears N., 42 lks. dist.
Cor. of fences extending E., W. and S. bears S., 42 lks. dist.

Thence, S.89°35'W. on true line bet. secs. 24 and 25. (W½)
Over level land, along improved road, between cultivated fields.

2.30 A house bears N., 2 chs. dist.

40.12 The cor. of secs. 23, 24, 25 and 26.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

Timber: None.

Undergrowth: Land is under cultivation, and cleared.

N.0°54'W. on true line bet. secs. 23 and 24. (S½)

Over level land, along unimproved road, bet. cultivated fields.

0.34 Telephone lines extend E. and W.

0.43 Cor. of fences extending N. and W. bears W., 43 lks. dist.

0.91 Well and pump house bears W., 70 lks. dist.

1.70 A house bears W., 2 chs. dist.

39.36 Cor. of fences extending N., S. and W. bears W., 62 lks. dist.


39.96 The accepted local ¼ sec. cor., which is an iron pipe, 1 in. diam., 4 ins. above ground.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

BOOK 2846

chains

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked




and WC on portions of brass caps toward the corner. Cor. of fences extending N. and E. bears E., 54 lks. dist. A house bears N.40°E., about 15 chs. dist.

2.00
13.60
19.53
19.80
22.50
30.02
39.55
40.00

Thence, N.0°30'W. on true line bet. secs. 23 and 24. (N 1/2) Over level land, along unimproved road, thru undergrowth. A house bears W., about 2 chs. dist. Cor. of fences extending S. and E. bears E., 54 lks. dist. Cor. of fences extending S. and W. bears W., 43 lks. dist. Ditch, 10 lks. wide, course W. Unimproved road extends E. and W. Cor. of fences extending N. and E. bears E., 44 lks. dist. Cor. of fences extending S. and E. bears E., 46 lks. dist. accepted local The/cor. of secs. 13, 14, 23 and 24, which is an iron pipe, 1 in. diam., 4 ins. above ground, alongside a wooden hub.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 13, 14, 23 and 24, with brass caps marked




and WC on quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

23.00
40.04
40.13

From the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp. described in book "E" of this group. S.89°57'W. on true line bet. secs. 13 and 24. Over level land, thru scattering undergrowth, along S. side of fence extending W. Cross to N. side of fence extending E. and W. Cor. of fences extending N., S. and E. bears S., 27 lks. dist. The local accepted 1/4 sec. cor., which is an iron pipe, 1 in. diam., 4 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked



and WC on portions of brass caps toward the corner.

45.73
47.05
48.33
50.92
51.04

Right of way fence, extends N.54°W. and S.54°E. Telegraph and telephone lines, extend N.54°W. and S.54°E. Southern Pacific Railroad, bears N.53°48'W. and S.53°48'E. Right of way fence, extends N.54°W. and S.54°E. Telephone lines, extend N.54°W. and S.54°E.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

- 52.50 Center line of highway, extends N.54°W. to Maricopa and S.54°E. to Casa Grande.
55.02 Telephone lines, extend N.54°W. and S.54°E.
72.30 Cor. of fences extending S. and W. bears S., 45 lks. dist.
80.26 The cor. of secs. 13, 14, 23 and 24.
Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

N.0°06'E. on true line bet. secs. 13 and 14.
Over level land, along unimproved road, thru undergrowth.

- 0.68 Cor. of fences extending N. and W. bears W., 87 lks. dist.
20.38 Telephone lines, extend N.54°W. and S.54°E.
20.48 Cor. of fences extending S. and W. bears W., 90 lks. dist.
20.93 Center line of highway, extends N.54°W. to Maricopa and S.54°E. to Casa Grande.
21.58 Telephone lines, extend N.54°W. and S.54°E.
21.68 Right of way fence, extends N.54°W. and S.54°E.
23.40 Southern Pacific Railroad, bears N.53°48'W. and S.53°48'E.
24.33 Telegraph and telephone lines, extend N.54°W. and S.54°E.
25.23 Right of way fence, extends N.54°W. and S.54°E.
39.99 The accepted local $\frac{1}{4}$ sec. cor., which is an iron post 2 ins. diam., 3 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

 $\frac{1}{4}$

S 14 | S 13

1928

and WC on portions of brass caps toward the corner.
Unimproved road extending N. and S. bears W., 110 lks. dist.

- 57.80 Cor. of fences extending N. and W. bears W., 39 lks. dist.
70.40 Cor. of fences extending S. and W. bears W., 40 lks. dist.

- 79.98 The local accepted cor. of secs. 11, 12, 13 and 14, which is an iron post 2 ins. diam., 4 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 11, 12, 13 and 14, with brass caps marked

T 6 S R 5 E

S 11 | S 12

S 14 | S 13

1928

and WC in quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6. S., R. 5. E.

BOOK 1890

chains	From the cor. of secs. 7, 12, 13 and 18, on E. bdy. of Tp., described in book "L" of this group. N. 89° 58' W. on true line bet. secs. 12 and 13. Over level land, thru scattering undergrowth
20.40	Fence extends N. and S.; cor. of fences extending S. and E. bears N., 40 lks. dist.
28.50	Wash, 30 lks. wide, course NW.
40.65	The accepted local $\frac{1}{4}$ sec. cor., which is an iron pipe 2 ins. diam., 2 ins. above ground. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each $\frac{3}{4}$ ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\begin{array}{c} \frac{1}{4} \text{ S } 12 \\ \frac{1}{4} \text{ S } 13 \end{array}$ 1928 and WC on portions of brass caps toward the corner.
41.08	Cor. of fences extending S. and W. bears N., 61 lks. dist.
42.00	A group of farm buildings bears S., about 15 chs. dist.
50.00	A group of farm building bears S., about 20 chs. dist.
61.25	Fence extends N. and S.; cor. of fences extending N., S., E. and W. bears N., 42 lks. dist.
81.30	The cor. of secs. 11, 12, 13 and 14. Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite and sage.

	N. 1° 32' E. on true line bet. secs. 11 and 12. Over level land, thru scattering undergrowth, along unimproved road.
0.20	Center line of intersection of unimproved roads extending N., S., E. and W. bears E., 7 lks. dist.
0.47	Fence extends E. and W.; cor. of fences extending E., W. and N. bears E., 45 lks. dist.
33.20	Wash, (part of Santa Cruz Wash) 20 lks. wide, course W.
40.30	The orig. $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, 4 ins. square, buried in ground. No scribe marks visible. Alongside is an iron pipe 2 ins. diam., 4 ins. above ground. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each $\frac{3}{4}$ ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\begin{array}{c} \frac{1}{4} \\ \text{S } 11 \text{ } \text{S } 12 \end{array}$ 1928 and WC on portions of brass caps toward the corner.
Cor.	Cor. of fences extending E., W. and N. bears E., 187 lks. dist. Cor. of fences extending E., W. and N. bears W., 50 lks. dist. Cor. of fences extending E., W. and S. bears E., 45 lks. dist. Unimproved road extending N. and S. bears E., 20 lks. dist.
46.80	Wash, (part of Santa Cruz Wash) 20 lks. wide, course W.
62.00	A house bears W., about 4 chs. dist.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

80.15 Cor. of fences extending S. and W. bears W., 50 lks. dist.
Cor. of fences extending S. and E. bears E., 50 lks. dist.

80.60 The point for cor. of secs. 1, 2, 11 and 12, determined from collateral evidence, i.e., center line of unimproved roads extending E., W. and S., and property fence cors. to SE. and SW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 1, 2, 11 and 12, with brass caps marked

$$\begin{array}{c} T\ 6\ S\ R\ 5\ E \\ \hline S\ 2\ S\ 1 \\ \hline S\ 11\ S\ 12 \\ 1928 \end{array}$$

and WC in quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 1, 6, 7 and 12, on E. bdy. of Tp., described in book "L" of this group.

N.89°56'W. on true line bet. secs. 1 and 12. (E $\frac{1}{2}$)

Over level land, thru scattering undergrowth, along unimproved road.

21.20 Wash, 30 lks. wide, course SW.

32.30 Wash, 40 lks. wide, course SW.

39.80 The orig. $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 18 ins. long, lying on the ground and marked $\frac{1}{4}$ S on one side. Reset stake 18 ins. in ground, at true cor. point, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{c} S\ 1 \\ \hline \frac{1}{4}\ S\ 12 \\ 1928 \end{array}$$

and WC on portions of brass caps toward the corner.

Cor. of fences extending S. and W. bears S., 47 lks. dist.

Unimproved road extending E. and W. bears S., 20 lks. dist.

Thence, N.89°56'W. on true line bet. secs. 1 and 12. (W $\frac{1}{2}$)

Over level land, thru scattering undergrowth, along unimproved road.

10.15 Wash, 25 lks. wide, course SW.

40.12 The point for cor. of secs. 1, 2, 11 and 12.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6. S., R. 5. E.


BOOK 8846

chains

From point for cor. of secs. 1, 2, 11 and 12.
N. 0° 14' E. on true line bet. secs. 1 and 2.
Over level land, thru scattering undergrowth.

9.20 A house bears W., 1 ch. dist.


40.45 Point for 1/4 sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
1/4 sec. cor., with brass caps marked



and WC on portions of brass caps toward point for cor.

83.21 Intersect the 1st stand. par. S. at point for closing cor.
of secs. 1 and 2, which is 87 lks., N. 89° 19' E. of the
stand. cor. of Ts. 5 S., Rs. 5 and 6 E., hereinbefore
described. At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 34 ins. in ground
for closing cor. of secs. 1 and 2, with brass cap marked




and deposit a marked (X) stone alongside post, at base.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 2, 3, 34 and 35, on S. bdy. of
Tp., described in book "J" of this group.
N. 0° 14' W. on true line bet. secs. 34 and 35.
Over level land, thru scattering undergrowth.

39.60 Cor. of fences extending N. and W. bears W., 28 lks. dist.

39.78 Point for 1/4 sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
1/4 sec. cor., with brass caps marked



and WC on portions of brass caps toward point for cor.

78.67 NE. cor. of Rancho Buena Vista bears W., 80 lks. dist.

79.16 Cor. of fences extending S. and W. bears W., 41 lks. dist.

79.56 The accepted local cor. of secs. 26, 27, 34 and 35, which is
an iron pipe 2 ins. diam., 4 ins. above ground.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 26, 27,
34 and 35, with brass caps marked

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

T 6 S R 5 E
S 27 | S 26
S 34 | S 35
1928

and WC in quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, sage and mesquite.

From the cor. of secs. 25, 26, 35 and 36.

N. 89° 24' W. on true line bet. secs. 26 and 35. (E $\frac{1}{2}$)

Over level land, thru scattering undergrowth, along unimproved road.

20.10 Cor. of fences extending E., W. and N. bears N., 86 lks. dist.

40.04 Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, I.e., property fence cors. to N. and S.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 26
S 35
1928

and WC on portions of brass caps toward point for cor.

Cor. of fences extending E., W. and S. bears S., 46 lks. dist.

Cor. of fences extending N. and W. bears N., 45 lks. dist.

Cor. of fences extending N., S. and E. bears N., 60 lks. dist.

Thence, S. 89° 54' W. on true line bet. secs. 26 and 35. (W $\frac{1}{2}$)

Over level land, thru scattering undergrowth, along unimproved road.

2.00 A shed bears N., 2 $\frac{1}{2}$ chs. dist.

5.00 A house bears S., 1 $\frac{1}{2}$ chs. dist.

40.04 The cor. of secs. 26, 27, 34 and 35.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 07' W. on true line bet. secs. 26 and 27. (S $\frac{1}{2}$)

Over level land, thru scattering undergrowth, along unimproved road.

0.46 Cor. of fences extending N. and E. bears E., 45 lks. dist.

40.64 Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, i.e., property fence cor. to E.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 27 | S 26
1928

and WC on portions of brass caps toward point for cor.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

BOOK 3846

chains
 0.80 Cor. of fences extending S. and E., bears E., 120 lks. dist.
 39.73 Thence,
 39.81 N. 0° 7' W., on true line, bet. secs. 26 and 27 (N₂)
 40.20 Over level land, thru scattering undergrowth, along
 unimproved road.

Cor. of fences extending N. and E., bears E., 80 lks. dist.
 Cor. of fences extending S. and E., bears E., 128 lks. dist.
 End pole of power line extending E., bears E., 27 lks. dist.

Point for cor. of secs. 22, 23, 26 and 27, determined from
 collateral evidence, i.e., center line of improved
 road extending E. and W., intersecting unimproved road
 extending N. and S., and property fence cors. to NE.
 and NW.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
 dist., set iron posts, each 3 ft. long, 1 in. diam.,
 33 ins. in ground, for wit. cors. to cor. of secs. 22,
 23, 26 and 27, with brass caps marked

T 6 S	R 5 E
S 22	S 23
S 27	S 26

1928

and W C on portions of brass caps toward cor. point.

Land, level.
 Soil, clay loam, 1st and 2nd rate.
 Timber, none.
 Undergrowth, greasewood, scrub mesquite and sagebrush.

From cor. of secs. 23, 24, 25 and 26,
 S. 89° 52' W., on true line, bet. secs. 23 and 26.
 Over level land, thru scattering undergrowth, along center
 line of improved road extending E. and W.

39.88 Cor. of fences extending E., W. and N., bears N., 40 lks. dist.
 40.18 Cor. of fences extending E., W. and S., bears S., 50 lks. dist.
 40.48 Point for $\frac{1}{4}$ sec. cor., falls in improved roadway.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
 dist., set iron posts, each 3 ft. long, 1 in. diam.,
 33 ins. in ground, for wit. cors. to $\frac{1}{4}$ sec. cor.,
 with brass caps marked

$\frac{1}{4}$	S 23
	S 26

1928

and W C on portions of brass caps toward cor. point.

Telephone lines extending E. and W., bear N., 35 lks. dist.
 Power lines extending E. and W., bear S., 40 lks. dist.

80.96 The point for cor. of secs. 22, 23, 26 and 27.

Land, level.
 Soil, clay loam, 1st and 2nd rate.
 Timber, none.
 Undergrowth, greasewood, scrub mesquite and sagebrush.

From point for cor. of secs. 22, 23, 26 and 27,
 N. 0° 10' W., on true line, bet. secs. 22 and 23.
 Over level land, thru scattering undergrowth, along road.

0.37 Telephone lines, extending E. and W., overhead.
 0.45 Cor. of fences extending N. and E., bears E., 35 lks. dist.
 Cor. of fences extending N. and W., bears W., 46 lks. dist.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains
1.50 A house bears West, $1\frac{1}{2}$ chs. dist.
40.03 Cor. of fences extending N., S. and E., bears E., 18 lks. dist.
Cor. of fences extending N., S. and W., bears W., 78 lks. dist.

40.36 Point for $\frac{1}{4}$ sec. cor. falls in road.
At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long, 1 in. diam., 33 ins. in ground, for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 22 | S 23
1928

and W C in portions of brass caps toward cor. point.

80.24 Cor. of fences extending S. and E., bears E., 53 lks. dist.
80.27 Cor. of fences extending S. and W., bears W., 56 lks. dist.

80.72 Point for cor. of secs. 14, 15, 22 and 23, determined from collateral evidence, i.e., intersection of center lines of roads extending N., S., E. and W., and property fence cors. to NE., SE., SW. and NW.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long, 1 in. diam., 33 ins. in ground, for wit. cors. to cor. of secs. 14, 15, 22 and 23, with brass caps marked

T 6 S | R 5 E
S 15 | S 14
S 22 | S 23
1928

and W C in portions of brass caps toward cor. point.

Land, level.
Soil, clay loam, 1st and 2nd rate.
Timber, none.
Undergrowth, greasewood, scrub mesquite and sagebrush.

From cor. of secs. 13, 14, 23 and 24,
S. 89°52'W., on true line, bet. secs. 14 and 23 (E. $\frac{1}{2}$)
Over level land, thru scattering undergrowth, along unimproved road.

19.67 Cor. of fences extending S. and W., bears S., 42 lks. dist.

40.10 Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence i.e., center line of road extending E. and W., and property fences to N. and S.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long, 1 in. diam., 33 ins. in ground, for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$ S 14
S 23
1928

and W C on portions of brass caps toward cor. point.

Cor. of fences extending E., W. and N., bears N., 42 lks. dist.
Cor. of fences extending E., W. and S., bears S., 42 lks. dist.

Resurvey of the Subdivisions

BOOK 3846

of
T. 6. S. R. 5. E.

chains

Thence, N.89°26'W. on true line bet. secs. 14 and 23. (W $\frac{1}{2}$)
Over level land, thru scattering undergrowth, along un-
improved road.

2.75 A house bears N., 7 $\frac{1}{2}$ chs. dist.

6.50 A house bears S., 4 $\frac{1}{2}$ chs. dist.

8.90 Cor. of fences extending E., W. and S. bears S., 42 lks. dist.

40.10 The point for cor. of secs. 14, 15, 22 and 23.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 14, 15, 22 and 23.

N.0°20'W. on true line bet. secs. 14 and 15. (S $\frac{1}{2}$)

Over level land, thru scattering undergrowth, along road.

0.46 Cor. of fences extending N. and E. bears E., 49 lks. dist.

Cor. of fences extending N. and W. bears W., 55 lks. dist.

39.59 Cor. of fences extending S. and W. bears W., 52 lks. dist.

40.12 The accepted local $\frac{1}{4}$ sec. cor., which is an iron pipe,
1 in. diam., 4 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$

S 15 | S 14

1928

and WC on portions of brass caps toward the corner.

Cor. of fences extending S. and E. bears E., 45 lks. dist.

$\frac{1}{4}$ sec. cor. is at intersection of road extending W.

Thence, N.0°20'W. on true line bet. secs. 14 and 15. (N $\frac{1}{2}$)

Over level land; thru scattering undergrowth, along road.

0.20 Cor. of fences extending N. and W. bears W., 46 lks. dist.

26.60 A barn bears W., 2 chs. dist.

29.00 A house bears W., 5 chs. dist.

33.30 A well and windmill bears W., 5 chs. dist.

38.90 Telephone lines extend N.54°W. and S.54°E.

39.31 Cor. of fences extending S. and N.54°W., bears W., 90 lks. dist.

Center line of highway, extends N.54°W. to Maricopa and
S.54°E. to Casa Grande, at intersection of road to S.

39.80 The accepted local cor. of secs. 10, 11, 14 and 15, which
is an iron pipe, 1 in. diam., 3 ins. above ground.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 10, 11,
14 and 15, with brass caps marked

T 6 S R 5 E

S 10 | S 11

S 15 | S 14

1928

and WC in quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains	
	From the cor. of secs. 11, 12, 13 and 14. N. 89° 35' W., on true line, bet. secs. 11 and 14. Over level land, thru scattering undergrowth, along road.
40.36	The accepted local $\frac{1}{4}$ sec. cor., which is an iron pipe 3 ins. diam., 2 ins. above ground. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{1}{4} \begin{array}{c} S 11 \\ S 14 \end{array}$ 1928 and WC on portions of brass caps toward the corner. Fence extending E. and W. bears N., 50 lks. dist. Center line of road extending E. and W. bears N., 18 lks. dist. Continue line and measurement.
60.56	Cor. of fences extending E., W. and N. bears N., 48 lks. dist.
62.46	SE. cor. of house bears N., 2.50 chs. dist.
76.86	Telegraph and Telephone lines extend N. 54° W. and S. 54° E.
77.96	Southern Pacific Railroad, bears N. 53° 48' W. and S. 53° 48' E.
80.66	Telephone lines extend N. 54° W. and S. 54° E.
80.72	The cor. of secs. 10, 11, 14 and 15. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.
	----- N. 0° 18' E. on true line bet. secs. 10 and 11. (S $\frac{1}{2}$) Over level land, thru scattering undergrowth, along road.
0.04	Telephone lines, extend N. 54° W. and S. 54° E.
0.10	Right of way fence cor., cor. of fences extending N. and S. 54° E., bears E., 50 lks. dist.
0.83	Right of way fence cor., cor. of fences extending N. and N. 54° W. bears W., 50 lks. dist.
2.00	Southern Pacific Railroad, bears N. 53° 48' W. and S. 53° 48' E.
3.00	Telegraph and telephone lines, extend N. 54° W. and S. 54° E.
3.43	Cor. of fences extending S. and S. 54° E. bears E., 50 lks. dist.
4.17	Cor. of fences extending S. and N. 54° W. bears W., 50 lks. dist.
21.15	Cor. of fences extending S. and E. bears E., 45 lks. dist.
24.60	Wash (Part of Santa Cruz Wash) 20 lks. wide, course W.
31.40	Wash, (Part of Santa Cruz Wash) 30 lks. wide, course W.
40.44	Point for $\frac{1}{4}$ sec. cor., determined from collateral evidence, i. e., cor. of fences extending N. and E. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{1}{4}$ S 10 S 11 1928 and WC on portions of brass caps toward point for cor. Cor. of fences extending N. and E. bears E., 60 lks. dist. Thence, N. 0° 18' E. on true line bet. secs. 10 and 11. (N $\frac{1}{2}$) Over level land, along unimproved road, thru undergrowth.
40.50	Cor. of fences extending S. and E. bears E., 52 lks. dist.


Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

BOOK 8846

chains

41.00 The orig. cor. of secs. 2, 3, 10 and 11, which is a mesquite stake 4 ins. square, 14 ins. above ground and marked T VI S II on NE., R VE SXI on SE., S EX on SW. and SIII on NW. side. Reset this stake, which is 2½ ft. long, 30 ins. in ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 2, 3, 10 and 11, with brass caps marked




and WC in quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 1, 2, 11 and 12. N.89°04'W. on true line bet. secs. 2 and 11. Over level land, thru scattering undergrowth, along road.

41.21 Point for ¼ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked



and WC on portions of brass caps toward point for cor.

Cor. of fences extending E., W. and S. bears S., 50 lks. dist. Unimproved road extending E. and W. bears S., 20 lks. dist. Wash, 30 lks. wide, course S.


69.10
82.42 The cor. of secs. 2, 3, 10 and 11.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Mesquite, greasewood and sage.

N.1°28'E. on true line bet. secs. 2 and 3. (S½)
Over level land, thru scattering undergrowth.
Center line of intersection, unimproved roads bear E., W. and NW.

0.20
39.87 The orig. ¼ sec. cor., which is a mesquite stake 4 ins. square, 16 ins. above ground, scribe marks not legible. Reset this stake, which is 2½ ft. long, 30 ins. in ground,

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked



and WC in portions of brass caps toward the corner.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

Thence, N.1°28'E. on true line bet. secs. 2 and 3. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

42.43

The closing cor. of secs. 2 and 3 on 1st Stand. Par. S.,
which is the remains of a mesquite stake 4 ins. square,
broken off even with the ground. In place of stake,
which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground
for closing cor. of secs. 2 and 3, with brass cap marked

T 5 S R 5 E
S 36

S 3 | S 2
T 6 S R 5 E
C C
1928

and deposit a marked (X) stone alongside post, at base.

The standard cor. of secs. 35 and 36, T.5 S., R.5 E.,
hereinbefore described, bears N.89°38'W., 76 lks. dist.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 3, 4, 33 and 34, on S. bdy.
of Tp., described in book "J" of this group.
N.0°04'W. on true line bet. secs. 33 and 34.

27.00

Cor. of fences extending S. and W. bears E., 20 lks. dist.

39.80

Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 33 | S 34
1928

and WC on portions of brass caps toward point for cor.

79.60

The orig. cor. of secs. 27, 28, 33 and 34, which is a mes-
quite stake 4 ins. square, 12 ins. above ground and
marked T VI S S XXVII on NE., S XXXIV RVE on SE.,
XXXIII on SW., and S XXVIII on NW. side. Reset this
post, which is 2 $\frac{1}{2}$ ft. long, 30 ins. in ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 27, 28,
33 and 34, with brass caps marked

T 6 S R 5 E
S 28 | S 27
S 33 | S 34
1928

and WC in quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber. Undergrowth: Greasewood, mesquite, sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

BOOK 3846

chains	<p>From the cor. of secs. 26, 27, 34 and 35. S. 89° 45' W. on true line bet. secs. 27 and 34. (E 1/2) Over level land, thru scattering undergrowth.</p>	
19.80	<p>Cor. of fences extending E., W. and S. bears S., 45 lks. dist.</p>	
39.96	<p>The orig. 1/4 sec. cor., which is a mesquite stake 1/4 ins. square, 20 ins. long, lying on ground and marked S on one side. Bottom of stake dug up at true cor. point. Set upper part of stake, 20 ins. in ground at true cor. point, and</p> <p>At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked</p> <p style="text-align: center;"> $\frac{1}{4} \begin{array}{l} S \ 27 \\ S \ 34 \end{array}$ 1928 </p> <p>and WC on portions of brass caps toward the corner.</p> <p>Cor. of fences extending S. and E. bears S., 45 lks. dist.</p> <p>Thence, N. 89° 43' W. on true line bet. secs. 27 and 34. (W 1/2) Over level land, thru scattering undergrowth.</p>	
40.04	<p>The cor. of secs. 27, 28, 33 and 34.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite and sage.</p>	
	<p>N. 0° 34' W. on true line bet. secs. 27 and 28. (S 1/2) Over level land, thru scattering undergrowth.</p>	
40.73	<p>The orig. 1/4 sec. cor., which is the remains of a mesquite stake 1/4 ins. square, buried in ground. No marks legible.</p> <p>At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked</p> <p style="text-align: center;"> $\frac{1}{4} \begin{array}{l} S \ 28 \ \ S \ 27 \end{array}$ 1928 </p> <p>and WC on portions of brass caps toward the corner.</p> <p>Cor. of fences extending N. and W. bears W., 45 lks. dist.</p> <p>Thence, N. 0° 23' W. on true line bet. secs. 27 and 28. (N 1/2) Over level land, thru scattering undergrowth.</p>	
1.13	<p>A well and pump bears W., 2 chs. dist.</p>	
32.60	<p>Wash, 20 lks. wide, course W.</p>	
39.69	<p>Cor. of fences extending S. and W. bears W., 45 lks. dist.</p>	
40.15	<p>Point for cor. of secs. 21, 22, 27 and 28, determined from collateral evidence, i.e., center line of improved road extending E. and W. and property fence cor. to SW.</p> <p>At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 21, 22, 27 and 28, with brass caps marked</p>	

Resurvey of the Subdivisions

of
T. 6 S. R. 5 E.

chains

$$\begin{array}{r} T\ 6\ S\ R\ 5\ E \\ S\ 21\ |S\ 22 \\ S\ 28\ |S\ 27 \\ 1928 \end{array}$$

and WC on quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 22, 23, 26 and 27.
N.89°58'W. on true line bet. secs. 22 and 27.
Over level land, along center line of improved road, thru
scattering undergrowth.

20.57 Cor. of fences extending N. and E. bears N., 45 lks. dist.

40.26 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\frac{1}{4} \begin{array}{r} S\ 22 \\ S\ 27 \end{array}$$

1928

and WC in portions of brass caps toward point for cor.

80.52 The point for cor. of secs. 21, 22, 27 and 28.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 21, 22, 27 and 28.
N.0°12'E. on true line bet. secs. 21 and 22.
Over level land, thru scattering undergrowth.

40.12 Fence extends E. and W.; cor. of fences extending N. and E. bears W., 13 lks. dist.

40.41 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\frac{1}{4} \begin{array}{r} S\ 21\ |S\ 22 \end{array}$$

1928

and WC on portions of brass caps toward point for cor.

80.82 Point for cor. of secs. 15, 16, 21 and 22. At points N.45° E.,
S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam., 33 ins. in ground
for wit. cors. to cor. of secs. 15, 16, 21 and 22, with
brass caps marked

$$\begin{array}{r} T\ 6\ S\ R\ 5\ E \\ S\ 16\ |S\ 15 \\ S\ 21\ |S\ 22 \\ 1928 \end{array}$$

and WC in quadrants of brass caps toward point for cor.

Resurvey of the Subdivisions
of
T. 6 S. R. 5 E.

BOOK 3846

chains

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 14, 15, 22 and 23.
N. 89° 50' W. on true line bet. secs. 15 and 22.
Over level land, thru scattering undergrowth, along S. side
of road.

20.68 Cor. of fences extending N. and E. bears N., 47 lks. dist.

40.00 Point for 1/4 sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
1/4 sec. cor., with brass caps marked

1/4 S 15
S 22

1928

and WC on portions of brass caps toward point for cor.
Fence extending E. and W. bears S., 15 lks. dist.

54.00 Cross to S. side of fence extending E. and W.

80.00 The point for cor. of secs. 15, 16, 21 and 22.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 15, 16, 21 and 22.
N. 0° 52' W. on true line bet. secs. 15 and 16.
Over level land, thru scattering undergrowth.

0.21 Fence extends E. and W.; cor. of fences extending S. and
E. bears W., 5 lks. dist.

40.41 Point for 1/4 sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4
sec. cor., with brass caps marked

1/4
S 16 | S 15

1928

and WC on portions of brass caps toward point for cor.

80.82 The orig. cor. of secs. 9, 10, 15 and 16, which is the re-
mains of a mesquite stake buried in the ground. Along-
side is an iron pipe 2 ins. diam., 3 ins. above ground.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 9, 10,
15 and 16, with brass caps marked

T 6 S R 5 E
S 9 | S 10
S 16 | S 15

1928

and WC in quadrants of brass caps toward the corner.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cbr. of secs. 10, 11, 14 and 15.
N.89°13'W. on true line bet. secs. 10 and 15.
Over level land, thru scattering undergrowth.

- 0.67 Center line of highway, extends N.54°W. to Maricopa and
S.54°E. to Casa Grande.
1.27 Telephone lines, extend N.54°W. and S.54°E.
1.32 Fence, extends N.54°W. and S.54°E., enter cleared land.
20.47 Fence extends N. and S.; leave cleared land, continue
thru scattering undergrowth.
40.21 Old fence with no wire on it extends N. and S.
40.37 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$
sec. cor., with brass caps marked

$$\frac{1}{4} \begin{array}{l} S 10 \\ S 15 \end{array}$$

1928

and WC on portions of brass caps toward point for cor.

- 44.70 Fence extends N. and S.
45.60 Unimproved road extends N. and S.
80.74 The cor. of secs. 9, 10, 15 and 16.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

N.0°32'E. on true line bet. secs. 9 and 10.
Over level land, thru scattering undergrowth.

- 0.46 Cor. of fences extending N. and W. bears W., 46 lks. dist.
20.50 Cor. of fences extending S. and W. bears W., 45 lks. dist.
35.00 Wash (Part of Santa Cruz Wash) 20 lks. wide, course W.
38.90 Wash (part of Santa Cruz Wash) 20 lks. wide, course W.
40.01 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$
sec. cor., with brass caps marked

$$\frac{1}{4} \begin{array}{l} S 9 \\ S 10 \end{array}$$

1928

and WC on portions of brass caps toward point for cor.

- 56.45 Telephone lines, extend N.54°W. and S.54°E.
56.95 Center line of highway, extends N.54°W. to Maricopa and
S.54°E. to Casa Grande.
57.55 Telephone lines extend N.54°W. and S.54°E.
57.60 Right of way fence, extends N.54°W. and S.54°E.
59.63 Southern Pacific Railroad, bears N.53°49'W. and S.53°49'E.
60.55 Telegraph and telephone lines, extend N.54°W. and S.54°E.
61.49 Right of way fence, extends N.54°W. and S.54°E.
80.02 The orig. cor. of secs. 3, 4, 9 and 10, which is the remains

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

ECCOCK 3846

chains

of a mesquite stake, 4 ins. square, 14 ins. long, lying on the ground beside a mound of earth and marked T VI S S III on NE., R V E S X on SE., S IX on SW. and S IV on NW. side. Reset this stake 14 ins. in the ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 3, 4, 9 and 10, with brass caps marked

$$\begin{array}{r} T\ 6\ S\ R\ 5\ E \\ S\ 4\ |S\ 3 \\ \hline S\ 9\ |S\ 10 \\ 1928 \end{array}$$

and WC on quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
Timber: None.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 2, 3, 10 and 11.
S.89°46'W. on true line bet. secs. 3 and 10.
Over level land, along unimproved road, thru undergrowth.

40.20 The orig. $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake 4 ins. square, 3 ins. above ground. No marks visible.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{r} \frac{1}{4}\ S\ 3 \\ \hline \frac{1}{4}\ S\ 10 \\ 1928 \end{array}$$

and WC on portions of brass caps toward the corner.
Cor. of fences extending N. and W. bears N., 45 lks. dist.

41.43 The SE. cor. of a shack bears N., 86 lks. dist.
42.90 Cor. of fences extending N. and E. bears N., 45 lks. dist.

80.40 The cor. of secs. 3, 4, 9 and 10.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

N.0°17'W. on true line bet. secs. 3 and 4.
Over level land, thru scattering undergrowth.

40.01 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$$\begin{array}{r} \frac{1}{4} \\ S\ 4\ |S\ 3 \\ \hline 1928 \end{array}$$

and WC on portions of brass caps toward point for cor.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

82.63 The closing cor. of secs. 3 and 4 on 1st stad. par. S., which is an iron pipe 2 ins. diam., 3 ins. above ground. In place of pipe, which is deposited alongside,

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground for closing cor. of secs. 2 and 3, with brass cap marked

T 5	S	R 5	E
	S	35	
<hr/>			
S 4		S 3	
T 6	S	R 5	E
	C	C	
	1928		

and deposit a marked (X) stone alongside post, at base.

The standard cor. of secs. 34 and 35, T. 5 S., R. 5 E., hereinbefore described, bears S. 89° 57' W., 48 lks. dist.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., described in book "J" of this group.

N. 0° 11' W. on true line bet. secs. 32 and 33.

Over level land, thru scattering undergrowth.

40.10 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

	$\frac{1}{4}$	
S 32		S 33
<hr/>		
1928		

and WC on portions of brass caps toward point for cor.

80.20 Point for cor. of secs. 28, 29, 32 and 33. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 28, 29, 32 and 33, with brass caps marked

T 6	S	R 5	E
S 29		S 28	
S 32		S 33	
<hr/>			
1928			

and WC on quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

ECCCK 3846

chains	<p>From the cor. of secs. 27, 28, 33 and 34 N. 89° 36' W. on true line bet. secs. 28 and 33. Over level land, thru scattering undergrowth.</p>
39.90	<p>Old winding road, bears NE. and SW.</p>
40.19	<p>Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p>
$\begin{array}{c} \frac{1}{4} \text{ S } 28 \\ \hline \frac{1}{4} \text{ S } 33 \\ 1928 \end{array}$	
<p>and WC on portions of brass caps toward point for cor.</p>	
80.38	<p>The point for cor. of secs. 28, 29, 32 and 33.</p>
<p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite and sage.</p>	
<p>----- From the point for cor. of secs. 28, 29, 32 and 33. N. 0° 10' W. on true line bet. secs. 28 and 29. Over level land, thru scattering undergrowth.</p>	
40.10	<p>Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked</p>
$\begin{array}{c} \frac{1}{4} \\ \hline \text{S } 29 \text{ } \text{S } 28 \\ \hline 1928 \end{array}$	
<p>And WC on portions of brass caps toward point for cor.</p>	
80.20	<p>Point for cor. of secs. 20, 21, 28 and 29, falls in center line of improved road extending E. and W.</p>
<p>At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 20, 21, 28 and 29, with brass caps marked</p>	
$\begin{array}{c} \text{T } 6 \text{ S } \text{R } 5 \text{ E} \\ \hline \text{S } 20 \text{ } \text{S } 21 \\ \hline \text{S } 29 \text{ } \text{S } 28 \\ \hline 1928 \end{array}$	
<p>and WC on quadrants of brass caps toward point for cor.</p>	
<p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite and sage.</p>	

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

From the point for cor. of secs. 21, 22, 27 and 28.
S.89°51'W. on true line bet. secs. 21 and 28.
Over-level land, along center line of improved road, thru
scattering undergrowth.

39.99 Point for $\frac{1}{4}$ sec. cor., falls in center line of improved road.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$ S 21
 $\frac{1}{4}$ S 28

1928

and WC on portions of brass caps toward point for cor.

40.11 Cor. of fences extending S. and E. bears S., 41 lks. dist.

79.98 The point for cor. of secs. 20, 21, 28 and 29.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 20, 21, 28 and 29.
N.0°03'W. on true line bet. secs. 20 and 21. ($S\frac{1}{2}$)
Over-level land, thru scattering undergrowth.

40.10 The orig. $\frac{1}{4}$ sec. cor., which is the remains of a mesquite
stake 4 ins. square, 14 ins. long, lying beside a mound
of earth. Reset this stake 14 ins. in the ground, and

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass
caps marked

$\frac{1}{4}$
S 20 | S 21

1928

and WC on portions of brass caps toward the corner.

Thence, N.0°15'E. on true line bet. secs. 20 and 21. ($N\frac{1}{2}$)
Over level land, thru scattering undergrowth.

26.50 Wash, 10 lks. wide, course NW.

41.04 The orig. cor. of secs. 16, 17, 20 and 21, which is the
remains of a mesquite stake found buried in center of
a mound of earth; no scribe marks visible.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 16, 17,
20 and 21, with brass caps marked

T 6 S R 5 E
S 17 | S 16
S 20 | S 21

1928

and WC in quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S. R. 5 E.

BOOK 3848

chains	<p>From the point for cor. of secs. 15, 16, 21 and 22. S.89°45'W. on true line bet. secs. 16 and 21. (E½) Over level land, thru scattering undergrowth.</p>
39.94	<p>The orig. ¼ sec. cor., which is a mesquite stake ¼ ins. square, 18 ins. above ground and marked ¼ S on N. side. Reset this stake, which is 3 ft. long, 36 ins. in ground.</p> <p>At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in the ground for wit. cors. to ¼ sec. cor., with brass caps marked</p> $\begin{array}{c} \frac{1}{4} S 16 \\ \frac{1}{4} S 21 \\ \hline 1928 \end{array}$ <p>and WC on portions of brass caps toward the corner.</p> <p>Cor. of fences extending S. and W. bears S., 45 lks. dist.</p> <p>Thence, N.89°25'W. on true line bet. secs. 16 and 21. (W½) Over level land, thru scattering undergrowth.</p>
40.13	<p>The cor. of secs. 16, 17, 20 and 21.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite and sage.</p>

	<p>N.0°52'W. on true line bet. secs. 16 and 17. Over level land, thru scattering undergrowth.</p>
0.55	<p>Old winding road extends NW. and SE., at intersection of winding road extending E.</p>
40.21	<p>Point for ¼ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to ¼ sec. cor., with brass caps marked</p> $\begin{array}{c} \frac{1}{4} \\ S 17 S 16 \\ \hline 1928 \end{array}$ <p>and WC on portions of brass caps toward point for cor.</p>
80.42	<p>Point for cor. of secs. 8, 9, 16 and 17, determined from collateral evidence, i.e., intersection of unimproved roads extending E., W. and N., and property fence cor. to NW.</p> <p>At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 8, 9, 16 and 17, with brass caps marked</p> $\begin{array}{c} T 6 S R 5 E \\ S 8 S 9 \\ \hline S 17 S 16 \\ \hline 1928 \end{array}$ <p>and WC on quadrants of brass caps toward point for cor.</p> <p>Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite, sage.</p>

Resurvey of the Subdivisions
of
T. 6 S. R. 5 E.

chains

- From the cor. of secs. 9, 10, 15 and 16.
S. 89° 49' W. on true line bet. secs. 9 and 16.
Over level land, along dim road, thru undergrowth.
- 5.60 Intersection of unimproved road extending SE.
- 15.60 A house bears N., 2 chs. dist.
- 36.16 Cor. of fences extending N. and E. bears N., 40 lks. dist.
- 40.02 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4} \frac{S \ 9}{S \ 16}$

1928

and WC on portions of brass caps toward point for cor.

- 45.00 Intersection of dim winding road extending NW.
- 80.04 Point for cor. of secs. 8, 9, 16 and 17.
Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 8, 9, 16 and 17.
N. 0° 29' E. on true line bet. secs. 8 and 9.
Over level land, along old road, thru scattering undergrowth.

- 0.45 Cor. of fences extending N. and W. bears W., 45 lks. dist.
- 20.60 Cor. of fences extending N., S. and W. bears W., 40 lks. dist.
- 40.21 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 8 | S 9

1928

and WC on portions of brass caps toward point for cor.
Fence extending N. and S. bears W., 34 lks. dist.
Center line of old road extending N. and S. bears E., 40 lks. dist.,

- 49.60 Wash (Part of Santa Cruz Wash) 35 lks. wide, course W.
- 52.20 Wash (Part of Santa Cruz Wash) 30 lks. wide, course W.
- 80.42 The orig. cor. of secs. 4, 5, 8 and 9, which is the remains of a mesquite stake, 4 ins. square, buried under surface of old improved road extending N. and S.
At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 4, 5, 8 and 9, with brass caps marked

T 6 S R 5 E
S 5 | S 4
S 8 | S 9
1928

and WC on quadrants of brass caps toward the corner.

Land: Level. Soil: Clayloam, 1st and 2d rate.
No timber. Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6. S., R. 5.E.

BOOK 3346

chains	From the cor. of secs. 3,4,9 and 10. N:89°50'W: on true line bet. secs. 4 and 9. Over level land, thru scattering undergrowth.
25.65	Right of way fence, extends N.54°W. and S.54°E.
26.85	Telegraph and telephone lines, extend N.54°W. and S.54°E.
28.24	Southern Pacific Railroad, bears N.53°49'W. and S.53°49'E.
30.81	Right of way fence, extends N.54°W. and S.54°E.
30.95	Telephone lines, extend N.54°W. and S.54°E.
31.81	Center line of highway, bears N.54°W. to Maricopa and S.54°E. to Casa Grande.
32.51	Telephone lines, extend N.54°W. and S.54°E.
40.04	Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{\frac{1}{4} S 4}{\frac{1}{4} S 9}$ <p style="text-align: center;">1 928</p> <p>and WC on portions of brass caps toward point for cor.</p>
40.10	Cor. of fences extending N. and W. bears N., 61 lks. dist.
80.08	The por. of secs. 4,5,8 and 9. Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Mesquite, greasewood and sage.

	North, on true line bet. secs. 4 and 5. (S $\frac{1}{2}$) Over level land, along old road, thru scattering brush.
0.47	Cor. of fences extending N. and E. bears E., 50 lks. dist.
	Cor. of fences extending N., S. and W. bears W., 46 lks. dist.
32.88	Telephone lines, extend N.54°W. and S.54°E.
33.35	Highway, extends N.54°W. to Maricopa and S.54°E. to Casa Grande.
33.75	Telephone lines, extend N.54°W. and S.54°E.
35.60	Cor. of fences extending N. and S.54°E. bears E., 45 lks. dist.,
36.30	Cor. of fences extending N. and N.54°W., bears W., 45 lks. dist.,
37.79	Southern Pacific Railroad, bears N.53°49'W. and S.53°49'E., it intersection of old improved road extending N. and S.
38.80	Telegraph and telephone lines extend N.54°W. and S.54°E.
39.35	Cor. of fences extending S., N. and S.54°E. bears E., 45 lks. dist.; a house bears E., about 5 chs. dist.
40.00	The orig. $\frac{1}{4}$ sec. cor., which is the remains of a mesquite stake, 4 ins. square, buried under surface of old improved road. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{\frac{1}{4}}{S 5 S 4}$ <p style="text-align: center;">1928</p> <p>and WC on portions of brass caps toward the corner.</p>

Resurvey of the Subdivisions
of

T. 6 S., R. 5 E.

chains

Cor. of fences extending N., S. and E., bears E., 45 lks. dist.
Cor. of fences extending S. and N. 54° W. bears W., 45 lks. dist.

Thence, N. $0^{\circ}05'$ W. on true line bet. secs. 4 and 5. ($N\frac{1}{2}$)
Over level land, along old improved road, thru scattering undergrowth.

42.30

Intersect the 1st stand. par. S. at point for closing cor. of secs. 4 and 5, which point is 21 lks. W. of the stand, cor. of secs. 33 and 34, T. 5 S., R. 5 E., hereinbefore described. At point of intersection,

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground for closing cor. of secs. 4 and 5, with brass cap marked

T 5 S R 5 E
S 33
S 5 | S 4
T 6 S R 5 E
C C
1928

and deposit a marked (X) stone alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 5, 6, 31 and 32, on S. bdy. of Tp., described in book "J" of this group.

N. $0^{\circ}12'$ W. on true line bet. secs. 31 and 32. ($S\frac{1}{2}$)

Over level land, thru scattering undergrowth.

4.70

A house bears W., 3 chs. dist.

10.00

Unimproved road, extends NE. and SW.

39.87

The orig. $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins. above ground, marked $\frac{1}{4}$ S on W. side. Reset this stake, which is 2 ft. long, 24 ins. in ground,

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 31 | S 32
1928

and WC on portions of brass caps toward the corner.

S. end of fence extending N. bears W., 45 lks. dist.

Thence, N. $0^{\circ}06'$ W. on true line bet. secs. 31 and 32. ($N\frac{1}{2}$)
Over level land, thru scattering undergrowth, along W. side of unimproved road extending N. and S.

39.86

Cor. of fences extending S. and W. bears W., 10 lks. dist.

40.23

Point for cor. of secs. 29, 30, 31 and 32. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 29, 30, 31 and 32, with brass caps marked

T 6 S R 5 E
S 30 | S 29
S 31 | S 32
1928

Resurvey of the Subdivisions
of
T. 6 S. R. 5 E.

BOOK 3846

chains

and WC on quadrants of brass caps toward point for cor.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 28,29,32 and 33.
S.89°59'W. on true line bet. secs. 29 and 32.
Over level land, thru scattering undergrowth.

40.15 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\frac{\frac{1}{4} S 29}{\frac{1}{4} S 32}$$

1 928

and WC on portions of brass caps toward point for cor.

40.30 A house bears S., about 30 chs. dist.

80.30 The point for cor. of secs. 29,30,31 and 32.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 25,30,31 and 36, on W. bdy. of Tp.,
hereinbefore described.
S.89°54'E. on true line bet. secs. 30 and 31.
Over level land, thru scattering undergrowth.

39.13 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W.
and N.45°W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\frac{\frac{1}{4} S 30}{\frac{1}{4} S 31}$$

1928

and WC on portions of brass caps toward point for cor.

Cor. of fences extending E.,W.and N.bears N.,25 lks.dist.

59.87 Cross from south to north side of fence extending E. and W.

79.33 The point for cor. of secs. 29,30,31 and 32.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of

T. 6 S. R. 5 E.

chains

From point for cor. of secs. 29, 30, 31 and 32.

North on true line bet. secs. 29 and 30.

Over level land, thru scattering undergrowth, along W. side of unimproved road. The road, extending N. and S., bears E., 20 lks. dist.

30.00 Intersection of road extending NE. from road extending N. and S.

38.80 A shack bears E., 1.75 chs. dist.

40.23 Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{1}{4}$

S 30 | S 29

1928

and WC on portions of brass caps toward point for cor.

80.46 Point for cor. of secs. 19, 20, 29 and 30, determined for departure by proportional measure, and for latitude by collateral evidence, i.e., center line of improved road extending E. and W.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 19, 20, 29 and 30, with brass caps marked

T 6 S R 5 E

S 19 | S 20

S 30 | S 29

1928

and WC in quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 20, 21, 28 and 29.

N.89°52'W. on true line bet. secs. 20 and 29.

Over level land, along center line of improved road, thru scattering undergrowth.

40.05 Point for $\frac{1}{4}$ sec. cor. falls in center line of improved road.At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked $\frac{1}{4}$ S 20 $\frac{1}{4}$ S 29

1928

and WC on portions of brass caps toward point for cor.

80.10 The point for cor. of secs. 19, 20, 29 and 30.

Land: Level.

Soil: Clayloam; 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.


BOOK 3840

chains

From the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp.,
hereinbefore described.
S. 89° 57' E. on true line bet. secs. 19 and 30.
Over level land, along improved road, thru scattering
undergrowth.

15.00 E. end of fence extending W. bears N., 30 lks. dist.

39.01 Point for 1/4 sec. cor. falls in improved road. At points
N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist.,
set iron posts, each 3 ft. long 1 in. diam., 33 ins.
in ground for wit. cors. to 1/4 sec. cor., with brass
caps marked



and WC on portions of brass caps toward point for cor.

39.15 Cor. of old fences, no wire, extending S. and W. bears
S., 70 lks. dist.


79.06 The point for cor. of secs. 19, 20, 29 and 30.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 19, 20, 29 and 30.
N. 0° 10' W. on true line bet. secs. 19 and 20.
Over level land, thru scattering undergrowth.

39.69 S. end of fence extending N. bears W., 35 lks. dist.

39.99 Point for 1/4 sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
1/4 sec. cor., with brass caps marked




and WC on portions of brass caps toward point for cor.

79.52 Cor. of fences extending S. and W. bears W., 45 lks. dist.

79.98 The orig. cor. of secs. 17, 18, 19 and 20, which is the
remains of a mesquite stake 4 ins. square, 2 ins. above
ground. No scribe marks visible.

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks.
dist., set iron posts, each 3 ft. long 1 in. diam., 33
ins. in ground for wit. cors. to cor. of secs. 17, 18,
19 and 20, with brass caps marked



and WC in quadrants of brass caps toward the corner.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

44.

Resurvey of the Subdivisions
of

T. 6 S. R. 5 E.

chains

	From the cor. of secs. 16, 17, 20 and 21. S.89°22'W. on true line bet. secs. 17 and 20. Over level land, thru scattering undergrowth.
17.70	Wash, 15 lks. wide, course N.70°W.
28.00	Wash, 20 lks. wide, course NW.
40.24	Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked
	$\frac{1}{4} \begin{array}{l} S 17 \\ S 20 \end{array}$ 1928
	and WC on portions of brass caps toward point for cor.
80.48	The cor. of secs. 17, 18, 19 and 20. Land: Level. Soil: Clayloam, 1st and 2d rate. No timber. Undergrowth: Greasewood, mesquite and sage.

	From the cor. of secs. 13, 18, 19 and 24 on W. bdy. of Tp., hereinbefore described. S.89°55'E. on true line bet. secs. 18 and 19. Over level land, thru scattering undergrowth.
38.76	Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked
	$\frac{1}{4} \begin{array}{l} S 18 \\ S 19 \end{array}$ 1928
	and WC on portions of brass caps toward point for cor.
58.13	Cor. of fences extending N. and E. bears N., 50 lks. dist.
78.60	The cor. of secs. 17, 18, 19 and 20. Land: Level. Soil: Clayloam, 1st and 2d rate. Timber: None. Undergrowth: Greasewood, mesquite and sage.

	N.0°53'W. on true line bet. secs. 17 and 18. Over level land, thru scattering undergrowth.
0.45	Cor. of fences extending N. and W. bears W., 45 lks. dist.
1.50	A house bears W., $1\frac{1}{2}$ chs. dist.
40.16	Cor. of fences extending S. and W. bears W., 40 lks. dist.
40.57	Point for $\frac{1}{4}$ sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked
	$\frac{1}{4} \begin{array}{l} S 18 \\ S 17 \end{array}$ 1928
	and WC on portions of brass caps toward point for cor.

Resurvey of the Subdivisions
of

BOOK 3840

T. 6 S. R. 5 E.

chains

47.20 Wash, 30 lks. wide, course NW.

81.14 The orig. cor. of secs. 7, 8, 17 and 18, which is the remains of a mesquite stake, 4 ins. square, buried in center line of old road extending E. and W.

At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to cor. of secs. 7, 8, 17 and 18, with brass caps marked

T 6 S R 5 E
S 7 S 8
S 18 S 17
1928

and WC in quadrants of brass caps toward the corner.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

From point for cor. of secs. 8, 9, 16 and 17.
S. 89° 48' W. on true line bet. secs. 8 and 17.
Over level land, along unimproved road, thru scattering undergrowth.

- 20.50 Cor. of fences extending E., W. and N. bears N., 40 lks. dist.
- 28.50 Cor. of fences extending E., W. and N. bears N., 40 lks. dist.
- 29.70 A pumping plant bears N., 130 lks. dist.
- 30.00 A barn bears N., 3 chs. dist.
- 36.70 A house bears N., 2 chs. dist.

40.25 Point for 1/4 sec. cor. At points N.45°E., S.45°E., S.45°W. and N.45°W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to 1/4 sec. cor., with brass caps marked

1/4 S 8
S 17
1928

and WC on portions of brass caps toward point for cor.

- 40.41 Cor. of fences extending E., W. and N. bears N., 40 lks. dist.
- 45.00 A house bears S., about 30 chs. dist.
- 59.76 Cor. of fences extending E., W. and N. bears N., 40 lks. dist.
- 62.56 A house bears N., 4 1/2 chs. dist.
- 64.56 Cor. of fences extending N. and E. bears N., 40 lks. dist.

80.50 The cor. of secs. 7, 8, 17 and 18.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S., R. 5 E.

chains

From the cor. of secs. 7 and 18, only, on W. bdy. of Tp.,
hereinbefore described.
N. 89° 55' E. on true line bet. secs. 7 and 18.
Over level land, along unimproved road, thru scattering
undergrowth.

39.04 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\frac{\frac{1}{4} \text{ S } 7}{\frac{1}{4} \text{ S } 18}$$

1928

and WC on portions of brass caps toward point for cor.

79.19 The cor. of secs. 7, 8, 17 and 18.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

N. 0° 34' E. on true line bet. secs. 7 and 8.
Over level land, thru scattering undergrowth.

28.05 Cor. of fences extending N. and W. bears W., 36 lks. dist.
38.60 A house bears W., 2 $\frac{1}{2}$ chs. dist.

40.13 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W.
and N. 45° W., 64 lks. dist., set iron posts, each 3 ft.
long 1 in. diam., 33 ins. in ground for wit. cors. to
 $\frac{1}{4}$ sec. cor., with brass caps marked

$$\frac{\frac{1}{4}}{\text{S } 7 \mid \text{S } 8}$$

1928

and WC on portions of brass caps toward point for cor.

Fence extending N. and S. bears W., 36 lks. dist.

50.25 Cor. of fences extending S. and W. bears W., 36 lks. dist.
78.41 S. end of fence extending N. bears W., 65 lks. dist.

80.26 Point for cor. of secs. 5, 6, 7 and 8. At points N. 45° E.,
S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron
posts, each 3 ft. long 1 in. diam., 33 ins. in ground
for wit. cors. to cor. of secs. 5, 6, 7 and 8, with brass
caps marked

$$\begin{array}{c} \text{T } 6 \text{ S } \text{R } 5 \text{ E} \\ \text{S } 6 \mid \text{S } 5 \\ \text{S } 7 \mid \text{S } 8 \\ 1928 \end{array}$$

and WC on quadrants of brass caps toward point for cor.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

Resurvey of the Subdivisions
of
T. 6 S. R. 5 E.

chains

From the cor. of secs. 4, 5, 8 and 9.
S. 89° 43' W. on true line bet. secs. 5 and 8.
Over level land, thru scattering undergrowth.

- 20.00 Cor. of fences extending E., W. and N. bears N., 50 lks. dist.
- 39.97 Cor. of fences extending N., S. and E. bears N., 61 lks. dist.

40.21 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long $\frac{1}{2}$ in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4} \frac{S}{S} \frac{5}{8}$

1928

and WC on portions of brass caps toward point for cor.

- 69.50 Wash (Part of Santa Cruz Wash) 25 lks. wide and 8 ft. deep, course NW.
- 76.60 Wash (Part of Santa Cruz Wash) 20 lks. wide, course NW.

80.42 The point for cor. of secs. 5, 6, 7 and 8.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From the cor. of secs. 6 and 7, only, on W. bdy. of Tp., hereinbefore described.
East on true line bet. secs. 6 and 7.
Over level land, thru scattering undergrowth.

39.14 Point for $\frac{1}{4}$ sec. cor. At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4} \frac{S}{S} \frac{6}{7}$

1928

and WC on portions of brass caps toward point for cor.

79.39 The point for cor. of secs. 5, 6, 7 and 8.

Land: Level.
Soil: Clayloam, 1st and 2d rate.
No timber.
Undergrowth: Greasewood, mesquite and sage.

From the point for cor. of secs. 5, 6, 7 and 8.
N. 1° 35' E. on true line bet. secs. 5 and 6. (S $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

8.00 Santa Cruz wash, 40 lks. wide, 10 ft. deep, course NW.

40.13 The orig. $\frac{1}{4}$ sec. cor., which is a mesquite stake 4 ins. square, 12 ins. above ground, marked $\frac{1}{4}$ S on W. side.
Reset stake, which is 2 ft. long, 24 ins. in ground, and

At points N. 45° E., S. 45° E., S. 45° W. and N. 45° W., 64 lks. dist., set iron posts, each 3 ft. long 1 in. diam., 33 ins. in ground for wit. cors. to $\frac{1}{4}$ sec. cor., with brass caps marked

$\frac{1}{4}$
S 6 | S 5

1928

Resurvey of the Subdivisions
of
T. 6. S., R. 5 E.

chains

and WC on portions of brass caps toward the corner.

Cor. of fences extending S. and W. bears W., 48 lks. dist.
Cor. of fences extending N. and E. bears E., 5 chs. dist.

Thence, North, on true line, bet. secs. 5 and 6. (N $\frac{1}{2}$)
Over level land, thru scattering undergrowth.

42.68 Intersect the 1st Stand. Par. S. at point for closing cor.
of secs. 5 and 6, which point is ~~East~~, 28 lks.
dist. from the stand. cor. of secs. 32 and 33, herein-
before described. At point of intersection.

Set an iron post 3 ft. long 2 ins. diam., 35 ins. in ground
for closing cor. of secs. 5 and 6, with brass cap marked

T 5 S R 5 E
S 33
S 6 S 5
T 6 S R 5 E
C C
1928

and deposit a marked (X) stone alongside post, at base.

Land: Level.

Soil: Clayloam, 1st and 2d rate.

No timber.

Undergrowth: Greasewood, mesquite and sage.

T. 6 S., R. 5 E.

chains

The continued satisfactory adjustment of the solar apparatus of the Buff Transit No. 10125, used by Otis O. Gould, in the execution of the resurveys described in the foregoing notes is indicated from field tests of said instrument as described in book "N" of this group.

The continued satisfactory adjustment of the solar apparatus of Buff Transit No. 17992, used by Dupree R. Averill, in the execution of the resurveys described in the foregoing notes is indicated from the following field tests:

April 22, 1928: At the station and on the meridian (described on Page 1 of book "A" of this group) near the center of sec. 29, T.6 S., R.6 E., G. and S.R. base and meridian, Arizona, in latitude $32^{\circ}52\frac{1}{2}'N.$ and Longitude $111^{\circ}45'W.$,

At 9h 0m a.m., app.t., set off $32^{\circ}52\frac{1}{2}'$ on the latitude arc, $12^{\circ}17'N.$ on the declination arc, and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $12^{\circ}19'N.$, which agrees with the computed declination of the sun.

At 3h 0m p.m. app.t., with latitude arc unchanged, set off $12^{\circ}22'N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the instrument has been maintained in satisfactory adjustment.

April 22, 1928

T. 6 S. 5 E.

GENERAL DESCRIPTION

This township is situated in the valley of Santa Cruz wash, a tributary of the Gila River, and the surface is all level.

The drainage is northwesterly and southwesterly toward the Santa Cruz Wash, which has a westerly course thru the fifth tier of sections of this township.

There is no surface water in the township. There are several wells, and water is found at depths of 15 to 100 ft.

The soil is a clayloam, generally first and second rate and tillable.

There are no trees other than those few which have been planted by settlers. Undergrowth is scattering and consists of greasewood, mesquite and sage. Greasewood and mesquite are original growths, while sage is general on lands that have been cleared, then allowed to revert.

Lands under cultivation are in the initial stages of improvement, and scattering thruout the township.

Unimproved lanes follow some of the section lines; an improved road extends E. and W. along the 2d latitudinal line, and an improved highway (Spanish Old Trails) extends NW. and SE. thru the NE. portion of the township, parallel to the main line of the Southern Pacific Railroad.

There are no indications of mineral activity in the township.

CERTIFICATE OF UNITED STATES SURVEYOR.

BOOK 1040

I, Otis O. Gould U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 18th day of February, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of

the Subdivision Lines of

Township 6 South, Range 5 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Ariz. and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona
Date: May 12, 1928.

Signature of Otis O. Gould, U.S. Transitman.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

, 19

The foregoing field notes of the survey of

executed by

under his special instructions dated, 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above described surveys in, has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.

CERTIFICATE OF UNITED STATES SURVEYOR.

BOOK 3848

I, Dupree R. Averill, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer, for Group 150, Arizona bearing date of the 18th day of February, 1928, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States surveyed all those parts or portions of the First Standard Parallel South, in Ranges 5 and 6 East the West Boundary and Subdivision Lines of Township 6 South, Range 5 East of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer, for Group 150, Ariz. and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Phoenix, Arizona.

Date: May 14, 1928.

Dupree R. Averill U. S. Surveyor.

APPROVAL.

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colo., JUL 15 1929, 192

The foregoing field notes of the survey of the First Standard Parallel South thru Parts of Ranges 5 & 6 East, the West Boundary and Subdivision Lines of Township 6 South, Range 5 East of the Gila and Salt River Base and Meridian, in the State of Arizona

executed by Dupree R. Averill, U.S. Surveyor & Otis O. Gould, U.S. Transitman under special instructions dated Feb. 18, 1928 for Group 150, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U. S. Surveyor General.