

FIELD NOTES

OF THE RESURVEY OF

Gila and Salt River Base Line thru Range 2 West

WEST BOUNDARY

and

SUBDIVISION LINES

of

Township 1 South, Range 2 West

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Karl L. Siebecker, U.S. Surveyor

In the capacity of U. S. Surveyor, under ^{Supplemental} Special Instructions dated February 16, 1931, issued by the District Cadastral Engineer to govern ^{re} surveys included in Group No. 164 Arizona, which were approved by the Commissioner of the General Land Office, February 26, 1931, and Assignment Instructions dated March 4, 1931

Re-Survey commenced March 12, 1931

Re-Survey completed March 28, 1931

3930

3930


INDEX DIAGRAM.


Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
13	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Book "F"
Group 164 Arizona
INDEX DIAGRAM

BOOK 3930

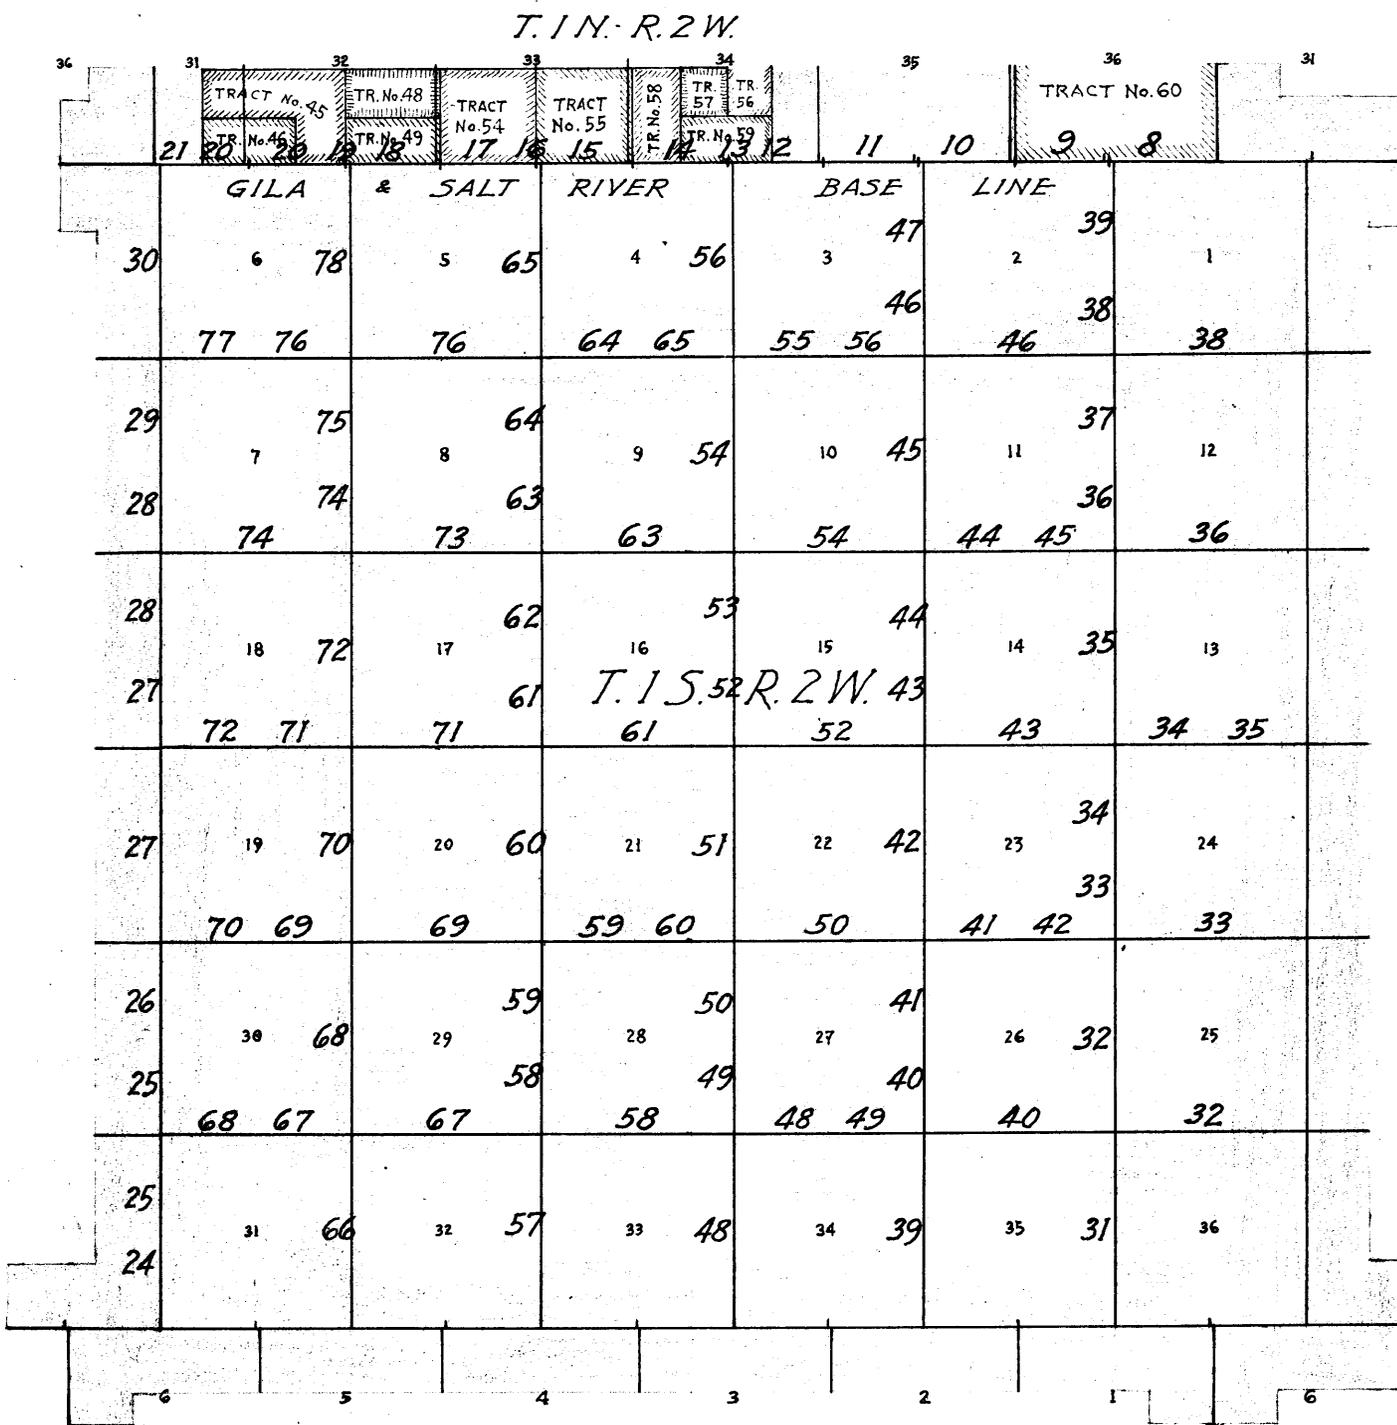

- _____ Resurveyed under this group.
- _____ Accepted, surveyed Tp. exterior and subdivision lines.
- _____ Surveyed boundaries of Private Tracts
-  TRACT No. Areas included within Private Tracts.
-  Areas surveyed as per accepted plats on file.

Book "F"
 Group 164 Arizona
 DATE DIAGRAM
 (1931)

BOOK 3930

T.I.N.-R.2W.

	31	32	33	34	35	36	
	Mar.28	March 27	March 26	March 26	March 25	March 13	Resurv. in 1913
March 28	Gila 6 March 27	and 5 March 26	Salt 4 March 26	River 3 March 25	Base 2 March 13	Line 1 March 13	
March 14	7 March 24	8 March 24	9 March 24	10 March 24	11 March 16	12 March 16	
March 14	18 March 23	17 March 23	16 March 21 T.I.S.	15 March 19 R.2W.	14 March 17	13 March 17	Resurveyed in 1913
March 14	19 March 21	20 March 21	21 March 21	22 March 19	23 March 18	24 March 18	
March 14	30 March 20	29 March 20	28 March 20	27 March 19	26 March 18	25 March 18	
March 14	31 March 20	32 March 20	33 March 20	34 March 19	35 March 18	36 March 18	

Resurveyed in 1916

Resurveyed under this group by Karl L. Siebecker, U.S. Surveyor, on dates (1931) shown thereon. Notes herein.

Accepted, surveyed lines.

The resurvey herein described were executed by Karl L. Siebecker, U.S. Surveyor, on dates shown on diagram on page 2 hereof, using a Gurley solar transit No. 20120, conforming to the standard specifications of the General Land Office. The horizontal circle has a diameter of $5\frac{3}{4}$ ins., with two double opposite verniers reading to $30''$ of arc; the vertical circle has a diameter of $4\frac{1}{2}$ ins., with one double vernier reading to single minutes of arc; the telescope has fixed stadia wires, ratio 1:32, with focal constant of 1.19 lks. The instrument is equipped with the improved Smith solar attachment; radius of latitude arc $2\frac{3}{4}$ ins., and of the declination arc 3.1 ins.; each with verniers reading to single minutes of arc.

The instrument was approved by the district cadastral engineer for the Calif.-Arizona district, at Phoenix, Arizona, February 16, 1931, subject to satisfactory field tests of same.

The directions of the lines were determined by solar transit method. The measurements were made with a Lallie steel tape, 5 chs. in length, graduated every link for the first 100 lks., and thereafter at intervals of 10 lks. The tape was tested by comparison with a Lufkin standard tape and found correct. The measurements were made on the slope, vertical angles determined by clinometer, and the slope distances properly reduced to horizontal equivalents for entry in the field notes.

The data furnished with the special instructions gives the geographic position of the SE. cor. of T.1 S., R.2 W. as in latitude $33^{\circ}17'20''$ N., longitude $112^{\circ}24'05''$ W.

March 12, 1931: examine the adjustment of the transit and correct all errors, then, to test the solar apparatus by comparing its indications, resulting from a.m. and p.m. observations, with a meridian determined by Polaris observations, proceed as follows:

At camp at the Beloit ranch, near the center of $SW\frac{1}{4}SW\frac{1}{4}$ of section 6, T.1 S., R.2 W., latitude $33^{\circ}22'$ N., longitude $112^{\circ}30\frac{1}{2}'$ W., on the meridian determined by Polaris observation at this station January 4, 1931 as described in Book "B" of this group,

At 8h.00m., a.m., app. t., set off $33^{\circ}22'$ N. on the lat. arc, $3^{\circ}30\frac{1}{2}'$ S. on the decl. arc, and orient the transit with the solar; the line of sight agrees with the true meridian.

At app. noon, with the lat. arc unchanged, observe the sun on the meridian, and obtain a reading of $3^{\circ}27'$ S. on the decl. arc, which agrees with the computed declination of the sun.

At 4h.00m., p.m., app. t., with the lat. arc unchanged, set off $3^{\circ}22\frac{1}{2}'$ S. on the decl. arc, and orient the transit with the solar; the line of sight agrees with the true meridian.

As all of the observations made during the usual hours of solar work define positions for meridian which agree within 1' with the true meridian, conclude that the instrument is in satisfactory adjustment.

Resurvey of Gila & Salt River Base Line thru Range 2 West

Chains

The Gila and Salt River Base Line thru Range 2 West was surveyed by R. C. Powers, U.S.D.S., in 1882, the record of which describes the said line as being run due West for six full miles, establishing std. $\frac{1}{2}$ sec. and sec. cors. alternately thereon, at 40 ch. intervals.

In 1907, in connection with an independent resurvey of the subdivision lines of T.1 N., R.2 W., J. W. Hesse, U.S.D.S., resurveyed the Base Line thru R.2 W. and found that the south bdy. of sec. 31 thereon was only one-half mile in length, and apparently by serious error, in the original survey, no std. $\frac{1}{2}$ sec. cor. of sec. 31 was ever established. This error extended entirely thru T.1 N., R.2 W. as evidenced by the same deficiency in measurement found in the N. bdy. of sec. 6 of said T.1 N. Surveyor Hesse reconstructed all of the existing original std. cors., or witnessed them as required, and reestablished the missing cors. by proportional measurement between the existing cors., erroneously designating each of such reconstructed or reestablished cors. as "Old Std. Cor." when the proper designation should have been "Angle Point", inasmuch as their purpose, subsequent to his resurvey, would be to control the alinement only. Surveyor Hesse reestablished all of the std. $\frac{1}{2}$ sec. and sec. cors., alternately, at 40 ch. intervals in departure, counting from the east, for the initiation of the independently resurveyed subdivision lines, and control of sectional subdivision of the south tier of sections of T.1 N., R.2 W. Surveyor Hesse executed notes and bounds surveys of twenty-four nonconforming tracts in T.1 N., R.2 W., all except one of which are located in the south two tiers of secs. The Base Line forms the south line of the boundaries of eight of said tracts, and many of the original std. cors., now angle points, also serve as tract cors., however several Tract cors. are established off the Base Line between the angle points. According to the record of the Hesse resurvey all closing cors. of the subdivision lines of T.1 S., R.2 W. were missing, as was also the closing cor. of T.1 S., R.2 and 3 W. These closing cors. were established in 1882-3 by R. C. Powers, U.S.D.S. and no reconstruction or reestablishment of any of same is of record.

No retracement or resurvey subsequent to the Hesse resurvey of the Base Line, is of record.

The following notes describe a dependent resurvey of the Base Line thru Range 2 West, primarily for the purpose of reestablishing the missing closing cors. thereon, required for resurvey of the subdivision lines of T.1 S., R.2 W.; however in addition to such closing cor. reestablishment, all existing cors. thereon are reconstructed with brass capped iron posts, and all missing std. cors., angle points, or Tract cors. are reestablished by proportional measurement, or collateral evidence, monumented in similar manner or witnessed as required. Near the reestablished std. cor. of secs. 33 and 34 the Base Line enters paved surface of U.S. Highway No. 80 and continues westerly on the pavement thru the west $2\frac{1}{2}$ miles of the line, therefore the true cor. points on such portion of the line are each marked by chiseling a cross (X) in the pavement, and two witness cors. are established outside the pavement,

Retracement for Resurvey:

From original std. cor. of T.1 N., R.1 and 2 W., and Cor. No. 1 (SE. cor.) of Tract No. 60, T.1 N., R.2 W.,

S. $89^{\circ}21' W.$, on random line, on original S. bdy. of sec. 36 (E. $\frac{1}{2}$) and line 1-5 of bdy. of Tract No. 60.

Resurvey of Gila and Salt River Base Line thru Range 2 West.

Chains	
37.40	(Record dist.) Find no trace of original closing cor. of secs. 1 and 2, T.1 S., R.2 W. Set temp. C.C. and continue line and measurement
39.83	Fall 1 lk. N. of Angle Point, and Cor.No.5 of Tract No.60, T.1 N., R.2 W. True course and dist.: - S.89°20'W., 39.83 chs. Thence N.89°53'W., on random line, on original S. bdy. of sec. 36 (W. 1/2) and line 5-4 of bdy. of Tract No.60.
1.20	Intersect the reestablished std. 1/4 sec.cor. of sec.36. Continue line and measurement
40.01	Intersect original point of location of the Angle Point, and Cor.No.4 (SW.cor.) of Tract No.60, T.1 N., R.2 W., determined by reference to record bearing tree. True course and dist.: - N.89°53'W., 40.01 chs.

	N.89°52'W., on random line, on original S. bdy. of sec. 35 (E. 1/2)
1.22	The reestablished std. cor. of secs. 35 and 36 Continue line and measurement.
37.02	(Record dist.) Find no trace of original closing cor. of secs. 2 and 3, T.1 S., R.2 W. Set temp. C.C. and continue line and measurement.
39.40	(Record dist.) Find no trace of Angle Point. Set temp. A.P.

	N.89°53'W., on random line, on original S. bdy. of sec. 35 (W. 1/2)
0.40	(Record dist.) Find no trace of witness cor. to reestablished std. 1/4 sec.cor. of sec.35. Continue line and measurement.
1.82	(Record dist.) Set temp. std. 1/4 sec.cor. of sec.35. Continue line and measurement.
34.95	Set temp. witness cor. to Angle Point.
39.80	(Record dist.) Pt. for Angle Point inside channel of Gila River.

	N.89°53'W., on random line, on original S. bdy. of sec. 34 (E. 1/2)
2.02	(Record dist.) Point for std. cor. of secs.34 and 35 in side channel of Gila River. Continue line and measurement.
12.17	Set temp. witness cor. to std. cor. of secs.34 and 35. Point at reestablished std. cor. of secs. 34 and 35.
19.88	(Record dist.) Find no trace of Cor.No.1 (SE.cor.) of Tract No.59, T.1 N., R.2 W. Set temp. cor. and continue line and measurement.
37.33	(Record dist.) Find no trace of original closing cor. of secs. 3 and 4, T.1 S., R.2 W.

Resurvey of Gila and Salt River Base Line thru Range 2 West

Chains	Set temp. C.C. and continue line and measurement.
39.80	(Record dist.) Find no trace of Angle Point. Set temp. A.P.
	Thence
	N.89°53'W., on random line, on original S. bdy. of sec. 34 (W. $\frac{1}{2}$)
2.22	(Record dist.) Find no trace of the reestablished std. $\frac{1}{4}$ sec. cor. of sec.34. Set temp. cor. and continue line and measurement.
19.92	(Record dist.) Find no trace of Cor.No.4 (SW.cor.) of Tract No.59, and Cor.No.1 (SE.cor.) of Tract No.58. Set temp. Tract cor. Continue line and measurement.
40.11	Fall 4 lks. N. of Angle Point and Cor.No.4 of Tract No.58 and Cor.No.1 of Tract No.55.
	The total west departure from Angle Point on W. $\frac{1}{2}$ of new S. bdy. of sec.36 to Angle Point on W. $\frac{1}{2}$ of new S. bdy. of sec.34 is 159.11 chs., which, to maintain record proportion between intervals, gives the east interval as 39.47 chs., and the remaining three intervals as 39.88 chs. each, for the reestablishment of the missing Angle Points. By the broken boundary method of restoration the true bearing of the east interval will be N.89°53'W., and the bearing of each of the three remaining intervals will be N.89°54'W.

	N.89°31'W., on random line, on original S. bdy. of sec. 33 (E. $\frac{1}{2}$)
1.70	Enter upon the pavement of U.S.Highway No.80.
2.42	(Record dist.) Paving has obliterated all trace of the reestablished std. cor. of secs.33 and 34, and the record accessories cannot be found. Mark a cross on pavement for temp. cor. and continue line and measurement.
37.61	(Record dist.) Find no trace of original closing cor. of secs.4 and 5, T.1 S., R.2 W. Mark cross on pavement for temp. C.C. and continue line and measurement.
40.05	Fall 2 $\frac{1}{2}$ lks. S. of point for Angle Point, and for Cor. No.4 (SW.cor.) of Tract No.55, and for Cor.No.1 (SE.cor.) of Tract No.54, determined from record ties to the witness cors.N. and S. of cor. point. True course and dist.: - N.89°29'W., 40.05 chs. Thence
	N.89°28'W., on random line, on original S. bdy. of sec.33 (W. $\frac{1}{2}$)
2.44	Fall $\frac{1}{2}$ lk. S. of point for reestablished std. $\frac{1}{4}$ sec. cor. of sec.33, determined from record ties to the witness cors. N. and S. of cor. point. Mark cross on pavement for temp. cor. and continue line and measurement.
39.91	Fall 7 lks. S. of point for reestablishment of Angle Point, determined by collateral evidence. No trace of Angle Point at record dist. of 39.94 chs.

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains	This Angle Point is also Cor.No.4 of Tract No.54 and Cor.No.1 of Tract No.49.
	True course and dist.: - N.89°22'W., 39.91 chs.

	West, on random line, on original S. bdy. of sec.32 (E.½)
2.49	(Record dist.) Find no trace of either of the two bearing trees recorded as accessories to the reestablished std. cor. of secs.32 and 33. Mark cross on pavement for temp. cor. and continue line and measurement.
37.52	(Record dist.) Find no trace of original closing cor. of secs.5 and 6, T.1 S.,R.2 W. Set temp. C.C. and Mark cross on pavement for temp. C.C. and continue line and measurement.
39.95	Fall 7 lks. No off point for reestablishment of Angle Point, Cor.No.4 of Tract No.49, and Cor.No.1 of Tract No.45, determined from collateral evidence. Find no trace at record dist. of 40.00 chs. of the witness cors. N. and S. of line recorded as witnessing the Angle Point.
	True course and dist.:* S.89°54'W., 39.95 chs.

	S.89°56'W., on random line, on original S. bdy. of sec.32 (W.½)
2.51	(Record dist.) Find no trace of the bearing tree, or the two witness cors. recorded as witnessing the reestablished std. ¼ sec. cor. of sec.32. Mark cross on the pavement for temp. cor. and continue line and measurement.
20.10	(Record dist.) Find no trace of Cor.No.8 of Tract No.45, and Cor.No.1 of Tract No.46, however, this point is in line with fence between said Tracts to the N. Mark a cross on pavement for temp. cor. and continue line and measurement.
40.05	(Record dist.) Find no trace of the witness cors. N. and S. of line recorded as witnessing the Angle Point. Mark cross on pavement for temp. A.P.

	N.89°49'W., on random line, on original S. bdy. of sec.31.
2.46	(Record dist.) Find no trace of the bearing tree, or the witness cors. N. and S. of line recorded as witnessing the reestablished std. cor. of secs.31 & 32. Mark cross on pavement for temp. cor. and continue line and measurement.
19.88	(Record dist.) Find no trace of Cor.No.5 of Tract No.46.
19.89	A point in line with N. and S. fence along W. side of Tract No.46. Mark cross on pavement for temp. cor. and continue line and measurement.
37.27	(Record dist.) Find no trace of original closing cor. of Ts.1 S.,Rs.2 and 3 W. Mark cross on pavement for temp. C.C. and continue line and measurement.
39.99	Intersect the original std. cor. of Ts.1 N.,Rs.2 & 3 W.

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains The total west departure of the Base Line from the Angle Point in new E. $\frac{1}{2}$ of S. bdy. of sec. 32 to the std. cor. of Ts. 1 N., Rs. 2 & 3 W. is 80.04 chs., which, to maintain original proportion bet. Angle Point intervals, gives 40.17 chs. for the east interval, and 39.87 chs. for the west interval, and the bearings, S. $89^{\circ}56'W.$ and N. $89^{\circ}49'W.$, respectively, apply to the true lines. The missing reestablished std. cors. are again reestablished on the Base Line by proportion bet. the Angle Points, and the missing closing cors. are reestablished in similar manner, as are also those missing Tract cors. which are not identical with Angle Points or which are not reestablished by collateral evidence.

Resurvey.

From original std. cor. of Ts. 1 N., Rs. 1 & 2 W., which is a granite stone, 10x7x7 ins. above ground, firmly set, mkd. and witnessed as described in the official record (Also Cor. No. 1 of Tract No. 60, T. 1 N., R. 2 W.) S. $89^{\circ}20'W.$; on true line, on ~~new~~ S. bdy. of sec. 36. (E. $\frac{1}{2}$) Along line 1-5 of bdy. of Tract No. 60. Over broken and rolling foothills, along a northerly slope, thru scattering timber and undergrowth.

- 5.45 Wash, 40 lks. wide, course NW.
11.75 Wash, 10 lks. wide, course N. Asc. 50 ft.
23.15 Spur, slopes N. Desc. 40 ft. over broken land.
28.25 Spur, slopes NW. Desc. 120 ft.
37.44 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for reestablished closing cor. of secs. 1 and 2, T. 1 S., R. 2 W., with brass cap mkd.

T1N R2W

S36

S2	S1
T1S	R2W
C	C

1931

from which

a paloverde, 6 ins. diam., bears S. $65^{\circ}E.$, 126 lks. dist., mkd. T1S R2W S1 CC BT

a paloverde, 6 ins. diam., bears S. $38\frac{1}{4}^{\circ}W.$, 188 lks. dist., mkd. T1S R2W S2 CC BT

Desc. 30 ft. to

- 39.83 Intersect Angle Point, which is a granite stone 6x10x6 ins. above ground, firmly set, mkd. OLD SC on N. face, and witnessed by a mound of stone N. No bearing trees. Reconstruct this A.P. monument as follows: alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, over a cross mkd. thereon, and raise a mound of stone, 4 ft. base, around post, for Angle Point, with brass cap mkd.

A P

1931

This is also Cor. No. 5 of Tract No. 60, T. 1 N., R. 2 W. Thence

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains	N.89°53'W., on true line, continuing measurement of E. 1/2 of S. bdy. of sec. 36. Along line 5-4 of bdy. of Tract No.60 Desc. 15 ft. over W. slope to
41.03	Intersect the previously reestablished std. 1/4 sec. cor. of sec. 36, which is a granite stone 4x8x11 ins. above ground, firmly set, mkd. 1/4 06 SC on N. face, and witnessed by a mound of stone N. No bearing trees. Reconstruct this cor. monument as follows: alongside the stone, set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, over a cross mkd. thereon, and raise a mound of stone around post, for reestablished std. 1/4 sec. cor. of sec. 36, with brass cap mkd. <u>SC 1/4 S36</u> 1931 from which a paloverde, 6 ins. diam., brs. N.34°E., 209 lks. dist., mkd. SC 1/4 S36 BT a paloverde, 5 ins. diam., brs. N.36 1/2°W., 137 lks. dist., mkd. SC 1/4 S36 BT Thence N.89°53'W., on true line; on new S. bdy. of sec. 36 (W. 1/2) Along line 5-4 of bdy. of Tract No.60. Over rolling land, thru scattering timber and patches of dense undergrowth. Desc. 230 ft. over W. slope to
21.10	Foot of slope, leave rolling, and enter level, open overflow land, bears NE. and SW.
37.30	Road; bears NW. across Gila River, and SE. to ranch house.
37.77	Ranch house brs. S.23 1/4°E. about 12 chs. dist.; well brs. S.45°E. about 15 chs. dist.; and an old deserted ranch house brs. S.33 1/4°W. about 1/2 mile dist.
38.81	(40.01 chs. N.89°53'W. from A.P.) Intersect point of original location of Angle Point, and Cor. No. 4 (SW. cor.) of Tract No. 60, T.1 N., R.2 W., as determined from the original bearing tree: a mesquite, 30 ins. diam., N.8°W., 28 lks. dist., mkd. SC T1N R2W S36 BT Reconstruct this cor. monument as follows: at original cor. point, set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for Angle Point, and Cor. No. 4 of Tract No. 60, T.1 N., R.2 W., with brass cap mkd. <u>A P</u> 1931 No other bearing tree available. Leave bdy. of Tract No. 60 and continue line and measurement.
38.98	Fence, bears N. and S.
40.03	(1.22 chs. N.89°53'W. from A.P.) Intersect the previously reestablished std. cor. of secs. 35 and 36, which is a granite stone 6x6x6 ins. above ground, firmly set, mkd SC 06 on N. face, 5 notches on W. face, and 1 notch

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains

on E. face, and witnessed by one bearing tree:
 a mesquite, 30 ins. diam., N. $76\frac{1}{2}^{\circ}$ E., 122 lks. dist.,
 mkd. SC T1N R2W S36 BT

Reconstruct this cor. monument as follows:

alongside the stone, set an iron post, 3 ft. long, 2 ins.
 in diam., 26 ins. in the ground, for reestablished std.
 cor. of secs. 35 and 36, with brass cap mkd.

SC

T1N	R2W
S35	S36

1931

No other bearing trees available.

Dig pits, 18x18x12 ins., E., W., and N. of cor., 3 ft. dist.

Land, broken, rolling and level.

Soil, rocky and sandy, 4th and 3rd rate.

Timber, mesquite and paloverde.

Undergrowth, same, with greasewood, and sagebrush.

N. $89^{\circ}53'W.$, on true line, on ~~new~~ S. bdy. of sec. 35 (E. $\frac{1}{2}$)Over level overflow land, in cultivated field, parallel
to fence about 20 lks. S. of line.16.64 Fence, bears NW. and SE. Leave field, and enter dense
undergrowth, and second growth timber.

20.90 Fence, bears NE. and SW.

21.90 Left bank of Gila River, bears NE. and SW.
Thence over river bed.29.50 Left edge of water channel, bears NE. and SW.
Thence across water surface of Gila River, course SW.33.06 Right edge of water channel, bears NE. and SW.
Leave water. Thence over dry river bed.35.90 (Proportional dist. bet. A.P.s) Set an iron post, 3 ft.
long, 2 ins. in diam., 28 ins. in the ground, for
reestablished closing cor. of secs. 2 and 3, T.1 S.,
R.2 W., with brass cap mkd.

T1N R2W

S35

S3	S2
T1S	R2W

C C

1931

from which

a cottonwood, 3 ins. diam., brs. S. $80\frac{1}{2}^{\circ}$ E., 115 lks.
 dist., mkd. BT only.

No other bearing tree available.

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

38.25 (39.47 chs. N. $89^{\circ}53'W.$ from A.P.) Set an iron post, 3 ft.
long, 1 in. in diam., 28 ins. in the ground, for reestab-
lished Angle Point, with brass cap mkd.

A P

1931

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains

from which

a cottonwood, 3 ins.diam., brs. S.73°E., 65 lks. dist., mkd. BT only

No other bearing tree available.

Dig pits, 18x18x12 ins., E. & W. of cor. 3 ft. dist.

Thence

N.89°54'W., on true line, continuing measurement of the ~~new~~ E. 1/2 of S. bdy. of sec.35.

Over level river bottom, mostly overflow land, thru dense undergrowth.

40.07 (1.82 chs.N.89°54'W. from A.P.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins.in the ground, for reestablished std. 1/4 sec.cor. of sec.35, with brass cap mkd.

SC
1/4 S 35

1931

from which

a cottonwood, 8 ins.diam., brs. N.23°40'E., 210 lks. dist., mkd. SC 1/4 S35 BT

No other bearing tree available.

Raise a mound of stone, 3 ft.base, 2 ft.high, N.of cor.

Thence

N.89°54'W., on true line, on new W. 1/2 of S.bdy. of sec.35.

Over level river bottom, thru dense undergrowth.

9.62 Center of a side channel of the Gila River, with a stream of water, 150 lks.wide, 3 ft.deep, course NW.

33.06 (5.00 chs. S.89°54'E. from true point) Set an iron post, 3 ft.long, 1 in.in diam., 28 ins.in the ground, for witness cor. to reestablished Angle Point, with brass cap mkd.

A P
WC ←

1931

No bearing trees available.

Raise a mound of stone, 3 ft.base, 2 ft.high, N. of cor.

33.62 Left edge of side channel of Gila River, brs. NE. & SW. Thence across stream of water about 200 lks.wide, 3 ft. deep, course W. from NE.

38.06 (Proportional dist. of 39.88 chs.N.89°54'W. from A.P.) True point for reestablishment of Angle Point falls in stream of water of side channel of Gila River, where the Angle Point cannot be monumented, therefore witness cor. is established on line at 5.00 chs.S.89°54'E.

Continue line and measurement

40.09 (Proportional dist.) True point for reestablishment of

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains	<p>the std. cor. of secs. 34 and 35 falls in stream of water of side channel of the Gila River, where it is impracticable to establish cor. monument, therefore establish witness cor. at 10.00 chs. N. 89° 54' W. as hereinafter described.</p> <p>Land, level river bottom and channels. Soil, sandy and rocky, 3rd rate. Timber, cottonwood and willow. Undergrowth, willow and tamarack.</p>								
	<p>From true point for reestablished std. cor. of secs. 34 and 35,</p>								
	<p>N. 89° 54' W., on true line, on new S. bdy. of sec. 34 (E. $\frac{1}{2}$)</p>								
	<p>Over stream of water in side channel of Gila River.</p>								
6.00	<p>Road, bearing N. and S., fords the Gila River. The side channel turns from a west to a SW. course.</p>								
9.38	<p>Right edge of side channel of Gila River, brs. NE. & SW. Leave river channel. Thence over level bottom land subject to overflow.</p>								
10.00	<p>Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for witness cor. to reestablished std. cor. of secs. 34 and 35, with brass cap mkd.</p>								
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">SC</td> </tr> <tr> <td style="text-align: center;">TLN</td> <td style="text-align: center;">R2W</td> </tr> <tr> <td style="text-align: center;">S34</td> <td style="text-align: center;">S35</td> </tr> <tr> <td colspan="2" style="text-align: center;">WC</td> </tr> </table>	SC		TLN	R2W	S34	S35	WC	
SC									
TLN	R2W								
S34	S35								
WC									
	<p style="text-align: center;">1931</p> <p style="text-align: right;">from which</p>								
	<p>a black willow, 6 ins. diam., brs. N. 10$\frac{1}{2}$° E., 371 lks. dist., mkd. TLN R2W S34 SC WC BT</p>								
	<p>a cottonwood, 8 ins. diam., brs. N. 38° W., 282 lks. dist., mkd. TLN R2W S34 SC WC BT</p>								
10.50	<p>Enter dense undergrowth, brs. NE. and SW.</p>								
14.00	<p>Enter scattering timber, and continue thru dense undergrowth.</p>								
17.85	<p>(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished Cor. No. 1 (SE. cor.) of Tract No. 59, T. 1 N., R. 2 W., with brass cap mkd.</p>								
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">COR 1</td> </tr> <tr> <td style="text-align: center;">TR 59</td> </tr> </table>	COR 1	TR 59						
COR 1									
TR 59									
	<p style="text-align: center;">1931</p> <p style="text-align: right;">from which</p>								
	<p>a tamarack, 3 ins. diam., brs. N. 9$\frac{1}{4}$° W., 43 lks. dist., mkd. BT only.</p>								
	<p>a tamarack, 2 ins. diam., brs. N. 4$\frac{3}{4}$° W., 44 lks. dist., mkd. BT only.</p>								
	<p>Continue line and measurement. Along line 1-4 of bdy. of Tract No. 59, T. 1 N., R. 2 W.</p>								
30.47	<p>Leave dense undergrowth, brs. NW. and SE., and continue</p>								

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains thru scattering timber.

35.37 (Proportional dist.) Set an iron post, 3 ft.long, 2 ins. in diam., 28 ins. in the ground, for reestablished closing cor. of secs.3 and 4, T.1 S.,R.2 W., with brass cap mkd.

T1N R2W
S34

S4 | S3
T1S | R2W
C | C

1931

from which

a cottonwood, 5 ins.diam., brs. S.9°E., 290 lks. dist., mkd. T1S R2W S3 CC BT

a cottonwood, 12 ins.diam., brs. S.44¼°W., 324 lks. dist., mkd. T1S R2W S4 CC BT

37.85 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 28 ins.in the ground, for reestablished Angle Point, with brass cap mkd.

A P

1931

No bearing trees available.

Raise a mound of stone, 3 ft.base, 2 ft.high, N.of cor.

Continue line and measurement.

Along line 1-4 of Tract No.59, T.1 N.,R.2 W.

40.08 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 28 ins.in the ground, for reestablished std. ¼ sec.cor. of sec.34, with brass cap mkd.

SC
¼ S 34

1931

from which

a cottonwood, 10 ins.diam., brs. N.33¼°E., 333 lks. dist., mkd. SC ¼ S34 BT

a cottonwood, 12 ins.diam., brs. N.8¼°W., 48 lks. dist., mkd. SC ¼ S34 BT

Thence

N.89°54'W., on true line, on ~~new~~ S. bdy. of sec.34 (W.½)

Over level river bottom, thru scattering timber and undergrowth. Along line 1-4 of Tract No.59, T.1 N.,R.2W.

17.69 (Proportional dist.) Set an iron post, 3 ft.long, 1 in. in diam., 28 ins. in the ground, for reestablished Cor.No.4 (SW.cor.) of Tract No.59, and Cor.No.1 (SE.cor.) of Tract No.58, with brass cap mkd.

COR 1 | COR 4
TR 58 | TR 59

1931

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains	from which				
	a cottonwood, 4 ins.diam., brs. N.24°E., 67 lks. dist., mkd. BT only.				
	a cottonwood, 4 ins.diam., brs. N.17½°W., 64 lks. dist., mkd. BT only.				
	Continue line and measurement. Along line 1-4 of bdy. of Tract No.58, T.1 N.,R.2 W.				
30.12	Irrigation ditch, 15 ft.wide, 4 ft.deep, course SW.				
31.17	Right bank of Gila River, bears NE. and SW., 20 ft.high. Leave bottom land. Continue over level land, thru scattering timber and undergrowth.				
32.02	Fence, brs. NE. and SW. Thence along edge of cultivated field				
37.16	Fence, brs. N. and S.				
37.22	Irrigation ditch, course S.				
37.65	Intersect Angle Point, Cor.No.4 (SW.cor.) of Tract No.58 and Cor.No.1 of Tract No.55, which is a granite stone buried below surface of the ground, mkd. with a cross (X) on top, OLD SC on N. face, and 3 notches on each of E. and W. faces, and witnessed by: stub of iron telephone pole, 2 ins.diam., N.59°26'E., 77 lks. dist., mkd. BO No trace of the record NW. pole can be found. Reconstruct this cor.monument as follows: alongside the stone, set an iron post, 3 ft.long, 1 in. in diam., 28 ins.in the ground, for Angle Point, Cor. No.4 of Tract No.58, and Cor.No.1 of Tract No.55, with brass cap mkd.				
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">COR 1</td> <td style="padding: 2px;">COR 4</td> </tr> <tr> <td style="padding: 2px;">TR 55</td> <td style="padding: 2px;">TR 58</td> </tr> </table> <p style="text-align: center;">A P</p> <p style="text-align: center;">1931</p>	COR 1	COR 4	TR 55	TR 58
COR 1	COR 4				
TR 55	TR 58				
	from which				
	a cottonwood, 25 ins. diam., brs. N.34½°W., 75 lks. dist., mkd. COR 1 TR 55 AP BT				
	No other bearing trees available.				
	This cor. is just S. of curve in paved U.S.Highway No.80, extending W. and N. from said curve.				
	Thence				
	N.89°29'W., on true line, continuing measurement of the new W.½ of S. bdy. of sec.34. Along line 1-4 of Tract No.55, T.1 N.,R.2 W.				
39.35	Enter pavement of U.S.Highway No.80, extending West from this point. Thence over pavement thru the remainder of Range 2 West.				
40.07	(Proportional dist.) Chisel a 2 in. cross (+) in pavement at this point, for reestablished std. cor. of secs. 33 and 34, with two witness cors. established hereto as follows: at a point North, 50 lks. dist., set an iron post, 3 ft.long, 1 in.in diam., 28 ins.in				

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains the ground, with brass cap mkd.

SC	
T1N	R2W
S33	S34
WC	

1931

at a point N.45°W., 72 lks. dist.,
set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground, with brass cap mkd.

SC	
T1N	R2W
S33	S34
WC	

1931

Land, level.
Soil, sandy, 1st and 2nd rate.
Timber, cottonwood, and mesquite.
Undergrowth, willow.

N.89°29'W., on true line, on ~~new~~ S. bdy. of sec. 33 (E. 2)

Over level land, on pavement of U.S. Highway No. 80.
Along line 1-4 of Tract No. 55, T.1 N., R.2 W.

35.25 (Proportional dist.) Chisel a 2 in. cross (+) in pavement
at this point, for reestablished closing cor. of secs.
4 and 5, T.1 S., R.2 W., and establish two witness cors.
to same as follows:

at a point S.45°E., 64 lks. dist.,
set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground, with brass cap mkd.

WC	
T1N R2W	
S33	
S5	S4
T1S	R2W
C	C

1931

at a point S.45°W., 61 lks. dist.,
set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground, with brass cap mkd.

WC	
T1N R2W	
S33	
S5	S4
T1S	R2W
C	C

1931

37.63 (40.05 chs. N.89°29'W. from A.P.) Intersect point for
Angle Point, Cor. No. 4 (SW. cor.) of Tract No. 55, and
Cor. No. 1 (SE. cor.) of Tract No. 54, determined from
the two witness cors., N. and S. of point 40 lks. dist.
Each of said witness cors. is a granite stone, 6x6x14
ins. above ground, firmly set, and mkd. as described in
the official record.

Resurvey of the Gila and Salt River Base Line thru Range 2 West.

- Chains Find no trace of the record NW. bearing tree.
- Reconstruct this Angle Point and Tract Cor. as follows:
 at cor. point chisel a cross (+) in pavement, and establish additional witness cors.:
- at a point N.45°E., 70 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.
- | | |
|-------|-------|
| COR 1 | COR 4 |
| TR 54 | TR 55 |
| AP | |
| WC | |
| 1931 | |
- at a point N.45°W., 71 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.
- | | |
|-------|-------|
| COR 1 | COR 4 |
| TR 54 | TR 55 |
| AP | |
| WC | |
| 1931 | |
- Thence
- N.89°22'W., on true line, continuing measurement of ~~new~~ E. $\frac{1}{4}$ of S. bdy. of sec. 33.
 Along line 1-4 of tract No. 54, T.1 N., R.2 W.
- 40.07 Intersect the point for reestablished std. $\frac{1}{4}$ sec. cor. of sec. 33, determined from the two witness cors. N. and S. of point 40 lks. dist.
 Each of said witness cors. is a granite stone 5x6x12 ins. above ground, firmly set, and mkd. as described in the official record.
- Reconstruct this cor. monument as follows:
 at cor. point chisel a 2 in. cross (+) in pavement, and establish additional witness cors.:
- at a point N.45°E., 70 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.
- | |
|--------------------|
| SC |
| $\frac{1}{4}$ S 33 |
| WC |
| 1931 |
- at a point N.45°W., 70 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.
- | |
|--------------------|
| SC |
| $\frac{1}{4}$ S 33 |
| WC |
| 1931 |
- From reestablished std. $\frac{1}{4}$ sec. cor. of sec. 33, N.89°22'W., on true line, on ~~new~~ S. bdy. of sec. 33. (W. $\frac{1}{4}$)
 Over pavement of U.S. Highway No. 80, along line 1-4 of tract No. 54, T.1 N., R.2 W.
- 35.19 Road extends S. from highway at this point.
- 37.47 (39.91 chs. N.89°22'W. from A.P.) Intersect point for

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains

reestablishment of Angle Point, Cor.No.4 (SW.cor.) of Tract No.54, and cor.No.1 (SE.cor.) of Tract No.49, determined by collateral evidence of center line of road extending N., fence corners, and extensively improved property using this point as the cor., and further substantiated by statements of the abutting property owners.

Reestablish the Angle Point and Tract cor. at this point as follows:

chisel a 2 in. cross (+) in pavement, and establish two witness cors.:

at a point N.45°E., 68 lks. dist., set an iron post, 3 ft.long, 1 in.diam., 28 ins. in the ground, with brass cap mkd.

COR 1 | COR 4
TR 49 | TR 54

AP

WC

1931

at a point N.45°W., 58 lks. dist., set an iron post, 3 ft.long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

COR 1 | COR 4
TR 49 | TR 54

AP

WC

1931

Thence

S.89°54'W., on true line, continuing measurement of ~~from~~ S. bdy. of sec.33 (W. 1/4)

Over pavement of U.S.Highway No.80, along line 1-4 of Tract No.49

39.96 (Proportional dist.) Chisel a 2 in. cross (+) in pavement for reestablished std. cor. of secs.32 and 33, and establish two witness cors. as follows:

at a point N.45°E., 65 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

SC
T1N | R2W
S32 | S33

WC

1931

at a point N.45°W., 64 lks. dist., set an iron post, 3 ft.long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

SC
T1N | R2W
S32 | S33

WC

1931

Land, level.

Soil, sandy clay loam, 1st rate.

Timber, artificially planted cottonwood and orchards near the ranch houses.

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains Undergrowth, none.

S.89°54'W., on true line, on ~~same~~ S. bdy. of sec. 32 (E. #)

Over paved U.S. Highway No. 80, along line 1-4 of Tract No. 49, T.1 N., R.2 W.

35.01 (Proportional dist.) Chisel a 2 in. cross (+) in pavement for reestablished closing cor. of secs. 5 and 6, T.1 S., R.2 W., and establish two witness cors. as follows:

at a point S.45°E., 65 lks. dist., set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with brass cap mkd.

WC
S6 | S5
T1S | R2W
C | C

1931

at a point S.45°W., 65 lks. dist., set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with brass cap mkd.

WC
S6 | S5
T1S | R2W
C | C

1931

Continue line and measurement. Along line 1-4 of Tract No. 49, T.1 N., R.2 W.

37.46 (39.95 chs. S.89°54'W. from A.P.) Intersect point for reestablishment of Angle Point, Cor. No. 4 (SW. cor.) of Tract No. 49, and Cor. No. 1 (SE. cor.) of Tract No. 45, determined from collateral evidence of center line of road extending N., fence corners, extensively improved property in town of Liberty, Ariz., and statements of owners of abutting property.

Chisel a 2 in. cross (+) in pavement at this point, for reestablished angle point and tract cor., and establish two witness cors.:

at a point N.45°E., 67 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

COR 1 | COR 4
TR 45 | TR 49

AP

WC

1931

at a point N.45°W., 67 lks. dist., set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

COR 1 | COR 4
TR 45 | TR 49

AP

WC

1931

Thence

Resurvey of Gila and Salt River Base Line thru Range 2 West

Chains S.89°56'W., on true line, continuing measurement of ~~the~~ S. bdy. of sec.32 (E.½)
Along line 1-8 of Tract No.45, T.1 N.,R.2 W.

39.98 (Proportional dist.) Chisel a 2 in. cross (+) in pavement for reestablished std. ¼ sec.cor. of sec.32, and establish two witness cors.:

at a point N.45°E., 63 lks. dist.,
set an iron post, 3 ft.long, 1 in. diam.,28 ins. in the ground, with brass cap mkd.

SC
¼ S 32

WC
1931

at a point N.45°W., 63 lks. dist.,
set an iron post, 3 ft.long, 1 in. diam.,28 ins. in the ground, with brass cap mkd.

SC
¼ S 32

WC
1931

Thence

S.89°56'W., on true line, on ~~the~~ S. bdy. of sec.32 (W.½)

Over pavement of U.S.Highway No.80, along line 1-8 of Tract No.45, T.1 N.,R.2 W.

17.58 (20.10 chs.S.89°56'W. from A.P.) The point for reestablishment of Cor.No.8 of Tract No.45, and Cor.No.1 of Tract No.46, determined by collateral evidence of fence extending N. between said tracts.
Chisel a 2 in. cross (+) in pavement at this point and establish two witness cors.:

at a point N.44°20'E., 63 lks. dist.,
set an iron post, 3 ft.long, 1 in. diam., 28 ins. in the ground, with brass cap mkd.

COR 1 | COR 8
TR 46 | TR 45

WC
1931

at a point N.44°20'W., 82 lks. dist.,
set an iron post, 3 ft.long, 1 in. diam.,32 ins. in the ground, with brass cap mkd.

COR 1 | COR 8
TR 46 | TR 45

WC
1931

Continue line and measurement
Along line 1-5 of bdy. of Tract No.46, T.1 N.,R.2 W.

37.65 (Proportional dist. of 40.17 chs.S.89°56'W. from A.P.) Chisel a 2 in. cross (+) in pavement at this point, for reestablished Angle Point, and establish two witness cors.:

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains

at a point N.45°E., 49 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, with brass cap mkd.

A P

WC

1931

at a point N.45°W., 50 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, with brass cap mkd.

A P

WC

1931

Thence

N.89°49'W., on true line, continuing measurement of W. 1/2
of ~~new~~ S. bdy. of sec. 32.
Along line 1-5 of Tract No. 46, T.1 N., R.2 W.

40.12 Proportional dist.) Chisel a 2 in. cross (+) in pavement
for reestablished std. cor. of secs. 31 and 32, and
establish two witness cors.:

at a point N.45°E., 50 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, with brass cap mkd.

SC

T1N	R2W
S31	S32

WC

1931

at a point N.45°W., 51 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, with brass cap mkd.

SC

T1N	R2W
S31	S32

WC

1931

Land, level.
Soil, clay loam, 1st rate.
Timber, artificially planted cottonwoods, and orchards.
Undergrowth, none.

N.89°49'W., on true line, on ~~new~~ S. bdy. of sec. 31.

Over pavement of U.S. Highway No. 80, along line 1-5 of
bdy. of Tract No. 46, T.1 N., R.2 W.

17.30 Point for reestablishment of Cor. No. 5 of Tract No. 46,
determined by collateral evidence of a fence extending
N. along W. side of said tract.
Chisel a 2 in. cross (+) in pavement at this point, and
establish two witness cors.:

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains

at a point N.45°E., 62 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, with brass cap mkd.

COR 5
TR 46

WC
1931

at a point N.45°W., 62 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, with brass cap mkd.

COR 5
TR 46

WC
1931

Leave Tracts, and continue line and measurement.

34.91 (Proportional dist.) Chisel a cross (+) in pavement for
reestablished closing cor. of Ts.1 S., Rs.2 and 3 W.,
and establish two witness cors.:

at a point S.45°E., 88 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, with brass cap mkd.

WC
TLN R2W
S31

S1 S6
R3W R2W
C C
T1S

1931

at a point S.45°W., 32 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, with brass cap mkd.

WC
TLN R2W
S31

S1 S6
R3W R2W
C C
T1S

1931

Continue line and measurement.

37.40 (39.87 chs. N.89°49'W. from A.P.) Intersect the std. cor.
of Ts.1 N., Rs.2 and 3 W., which is an iron pipe, 1 in.
diam., filled with lead, the top set flush with the
surface of the pavement in U.S. Highway No. 80. A road
extends N. from highway at this point.

Chisel a 3 in. cross (+) in pavement with the iron
pipe in its center, and establish two witness cors.:

at a point N.45°E., 89 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, with brass cap mkd.

WC
TLN R2W
S31

S1 S6
R3W R2W
C C
T1S

Resurvey of the Gila and Salt River Base Line thru Range 2 West

Chains

SC	
TLN	
R3W	R2W
S36	S31


WC
1931

at a point N.45°W., 89 lks. dist.,
set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, with brass cap mkd.

SC	
TLN	
R3W	R2W
S36	S31

WC
1931

Land, level.
Soil, sandy clay loam, 1st rate.
Timber, none.
Undergrowth, none.

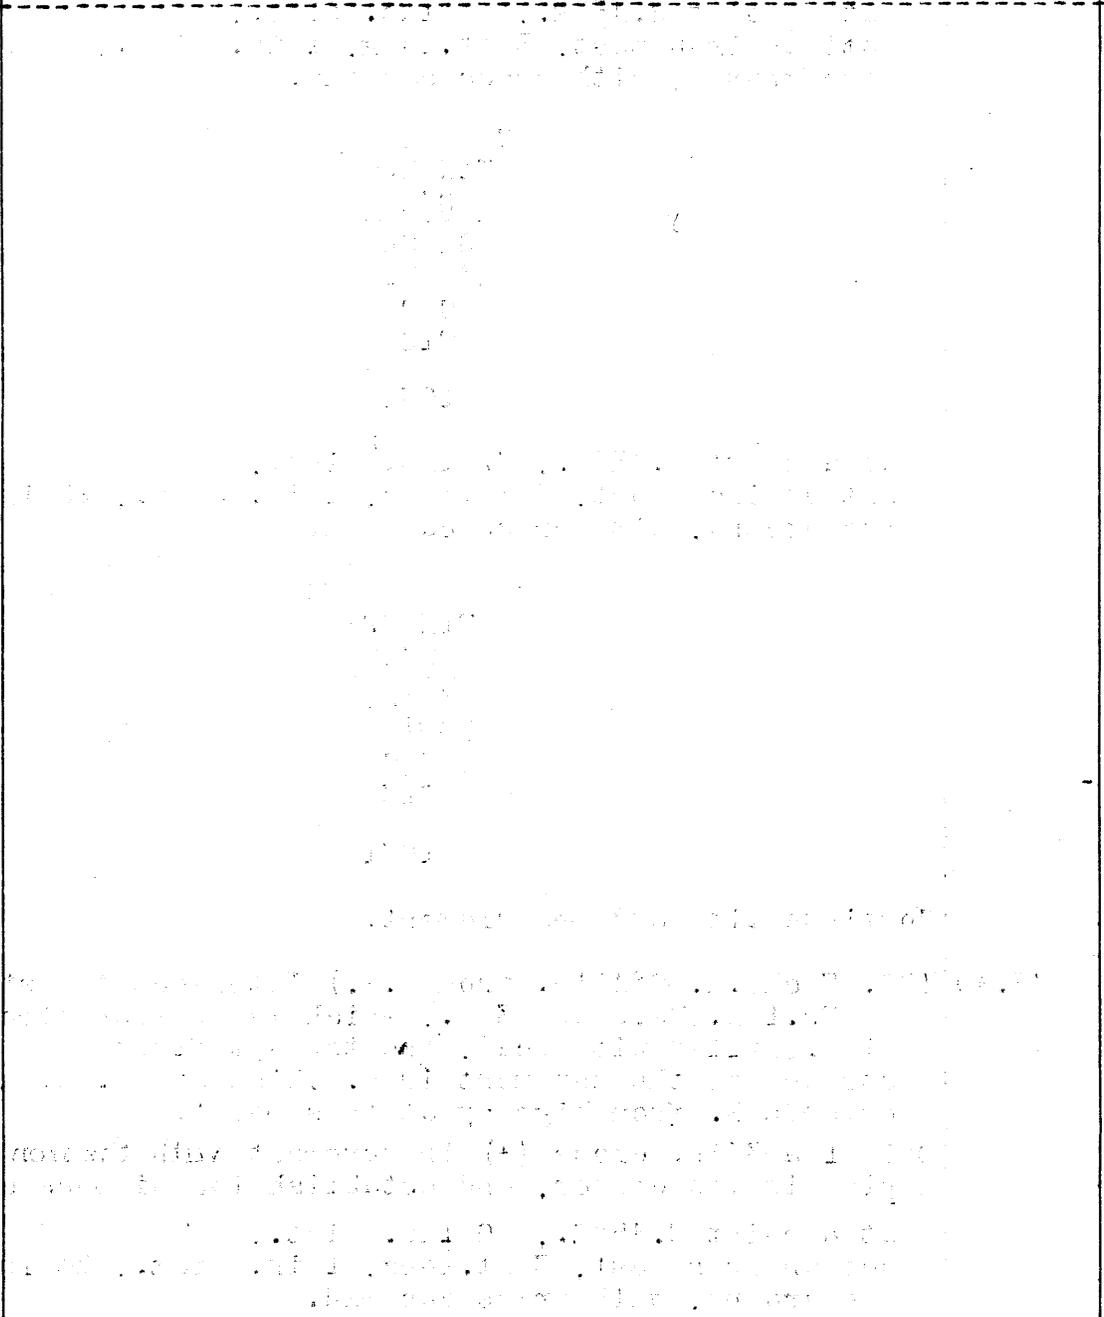

Resurvey of the West Boundary of Township 1 South, Range 2 West

Chains The west boundary of T.1 S., R.2 W. was surveyed due north, by R.C. Powers, U.S.D.S. in 1882, establishing common reference corners thereon at 40 ch. intervals, and establishing a closing cor. of Ts.1 S., Rs.2 and 3 W. at point of intersection with the Gila and Salt River Base Line. The cor. of Ts.1 and 2 S., Rs.2 and 3 W. was established by same surveyor in same year.

No retracement or resurvey of any part of this Tp. bdy. is of record.

The cor. of Ts.1 and 2 S., Rs.2 and 3 W. was reconstructed in 1916 with a brass capped iron post, marked and witnessed to refer to Ts. 1 S. only.

The closing cor. of Ts.1 S., Rs.2 and 3 W., on the Gila and Salt River Base Line was reestablished by proportion in connection with the Base Line resurvey as hereinbefore described.

The following notes describe a dependent resurvey of the entire Tp. bdy., retaining the original reference of all corners, reconstructing all existing cors. with brass capped iron posts, and reestablishing all missing cors. at proportional intervals between existing cors.

Retracement for Resurvey.

From the reestablished closing cor. of Ts.1 S., Rs.2 and 3 W., on the Gila and Salt River Base Line, hereinbefore described,

South, on random line, making search at record intervals for the original cors., and setting temp. cors. at such intervals. Fail to find a trace of any original cor. until at

160.50 Fall 4.39 chs. E. of original cor. of secs.7,12,13 & 18.
True course and dist. of the Tp. bdy. from said sec.cor. to the Tp. C.C. are therefore N.1°34'E., 160.56 chs., which, to maintain original proportion between cor. intervals thereon, gives four intervals of 40.14 chs. each, for the reestablishment of the missing cors.

From original cor. of secs.7,12,13 and 18,
South, on random line, bet. secs.13 and 18.

40.00 Find no trace of original 1/4 sec. cor.
Set temp. cor. and continue line and measurement.

79.74 Fall 1.18 chs. W. of original cor. of secs.13,18,19 & 24.
True course and dist. of Tp. bdy. bet. secs.13 and 18 are therefore, N.0°51'W., 79.74 chs.

From original cor. of secs.13,18,19 and 24,
South, on random line, bet. secs.19 and 24.

40.00 Find no trace of original 1/4 sec. cor.
Set temp. cor. and continue line and measurement.

80.00 Fall 7 lks. W. of original cor. of secs.19,24,25 & 30.

Resurvey of West Boundary of Township 1 South, Range 2 West

Chains	True course and dist. of Tp. bdy. bet. secs. 19 and 24 are therefore N.0°03'W., 80.00 chs.
40.01	From original cor. of secs. 19, 24, 25, and 30, South, on random line, bet. secs. 25 and 30 (N. 1/2) Fall 20 lks. W. of original 1/4 sec. cor.
40.02	True course and dist.: - N.0°17'W., 40.01 chs. Thence South, on random line, bet. secs. 25 and 30 (S. 1/2) Fall 6 lks. E. of original cor. of secs. 25, 30, 31 & 36.
39.99	True course and dist.: - N.0°05'E., 40.02 chs. From original cor. of secs. 25, 30, 31 and 36 South, on random line, bet. secs. 31 and 36 (N. 1/2) Fall 51 lks. E. of original 1/4 sec. cor.
39.97	True course and dist.: - N.0°44'E., 39.99 chs. Thence South, on random line, bet. secs. 31 and 36 (S. 1/2) Fall 17 lks. W. of the cor. of Ts. 1 S., Rs. 2 & 3 W.
	True course and dist.: - N.0°15'W., 39.97 chs.
Resurvey.	
	The cor. of Ts. 1 S., Rs. 2 & 3 W. is an iron post, 3 ins. in diam., projecting 12 ins. above ground, firmly set, with brass cap mkd. and witnessed as described in the official record.
	Thence N.0°15'W., on true line, bet. secs. 31 and 36 (S. 1/2) Over rolling land, thru scattering patches of timber and dense undergrowth.
2.85	Old road, bears NE. and SW.
15.00	Asc. 100 ft. over SE. slope.
30.00	Ridge, bears E. and W. Desc. 75 ft.
39.30	Wash, 25 lks. wide, course E.
39.97	Intersect the original 1/4 sec. cor. of secs. 31 and 36, which is a mound of earth midway bet. two pits N. and S. The original cor. post, a decayed ironwood, 3 ft. long, 3 ins. square, illegibly mkd. on one face, is lying on the ground alongside. Reconstruct this cor. monument as follows: remove the mound, and in center of its position reset the wood post 28 ins. in the ground, and alongside same set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

Resurvey of West Boundary of Township 1 South, Range 2 West

Chains



from which

- a paloverde, 6 ins. diam., brs. S.49 1/4°E., 93 lks. dist., mkd. 1/4 S31 BT
- a paloverde, 36 ins. diam., brs. S.5 1/2°W., 101 lks. dist., mkd. 1/4 S36 BT

Thence


N.0°44'E., on true line, bet. secs. 31 and 36 (N. 1/2)

Over broken land, thru patches of scattering timber and dense undergrowth.

13.00 Low spur, slopes E.

39.99 Intersect the original cor. of secs. 25, 30, 31 and 36, which is a mound of earth, with one pit SE. The decayed remains of the old wood cor. post, 2 ins. square 3 ft. long, illegibly mkd. is lying on the ground alongside the mound.

Reconstruct this cor. monument as follows: remove the mound and in center of its position, reset old wood post, 28 ins. in the ground, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



1931

from which

- a paloverde, 12 ins. diam., brs. N.17 3/4°E., 554 lks. dist., mkd. T1S R2W S30 BT
- a paloverde, 7 ins. diam., brs. S.35°E., 131 lks. dist., mkd. T1S R2W S31 BT
- a paloverde, 16 ins. diam., brs. S.6 1/4°W., 214 lks. dist., mkd. T1S R3W S36 BT
- a paloverde, 12 ins. diam., brs. N.85°W., 345 lks. dist., mkd. T1S R3W S25 BT

Land, rolling and broken.
Soil, sandy and gravelly, 3rd rate.
Timber, paloverde, ironwood, and mesquite.
Undergrowth, same, with ocotillo, and cacti.

N.0°05'E., on true line, bet. secs. 25 and 30 (S. 1/2)

Over broken land, thru patches of dense timber and undergrowth.

40.02 Intersect the original 1/4 sec. cor., which is a mound of earth, midway between distinct outline of two pits N. and S. The decayed remains of the old wood post, 3 ins. square, 3 ft. long, marks weathered off, is lying on

Resurvey of West Boundary of Township 1 South, Range 2 West

Chains

the ground alongside the mound. Reconstruct this cor. monument as follows: remove the mound, and in center of its position reset old wood post 27 ins. in the ground and alongside same set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S25 | S30

1931

from which

a paloverde, 24 ins. diam., brs. N 33 1/2° E., 270 lks. dist., mkd. 1/4 S30 BT

a paloverde, 3 ins. diam., brs. S. 50° W., 441 lks. dist., mkd. 1/4 S25 BT

Thence

N. 0° 17' W., on true line, bet. secs. 25 and 30 (N. 1/4)

Over broken land, sloping NW., thru patches of dense timber and undergrowth.

27.50 S. bank of wash, brs. NW. and SE. Thence across wash, course NW.

34.20 N. bank of same wash, brs. NW. and SE. Leave wash.

40.01 Intersect original cor. of secs. 19, 24, 25 and 30, which is a mound of earth with pits visible NW. and SE. The decayed remains of the paloverde cor. post, 4 ins. square, 2 1/2 ft. long, illegibly mkd., is lying on the ground alongside the mound.

Reconstruct this cor. monument as follows: remove the mound, and in center of its position reset old wood post 28 ins. in the ground, and alongside same set an iron post 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T1S

R3W | R2W

824 | S19

S25 | S30

1931

from which

a paloverde, 12 ins. diam., brs. S. 56 1/2° E., 410 lks. dist., mkd. T1S R2W S30 BT

a paloverde, 14 ins. diam., brs. S. 14 1/2° W., 121 lks. dist., mkd. T1S R3W S25 BT

a paloverde, 12 ins. diam., brs. N. 56 1/2° W., 282 lks. dist., mkd. T1S R3W S24 BT

No other bearing tree available.

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, broken and rolling.

Soil, sandy and gravelly, 3rd rate.

Timber, paloverde, ironwood, and mesquite.

Undergrowth, same, with ocotillo and cacti.

Resurvey of West Boundary of Township 1 South, Range 2 West

Chains N.0°03'W., on true line, bet. secs.19 and 24.

Over broken land, thru patches of dense undergrowth and scattering timber.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished 1/4 sec. cor. of secs.19 and 24, with brass cap mkd.



to a mesquite, 12 ins. diam., brs. S.42°E., 331 lks. dist., mkd. 1/4 S19 BT

to a mesquite, 12 ins. diam., brs. N.20°W., 693 lks. dist., mkd. 1/4 S24 BT

56.52 Old road, bears NW. and SE.

80.00 Intersect the original cor. of secs.13,18,19 and 24, which is a small mound of earth with two pits equidistant NE. and SE. The old cor. post, an iron-wood, 3 ins. sq., mkd XX on one face, and 3 notches on one edge, and other mks. illegible, is lying on the ground alongside the mound.

Reconstruct this cor. monument as follows: remove the mound, and in center of its position reset old wood post 28 ins. in the ground, and alongside, to same depth, set an iron post, 3 ft. long, 2 ins. in diam., for cor. of secs.13,18,19 and 24, with brass cap mkd.



1931

No bearing trees available.

Dig pits, 18x18x12 ins., one in each sec. 3 ft. dist.

Land, broken.
Soil, sandy and gravelly, 2nd and 3rd rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, same, with sotillo and cacti.

N.0°51'W., on true line, bet. secs. 13 and 18.

Over broken land, thru patches of dense timber and undergrowth.

17.12 old road, bears NW. and SE.

30.72 Old road, bears NW. and SE.

39.87 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished 1/4 sec. cor. of secs.13 and 18, with brass cap mkd.



Resurvey of West Boundary of Township 1 South, Range 2 West

Chains	AS has 21.000 and soil cor. from which								
	a mesquite, 13 ins. diam., brs. N. 81 1/4° E., 262 lks. dist., mkd. 1/4 S18 BT								
	a mesquite, 6 ins. diam., brs. S. 45 1/2° W., 494 lks. dist., mkd. 1/4 S13 BT								
42.12	Old road, bears NE. and SW.								
45.10	Wash, 20 lks. wide, course NE.								
69.10	Old road, bears NE. and SW.								
79.74	Intersect the original cor. of secs. 7, 12, 13 and 18, which is a wood post 3 ins. sq., decayed away to surface of the ground, equidistant from faint traces of four pits, one in each sec. Reconstruct this cor. monument as follows: Alongside the stub of the old wood post, set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.								
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>T1S</td><td></td></tr> <tr><td>R1W</td><td>R2W</td></tr> <tr><td>S12</td><td>S7</td></tr> <tr><td>S13</td><td>S18</td></tr> </table> <p>1931</p> <p>from which</p>	T1S		R1W	R2W	S12	S7	S13	S18
T1S									
R1W	R2W								
S12	S7								
S13	S18								
	a mesquite, 40 ins. diam., brs. N. 9 1/4° E., 341 lks. dist., mkd. T1S R2W S7 BT								
	a mesquite, 10 ins. diam., brs. S. 72 1/4° E., 297 lks. dist., mkd. T1S R2W S18 BT								
	a mesquite, 45 ins. diam., brs. S. 53 1/4° W., 202 lks. dist., mkd. T1S R3W S13 BT								
	No other bearing tree available.								
	Dig pits, 18x18x12 ins., one each sec. 3 ft. dist.								
	Land, broken.								
	Soil, sandy and gravelly, 2nd and 3rd rate.								
	Timber, same, with cacti and ocotillo.								
	N. 1° 34' E. on true line, bet. secs. 7 and 12.								
	Over-broken land, thru scattering timber and dense undergrowth.								
10.89	Left bank of Gila River, 25 ft. high, bears E. and W. Enter nearly level river bottom, subject to overflow.								
14.90	Road, bears E. and W.								
28.00	S. edge of water of Gila River, bears E. and W. Thence across stream of water, 4 ft. deep, course W.								
34.09	N. edge of water, bears E. and W. Leave water and enter scattering timber and dense undergrowth in river bottom.								
40.14	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for reestablished 1/4 sec. cor. of secs. 7 and 12, with brass cap mkd.								

Resurvey of West. Boundary of Township 1 South, Range 2 West

Chains

1
S12 | S7
1931

from which

a cottonwood, 16 ins. diam., brs. N. 51 1/4° E., 569 lks.
dist., mkd. 1/4 S7 BT

a cottonwood, 4 ins. diam., brs. N. 28 1/2° W., 396 lks.
dist., mkd. 1/4 S12 BT

Continue over nearly level bottom land, thru scattering timber and dense undergrowth.

72.20 Right bank of Gila River, bears NE. and SW., 15 ft. high. Leave river bottom and timber and undergrowth. Thence over level cleared and cultivated land.

74.50 Fence, bears E. and W.

80.28 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 34 ins. in the ground, for reestablished cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T1S
R3W | R2W
S1 | S6
S12 | S7

1931
from which

a mesquite, 6 ins. diam., brs. S. 53 1/4° E., 29 lks.
dist., mkd. T1S R2W S7 BT

a mesquite, 6 ins. diam., brs. S. 28 1/4° W., 27 lks.
dist., mkd. T1S R3W S12 BT

This cor. is near center of the intersection of center lines of roads extending E., N. and W., therefore establish four witness cors., each an iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, and mkd. on brass cap as follows:

at a point N. 45° E., 93 lks. dist.,

T1S
R3W | R2W
S1 | S6
S12 | S7

WC
1931

at a point S. 45° E., 28 lks. dist.,

WC
T1S
R3W | R2W
S1 | S6
S12 | S7

1931


at a point S. 45° W., 81 lks. dist., WC

T1S
R3W | R2W
S1 | S6
S12 | S7
1931

Resurvey of West Boundary of Township 1 South, Range 2 West

Chains

at a point N.45°W., 93 lks. dist.,




Land, broken, and nearly level. river bottom.
 Soil, sandy and rocky, 2nd and 3rd rate.
 Timber, cottonwood, palo verde, mesquite, and ironwood.
 Undergrowth, same, with willow, casti, ocotillo, and tamarack.

N.1°34'E. on true line, bet. secs. 1 and 6.

Over level land, along road. Cultivated land both sides.

16.48 Irrigation canal, 8 ft. wide, 6 ft. deep, course W. for 10 lks., thence northerly along W. side of road.


40.14 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, in edge of canal bank, for reestablished 1/4 sec. cor. of secs. 1 and 6, with brass cap mkd.



No bearing trees available.

Establish four witness cors., each an iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, and with brass cap mkd. as follows:


at a point N.45°E., 72 lks. dist.,




at a point S.45°E., 71 lks. dist.,



at a point S.45°W., 55 lks. dist.,



and at a point N.45°W., 53 lks. dist.,



Continue along road.

80.28 Intersect the reestablished closing cor. of Ts. 1 S., Rs. 2 and 3 W., hereinbefore described.

Land, level.
 Soil, sandy clay loam, 1st rate.
 Timber, cottonwood, and orchards.
 Undergrowth, none.

Resurvey of the Subdivision Lines of Township 1 South, Range 2 West

Chains

All of the subdivision lines of T.1 S., R.2 W., were surveyed in 1883 by R.C. Powers, U.S.D.S.

No retracement or resurvey of any part of said subdivision lines is of record.

The following notes describe a dependent resurvey of all of the subdivision lines of said Tp., reconstructing all existing corms. thereof with brass capped iron posts, and reestablishing all missing corms. either by proportion between existing corms., or by collateral evidence of the original location of same.

Prior to this resurvey a careful and detailed investigative survey of this Tp. was made, in which 80% of the original section corners, and 50% of the original 1/4 section corners were recovered.


The cor. of secs. 35 and 36, on the S. bdy. of the Tp. reestablished in 1916, is an iron post, 3 ins. in diam., projecting 10 ins. above ground, firmly set, and mkd. and witnessed as described in the official record.

Thence

N.0°12'E., on true line, bet. secs. 35 and 36.

Over rolling land, thru very scattering timber and patches of dense undergrowth. Asc. gradually over SE. slope.

39.98 (proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished 1/4 sec. cor., with brass cap mkd.



1931

from which




a paloverde, 10 ins. diam., brs. S.72 1/2°E., 290 lks. dist., mkd. 1/4 S36 BT

No other bearing tree available.

Dig pits, 18x18x12 ins., N. and S. of cor., 3 ft. dist.

Thence over level land, thru scattering timber and patches of dense undergrowth.

79.96 (Proportional dist.) Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for reestablished cor. of secs. 25, 26, 35 and 36, with brass cap mkd.



1931

No bearing trees available.

Dig pits, 18x18x12 ins., in each sec., 3 ft. dist.

Land, gently rolling and level.

Timber, paloverde and ironwood.

Soil, sandy and gravelly, 3rd rate.

Undergrowth, scrub paloverde, ironwood, and mesquite.

Resurvey of the Subdivision Lines of Township 1 South, Range 2 West

Chains	East, on true line, bet. secs. 25 and 36.
139.83	Over level and broken land, thru scattering timber and patches of dense undergrowth.
39.83	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor., with brass cap mkd. S. 25 $\frac{1}{4}$ S36 1931
	No bearing trees available. Dig pits, 18x18x12 ins., E. and W. of cor., 3 ft. dist.
	A galvanized iron water storage tank bears S. 85 $\frac{1}{2}$ ° E., about 18 chs. dist.
53.90	Fence cor. brs. S. 1 ch. dist.; Fences extending E. & S.
63.40	Road, bears N. and SE.
66.50	Earth reservoir, 2 chs. square, on line.
79.66	Intersect the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., reconstructed in 1913, which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, and mkd. and witnessed as described in the official record.
	Land, level and broken. Soil, sandy and gravelly, 2nd and 3rd rate. Timber, paloverde, ironwood, and mesquite. Undergrowth, same, with cacti, and ocotillo.

	From reestablished cor. of secs. 25, 26, 35 and 36,
	N. 1° 49' E., on true line, bet. secs. 25 and 26.
	Over level land, thru scattering timber and patches of dense undergrowth.
40.00	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for reestablished $\frac{1}{4}$ secs cor., with brass cap mkd.
	S26 S25 1931 No bearing trees available. Dig pits, 18x18x12 ins., N. and S. of cor., 3 ft. dist.
63.30	Wash, 20 lks. wide, course W.
80.00	Intersect original cor. of secs. 23, 24, 25 and 26, which is a mound of earth equidistant from four pits, one in each sec. Decayed remains of old wood cor. post, 3 ins. sq., 3 ft. long, illegibly mkd. is lying on the ground alongside the mound. Remove the mound and in center of its position reset old wood post, and alongside same set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for reestablished cor. of secs. 23, 24, 25 & 26, with brass cap mkd.
	T1S R2W S23 S24 S26 S25 1931

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	from which
	<p>A paloverde, 12 ins. in diam., bears S. $36\frac{1}{2}^{\circ}$ E., 791 lks. dist., mkd. T 1 S R 2 W S 25 B T.</p> <p>And dig pits, 18x18x12 ins. in each sec., 3 ft. dist.</p> <p>Land: level desert. Soil: gravelly loam, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cacti and ocotillo.</p> <hr/>
	<p>S. $89^{\circ} 53'$ E., on a true line bet. secs. 24 and 25.</p>
	<p>Over broken desert land, thru patches of dense undergrowth and scattering timber.</p>
20.60	Road, bears N. and S.
38.50	<p>(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.</p>
	<p style="text-align: center;">S 24 $\frac{1}{4}$ ——— S 25 1931</p>
	from which
	<p>A paloverde, 4 ins. in diam., bears N. $27\frac{1}{2}^{\circ}$ E., 272 lks. dist., mkd. $\frac{1}{4}$ S 24 B T.</p>
	<p>A paloverde, 4 ins. in diam., bears S. $64\frac{1}{2}^{\circ}$ E., 160 lks. dist., mkd. $\frac{1}{4}$ S 25 B T.</p>
56.00	Road, bears NW. and SE.
77.00	<p>The cor. for secs. 19, 24, 25 and 30 on the E. bdy. of township, which is an iron post, 2 ins. in diam., 12 ins. above ground, mkd. and witnessed as described in the official record.</p>
	<p>Land: broken desert. Soil: gravelly, rocky, loam, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cacti and ocotillo.</p> <hr/>
	<p>From the cor. for secs. 23, 24, 25 and 26, bears</p>
	<p>N. $0^{\circ} 54'$ E., on a true line bet. secs. 23 and 24.</p>
	<p>Over broken desert land, thru patches of dense undergrowth and scattering timber.</p>
32.00	Wash, 30 lks. wide, 2 ft. deep, course W.
40.06	<p>(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.</p>
	<p style="text-align: center;">$\frac{1}{4}$ S 23 S 24 1931</p>
	from which
	<p>A paloverde, 5 ins. in diam., bears N. 17° E., 221 lks. dist., mkd. $\frac{1}{4}$ S 24 B T</p>

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. A paloverde, 4 ins. in diam., bears N. $49\frac{1}{2}^\circ$ W., 330 lks. dist., mkd. $\frac{1}{4}$ S 23 B T.

40.15 Old road, bears NW. and SE.


42.30 Wash, 10 lks. wide, 1 ft. deep, course W.

49.30 **Road**, bears NW. and SE.

67.00 Wash, 80 lks. wide, 2 ft. deep, course W.

79.20 Wash, 50 lks. wide, course SW.

80.12 The cor. for secs. 13, 14, 23 and 24, which is a decayed post, 4 ins. sq., no mks. legible, in a mound of earth and stone, witnessed as described in the official record, and in addition a paloverde, 6 ins. in diam., bears S. 60° E., 60 lks. dist., scribe mks. visible; but not legible. In the center of the mound, with old post alongside, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. for secs. 13, 14, 23 and 24, with brass cap mkd.



from which

A paloverde, 10 ins. in diam., bears N. $87\frac{1}{2}^\circ$ E., 135 lks. dist., mkd. T 1 S R 2 W S 13 B T.

A paloverde, 24 ins. in diam., bears S. $59\frac{1}{2}^\circ$ E., 61 lks. dist., mkd. T 1 S R 2 W S 24 B T.

A paloverde, 10 ins. in diam., bears S. $21\frac{1}{2}^\circ$ W., 137 lks. dist., mkd. T 1 S R 2 W S 23 B T.

A paloverde, 3 ins. in diam., bears N. 51° W., 139 lks. dist., mkd. B T, only.

Land: rolling.
 Soil: gravelly, rocky, 3rd rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same with cactil and ocotilla.

S. $89^\circ 59'$ E., on a true line bet. secs. 13 and 24.


Over rolling foothills, thru scattering timber and patches of dense undergrowth; descend 10 ft. over SE. slope.

1.70 Wash, 50 lks. wide, course SW. ; ascend 45 ft.

26.00 Spur, slopes SW.; descend 35 ft.

31.15 Wash, 10 lks. wide, course SW.; ascend 10 ft.

37.87 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.



from which

An ironwood, 5 ins. in diam., bears N. $53\frac{1}{2}^\circ$ E., 81 lks.

Resurvey of the Subdivisions of Tp. 1 S., Rg. **BOOK** 3930

Chains. Dist., mkd. $\frac{1}{4}$ S 13 B T.

A paloverde, 6 ins. in diam., bears S. $27\frac{1}{2}^{\circ}$ E., 188 lks. dist., mkd. $\frac{1}{4}$ S 24 B T.

Ascend 50 ft. over a broken SW. slope to the top of the hill.

75.73 The cor. for secs. 13, 18, 19 and 24, on the E. bdy. of township, which is a granite stone, 4x12x20 ins. above ground, mkd. and witnessed as described in the official record.

Land: rolling foothills.
Soil: rocky, sandy loam, 4th rate.
Timber: paloverde, ironwood and mesquite.
Undergrowth: same, with cacti and ocotillo.

From the cor. for secs. 13, 14, 23 and 24, ascend over a broken SW. slope.

N. $0^{\circ} 03'$ W., on a true line bet. secs. 13 and 14, ($S\frac{1}{2}$)

Ascend over a broken SW. slope along rolling foothills. thru patches of dense undergrowth and scattering timber.

18.85 Wash, 30 lks. wide, course SW.

39.92 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 8x8x8 ins. above ground, mkd. and witnessed as described in the official record. In place of old cor. and with same alongside, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$

S 14 | S 13

1931

from which

A paloverde, 5 ins. in diam., bears S. 29° E., 62 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

A paloverde, 5 ins. in diam., bears S. 13° W., 66 lks. dist., mkd. $\frac{1}{4}$ S 14 B T.

Thence, on a true line bet. secs. 13 and 14, ascend over a broken SW. slope.

N. $0^{\circ} 35'$ E., on a true line bet. secs. 13 and 14, ($N\frac{1}{2}$)


Over broken foothills, general westerly slope.

12.93 Wash, 20 lks. wide, 3 ft. deep, course NW.

30.85 Spur, slopes W.,; descend 30 ft.

34.75 Wash, course W.; ascend 50 ft. over broken W. slope.

39.89 The cor. for secs. 11, 12, 13 and 14, which is a granite stone, 4x12x14 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old cor. alongside set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. for secs. 11, 12, 13 and 14, with brass cap mkd.



Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains

from which

A paloverde, 5 ins. in diam., bears N. $49\frac{1}{2}^\circ$ E., 72 lks. dist., mkd. T 1 S R 2 W S 12 B T.

A paloverde, 6 ins. in diam., bears S. 39° E., 112 lks. dist., mkd. T 1, S R 2 W S 13 B T.

A paloverde, 2 ins. in diam., bears S. $55\frac{3}{4}^\circ$ W., 67 lks. dist., mkd. B T, only.

A paloverde, 6 ins. in diam., bears N. $71\frac{1}{4}^\circ$ W., 48 lks. dist., mkd. T 1 S R 2 W S 11 B T.

Land: broken foothills.
Soil: rocky, decomposed granite, 4th rate.
Timber: paloverde, ironwood, and mesquite.
Undergrowth: same, with cacti and ocotillo.

S. $89^\circ 58'$ E., on a true line bet. secs. 12 and 13.

Over broken foothills, thru patches of dense undergrowth and scattering timber; descend SE. slope 15 ft.

2.00 Draw, 20 lks. wide, course SW.; ascend 160 ft.

15.65 Spur, slopes NW.; descend 265 ft.

34.85 Draw, course N.; ascend 80 ft.

37.65 (Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.

S 12
 $\frac{1}{4}$ —————
S 13
1931

from which

A paloverde, 3 ins. in diam., bears S. $52\frac{1}{2}^\circ$ E., 36 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

A paloverde, 3 ins. in diam., bears N. $33\frac{3}{4}^\circ$ W., 40 lks. dist., mkd. $\frac{1}{4}$ S 12 B T.

41.85 Spur, slopes N.; descend 65 ft.

54.85 Draw, course NW.; ascend 115 ft.

68.85 Spur, slopes NE.; descend 50 ft.

75.30 The cor., on E. bdy. of Tp., for secs. 7, 12, 13 and 18, which is an iron post, 3 ins. in diam., 20 ins. above ground, firmly set in a mound of stone, mkd. and witnessed as described in the official record.


Land: rough foothills.
Soil: rocky, decomposed granite, 4th rate.
Timber: paloverde and ironwood.
Undergrowth: same, with cacti and ocotillo.

From the cor. for secs. 11, 12, 13 and 14,

N. $0^\circ 01'$ E., on a true line bet. secs. 11 and 12, ($S\frac{1}{2}$)

Over rough foothills, thru patches of dense undergrowth and scattering timber.

Chains.
 14.70 Spur, slopes NW.
 19.40 Wash, course NW.
 28.30 Spur, slopes NW.; descend 80 ft.
 38.00 Wash, 15 lks. wide, course SW.; ascend 50 ft.
 40.00 The original $\frac{1}{4}$ sec. cor., which is a granite stone, 8x12x10 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bed rock, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

- A paloverde, 4 ins. in diam., bears N. $24\frac{3}{4}^{\circ}$ E., 76 lks. dist., mkd B T, only.
- A paloverde, 6 ins. in diam., bears S. $86\frac{1}{2}^{\circ}$ W., 75 lks. dist., mkd. $\frac{1}{4}$ S 11 B T.


Thence, on the line between

N. $0^{\circ} 10'$ E., on a true line bet. secs. 11 and 12, (N $\frac{1}{2}$)

Over rough foothills, thru patches of dense undergrowth and scattering timber; ascend 20 ft. over SE. slope.

6.00 Spur, slopes NW.; descend 85 ft.
 16.50 Wash, 30 lks. wide, 8 ft. deep, course W.; descend 35 ft.
 22.00 Road, bears NW. and SE.

40.03 The original cor. for secs. 1, 2, 11 and 12, which is a granite stone, 6x8x14 ins. above ground, and in a mound of stone, mkd. and witnessed as described by the official record. In place of and with old cor. alongside, set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. for secs. 1, 2, 11 and 12, with brass cap mkd.



from which

- A paloverde, 3 ins. in diam., bears N. 20° E., 67 lks. dist., mkd T 1 S R 2 W S 1 B T.
- A paloverde, 4 ins. in diam., bears S. $68\frac{1}{2}^{\circ}$ E., 91 lks. dist., mkd. T 1 S R 2 W S 12 B T.
- A paloverde, 12 ins. in diam., bears S. 19° W., 95 lks. dist., mkd. T 1 S R 2 W S 11 B T.
- An ironwood, 5 ins. in diam., bears N. $59\frac{1}{4}^{\circ}$ W., 229 lks. dist., mkd. B T, only.

Land: rough foothills.
 Soil: rocky, 4th rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same, with cactia and ocotillo.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.

S. 89° 45' E., on a true line bet. secs. 1 and 12, (W. 1/2)

Over broken, rough foothills, thru patches of dense undergrowth and scattering timber, along a NW. slope.

39.00

The original 1/4 sec. cor., which is a partly decayed post, 3 ins. sq., mks. visible; but illegible, lying on a mound of earth. In center of mound; with old stake alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.

1/4 S 1
S 12
1931

from which

A paloverde, 5 ins. in diam., bears N. 42° E., 170 lks. dist., mkd. 1/4 S 1 B T.

A paloverde, 6 ins. in diam., bears S. 10° E., 49 lks. dist., mkd. 1/4 S 12 B T.

Thence, on a true line bet. secs. 1 and 12,

N. 89° 47' E., on a true line bet. secs. 1 and 12, (E. 1/2)

Over rolling foothills, thru patches of dense undergrowth and scattering timber.

2.85

Road, bears N. and S.

4.00

Wash, 40 lks; wide, 4 ft. deep, course NW.

27.20

Wash, 20 lks. wide, 3 ft. deep, course NW.

36.25

The original cor. for secs. 1, 6, 7 and 12, reconstructed with an iron post, 3 ins. in diam., 12 ins. above ground, mkd. and witnessed as described in the official record.

Land: rough foothills.

Soil: rocky, gravelly, 3rd and 4th rate.

Timber: paloverde, ironwood and mesquite.

Undergrowth: same, with cacti and ocotillo.

From the cor. for secs. 1, 2, 11 and 12, as described,

N. 0° 22' E., on a true line bet. secs. 1 and 2, (S. 1/2)

Descend 70 ft. over NE. slope, across broken foothills, thru patches of dense undergrowth; and scattering timber.

37.60

Wash, 1 ch. wide, course NW.; ascend 10 ft. to cor.

39.50

The original 1/4 sec. cor., which is a granite stone, 5x10 x8 ins. above ground, mkd. and witnessed as described in the official record. In place of and with stone alongside set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.

1/4 S 2 | S 1
1931

from which

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains

A paloverde, 8 ins. in diam., bears S. 4 $\frac{1}{2}$ ° E., 52 lks. dist., mkd. $\frac{1}{4}$ S 1 B T.

A paloverde, 8 ins. in diam., bears N. 66° W., 66 lks. dist., mkd. $\frac{1}{4}$ S 2 B T.

Thence, on new line and measurement.

N. 2° 26' W., on a true line bet. secs. 1 and 2, (N. $\frac{1}{2}$)

Over rough foothills ascending 65 ft. over S. slope, thru scattering patches of undergrowth and timber.

28.30 Spur, slopes W.; descend 65 ft.

37.80 Draw, course W.; ascend 40 ft. to

40.73 Intersect the Gila and Salt River Base Line at the closing cor., for secs. 1 and 2, hereinbefore described.

Land: rough foothills.
Soil: rocky, 4th rate.
Timber: paloverde and ironwood.
Undergrowth: same, with cacti.


The cor. for secs. 34 and 35 on the S. bdy. of Tp. reconstructed by W.H. Thorn, U.S.S. in 1916, is an iron post, 3 ins. in diam., 10 ins. above ground, mkd. and witnessed as described in the official record,

Thence,

N. 1° 14' E., on a true line bet. secs. 34 and 35.

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

40.82 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.




1931

from which

A mesquite, 10 ins. in diam., bears, S. 8 $\frac{1}{2}$ ° E., 159 lks. dist., mkd. $\frac{1}{4}$ S 35 B T.

A mesquite, 12 ins. in diam., bears N. 5° W., 62 lks. dist., mkd. $\frac{1}{4}$ S 34 B T.

81.64 The pt. for the cor. of secs. 26, 27, 34 and 35, re-established from the old bearing tree: a paloverde, 6 ins. in diam., mkd. S XXX other mks. illegible, At the pt. for the cor., as described in the official record N. 20° W., 225 lks. from the bearing tree, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. of secs. 26, 27, 34 and 35, with brass cap mkd.



from which

A paloverde, 8 ins. in diam., bears N. 73 $\frac{1}{2}$ ° E., 294 lks. dist., mkd. T 1 S R 2 W S 26 BT.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. A paloverde, 4 ins. in diam., bears S. 10 $\frac{1}{2}$ ° E., 225 lks. dist., mkd. T 1 S R 2 W S 35 B T. (Branch of old BT)

A paloverde, 10 ins. in diam., bears S. 46 $\frac{1}{2}$ ° W., 639 lks. dist., mkd. T 1 S R 2 W S 34 B T.

A paloverde, 10 ins. in diam., bears N. 14° W., 260 lks. dist., mkd. T 1 S R 2 W S 27 B T.

Land: rolling desert.
Soil: gravelly, 3rd rate.
Timber: paloverde, ironwood and mesquite.
Undergrowth: same, with cacti and ocotilla.

S. 89° 37' E., on a true line bet. secs. 26 and 35, (W. $\frac{1}{4}$)

Over broken desert, thru patches of dense undergrowth and scattering timber.

38.62 The old $\frac{1}{4}$ sec. cor., which is a partly decayed post, 3 ins. sq., axed sides and ends, lying on ground between two distinct pits, indicated by the unmistakable difference of the silt filler in the old depressions. At pt. of old post, midway between the old pits, and with old cor. alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 26

 S 35
 1931

and dig

pits, 18x18x12 ins. E. and W. of cor., 3 ft. dist.

Thence, on true line of measurement,

S. 87° 39' E., on a true line, bet. secs. 26 and 35, (E. $\frac{1}{4}$)

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

39.90 The cor. of secs. 25, 26, 35, and 36. sec. 25, 26, 35 and 36, as before described.

Land: rolling.
Soil: gravelly loam, 2nd and 3rd rate.
Timber: paloverde, ironwood and mesquite.
Undergrowth: same, with cacti and ocotilla.

From the cor. for secs. 26, 27, 34 and 35, paloverde

N. 0° 41' W., on a true line bet. secs. 26 and 27.

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

39.71 (Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 27 | S 26
 1931

from which


Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. A paloverde, 10 ins. in diam., bears S. 86 $\frac{1}{2}$ ° E., 36 lks. dist., mkd. $\frac{1}{4}$ S 26 B T.

A paloverde, 5 ins. in diam., bears N. 62° W., 68 lks. dist., mkd. $\frac{1}{4}$ S 27 B T.

49.70 Wash, 20 lks. wide, 2 ft. deep, course NW.

79.42 The old original cor. for secs. 22, 23, 26 and 27, which is a partly decayed post, 3 ins. sq. 18 ins. above ground, in a mound of earth, scribe mks. visible but not legible. In place of and with old post alongside, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for the cor. for secs. 22, 23, 26 and 27, with brass cap mkd.

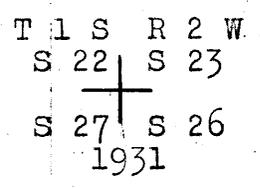

from which

A paloverde, 5 ins. in diam., bears N. 11 $\frac{1}{2}$ ° E., 401 lks. dist., mkd. T 1 S R 2 W S 23 B T.

A paloverde, 6 ins. in diam., bears S. 22 $\frac{1}{2}$ ° E., 203 lks. dist., mkd. T 1 S R 2 W S 26 B T.

A paloverde, 12 ins. in diam., bears S. 10 $\frac{1}{2}$ ° W., 102 lks. dist., mkd. T 1 S R 2 W S 27 B T.

A paloverde, 6 ins. in diam., bears N. 24 $\frac{3}{4}$ ° W., 326 lks. dist., mkd. T 1 S R 2 W S 22 B T.


Land: rolling.
Soil: gravelly, rocky, 3rd rate.
Timber: paloverde, ironwood and mesquite.
Undergrowth: same, with cacti and ocotilla.

Thence,
S. 89° 55' E., on a true line bet. secs. 23 and 26, (W $\frac{1}{2}$)
Over rolling desert land, thru patches of dense undergrowth and scattering timber.

25.15 Wash, 30 lks. wide, 2 ft. deep, course NW.

28.00 Land becomes nearly level.

40.01 The old original $\frac{1}{4}$ sec. cor., which is a partly decayed post, 3 ins. sq. axed ends and sides, mks. weathered off, lying on a mound of earth. In center of mound, with old post alongside, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A paloverde, 10 ins. in diam., bears S. 18° E., 609 lks. dist., mkd. $\frac{1}{4}$ S 26 B T.

No more trees available; dig pits, 18x18x12 ins. E. and W. of cor., 3 ft. dist.

Thence,
S. 88° 14' E., on a true line bet. secs. 23 and 26, (E $\frac{1}{2}$)

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	Over level desert land, thru patches of dense undergrowth and scattering timber.										
42.00	<p>The cor. for secs. 23, 24, 25 and 26, ...</p> <p>Land: rolling and level. Soil: gravelly loam, 2nd and 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cactus and ocotillo.</p> <hr/> <p>From the cor. for secs. 22, 23, 26 and 27, ...</p> <p>N. 0° 02' E., on a true line bet. secs. 22 and 23, (S. ½)</p> <p>Over rolling desert land, thru patches of dense undergrowth and scattering timber.</p>										
13.10	Wash, 30 lks. wide, course NW.										
27.30	Wash, 30 lks. wide, course W.										
39.90	<p>The old ¼ sec. cor., which is decayed stub of original post in a mound of earth with distinct indications of old pits. In center of mound, with old post remains alongside, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the ¼ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>¼</p> <table border="0"> <tr> <td>S 22</td> <td> </td> <td>S 23</td> </tr> <tr> <td colspan="3" style="text-align: center;">1931</td> </tr> </table> <p>from which</p> <p>A paloverde, 14 ins. in diam., bears S. 74½° E., 315 lks. dist., mkd. ¼ S 23 B T.</p> <p>A paloverde, 10 ins. in diam., bears S. 81° W., 336 lks. dist., mkd. ¼ S 22 B T.</p> <p>-----</p> <p>Thence,</p> <p>N. 0° 24' W., on a true line bet. secs. 22 and 23, (N. ½)</p> <p>Over rolling land, thru patches of dense undergrowth and scattering timber.</p> </div>	S 22		S 23	1931						
S 22		S 23									
1931											
17.70	Road, bears NE. and W.										
39.98	<p>The old original cor. for secs. 14, 15, 22 and 23, which is a decayed stub of original post in a mound of earth with indications of old pits NE. and SW. In place of old post, with remains alongside, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for the cor. of secs. 14, 15, 22 and 23, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T 1 S</td> <td>R 2 W</td> </tr> <tr> <td>S 15</td> <td> S 14</td> </tr> <tr> <td colspan="2" style="text-align: center;">+</td> </tr> <tr> <td>S 22</td> <td> S 23</td> </tr> <tr> <td colspan="2" style="text-align: center;">1931</td> </tr> </table> <p>from which</p> <p>A paloverde, 5 ins. in diam., bears N. 9½° E., 199 lks. dist., mkd. T 1 S R 2 W S 14 B T.</p> <p>A paloverde, 5 ins. in diam., bears N. 16½° W., 171 lks. dist., mkd. T 1 S R 2 W S 15 B T.</p> </div>	T 1 S	R 2 W	S 15	S 14	+		S 22	S 23	1931	
T 1 S	R 2 W										
S 15	S 14										
+											
S 22	S 23										
1931											

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. No other trees available; dig pits, 18x18x12 ins. in each sec. 3 ft. dist.

Land: rolling.
Soil: gravelly, 3rd rate.
Timber: paloverde, ironwood and mesquite.
Undergrowth: same with cacti.

S. 89° 12' E., on a true line bet. secs. 14 and 23.

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

20.10 Wash, 30 lks. wide, course SW.

36.30 Wash, 60 lks. wide, 3 ft. deep, course NW.

41.77 (Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 14}{S\ 23}$
1931

from which

A paloverde, 6 ins. in diam., bears N. 18 $\frac{3}{4}$ ° W., 82 lks. dist., mkd. $\frac{1}{4}$ S 14 B T. and dig pits, 18x18x12 ins. E. and W., 3 ft. dist., the cor.

44.30 Road, bears NW. and SE.

83.53 The cor., for secs. 13, 14, 23 and 24, hereafter described.

Land: rolling.
Soil: gravelly, sandy, 3rd rate.
Timber: paloverde and ironwood.
Undergrowth: same, with mesquite, cacti and ocatillo.

From the cor. for secs. 14, 15, 22 and 23, hereafter described,
N. 1° 50' E., on a true line bet. secs. 14 and 15.
Over broken desert, thru patches of dense undergrowth, and scattering timber.

10.70 Road, bears E. and W.

15.00 Start ascending over S. slope, 86 ft. to ridge.

37.00 Ridge, bears E. and W.; descend 80 ft.

39.55 (Proportional dist.) val. Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 15 | S 14
1931

from which

A paloverde, 4 ins. in diam., bears N. 16 $\frac{3}{4}$ ° E., 45 lks., dist., mkd. $\frac{1}{4}$ S 14 B T.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	A paloverde, 4 ins. in diam., bears S. $74\frac{1}{4}^{\circ}$ W., 106 lks. dist., mkd. $\frac{1}{4}$ S 15 B T.
53.50	Road, bears NW. and E.
64.70	Road, bears NW. and SE.
77.20	Wash, 120 lks. wide, $3\frac{1}{2}$ ft. deep, course NW.
79.11	The original cor. for secs. 10, 11, 14 and 15, which is A granite stone, 10x10x12 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. for secs. 10, 11, 14 and 15, with brass cap mkd.
	T 1 S R 2 W S 10 S 11 S 15 S 14 1931
	from which
	A paloverde, 5 ins. in diam., bears N. $37\frac{3}{4}^{\circ}$ E., 40 lks. dist., mkd. T 1 S R 2 W S 11 B T.
	A paloverde, 4 ins. in diam., bears S. $33\frac{3}{4}^{\circ}$ E., 116 lks. dist., mkd. T 1 S R 2 W S 14 B T.
	A paloverde, 6 ins. in diam., bears S. $64\frac{1}{4}^{\circ}$ W., 244 lks. dist., mkd. T 1 S R 2 W S 15 B T
	A paloverde, 6 ins. in diam., bears N. $20\frac{3}{4}^{\circ}$ W., 226 lks. dist., mkd., T 1 S R 2 W S 10 B T.
	Land: broken desert. Soil: gravelly, rocky, 3rd and 4th rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cacti and ocotillo.

	S. $89^{\circ} 49'$ E., on a true line bet. secs. 11 and 14.
	Over rolling desert, thru patches of dense undergrowth and scattering timber.
25.70	Old road, bears NW. and SE.
29.20	Wash, 40 lks. wide 6 ins. deep, course NW.
31.15	Same wash, course SW.
35.20	Same wash, course NW.
40.69	(Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.
	S 11 $\frac{1}{4}$ ——— S 14 1931
	from which
	An ironwood, 10 ins. in diam., bears S. $51\frac{3}{4}^{\circ}$ W., 51 lks. dist., mkd. $\frac{1}{4}$ S 14 B T.
	An ironwood, 10 ins. in diam., bears N. $74\frac{1}{4}^{\circ}$ W., 17 lks. dist., mkd. $\frac{1}{4}$ S 11 B T.

Resurvey of the Subdivisions of T₁ S., R₂ W.

Chains.
52.60 Wash, 20 lks. wide, 4 ft. deep, course NW.
73.30 Wash, 15 lks. wide, 4 ft. deep., course NW.
81.38 The cor. for secs. 11, 12, 13 and 14, as described.
Land: rolling.
Soil: gravelly, rocky, 3rd and 4th rate.
Timber: paloverde and ironwood.
Undergrowth: same, with cacti, mesquite and ocotillo.


From the cor. for secs. 10, 11, 14 and 15, as described.

N. 0° 50' E., on a true line bet. secs. 10 and 11, (S $\frac{1}{2}$)

Over rolling desert, thru patches of dense undergrowth, and scattering timber.

34.84 Wash, 40 lks. wide, 3 ft. deep, course W.; asc. 20 ft.

39.99 The $\frac{1}{4}$ sec. cor., which is a granite stone, 8x10x10^{ins.} above ground mkd. and witnessed as described in the official record. In place of and with the old stone alongside, set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground, with a stone 6x4x4 ins. mkd. with a cross(+) beneath the post the remaining length of which is in a mound of stone, 4 $\frac{1}{2}$ ft. base, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



Thence to the cor. for secs. 10 and 11, as described.

N. 1° 00' E., on a true line bet. secs. 10 and 11, (N $\frac{1}{2}$) 35 ft.

Descend from spur, sloping W.; over N. slope, thru patches of dense undergrowth and scattering timber over broken land.


5.15 Drain, course W.; ascend 40 ft.

10.65 Ridge, bears E. and W.; descend 45 ft.

14.65 Draw, course NW.; ascend 50 ft.

20.65 Spur, slopes NW.; descend 20 ft.

40.02 The original cor. for secs. 2, 3, 10 and 11, which is a granite stone, 6x14x14 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long 2 ins. in diam., 14 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. of secs. 2, 3, 10 and 11, with brass cap mkd.

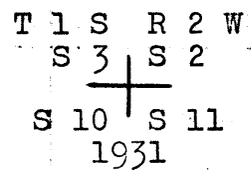

from which

An ironwood, 6 ins. in diam., bears N. 32° E., 96 lks. dist., mkd. T 1 S R 2 W S 2 B T

A paloverde, 4 ins. in diam., bears S. 48 $\frac{1}{2}$ ° E., 58 lks. dist., mkd. T 1 S R 2 W S 11 B T

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	<p>A paloverde, 6 ins. in diam., bears S. $63\frac{1}{4}^{\circ}$ W., 34 lks. dist., mkd. T 1 S R 2 W S 10 B T.</p> <p>A paloverde, 6 ins. in diam., bears N. 53° W., 178 lks. dist., mkd. T 1 S R 2 W S 3 B T.</p> <p>Land: broken desert; and foothills. Soil: gravelly, rocky, 3rd and 4th rate. Timber: paloverde, ironwood, and mesquite. Undergrowth: same, with cacti and ocotilla.</p> <hr/>
	<p>S. $89^{\circ} 45'$ E., on a true line bet. secs. 2 and 11, ($W\frac{1}{2}$)</p> <p>Over rolling land, thru patches of dense undergrowth and scattering timber.</p>
4.20	Road, bears NW. and SE.
28.20	Same road, bears NE. and SW.
39.60	Wash, 40 lks. wide, course NW.
40.15	<p>The original $\frac{1}{4}$ sec. cor., which is a granite stone, 6x8x8 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <p style="text-align: center;">S 2 <u> </u> S 11 1931</p> <p style="text-align: right;">from which</p> <p>A paloverde, 4 ins. in diam., bears S. $33\frac{3}{4}^{\circ}$ E., 58 lks. dist., mkd. $\frac{1}{4}$ S 11 B T.</p> <p>An ironwood, 12 ins. in diam., bears N. $21\frac{1}{2}^{\circ}$ W., 32 lks. dist., mkd. $\frac{1}{4}$ S 2 B T.</p> <hr/> <p>Thence</p> <p>S. $89^{\circ} 58'$ E., on a true line bet. secs. 2 and 11, ($E\frac{1}{2}$)</p> <p>Over rolling land, thru patches of dense undergrowth and scattering timber.</p>
8.25	Road, bears NW. and SE.
34.55	Wash, 30 lks. wide, course NW.
40.13	<p>The cor. for secs. 1, 2, 11 and 12,</p> <p>Land: rolling. Soil: gravelly, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cacti and ocotilla.</p> <hr/> <p>From the cor. for secs. 2, 3, 10 and 11,</p> <p>N. $1^{\circ} 28'$ E., on a true line bet. secs. 2 and 3, ($S\frac{1}{2}$)</p> <p>Over rolling land, thru patches of dense undergrowth and scattering timber.</p>
3.84	Road, bears E. and W.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

- Chains.
- 4.65 Road, bears NE. and SW. to intersection with E. and W. road; ascend 15 ft. over S. slope.
- 8.65 Spur, slopes W.; descend 35 ft.
- 25.72 Same road, bears NW. and SE.
- 38.90 Wire fence, bears NE. and SW.
- 38.95 Left bank of river flood area, bears NE. and SW.; desc. 60 ft. to river bottom lands.
- 40.16 The original $\frac{1}{4}$ sec. cor., which is a partially decayed post, axed on all sides, in a mound of earth, mks. illegible, witnessed as described in the official record. In place of and with old post alongside, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 3 | S 2
1931

from which

A mesquite, 4 ins. in diam., bears S. $63\frac{1}{2}^\circ$ W., 17 lks. dist., mkd. $\frac{1}{4}$ S 3 B T. (Old BT remarked)

A mesquite, 11 ins. in diam., bears S. $62\frac{1}{2}^\circ$ E., 16 lks. m dist., mkd. $\frac{1}{4}$ S 2 B T.

Thence, on new line and measurement,

N. $2^\circ 26'$ W., on a true line bet. secs. 2 and 3, (N. $\frac{1}{2}$)

Over river bottom land, thru dense undergrowth and patches of scattering timber.

- 16.08 Road, bears E. and W.
- 16.38 Ditch, bears E. and W.; dry, 6 ft. wide, 2 ft. deep.
- 26.73 Wire fence, bears NE. and SW.
- 26.78 Dirt bank, 5 ft. high, bears NE. and SW.; brush becomes denser.
- 36.45 Left bank of Gila River, bears NE. and SW.; leave timber and undergrowth.
- 37.00 Center of Gila River channel, water 2 ft. deep, course SW.
- 38.00 Right bank of Gila River, bears NE. and SW.; enter dense undergrowth.
- 38.51 Intersect the Gila and Salt River Base Line at the closing cor. for secs. 2 and 3, heretofore described.

Land: rolling and level bottom.
 Soil: sandy, 2nd and 3rd rate.
 Timber: mesquite, cottonwood and palo verde.
 Undergrowth: same, with willow and tamarack.


 The cor. for secs. 33 and 34 only, on the S. bdy. of township, reconstructed by W. H. Thorn, U.S.S., in 1916 during a resurvey of said bdy., is an iron post 3 ins. in diam., 10 ins. above ground, mkd. and witnessed as described in the official record, Thence,

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

- Chains. N. $0^{\circ} 01'$ W., on a true line bet. secs. 33 and 34, ($S\frac{1}{2}$)
 Over rolling desert, thru patches of dense undergrowth and scattering timber; asc. 20 ft. over S. slope.
- 7.60 Ridge, bears E. and W., desc. 15 ft.
- 31.12 Road, bears NW. and SE.
- 40.74 The original $\frac{1}{4}$ sec. cor., which is an ironwood post, 3 ins. sq. mkd. and witnessed as described in the official record. In place of and with old post alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$
 S 33 | S 34
 1931
- and dig
- pits, 18x18x12 ins., N. and S. 3 ft. dist.
- Thence, ~~to the line and enclosure,~~
- N. $0^{\circ} 21'$ E., on a true line bet. secs. 33 and 34, ($N\frac{1}{2}$)
 Over rolling land, thru patches of dense undergrowth and scattering timber.
- 39.71 The original pt for cor. of secs. 27, 28, 33 and 34, determined by disclosing in the center of earth mound the rotted end of the original post, witnessed by the indicated four old pits. At the true pt. set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. of secs. 27, 28, 33 and 34, with brass cap mkd.
- T 1 S R 2 W
 S 28 | S 27
 +
 S 33 | S 34
 1931
- from which
- A paloverde, 7 ins. in diam., bears N. 47° E., 535 lks. dist., mkd. T 1 S R 2 W S 27 B T.
- A mesquite, 5 ins. in diam., bears S. $29\frac{3}{4}^{\circ}$ E., 313 lks. dist., mkd. T 1 S R 2 W S 34 B T.
- A paloverde, 6 ins. in diam., bears N. $69\frac{1}{4}^{\circ}$ W., 377 lks. dist., mkd T 1 S R 2 W S 28 B T.
- No SW. tree available; dig pits, 18x18x12 ins. in each sec. 3 ft. dist.
- Land: rolling.
 Soil: gravelly, loam, 3rd rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same, with cacti.
-
- Thence, ~~to the line and enclosure,~~
- S. $89^{\circ} 51'$ E., on a true line bet. secs. 27 and 34, ($W\frac{1}{2}$)
 Over rolling desert, thru patches of dense undergrowth and scattering timber.
- 14.90 Wash, 10 lks. wide, course S.
- 39.92 The original $\frac{1}{4}$ sec. cor., which is a decayed post, 3 ins.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. sq., mks. illegible, in a mound of stone, 2 ft. base, 1 ft. high. In place of and with old remains of post alongside set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bed-rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A paloverde, 10 ins. in diam., bears S. $35\frac{1}{2}^{\circ}$ E., 183 lks. dist., mkd. $\frac{1}{4}$ S 34 B T.

A paloverde, 8 ins. in diam., bears N. 47° W., 99 lks. dist., mkd. $\frac{1}{4}$ S 27 B T.

Thence, on true line and measurement,

N. 88° 34' E., on a true line bet. secs. 27 and 34, ($E\frac{1}{2}$)

Over rolling desert, thru patches of dense undergrowth and scattering timber.

27.25 Wash, 10 lks. wide, course SW.

41.37 The cor. for secs. 26, 27, 34 and 35, heretofore described.

Land: rolling.

Soil: gravelly loam, 3rd rate.

Timber: paloverde and ironwood.


Undergrowth: same, with cactus and ocotillo.

From the cor. for secs. 27, 28, 33 and 34, heretofore described,

N. 0° 01' W., on a true line bet. secs. 27 and 28, ($S\frac{1}{2}$)

Over rolling desert, thru patches of dense undergrowth and scattering timber.

39.96 Pt. for original $\frac{1}{4}$ sec. cor., determined from pit indications and a rotted stub of post in center of mound of earth. At true pt. set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A paloverde, 5 ins. in diam., bears N. $82\frac{1}{2}^{\circ}$ E., 132 lks. dist., mkd. $\frac{1}{4}$ S 27 B T.

A paloverde, 5 ins. in diam., bears S. 50° W., 29 lks. dist., mkd. $\frac{1}{4}$ S 28 B T.

Thence, on true line and measurement,

N. 0° 11' W., on a true line bet. secs. 27 and 28, ($N\frac{1}{2}$)

Over hilly land, thru patches of dense undergrowth and scattering timber.

15.00 Ascend 65 ft. over rocky S. slope.

23.00 Ridge, bears E. and W.; descend 55 ft.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

- Chains.
26.80 Head of draw, course NE.; ascend 70 ft.
34.60 Spur, slopes NE.; descend 80 ft.
40.25 The original cor. for secs. 21, 22, 27 and 28, which is a granite stone, 6x8x8 ins. firmly set in a mound of stone, mkd. and witnessed as described in the official record. In place of and with stone alongside, set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for the cor. for secs. 21, 22, 27 and 28, with brass cap mkd.

T 1 S R 2 W
S 21 | S 22
+
S 28 | S 27
1931

from which

A paloverde, 5 ins. in diam., bears N. $49\frac{1}{2}^{\circ}$ E., 124 lks. dist., mkd. T 1 S R 2 W S 22 B T.

A paloverde, 3 ins. in diam., bears S. $21\frac{3}{4}^{\circ}$ E., 163 lks. dist., mkd. B T, only.

A paloverde, 4 ins. in diam., bears S. $37\frac{3}{4}^{\circ}$ W., 155 lks. dist., mkd. B T, only.

A paloverde, 24 ins. in diam., bears N. $22\frac{1}{2}^{\circ}$ W., 144 lks. dist., mkd. T 1 S R 2 W S 21 B T.

Land: rolling 1st half and hilly 2nd half.

Soil: gravelly and rocky 3rd and 4th rate.

Timber: paloverde, ironwood and mesquite.

Undergrowth: same, with ocotillo and cacti.

N. $89^{\circ} 54'$ E., on a true line bet. secs. 22 and 27.

Over broken hilly land, thru patches of dense undergrowth and scattering timber; asc. 75 ft. over NW. slope.

- 7.90 Spur, slopes NE.; descend 100 ft.
21.30 Wash, 30 lks. wide, course NE.; thence over rolling land.
40.24 (Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 22
 $\frac{1}{4}$ ———
S 27
1931

from which

An ironwood, 6 ins. in diam., bears S. $45\frac{3}{4}^{\circ}$ E., 134 lks. dist., mkd. $\frac{1}{4}$ S 27 B T.

A paloverde, 6 ins. in diam., bears N. 11° W., 50 lks. dist., mkd. $\frac{1}{4}$ S 22 B T.

- 64.70 Wash, 30 lks. wide, 2 ft. deep, course NW.
80.48 The cor. for secs. 22, 23, 26 and 27, hereafter referred to as

Land: 1st half hilly; 2nd half rolling.

Soil: gravelly, rocky 3rd rate.

Timber: paloverde and ironwood.

Undergrowth: mesquite, and same as above.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

chains.

From the cor. for secs. 21, 22, 27 and 28, hereinafter referred to as the old cor.,


N. 0° 19' E., on a true line bet. secs. 21 and 22, (S. 1/2)

Over hilly land, thru patches of dense undergrowth and scattering timber; descend 25 ft. over NW. slope.

9.00 Wash, 30 lks. wide, course NE.; asc. 90 ft.

17.50 Spur, slopes NE.; descend 130 ft.

39.75 Pt. for old 1/4 sec. cor., determined by stub of decayed post in a mound of earth and an iron-wood tree, 16 ins. mkd. 1/4 S B T, bears N. 31 1/2° E., 53 lks. dist. In place of old post, set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.



from which

An iron wood, 16 ins. in diam., bears N. 31 1/2° E., 53 lks. dist., remarked 1/4 S 22 B T. (Old BT)

A paloverde, 6 ins. in diam., bears N. 37 1/2° W., 267 lks. dist., mkd. 1/4 S 21 B T.

Thence, on a true line and perpendicular,


N. 0° 04' W., on a true line bet. secs. 21 and 22, (N. 1/2)

Over rolling land, thru patches of dense undergrowth and scattering timber.

3.80 Road, bears NW. and SE.

21.00 Wash, 30 lks. wide, course NW.; clearing and house bears W. about 7 chs. dist.

40.20 (Proportional dist. as determined by double proportion, controled on the N. by the 1/4 sec. cor. for secs. 15 and 16; on the E. by the 1/4 sec. cor. for secs. 15 and 22; on the S. by the 1/4 sec. cor. for secs. 21 and 22; and on the W. by the 1/4 sec. cor. for secs. 21 and 28) Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for the cor. of secs. 15, 16, 21 and 22, with brass cap mkd.

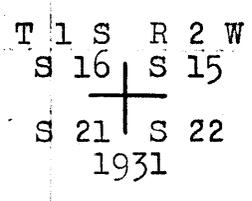

from which

A paloverde, 10 ins. in diam., bears N. 14 1/4° E., 148 lks. dist., mkd. T 1 S R 2 W S 15 B T.

A paloverde, 4 ins. in diam., bears S. 68 1/2° E., 344 lks. dist., mkd. T 1 S R 2 W S 22 B T.

A mesquite, 12 ins. in diam., bears S. 40° W., 112 lks. dist., mkd. T 1 S R 2 W S 21 B T.


A paloverde, 6 ins. in diam., bears N. 12 1/4° W., 52 lks. dist., mkd. T 1 S R 2 W S 16 B T.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	<p>Land: rolling Soil: gravelly, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cacti and ocotillo.</p> <hr/> <p>Thence,</p> <p>S. 89° 41' E., on a true line, bet. secs. 15 and 22, (W. $\frac{1}{2}$)</p> <p>Over rolling desert, thru patches of dense undergrowth and scattering timber.</p> <p>22.99 Wash, 1 ch. wide, 3 ft. deep, course NW.</p> <p>33.30 Road, bears NW. to junction with another road and SE.</p> <p>40.05 The original $\frac{1}{4}$ sec. cor., which is the stub of a decayed post, in a mound of earth with indications of old pits, E. and W. In place of old stub set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>S 15 <hr style="width: 50px; margin: 0 auto;"/>S 22 1931</p> </div> <p style="text-align: right;">from which</p> <p>A A paloverde, 10 ins. in diam., bears S. 12$\frac{1}{2}$° W., 213 lks. dist., mkd. $\frac{1}{4}$ S 22 B T.</p> <p>A paloverde, 6 ins. in diam., bears N. 26$\frac{1}{2}$° W., 30 lks. dist., mkd. $\frac{1}{4}$ S 15 B T.</p> <hr/> <p>Thence, on true line and bearing east,</p> <p>N. 89° 44' E., on a true line bet. secs. 15 and 22, (E. $\frac{1}{2}$)</p> <p>Over rolling desert, thru patches of dense undergrowth, and scattering timber.</p> <p>8.25 Bend in road, bears NW. and NE.</p> <p>13.20 Wash, 30 lks. wide, course SW.</p> <p>40.04 The cor. for secs. 14, 15, 22 and 23, located here</p> <p>Land: rolling. Soil: gravelly, loam, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with cacti and ocotillo.</p> <hr/> <p>From the cor. for secs. 15, 16, 21 and 22, bearing</p> <p>N. 0° 09' W., on a true line bet. secs. 15 and 16, (S. $\frac{1}{2}$)</p> <p>Over rolling and hilly land, thru patches of dense undergrowth and scattering timber.</p> <p>34.85 Wash, 1 ch. wide, 4 ft. deep, course SW.</p> <p>9.45 Road, bears NW. and SE.</p> <p>12.80 Leave rolling land asc. 105 ft. over SW. slope.</p> <p>35.75 Spur, slopes W.; descend 85 ft.</p> <p>40.20 The original $\frac{1}{4}$ sec. cor, which is a granite stone, 8x12x16</p>
---------	---

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. ins. firmly set, mkd. and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A paloverde, 3 ins. in diam., bears N. 15° E., 41 lks. dist., mkd. $\frac{1}{4}$ S 15 B T.

A paloverde, 6 ins. in diam., bears S. 54° W., 88 lks. dist., mkd. $\frac{1}{4}$ S 16 B T.


Thence, on a true line bet. sec. 15 and 16,

N. 1° 16' E., on a true line bet. secs. 15 and 16, (N $\frac{1}{2}$)

Over hilly land, thru patches of dense undergrowth and scattering timber; desc. 35 ft. over NW. slope.

- 13.40 Wash, 20 lks. wide, course NW.
- 19.50 Drain, course W.; ascend 20 ft.
- 28.50 Spur, slopes SW.; descend 40 ft.
- 33.55 Draw, course W.; asc. 20 ft.
- 34.15 Road, bears E. and W.

39.58 The original cor. for secs. 9, 10, 15 and 16, which is a granite stone, 8x14x10 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old cor. alongside, set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bed rock, remaining length in a mound of stone, for the cor. of secs. 9, 10, 15 and 16, with brass cap mkd.



from which

A paloverde, 6 ins. in diam., bears N. 79 $\frac{1}{4}$ ° E., 100 lks. dist., mkd. T 1 S R 2 W S 10 B T.

An ironwood, 6 ins. in diam., bears S. 43 $\frac{3}{4}$ ° E., 298 lks. dist., mkd. T 1 S R 2 W S 15 B T.

A paloverde, 8 ins. in diam., bears S. 19° W., 386 lks dist., mkd., T 1 S R 2 W S 16 B T.

A paloverde, 5 ins. in diam., bears N. 52 $\frac{1}{2}$ ° W., 29 lks. dist., mkd. T 1 S R 2 W S 9 B T.

Land: S. $\frac{1}{2}$ rolling; N. $\frac{1}{2}$ hilly.
 Soil: gravelly, rocky loam, 3rd rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same, with greasewood, cacti and ocotillo.

Thence,

Resurvey of the Subdivisions of Twp 1 S., Rg. 2 W.


Chains.	Retrace, S. 89° 25' E., on a true line bet. secs. 10 and 15. Over hilly desert land, thru patches of dense undergrowth and scattering timber; asc. 45 ft. over SW. slope.
9.60	Spur, slopes S.; descend 40 ft.
40.97	(Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4} \frac{S 10}{S 15}$ 1931 from which A paloverde, 4 ins. in diam., bears S. 24 $\frac{1}{2}$ ° E., 197 lks. dist., mkd. $\frac{1}{4}$ S 15 B T An ironwood, 5 ins. in diam., bears N. 66 $\frac{1}{2}$ ° W., 157 lks. dist., mkd. $\frac{1}{4}$ S 10 B T An ironwood, 5 ins. in diam., bears S. 60° W., 137 lks. dist., mkd. $\frac{1}{4}$ S 10 B T
48.00	Road, bears NE. and SW.
73.00	Road, bears NW. and SE.
80.50	Wash, 80 lks. wide, 3 ft. deep, course NW.
81.94	The cor. for secs. 10, 11, 14 and 15, Land: W. $\frac{1}{2}$, hilly; E. $\frac{1}{2}$ rolling. Soil: gravelly, rocky loam, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with greasewood, catclaw and cacti.
	----- From the cor. for secs. 9, 10, 15 and 16, N. 2° 06' E., on a true line bet. secs. 9 and 10. Over hilly desert land, thru patches of dense undergrowth and scattering timber; asc. 25 ft. over S. slope.
6.95	Spur, slopes W.; desc. 80 ft.
17.50	Wash, 15 lks. wide, course NW.; asc. 20 ft. to $\frac{1}{4}$ cor.
22.20	Road, bears NE. and SW.
39.94	(Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4} \frac{S 9 S 10}{1931}$ from which A paloverde, 5 ins. in diam., bears N. 11° E., 132 lks. dist., mkd. $\frac{1}{4}$ S 10 B T. A paloverde, 6 ins. in diam., bears N. 21 $\frac{1}{2}$ ° W., 35 lks. dist., mkd. $\frac{1}{4}$ S 9 B T. Asc. 80 ft. over SE. slope.
55.00	Top of knoll; descend 180 ft. over rocky N. slope.
75.00	High bank of wash, bears NW. and SE.; desc. 35 ft.
77.90	Wash, course NW.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.

79.50 Right bank of wash, 3 ft. high, bears NW. and SE.

79.88 (Proportional dist. as 1, determined by double proportion, controlled on the N. by the closing cor. for secs. 3 and 4; on the E. by the $\frac{1}{4}$ sec. cor. for secs. 3 and 10; on the S. by the cor. for secs. 9, 10, 15 and 16; and on the W. by the cor. for secs. 5, 6, 7 and 8.) At the pt. thus determined, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. for secs. 3, 4, 9 and 10, with brass cap mkd.

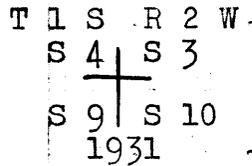

from which

A mesquite, 12 ins. in diam., bears N. $54\frac{1}{2}^{\circ}$ E., 197 lks. dist., mkd. T 1 S R 2 W S 3 B T.

A paloverde, 5 ins. in diam., bears S. $43\frac{1}{2}^{\circ}$ E., 123 lks. dist., mkd. T 1 S R 2 W S 10 B T.

A paloverde, 4 ins. in diam., bears S. $29\frac{3}{4}^{\circ}$ W., 235 lks. dist., mkd. T 1 S R 2 W S 9 B T.

A paloverde, 6 ins. in diam., bears N. $25\frac{1}{2}^{\circ}$ W., 38 lks. dist., mkd. T 1 S R 2 W S 4 B T.

Land: hilly.

Soil: rocky, gravelly loam, 4th rate.

Timber: paloverde, ironwood and mesquite.

Undergrowth: same, with greasewood, cactii and catclaw.

E. base,

S. $89^{\circ} 25'$ E., on a true line bet. secs. 3 and 10, ($W\frac{1}{2}$)

Over rolling and broken desert, thru patches of dense undergrowth and scattering timber; asc. 25 ft. over NW. slope.

4.10 Top of dirt bank, bears NW. and SE.

18.60 Road, bears NW. and SE.


22.80 Road, bears NW. and SE.

26.30 Wash, 10 lks. wide, course N.

37.80 Wash, 15 lks. wide, course N.

39.50 Wash, 10 lks. wide, course N.

40.16 The original $\frac{1}{4}$ sec. cor., which is an ironwood post, 2 ins. sq. 16 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old cor. alongside set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A paloverde, 7 ins. in diam., bears S. 14° W., 248 lks. dist., mkd. $\frac{1}{4}$ S 10 B T.

A paloverde, 5 ins. in diam., bears N. 54° W., 337

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	lks. dist., mkd. $\frac{1}{4}$ S. 3 B T.

	Thence, on a true line and measurement,
	S. 89° 43' E., on a true line bet. secs. 3 and 10, (E. $\frac{1}{2}$)
	Over rolling land, thru patches of desert undergrowth and scattering timber.
8.60	Road, bears NE. and SW.
12.90	Wash, 10 lks. wide, course N.
14.80	New road clearing, bears NE. and SW.
23.00	Wash, 20 lks. wide, course NW.
31.10	Road, bears NE. and SW.
39.99	The cor. for secs. 2, 3, 10 and 11, heretofore described.
	Land: Rolling.
	Soil: gravelly, rocky loam, 3rd rate.
	Timber: paloverde, ironwood and mesquite.
	Undergrowth: same, with greasewood, catclaw and cacti.

	From the cor. for secs. 3, 4, 9, and 10, herebefore
	described,
	N. 0° 12' E., on a true line bet. secs. 3 and 4.
	Over level bottom land, thru large patches of dense undergrowth and scattering timber.

7.50	Asc. 10 ft. over dirt bank, bearing NE. and SE.
13.10	Across top of said bank, bearing NE. and SW.; desc. 10 ft. to old overflow river bottom.
29.60	Leave old overflow land and enter dry side channel of Gila River, course SW.
32.50	Leave side channel; enter old overflow land.
39.91	(Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.
	$\frac{1}{4}$
	S 4 S 3
	1931
	from which
	A cottonwood, 8 ins. in diam., bears N. 51 $\frac{1}{2}$ ° E., 181 lks. dist., mkd. $\frac{1}{4}$ S 3 B T.
	A mesquite, 4 ins. in diam., bears S. 72 $\frac{1}{2}$ ° E., 126 lks. dist., mkd. $\frac{1}{4}$ S 3 B T.
	Note: There is no tree available W. of line; no stones for a mound and pits would not be practicable in the sand; so used two trees E. of line.
63.08	Left bank of Gila River proper, bears E. and W.
65.90	Center of channel, water 3 $\frac{1}{2}$ ft. deep., course W.
68.70	Right bank of Gila River, bears E. and W.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. Thence over river bottom, thru dense undergrowth.
 72.40 Leave undergrowth; bears E. and W.
 79.96 Intersect the Gila and Salt River Base Line at the closing cor. for secs. 3 and 4, hereinbefore described.

Land: level bottom.
 Soil: sandy, 2nd and 3rd rate.
 Timber: mesquite, paloverde, cottonwood and catclaw.
 Undergrowth: same, with willow; tamarack and roses.

The cor. for secs. 32 and 33 on the S. bdy. of Tp., reconstructed by W.H. Thorn, U.S.S., during a resurvey of said bdy. in 1916, is an iron post, 3 ins. in diam., mkd. and witnessed as described in the official record.

Thence,


N. 0° 07' E., on a true line bet. secs. 32 and 33.

Over hilly desert land, thru patches of dense undergrowth and scattering timber; ascend 45 ft. over S. slope.

12.60 Ridge, bears E. and W.; descend 35 ft.

38.90 Wash, 40 lks. wide, 2 ft. deep, course W.

40.13 (Proportional dist.) Set an iron post, 3 ft. long, 1 in in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which


A paloverde, 10 ins. in diam., bears N. 19° E., 127 lks. dist., mkd. $\frac{1}{4}$ S 33 B T.

A paloverde, 8 ins. in diam., bears N. 8 $\frac{1}{2}$ ° W., 153 lks. dist., mkd. $\frac{1}{4}$ S 32 B T.

58.00 Wash, 15 lks. wide, course SW.

77.50 Road, bears E. and W.

80.26 Pt. for original cor. for secs. 28, 29, 32 and 33, determined from old stub of post, in a mound of earth, with indications of 4 pits. At this pt. set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. of secs. 28, 29, 32 and 33, with brass cap mkd.



from which

A mesquite, 6 ins. in diam., bears N. 38 $\frac{1}{4}$ ° E., 266 lks. dist., mkd. T 1 S R 2 W S 28 B T.

A paloverde, 8 ins. in diam., bears S. 52 $\frac{1}{4}$ ° E., 98 lks. dist., mkd. T 1 S R 2 W S 33 B T.

A paloverde, 8 ins. in diam., bears S. 84 $\frac{3}{4}$ ° W., 204 lks. dist., mkd. T 1 S R 2 W S 32 B T.

A paloverde, 10 ins. in diam., bears N. 15° W., 318 lks. dist., mkd. T 1 S R 2 W S 29 B T.

Resurvey of the Subdivisions of T_{p.} 1 S., R_{g.} 2 W.

Chains.	<p>Land: S. $\frac{1}{2}$ hilly; N $\frac{1}{2}$ rolling. Soil: gravelly loam, 3rd rate. Timber: paloverde, mesquite, ironwood and catclaw. Undergrowth: same, with greasewood, cacti and ocotilla.</p> <hr/> <p>N. 89° 36' E., on a true line bet. secs. 28 and 33, (W. $\frac{1}{2}$) Over rolling land, thru patches of dense undergrowth and scattering timber.</p>
23.80	Wash, 10 lks. wide, course SW.
33.00	Old road, bears N. and S.
37.30	Road, bears NW. and SE.
40.12	<p>The original pt. for $\frac{1}{4}$ sec. cor., determined from rotted stub of post in mound of earth with indications of pits. In place of and with rotted stub alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>S 28 $\frac{1}{4}$----- S 33 1931</p> </div> <p style="text-align: right;">from which</p> <p>A paloverde, 6 ins. in diam., bears N. 79$\frac{3}{4}$° E., 134 lks. dist., mkd. $\frac{1}{4}$ S 28 B T.</p> <p>A paloverde, 10 ins. in diam., bears S. 71° E., 265 lks. dist., mkd. $\frac{1}{4}$ S 33 B T.</p> <hr/> <p>Thence on true line and measurement, S. 89° 11' E., on a true line bet. secs. 28 and 33, (E. $\frac{1}{2}$) Over rolling desert land, thru patches of dense undergrowth and scattering timber.</p>
19.45	Wash, 20 lks. wide, course SW.
39.87	<p>The cor. for secs. 27, 28, 33 and 34, heretofore described.</p> <p>Land: rolling. Soil: gravelly loam, 2nd and 3rd rate. Timber: paloverde, mesquite and ironwood. Undergrowth: same, with greasewood, cacti and ocotilla.</p> <hr/> <p>From the cor. for secs. 28, 29, 32 and 33, heretofore described, N. 0° 10' W., on a true line bet. secs. 28 and 29, (S. $\frac{1}{2}$) Over hilly desert land, thru patches of dense undergrowth and scattering timber; asc. 20 ft. over SW. slope.</p>
37.35	Spur, slopes NW.; descend 15 ft.
40.03	<p>The original $\frac{1}{4}$ sec. cor., which is a granite stone, 2x14 x20 ins., firmly set in a mound of stone, mkd. and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long, 1 in. in diam., 5 ins. in the ground to bed rock, remaining length in a mound of stone, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.</p>

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. 1/4

S 29 | S 28
1931

from which

A paloverde, 8 ins. in diam., bears S. 80³/₄° E., 147 lks. dist., mkd. 1/4 S 28 B T.

A paloverde, 5 ins. in diam., bears N. 84° W., 36 lks. dist., mkd. 1/4 S 29 B T.

Thence, on same line as above, N. 0° 05' W., on a true line bet. secs. 28 and 29, (N. 1/2)

Over rolling land, thru patches of dense undergrowth and scattering timber; desc. 15 ft. over NW. slope.

3.50 Road, bears NW. to Arizona, U.S. Highway No. 80 and SE. to Rainbow Valley.

5.50 Draw, course NW.; asc. 30 ft.

14.60 Spur, slopes SW.; desc. 45 ft. to

40.04 The original cor. for secs. 20, 21, 28 and 29, which is a partly decayed post, 2 ins. sq. 18 ins. above ground, mks. illegible; indications of old pits, N. and S.; from which an ironwood tree, 10 ins. in diam., bears S. 84¹/₄° E., 28 lks. dist. axe-scar discernible. In place of and with old cor. alongside, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. of secs. 20, 21, 28 and 29, with brass cap mkd.

T 1 S R 2 W
S 20 | S 21
+
S 29 | S 28
1931

from which

An ironwood, 12 ins. in diam., bears N. 86° E., 28 lks. dist., mkd. T 1 S R 2 W S 21 B T.

An ironwood, 10 ins. in diam., bears S. 84¹/₄° E., 28 lks. dist., mkd. T 1 S R 2 W S 28 B T. (Old BT remarked)

A mesquite, 6 ins. in diam., bears N. 43° W., 90 lks. dist., mkd. T 1 S R 2 W S 20 B T.

No other trees available; dig pits, 18x18x12 ins. in each sec. 3 ft. dist.

Land: rolling.
Soil: gravelly loam, 3rd rate.
Timber: ironwood, paloverde and mesquite.
Undergrowth: same, with greasewood, catclaw and cacti.

S. 89° 56' E., on a true line bet. secs. 21 and 28, (W. 1/2)

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

33.15 Wash, 25 lks. wide, course NW.

40.04 The original 1/4 sec. cor., which is a granite stone, 5x8x

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. 12 ins. above ground, firmly set, mkd and witnessed as described in the official record. In place of and with old stone alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.

S 21

1/4 S 28
1931

from which

A paloverde, 6 ins. in diam., bears N. 1° E., 79 lks. dist., mkd. 1/4 S 21 B T.

A paloverde, 4 ins. in diam., bears S. 56° E., 72 lks. dist., mkd. 1/4 S 28 B T.

Thence on new line and measured, set,

S. 89° 53' E., on a true line bet. secs. 21 and 28, (E. 1/2)

Over hilly desert land, thru patches of dense undergrowth and scattering timber; 145 ft. over a W. slope.

24.10 Spur, slopes NE.; descend 115 ft.

38.40 Wash, 20 lks. wide, course NE.

40.05 The cor. for secs. 21, 22, 27 and 28, heretofore established.

Land: W 1/2 rolling; E 1/2 hilly.

Soil: gravelly loam, 3rd rate.

Timber: paloverde, ironwood and mesquite.

Undergrowth: same, with greasewood, catclaw and cacti.

From the cor. for secs. 20, 21, 28 and 29, heretofore established,

N. 0° 03' E., on a true line bet. secs. 20 and 21.

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

10.45 Wash, 20 lks. wide, course NW.

40.04 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.

1/4
S 20 | S 21

1931

from which

A paloverde, 4 ins. in diam., bears N. 26 1/4° E., 143 lks. dist., mkd. 1/4 S 21 B T.

A paloverde, 5 ins. in diam., bears N. 34 1/2° W., 142 lks. dist., mkd. 1/4 S 20 B T.


73.16 Road, bears NE. and SW.

80.08 The pt. for the old cor. for secs. 16, 17, 20 and 21, determined by the rotted stub of old post in a mound of earth with indications of old pits N. and S. In place of old rotted stub set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 16, 17, 20 and 21, with brass cap mkd.

BOOK 3930

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.

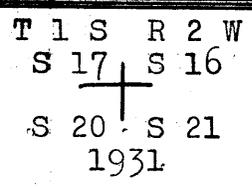

pits, 18x18x12 ins., in each sec. 3 ft. dist. and dig.

Land: rolling.
 Soil: gravelly loam, 2nd and 3rd rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same with catclaw and cacti.


Thence,
 S. 89° 50' E., on a true line bet. secs. 16 and 21, (W. 1/2)

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

11.50 Road, bears NE. and SW.

25.30 Road, bears NW. and SE.

40.02 The original 1/4 sec. cor., which is a granite stone, 6x10 x8 ins. above ground, firmly set, mkd. and witnessed as described by the official record. In place of and with old cor. alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for the 1/4 sec. cor., with brass cap mkd.



from which

A paloverde, 5 ins. in diam., bears N. 42 1/4° E., 214 lks. dist., mkd. 1/4 S 16 B T.

A paloverde, 5 ins. in diam., bears S. 70 1/2° E., 181 lks. dist., mkd. 1/4 S 21 B T.

Thence, on new line
 S. 89° 33' E., on a true line bet. secs. 16 and 21, (E. 1/2)

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

22.65 Road, bears NW. and SE.

28.25 Road, bears NW. and SE.

32.15 Wash, 100 lks. wide, course NW.

36.65 Same wash, 120 lks. wide, course SW.

40.09 The cor. for secs. 15, 16, 21 and 22, here before

Land: rolling.
 Soil: gravelly loam, 2nd and 3rd rate.
 Timber: paloverde, mesquite, catclaw and ironwood.
 Undergrowth: same, with cacti, greasewood and ocotillo.


From the cor. for secs. 16, 17, 20 and 21, here before

N. 0° 03' E., on a true line bet. secs. 16 and 17, (S. 1/2)

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. Over rolling desert land, thru patches of dense undergrowth and scattering timber.

40.00 The original 1/4 sec. cor., which is an ironwood post, 2 ins. sq. 20 ins. long, lying on a mound of earth; rotted stub of post in center of mound, indications of pits N. and S. In center of mound with old post alongside, set an iron post, 3 ft. long. 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.



from which

A paloverde, 14 ins. in diam., bears N. 88 1/2° E., 147 lks. dist., mkd. 1/4 S 16 B T.

A paloverde, 6 ins. in diam., bears N. 74 1/2° W., 271 lks. dist., mkd. 1/4 S 17 B T.

Thence on a true line and distance

N. 0° 10' W., on a true line bet. secs. 16 and 17, (N. 1/2)


Over rolling desert land thru patches of dense undergrowth and scattering timber.

0.80 Wash, 10 lks. wide, course W. and NW.

16.60 Road, bears NW. and SE.

34.00 Old road, bears W. and NE.

39.89 (Proportional distances determined by double proportion controlled on the N. by the closing cor. for secs. 4 and 5 on the Gila and Salt River Base Line; on the E. by the cor. for secs. 9, 10, 15 and 16; on the S. by the 1/4 sec. cor for secs. 16 and 17; and on the W. by the cor. for secs. 7, 12, 13 and 18 - on the W. bdy. of the township.) At the pt. thus determined set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. for secs., 8, 9, 16 and 17, with brass cap mkd.



from which

A mesquite, 16 ins. in diam., bears N. 42 1/2° E., 383 lks. dist., mkd. T 1 S R 2 W S 9 B T.

A mesquite, 14 ins. in diam., bears S. 49 1/2° W., 173 lks. dist., mkd. T 1 S R 2 W S 17 B T.

A mesquite, 18 ins. in diam., bears N. 67° W., 145 lks. dist., mkd. T 1 S R 2 W S 8 B T.

No SE. tree available; dig pits, 18x18x12 ins. in each sec., 3 ft. dist. from the cor.

Land: rolling.
Soil: gravelly loam, 2nd and 3rd rate.
Timber: paloverde, ironwood and mesquite.
Undergrowth: same, with catchlaw, cacti and ocotillo.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. ~~Pass~~,
 S. 89° 46' E., on a true line bet. secs. 9 and 16.
 Over rolling desert land, thru patches of dense undergrowth and scattering timber.

11.50 W. bank of wash, bears NE. and SW.

16.10 E. bank of same wash, bears N. and S.

39.90 Wash, 20 lks. wide, course NW.

40.47 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 9
 $\frac{1}{4}$ —————
 S 16
 1931

from which

A mesquite, 10 ins. in diam., bears N. 13° E., 70 lks. dist., mkd. $\frac{1}{4}$ S 9 B. T.

A mesquite, 14 ins. in diam., bears S. 24° E., 273 lks. dist., mkd. $\frac{1}{4}$ S 16 B. T.

46.30 Wash, 30 lks. wide, course NW.

49.00 Wash, 30 lks. wide, course NW.

57.40 Road, bears NE. and SW.

61.00 Road, bears N. and SW.

62.60 Clearing for new road, bears NE. and SW.

72.10 Road, bears NW. and SE.

80.94 The cor. for secs. 9, 10, 15 and 16, heretofore described.

Land: rolling.
 Soil: gravelly loam, 3rd rate.
 Timber: paloverde, mesquite and ironwood.
 Undergrowth: same, with greasewood, catclaw, cacti and ocotilla.

From the cor. for secs. 8, 9, 16 and 17, heretofore described,

N. 2° 39' E., on a true line bet. secs. 8 and 9.

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

25.30 Road, bears NE. and SW.

34.80 Homesteaders shack, bears E. about 350 lks. dist.

37.00 Descend 55 ft. over embankment bearing NW. and SE. to bottom of wash.

38.00 Wash, course NW.

39.48 Leave wash over embankment 4 ft. high, bearing NW. and SE.

39.93 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd.

Resurvey of the Subdivisions of T. 1 S., Rg. 2 W.

Chains.

$\frac{1}{4}$

S 8 | S 9

1931

from which

A black willow, 8 ins. in diam., bears S. 42° E., 61 lks. dist., mkd. $\frac{1}{4}$ S 9 B T.

A black willow, 24 ins. in diam., bears S. $36\frac{1}{4}^\circ$ W., 348 lks. dist., mkd. $\frac{1}{4}$ S 8 B T.

40.60 Left bank of old flood area, bears NE. and SW.

70.35 Road, bears NE. and SW.

79.86 (Proportional dist.) as determined by double proportion, controlled on the N. by the closing cor. for secs. 4 and 5 on the Gila and Salt River Base Line; on the E. by the $\frac{1}{4}$ sec. cor. for secs. 3 and 10; on the S. by the $\frac{1}{4}$ sec. cor. for secs. 16 and 17; and on the W. by the cor. for secs. 5, 6, 7 and 8. At the pt. thus determined, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. for secs. 4, 5, 8 and 9, with brass cap mkd.

T 1 S. R 2 W

S 5 | S 4

S 8 | S 9

1931

from which

A cottonwood, 30 ins. in diam., bears S. $41\frac{3}{4}^\circ$ E., 227 lks. dist., mkd. T 1 S R 2 W S 9 B T.

A mesquite, 4 ins. in diam., bears S. $37\frac{3}{4}^\circ$ W., 195 lks. dist., mkd. T 1 S R 2 W S 8 B T.

No other trees available, dig pits, 18x18x12 ins. in each sec. 3 ft. dist.

Land: rolling.

Soil: gravelly, sandy loam, 3rd rate.

Timber: mesquite, paloverde, willow and cottonwood.

Undergrowth: same, with greasewood and catclaw.

N. $89^\circ 54'$ E., on a true line, bet. secs. 4 and 9.

Over rolling desert land, thru patches of dense undergrowth and scattering timber; in old river flood area.

40.16 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 4

$\frac{1}{4}$ ———

S 9

1931

from which

A mesquite, 8 ins. in diam., bears N. $78\frac{1}{2}^\circ$ E., 529 lks. dist., mkd. $\frac{1}{4}$ S 4 B T.

A cottonwood, 8 ins. in diam., bears S. $34\frac{1}{2}^\circ$ E., 311 lks. dist., mkd. $\frac{1}{4}$ S 9 B T.

40.80

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains
 45.90 Left bank of old flood area, bears NE. and SW.; thence over broken spurs and washes along NW. slope.
 73.14 Edge of small clearing, bears N. and S.
 75.00 E. edge of clearing, bears NW. and SE.
 75.10 W. bank of wash, 35 ft. high, bears NW. and SE.
 77.00 Wash, course NW.
 79.90 E. bank of wash, 4 ft. high, bears NW. and SE.
 80.32 The cor. for secs. 3, 4, 9 and 10, heretofore described.
 Land: rolling.
 Soil: gravelly, sandy loam, 2nd and 3rd rate.
 Timber: mesquite, cottonwood, paloverde and ironwood.
 Undergrowth: same, with catclaw, cacti and willow.

From the cor. for secs. 4, 5, 8 and 9, heretofore described,

North, on a true line, bet. secs. 4 and 5.

Over rolling bottom land of old flood area of Gila River, thru patches of dense undergrowth and scattering timber.

39.86 (Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cottonwood, 6 ins. in diam., bears N. 32° E., 9 lks. dist., mkd. $\frac{1}{4}$ S 4 B T.

A cottonwood, 8 ins. in diam., bears N. 50° W., 79 lks. dist., mkd. $\frac{1}{4}$ S 5 B T.

47.25 Left bank of Gila River channel, 6 ft. high, bears NE. and SW.
 49.75 Center of channel of Gila River, water 5 ft. deep, course SW.
 54.25 Right bank of Gila River, 40 ft. high, bears NE. and SW. thence over cultivated farm lands.
 69.35 Fence, bears NE. and SW.
 69.45 Road, bears NE. and SW.
 69.75 Irrigation canal, 12 ft. wide, course SW.
 69.95 Fence, bears NE. and SW.
 79.50 Fence, bears E. and W. along highway right-of-way.
 79.96 Intersect the Gila and Salt River Base Line at the closing cor. for secs. 4 and 5, hereinbefore described.

Land: S. $\frac{1}{2}$ mile, rolling river bottom and flood area;
 N. $\frac{1}{2}$ mile, level farming land.
 Soil: S $\frac{1}{2}$ sandy, 3rd rate; N $\frac{1}{2}$ sandy loam, 1st rate.
 Timber: cottonwood; undergrowth: willow and tamarack.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.

The cor. for secs. 31 and 32 only, on the S. bdy. of township, reconstructed by W.H. Thorn, U.S.S., in 1916 during a resurvey of said bdy., is an iron post 3 ins. in diam., 10 ins. above ground, mkd. and witnessed as described in the official record,

Thence,

N. 0° 49' E., on a true line bet. secs. 31 and 32, (S. 1/2)

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

2.00 Road, bears E. and W.


11.43 Wash, 1 ch. wide, course W.

22.00 Road, bears NE. and SW.

30.85 Well and pump house, bears W. about 50 lks. dist.

31.90 House about 2 chs. W. of line.

39.97 The pt. for the original 1/4 sec. cor., determined from indications of pits and mound of earth, already accepted as such by local survey. In center of mound set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for the 1/4 sec. cor., with brass cap mkd.



and dig

pits, 18x18x12 ins. N. and S. of cor., 3 ft. dist.

Thence on new line and measure out,

N. 1° 18' W., on a true line bet. secs. 31 and 32, (N. 1/2)

Over rolling land, thru patches of dense undergrowth, and scattering timber.


1.00 Road, bears E. and W.

5.00 House and clearing bear W. about 10.50 chs.

16.50 Wash, 60 lks. wide, course NW.

33.00 Wash, 20 lks. wide, course W.

40.57 The original cor. for secs. 29, 30, 31 and 32, which is decayed remains of post on mound of earth with indications of pits. At this pt. set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for the cor. of secs. 29, 30, 31 and 32, with brass cap mkd.



and dig

pits, 18x18x12 ins. in each sec. 3 ft. dist.

Land: rolling.

Soil: decomposed granite, 2nd rate.

Timber: paloverde, ironwood and mesquite.

Undergrowth: same, with greasewood, catclaw and cacti.

Resurvey of the Subdivisions of Twp. 1 S., Rg. 2 W.

Chains. Thence,

N. 89° 51' E., on a true line bet. secs. 29 and 32, (W. $\frac{1}{2}$)
 Over rolling desert land, thru patches of dense undergrowth and scattering timber.

40.02 Pt. for original $\frac{1}{4}$ sec. cor., determined by rotted stub of old post in a mound of earth, indications of old pits. At this pt. set an iron post, 3 ft. long, 1 in. in diam. 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 29

 S 32
 1931

from which

A mesquite, 10 ins. in diam., bears S. 22 $\frac{1}{2}$ ° E; , 421 lks. dist., mkd. $\frac{1}{4}$ S 32 B T.

A paloverde, 6 ins. in diam., bears N. 38 $\frac{1}{2}$ ° W., 108 lks. dist., mkd. $\frac{1}{4}$ S. 29 B.T.

Thence, on a true line and measurement,

S. 89° 23' E., on a true line bet. secs. 29 and 32, (E. $\frac{1}{2}$)
 Over rolling land thru patches of dense undergrowth and scattering timber.

45.00 Wash, 30 lks. wide, course SW.

60.60 Wash, 20 lks. wide, 3 ft. deep, course S.

40.51 The cor. for secs. 28, 29, 32 and 33, here before described.

Land: rolling.
 Soil: gravelly loam, 2nd rate.
 Timber: paloverde, mesquite and ironwood.
 Undergrowth: same, with greasewood, cacti and ocotillo.

From the cor. for secs. 29, 30, 31 and 32, here before described,

S. 89° 54' W., on a true line bet. secs. 30 and 31.

Over rolling desert land, thru patches of dense undergrowth and scattering timber.

8.60 Road, bears N. and S.

27.20 Road, bears NE. and SW. in a wash, 4 chs. wide, course NW.

31.60 Concrete block house, bears N. about 22 chs. dist.

35.40 Wash, 25 lks. wide, course NW.

39.74 (Proportional dist.) 1. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 30

 S 31
 1931

from which

A paloverde, 8 ins. in diam., bears S. 71 $\frac{1}{2}$ ° W., 128 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. A paloverde, 10 ins. in diam., bears N. 33° W., 217 lks. dist., mkd. $\frac{1}{4}$ S 30 B T.

79.35 The cor. for secs. 25, 30, 31 and 36 on the W. bdy. of township, hereinbefore described.

Land: rolling.
Soil: gravelly loam, 3rd. rate.
Timber: paloverde, mesquite and ironwood.
Undergrowth: same, with greasewood, cactia and catclaw.


From the cor. for secs. 29, 30, 31 and 32, hereinbefore described,

N. 0° 26' E., on a true line bet. secs. 29 and 30, (S. $\frac{1}{2}$)

Over rolling desert land thru patches of dense undergrowth and scattering timber.

36.30 Dry well being dug bears E. about 5.50 chs. dist.

40.05 The original $\frac{1}{4}$ sec. cor., which is an ironwood post, 2 ins. sq. 20 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old post alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



and dig

two pits, 18x18x12 ins. N. and S. of cor., 3 ft. dist.

Thence, on a true line bet. secs. 29 and 30,

N. 0° 31' E., on a true line bet. secs. 29 and 30, (N. $\frac{1}{2}$)

Over rolling land thru patches of dense undergrowth and scattering timber.


2.30 Road, bears NE. and SW.

11.96 Road, bears NE. and SW.

14.50 Road, bears NE. and SW.

38.65 Road, bears E. and W.

38.78 The original cor. for secs. 19, 20, 29 and 30, which is a mesquite post, 4 ins. sq. 18 ins. above ground, mkd. and witnessed as described in the official record. In place of and with old post alongside, set an iron post 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for the cor. of secs. 19, 20, 29 and 30, with brass cap mkd.



from which

A mesquite, 6 ins. in diam., bears N. 19 $\frac{1}{4}$ ° E., 134 lks. dist., mkd. T 1 S R 2 W S 20 B T.

A mesquite, 10 ins. in diam., bears S. 25 $\frac{1}{2}$ ° E., 228 lks. dist., mkd. T 1 S R 2 W S 29 B T.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. A mesquite, 10 ins. in diam., bears S. 81 $\frac{1}{2}$ ° W., 406 lksl dist., mkd. T 1 S R 2 W S 30 B T.

A mesquite, 24 ins. diam., bears N. 1 $\frac{1}{2}$ ° W., 428 lks. dist., mkd. T.1 S R 2 W S 19 B T.

Land: rolling.
Soil: gravelly loam, 3rd rate.
Timber: mesquite, paloverde and ironwood.
Undergrowth: same, with greasewood, cacti and catclaw

Thence
S. 89° 52' E., on a true line bet. secs. 20 and 29, (W. $\frac{1}{2}$)
Over rolling desert land thru patches of dense undergrowth and scattering timber.


11.75 Road, bears N. and SW.

17.20 Road, bears NW. and SE.

22.00 NW. corner of small clearing; house bears S. about 2 chs.

29.00 NE. cor. of clearing, which extends S. about 10 chs.

39.99 The original $\frac{1}{4}$ sec. cor., which is a decayed old post, 2 ins. sq. lying on a mound of earth in center of which is an iron gas pipe 1 in. diam., indications of pits. In place of old post and with gas pipe alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

An ironwood, 8 ins. in diam., bears S. 13 $\frac{3}{4}$ ° E., 168 lks. dist., mkd. $\frac{1}{4}$ S 29 B T.

A paloverde, 10 ins. in diam., bears N. 78 $\frac{3}{4}$ ° W., 303 lks. dist., mkd. $\frac{1}{4}$ S 20 B T.

Thence
N. 88° 38' E., on a true line bet. secs. 20 and 29, (E. $\frac{1}{2}$)
Over rolling desert land thru patches of dense undergrowth and scattering timber.

23.95 Road, bears NW. and SE.

33.15 Wash, 20 lks. wide, course N.

39.70 The cor. for secs. 20, 21, 28 and 29,

Land: rolling.
Soil: gravelly loam, 3rd rate.
Timber: paloverde, mesquite and ironwood.
Undergrowth: same, with greasewood, cacti and ocotillo.

From the cor. for secs. 19, 20, 29 and 30,

N. 89° 38' W., on a true line bet. secs. 19 and 30, (E. $\frac{1}{2}$)

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.. Over rolling land thru patches of dense undergrowth and scattering timber.

40.00 The Pt. for the 1/4 sec. cor., determined from indications of old pits and mound of earth, in center of which is the rotted remains of the old post butt. At this pt. set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.



and dig pits, 18x18x12 ins. E. and W., 3 ft. dist.

Thence on a true line bet. secs. 19 and 30,

N. 88° 52' W., on a true line bet. secs. 19 and 30, (W. 1/2)

Over rolling desert land thru patches of dense undergrowth and scattering timber.

12.56 Road, bears N. and S.

39.80 The cor. for secs. 19, 24, 25 and 30, on the W. bdy. of township, hereinbefore described.


Land: rolling.
Soil: gravelly loam; 3rd rate.
Timber: paloverde, mesquite and ironwood.
Undergrowth: same, with greasewood, cacti and catclaw.

From the cor. for secs. 19, 20, 29 and 30,

N. 0° 06' E., on a true line bet. secs. 19 and 20.


Over rolling land thru patches of scattering timber and dense undergrowth.

40.16 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor., with brass cap mkd.



and dig pits, 18x18x12 ins. N. and S. of cor., 3 ft. dist.

80.32 (Proportional dist. as determined by double proportion: latitudinal control on N. the cor. for secs. 5, 6, 7 and 8; on S. the cor. for secs. 19, 20, 29 and 30; and control in departure on E. by 16, 17, 20 and 21 and on W. by the 1/4 sec. cor. for secs. 18 and 19.) At the pt. thus determined set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for the cor. of secs. 17, 18, 19 and 20, with brass cap mkd.



and dig

pits, 18x18x12 ins. in each sec. 3 ft. dist.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. Land: rolling.
 Soil: gravelly loam, 3rd rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same, with greasewood, catclaw and cacti.

Thence,
 N. 89° 34' E., on a true line bet. secs. 17 and 20.
 Over rolling land, thru patches of dense undergrowth and scattering timber.

5.40 Wash, 20 lks. wide, course NW.

23.60 Road, bears NW. and SE.;

39.83 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 17
 $\frac{1}{4}$ —————
 S 20
 1931

from which

A mesquite, 4 ins. in diam., bears S. 87 $\frac{1}{2}$ ° W., 193 lks. dist., mkd. $\frac{1}{4}$ S 20 B T.

A mesquite, 8 ins. in diam., bears N. 19° W., 341 lks. dist., mkd. $\frac{1}{4}$ S 17 B T.

57.00 Road, bears NE. and SW.

79.66 The cor. for secs. 16, 17, 20 and 21, heretofore described.

Land: rolling.
 Soil: gravelly loam, 3rd rate.
 Timber: paloverde, ironwood and mesquite.
 Undergrowth: same, with greasewood, catclaw and cacti.

From the cor. for secs. 17, 18, 19 and 20, heretofore described,

N. 89° 09' W., on a true line bet. secs. 18 and 19, (E. $\frac{1}{2}$)

Over rolling land, thru patches of desert undergrowth and scattering timber.

39.83 The original $\frac{1}{4}$ sec. cor., which is a partly decayed post, 2 ins. sq. mks. illegible set in a mound of earth alongside a local survey cor. In place of original post and with decayed remains alongside, set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 18
 $\frac{1}{4}$ —————
 S 19
 1931

from which

A mesquite, 5 ins. in diam., bears N. 47 $\frac{1}{2}$ ° E., 178 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.

A paloverde, 5 ins. in diam., bears S. 86 $\frac{1}{2}$ ° E., 213 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.


Thence, on true line and bearing,

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains.	S; 89° 49' W., on a true line bet. secs. 18 and 19, (W. $\frac{1}{2}$) Over rolling land thru patches of dense undergrowth and scattering timber.
9.25	Road, bears NE. and SW.
28.15	Road, bears NW. and SE.
39.87	The cor. for secs. 13, 18, 19 and 24 on the W. bdy. of township, hereinbefore described. Land: rolling. Soil: gravelly loam, 3rd rate. Timber: paloverde, ironwood and mesquite. Undergrowth: same, with greasewood, catclaw and cacti.
	----- From the cor. for secs. 17, 18, 19 and 20, hereinbefore described, N. 0° 55' W., on a true line bet. secs. 17 and 18. Over rolling land, thru patches of dense undergrowth and scattering timber.
6.50	Wash, 30 lks. wide, course NW.
33.35	Road, bears NW. and SE.
39.65	Road, bears E. and W.
40.16	(Proportional dist.) Set an iron post, 3 ft. long. 1 in. in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. with brass cap mkd. $\frac{1}{4}$ S 18 S 17 1931 ----- from which A mesquite, 8 ins. in diam., bears N. 33° E., 129 lks. dist., mkd. $\frac{1}{4}$ S 17 B T. A mesquite, 8 ins. in diam., bears N. 9 $\frac{1}{4}$ ° W., 332 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.
47.15	Wire fence, bears E. and W.
47.95	S. edge of clearing, bears E. and W.
51.15	Well bears E. 20 lks. dist.
55.15	Tent house bears E. 2.50 chs.
64.75	Wire fence and N. edge of clearing bears E. and W.
64.95	Road, bears E. and W.
65.00	S. edge of clearing bears E. and W.
76.65	N. edge of clearing, bears E. and W.
79.00	Wash, 20 lks. wide, course NW.
80.32	(Proportional dist. as determined by double proportion controlled on N. by the cor. for secs. 5, 6, 7 and 8; on the E. by the cor. for secs. 9, 10, 15 and 16; on the S. by the cor. for secs. 19, 20, 29 and 30; and on the W. by the cor. for secs. 7, 12, 13 and 18 on W. bdy. of Tp.)

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains. At the pt. thus determined, set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for the cor. of secs. 7, 8, 17 and 18, with brass cap mkd.

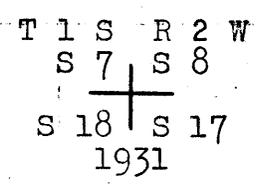

from which

A paloverde, 6 ins. in diam., bears N. 61° E., 305 lks. dist., mkd T 1 S R 2 W S 8 B T.

A catclaw, 12 ins. in diam., bears S. 51 1/2° E., 329 lks. dist., mkd. T 1 S R 2 W S 17 B T.

A mesquite, 12 ins. in diam., bears N. 2° W., 373 lks. dist., mkd. T 1 S R 2 W S 7 B T.

No. SW. tree available; dig pits, 18x18x12 ins. in each section, 3 ft. dist.

Land: rolling.
Soil: gravelly loam, 3rd rate.
Timber: paloverde, mesquite, catclaw and ironwood.
Undergrowth: same, with cacti and ocatilla.

Lines:
N. 89° 51' E., on a true line bet. secs. 8 and 17.


Over rolling desert land thru patches of dense undergrowth and scattering timber.

10.50 Road, bears NW. and SE.

22.00 Wash, 20 lks. wide, course NW.

34.00 Wash, 20 lks. wide, course NW.

40.39 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for the 1/4 sec. cor. with brass cap mkd.



from which

A mesquite, 12 ins. in diam., bears N. 10 1/2° E., 360 lks. dist., mkd. 1/4 S 8 B T.

A mesquite, 12 ins. in diam., bears S. 43 1/2° W., 248 lks. dist., mkd. 1/4 S 17 B T.

44.40 Road, bears NW. and SE.

56.10 Road, bears N. and S.

58.70 W. edge of clearing, bears N. and S.

60.50 Road, bears NW. and SE.

61.90 E. edge of clearing, bears NW. and SE.

64.50 Wash, 20 lks. wide, 3 ft. deep. course NW.

80.78 The cor. for secs. 8, 9, 16 and 17, here...

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains, Land: rolling.
 Soil: gravelly loam, 3rd rate.
 Timber: paloverde, ironwood, mesquite and catclaw.
 Undergrowth: same, with greasewood, cacti and ocotillo.

From the cor. for secs. 7, 8, 17 and 18,


N. 89° 49' W., on a true line bet. secs. 7 and 18.

Over rolling land, thru patches of dense undergrowth, and scattering timber.

1.00 Wash, 20 lks. wide, course NW.

15.50 Road, bears NW. and SE.

40.39 (Proportional dist.) Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.



And dig

pits, 18x18x12 ins., E. and W., 3 ft. dist.,

49.20 Wash, 70 lks. wide, course NW.

79.75 The cor. for secs. 7, 12, 13 and 18, hereinafter described.

Land: rolling,
 Soil: gravelly loam, 3rd rate.
 Timber: paloverde, mesquite and ironwood.
 Undergrowth: same, with catclaw, greasewood and cacti.

From the cor. for secs. 7, 8, 17 and 18,

N. 2° 39' E., on a true line bet. secs. 7 and 8.

Over rolling desert land thru patches of dense undergrowth and scattering timber.

3.20 Wash, 50 lks. wide, course NW.

4.50 Enter old flood area, bears E. and W.


8.50 Road, bears NW. and SE.

21.65 Left bank of Gila River, 60 ft. high, bears E. and W.

23.45 Center of channel of Gila River, water 4 ft. deep., course West.

24.35 Right bank of Gila River, 4 ft. high, bears E. and W.

40.16 (Proportional dist.) Set an iron post, 3 ft. long, 1 in diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

A cottonwood, 12 ins. in diam., bears S. 68 $\frac{1}{4}$ ° E., 202 lks. dist., mkd. $\frac{1}{4}$ S 8 B T.

A cottonwood, 6 ins. in diam., bears N. 89 $\frac{1}{2}$ ° W., 67 lks. dist., mkd. $\frac{1}{4}$ S 7 B T.


Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

- Chains
- 44.00 Leave flood area, bears NE. and SW, to ...
- 46.75 Fence, bears E. and W. Fence cor. E. 1 ch. from which fences extend W. and N. Enter cultivated land.
- 54.45 Fence bears E. and W.
- 60.20 Fence, bears E. and W.; irrigation ditch course W.; along same ditch which comes from N. along a fence N. and S. about 20 lks. E. of line.
- 79.85 Fence, bears E. and W.; fence cor. 2 lks. E.; fences E. S. and W.
- 80.20 Road, bears E. and W.; wooden culvert over irrigation ditch, course S.
- 80.32 Pt. for cor. for secs. 5, 6, 7 and 8 determined from collateral evidence as follows: center of road right-of-way and on line with fence corners N. and S.; supported by the corroborative statements of of abutting owners of long standing. At the pt. thus determined, set an iron post, 3 ft. long, 2 ins. in diam., 44 ins. in the ground, with brass cap, now 8 ins. below road surface, and mkd.




from which


An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears N. 45° E., 66 lks. dist., with brass cap mkd.




An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears S. 45° E., 66 lks. dist., with brass cap mkd.



An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears S. 45° W., 66 lks. dist., with brass cap mkd.



An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears N. 45° W., 66 lks. dist., with brass cap mkd.



A mesquite, 8 ins. in diam., bears N. 28 1/2° E., 44 lks.


Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

Chains	dist., mkd. T 1 S R 2 W S 5 B T. A cottonwood, 26 ins. in diam.; bears S. $60\frac{1}{4}^{\circ}$ W., 288 lks. dist., mkd. T 1 S R 2 W S 7 B.T.
	Land: rolling. Soil: gravelly, sandy loam, 2nd and 3rd rate. Timber: palo verde, mesquite and cottonwood. Undergrowth: same, with greasewood and willow along river.
	S. $89^{\circ} 40'$ E., on a true line bet. secs. 5 and 8. Over level farming land, along a county road, cultivated fields on either side.
25.96	Irrigation ditch covered with wooden culvert, course S.
34.60	Road, bears NE. and S.
35.16	Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the witness cor., 5.00 chs. N. $89^{\circ} 40'$ W. of true pt. for cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 5 \\ \hline S 8 \\ 1931 \end{array} WC$
	from which
	A mesquite, 10 ins. in diam., bears S. $88\frac{1}{2}^{\circ}$ W., 484. lks. dist., mkd. $\frac{1}{4}$ S 8 WC B T.
	No other tree available; dig pits, 18x18x12 ins. E. and W. 3 ft. dist.
35.40	Right bank of Gila River, 10 ft. high, bears NE. and SW.
38.50	Center of channel, water 2 ft. deep. course SW.
40.16	True pt. for $\frac{1}{4}$ sec. cor. falls in Gila River; impossible to establish cor. monument.
42.85	Left bank of Gila River, 3 ft. high bears NE. and SW.; enter dense undergrowth and scattering timber; over flood area.
70.50	Undergrowth becomes patchy; leave present area and pro- ceed over old flood area.
80.32	The cor. of secs. 4, 5, 8 and 9, located here as follows. Land: W. $\frac{1}{2}$ mile farming; E. $\frac{1}{2}$ mile river bottom. Soil: sandy loam in W. $\frac{1}{2}$ mile; sandy waste in E. $\frac{1}{2}$ mile. Timber: cottonwood. Undergrowth: same, with willow and tamarack.
	From the cor. for secs. 5, 6, 7 and 8, located here as follows, S. $89^{\circ} 48'$ W., on a true line bet. secs. 6 and 7, (E. $\frac{1}{2}$) Over level farming land, along county highway.
0.10	Wooden culvert over irrigation ditch, 3 ft. deep, 5 ft. wide, course S.
39.74	Wooden culvert over irrigation ditch, 2 ft. wide, 1 ft. deep, course S.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.


Chains.
40.02

The pt. for the 1/4 sec. cor., determined from the following collateral evidence: Intersection of road right-of-ways from N. and E. and W.; which checks out with position of the fences satisfactorily and is corroborated by the testimony of abutting property owners as to the position of the original cor. pt. At said true pt., set an iron post, 3 ft. long, 1 in in diam., 40 ins. in the ground, with brass cap, now 4 ins. beneath road surface, and mkd.




from which


An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears N. 45° E., 72 lks. dist., with brass cap mkd.




An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears S. 45° E., 55 lks. dist., with brass cap mkd.



An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears S. 45° W., 64 lks. dist., with brass cap mkd.



An iron post, 3 ft. long, 1 in. in diam., set 28 ins. in the ground, bears N. 45° W., 64 lks. dist., with brass cap mkd.



Thence, on the line of section 6,

N. 89° 36' W., on a true line bet. secs. 6 and 7, (W. 1/2)

Over level land, along county road, with farms on either side.

19.80

Ditch, 5 ft. wide, 4 ft. deep., course S.; covered with wooden culvert.

20.61

Road, bears N. thru the Beloat ranch.

41.70

The cor. for secs. 1, 6, 7 and 12, on the W. bdy. of the township, hereinbefore described.

Land: level.
Soil: sandy loam, 2nd and 3rd rate.
Timber: cottonwood and orchards planted around ranch houses and along edge of right-of-way.
Undergrowth: None.

Resurvey of the Subdivisions of Tp. 1 S., Rg. 2 W.

- Chains. From the cor. for secs. 5, 6, 7 and 8, ~~herebefore~~
described,
N. $0^{\circ} 25'$ E., on a true line bet. secs. 5 and 6.
Over farming land, along the E. side of irrigation ditch
in road right of way.
- 0.50 Fence cor., 3 way, N. E. and W.; leave road right of way,
thence along fence, which crosses back and forth of line.
- 20.23 Fence cor., 4 way, NW., S. and E. and W.
- 26.23 Fence bears E. and W.
- 30.00 Jog in irrigation ditch to the E. brings it onto line for
a short distance, about 5 chs.
- 35.00 Ditch bears off to the NW.; thence over cultivated field.
- 40.14 (Proportional dist.) ~~Set~~ Set an iron post, 3 ft. long, 1
in. in diam., 28 ins. in the ground, for the $\frac{1}{4}$ sec. cor.,
with brass cap mkd.
- $\frac{1}{4}$
S 6 | S 5
1931
- from which
- A black willow, 15 ins. in diam., bears S. $7\frac{1}{2}^{\circ}$ W., 420
lks. dist., mkd. $\frac{1}{4}$ S 6 B T. and dig
pits, 18x18x12 ins. N. and S. of cor. 3 ft. dist.
- 40.20 Fence, bears E. and W.
- 47.75 Fence, bears NE. and SW.
- 48.30 Canal, 15 ft. wide, 6 ft. deep, course SW.
- 48.55 Fence, bears NE. and SW.
- 79.88 Fence, bears E. and W. along highway right of way.
- 80.34 Intersect the Gila and Salt River Base Line at the ~~true~~
established closing cor. for secs. 5 and 6, ~~herebefore~~
described.

Land: level farming.

Soil: sandy loam, 1st rate.

Timber: planted cottonwoods along fences.

Undergrowth: none.

Final Test of Solar Attachment.

March 29: At camp in sec. 6, at 8 a.m. app. t. set
off $33^{\circ} 22'$ N., on the lat. arc; $3^{\circ} 11\frac{1}{2}'$ N. on the decli-
nation arc of the transit; and orient the instrument with
the solar; the line of sight agrees with the meridian
established by Polaris observation.

At 4 p.m. app. t., with the lat. arc unchanged, set
off $3^{\circ} 19'$ N. on the declination arc of the transit, and
repeat the test of the solar; the line of sight agrees
with the meridian established by Polaris observation.

March 29, 1931.

General Description.

The land in this township is mostly slightly rolling desert broken by numerous washes. There are in secs. 28, 15 and 10, low isolated hills; and in secs. 1, 12 and 13 extend well thru the secs. the breaks and foothills of the Estrella Mountains.

Over the entire township there grows a heavy stand of greasewood, with a liberal sprinkling of desert timber; composed of paloverde, ironwood, mesquite and catclaw. Numerous growths of cacti abound, principally saguaro. Along the Gila River bottom there is a dense growth of willow and desert tamarack brush and cottonwood timber.


The soil is decomposed granite except in the river bottom where sand predominates. On the hills there is a great deal of stone with a corresponding lack of vegetation.

Numerous roads extend into every part of the township except over the limited area covered by the hills. South of the Gila River, which crosses the north boundary at the closing corner for secs. 2 and 3, there are numerous homesteads being developed; numerous wells in use and more contemplated. The Gila River leaves the township near the 1/4 sec. cor. on the W. boundary of sec. 7 and north of it in secs. 4, 5, 6, 7 and 8 there is an extended area of irrigated land now being intensively cultivated. The town of Liberty, Arizona, comprising probably 200 inhabitants, is spread out along the north boundary of secs. 5 and 6. U.S., Arizona Highway No. 80 follows the north boundary of secs. 6, 5, and part of 4, extending north and east to Phoenix and west to Yuma and California points.

There are no mineral indications in the township.

Due to the above mentioned Highway pavement, which will be subject to constant repair, it was deemed inadvisable to establish corners in the highway right of way; so crosses(+) were chiseled in the pavement at the true point for each corner and then witness cors. were established at the edge of the right of way; in most cases at 45° angles and equidistant; but in a few cases a permanent improvement prevented so placing the witness cors. and it was necessary to set them wherever possible as is delineated in the notes.

Except the Gila River there are no springs nor live streams in the township.



CERTIFICATE OF UNITED STATES SURVEYOR

I, Karl L. Siebecker, U. S. Surveyor, hereby certify upon honor that, in pursuance of ^{supplemental} special instructions received from the District Cadastral Engineer, for Group 164 Arizona bearing date of the 16th day of February, 1931, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, ^{re} surveyed all those parts or portions of the Gila and Salt River Base Line in Range 2 West
the West Boundary
 and
Subdivision Lines of
Township 1 South, Range 2 West of the Gila and Salt River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes ^{and by diagram on page 1 hereof} as having been executed by me, and under my direction; and that all the corners of said ^{re} survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the ^{supplemental} special written instructions of the District Cadastral Engineer, for Group 164 Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such ^{re} survey.

Karl L. Siebecker
 U. S. Surveyor.
San Francisco, Calif.
June 15, 1931

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo., June 14, 1932.

The foregoing field notes of the ^{re} survey of the Gila and Salt River Base Line thru Range 2 West
the West Boundary
 and
Subdivision Lines of
Township 1 South, Range 2 West
of the Gila and Salt River Base and Meridian, in the State of Arizona
 executed by Karl L. Siebecker, U.S. Surveyor
 under ^{supplemental} special instructions dated February 16, 1931 for Group 164, Arizona, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the ^{re} surveys they describe, are hereby approved.

Wm. H. Johnson
 U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys