

Book G.

# FIELD NOTES

BOOK 4043

of the

dependent resurvey of a portion of the section boundaries and a portion of the boundaries of Homestead Entry Survey No. 436; survey of a portion of the subdivision-of-section lines; and metes-and-bounds survey of the boundaries of Tracts 1 and 2, Belmont Addition to Superior Townsite, all of or in section 3, Township 2 South, Range 12 East,

Of the Gila and Salt River Meridian,

In the State of Arizona

### EXECUTED BY

Francis E. Joy, U.S. Cadastral Engineer,

In the capacity of U. S. Surveyor, under Special Instructions dated December 2, 1932, issued by the District Cadastral Engineer to govern surveys included in Group No. 176, which were approved by the Commissioner of the General Land Office, December 19, 1932, and Assignment Instructions dated Feb. 28, 1933.

Survey commenced March 11, 1933.


Survey completed March 22, 1933.

# INDEX DIAGRAM.

Township \_\_\_\_\_, Range \_\_\_\_\_

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Index Diagram  
T.2S., R.12E., G. and S. R.M.

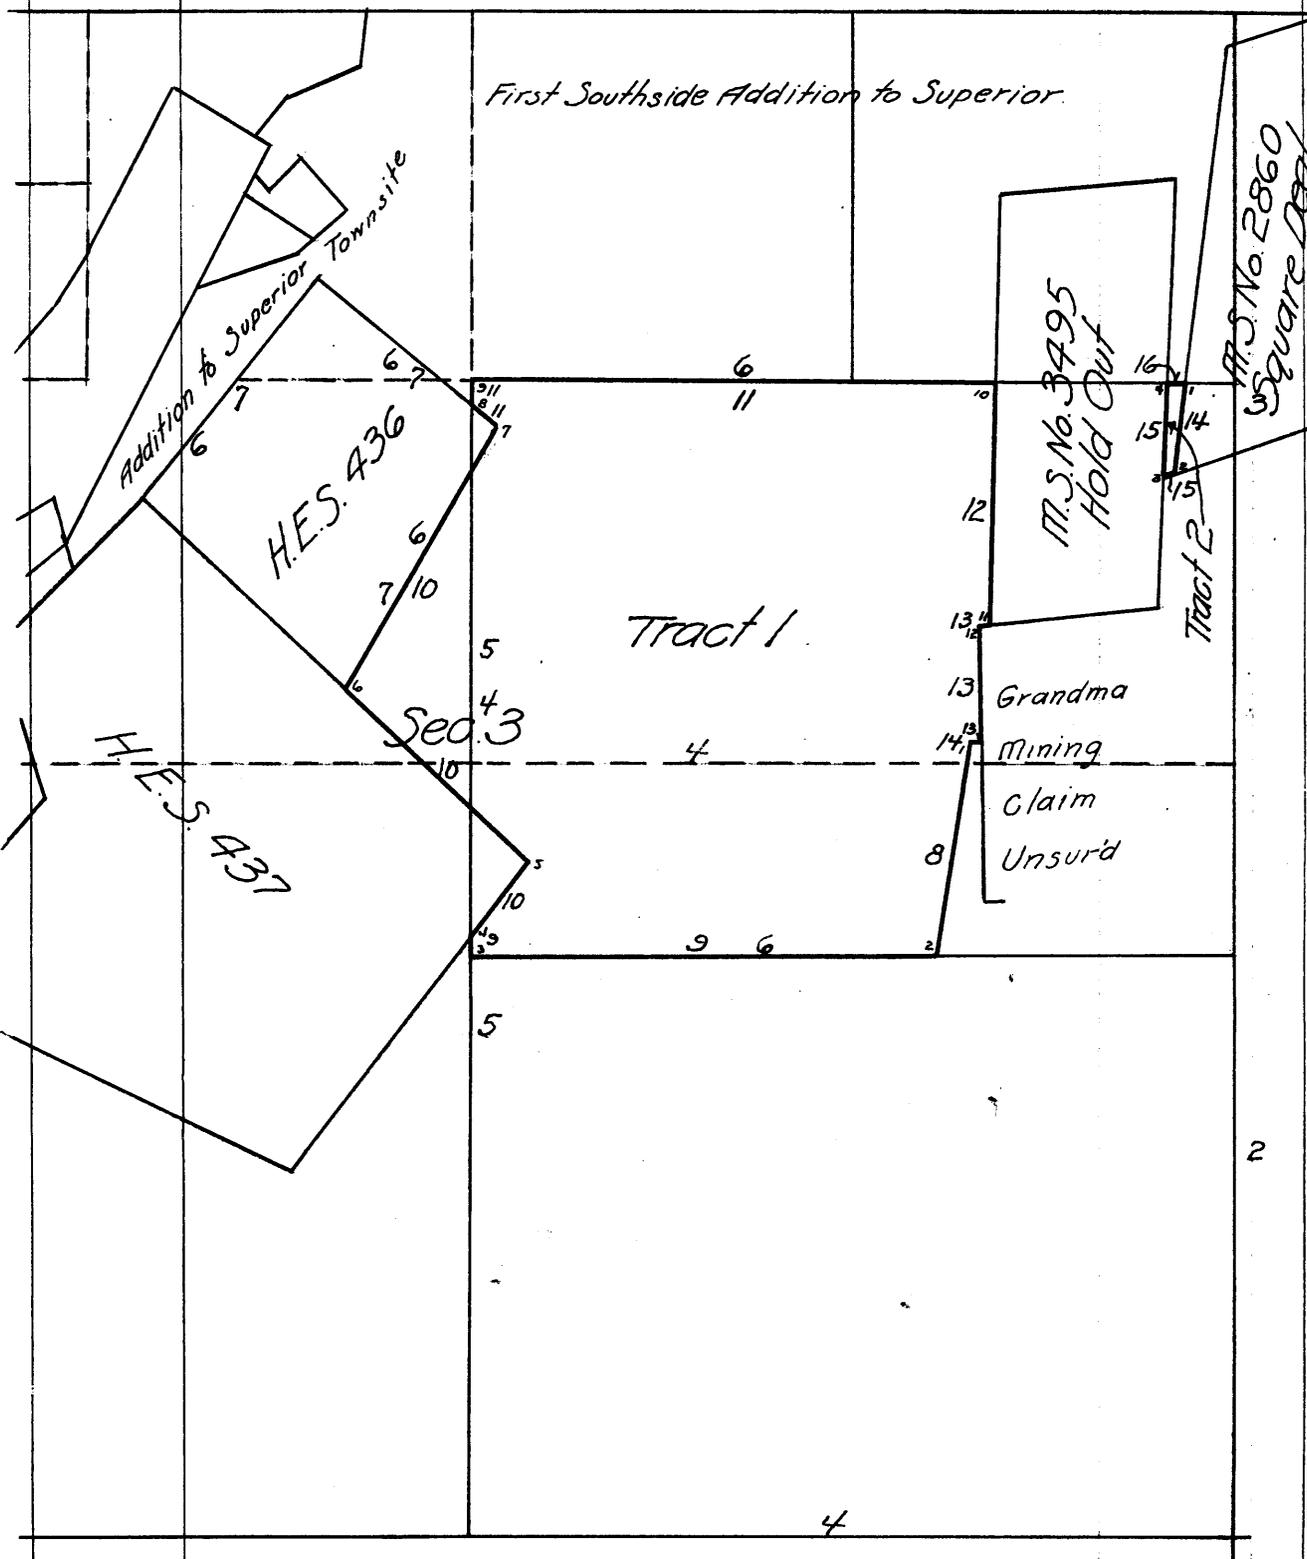

T. 2 S., R. 12 E.

BOOK 4043

The survey of certain tracts, subdivision-of-section lines, necessary resurveys of patented areas and portion of the boundaries of sec. 3, T. 2 S., R. 12 E., G. & S. R. M. were executed with a light mountain transit made by Buff & Buff, Serial No. 16723, constructed in accordance with the standard specifications of the General Land Office. The horizontal circle has a diameter of  $4\frac{1}{2}$  inches, with two opposite verniers reading to single minutes of arc; the vertical circle has a diameter of 4 inches, with one double vernier reading to single minutes. The instrument is equipped with the improved Smith solar attachment; radius of latitude arc  $2\frac{1}{2}$  inches, and of declination arc  $3\frac{1}{2}$  inches, each with verniers reading to single minutes. The instrument was in good condition, and having been placed in satisfactory adjustment prior to beginning the survey, and tested and found free from appreciable error, was approved by the district cadastral engineer on February 28, 1933. I examine all the instrumental adjustments before making the field tests hereinafter described.

The directions of all lines were determined by the solar transit method. The measurements were made with a Lallie steel tape, 5 chains in length, graduated every link for the first 100 links, and the remainder at intervals of 10 links. The tape was tested by comparison with a Keuffel & Esser standard and found correct. The measurements were made on the slope, and the vertical angle of each interval was ascertained by a clinometer in good adjustment; the horizontal equivalents are entered in the field note record.

March 11, 1933, at camp near the center of sec. 3, T. 2 S., R. 12 E., Latitude  $33^{\circ} 17' N.$ , Longitude  $111^{\circ} 07' W.$ , at 6h 6m 30s a.m., l.m.t., I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from a sharp pointed rock about 3 miles distant in the direction N-W to Polaris:

Mean horizontal deflection angle	$16^{\circ} 55' 15''$
Azimuth of Polaris	$1^{\circ} 02' 00'' E.$ ✓
True bearing to rock	$N. 17^{\circ} 57' 15'' E.$

March 12, 1933-Every hour from 8 to 11 a.m. and 1 to 4 p.m., app.t., I make proper settings on the arcs of the solar attachment and ascertain that the resulting orientation of the instrument, when compared with the meridian established by Polaris observation, has a maximum error of less than  $1' 30''$ .

I repeat the tests of the arcs daily by noon observation, and verify the meridional indications at frequent intervals throughout the survey.

The boundaries of sec. 3, T. 2 S., R. 12 E. were surveyed by Jacobs and Curry, U. S. Deputy Surveyors, in 1910. The N. boundary of sec. 3 was retraced from the closing cor. of secs. 2 and 3 to the original  $\frac{1}{4}$  sec. cor. of sec. 35, <sup>(now A P)</sup> T. 1 S., R. 12 E. by Sidney E. Blout, U.S. Cadastral Engineer, in 1914, and the entire line retraced by B. J. Kinsey and Theo Vander Meer, U. S. Transitman, in 1924. The north boundary of section 3, from the reestablished  $\frac{1}{4}$  section corner of section 35 to the original  $\frac{1}{4}$  section corner of sections 34 and 35 (now A P) was retraced by the U.S. Forest Service in 1926.

Resurvey of a portion of the Boundaries of Sec. 3,  
T. 2 S., R. 12 E.

- Chains. - The point for cor. of secs. 2, 3, 10 and 11 is determined from the old mound of stone, partly scattered. The original corner, a granite stone, 16 x 12 x 6 ins., marked with 2 and 5 grooves on adjacent faces, lying loose on the surface, bears NW. 40 lks. dist. At point for cor.
- Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. alongside, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.
- |     |      |
|-----|------|
| T2S | R12E |
| S3  | S2   |
| S10 | S11  |
- 1933
- raise a mound  
of stone, 3 ft. base, 2 ft. high, W. of cor.
- Thence
- North, on a random line bet. secs. 2 and 3.
- 30.00 Set temp.  $\frac{1}{64}$  sec. cor.
- 39.87 Fall 5 lks. W. of the  $\frac{1}{4}$  sec. cor.
- Thence from the  $\frac{1}{4}$  sec. cor.
- 32.62 Offset W. 20 lks. to pass house.
- Thence with continuous measurement.
- North, parallel to random line.
- 37.48 Offset E. 30 lks. to pass house. Thence with continuous measurement
- North, parallel to random line.
- 38.65 Offset W. to point in random line from which the closing cor. of secs. 2 and 3, bears W. 18 lks. dist.
- Returning to the cor. of secs. 2, 3, 10 and 11.
- N.  $0^{\circ} 05'$  E., on a true line bet. secs. 2 and 3.
- Over broken NW. slope through scattering timber and undergrowth.
- 1.30 Graded road, bears N. and SE. from Superior to Ray.
- 5.40 Gulch, 20 lks. wide, 6 ft. deep, course W. Leave graded road, bears NW. and S.
- 7.30 Ascend 91 ft. over SW. slope.
- 19.64 Spur, slopes W., thence along broken W. slope.
- 24.64 Descend 40 ft. over NW. slope.
- 29.90 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for  $\frac{1}{64}$  sec. cor., with brass cap mkd.

N  $\frac{1}{64}$

SE $\frac{1}{4}$	SW $\frac{1}{4}$
S3	S2

1933

Resurvey of a portion of the Boundaries of Sec. 3,  
T. 2 S., R. 12 E.

EOCK 4043

Chains.	
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
33.40	Gulch, 100 lks. wide, 30 ft. deep, course W. Ascend 69 ft. over SW. slope.
39.87	The $\frac{1}{4}$ sec. cor., which is a granite stone, 12 x 8 x 8 ins. above ground, firmly set, marked and witnessed as de- scribed in the official record. Alongside  Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.  $\frac{1}{4}$ S3   S2 1933  rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.  Thence from $\frac{1}{4}$ sec. cor.  N. $0^{\circ} 15'$ W., on a true line bet. secs. 2 and 3.  Descend 209 ft. over NW. slope from $\frac{1}{4}$ sec. cor.
19.94	East edge of a concrete marker, 10 ins. diam., bound with a metal jacket, 3 ins. above ground and top badly battered. In as much as this cor. is intended to occupy the position of the N. $\frac{1}{16}$ sec. cor. and agrees within 1 lk. of the true position, it is accepted as such. East and alongside  Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for N. $\frac{1}{16}$ sec. cor., with brass cap mkd.  N $\frac{1}{16}$ S3   S2 1933  raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.  Thence over rolling land.
22.94	Concrete culvert in curve of graded road, bears NW. and SW. from Superior to Ray.
30.40	Driveway, bears E. and W.
31.00	House, bears E. 1.00 ch. dist.
32.50	Curve in same road, bears NE. and SW.
34.10	Fence, bears E. and W.
34.20	Sheet iron garage, 14 x 14 ft., on line.
35.70	Frame house on line.
36.12	Fence and power line. bears E. and W.
36.42	Middle of street, bears E. and W.
38.00	Frame shack, 10 x 16 ft., on line.
38.65	The closing cor. of secs. 2 and 3. which is an iron post.

Resurvey of a portion of the Boundaries of Sec. 3,  
T. 2 S., R. 12 E.

## Chains.

1 in. diam., 12 ins. above ground, set in concrete, marked and witnessed as described in the official record.

Land, rolling and mountainous.  
Soil, gravelly and stony; 2nd and 3rd rates.  
Timber, palo verde; undergrowth, greasewood.

From the cor. of secs. 2, 3, 10 and 11.

West, on a random line bet. secs. 3 and 10.

40.00 Fall 9 lks. N. of the  $\frac{1}{4}$  sec. cor., which is a granite stone 6 x 6 x 4 ins. above ground, firmly set, marked and witnessed as described in the official record. Alongside

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap mkd.

$\frac{1}{4}$  S3  
4 S10

1933

of stone, 3 ft. base, 2 ft. high, N. of cor. rebuild mound

Thence

N. 89° 52' E., on a true line bet. secs. 3 and 10.

Ascend gradually 108 ft. over W. slope through scattering timber and undergrowth.

3.60 Gulch, 10 lks. wide, 4 ft. deep, course SW.

10.85 Same gulch, course NW.

40.00 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.  
Soil, rocky; 4th rate.  
Timber, palo verde; undergrowth, cacti.

Subdivision-of-section Lines, Sec. 3, T. 2 S., R. 12 E.

From the  $\frac{1}{4}$  sec. cor. bet. secs. 2 and 3.

West, on a random line through the center of sec. 3.

40.00 Set temp. center  $\frac{1}{4}$  sec. cor.

80.11 Fall 18 lks. S. of the  $\frac{1}{4}$  sec. cor. bet. secs. 3 and 4, which is a granite boulder, 8 x 6 x 3 ins. above ground, firmly set, marked and witnessed as described in the official record. Alongside and east of cor. a granite boulder, 12 x 6 x 6 ins. above ground, firmly set, and marked 24 on E. face.

14

The SE. cor. of a platform over a well, bears W. 1 lks. dist.

From the  $\frac{1}{4}$  sec. cor. bet. secs. 3 and 10.

North on a random line through the center of sec. 3.

39.96 Fall  $3\frac{1}{2}$  lks. E. of the temp. C  $\frac{1}{4}$  sec. cor.

## Subdivision-of-section Lines, Sec. 3, T. 2 S., R. 12 E.

BOOK 4043

Chains.	
60.02	Fall 12 lks. E. of the SW. cor. of the First Southside Addition to Superior and the point for the center N. 1/16 sec. cor., further verified by computation.
	—————
	From the $\frac{1}{4}$ sec. cor. bet. secs. 3 and 10.
	N. $0^{\circ} 07'$ W., on the N. and S. center line of sec. 3.
	Over rough rolling land through scattering timber and undergrowth.
4.80	Rocky draw, 10 lks. wide, 6 ft. deep, course W.
14.80	Road to golf course, bears E. and W.
17.70	Abandoned road, bears NW. and SE.
21.50	Gulch, 30 lks. wide, 15 ft. deep, course W.
22.80	Rocky gulch, 20 lks. wide, 15 ft. deep, course W.
30.04	Set temp. 1/64 sec. cor. for further reference.
30.30	Head of gulch, 6 ft. deep, course W.
36.90	Fence, bears E. and W.
40.05	Intersect E. and W. center line.
	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a granite stone, 6 x 5 x 3 ins., mkd. X, deposited at the base, and in a mound of stone to top, for center $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$C\frac{1}{4} S3$
	1933
40.20	Gulch, 10 lks. wide, 20 ft. deep, course W.
42.90	Adobe and frame house, bears E. 2.20 chs. dist.
45.20	fence, bears E. and W. 30 lks. W. of SE. cor. of fences.
46.00	Draw, 10 lks. wide, 5 ft. deep, course W.
48.50	Fence, bears E. and W., 10 lks. W. of N. and S. fence.
48.70	Frame and sheet iron house, bears W. 80 lks. dist.
49.50	Adobe and frame house, bears E. 2.00 chs. dist.
49.95	Corner of fences, bearing E. and S., bears E. 4 lks. dist.
50.60	Corner of fences, bearing N. and E., bears E. 4 lks. dist.
51.20	Frame shack, bears W. 100 lks. dist.
52.20	Fence, bears E. and W., 15 lks. W. of NE. cor. of fences.
52.60	House, bears W., 100 lks. dist.
53.70	House, bears E., 150 lks. dist.
54.33	Fence, bears E. and W., 60 lks. W. turns SW.
54.60	Draw, 10 lks. wide, 3 ft. deep, course W.
55.90	House, bears E. 1.50 chs. dist.

## Subdivision-of-section Lines, Sec. 3, T. 2 S., R. 12 E.

Chains.					
56.40	Road, bears NE. and SW. House, bears E. 100 lks. dist.				
58.40	Draw, 15 lks. wide, 3 ft. deep, course SW.				
59.28	Road, bears NW. and SE.				
59.55	fence, bears NW. and SE. Enter house yard.				
60.02	The center N. 1/16 sec. cor. and SW. cor. of the First Southside Addition to Superior, which is a concrete marker, 10 ins. diam., bound with a steel jacket, 2 ins. above ground, firmly set and marked				
	<table border="1"> <tbody> <tr> <td>SW</td> <td>COR</td> </tr> <tr> <td>SE</td> <td>SUP.</td> </tr> </tbody> </table>	SW	COR	SE	SUP.
SW	COR				
SE	SUP.				
	The NE. cor. of house, bears N. 2 lks. dist.				
From the N. 1/16 sec. cor. bet. secs. 2 and 3.					
	N. 89° 50' W., on a random line through center of the NE $\frac{1}{4}$ of sec. 3.				
.50	Offset S. 25 lks. to pass house. Thence with continuous measurement parallel to random.				
36.81	Offset 40 lks. S. to pass houses. Thence with continuous measurement parallel to random.				
39.81	Offset N. 65 lks. to point in random line. Thence with continuous measurement.				
39.97	Fall 1 lk. N. of the center N. 1/16 sec. cor.				
From the N. 1/64 sec. cor. S $\frac{1}{2}$ bet. secs. 2 and 3.					
	N. 89° 56' W., on a random line through the center of the N $\frac{1}{2}$ SE $\frac{1}{4}$ sec. 3.				
40.03	The temp. center N. 1/64 sec. cor. of the S $\frac{1}{2}$ of sec. 3.				
Resurvey of a portion of the Boundaries of Homestead Entry Survey No. 436.					
From cor. No. 3 of H. E. S. No. 436.					
	N. 31° 17' E., on a random line.				
15.98	No trace found of cor. No. 2. Set temp. Thence N. 51° 45' W., on a random line.				
11.59	No trace found of cor. No. 1. Set temp. Thence S. 39° 27' W., on a random line.				
15.00	To a point from which cor. No. 4 H. E. S. 436 and H. E. S. 437, bears N. 43° 45' E., 3 lks. dist.; A granite boulder in place, 30 x 24 x 12 ins. above ground, marked and witnessed as described in the official record.				

Resurvey of a portion of the Boundaries of  
Homestead Entry Survey No. 436.

BOOK 4048

## Chains.

Thence

N. 39° 26' E., on a true line along bdy. of H.E.S. 436.

Along SE. side of road over nearly level land.

3.00 Cross road, bears to east.


9.10 Same road, bears N. and S.

9.70 Fence, bears N. and S. Enter cultivated land.

14.70 Cement tank, 3 ft. deep, 25 ft. sq. on line.

14.99 At this point, determined by the method of broken boundaries,

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 1, H.E.S. 436, with brass cap mkd.



1933

I now find the original cor. stone built into a loose rock wall. I remove stone and set along side the cor.; a granite rock, 24 x 12 x 12 ins., mkd. 1 HES 436.

This cor. is at junction of fences from NE., SE. and SW.

Thence

S. 51° 42' E., on a true line along bdy. of H.E.S. 436.

Over level land, and through brush along fence.

1.61 Corner of fences, bearing NE., SW. and NW.

1.69 Right bank of Queen Creek, bank 6 ft. high, bears NE. and SW.

3.60 Left bank of Queen Creek, 3 ft. high, bears NE. and SW.

9.80 Draw, 15 lks. wide, 3 ft. deep, course SW.

10.95 Road, bears NE. and SW.

11.59 At this point, determined by the method of broken boundaries,

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 2 H. E. S. 436 and cor. No. 7 tract 1, Belmont Addition with brass cap mkd. to Superior,



1933

raise a mound  
of stone, 3 ft. base, 3 ft. high, W. of cor.

Thence

S. 31° 17' W., on a true line along bdy. H.E.S. 436.

Resurvey of a portion of the Boundaries of  
Homestead Entry Survey No. 436.

Chains.

- Over rolling land.
- .23 Cor. of fence, bears S. and SW.
- 3.99 Draw, 20 lks. wide, 6 ft. deep, course NW.
- 8.59 Road, bears NW. and SE.
- 10.79 Draw, 10 lks. wide, 10 ft. deep, course NW.
- 13.47 Corner of fences, bears NW., E. and SW. along line.
- 15.99 To cor. No. 3 of H. E. S. 436 which is a granite rock, 15 x 7 x 8 ins., firmly set, marked and witnessed as described in the official record.

Boundaries of Belmont Addition to Superior.

Tract 1.

The boundaries of the Belmont Addition to Superior agree with the calls submitted in the application excepting a small part of the east boundary in the vicinity of the unsurveyed Grandma and Tony mining claims.

The claimant of the Tony pointed out a fence limiting the townsite boundary. I failed to find the location corners for the Tony, but the survey verified the position.

Mr. Arthur J. Smith, Secretary of the Queen Creek Copper Company, claimants of the Grandma mining claim, produced a large scale map showing the east boundary of the townsite following a part of the boundaries of the Grandma. Mr. Smith maintained that the townsite was intended and should conform to the boundary of the Grandma. The disputed area was a narrow strip about 15 lks. wide and 5.70 chains long, apparently not interfering with any other claimed property rights. Therefore the townsite boundary was surveyed accordingly.

Beginning at cor. No. 1 of tract 1 of the Belmont Addition to Superior, on N. bdy. of the Tony Mining Claim, unsurveyed,

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground for cor. No. 1, with brass cap mkd.

BEL  
ADD

TR 1

1933

1  
S3

This cor. is set alongside an iron pipe fence post, 3 ins. diam. and set in a concrete base.

A small house 10 x 10 ft., bears NW., 1.50 lks. dist.

Thence

S. 9° 13' W., along bdy of tract 1.

Over rolling land and along fence.

- 1.27 Intersect E. and W. center line of sec. 3 at a point, from which the  $\frac{1}{4}$  sec. cor. bet. secs. 2 and 3, hereinbefore described, bears S. 89° 52' E., 13.71 chs. dist.
- 2.90 Draw, 20 lks. wide, 15 ft. deep, course NW.

Boundaries of Belmont Addition to Superior.

BOOK 4048

Chains.

Tract 1.

- 6.79 Corner of fences, bears N. along line and W. Enter E. end of lane.
- 7.56 Corner of fences, bears S. along line and W. Leave lane.
- 9.11 Rocky gulch, 50 lks. wide, 6 ft. deep, course W.
- 11.37 Intersect the N. 1/64 sec. line of the SE 1/4 of sec. 3 at a point, from which, the 1/64 sec. cor. bet. secs. 2 and 3, hereinbefore described, bears S. 89° 56' E., 15.32 chs. dist.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 2 of tract 1, with brass cap mkd.

BEL  
 ADD  
 TR 1/2  
 S3  
 1933

This cor. is set alongside of SE. cor. of fence. an iron pipe 3 ins. diam.

Thence,

N. 89° 56' W., along bdy. of tract 1 and the N. 1/64 sec. line of the SE 1/4 sec. 3.

Over rolling land. and along fence.

- 4.31 Leave fence, bears N.
- 7.06 Gulch, 30 lks. wide, 25 ft. deep, course SW.
- 9.68 Enter N. edge of same gulch.
- 14.68 Leave N. edge of gulch.
- 15.98 Corner of fences, bears N. and W. along line.
- 19.23 Corner of fences, bears N. and E. along line.
- 24.71 The temp. 1/64 sec. cor. on N. and S. center line of sec. 3, hereinbefore described.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for N. 1/64 sec. cor. and cor. No. 3 of tract 1, with brass cap mkd.

N 1/64  
 C  
 BEL  
 ADD  
 SW 1/4 3 TR 1  
 SE 1/4  
 S 3  
 1933

Thence

N. 0° 07' W., along bdy. of tract 1 and N. and S. center line of sec. 3.

Over rolling land.

- .53 Intersect line 5-6 of H. E. S. 437.

## Boundaries of Belmont Addition to Superior.

Chains.

Tract 1.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. No. 4 of tract 1, with brass cap mkd.

HES  
437 4  
BEL  
S3 ADD  
TR 1  
1933

From this point cor. No. 6 of H.E.S. 437, bears S. 37° 57' W., 14.88 chs. dist.; a red boulder, 12 x 10 x 8 ins. above ground, firmly set; marked and witnessed as described in the official record.

Thence

N. 37° 57' E., along bdy. of tract 1 and H. E. S. 437.

Over rolling land.

2.77 Telephone line, bears E. and W.

5.62 Cor. No. 5 of H. E. S. 437, which is a gray washed lava boulder in place, 18 x 12 x 8 ins. above ground, marked 5 HES 437 on W. face and a cross (X) on top. I additionally mark 5 BEL on E. face for cor. No. 5 of tract 1. A mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Thence

N. 48° 02' W., along bdy. of tract 1 and H. E. S. 437.

Over heavy rolling land and along old fence line.

3.30 Fence, bears E. and W.

4.65 Intersect N. and S. center line at a point, from which, the center ¼ sec. cor., hereinbefore described, bears N. 0° 07' W., 1.95 chs. dist.

7.57 Intersect the E. and W. center line at a point, from which the center ¼ sec. cor., hereinbefore described, bears S. 89° 52' E., 2.17 chs. dist.

8.20 Gulch, 10 lks. wide, 20 ft. deep, course W.

13.63 Cor. No. 3 of H. E. S. 436 on bdy. of H. E. S. 437, which is a granite boulder, 15 x 7 x 8 ins. above ground, firmly set, marked and witnessed as described in the official record. Alongside

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. No. 6 of tract 1, cor. No. 3 of H. E. S. 436 and on line of H. E. S. 437, with brass cap mkd.

HES  
436 3  
BEL  
ADD  
TR 1  
6  
437  
1933

Thence

N. 31° 17' E., along bdy. of tract 1 and H. E. S. 436.

Over rolling land along fence.

## Boundaries of Belmont Addition to Superior.

BOOK 4043

Chains.	Tract 1.
2.52	Corner of fences, bears NW., E. and SW. along line.
5.20	Bottom of draw, 10 lks. wide, 10 ft. deep, course NW.
7.40	Road, bears NW. and SE.
12.00	Bottom of draw, 20 lks. wide, course NW.
12.83½	Intersect the N. and S. center line at a point, from which the center N. 1/16 sec. cor., heretofore described, bears N. 0° 07' W., 4.92½ chs. dist.
15.76	Corner of fences, bears S. and SW.
15.99	Cor. No. 3 of H. E. S. 436 and cor. No. 7 of tract 1, heretofore described.
	Thence
	N. 51° 42' W., along bdy. of tract 1 and H. E. S. 436.
	Over level land.
2.10	Intersect N. and S. center line.
	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 8 of tract 1 on line 1-2 of H. E. S. 436, with brass cap mkd.
	Thence
	N. 0° 07' W., along bdy. of tract 1 and N. and S. center line.
	Over level land.
.19	Road, bears NW. and SE.
.46	Fence, bears NW. and SE. Enter yard.
.92½	The center N. 1/16 sec. cor and SW. cor. of the First Southside Addition to Superior, hereinbefore described, which now becomes cor. No. 9 of tract 1. No further marks added.
	Thence
	S. 89° 51' E., along the bdy. of tract 1 and the First Southside Addition to Superior.
	Over level land in yard.
2.10	Frame house on line.
3.15	Street, bears N. and S. Thence along N. side of street.
3.41	Transmission line, bears N. and S.
4.55	Street bears S.
8.41	Bottom of draw, 10 lks. wide, 6 ft. deep, course NW.

## Boundaries of Belmont Addition to Superior.

Chains.	Tract 1.														
15.07	Cross street, bears N. and S.														
24.70	Transmission line, bears N. and S.														
20.00	Intersect concrete marker, 8 ins. diam., 3 ins. above ground, firmly set, and marked <div style="text-align: center;"> <table border="1"> <tr> <td>So</td> <td>CEN</td> </tr> <tr> <td>So</td> <td>SUP</td> </tr> </table> </div>	So	CEN	So	SUP										
So	CEN														
So	SUP														
23.37	Leave street at end of houses.														
24.97	Enter bottom of rocky draw, 30 lks. wide, course NW.														
25.87	Thence along S. side of draw.														
27.29	Intersect line 3-4 of <sup>Mineral Survey No. 3495</sup> Hold Out mining claim, patented, Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 10 of tract 1, with brass cap mkd. <div style="text-align: center;"> <table border="1"> <tr> <td>So</td> <td></td> </tr> <tr> <td>SUP</td> <td>H O</td> </tr> <tr> <td>10</td> <td></td> </tr> <tr> <td>BEL</td> <td></td> </tr> <tr> <td>ADD</td> <td></td> </tr> <tr> <td>TR 1</td> <td></td> </tr> <tr> <td>1933</td> <td></td> </tr> </table> </div> <p>From this point cor. No. 4 of the Hold Out mining claim, patented, bears N. 2° 11' E., 9.77 chs. dist.; a post, 4 ins sq., 3 ft. above ground, firmly set, marked H O 4 3495 on E. face and 1 Q C F 3856 on S. faces. The latter markings signify Cor. No. 1, Sur. No. 3856, Queen Creek Fraction. Thence</p> <p>S. 2° 11' W., along bdy. of tract 1 and Hold Out mining claim.</p> <p>Over rolling land.</p>	So		SUP	H O	10		BEL		ADD		TR 1		1933	
So															
SUP	H O														
10															
BEL															
ADD															
TR 1															
1933															
1.78	NE. cor. of fence, bears W. 6 lks. dist.														
4.13	SE. cor. of fence, bears W. 6 lks. dist.														
4.69	Cor. of fences, bears W. and S. along line.														
5.89	Bottom of rocky draw, 20 lks. wide, 10 ft. deep, course NW. Cor. No. 2, Sur. No. 3856, Queen Creek Fraction, bears E. 1 lk. dist;														
10.76	a granite boulder, 16 x 9 x 12 ins. above ground, firmly set, and marked 2 Q C F 3856.														
12.46	Fence bears W. from line.														
12.98	Cor. No. 3 of the Hold Out mining claim, patented, which is an iron bar, 3/4 ins. sq., 12 ins. above ground, set in a mound of stone at cor. of fences. At point for cor. No. 3 of the Hold Out and on end line of the Grandma mining claim, unsurveyed. Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 3 of the Hold Out mining claim and cor. No. 11 of tract 1, with brass cap mkd.														

## Boundaries of Belmont Addition to Superior.

BOOK 4048

Chains.

Tract 1.

BEL	
ADD	H O
TR 1	11 3
	S 3
	G M C

1933

From this point the NE. cor. of the Grandma unsurveyed mining claim, bears N. 85° 02' E., 8.95 chs. dist.; a post, 4 ins. sq., 40 ins. above ground, firmly set, mkd. NE GRANDMA on SW. face and NW K on NE. face.

Cor. No. 2 of the Hold Out mining claim, patented, bears N. 85° 02' E., 9.16 chs. dist.; a mound of stone showing position of removed post. At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 2 of the Hold Out mining claim, patented, with brass cap marked.

H O	
	2
	S 3

1933

Note-At 5.40 chs., N. 85° 02' E., from cor. No. 3 of the Hold Out, a post, 3 x 5 x 40 ins. above ground, marked N E C TONY. Evidently moved from its proper position.

Thence

S. 85° 02' W., along bdy. of tract 1 and Grandma mining claim, unsurveyed.  
Over level land.

.15 The NW. cor. of the Grandma mining claim, unsurveyed, which is a mound of stone, 3 ft. base, 1 ft. high. At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. No. 12 tract 1 and the NW. cor. of the Grandma mining claim, unsurveyed, with brass cap mkd.

BEL	
ADD	12
TR 1	NW COR
	G M C

1933

Thence

S. 0° 45' E., along bdy. of tract 1 and bdy of Grandma mining claim, unsurveyed.

Over rolling land.

1.12 Center of land, bears E. and W.

3.00 Telephone line, bears NE. and SW.

3.10 Fence, bears E. and W.

3.85 Fence, bears E. and W.

Boundaries of Belmont Addition to Superior.

Chains.

Tract 1

5.68 To fence on N. bdy. of the Tony mining Claim, unsurveyed, bears N. 75° 01' E. and S. 75° 01' W.


Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 13 tract 1, with brass cap mkd.



1933

From this point the SW. cor. of the Grandma mining claim, unsurveyed, bears S. 0° 45' E., 8.59 chs. dist.; a mound of stone, 3 ft. base, 2 ft. high, verified from the S. end center post. At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, for SW. cor. of the Grandma mining claim, unsurveyed, with brass cap mkd.



1933

Thence

S. 75° 01' W., along bdy. of tract 1 and Tony mining claim, unsurveyed.


Over level land along fence.

.17 To cor. No. 1 and place of beginning.

Tract 2.

At the point for cor. No. 1

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 1 of tract 2, with brass cap mkd.



1933

From this point the N. 1/16 sec. cor. bet. secs. 2 and 3, hereinbefore described, bears S. 89° 51' E., 2.83 chs. dist.

M.S.No.2860

From the same point cor. No. 4 Square Deal mining claim, patented, bears N. 7° 59' E., 17.53 chs. dist.; a granite stone, 8 x 6 x 3 ins. above ground, firmly set, marked 4 S D 2860 on E. and 1 G on W. faces and a cross on top. 1G designates Cor.No.1 of M.S.No.2860, Girtrude Mining Claim.

Thence

S. 7° 59' W., along bdy. of tract 2 and line 3-4 of the Square Deal mining claim, patented.

Boundaries of Belmont Addition to Superior.

BOOK 4042

Chains.

Tract 2.

Over level land through back yards and cross fences.


- 3.90 Leave back yards and cross fences, bears E. and W. Cor.No.2, Girtrude Mining Claim and
- 5.12 Cor. No. 3 of the Square Deal mining claim, which is a granite boulder, 16 x 10 x 10 ins. above ground, firmly set, and marked with a cross (X) on top, 3 S D 2860 on E. and 2 G on W. faces. I additionally mark this stone 2 BEL for cor. No. 2 of tract 2. North and alongside is an iron pipe 3 ins. diam., 10 ft. high, firmly set in concrete base.

I now set a flag on cor. No. 2 of the Square Deal mining claim and obtain a bearing of N. 70° 45' E. Therefore I run

S. 70° 45' W., along the bdy. of tract 2.

Over rolling land.

- .28 Intersect line 1-2 of the Hold Out mining claim, patented. Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. No. 3 of tract 2, with brass cap mkd.




From this point cor. No. 2 of the Hold Out mining claim, patented, bears S. 2° 11' W., 7.01 chs. dist.; hereinbefore described.

Thence

N. 2° 11' E., along the bdy. of tract 2 and Hold Out mining claim, patented.

Over rolling land.

- 2.03 SW. cor. of fences, thence along fence.
- 5.16 Intersect the N. 1/16 sec. line of sec. 3. Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. No. 4 of tract 2, with brass cap mkd.



From this point cor. No. 1 of the Hold Out mining claim, patented, bears N. 2° 11' E., 10.57 chs. dist.; a post, 4 ins. sq., rotted off at top of ground, marked H O 1 3495. At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins in the ground to bedrock, with original post alongside, and in mound of stone to the top, for cor. No. 1 of the Hold Out mining claim, with brass cap mkd.

## Boundaries of Belmont Addition to Superior.

Chains.

Tract 2.

So	SUP
1	
H	O

1933

Thence

S. 89° 51' E., along bdy. of tract 2, the S. bdy. of the First Southside Addition to Superior and the N. 1/16 sec. line of sec. 3.

Over level land along fence.

.78 To cor. No. 1 and the place of beginning.

For final test of solar attachment on a meridian determined by Polaris observation, see preliminary test in notes for tract survey, T. 1 N., R. 4 E., Group 176.

## GENERAL DESCRIPTION.

The land covered in the Belmont Addition to Superior is rather rough and broken and lies adjacent to the south side of the City of Superior.

It is estimated that there are some 50 or more houses, mostly occupied, on tract 1 of the addition. Tract 2, for the most part is occupied by the back yards of nice homes.



18

22

BOOK 4043

CERTIFICATE OF UNITED STATES SURVEYOR

I, Francis E. Joy, U.S. Cadastral Engineer, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 2nd day of December, 1932, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, dependently resurveyed a portion of the section boundaries and a portion of the boundaries of Homestead Entry Survey No. 436; surveyed a portion of the subdivision-of-section lines; and made a metes-and-bounds survey of the boundaries of Tracts 1 and 2, Belmont Addition to Superior Townsite, all of or in section 3, Township 2 South, Range 12 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey and resurvey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey and resurvey.

Glendale, California, June 27, 1934.

Francis E. Joy, U.S. Cadastral Engineer.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS, Denver, Colorado, October 13, 1934.

The foregoing field notes of the dependent resurvey of a portion of the section boundaries and a portion of the boundaries of Homestead Entry Survey No. 436; survey of a portion of the subdivision-of-section lines; and metes-and-bounds survey of the boundaries of Tracts 1 and 2, Belmont Addition to Superior Townsite, all of or in Section 3, Township 2 South, Range 12 East, of the Gila and Salt River Meridian, in the State of Arizona,

executed by Francis E. Joy, U.S. Cadastral Engineer, under his special instructions dated December 2, 1932, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys and resurveys they describe, are hereby approved.

[Signature] U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.