

Book C

BOOK 4073

FIELD NOTES

OF THE SURVEY OF THE

Subdivisional Lines of T. 14 $\frac{1}{2}$ N., R. 3 E.,

4073

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Theodore Vander Meer,

U. S. Transitman,

4073


Under special instructions dated July 20, 1933, which provided for the surveys included under Group No. 184, bearing the approval of the Commissioner of the General Land Office under date of Sept. 5, 1933, and assignment instructions dated August 1, 1933, Sept. 30, 1933, and June 15, 1935.

Survey commenced November 2, 1933.

Survey completed June 25, 1935.

INDEX DIAGRAM.


Township _____, Range _____

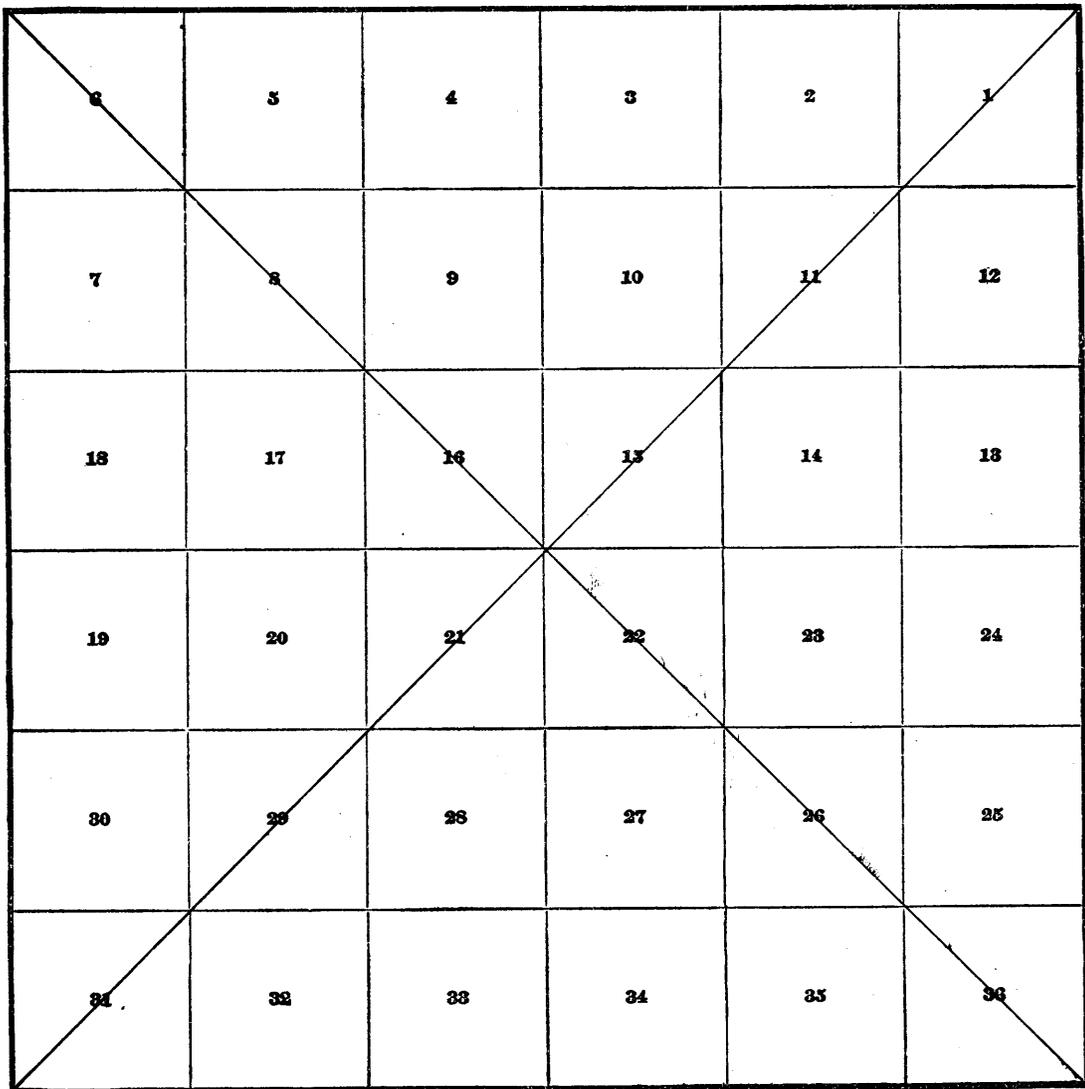

INDEX DIAGRAM

BOOK 4073

T 15 N., R. 3 E.

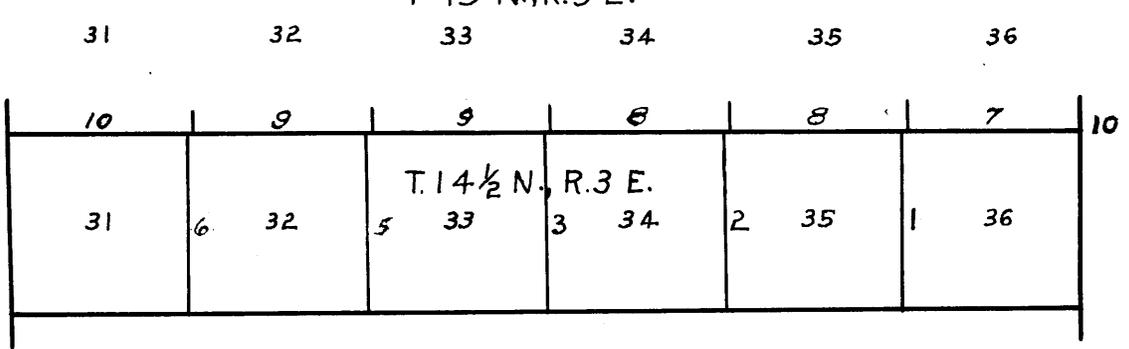

Chains.	<p>The subdivisional survey of this township was executed with a light mountain transit made by Buff and Buff Co., Serial No. 9977. For description and tests of instrument, see the field notes of the survey and resurvey of the exteriors of T. 14 N., Rs. 2$\frac{1}{2}$ and 3 E., and T. 14$\frac{1}{2}$ N., R. 3 E., surveyed and resurveyed under this group; and the Subdivision of T. 14 N., R. 2$\frac{1}{2}$ E., surveyed under this group. From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the township; described in the field notes of the N. bdy. of T. 14 N., R. 3 E., surveyed under this group.</p> <p>N.0°01'W., on true line bet. secs. 35 and 36.</p> <p>.55 Drain, 6 lks. wide, course E.; desc. SE. slope of bench.</p> <p>14.30 Top of bench; over nearly level land.</p> <p>14.90 Old road, bears E. and W.</p> <p>19.30 Leave bench; desc. N. slope 45 ft.</p> <p>23.20 Drain, course N.70°E.; asc. SE. slope 25 ft.</p> <p>31.00 Short spur, slopes E.; over E. slope; desc. 20 ft.</p> <p>38.30 Spur, slopes N.60°E.; desc. N. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 35 S 36</p> <p style="text-align: center;">1933</p> <p style="text-align: right;">raise a mound</p> <p>of stone, 2 ft. base, 1$\frac{1}{2}$ ft. high, W. of cor.</p> <p>Descend N. slope.</p> <p>44.70 Wash, 25 lks. wide, course N.60°E.; asc. E. slope.</p> <p>55.40 Low spur, slopes N.70°E.</p> <p>55.90 Wire fence, bears N.70°E. and S.70°W.; desc. N. slope 15 ft.</p> <p>57.80 Gulch, course N.70°E.; asc. S. slope 20 ft.</p> <p>59.50 Over rolling E. slope of bench.</p> <p>71.60 Small drain, course S.</p> <p>76.70 Intersect S. bdy. of T. 15 N., R. 3 E.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 35 and 36, with brass cap mkd.</p> <p style="text-align: center;">T15N R3E S 35</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S 35 S 36 C C T14$\frac{1}{2}$N 1933</p> <p style="text-align: right;">raise a mound</p> <p>of stone, 2 ft. base, 1$\frac{1}{2}$ ft. high, S. of cor.</p>
---------	--

4073

Chains.

From point of intersection the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of T. 15 N., R. 3 E., bears East, 2.41 chs. dist.; an iron post, 2 ins. diam., 14 ins. above ground, firmly set, with brass cap mkd.

T 15 N R 3 E
S 35 | S 36
S 2 | S 1
T 14 N
1917

witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

As this corner now refers to secs. 35 and 36 only of T. 15 N., I change the markings on brass cap to read as follows:

T 15 N R 3 E
S 35 | S 36
T 14 $\frac{1}{2}$ N
1933
1917

Land, rolling.

Soil, 2nd and 3rd rate.

Timber, scrub cedar and mesquite; undergrowth, catclaw, cactus and palo christy.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the township; described in the field notes of the N. bdy. of T. 14 N., R. 3 E., surveyed under this group.

N.0°01'W., on true line bet. secs. 34 and 35.

Over rolling land, sloping NE.

- 2.00 Spur, slopes NE.; desc. N. slope.
- 6.50 Drain, course NE.
- 20.10 Wash, 20 lks. wide, course E.
- 24.80 Drain, 5 lks. wide, course E.
- 30.90 Wash, 15 lks. wide, course N.80°E.
- 32.10 Wash, 40 lks. wide, course E.
- 33.40 Wash, 20 lks. wide, course S.70°E.
- 39.30 Road, bears NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S 34 | S 35
1933

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

- 43.20 Wash, 8 lks. wide, course E.

ECCY 4073

Chains.	
54.90	Drain, course N.70°E.
60.80	Drain, course N.70°E.
63.00	Flat spur, slopes N.70°E.; desc. N. slope 30 ft.
69.00	Drain, 6 lks. wide, course N.60°E.; asc. S. slope 15 ft.
71.30	Spur, slopes N.60°E.
76.71	Intersect S. bdy. of T. 15 N., R. 3 E.

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 34 and 35, with brass cap mkd.

```

T 15 N R 3 E
  S 34
-----
S 34 | S 35
  C   |   C
T 14 $\frac{1}{2}$  N
1933

```

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

From point of intersection the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of T. 15 N., R., 3 E., bears East, 2.40 chs. dist.; an iron post, 2 ins. diam., 14 ins. above ground, firmly set, with brass cap mkd.

```

T 15 N R 3 E
  S 34 | S 35
  S 3   | S 2
  T 14 N
1917

```

witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

As this corner now refers to secs. 34 and 35 only of T. 15 N., I change the markings on brass cap to read as follows:

```

T 15 N R 3 E
  S 34 | S 35
-----
T 14 $\frac{1}{2}$  N
1933
1917

```

Land, rolling.
Soil, 2nd and 3rd rate.
Timber, scrub cedar and mesquite; undergrowth, catclaw cactus and palo christy.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the township; described in the field notes of the N. bdy. of T. 14 N., R. 3 E., surveyed under this group.

N.0°02'W., on true line bet. secs. 33 and 34.

Ascend SE. slope 50 ft. through moderately dense brush.

3.40 Spur, slopes N.60°E.; desc. N. slope 90 ft.

8.20 Base of hill; over nearly level land.

Chains.
 10.10 Wash, 20 lks. wide, course NE.
 12.50 Leave level land; along E. slope, ascending.
 23.20 Spur, slopes N.70°E.; desc. NE. slope 90 ft.
 32.90 Gulch, course N.30°E.; asc. SE. slope 50 ft.
 37.00 Spur, slopes NE.; desc. NW. slope 60 ft.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 33 | S 34
 1933

43.50 Gulch, course NE.; asc. SE. slope.
 45.50 Spur, slopes NE.; desc. NE. slope.
 50.00 Road, bears NE. and SW.
 53.30 Spring branch, course NE.
 55.00 Road, bears NE. and SW.
 65.00 Spur, slopes NE.; desc. NW. slope 50 ft.
 69.00 Gulch, course NE.; asc. SE. slope 20 ft.
 73.60 Spur, slopes NE.
 76.54 Intersect S. bdy. of T. 15 N., R. 3 E.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 33 and 34, with brass cap mkd.

T 15 N R 3 E
 S 33
 S 33 | S 34
 C | C
 T 14 $\frac{1}{2}$ N
 1933

From point of intersection the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of T. 15 N., R. 3 E., bears East, 2.11 chs. dist.; an iron post, 2 ins. diam., 10 ins. above a mound of stone, firmly set, with brass cap mkd.

T 15 N R 3 E
 S 33 | S 34
 S 4 | S 3
 T 14 N
 1917

witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

As this corner now refers to secs. 33 and 34 only of T 15 N., I change the markings on brass cap to read as follows:

Chains.	
	T 15 N R 3 E S 33 S 34 ----- T 14 $\frac{1}{2}$ N 1933 1917
	Land, rolling mountains. Soil, adobe; 2nd and 3rd rate. Timber, scattering juniper and pinon; undergrowth, catclaw, scrub oak and manzanita.

	From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the township; described in the field notes of the N. bdy. of T. 14 N., R. 3 E., surveyed under this group. N.0°02'W., on true line bet. secs. 32 and 33. Ascend SE. slope 60 ft.
2.80	Short spur, slopes E.; desc. along E. slope 200 ft.
21.80	Spur, slopes E.; desc. NE. slope.
28.00	Gulch, course N.60°E.; over E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S 32 S 33 ----- 1933
	raise a mound
	of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
40.40	Short spur, slopes E.; desc. NE. slope.
51.00	Wash, 15 lks. wide, course N.60°E.; over E. slope.
52.80	Deep drain, course E.
59.40	Gulch, course SE.; asc. S. slope.
61.10	Wire fence, bears N.60°W. and S.60°E.
65.50	Spur, slopes E.; desc. NE. slope.
69.20	Head of draw, course E.; asc. SE. slope 30 ft.
74.00	Spur, slopes NE.; desc. N. slope.
76.86	Intersect S. bdy. of T. 15 N., R. 3 E.
	Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 32 and 33, with brass cap mkd.
	T 15 N R 3 E S 32 ----- S 32 S 33 C C ----- T 14 $\frac{1}{2}$ N 1933

Chains

raise a mound
of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.

From point of intersection the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of T. 15 N., R. 3 E., bears East, 2.33 chs. dist.; an iron post, 2 ins. diam., 10 ins. above ground, firmly set, with brass cap mkd.

```

T 15 N R 3 E
S 32 | S 33
      |
S 5   | S 4
T 14 N
1917

```

witnessed by a mound
of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

As this corner now refers to secs. 32 and 33 only of T. 15 N., I change the markings on brass cap to read as follows:

```

T 15 N R 3 E
S 32 | S 33
      |
T 14 $\frac{1}{2}$  N
1933
1917

```

Land, rolling mountains.
Soil, adobe; 2nd and 3rd rate.
Timber, scattering juniper and pinon; undergrowth, catclaw, scrub oak and manzanita.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the township; described in the field notes of the N. bdy. of T. 14 N., R. 3 E., surveyed under this group.

N.0°03'W., on true line bet. sets. 31 and 32.

Ascend SE. slope 85 ft.

- 2.65 Trail, bears E. and W.
- 3.00 Wire fence, bears NW. and SE.
- 7.40 Spur, slopes SE.; desc. rugged broken NE. slope.
- 35.40 Spur, slopes NE.; desc. N. slope 335 ft.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

```

 $\frac{1}{4}$ 
S 31 | S 32
      |
1933

```

from which

A pinon, 12 ins. diam., bears S.89° E., 175 lks. dist. mkd. $\frac{1}{4}$ S 32 B T.

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

- 45.20 Gulch, course NE.; along E. slope.
- 49.00 Short spur, slopes NE.; desc. broken NE. slope 465 ft.

Subdivision of Fractional T.14 $\frac{1}{2}$ N., R.3 E.

4078

Chains

74.20 Gulch, course NE.

76.75 Intersect the S. bdy. of T.15 N., R.3 E.

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for closing cor. of secs. 31 and 32, with brass cap marked

$$\begin{array}{r} T\ 15\ N\ R\ 3\ E \\ S\ 31 \end{array}$$

$$\begin{array}{r|l} S\ 31 & S\ 32 \\ \hline C & C \end{array}$$

$$\begin{array}{r} T\ 14\frac{1}{2}\ N \\ 1933 \end{array}$$

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high S. of cor.

From point of intersection, the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of T.15 N., R.3 E., bears East, 2130 obs. dist.; an iron post, 2 ins. diam., 10 ins. above ground, firmly set, with brass cap marked

$$\begin{array}{r} T\ 15\ N\ R\ 3\ E \\ S\ 31 \end{array}$$

$$\begin{array}{r|l} S\ 6 & S\ 5 \\ \hline 1917 \end{array}$$

witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high W. of cor.

As this cor. now refers to secs. 31 and 32 only of T.15 N., I change the markings on brass cap to read as follows:

$$\begin{array}{r} T\ 15\ N\ R\ 3\ E \\ S\ 31 \end{array}$$

$$\begin{array}{r} T\ 14\frac{1}{2}\ N \\ 1933 \\ 1917 \end{array}$$

Land, mountainous.

Soil, adobe, 3rd. rate.

Timber, scattering juniper, pinon and black oak.

Undergrowth, cactus and manzanita.

S. bdy. of T.15 N., R.3 E.

The $\frac{1}{4}$ sec. cor. of secs. 1 and 36 on the S. bdy. of T.15 N., R.3 E., is an iron post, 1 in. diam., 10 ins. above ground, firmly set, and with brass cap marked

$$\begin{array}{r} \frac{1}{4} \\ S\ 36 \\ \hline S\ 1 \\ 1917 \end{array}$$

witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.

As this $\frac{1}{4}$ sec. cor. now refers to sec. 36 only, of T.15 N. the marks on brass cap are changed to read as follows:

$$\begin{array}{r} \frac{1}{4}\ S\ 36 \\ \hline 1935 \\ 1917 \end{array}$$

At a point on the N. bdy. of sec. 36, T.14 $\frac{1}{2}$ N., R.3 E.,

Chains

40.00 chs. in departure from the closing cor. of secs. 35 and 36,

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed rock, with a stone marked X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 36, T.14 $\frac{1}{2}$ N. only, with brass cap marked

 $\frac{1}{4}$ S 36
1935

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 36, T.15 N., bears East, 2.41 chs. dist.

No trace could be found of the iron post monument set by Blout in 1917, for the $\frac{1}{4}$ sec. cor. of secs. 2 and 35 on the S. bdy. of T.15 N., R.3 E. A retracement of the line gives a course and distance in substantial agreement with the record. At the mid-point of S. bdy. of sec. 35,

Set a stone 9 x 9 x 14 ins., 9 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 35, T.15 N. only, marked $\frac{1}{4}$ on N. face. There is a dim mound of stone N. of cor., which I rebuild 2 ft. base, 1 $\frac{1}{2}$ ft. high.

At the mid-point of the N. bdy. of sec. 35, T.14 $\frac{1}{2}$ N., R.3E.,

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 35, T.14 $\frac{1}{2}$ N. only, with brass cap marked

 $\frac{1}{4}$ S 35
1935

raise a mound of stone,
2 ft. base, 1 $\frac{1}{2}$ ft. high S. of cor.

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 35, T.15 N., bears East, 2.40 chs. dist.

The $\frac{1}{4}$ sec. cor. of secs. 3 and 34 on the S. bdy. of T.15 N., R.3 E., is an iron post, 1 in. diam., 10 ins. above ground, firmly set, with brass cap marked

$\frac{1}{4}$ S 34

S 3
1917

witnessed by a mound
of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor.

As this $\frac{1}{4}$ sec. cor. now refers to sec. 34 only, of T.15 N. the markings on brass cap are changed to read as follows:

$\frac{1}{4}$ S 34

1935
1917

At the mid-point of the N. bdy. of sec. 34, T.14 $\frac{1}{2}$ N., R 3 E.,

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bed rock, with a stone marked X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 34, T.14 $\frac{1}{2}$ N. only, with brass cap marked

S. Bdy. of T.15 N., R.3 E.

4078

1/4 S 34
1935

From this cor., the 1/4 sec. cor. of sec. 34, T.15 N., bears East, 2.25 chs. dist.

Retracement of the S. bdy. of sec. 33, T.15 N., R.3 E., gives a course and distance in substantial agreement with the official record, but no trace could be found of the 1/4 sec. cor. of secs. 4 and 33, described in the official record as having been set by Blout in 1917.

At the mid-point of S. bdy. of sec. 33, T.15 N.,

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground for 1/4 sec. cor. of sec. 33, T.15 N. only, with brass cap marked

1/4 S 33
1935

raise a mound of stone,
2 ft. base, 1 1/2 ft. high N. of cor.

At the mid-point of the N. bdy. of sec. 33, T.14 1/2 N., R.3 E.,

Set a granite stone 20 x 16 x 10 ins., 14 ins. in the ground for 1/4 sec. cor. of sec. 33, T.14 1/2 N. only, marked 1/4 on S. face. Raise a mound of stone, 3 ft. base, 2 ft. high S. of cor.

From this cor., the 1/4 sec. cor. of sec. 33, T.15 N., bears East, 2.22 chs. dist.

Retracement of the S. bdy. of sec. 32, T.15 N., R.3 E., gives a course and distance in substantial agreement with the official record, but could find no trace of the 1/4 sec. cor. of secs. 5 and 32, described in the record as having been set by Blout in 1917.

At the mid-point of S. bdy. of sec. 32, T.15 N.,

Set a granite stone, 24 x 12 x 10 ins., 16 ins. in the ground for 1/4 sec. cor. of sec. 32, T.15 N. only, marked 1/4 on N. face. Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor.

At the mid-point of the N. bdy. of sec. 32, T.14 1/2 N.,

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for 1/4 sec. cor. of sec. 32, T.14 1/2 N. only, with brass cap marked

1/4 S 32
1935

Raise a mound of stone,
3 ft. base, 2 ft. high S. of cor.

From this cor., the 1/4 sec. cor. of sec. 32, T.15 N., bears East, 2.31 chs. dist.

S. Bdy. of T.15 N., R.3 E.

The $\frac{1}{4}$ sec. cor. of secs. 6 and 31, on the S. bdy. of T.15 N., R.3 E., is an iron post, 1 in. diam., 10 ins. above ground, firmly set, with brass cap marked

$$\frac{1}{4} \begin{array}{c} \text{S 31} \\ \hline \text{S 6} \end{array}$$

1917 witnessed by a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.

As this $\frac{1}{4}$ sec. cor. now refers to sec. 31, T.15 N. only, the markings on brass cap are changed to read as follows:

$$\frac{1}{4} \begin{array}{c} \text{S 31} \\ \hline 1935 \\ 1917 \end{array}$$

At a point on the N. bdy. of sec. 31, T.14 $\frac{1}{2}$ N., R.3 E., 40.00 chs. in departure from the closing cor. of secs. 31 and 32,

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground for $\frac{1}{4}$ sec. cor. of sec. 31, T.14 $\frac{1}{2}$ N. only, with brass cap marked

$$\frac{1}{4} \begin{array}{c} \text{S 31} \\ \hline 1935 \end{array}$$

from which,

A white oak, 6 ins. diam., bears S.57°E., 32 lks. dist. marked $\frac{1}{4}$ S 31 B T

A white oak, 6 ins. diam., bears S.61°W., 63 lks. dist. marked $\frac{1}{4}$ S 31 B T

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 31, T.15 N., bears East, 2.30 chs. dist.

The cor. of Ts.14 and 15 N., Rs.3 and 4 E., as reestablished by S.E.Blout in 1917, is an iron post, 3 ins. diam., 12 ins. above ground, firmly set, with brass cap marked

$$\begin{array}{c} \text{T15N} \\ \text{R3E} \mid \text{R4E} \\ \text{S36} \mid \text{S31} \\ \hline \text{S 1} \mid \text{S 6} \\ \text{T14N} \\ 1917 \end{array}$$

witnessed by a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high S. of cor.

As this is now a cor. of Ts.14 $\frac{1}{2}$ and 15 N., R.3 E. and Ts. 14 and 15 N., R.4 E., the marks on brass cap are altered to read as follows:

$$\begin{array}{c} \text{T15N} \\ \text{R3E} \mid \text{R4E} \\ \text{S36} \mid \text{S31} \\ \hline \text{S36} \mid \text{S 6} \\ \text{T14}\frac{1}{2}\text{N} \mid \text{T14N} \\ 1935 \\ 1917 \end{array}$$

E. C. C. 407

Final Test of Solar

For final test of the solar attachment for the portion of this survey made in 1933, see the initial test in the field notes of T.18 N., R.6 W., surveyed under this group.

For final test on June 25, 1935, see the field notes of the Subdivisional lines of T.14 N., R.2 $\frac{1}{2}$ E., surveyed under this group.

General Description

The land in this township is mountainous and rolling, the soil being mostly adobe, 2nd. and 3rd. rates. There is no running water. The timber consists of scattered growths of juniper, pinyon and black oak, and is not of much commercial value. The undergrowth is cats claw, scrub oak and manzanita. There are no residents and little evidence of mineral.


13 18
BOOK 4073

CERTIFICATE OF UNITED STATES SURVEYOR

I, Theodore Vander Meer, U.S. Transitman, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona bearing date of the 20th day of July, 1933, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the Subdivisional Lines of

Township 14 North, Range 3 East

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Arizona, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

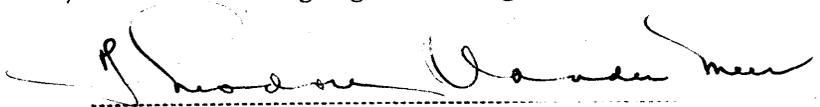
U.S. Transitman

Phoenix, Arizona,
June, 26, 1935.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colorado, July 20, 1935.


The foregoing field notes of the survey of the Subdivisional Lines of

Township 14 North, Range 3 East

of the Gila and Salt River Base and Meridian in the State of Arizona

executed by Theodore Vander Meer, U.S. Transitman

under his special instructions dated July 20, 1933, 19 , having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

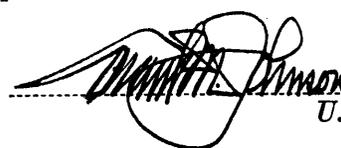
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.