

BOOK 4100

FIELD NOTES OF RESURVEY OF

East, West, South and North Boundaries

and Part of the Subdivision Lines of

Township 6 North, Range 9 East

AND OF THE SURVEY OF

Boundaries of Tracts Nos. 37, 38, 39, 40 and 41

Tie to U.S. Mineral Monument No. 1, Brown Lining District,

and Part (Completion) of the Subdivision Lines of

Township 6 North, Range 9 East

Of the Gila and Salt River Base and Meridian,

In the State of Arizona

EXECUTED BY

Benjamin J. Kinsey, U.S. Surveyor

Bert E. Wakeman, Public Land Surveyor

and Daniel M. Wier, Public Land Surveyor

Under special instructions dated April 19, 1934, and supplemental special instructions dated August 22, 1935

for the surveys included under Group No. 204, Arizona, bearing the approval of the

Commissioner of the General Land Office under dates of May 7, 1934 and August 30, 1935.

and assignment instructions dated May 15, 1935.

Resurvey and Survey commenced May 29, 1935

Resurvey and Survey completed February 21, 1936


4100

4100

19

This Township is situated in
 TONTO NATIONAL FOREST
 BROWN MINING DISTRICT
 MARICOPA & GILA COUNTIES.
 BOOK 4100

INDEX DIAGRAM.

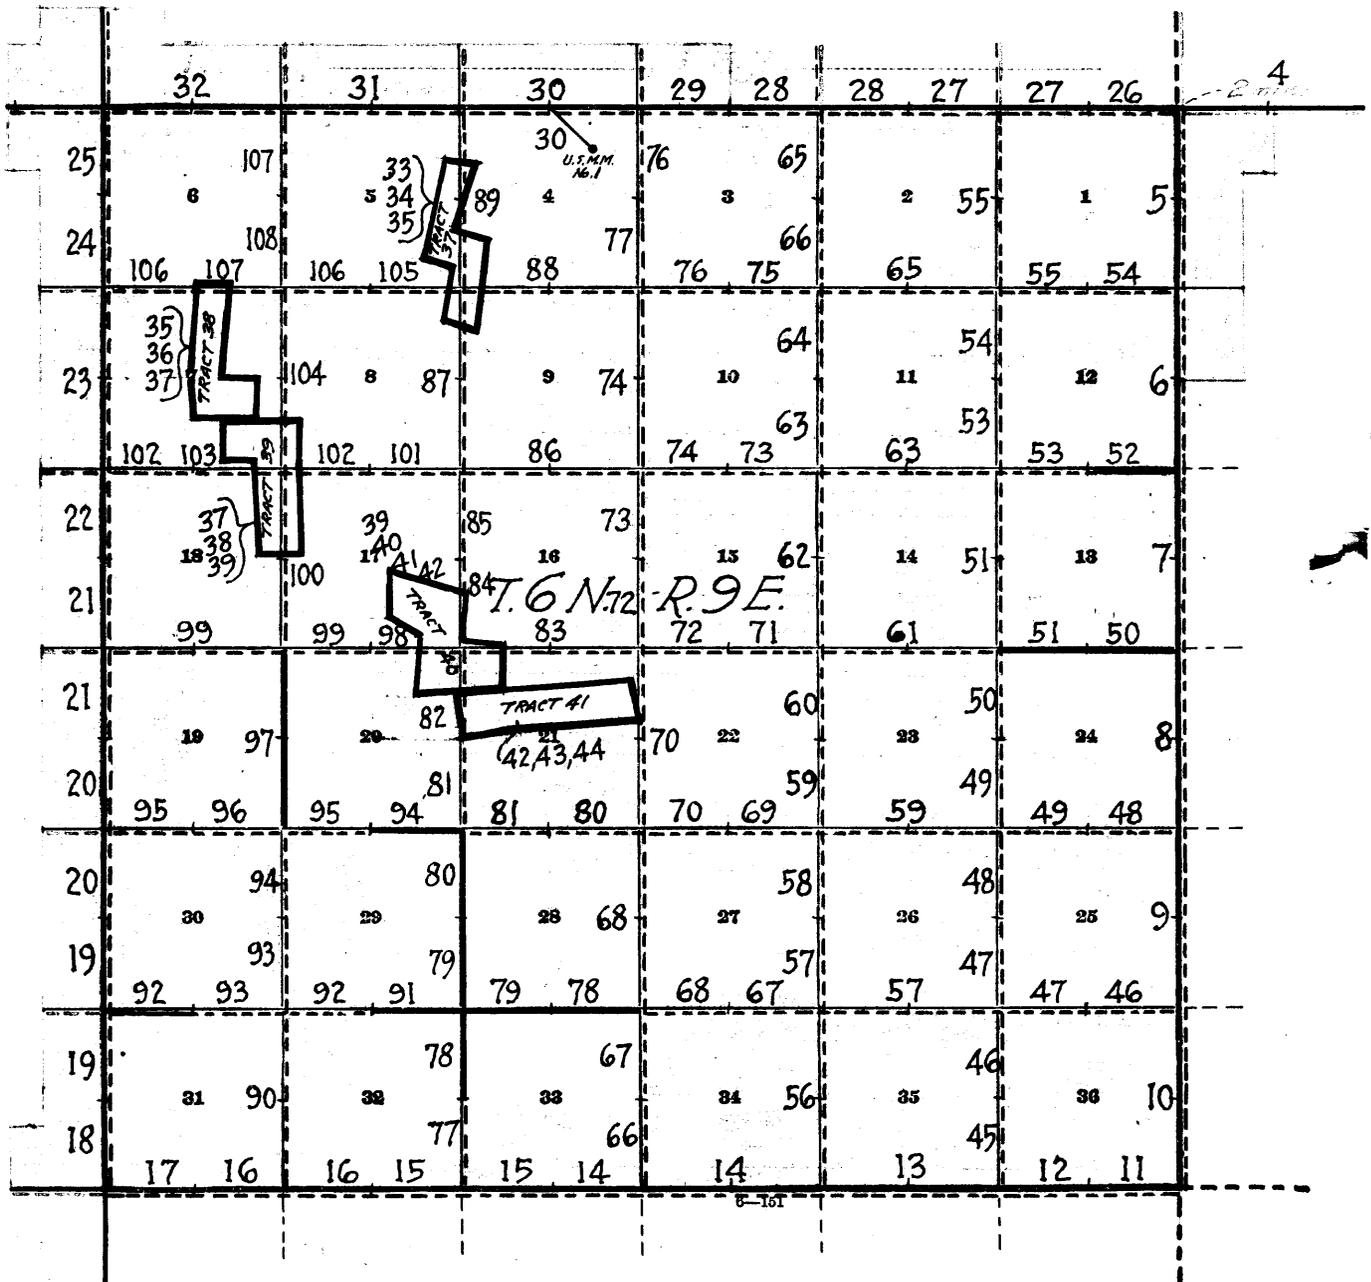

- Accepted surveys.
- Unsurveyed.
- Surveyed under this group
Field notes herein.
- Resurveyed under this group.
Field notes herein.
- To be surveyed under this group.
- To be resurveyed under this group.
- Retraced under this group, to
locate control corners.
- Accepted, surveyed areas as per
accepted plats on file.

The resurveys and surveys herein described were executed by Benjamin J. Kinsey, U.S. Surveyor, Daniel M. Wier, Public Land Surveyor, and Bert E. Wakeman, Public Land Surveyor, using respectively Buff transit No. 18,000, Young and Sons transits No. 8592 and 8540. The instruments are equipped with the Smith solar attachments and otherwise conform to the standard requirements of the General Land Office.

Test of Buff transit No. 18,000 and
Young & Sons transit No. 8540

by

Benjamin J. Kinsey, U.S. Surveyor.

May, 29, 1935; at my station in sec. 21, about 5 chs. S.E. of the cor. of secs. 16, 17, 20, and 21, T. 6 N., R. 9 E., G. & S.R.B. & M., Arizona, in latitude $33^{\circ} 51' 14''$ N., determined from data provided with Group Instructions and subsequently checked by observations upon the sun as hereinafter described, and longitude $111^{\circ} 26' 30''$ W., examine the adjustments of the instruments and find no errors. Then to test the workings of the solar attachments, proceed as follows:

At 3h.18m., a.m., l.m.t., I observe Polaris at eastern elongation, making four observations, two each with telescope in direct and reversed positions, and marking the mean point thus determined by a tack set in top of a wooden stake, driven firmly in the ground about 5 chs. northerly.

Azimuth of Polaris at eastern elongation : $1^{\circ} 15' 30''$.

May, 30; at daylight lay off azimuth of Polaris, $1^{\circ} 15' 30''$ to the west and mark the true meridian thus determined by a tack set in top of a stake, driven firmly in the ground about 5 chs. North.

At 9h.00m., a.m., app. t., set off $33^{\circ} 51' N.$, on the lat. arc; $21^{\circ} 42\frac{1}{2}' N.$, on the decl. arc, and determine a meridian with the solar which I find to agree with the true meridian.

At 12h.00m., app. noon, with the latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $21^{\circ} 44' N.$, which agrees with the computed declination of the sun.

At 3h.00m., p.m., app. t., with latitude arc unchanged, set off $21^{\circ} 45'$ on the declination arc and determine a meridian with the solar which agrees with the true meridian.

As all of the observations, taken during the usual hours of solar work, agree within 1" of the true meridian, conclude that the instrument is in a satisfactory state of adjustment.

Unless otherwise specified all measurements are made on the slope, the vertical angle determined with a clinometer, and the slope measurements properly reduced to horizontal equivalents.

All measurements are made with a Ballie steel tape, 5-chs. in length, compared with a Lufkin standard and found correct.

BOOK 4100

2

Observation for Time and Latitude
by
Benjamin J. Kinsey, U.S. Surveyor,
using
Buff transit No. 18,000.

May, 31, 1935; at same station described on page 1 hereof, in approximate latitude $34^{\circ} 51' N.$, and longitude $111^{\circ} 26' 30'' W.$, I make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the suns lower limb and the transit of the suns west limb, reversing the telescope and observing simultaneously the altitude of the suns upper limb and the transit of the suns east limb:

	Suns position.
Telescope normal :	
Telescope reversed:	
Mean observed altitude:	$78^{\circ} 01' 08''.$
Reduced latitude :	$33^{\circ} 51' 14''.$
Mean watch time of obsn.:	$12h.19m.23s.$
Watch fast of l.m.t. :	$16m.47s.$

Oct. 13, 1935; at same station as above described, using Buff transit No. 18,000 make observation for time and latitude as follows:

Telescope normal :	
Telescope reversed :	
Mean observed altitude:	$48^{\circ} 48' 00''.$
Reduced latitude :	$33^{\circ} 51' 14''.$
Mean watch time of obsn.:	$12h.14m.50s.$
Watch fast of l.m.t. :	$28m.22s.$

Preliminary test of Young & Sons
transit No. 8592
by

Daniel M. Wier, Public Land Surveyor.

Sept. 15, 1935; at my station about 25 chs. S. $75^{\circ} E.$ of the cor. of secs. 24 and 25, T. 6 N., R. 9 E., G. & S. R. B. and M., Arizona, in latitude $33^{\circ} 49' 30'' N.$, and longitude $111^{\circ} 22' 00'' W.$, examine the adjustments of the transit and find no errors; then to test the workings of the solar attachment proceed as follows:

At 8h.08m., p.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack set in top of a peg, driven firmly in the ground about 5 chs. Northerly.

Azimuth of Polaris at eastern elongation: $1^{\circ} 15' 30''.$

At 9h.00m., a.m., app.t., set off $33^{\circ} 51' N.$, on the lat. arc; $7^{\circ} 35' N.$, on the decl. arc, and determine a solar meridian which agrees with the true meridian.

At 12h.00m., app. noon, with lat. arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arc is $7^{\circ} 38' N.$, which agrees with the computed declination of the sun.

At 3h. 0m., p.m., app.t., with lat. arc unchanged, set off $9^{\circ} 51'$ S., on the decl. arc, and determine a meridian with the solar which agrees with the true meridian.

As all of the observations, taken within the usual hours of solar work, agree within $1'$ of the true meridian, conclude that the instrument is in a satisfactory state of adjustment.

All measurements are made with a Lallie steel tape, 5 chs. in length, compared with a Lufkin standard and found correct.

The measurements are made on the slope, the vertical angle determined, and slope measurements properly reduced to true horizontal measurements.

Resurvey of the East Bdy. of T. 6 N., R. 9 E.

Chains

In 1878, W. A. Hancock, U.S.D.S., surveyed the E. bdy. of T. 6 N., R. 9 E., establishing corners thereon with common reference to areas on both sides of the line. No retracement or resurvey is of record. The following notes describe a dependent resurvey of the north one mile of the E. bdy. of T. 6 N., R. 9 E., reconstructing the original cor. of secs. 1, 6, 7, and 12, reestablishing the $\frac{1}{4}$ sec. cor., and the Tp. cor., with their original reference, and an independent resurvey of the south five miles of said Tp. bdy. The Tp. cor. is reestablished at record latitude north from original cor. of secs. 1, 6, 7, and 12, and record departure from the original cor. of secs. 4, 5, 32, and 33, Ts. 6 and 7 N., R. 10 E. No control exists to the North, and the Tp. cor. $5\frac{1}{2}$ miles west, the nearest original corner found in that direction, was not used as a control corner owing to extreme distortion of the Tp. bdy., which would result from such control.

Retracement for Resurvey.

From the original cor. of secs. 1, 6, 7, and 12, hereinafter described.

North, on a random line, bet. secs. 1 and 6.

40.00 No $\frac{1}{4}$ sec. cor. found after diligent search. Set temp.cor.

80.00 (Record dist.) No township corner found after diligent search. Set temp. Tp. cor. "A."

The original corner of secs. 4, 5, 32, and 33, Ts. 6 and 7 N., R. 10 E., is a granite stone 18x10x8 ins. firmly set in ground and mound of stone and plainly marked with two grooves on W. face and 4 grooves on E. face. The original bearing trees cannot be found.

Thence,

West, on a random line, searching diligently at record intervals for the original corner monuments. Fail to find any trace of original corners, therefore at

159.01 (Record distance), Set temp. Tp. cor. "B," from which temp. Tp. cor. "A" bears W. 23 lks. dist. The point for reestablishment of the Tp. cor. is therefore identical with temp. Tp. cor. "B." True course and distance of E. bdy. of sec. 1 are therefore N. $0^{\circ} 10'$ E., 80.00 chs.

Dependent Resurvey.

The original cor. of secs. 1, 6, 7, and 12, T. 6 N., Rs. 9 and 10 E., is a granite stone 8x12x20 ins. above ground, firmly set, marked with one groove on N. face and 5 grooves on S. face. The original bearing trees cannot be found.

Reconstruct this cor. monument by setting an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, alongside original cor. stone, and in a mound of stone to top, for the cor. of secs. 1, 6, 7, and 12, with brass cap marked

Resurvey of the East Bdy. of T. 6 N., R. 9 E.

Chains

T6N	
R9E	R10E
S1	S6
S12	S7
1935	

from which,

An oak, 10 ins. in diam., bears S. 76° E., 111 lks. dist., marked T6N R10E S7 BT.

An oak, 12 ins. in diam., bears S. 13° W., 41 lks. dist., marked T6N R9E S12 BT.

No other bearing trees available.

Thence,

N. 0° 10' E., on true line, bet. secs. 1 and 6.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 257 ft. over S. slope.

- 1.80 Road, from Tonto, Arizona, to Comet Mine, bears E. and W.
- 11.00 Spur, slopes SE. Desc. 28 ft. over NE. slope.
- 15.75 Wash, 5 lks. wide, course SE. Asc. 304 ft. over SW. slope.
- 23.40 Spur, slopes E. Desc. 30 ft. over N. slope.
- 28.15 Wash, 10 lks. wide, 2 ft. deep, course E.; asc. 367 ft. over S. slope.
- 39.00 Ridge, bears NW. and SE.; desc. 13 ft. over NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone mkd. with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of secs. 1 and 6, with brass cap marked

$\frac{1}{4}$	
S1	S6
1935	

No bearing trees available.

Desc. 62 ft. over NE. slope.

- 43.10 Wash, 6 lks. wide, course SE., heads about 8 chs. NW.; asc. rocky S. slope, 414 ft., entering very dense undergrowth.
- 58.15 Ridge, bears E. and W. Desc. 161 ft. over N. slope.
- 58.20 A spring of good water, bears N. 55° E., 6.25 chs. dist.
- 64.75 Shallow draw, drains E.; asc. 21 ft. over SE. slope.
- 68.05 Small spur, slopes E.; A small spring bears E., 2.15 chs. dist. Desc. 40 ft. over NE. slope.
- 71.45 Trail, bears NW. and SE.
- 74.50 Wash, 6 lks. wide, course SE.; asc. 157 ft. over S. slope.
- 76.25 Same trail, bears NE. and SW. A small spring bears S. 5° E.,


Resurvey of the East Bdy. of T. 6 N., R. 9 E.

Chains

1.75 chs. dist.

79.55 Same trail, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 12 ins. in the ground to bedrock, with a stone 4x4x3 ins., marked with a cross (X), deposited at base, and in a mound of stone to top, for cor. of Ts. 6 and 7 N., Rs. 9 and 10 E., with brass cap marked



No bearing trees available.

A V between the two westerly peaks of Four Peaks bears S. 11° 33' E.

Land, mountainous.
Soil, rocky 4th rate.
Timber, scattering juniper.
Undergrowth, oakbrush and manzanita and various forms of cacti.

Independent Resurvey.

From the cor. of secs. 1, 6, 7, and 12, hereinbefore described,

South, on true line, on E. bdy. of sec. 12.


Over mountainous land, through scattering timber and dense undergrowth.

Desc. 50 ft. over S. slope.

13.50 Old road, bears E. and W.; from old Fort McDowell to Fort Reno.

15.00 Rocky wash, 2 chs. wide, course E.; asc. 1,000 ft. over steep, broken N. slope, to ridge.

40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, deposit stone 4x4x2 ins., marked with a cross (X) at base of post, and in a mound of stone to top, for the 1/4 sec. cor. of sec. 12 only, with brass cap marked



No bearing trees available.

Continue ascent over N. slope.

43.40 Ridge, bears E. and W.; desc. 272 ft. over broken S. slope.

64.80 Wash, 20 lks. wide, course E.; desc. 25 ft. over E. slope.

Resurvey of the East Bdy. of T. 6 N., R. 9 E.

7

Chains

71.40 Wash, 30 lks. wide, course NE.; asc. 154 ft. over N. slope.

80.00 Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, deposit a stone 4x4x3 ins., marked with a cross (X), at base, and in a mound of stone to top, for cor. of secs. 12 and 13, only, with brass cap marked

T6N

S12

S13

R9E

1935

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, juniper, and scrub oak.

Undergrowth, oakbrush, manzanita, and cacti.

South, on true line, on E. bdy. of sec. 13.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 144 ft. over N. slope.

14.10 Ridge, bears NE. and SW.; desc. 166 ft. over SE. slope.

22.70 Wash, 15 lks. wide, course NE.; asc. 297 ft. over NW. slope.

34.00 Ridge, bears NE. and SW.; desc. 97 ft. over SE. slope, to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 5x5x5 ins., marked with a cross (X), deposited at base of post, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 13 only, with brass cap marked $\frac{1}{4}$ S13

1935

No bearing trees available.

Descend 113 ft. over SE. slope.

44.10 Wash, 10 lks. wide, course E.; asc. 96 ft. over N. slope.

49.00 Low ridge, bears E. and W.; desc. 56 ft. over SE. slope.

74.50 Wash, 15 lks. wide, course NE. Asc. 20 ft. over N. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground, for cor. of secs. 13 and 24, only, with brass cap marked

T6N

S13

S24

R9E

1935

Chains

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and oak.
Undergrowth, oakbrush and cacti.

South, on true line, on E. bdy. of sec. 24.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 271 ft. over N. slope.

17.66 From this point, Bear Springs, a permanent water hole, bears E., 5.02 chs. dist.

18.00 Wash, 10 lks. wide, course NE.; asc. 548 ft. over N. slope.

37.60 High ridge, bears NE. and SW. Desc. 27 ft. over SE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 4x4x1 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor. of sec. 24, only, with brass cap marked

$\frac{1}{2}$ S24 |
1935

No bearing trees available.

Desc. 428 ft. over SE. slope.

68.00 Wash, 15 lks. wide, course NE.; asc. 119 ft. over N. slope.

79.86 Wire fence, erected by U. S. Forest Service, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 24 and 25, only, with brass cap marked

T6N |
S24 |
S25 |
R9E |
1935

from which,

A juniper, 16 ins. in diam., bears N. $60\frac{1}{2}^{\circ}$ W., 76 lks. dist., marked T6N R9E S24 BT.

An oak, 5 ins. in diam., bears S. $31\frac{1}{2}^{\circ}$ W., 93 lks. dist., marked T6N R9E S25 BT.

The original cor. of secs. 19, 24, 25, and 30, bears N. $56^{\circ} 42'$ E., 23.85 chs. dist., which is a stone 12x12x16 ins., firmly set in a mound of stone and marked and witnessed as described in the official record. Obliterate marking on the stone and bearing tree, and

Resurvey of the East Bdy. of T. 6 N., R. 9 E.

Chains

scatter the mound of stone.

South, on true line, on E. bdy. of sec. 25.

Over mountainous land, through scattering timber and dense undergrowth. Asc. 48 ft. over N. slope.

- 2.26 Wire fence, erected by U. S. Forest Service, bears NE. and SW.
- 4.00 Ridge, bears NE. and SW.; desc. 113 ft. over SE. slope.
- 22.30 Wash, 10 lks. wide, course E.; asc. 22 ft. over NE. slope.
- 27.60 Spur, slopes NE.; desc. 51 ft. over SE. slope.
- 34.70 Wash, 20 lks. wide, course NE.; asc. 128 ft. over N. slope.
- 39.00 Divide, bears NE. and SW.; desc. 23 ft. over SE. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a 4 in.

cross (X) cut in exposed bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 25 only, with brass cap marked

$\frac{1}{4}$ S25

1935

from which,

A juniper, 8 ins. in diam., bears S. $81\frac{1}{2}^{\circ}$ W., 185 lks. dist., marked $\frac{1}{4}$ S25 BT.

No other bearing tree available.

The original point of location of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, bears N. $60^{\circ} 13'$ E., 26.62 chs. dist., determined by measurement of the record tie of S. 32° E. 55 lks. from original NW. bearing tree, a juniper 8 ins. in diam., marked $\frac{1}{4}$ S BT. Obliterate the markings on this tree. Find no trace of original SE. bearing tree.

Desc. 59 ft. over SE. slope.

- 45.83 Wire fence, erected by U. S. Forest Service, bears NW. and SE.
- 52.00 Rocky outcropping, bears E. and W., continue descent.
- 53.00 Head of wash, course SW.; asc. 65 ft. over NW. slope.
- 56.60 Ridge, bears NE. and SW.; desc. 163 ft. over SE. slope to sec. cor.
- 67.20 Wire fence, erected by U. S. Forest Service, bears NE. and SW.
- 69.10 Trail, from Tonto to Sycamore Creek, bears NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 25 and 36 only, with brass cap mtd.

Resurvey of the East Bdy. of T. 6 N., R. 9 E.

Chains	<table border="1" style="margin: auto;"> <tr><td>T6N</td></tr> <tr><td>S25</td></tr> <tr><td>—</td></tr> <tr><td>S36</td></tr> <tr><td>R9E</td></tr> </table>	T6N	S25	—	S36	R9E
T6N						
S25						
—						
S36						
R9E						
	1935					
	from which,					
	A juniper, 24 ins. in diam., bears N. 83° W., 108 lks. dist., marked T6N R9E S25 BT.					
	A juniper, 16 ins. in diam., bears S. 72½° W., 151 lks. dist., marked T6N R9E S36 BT.					
	The original corner of secs. 25, 30, 31, and 36, bears N. 59° 33' E., 30.30 chs. dist., which is a stone 6x20x12 ins. above ground, firmly set, marked with 1 groove on S. face, and 5 grooves on N. face, and witnessed by a juniper, 16 ins. in diam, S. 15° W., 76 lks. dist., on which marks are visible but illegible. Obliterate marking on stone and bearing tree.					
	Land, mountainous. Soil, rocky 4th rate. Timber, oak and juniper. Undergrowth, oakbrush, manzanita, and cacti.					
	South, on true line, on E. bdy. of sec. 36.					
	Over mountainous land, through scattering timber and dense undergrowth.					
	Asc. 137 ft. over NE. slope.					
14.75	U. S. Forest Service fence, bears NW. and SE.					
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 4x4x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for ¼ sec. cor. of sec. 36 only, with brass cap marked					
	<table border="1" style="margin: auto;"> <tr><td>¼ S36</td></tr> <tr><td>—</td></tr> <tr><td>1935</td></tr> </table>	¼ S36	—	1935		
¼ S36						
—						
1935						
	from which					
	A juniper 12 ins. in diam., bears S. 83° W., 49 lks. dist., marked ¼ S36 BT.					
	No other bearing tree available.					
	The original ¼ sec. cor. of secs. 31 and 36, bears N. 62° 11' E., 37.23 chs. dist., which is a mound of stone 3 ft. base, 1 ft. high. Find no trace of the two recorded bearing trees. Scatter the mound of stone.					
	Asc. 59 ft. over N. slope.					
57.00	Low saddle in ridge, bears NW. and SE. Desc. 117 ft. over S. slope.					
80.00	Set an iron post, 3 ft. long, 3 ins. in diam., 22 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of T. 6 N., R. 9 E. only, (S. E. cor.), with brass cap marked					

Resurvey of the East Bdy. of T. 6 N., R. 9 E.

11

Chains

T6N
R9E
S36

1935

from which

A juniper, 8 ins. in diam., bears N. $53\frac{1}{2}^{\circ}$ W., 131 lks. dist., marked T6N R9E S36 BT.

A juniper, 10 ins. in diam., bears N. $81\frac{1}{2}^{\circ}$ W., 189 lks. dist., marked T6N R9E S36 BT.

The original cor. of Ts. 5 and 6 N., Rs. 9 and 10 E., bears N. $62^{\circ} 22'$ E., 37.23 chs. dist., which is a mound of stone 4 ft. base, 2 ft. high. Find no trace of the wood post and three bearing trees recorded in the description of this Tp. cor. Scatter the mound of stone.

Land, mountainous.

Soil, rocky 4th rate.

Timber, juniper and oak.

Undergrowth, oakbrush, manzanita, and cacti.

RESURVEY OF THE SOUTH BDY. OF T. 6 N., R. 9 E.

The South Bdy. of T. 6 N., R. 9 E., was surveyed in 1878 by W. A. Hancock, U.S.D.S., who established corners thereon with common reference to areas on both sides of the line. No retracement or resurvey of any part of the line is of record. The following notes describe an independent resurvey of the entire line, reestablishing corners thereon with reference to areas north of the line only. Except as noted, no trace of original sec. and $\frac{1}{4}$ sec. cors. were found on or near the resurveyed line.

From cor. of T. 6 N., R. 9 E. only, (S.E.cor.), hereinbefore described,

West, on true line, on S. bdy. of sec. 36,

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 18 ft. over SE. slope.

7.20 Small spur, slopes S.; desc. 26 ft. over SW. slope.

9.50 Wash, 10 lks. wide, course SE.; asc. 26 ft. over NE. slope.

12.80 Divide between Tonto and Sycamore Creeks, bears N. and S. About 20 lks. S. of this point is a trail from Tonto, Ariz. to Bush Highway, bearing E. and W. About 20 chs. S. 20° E. is the Circle M. spring and troughs.

Desc. 196 ft. over W. slope to wash.

18.40 Bend in trail bears SE. and SW.

Resurvey of the South Bdy. of T. 6 N., R. 9 E.

Chains

- 20.00 Same trail, bears N. and S.
- 21.85 Same trail, bears NE. and SW.
- 22.62 Same trail, bears NW. and SE.
- 23.60 Wash, 15 lks. wide, course NW.; asc. gradual NE. slope.
- 26.15 Spur, slopes NW.; desc. 23 ft. over SW. slope.
- 27.30 Wash, 15 lks. wide, course NW.; asc. 59 ft. over NE. slope.
- 34.00 Spur, slopes NW.; desc. 141 ft. over SW. slope.
- 36.00 Mine tunnel, bears S. about 2 chs. dist.
- 39.00 Wash, 20 lks. wide, course NW.; asc. 10 ft. over NE. slope.
- 39.40 Trail, bears NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with stone 6x6x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap marked

$\frac{1}{4}$ S36

1935

from which

A sycamore, 8 ins. in diam., bears N. 4° E., 45 lks. dist. marked $\frac{1}{4}$ S36 BT.

No other bearing tree available.

Asc. 187 ft. over NE. slope.

- 47.80 Spur, slopes N.; desc. 72 ft. over SW. slope.
- 52.74 Wash, 10 lks. wide, course N.; asc. gradual NE. slope.
- 56.70 Spur, slopes N.; desc. 90 ft. over NW. slope.
- 60.30 Wash, 20 lks. wide, course N. 20° W.; asc. 288 ft. over NE. slope.
- 67.50 Spur, slopes N. A tent house bears N. 37° E. about 25 chs. dist.
Desc. 292 ft. over NW. slope.
- 76.60 Fire trail, bears N. 10° W. and S. 10° E.
- 77.30 Wash, 30 lks. wide, course N.; asc. 113 ft. over E. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 8x8x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 35 and 36 only, with brass cap marked

T6N R9E
S35 | S36

1935

No bearing trees available.

Resurvey of the South Bdy. of T. 6 N., R. 9 E.

Chains	<p>Land, mountainous. Soil, rocky 4th rate. Timber, oak, juniper, and sycamore. Undergrowth, manzanita, and cacti.</p>
	<p>West, on true line, on S. bdy. of sec. 35.</p> <p>Over mountainous land, through scattering timber and dense undergrowth.</p> <p>Asc. 75 ft. over NE. slope.</p> <p>4.50 Spur, slopes N. 30° E.; desc. 30 ft. over NW. slope.</p> <p>7.60 Wash, 20 lks. wide, course NE.; asc. 161 ft. over SE. slope.</p> <p>14.85 Ridge, bears N. and S.; desc. 90 ft. over NW. slope.</p> <p>18.95 Wash, 10 lks. wide, course N.; asc. 17 ft. over NE. slope.</p> <p>21.00 Spur, slopes N.; desc. 81 ft. over NW. slope.</p> <p>25.60 Wash, 10 lks. wide, course N.; asc. 75 ft. over NE. slope.</p> <p>29.70 Spur, slopes N.; desc. 301 ft. over NW. slope.</p> <p>40.00 Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x6 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap marked</p> <p style="text-align: center;"><u>$\frac{1}{4}$ S 35</u> 1935</p> <p>No bearing trees available.</p> <p>Asc. 184 ft. along NE. slope.</p> <p>47.25 Spur, slopes N.; desc. 136 ft. over NW. slope.</p> <p>55.60 Wash, 10 lks. wide, course NW.; asc. 95 ft. over NE. slope.</p> <p>69.40 Wash, 10 lks. wide, course N.; asc. 77 ft. over NE. slope.</p> <p>71.00 Short spur, slopes N.; desc. 91 ft. over NW. slope.</p> <p>76.30 Wash, 10 lks. wide, course N.; asc. 34 ft. over NE. slope.</p> <p>80.00 Set an iron post 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, with a stone 5x5x5 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 34 and 35 only, with brass cap marked</p> <p style="text-align: center;"><u>T6N R9E</u> <u>S34 S35</u> 1935</p> <p>No bearing trees available.</p> <p>Land, mountainous, Soil, rocky, 4th rate. Timber, juniper and oak. Undergrowth, oakbrush, manzanita, and cacti.</p>

Chains	<p>West, on true line, on S. bdy. of sec. 34.</p> <p>Over mountainous land, through scattering timber and dense undergrowth.</p> <p>Asc. 10 ft. over NE. slope.</p> <p>1.20 Desc. 95 ft. over NW. slope.</p> <p>10.85 Wash, 10 lks. wide, course NE.; asc. 196 ft. over NE. slope.</p> <p>16.55 Ridge, bears N. and S.; desc. 40 ft. over W. slope.</p> <p>19.30 Wash, 10 lks. wide, course N. 5° E., asc. 371 ft. over E. slope.</p> <p>31.30 Ridge, bears N. and S.; desc. 143 ft. over W. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 4x4x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 34 only, with brass cap marked</p> <p style="text-align: center;"><u>$\frac{1}{4}$ S 34</u></p> <p style="text-align: center;">1935</p> <p>No bearing trees available.</p> <p>The original cor. of secs. 3, 4, 33, and 34, hereinafter described, bears N. 45° 32' W. 7.86 chs. dist.</p> <p>Desc. 804 ft. over general S. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 4x3x5 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 33 and 34 only, with brass cap marked</p> <p style="text-align: center;"><u>T6N R9E</u> <u>S33 S34</u></p> <p style="text-align: center;">1935</p> <p>No bearing trees available.</p> <p>The original cor. of secs. 3, 4, 33, and 34, bears N. 80° 54' E. 34.83 chs. dist., which is a stone 12x12x14 ins. above ground, marked with 3 notches on each of E. and W. faces, firmly set, with small mound of stone around it. No trace of the two recorded bearing trees can be found. Destroy all evidence of this orig. cor. monument.</p> <p>Land, mountainous. Soil, rocky 4th rate. Timber, oak and juniper, some sycamore. Undergrowth, oakbrush, manzanita, and cacti.</p>
	<p>West, on true line, on S. bdy. of sec. 33.</p> <p>Over mountainous land, through scattering timber and dense undergrowth.</p> <p>Desc. 53 ft. over SW. slope.</p>

Chains

- 3.10 Wash, 30 lks. wide, course NW.; thence along N. slope.
- 5.30 Wash, 20 lks. wide, course N.; a spring bears S. about 3 chs. dist.
- 6.30 Asc. 12 ft. over NE. slope.
- 9.20 Short spur, slopes N.; desc. 146 ft. over rolling NW. slope.
- 19.70 Wash, 15 lks. wide, course NW.; asc. gradual NE. slope.
- 25.04 Cement water trough, bears S. about 2 chs. dist.
Desc. 100 ft. over SW. slope.
- 29.00 Wash, 30 lks. wide, course NW.; asc. 43 ft. over NE. slope.
- 38.00 Ridge, bears NW. and SE.; desc. 41 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a six inch cross (X) chiseled in exposed bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap marked

$$\frac{1}{4} S 33$$

 1935

No bearing trees available.

Desc. 261 ft. over SW. slope.

- 58.00 Wash, 15 lks. wide, course SW.; asc. 11 ft. over SE. slope.

- 61.90 Spur, slopes SW.; desc. 19 ft. over NW. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 4x4x5 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 32 and 33 only, with brass cap marked

$$\begin{array}{c|c} T6N & R9E \\ \hline S32 & S33 \end{array}$$

 1935

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, and sycamore.

Undergrowth, oakbrush, manzanita, and cacti.

 West, on true line, on S. bdy. of sec. 32.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 41 ft. over W. slope.

- 2.60 Wash, 20 lks. wide, course N. 80° W.; asc. 51 ft. over NE. slope.

Resurvey of the South Bdy. of T. 6 N., R. 9 E.

Chains

5.50 Desc. 125 ft. over NW. slope to

14.70 Wash, 15 lks. wide, course NW.; Desc. 143 ft. over W. slope along S. side of same wash.

24.60 Leave same wash, course SW. from NE.; asc. gradual SE. slope.

34.00 Rocky spur, slopes SW.; desc. 58 ft. over W. slope.

35.00 Rocky wash, 50 lks. wide, course SW.; asc. 24 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 8x8x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 32 only, with brass cap marked

$\frac{1}{4}$ S 32

1935

No bearing trees available.

Desc. 108 ft. over boulder strewn bench, which slopes to South.

75.80 Wash, 15 lks. wide, course SW.; asc. gradual SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 31 and 32 only, with brass cap marked

T6N R9E
S31 | S32

1935

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, and sycamore.

Undergrowth, oakbrush, and cacti, including sahuaro.

West, on true line, on S. bdy. of sec. 31.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 140 ft. over W. slope.

8.15 Wash, 10 lks. wide, course S.; asc. 140 ft. over SE. slope.

18.80 Spur, slopes S.; desc. 105 ft. over W. slope.

34.00 Sycamore Creek, 40 lks. wide, with a stream of water 30 lks. wide, 1 ft. deep, course S.; asc. over vertical wall of rock 40 ft. high, bearing N. and S., facing E.

Resurvey of South Bdy. of T. 6 N., R. 9 E.

17

Chains

34.30 Top of cliff; at this point find remains of the original cor. of Ts. 5 and 6 N., Rs. 8 and 9 E., consisting of broken stub of wooden post in a mound of stone 3 ft. base, 1 ft. high. Faint marking is visible on the post, but no trace of the two recorded bearing trees can be found. Destroy all evidence of this original cor. monument.

Asc. 159 ft. over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 8x8x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap marked

$\frac{1}{4}$ S 31

1935

No bearing trees available.

Asc. 25 ft. over E. slope and broken ledges.

41.00 Spur, slopes S.

Desc. 38 ft. over W. slope.

48.90 Wash, 10 lks. wide, course S.; Desc. 50 ft. over S. slope.

56.70 Spur, slopes SW.; desc. 228 ft. over W. slope.

61.70 Wash, 20 lks. wide, course S.; asc. 83 ft. over E. slope.

65.00 Spur, slopes S.; desc. 112 ft. over W. slope.

67.50 Wash, 40 lks. wide, course S.; asc. 59 ft. over E. slope.

70.63 Bush Highway, bears N. and S.

76.15 Spur, slopes SE.; desc. gradual SW. slope.

76.19 From this point the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, Ts. 5 and 6 N., R. 8 E., bears S. 5° E. 2.75 chs. dist., which is a stone 6x10x12 ins. marked $\frac{1}{4}$, set in a mound of stone, and witnessed by one bearing tree SE. Obliterate marking on stone and bearing tree, and scatter the mound.

79.52 Set an iron post, 3 ft. long, 3 ins. in diam., 12 ins. in the ground to bedrock, with a stone 7x7x4 ins. deposited at base, and in a mound of stone to top, for the cor. of Ts. 6 N., Rs. 8 and 9 E., with brass cap marked

T6N	
R8E	R9E
S36	S31

1935

No bearing trees available.

Original cor. of Ts. 5 and 6 N., Rs. 8 and 9 E., hereinbefore described, bears East, 45.22 chs. dist.

Resurvey of the West Bdy. of T. 6 N., R. 9 E.

Chains

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak, and sycamore.
Undergrowth, oakbrush, and cacti, including sahuaros.

Resurvey of the West Bdy. of T. 6 N., R. 9 E.

The west bdy. of T. 6 N., R. 9 E., was surveyed in 1878 by W. A. Hancock, U.S.D.S., who established corners thereon with common reference to areas on both sides of the line. No retracement or resurvey of any part of this line is of record. The following notes describe an independent resurvey of the line due North, in a position about 1/2 mile West from its original location, reestablishing common reference cors. at 40 ch. intervals. All original cors., including the two terminal township cors., were found and ties obtained to the corresponding reestablished cors., after which the original cors. were destroyed, except those reconstructed as angle points of Tract boundaries.

From the cor. of Ts. 5 and 6 N., Rs. 8 and 9 E., hereinbefore described,

North, on true line, bet. secs. 31 and 36.


Over mountainous land, through scattering timber and dense undergrowth.

Asc. 36 ft. over SE slope.

6.00 Spur, slopes SE.; desc. 117 ft. over NE. slope.

23.00 Wash, 100 lks. wide, course SW.; asc. 210 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked



No bearing trees available.

The original 1/4 sec. cor. of same secs. bears N. 86° 51' E., 43.30 chs. dist., which is a mound of stone 3 ft. base, 1 ft. high. Find no trace of recorded bearing tree. Scatter the mound of stone.

Asc. 41 ft. over S. slope.

42.30 Spur, slopes SW.; desc. gradual NW. slope.

45.80 Wash, 40 lks. wide, course SW.; asc. 638 ft. over SE. slope.

Resurvey of the West Bdy. of T. 6 N., R. 9 E.

Chains
 62.70 Rim of malpais mesa, bears NE. and SW. Asc. gradually over rolling top of mesa.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone 8x8x8 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 25, 30, 31, and 36, with brass cap marked

T 6 N	
R8E	R9E
S25	S30
S36	S31

1935

No bearing trees available.

The original cor. of same secs. bears N. 89° 46' E. 43.62 chs. dist. which is a mound of stone of record courses and distances from stumps of two of the original bearing trees NE. & SW. No marks on stumps. Find no trace of recorded wooden post. Scatter the mound of stone.

Land, mountainous.
 Soil, rocky 4th rate.
 Timber, palo verde, ironwood, some sycamores.
 Undergrowth, oakbrush, cacti, and sahuaros.

North, on true line, bet. secs. 25 and 30.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 48 ft. over SE. slope on mesa.

9.40 Shallow draw, course SE.; asc. 94 ft. over SW. slope.

20.00 Spur, slopes SE.; leave mesa; desc. 434 ft. over N. slope.

37.50 Wash, 10 lks. wide, course NE.; asc. 10 ft. over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x6 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	
S25	S30

1935

No bearing trees available.

The original $\frac{1}{4}$ sec. cor. of same secs. bears N. 83° 24' E., 44.50 chs. dist., which is a mound of stone. No bearing trees are of record. Find no marked stone. Scatter the mound of stone.

Desc. 34 ft. over N. slope.

Resurvey of the West Bdy. of T. 6 N., R. 9 E.

Chains
 43.80 Wash, 20 lks. wide, course E.; asc. 172 ft. over SW. slope.
 56.40 Spur, slopes SE.; desc. 31 ft. over N. slope.
 62.50 Wash, 10 lks. wide, course E.; asc. 27 ft. over E. slope
 at end of spur from W.
 66.00 Desc. gradual N. slope.
 70.10 Wash, 15 lks. wide, course SE.; across level washed land.
 72.50 Wash, 10 lks. wide, course SE.; asc. 138 ft. over rolling
 SW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in
 the ground to bedrock, with stone 8x8x4 ins. marked
 with a cross (X) deposited at base, and in a mound of
 stone to top, for cor. of secs. 19, 24, 25, and 30, with
 brass cap marked

T6N	
R8E	R9E
S24	S19
S25	S30

1935

No bearing trees available.

The original cor. of same secs. bears N. 87° 43' E.,
 42.30 chs. dist., which is a granite stone 4x8x16
 ins. above ground, marked with 2 notches on S. face,
 and 4 notches on E. face, and set in a mound of stone.
 Find no trace of the recorded bearing tree NW. of cor.
 Obliterate marking on the stone and scatter the mound.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak and mesquite, and paloverde.

Undergrowth, oakbrush, cacti, and catclaw.

North, on true line, bet. secs. 19 and 24.

Over mountainous land, through scattering timber and
dense undergrowth.

Asc. 284 ft. over SW. slope to spur.

15.40 Wash, 10 lks. wide, near head, course SE.

18.60 Spur, slopes SE.; desc. gradual NE. slope.

23.90 Wash, 10 lks. wide, course SE.; asc. 313 ft. over SE.
slope.35.00 Rocky point, near end, extends from W.; asc. over
E. slope.40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	
S24	S19

1935

Resurvey of the West Bdy. of T. 6 N., R. 9 E.

Chains No bearing trees available.
 Raise a mound of stone 4 ft. base, 2 ft. high W. of cor.
 The orig. $\frac{1}{4}$ sec. cor. of same secs. bears N. $87^{\circ} 40'$ E.
 40.11 chs. dist., which is a stone 4x10x18 ins. marked
 $\frac{1}{4}$ and set in a md. of stone. Find no trace of the two
 original bearing trees. Obliterate the marking on the
 stone and scatter the mound.

Asc. 290 ft. over SE. slope, across broken bluffs.

56.30 Spur, slopes NE.; desc. 486 ft. over N. slope.

74.70 Wash, 15 lks. wide, course NE.; asc. 14 ft. over SE. slope

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
 the ground to bedrock, with a stone 5x5x2 ins., marked
 with a cross (X) deposited at base, and in a mound of
 stone to top, for cor. of secs. 13, 18, 19, and 24, with
 brass cap marked

T6N	
R8E	R9E
S13	S18
S24	S19

1935

No bearing trees available.

The original cor. of same secs. bears N. $88^{\circ} 04'$ E.
 39.81 chs. dist., which is a mound of earth and stone,
 in which are pieces of the old wood post of record as
 monumenting this cor. Find no trace of the two orig-
 inal bearing trees. Scatter the mound.

Highest peak on W. end of Boulder Mt., bears S. $44\frac{1}{2}^{\circ}$ E.
 Mt. Ord, bears N. $52\frac{1}{2}^{\circ}$ E.
 Asp Mt., bears S. 82° E.

Land, mountainous.
 Soil, rocky 4th rate.
 Timber, oak and mesquite; some sycamore.
 Undergrowth, oakbrush, manzanita, catclaw, and cacti.

North, on true line, bet. secs. 13 and 18.

Over mountainous land, through scattering timber and dense
 undergrowth.

Asc. 7 ft. over SE. slope.

1.80 Spur, slopes NE.; desc. 135 ft. over NE. slope.

8.35 Wash, 20 lks. wide, course NE.; asc. gradual SE. slope.

13.40 Spur, slopes NE.; desc. 157 ft. over NE. slope.


19.54 Wash, 10 lks. wide, course NE.; asc. 44 ft. over SE. slope.

23.60 Spur, slopes NE.; desc. 107 ft. over NE. slope.

32.70 Wash, 20 lks. wide, course NE.; asc. 40 ft. over SE. slope.

Chains

- 34.76 Wire fence, 5 strands, bears NE. and SW.; cement water trough bears West, about 5 chs. dist.
- 37.00 Wash, 15 lks. wide, course NE.; asc. 40 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high, W. of corner.

Water trough, bears S. $44\frac{1}{2}^\circ$ W.
W. peak of Boulder Mt. bears S. 40° E.

The orig. $\frac{1}{4}$ sec. cor. of same secs. bears N. $88^\circ 06'$ E. 39.76 chs. dist., which is a malpais stone 5x7x17 ins. marked $\frac{1}{4}$, and set in a mound of stone. Find no trace of either of the two original bearing trees. Obliterate marking on the stone and scatter the mound.

Asc. 42 ft. over SE. slope.


- 44.80 Trail, bears NE. and SW., on ridge, bears E. and W. Desc. 140 ft. over NW. slope to wash.
- 47.42 Descent becomes steeper; the bearing to same water trough noted at $\frac{1}{4}$ sec. cor. is S. $25^\circ 20'$ W.
- 65.00 Wash, 30 lks. wide, course NE.; thence along rolling E. slope.
- 66.60 Wash, 20 lks. wide, course SE.; asc. 28 ft. over SW. slope.
- 69.00 Spur, slopes SE.; desc. 15 ft. over NE. slope.
- 71.50 Wash, 10 lks. wide, course SE.; asc. 52 ft. over SW. slope.
- 79.00 Spur, slopes SE.; desc. 15 ft. over NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, with a stone 7x7x3 ins. marked with a cross (X) deposited at base of post, and in a mound of stone to top, for cor. of secs. 7, 12, 13, and 18, with brass cap marked




No bearing trees available.

The original cor. of same secs. bears N. $89^\circ 14'$ E., 40.28 chs. dist., which is a granite stone 10x8x18 ins., marked with 2 notches on N. edge, set in a mound of stone, and witnessed by a juniper 20 ins. diam., S. 10° W., 64 lks. dist., marked S18 T6N, and other marks which are illegible, and stump of a juniper 40 ins. diam., N. 82° W., 110 lks. dist., marking obliterated. Obliterate marking on the stone and bear-

Resurvey of the West Bdy. of T. 6 N., R. 9 E.

Chains	<p>ing tree, and scatter the mound. Land, mountainous. Soil, rocky 4th rate. Timber, oak, juniper, and sycamore. Undergrowth, oakbrush, manzanita, and cacti.</p> <hr/> <p>North, on true line, bet. secs. 7 and 12. Over mountainous land, through scattering timber and undergrowth. Desc. 90 ft. over NE. slope.</p> <p>3.75 Wash, 8 lks. wide, course SE.; asc. 54 ft. over SW. slope.</p> <p>9.25 Ridge, bears SE.; desc. 43 ft. over NE. slope.</p> <p>13.90 Wash, 8 lks. wide, course SE.; asc. 70 ft. over SW. slope.</p> <p>18.25 Ridge, bears NW. and SE.; desc. 284 ft. over NE. slope.</p> <p>32.63 Wire fence, bears E. and W.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> $\frac{1}{4}$  1935 </div> <p style="text-align: right;">from which,</p> <p>A cedar, 8 ins. in diam., bears S. $34\frac{1}{2}^{\circ}$ E., 89 lks. dist., marked $\frac{1}{4}$ S7 BT.</p> <p>A cedar, 9 ins. in diam., bears N. 36° W., 91 lks. dist., marked $\frac{1}{4}$ S12 BT.</p> <p>The orig. $\frac{1}{4}$ sec. cor. of same secs. bears N. $88^{\circ} 18'$ E., 37.22 chs. dist., which is a granite stone 8x16x18 ins., marks illegible, set in a mound of stone. Find no trace of the bearing tree NW., described in the official record.</p> <p>This old $\frac{1}{4}$ Sec. cor. is reconstructed with a brass-capped iron post as angle point No. 3 of Tract No. 38 of T. 6 N., R. 9 E., as hereinafter described.</p> <p>40.30 Wash, 10 lks. wide, course SE.; asc. 18 ft. over S. slope.</p> <p>44.00 Ridge, bears NW. and SE.; desc. 21 ft. over NE. slope.</p> <p>46.05 Draw, 10 lks. wide, course SE.; asc. 23 ft. over SW. slope.</p> <p>57.50 Spur, slopes E.; desc. 71 ft. over NE. slope.</p> <p>66.00 Wash, 10 lks. wide, course E.; asc. 78 ft. over S. slope.</p> <p>76.70 Spur, slopes E.; desc. 15 ft. over N. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone 8x8x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 1, 6, 7, and 12, with brass cap marked</p>
--------	---

Chains



1935

from which,

A laurel, 10 ins. in diam., bears N. 5° W., 85 lks. dist., marked T6N R8E S1 BT.

A laurel, 10 ins. in diam., bears S. 30° E., 62 lks. dist., marked T6N R9E S7 BT.

A cedar, 5 ins. in diam., bears S. 47° W., 57 lks. dist., marked T6N R8E S12 BT

No other bearing tree available.

Mt. Ord, bears N. 72° E.

Asp Mtn., bears S. 62½° E.

The orig. cor. of same secs. bears N. 88° 34' E.; 40.09 chs. dist., which is a mound of stone, from which one of the original bearing trees, a sycamore, bears N. 5° W., 203 lks. dist. Marking on this tree has been effaced by decay. Find no trace of wood post or the SE. bearing tree.

This old cor. is reconstructed with a brass-capped iron post as angle point No. 2 of Tract No. 38 of T. 6 N., R. 9 E., as hereinafter described.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak, laurel, and sycamore.
Undergrowth, oakbrush, catclaw, and cacti.

North, on true line, bet. secs. 1 and 6.

Over mountainous land, through scattering timber and undergrowth.

Desc. 39 ft. over NE. slope.

4.80 Creek, 40 lks. wide, 6 ins. deep, course E.


Asc. 195 ft. over S. slope.

10.20 U. S. Forest Service wire fence, bears NW. and SE.

16.47 U. S. Forest Service wire fence, bears E. and W.

38.50 Flat-topped ridge, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with stone marked with a cross (X) deposited at base, and in a mound of stone to top for ¼ sec. cor., with brass cap marked.



1935

Chains

No bearing trees available.

Mt. Ord bears N. $78\frac{1}{2}^{\circ}$ E.

Asp Mtn. bears S. $58\frac{1}{2}^{\circ}$ E.

The original $\frac{1}{4}$ sec. cor. of same secs. bears N. $89^{\circ} 36'$ E. 38.98 chs. dist., which is a mound of stone, witnessed by the two original juniper bearing trees, one N. 50° E., 51 lks. dist. marked $\frac{1}{4}$, and the other N. $17\frac{1}{2}^{\circ}$ E., 156 lks. dist., with no marking visible. No marked stone found. Scatter the mound, and obliterate marks on the bearing tree.

Desc. 8 ft. over N. slope.

46.60 Wash, 10 lks. wide, course E.; asc. 42 ft. over SW. slope.

57.35 Ridge, bears E. and W.; desc. 167 ft. over N. slope.

58.77 Wire fence, bears E. and W.

63.45 Wash, 15 lks. wide, course E.; asc. 164 ft. over S. slope.

68.50 Ridge, bears NW. and SE.; desc. 204 ft. along NE. slope.

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of Ts. 6 and 7 N., Rs. 8 and 9 E., with brass cap marked

T 7 N	
R8E	R9E
S36	S31
S 1	S 6
T 6 N	
1935	

from which,

A cedar, 8 ins. in diam., bears N. 78° W., 62 lks. dist., marked T7N R8E S36 BT.

A cedar, 14 ins. in diam., bears N. 59° E., 180 lks. dist., marked T7N R9E S31 BT.

A cedar, 7 ins. in diam., bears S. 35° E., 166 lks. dist., marked T6N R9E S6 BT.

A cedar, 14 ins. in diam., bears S. 34° W., 179 lks. dist., marked T6N R8E S1 BT.

Chimney of U.S.F.S. Sunflower Ranger Station, bears S. $31^{\circ} 48'$ E.

Mt. Ord bears N. $84^{\circ} 48'$ E.

West peak of Boulder Mountain bears S. $27^{\circ} 35'$ E.

Crabtree Butte bears S. 21° E.

A bell-shaped putte bears S. $9^{\circ} 37'$ W.

Mess hall in Transient Camp bears S. $26^{\circ} 10'$ E.

The original Tp. cor. bears N. $89^{\circ} 55'$ E. 37.66 chs. dist., which is a mound of earth and stone, 5 ft. base, 3 ft. high, in the center of which is firmly

Chains

set a juniper post, 3x4 ins., projecting 12 ins. above mound. Marking on this post is illegible. Find no trace of any of the three original bearing trees. Destroy all trace of this old cor. monument.

The original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, Ts. 6 and 7 N., R. 8 E., bears S. 77° W. 218 lks. dist., which is a malpais stone 6x8x14 ins., marked $\frac{1}{4}$, firmly set in mound of stone. Find no trace of the original bearing tree. Obliterate the marking on the stone and scatter the mound.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, cedar, sycamore.

Undergrowth, oakbrush, catclaw, and cacti.

Resurvey of the North Bdy. of T. 6 N., R. 9 E.

The North Bdy. of T. 6 N., R. 9 E., was surveyed by W. A. Hancock, U.S.D.S., in 1878, who established corners thereon with reference to areas on both sides of the line. No retracement or resurvey of any part of this line is of record. The following notes describe an independent resurvey of the entire line, reestablishing common reference corners thereon at 40 ch. intervals, counting from the E. Diligent search was made on and near the line for the original sec. and $\frac{1}{4}$ sec. cors., but none was found.

From reestablished cor. of Ts. 6 and 7 N., Rs. 8 and 9 E.

East, on random line, setting temp. cors. at 40 ch. intervals, and at

479.30 Intersect the reestablished cor. of Ts. 6 and 7 N., Rs. 9 and 10 E., hereinbefore described.

Thence

West, on true line, bet. secs. 1 and 36.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 898 ft. over SE. slope.

16.15 Trail, Tonto to Mt. Ord, bears NE. at bend.

19.15 Same trail, bears NE. and SW.

25.27 Same trail, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 4x3x2 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked

Resurvey of the North Bdy. of T. 6 N., R. 9 E.

Chains

$\frac{1}{4}$ S 36
 S 1
 1935

No bearing trees available.

Asc. 243 ft. over SE. slope.

52.20 Top of rocky, narrow ridge, bears N. and S.; desc. 150 ft. over SW. slope.

56.60 Bottom of ravine, 10 lks. wide, course S.; asc. 251 ft. over broken SE. slope.

77.25 Broken top of ridge, slopes S. from NW.; desc. over ledges 32 ft. to

80.00 Point for cor. of secs. 1, 2, 35 and 36 falls on exposed rock at edge of cliff, where iron post cannot be set. Cut a cross (X) in rock of sec. cor. point, and at 8 lks. S. 24° W. therefrom

Set an iron post 3 ft. long, 2 ins. in diam., 18 ins. into crack in granite outcrop, and in mound of stone to top of post, for witness cor. of secs. 1, 2, 35, and 36, with brass cap marked

WC
 T7NR9E
S35 | S36
 S2 | S1
 T6N
 1935

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

From true point for cor. of secs. 1, 2, 35, and 36,

West, on true line, bet. secs. 2 and 35.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 196 ft. over broken SW. slope.

0.50 Top of cliff, 50 ft. high, bears N. and S., facing W.

0.55 Foot of same cliff.

4.90 Head of wash, course S.; asc. 57 ft. over SE. slope.

7.40 Rocky outcrop on spur, slopes S.; desc. 64 ft. over SW. slope.

9.15 Head of ravine, course SE.; asc. 104 ft. over SE. slope.

15.65 Spur, slopes S.; desc. 25 ft. over SW. slope.

21.40 Wash, 5 lks. wide, course S.; asc. 332 ft. over SE. slope.

Chains

- 32.65 High ridge, bears N. and S.; desc. 39 ft. over SW. slope.
- 35.90 Foot of high, rocky knob, top of which bears N. about 5 chs. dist.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 5x5x2 ins., marked with a cross (X) deposited at base of post, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 35
	S 2
	1935

No bearing trees available.

W. end of Boulder Mt., bears S. $8\frac{1}{2}^{\circ}$ W.
 NW. peak of the Four Peaks, bears S. $16\frac{1}{2}^{\circ}$ E.
 Crabtree Butte, bears S. $31^{\circ} 05'$ W.
 Asp. Mt. bears S. 11° E.
 Pinal Mt. bears S. $38\frac{3}{4}^{\circ}$ E.

Desc. 269 ft. over SW. slope.

- 47.50 Wash, 10 lks. wide, near ravine head, course S.; asc. 60 ft. over SE. slope.
- 51.50 Top of low spur, slopes S.; desc. 49 ft. over W. slope.
- 54.50 Wash, 10 lks. wide, course S.; asc. 86 ft. over SE. slope.
- 60.52 U. S. Forest Service wire fence, bears N. and S.
- 62.40 Low saddle in high ridge, bears NE. and SW. A rocky peak on same, bears SW. about 10 chs. dist.
- Desc. 260 ft. over NW. slope.
- 72.42 Wash, 5 lks. wide, course SW.; asc. 85 ft. over SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for the cor. of secs. 2, 3, 34, and 35, with brass cap marked

T7N R9E	
S34	S35
S 3	S 2
	T6N
	1935

No bearing trees available.

Land, mountainous.
 Soil, rocky 4th rate.
 Timber, oak, and juniper, with some yellow pine.
 Undergrowth, oakbrush, manzanita, and cacti.

West, on true line, bet. secs. 3 and 34.

Over mountainous land, through scattering timber and

Chains

dense undergrowth.

Asc. gradual SE. slope.

1.30 Ridge, bears NE. and SW.; desc. 321 ft. over W. slope.

15.00 Swale, drains SW.; asc. gradual SE. slope.

20.65 Ridge, bears NE. and SW.; desc. 533 ft. over NW. slope.

21.45 Water trough, bears N. 41° 50' W., 12.45 chs. dist.

35.30 Trail in wash, 10 lks. wide, course SW.

Asc. 76 ft. over SE. slope.

39.80 Trail, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 8x8x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap marked
$$\frac{1}{4} \begin{array}{r} S 34 \\ S 3 \\ 1935 \end{array}$$

No bearing trees available.

Asc. gradual SE. slope.

45.00 Low saddle in ridge, bears NE. and SW.; desc. 153 ft. over NW. slope, through dense timber.

53.00 Swale, drains N.; asc. gradual NE. slope.

57.50 Ridge, bears NW. and SE.; desc. 388 ft. over NW. slope, about 50 lks. S. of small drain, course W.

68.25 Leave juniper thicket, bears N. and S.

72.50 Wash, 20 lks. wide, course SW.; asc. 152 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone 8x8x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 3, 4, 33, and 34, with brass cap marked

$$\begin{array}{r|l} T7N & R9E \\ S33 & S34 \\ \hline S4 & S3 \\ T6N & \\ 1935 & \end{array}$$

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, and sycamore.

Undergrowth, oakbrush, manzanita, and cacti.

Chains

West, on true line, bet. secs. 4 and 33.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 80 ft. over E. slope.

3.90 Ridge, bears N. and S.; desc. 490 ft. over SW. slope.

24.35 Wash, 10 lks. wide, course SW.; asc. 40 ft. over E. slope.

27.32 Ridge, bears N. and S.; desc. 204 ft. over SW. slope.

36.80 Wash, 5 lks. wide, course SE.; asc. 18 ft. over SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 33
S 4
1935

from which,

A juniper, 10 ins. in diam., bears S. $32\frac{1}{2}^{\circ}$ E., 87 lks. dist., marked $\frac{1}{4}$ S 4 BT

No other bearing tree available; raise a mound of stone 4 ft. base, 2 ft. high, N. of cor., 3 ft. dist.

U.S.M.M. No. 1, Brown Mining District, bears S. $47^{\circ} 11'$ E., 28.37 chs. dist., which is a stone marked and witnessed as of record.

House, (Tom Daniels), bears S. $2^{\circ} 09'$ W. about 28 chs. dist.

Asc. 63 ft. over broken S. slope.

44.00 Trail, bears N. and S.

49.05 Saddle in ridge, bears N. and S.; desc. 168 ft. over W. slope.

63.40 Wash, 5 lks. wide, course SW.; asc. 38 ft. over E. slope.

67.90 Low ridge, bears NE. and SW.; desc. 137 ft. over NW. slope.

77.55 Wash, 5 lks. wide, course SW.; asc. 23 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with a stone 3x4x5 ins., marked with a cross (X), deposited at base, for cor. of secs. 4, 5, 32, and 33, with brass cap marked

T7NR9E
S32 | S33
S 5 | S 4
T6N
1935

No bearing trees available.

Land, mountainous,

Soil, rocky 4th rate.

Timber, oak, juniper, and sycamore.

Undergrowth, oakbrush, manzanita, and cacti.

Resurvey of the North Bdy. of T. 6 N., R. 9 E.

Chains	
	West, on true line, bet. secs. 5 and 32.
	Over mountainous land, through scattering timber and undergrowth.
	Asc. 55 ft. over SE. slope.
7.95	Ridge, bears N. and S.; desc. 292 ft. over broken W. slope.
26.65	U. S. Forest Service trail, bears N. 80° E. and SW.
28.45	Wash, 35 lks. wide, course SW.; a spring of good water bears North, 1 ch. dist.; asc. 24 ft. over E. slope.
29.60	Spur, slopes S.; desc. 27 ft. over SW. slope.
32.50	Wash, 25 lks. wide, course SE.; asc. 165 ft. over E. slope.
32.98	Trail, bears NW. and SE.
33.68	Same trail, bears N. and S.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone 2x4x5 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ <u>S32</u> S5 1935
	No bearing trees available.
	Asc. 230 ft. over E. slope.
45.20	East rim of mesa, bears N. and S.; desc. 36 ft. over gradual W. slope, on mesa.
52.00	West rim of mesa, bears N. & S. Leave mesa. Desc. 160 ft. over steep W. slope.
57.90	Wash, in bottom of canyon, 10 lks. wide, course S.; asc. 149 ft. over E. slope.
62.15	E. rim of mesa, bears NE. and SW.; asc. gradual E. slope, on mesa.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 2x4x5 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 5, 6, 31, and 32, with brass cap marked
	T7NR9E S31 S32 —+— S6 S5 T6N 1935
	No bearing trees available.
	Land, mountainous.
	Soil, rocky 4th rate.
	Timber, juniper and sycamore.
	Undergrowth, oakbrush, catclaw, and cacti.

Chains

West, on true line, bet. secs. 6 and 31.

Over rolling land, through scattering timber and undergrowth, on mesa.

5.34 U. S. Forest Service fence, nears NE. and SW.

5.57 Trail, bears NE. and SW.

18.45 W. rim mesa, bears N. and S. Leave mesa; desc. 572 ft. over steep W. slope.

30.60 Bottom of small canyon; wash, 15 lks. wide, course S.; asc. 253 ft. over steep E. slope.

39.75 East rim of mesa brs. N. and S. Thence over nearly level mesa.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled on exposed surface of rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S31}{S6}$$

1935

No bearing trees available.

41.64 The original cor. of Ts. 6 and 7 N., Rs. 8 and 9 E., hereinbefore described, bears N. 5 lks. dist. Destroy all evidence of same.

45.50 Desc. 58 ft. over gradual W. slope.

53.45 West rim of mesa, bears N. and S. Leave mesa; desc. 476 ft. over steep W. slope.

59.65 U. S. Forest Service fence, bears NE. and SW.

65.46 Old road, bears N. and S.; enter level bottom land and dense timber, bears N. and S.

66.65 Sycamore Creek, 50 lks. wide, course S. Leave level bottom land, bears N. and S., enter mountainous land; asc. 319 ft. over E. slope.

67.75 Bush Highway, bears N. and S.

79.30 The reestablished Cor. of Ts. 6 and 7 N., Rs. 8 and 9 E., hereinbefore described.

Land, rolling mountainous and level.

Soil, rocky 4th rate.

Timber, oak, juniper, sycamore, and walnut.

Undergrowth, oakrush, manzanita, and cacti.

Chains

TRACT NO. 37.

Comprising the following described land in original Section 5, T. 6 N., R. 9 E., as shown on plat of said township approved February 17, 1879, patented April 1, 1907, to Wm. W. Moore, under H.E.1865, Prescott;

SW $\frac{1}{4}$ NE $\frac{1}{4}$, N $\frac{1}{2}$ SE $\frac{1}{4}$, and SE $\frac{1}{4}$ SE $\frac{1}{4}$.

The location of this tract is based upon the subdivision of the section, controlled by the original SE. and SW. sec. cors., and the original E. $\frac{1}{4}$ sec. cor. of said section and the original cor. of Ts. 6 & 7 N., Rs. 8 & 9 E. No original sec. or $\frac{1}{4}$ sec. cors. having been found on the N. bdy. of this Tp., temp. NW. & NE. cors. and N. $\frac{1}{4}$ sec. cor. of sec. 5, are set on the resurveyed Tp. bdy. at record distances E. from said Tp. cor. for control of the W. bdy., N. $\frac{1}{2}$ of E. bdy. and meridional $\frac{1}{4}$ sec. line, of original sec. 5. The original W. and S. $\frac{1}{4}$ sec. cors. of sec. 5 could not be found.

At point in center of NE $\frac{1}{4}$ of original sec. 5, determined by record proportions, monument angle point No.1 of Tract No. 37 as follows:

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in ground to bedrock and in mound of stone to top, for angle point No.1 of Tract No. 37, with brass cap marked

T6N R9E

S4

AP 1

TR 37

1936

Thence

N. 82° 44' W., on line 1-2 of bdy. of Tract No. 37.

16.43

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in ground to bedrock, and in mound of stone to top, for angle point No.2 of Tract No. 37, with brass cap marked

T6N R9E

S5

AP. 2

TR 37

1936


Thence

S. 12° 15' W., on line 2-3 of bdy. of Tract No. 37.

45.82


Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in ground to bedrock and in mound of stone to top, for angle point No. 3 of Tract No. 37, with brass cap marked

Chains

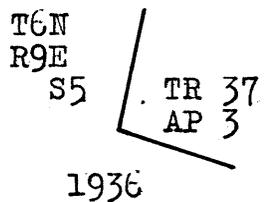


Thence S. 72° 25' E., on line 3-4 of bdy. of Tract No. 37.

14.13 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in ground to bedrock and in mound of stone to top, for angle point No. 4 of Tract No. 37, with brass cap marked



Thence S. 9° 41' W., on line 4-5 of bdy. of Tract No. 37.


20.88 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in ground to bedrock and in mound of stone to top, for angle point No. 5 of Tract No. 37, with brass cap marked

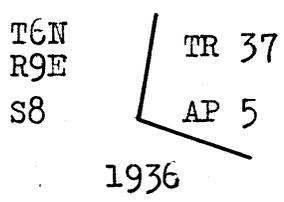

Thence S. 71° 23' E., on line 5-6 of bdy. of Tract No. 37.

15.10 Intersect the original cor. of secs. 4, 5, 8 & 9, which is a stone, 6x8x16 ins. above ground, firmly set, marked with 5 notches on S. face and 4 notches on E. face. The record bearing trees SE. and SW. of cor. cannot be found. This sec. cor. is alongside a cor. of a woven wire fence extending N. 10° E. and N. 80° W.

Alongside the cor. stone, set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for angle point No. 6 of Tract No. 37, with brass cap marked

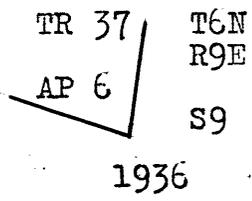

Thence N. 7° 12' E., on line 6-7 of bdy. of Tract No. 37.

42.60 Intersect original 1/4 sec. cor. of secs. 4 & 5, which is a small mound of stone at cor. of barbed wire fence. Fence extends W. and S. No bearing trees were recorded as accessory to this cor.

Remove the mound and in center of its position set an

Survey of Tracts in Township 6 North, Range 9 East.

35

Chains

iron post, 3 ft. long, 1 in. diam., 22 ins. in ground to bedrock and rebuild mound of stone around post, for angle point No. 7 of Tract No. 37, with brass cap marked

T6N R9E

AP 7 S4

TR 37

1936

Thence

N. 73° 36' W., on line 7-8 of bdy. of Tract No. 37.

13.17 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in ground to bedrock and in mound of stone to top, for angle point No. 8 of Tract No. 37, marked on brass cap

TR 37

T6N
R9E
S5

AP 8

1936

Thence

N. 18° 55' E., on line 8-1 of bdy. of Tract No. 37.

27.89 Intersect angle point No. 1 of Tract No. 37, the place of beginning, hereinbefore described.

TRACT NO. 38.

Comprising the following described land in original Section 7, T. 6 N., R. 9 E., as shown on plat of said township approved Feb. 17, 1879, patented Dec. 20, 1892, to David Hardenberg, under Pre. 466, Prescott;

Lots 1, 2, 3, and NE $\frac{1}{4}$ SW $\frac{1}{4}$.

The location of this Tract is based upon the subdivision of the section, controlled by the original NE., NW., and SW. cors., and original E., W., and S. $\frac{1}{4}$ sec. cors. of said section. All of the original cors. and $\frac{1}{4}$ sec. cors. referring to the section were found, with the exception of the N. $\frac{1}{4}$ sec. cor.

At proportional dist. bet: the NE. and NW. cors. of original section 7, set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock and in a mound of stone to top, for angle point No. 1 of Tract No. 38, with brass cap marked

AP 1 T6N
TR 38 R9E
S6

1935

Thence


West, on line 1-2 of bdy. of Tract No. 38.

36 Survey of Tracts in Township 6 North, Range 9 East

Chains
15.62

Intersect the original cor. of secs. 1, 6, 7 and 12, hereinbefore described. Destroy all evidence of the old cor. monument, and at original cor. point,

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 2 of Tract No. 38, with brass cap marked




Thence S. 4° 07' W., on line 2-3 of bdy. of Tract No. 38.

40.06

Intersect the original 1/4 sec. cor. of secs. 7 and 12, hereinbefore described. Destroy all evidence of the old cor. monument, and at original cor. point,


Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 3 of Tract No. 38, with brass cap marked



Thence S. 4° 20' E., on line 3-4 of bdy. of Tract No. 38.

20.38


Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 4 of Tract No. 38, with brass cap marked



Thence N. 88° 16' E., on line 4-5 of bdy. of Tract No. 38.

30.58

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in mound of stone to top, for angle point No. 5 of Tract No. 38, and angle point No. 2 of Tract No. 39, with brass cap marked

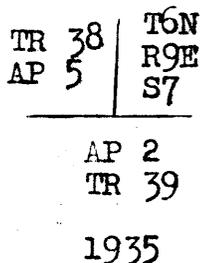

Chains

Thence
N. 3° 30' E., on line 5-6 of bdy. of Tract No. 38.

19.91 Center of original sec. 7, T. 6 N., R. 9 E., set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 6 of Tract No. 38, with brass cap marked

T6N	R9E
AP 6	S7
TR 38	

1935

Thence
S. 89° 12' W., on line 6-7 of bdy. of Tract No. 38.

17.50. Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 7 of Tract No. 38, with brass cap marked

TR 38	T6N R9E
AP 7	S7

1935

Thence
N. 3° 49' E., on line 7-1 of bdy. of Tract No. 38.

39.82 Intersect angle point No. 1 of Tract No. 38, the place of beginning, hereinbefore described.

TRACT No. 39

Comprising the following described land in original Secs. 7 and 18, T. 6 N., R. 9 E., as shown on plat of said township approved Feb. 17, 1879, patented Jan. 11, 1892, to John M. Ward, under H.E. 511, Prescott;

SE $\frac{1}{4}$ SW $\frac{1}{4}$ and SW $\frac{1}{4}$ SE $\frac{1}{4}$ of Sec. 7,
W $\frac{1}{2}$ NE $\frac{1}{4}$ of Sec. 18.


The location of this Tract is based upon the subdivision of the sections, controlled by 9 original corners, viz., NE. and NW. cors., and E. and W. $\frac{1}{4}$ sec. cors. of sec. 7, the E. and W. $\frac{1}{4}$ sec. cors. of sec. 18, the SE.-NE. cor., SW.-NW. cor., and S.-N. $\frac{1}{4}$ sec. cor., respectively, of secs. 7 and 18. All of the original sec. cors. and $\frac{1}{4}$ sec. cors. referring to both secs., were found, except the N. $\frac{1}{4}$ sec. cor. of sec. 7.

At center of SE $\frac{1}{4}$ of original sec. 7,

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 1 of Tract No. 39, with brass cap marked

38 Survey of Tracts in Township 6 North, Range 9 East

Chains




1935

Thence S. 89° 46' W., on line 1-2 of bdy. of Tract No. 39.

19.27 Angle point No. 2 of Tract No. 39, identical with angle point No. 5 of Tract No. 38, hereinbefore described in notes of survey of said Tract No. 38.

Thence S. 88° 16' W., on line 2-3 of Tract No. 39, and line 4-5 of Tract No. 38.

16.04 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 3 of Tract No. 39, with brass cap marked

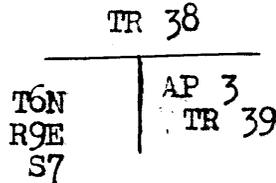


1935

Angle point No. 4 of Tract No. 38 bears S. 88° 16' W., 14.54 chs. dist., hereinbefore described.

From angle point No. 3 of Tract No. 39, S. 0° 39' E., on line 3-4 of bdy. of Tract No. 39.


20.10 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 4 of Tract No. 39, with brass cap marked



1935

Thence N. 87° 10' E., on line 4-5 of bdy. of Tract No. 39.

14.62 Intersect the original 1/4 sec. cor. of secs. 7 and 18, which is an iron pipe, 1 in. diam., firmly set in ground and mound of stone, projecting 8 ins. above the mound, Find no trace of the original bearing tree NW. of cor. Destroy all evidence of this old cor. monument, and at original cor. point, set an iron post, 3 ft. long, 1 in. diam., 20 ins. in ground to bedrock, and in a mound of stone to top, for angle point No. 5 of Tract No. 39, with brass cap marked

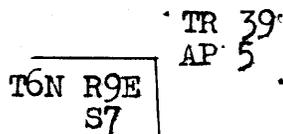

1935

Survey of Tracts in Township 6 North, Range 9 East

39

Chains

Thence

S. 2° 12' E., on line 5-6 of bdy. of Tract No. 39.

40.51

Center of original sec. 18, T. 6 N., R. 9 E.
 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the
 ground to bedrock, and in a mound of stone to top, for
 angle point No. 6 of Tract No. 39, with brass cap
 marked

T6N
R9E
S18

TR 39
AP 6

1935

Thence

N. 89° 47' E., on line 6-7 of bdy. of Tract No. 39.

19.50

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the
 ground to bedrock, and in a mound of stone to top, for
 angle point No. 7 of Tract No. 39, with brass cap
 marked

TR 39
AP 7

S17.

T6N R9E

1935

Thence

N. 1° 33' W., on line 7-8 of bdy. of Tract No. 39.

40.33

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the
 ground to bedrock, and in a mound of stone to top, for
 angle point No. 8 of Tract No. 39, with brass cap
 marked

AP 8
TR 39

T6N
R9E
S8

1935

Thence

N. 1° 28' E., on line 8-1 of bdy. of Tract No. 39.

20.03

Intersect angle point No. 1 of Tract No. 39, the place of
 beginning, hereinbefore described.

 TRACT NO. 40.

Comprising the following described land in original
 section 17, T. 6 N., R. 9 E., as shown on plat of said
 township approved Feb. 17, 1879, patented Jan. 27, 1904
 to Houston C. Ward, under H.E. 1458, Prescott;

NE $\frac{1}{4}$ SW $\frac{1}{4}$, NW $\frac{1}{4}$ SE $\frac{1}{4}$, and S $\frac{1}{2}$ SE $\frac{1}{4}$.

The location of this tract is based upon the subdivision
 of the section, controlled by the original SE. and SW. sec.
 cors., and all of the original $\frac{1}{4}$ sec. cors. of said sec-
 tion. All of the original sec. and $\frac{1}{4}$ sec. cors. referring


40 Survey of Tracts in Township 6 North, Range 9 East

Chains

to the section, were found.

At midpoint on the E 1/2 of the latitudinal 1/4 sec. line of original sec. 17, T. 6 N., R. 9 E.


Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 1 of Tract No. 40, with brass cap marked,

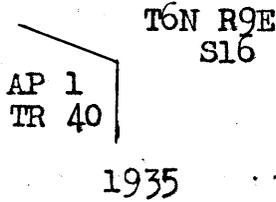

Thence N. 73° 56' W., on line 1-2 of bdy. of Tract No. 40.

36.88


Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in ground to bedrock, and in a mound of stone to top, for angle point No. 2 of Tract No. 40, with brass cap marked



Thence S. 2° 00' W., on line 2-3 of bdy. of Tract No. 40.

23.09


Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in ground to bedrock, and in a mound of stone to top, for angle point No. 3 of Tract No. 40, with brass cap marked



Thence S. 60° 38' E., on line 3-4 of bdy. of Tract No. 40.

18.21

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for angle point No. 4 of Tract No. 40, with brass cap marked



Thence S. 5° 10' W., on line 4-5 of bdy. of Tract No. 40.

27.06

Intersect original 1/4 sec. cor. of secs. 17 and 20, which is a mound of stones, from which a juniper brs. S. 20° E., 81 lks. dist., and a juniper brs. S. 62 lks. dist., both marked 1/4 BT. These trees agree substantially with

Survey of Tracts in Township 6 North, Range 9 East

41

Chains

the record in their relation to the cor. Find no trace of a marked stone. Obliterate the markings on the trees, remove the mound, and at original cor. point,

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 5 of Tract No. 40, with brass cap marked

S20 | TR 40
AP 5

T6N R9E

1935

Thence

N. 85° 33' E., on line 5-6 of bdy. of Tract No. 40.

40.22 Intersect original cor. of secs. 16, 17, 20 and 21, which is a granite stone 8x12x20 ins. above ground, marked with 4 notches on E. face, and 3 notches on S. face, firmly set in ground and mound of stone, from which the large boulder about 40 ft. high, recorded in the field notes of the original survey, bears N. 50° W., 450 lks. dist., which agrees with the record. Find no trace of the recorded bearing tree NE. of cor. Obliterate marking on the stone, remove the mound, and alongside the stone,

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, and in mound of stone to top, for angle point No. 6 of Tract No. 40, and angle point No. 2 of Tract No. 41, with brass cap marked

TR 40 | T6N R9E
AP 6 | S21

AP 2
TR 41

1935

Thence

N. 0° 54' E., on line 6-7 of bdy. of Tract No. 40.

20.23 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 7 of Tract No. 40, with brass cap marked

AP 7 | T6N R9E
TR 40 | S16

1935

Thence

N. 84° 35' W., on line 7-8 of bdy. of Tract No. 40.


19.07 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 8 of Tract No. 40, with brass cap marked

TR 40 | T6N R9E
AP 8 | S 16

1935

Chains	<p>Thence N. $3^{\circ} 21'$ E., on line 8-1 of bdy. of Tract No. 40.</p>
23.62	<p>Intersect angle point No. 1 of Tract No. 40, the place of beginning, hereinbefore described.</p> <p style="text-align: center;">-----</p> <p style="text-align: center;">TRACT NO. 41.</p> <p style="text-align: center;">Comprising the following described land in original secs. 20 and 21, T. 6 N., R. 9 E., as shown on plat of said township approved Feb. 17, 1879, patented July 11, 1890, to Houston C. Ward, under Pre. 415, Prescott;</p> <p style="text-align: center;">NE$\frac{1}{4}$ NE$\frac{1}{4}$ of sec. 20, N$\frac{1}{2}$ NW$\frac{1}{4}$ and NW$\frac{1}{4}$ NE$\frac{1}{4}$ of sec. 21</p> <p>The location of this tract is based upon the subdivision of the original secs., controlled by six original cors. as follows; NE.-NW. cor. of secs. 20 and 21, NE. cor. of sec. 21, E. and S. $\frac{1}{4}$ sec. cors. of sec. 21, $\frac{1}{4}$ sec. cor. of secs. 20 and 21, and N. $\frac{1}{4}$ sec. cor. of sec. 20. The original cors. referring to secs. 20 and 21 which could not be found, were: SW. cor. of sec. 20, W. and S. $\frac{1}{4}$ sec. cors. of sec. 20, SE.-SW. cor. of secs. 20 and 21, and the N. $\frac{1}{4}$ sec. cor. of sec. 21.</p> <p>Owing to lack of proper control cors. on the W. and S. bdrs. of original sec. 20, the portions of the bdy. of Tract No. 41 within said sec. are surveyed parallel to the original sec. lines forming the N. and E. bdrs. of the NE$\frac{1}{4}$ of the original section, from the midpoints thereon.</p> <p style="text-align: center;">-----</p> <p>At midpoint of E. $\frac{1}{2}$ of line bet. original secs. 16 and 21, Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 1 of Tract No. 41, with brass cap marked</p> <div style="text-align: center;"> <p>T6N R9E</p> <p>S21</p> <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <p>API</p> <p>TR 41.</p> </div> <p>1935</p> </div>
59.50	<p>Thence S. $84^{\circ} 32'$ W., on line 1-2 of bdy. of Tract No. 41.</p> <p>Intersect angle point No. 2 of Tract No. 41, and angle point No. 6 of Tract No. 40, at original cor. of secs. 16, 17, 20 and 21. This angle point monument is hereinbefore described in notes of survey of Tract No. 40.</p>
20.11	<p>Thence S. $85^{\circ} 33'$ W., on line 2-3 of bdy. of Tract No. 41, and line 5-6 of bdy. of Tract No. 40.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 3 of Tract No. 41, with brass cap marked</p>

Chains

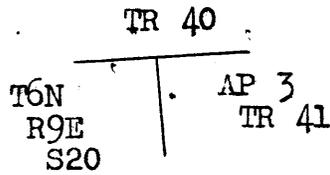


1935

Angle point No. 5 of Tract No. 40 brs. S. $85^{\circ} 33'$ W.,
20.11 chs. dist.

From angle point No. 3 of Tract No. 41,

S. $6^{\circ} 44'$ E., (parallel to N. $\frac{1}{2}$ of line bet. original
secs. 20 and 21), on line 3-4 of bdy. of Tract No.
41.


- 19.55 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in
the ground to bedrock, and in a mound of stone to top,
for angle point No. 4 of Tract No. 41, with brass cap
marked

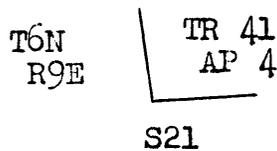

1935

Thence
N. $85^{\circ} 33'$ E., (parallel to E. $\frac{1}{2}$ of line bet. original
secs. 17 and 20) on line 4-5 of bdy. of Tract No. 41.


- 20.11 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the
ground to bedrock, and in a mound of stone to top, for
angle point No. 5 of Tract No. 41, with brass cap
marked

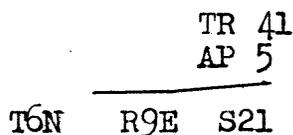

1935

Thence
N. $84^{\circ} 34'$ E., on line 5-6 of bdy. of Tract No. 41.

- 39.04 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
the ground to bedrock, and in a mound of stone to top,
for angle point No. 6 of Tract No. 41, with brass cap
marked

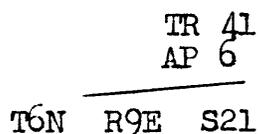

1935

Thence
N. $84^{\circ} 31'$ E., on line 6-7 of bdy. of Tract No. 41,

Chains

19.82

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone to top, for angle point No. 7 of Tract No. 41, with brass cap marked

TR 41	T6N
AP 7	R9E
	S22


1935

Thence

N. 4° 50' W., on line 7-1 of bdy. of Tract No. 41.

19.56

Intersect angle point No. 1 of Tract No. 41, the place of beginning, hereinbefore described.



Resurvey and Completion Survey of
Subdivision of T. 6 N., R. 9 E.

45

Chains

The subdivision lines of T. 6 N., R. 9 E., with the exception of lines bet. secs. 13 & 24, 19 & 20, 28 & 29, 28 & 33, E. $\frac{1}{2}$ bet. secs. 12 & 13, E. $\frac{1}{2}$ bet. secs. 20 & 29, E. $\frac{1}{2}$ bet. secs. 29 & 32, W. $\frac{1}{2}$ bet. secs. 30 & 31, and N. $\frac{1}{2}$ bet. secs. 32 & 33, were surveyed in 1879 by W. H. Hancock, U.S.D.S.

No retracement or resurvey of any of the subdivision lines of this Tp., or survey of the above mentioned exceptions, is of record.

The following notes describe an independent resurvey of all of the subdivision lines of the 1879 survey, and a survey of the remaining lines, thus completing the subdivision of the township.

Each original section and $\frac{1}{4}$ section corner found within the township is described in connection with description of the corresponding reestablished corner, together with the bearing and distance of a direct tie between the related corners, and in the following notes the omission of such data from a reestablished corner description indicates that no trace of the corresponding original cor. was found.

All original corners are destroyed, after obtaining the ties to the reestablished cors., except those which form angle points of the five Tracts surveyed within the township, in which cases they are replaced by brass-capped iron posts, properly marked and numbered for such Tract angle point reference.

From cor. of secs. 35 and 36, on S. bdy. of Tp., hereinbefore described,

N. $0^{\circ} 01'$ W., on true line, bet. secs. 35 and 36.

Over mountainous land, through dense timber and undergrowth.

Desc. 182 ft. over NE. slope.

10.95 Wash, 6 lks. wide, course NE.; asc. 57 ft. over SE. slope.

17.33 Top of spur, slopes NE.; desc. 95 ft. over rolling E. slope.

29.65 Wash, 7 lks. wide, course NE.; asc. 14 ft. over SE. slope.

36.25 Spur, slopes E.; desc. 94 ft. over NE. slope.

39.00 Small wash, course NE.; asc. gradual SE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S35 | S36
1935

raise a mound
of stone 4 ft. base, 2 ft. high, W. of cor.
No bearing trees available.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains	Asc. 19 ft. over SE. slope.						
41.50	Spurs, slope N. and E.; desc. 48 ft. along NE. slope.						
45.35	Wash, 5 lks. wide, course NE.; asc. 28 ft. over SE. slope.						
52.40	Spur, slopes E.; desc. 348 ft. over NE. slope.						
71.35	Trail, bears NW. and SE.						
72.75	Wash, 10 lks. wide, course NW.; across toe of spur, slopes W.						
75.40	Wash, 14 lks. wide, course W.						
79.50	Wash, 40 lks. wide, course SW.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 26 ins. in the ground, for cor. of secs. 25, 26, 35, and 36, with brass cap marked						
	<table border="1"> <tr> <td>T6N</td> <td>R9E</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> </table>	T6N	R9E	S26	S25	S35	S36
T6N	R9E						
S26	S25						
S35	S36						
	1935						
	No bearing trees available. raise a mound						
	of stone 4 ft. base, 2 ft. high W. of cor.						
	Land, mountainous.						
	Soil, rocky 4th rate.						
	Timber, oak, juniper, and laurel; sycamore along larger washes.						
	Undergrowth, oakbrush, manzanita, and cacti.						
	East, on a random line bet. secs. 25 and 36.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
80.12	Intersect E. bdy. of Tp. 12 lks. N. of cor. of secs. 25 and 36, hereinbefore described.						
	Thence,						
	N. 89° 55' W., on true line, bet. secs. 25 and 36.						
	Over mountainous land, through scattering timber and dense undergrowth.						
	Desc. 49 ft. over N. slope.						
3.20	U. S. Forest Service wire fence, bears N. 20° E., and S. 20° W.						
11.35	Spur, slopes N.; desc. 336 ft. over W. slope to						
28.40	Wash, 20 lks. wide, course W.; from NE. and SE.; desc. 92 ft. down wash to						
33.00	Leave same wash, course SW. from E.; asc. gradual SE. slope.						
35.40	Point of spur, slopes S. Desc. gradual SW. slope.						

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

47

Chains

39.65 Same wash, course NW.; asc. 32 ft. over NE. slope.

40.06 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 5x5x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \begin{array}{r} S 25 \\ S 36 \end{array}$$

1935

from which,

A juniper, 8 ins. in diam., bears S. $80\frac{3}{4}^{\circ}$ W., 100 lks. dist., marked $\frac{1}{4}$ S 36 BT.

No other bearing tree available.

Asc. 28 ft. along general N. slope.

43.95 Trail, bears NE. and SW.

54.05 Ridge, bears SE. and SW.; desc. 209 ft. over NW. slope.

64.10 Swale, drains N.; asc. 46 ft. over NE. slope.

69.15 Spur, slopes N. from ridge about 1 ch. S.

Desc. 270 ft. over NW. slope.

78.90 Wash, 40 lks. wide, course SW., (same as in E. $\frac{1}{2}$ mile.)

80.12 The cor. of secs. 25, 26, 35, and 36.

Land, mountainous,
Soil, rocky 4th rate.
Timber, oak, juniper, and sycamore.
Undergrowth, oakbrush, manzanita, and cacti.N. $0^{\circ} 01'$ W., on true line bet. secs. 25 and 26.

Over mountainous land, through scattering timber and undergrowth.

Asc. 181 ft. over SE. slope.

5.80 Ridge, bears E. and W.; desc. 37 ft. over N. slope.

15.05 Wash, 5 lks. wide, course SW.; asc. 309 ft. over S. slope.

27.40 Ridge, bears NE. and SW.; desc. 103 ft. over NW. slope.

32.80 Wash, 8 lks. wide, course SW.; asc. 223 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 6x6x2 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\frac{1}{4} \begin{array}{c} | \\ S26 \quad | \quad S25 \end{array}$$

1935

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains No bearing trees available.

Asc. 17 ft. over S. slope.


40.90 Ridge, bears NE. & SW., desc. 86 ft. over NW. slope.

52.70 Wash, 10 lks. wide, course W.; asc. 638 ft. over S. slope.

69.00 Ridge, bears NE. and SW.; desc. 191 ft. over N. slope.

75.75 Wash, 10 lks. wide, course W.; asc. 94 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground to bedrock, with a stone 4x3x2 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 23, 24, 25, and 26, with brass cap marked



No bearing trees available.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak, juniper, and sycamore.
Undergrowth, oakbrush, manzanita, laurel, and cacti.

S. 89° 55' E., on a random line, bet. secs. 24 and 25.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.16 Intersect E. bdy. of Tp. at 2 lks. S. of cor. of secs. 24 and 25, hereinbefore described.

Thence,

N. 89° 56' W., on true line, bet. secs. 24 and 25.

Over mountainous land, through scattering timber and dense undergrowth.


0.39 Drift fence, bears NE. and SW.

7.55 Wash, 10 lks. wide, course NE.; asc. 140 ft. over SE. slope.

15.60 Rocky spur, slopes NE.; desc. 129 ft. over N. slope.

33.60 Wash, 10 lks. wide, course NE.; asc. 27 ft. over SE. slope.

40.08 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 4x4x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



from which,

A juniper, 24 ins. in diam., bears N. 7° W., 42 lks. dist., marked $\frac{1}{4}$ S24 BT.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains	
	A juniper, 14 ins. in diam., bears S. $56\frac{1}{2}^{\circ}$ W., 88 lks. dist., marked $\frac{1}{4}$ S25 BT.
	Asc. 159 ft. over SE. slope to divide
47.00	Shallow draw, course SE.
55.85	Drift fence, bears NW. and SE.
59.30	Divide, bears NE. and SW.; desc. 501 ft. over NW. slope.
73.00	Wash, 10 lks. wide, course SW.; asc. gradual SE. slope.
80.16	The cor. of secs. 23, 24, 25, and 26.
	Land, mountainous. Soil, rocky 4th rate. Timber, oak, and juniper. Undergrowth, oakbrush, manzanita, and laurel.
	N. $0^{\circ} 01'$ W., on true line, bet. secs. 23 and 24. Over mountainous land, through scattering timber and undergrowth.
4.70	Ridge, bears NE. and SW.; desc. gradual NW. slope.
7.30	Wash, 10 lks. wide, course SW.; asc. 539 ft. over steep SE. slope.
21.80	Ridge, bears NE. and SW.; desc. 32 ft. over NW. slope.
22.55	Enter dense juniper undergrowth, bears E. and W.
23.80	Wash, 10 lks. wide, course SW.; heads about 8 chs. NE.; asc. 59 ft. over S. slope.
28.24	Flat-topped ridge, bears E. and W.; desc. 367 ft. over N. slope.
30.23	Enter dense manzanita, leaving juniper undergrowth, bearing E. and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x6 ins. marked with a cross (X) deposited at base of post, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S23 S24 1935
	from which,
	A cross (X) and BO S23 alongside cross, cut in face of outcropping ledge, bears N. $75\frac{1}{2}^{\circ}$ W., 119 lks. dist.
	No bearing trees available.
	Desc. 467 ft. over N. slope.
42.00	Asp Spring, bears W. about 20 chs. dist.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- 49.33 Ravine, 12 lks. wide, course NW.; heads about 10 chs. SE.
Asc. 154 ft. over SW. slope.
- 55.66 Spur, slopes W.; desc. 211 ft. over NW. slope.
- 61.42 Ravine, 10 lks. wide, course SW.; asc. 128 ft. over steep
S. slope.
- 71.90 Low ridge, bears E. and W.; desc. 103 ft. over N. slope.
- 78.45 Wash, 10 lks. wide, course NW.; asc. 20 ft. over S. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in
the ground, with a stone 6x6x6 ins., marked with a cross
(X) deposited at base, and in a mound of stone to top,
for cor. of secs. 13, 14, 23, and 24, with brass cap
marked

T6N R9E	
S14	S13
S23	S24

1935

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, juniper, and sycamore.

Undergrowth, oakbrush, manzanita, and cacti.

SURVEY.

- S. 89° 56' E., on a random line, bet. secs. 13 and 24.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.02 Intersect the E. bdy. of Tp., 2 lks. S. of the cor. of
secs. 13 and 24, hereinbefore described.
- Thence,
- N. 89° 57' W., on true line, bet. secs. 13 and 24.
- Over mountainous land, through scattering timber and under-
growth.
- Asc. 84 ft. over N. slope.
- 12.00 Wash, 10 lks. wide, course NE.; asc. 483 ft. over SE.
slope.
- 37.50 Divide, bears N. and SW.; desc. 40 ft. over W. slope.
- 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in
the ground to bedrock, with a stone 4x4x2 ins. marked
with a cross (X) deposited at base, and in a mound of
stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 13
	S 24

1935.

No bearing trees available.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

51

Chains	Desc. 150 ft. over NW. slope.
40.16	U. S. Forest Service fence, bears NE. and SW.
45.50	Head of wash, course N.; asc. 55 ft. over NE. slope.
51.60	Rocky point, slopes N.; desc. 260 ft. over N. slope, to
63.00	Ridge, bears NW. and SE.; desc. 150 ft. over S. slope.
80.02	The corner of secs. 13, 14, 23, and 24.
	Land, mountainous. Soil, rocky 4th rate. Timber, oak, juniper, and laurel. Undergrowth, oakbrush, manzanita, and cacti.
<u>RESURVEY.</u>	
	N. 0° 01' W., on true line, bet. secs. 13 and 14.
	Over mountainous land, through scattering timber and under- growth.
2.05	Rocky spur, slopes W.; desc. 250 ft. over NE. slope.
9.20	Rocky spur, slopes NE.; desc. along NW. slope.
15.20	Wash, course NW., near head; asc. 46 ft. over SW. slope.
18.50	Rocky spur, slopes W.; desc. 157 ft. over NW. slope.
27.45	Wash, 10 lks. wide, course NW.; asc. 101 ft. over SW. slope.
39.60	Trail, bears NE. and SW.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 4x4x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S14 S13 1935
	No bearing trees available.
	Desc. slight N. slope.
40.30	Wash, 10 lks. wide, course SW.; asc. 95 ft. over S. slope to
44.50	Rocky outcrop on line; asc. 225 ft. over S. slope to
61.85	Rocky outcrop on line; asc. 20 ft. over S. slope to
70.00	Ridge, bears NW. and SE.; desc. 113 ft. over N. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, with a stone 3x3x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 11, 12, 13, and 14, with brass cap marked

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

T6N R9E	
S11	S12
S14	S13

1935

from which

A juniper, 4 ins. in diam., bears N. $21\frac{1}{4}^{\circ}$ W., 138 lks. dist., marked BT.

A juniper 24 ins. in diam., bears S. $58\frac{1}{2}^{\circ}$ W., 199 lks. dist., marked T6N R9E S14 BT.

No other bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, juniper.

Undergrowth, oakbrush, and laurel.

SURVEY ($E\frac{1}{2}$) and RESURVEY ($W\frac{1}{2}$).

S. $89^{\circ} 57'$ E., on a random line, bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect E. bdy. of Tp. at 7 lks. S. of the corner of secs. 12 and 13, hereinbefore described.

Thence,

SURVEY.

West, on true line, bet. secs. 12 and 13.

Over mountainous land, through scattering timber and undergrowth.

Desc. 110 ft. over NW. slope.

11.10 Rocky wash, 10 lks. wide, course N.; asc. 55 ft. over E. slope.

15.00 Rocky ridge, bears N. and S.; desc. 22 ft. over W. slope.

21.90 Wash, 10 lks. wide, course N.; asc. 39 ft. over E. slope.

26.20 Spur, slopes NE.; desc. 28 ft. over NW. slope.

34.80 Trail, bears NE. and SW.

39.00 Wash, 10 lks. wide, course NE.; asc. 25 ft. over SE. slope.

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 12
	S 13
	1935

from which,

A juniper, 14 ins. in diam., bears N. 57° E., 255 lks. dist., marked $\frac{1}{4}$ S12 BT.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains

A pinion, 6 ins. in diam., bears S. 56° W., 43 lks. dist., marked $\frac{1}{4}$ S13 BT.

RESURVEY.

Continue line and measurement as resurvey of W. $\frac{1}{2}$ of line bet. secs. 12 and 13.

Asc. 121 ft. over NE. slope.

61.00 Divide, bears N. and S.; desc. 73 ft. over NW. slope.

75.15 Trail, bears NW. and SE, along wire fence, same bearing.

77.50 Wash, 10 lks. wide, course NW.; asc. 11 ft. over NE. slope.

79.94 The cor. of secs. 11, 12, 13, and 14.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, and juniper.

Undergrowth, oakbrush, and laurel.

N. $0^{\circ} 01'$ W., on true line, bet. secs. 11 and 12.

Over mountainous land, through scattering timber and undergrowth.

Desc. 40 ft. over NE. slope to wash.

2.81 Wire fence, bears NW. and SE.; trail alongside, same bearing.

4.46 Wash, 4 lks. wide, course W.; asc. 31 ft. over S. slope.

6.50 Low spur, slopes W.; desc. 17 ft. over N. slope.

12.40 Wash, 7 lks. wide, course W.; asc. 146 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 4x4x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S11 | S12
1935

No bearing trees available.

Asc. 20 ft. over SW. slope.

42.80 Ridge, bears NW.; desc. 607 ft. over steep NW. slope.

62.95 Wash, 20 lks. wide, course E., in bottom of canyon; old mine tunnel bears E., about 1.75 chs. dist.

63.78 Old mine track, bears E. and W.; asc. 99 ft. over S. slope.

66.00 Spur, slopes E.; desc. 144 ft. over NE. slope.

69.30 Old road from Ft. Reno to Ft. McDowell, bears E. and W.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- 77.18 Trail, bears NE. and SW.
 77.80 Road, bears NW. and SE.
 78.20 Wash, 20 lks. wide, course SE.; asc. 56 ft. over SW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 1, 2, 11, and 12, with brass cap marked

T6N R9E	
S2	S1
S11	S12
1935	

from which,

An oak, 18 ins. in diam., bears S. $10\frac{1}{2}^{\circ}$ W., 251 lks. dist., marked T6N R9E S11 BT.

No other bearing trees available.

Land, mountainous.
 Soil, rocky 4th rate.
 Timber, juniper.
 Undergrowth, oakbrush, and laurel.

East, on a random line, bet. secs. 1 and 12.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.00 Intersect the cor. of secs. 1, 6, 7, and 12, on E. bdy. of Tp., hereinbefore described.

Thence

West, on true line, bet. secs. 1 and 12.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 256 ft. over SE. slope.

- 2.35 Road, bears NE. and SW.
 21.35 Spur, slopes SE.; desc. 49 ft. over SW. slope.
 25.35 Same road, bears NW. and SE.
 28.00 Wash, 50 lks. wide, course SE.; asc. 248 ft. over SE. slope.
 30.40 Road, bears N. and S.; a cement trough and end of pipe line from which feeds a small stream of water, bears north, 2.25 chs. dist.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 1
	S 12
1935	

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

55

Chains	from which,
	An oak, 8 ins. in diam., bears S. 56° E., 49 lks. dist., marked $\frac{1}{4}$ S12 BT.
	An oak, 12 ins. in diam., bears N. 89 $\frac{1}{2}$ ° W., 109 lks. dist., marked $\frac{1}{4}$ S1 BT.
	Asc. 408 ft. along rolling, broken S. slope.
59.20	Rocky outcrop on line.
66.00	Spur, slopes S.; desc. 94 ft. over W. slope.
72.80	Wash, 10 lks. wide, course SW.; asc. 111 ft. over E. slope.
76.20	Spur, slopes S.; desc. 110 ft. over SW. slope.
80.00	The cor. of secs. 1, 2, 11, and 12.
	Land, mountainous. Soill, rocky 4th rate. Timber, oak, and laurel. Undergrowth, oakbrush, and cacti.
	N. 0° 01' W., on a random line, bet. secs. 1 and 2.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect the N. bdy. of Tp. at the true point for cor. of secs. 1, 2, 35, and 36, hereinbefore described.
	Thence,
	S. 0° 01' E., on true line, bet. secs. 1 and 2.
	Over mountainous land, through scattering timber and undergrowth.
	Desc. 731 ft. over broken, S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 5x5x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S2 S1 1935
	No bearing trees available.
	Desc. 247 ft. over broken S. slope.
53.00	Head of wash, course SE.; asc. 41 ft. over N. slope.
57.30	Ridge, bears E. and W.; desc. 436 ft. over S. slope.
71.80	Ridge, bears NW. and SE.; desc. over outcropping ledges on SW. slope.
80.00	The corner of secs. 1, 2, 11, and 12.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak, laurel, and juniper.
Undergrowth, oakbrush, laurel, and cacti.

From the cor. of secs. 34 and 35, on S. bdy. of Tp.,
hereinbefore described,

N. 0° 01' W., on true line, bet. secs. 34 and 35.

Over mountainous land, through scattering timber and under-
growth.

Desc. 147 ft. over N. slope.


2.90 Wash, 8 lks. wide, course NW.; asc. 18 ft. over SW. slope.
Spring bears W., about 3.75 chs. dist.

8.90 Spur, slopes NW.; desc. 197 ft. over NE. slope.

15.90 Wash, 10 lks. wide, course NE.; asc. 168 ft. over SE. slope.

36.90 Ridge, bears E. and W.; desc. 76 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bedrock, with a stone 4x6x2 ins. marked
with a cross (X) deposited at base, and in a mound to
top, for 1/4 sec. cor., with brass cap marked



No bearing trees available.

Desc. 258 ft. over N. slope.


49.10 Wash, 10 lks. wide, course E.; asc. 59 ft. over SE. slope.

59.00 Ridge, bears E. and W.; desc. 105 ft. over NW. slope.

62.15 Wash, 10 lks. wide, course E.; asc. 28 ft. over SE. slope.

70.45 Spur, slopes NE.; desc. 203 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in
the ground to bedrock, with a stone 5x5x3 ins., marked
with a cross (X) deposited at base, and in a mound of
stone to top, for cor. of secs. 26, 27, 34, and 35,
with brass cap marked



No bearing trees available.

Land, mountainous.
Soil, rocky 4th rate.
Timber, scattering juniper.
Undergrowth, oakbrush, laurel, and mahogany.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains	East, on a random line, bet. secs. 26 and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.76	Intersect the cor. of secs. 25, 26, 35, and 36.
	Thence,
	West, on true line, bet. secs. 26 and 35.
	Over mountainous land, through scattering timber and dense undergrowth.
	Asc. 43 ft. over SE. slope.
3.00	Ridge, bears N. and S.; desc. 128 ft. over SW. slope.
11.60	Wash, 50 lks. wide, course NW.; asc. 145 ft. over NE. slope.
13.00	Trail, bears NW. and SE.
24.05	Top of hill, on spur, sloping N.; desc. 169 ft. over W. slope.
31.40	Wash, 5 lks. wide, course N.; asc. 121 ft. over E. slope.
37.00	Ridge, bears N. and S.; Indian ruins on line; desc. gradual NW. slope.
39.88	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with stone 6x4x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ <u>S26</u> S35
	1935
	No bearing trees available.
	Desc. 92 ft. over SW. slope.
53.45	Wash, 10 lks. wide, course NW.; asc. 88 ft. over rolling N. slope.
66.30	Ridge, bears N. and S.; desc. 168 ft. over W. slope.
72.50	Wash, 10 lks. wide, course N.; asc. 41 ft. over NE. slope.
79.76	The cor. of secs. 26, 27, 34, and 35.
	Land, mountainous. Soil, rocky 4th rate. Timber, juniper and sycamore. Undergrowth, oakbrush, and laurel.
	N. 0° 01' W., on true line, bet. secs. 26 and 27.
	Over mountainous land, through scattering timber and dense undergrowth.
	Desc. 151 ft. over NE. slope.
21.15	Wash, 5 lks. wide, course NE.; asc. 18 ft. over SE. slope.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- 25.40 Spur, slopes NE.; desc. 82 ft. over W. slope.
- 29.25 Wash, 20 lks. wide, course NW.; asc. gradual SW. slope.
- 31.45 Spur, slopes W.; desc. 38 ft. over N. slope.
- 33.45 Wash, 50 lks. wide, course W.; asc. 80 ft. over SE. slope.
- 38.85 Spur, slopes SW.; desc. gradual NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 4x4x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ | \\ S27 \quad | \quad S26 \\ | \\ 1935 \end{array}$$

No bearing trees available.

Desc. 8 ft. over NW. slope.

- 40.50 Wash, 5 lks. wide, course SW.; asc. 123 ft. over SE. slope.
- 56.85 Ridge, bears NE. and SW.; desc. 29 ft. over SW. slope.
- 69.05 Wash, 8 lks. wide, course SW.; asc. 90 ft. over SE. slope.
- 70.55 Trail, bears W. and SE.
- 77.65 Ridge, bears NE. and SW.; desc. 32 ft. over N. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in ground to bedrock, with a stone 3x3x2 ins. marked with a cross (X) deposited at base, and raise mound of stone around post, for cor. of secs. 22, 23, 26, and 27, with brass cap marked

$$\begin{array}{c} T6N \quad R9E \\ \hline S22 \quad | \quad S23 \\ \hline S27 \quad | \quad S26 \\ | \\ 1935 \end{array}$$

No bearing trees available.

The original cor. of same secs. bears S. 83° 43' E., 24.77 chs. dist., which is a stone 8x8x18 ins., marked with 2 notches on each of S. and E. faces, and firmly set in mound of stone.

Find no trace of the bearing tree recorded as SE. of this cor.

Destroy all evidence of this original cor.

Land, mountainous.

Soil, rocky 4th rate.

Timber, juniper and sycamore.

Undergrowth, oakbrush, manzanita, and cacti.


Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains	
	East, on a random line, bet. secs. 23 and 26.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.80	Intersect N. and S. line, 9 lks. N. of the cor. of secs. 23, 24, 25, and 26.
	Thence,
	N. $89^{\circ} 56'$ W., on true line bet. secs. 23 and 26.
	Over mountainous land, through scattering timber and undergrowth.
	Desc. 188 ft. over S. slope.
8.00	Wash, 10 lks. wide, course SW.; enters wash from E., at about $2\frac{1}{2}$ chs. SW.; asc. 26 ft. over SE. slope.
11.30	Spur, slopes SW.; desc. 180 ft. over SW. slope.
21.10	Wash, 8 lks. wide, course SW.; asc. 106 ft. over rocky SE. slope.
30.75	Ridge, bears NE. and SW.; desc. 208 ft. over NW. slope.
39.90	Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a cross (X) chiseled on outcropping ledge, 2 lks. NE., and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ <u>S 23</u> S 26 1935
	No bearing trees available.
41.80	Wash, 6 lks. wide; course SW.; asc. 18 ft. over S. slope.
49.90	Flat-topped ridge, bears E. and N. 80° W.; desc. 208 ft. over SW. slope.
69.75	Head of wash, course S.; spring and water trough bears S., about 4.50 chs. dist.; asc. 28 ft. over SE. slope.
76.00	Ridge, bears NE. and SW.; desc. gradually along NW. slope.
79.80	The cor. of secs. 22, 23, 26 and 27.
	Land, mountainous. Soil, rocky 4th rate. Timber, juniper. Undergrowth, oakbrush, laurel, and mountain mahogany.
	N. $0^{\circ} 01'$ W., on true line, bet. secs. 22 and 23.
	Over mountainous land, through scattering timber and undergrowth.
	Desc. 224 ft. over N. slope.
12.15	U. S. Forest Service trail, bears NE. and SW.
19.75	Wash, 6 lks. wide, course SW.; asc. 36 ft. over SE. slope.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- 24.45 Ridge, bears NE. and SW.; desc. 255 ft. over NW. slope.
39.15 Wash, 8 lks. wide, course NW.; asc. 53 ft. over SW. slope.
40.00 Set an iron post, 3 ft. long, 1 in. in diam., above a cross (X) chiseled in face of surface rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked




No bearing trees available.

A spring at head of pipe line to U.S.F.S. Ram Valley Tank, bears W. about 20 chs. dist.

Asc. gradual S. slope.

- 49.80 Low ridge, bears E. and W., desc. 41 ft. over NW. slope.
53.70 Rocky outcropping on line.
59.90 Wash, 5 lks. wide, course SW.; asc. 100 ft. over broken S. slope.
66.50 U. S. Forest Service trail, bears E. and W.; on top of ridge, same bearing; desc. gradual N. slope.
77.00 Wash, 14 lks. wide, course SW.; asc. 20 ft. over SE. slope.
79.20 Trail, bears E. and W.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, over a cross (X) chiseled in face of same, and in a mound of stone to top, for cor. of secs. 14, 15, 22, and 23, with brass cap marked



from which,

An oak, 40 ins. diam., bears S. $59^{\circ} 40'$ E., 275 lks. dist., marked T6N R9E S23 BT.

No other bearing tree available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains	
	S. 89° 56' E., on a random line, bet. secs. 14 and 23.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.96	Intersect N. and S. line, 14 lks. N. of the cor. of secs. 13, 14, 23, and 24.
	Thence
	N. 89° 50' W., on true line, bet. secs. 14 and 23. Over mountainous land, through scattering timber and undergrowth.
	Desc. 143 ft. over W. slope.
13.90	Wash, 10 lks. wide, course NW.; asc. 37 ft. over NE. slope.
6.00	Spur, slopes NW.; desc. 105 ft. over W. slope.
10.25	Trail, bears NE. and SW.
10.65	Wire fence, bears NE. and SW.
12.75	Wash, 10 lks. wide, course NW.; asc. 63 ft. over NE. slope.
21.50	Spur, slopes NW.; desc. 207 ft. over W. slope.
31.70	Head of wash, course NW.; asc. gradual NE. slope.
36.60	Spur, slopes NW.; desc. 61 ft. over SW. slope.
39.98	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 4x3x1 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} S14 \\ \frac{1}{4} \text{ ---} \\ S 23 \\ 1935 \end{array}$
	No bearing trees available.
	Desc. 291 ft. over SW. slope.
50.40	Wash, 10 lks. wide, course NW.; asc. 10 ft. over NE. slope.
52.25	Point of spur, slopes N.; desc. 66 ft. over NW. slope.
57.00	Same wash, course SW.; asc. gradual SE. slope.
60.00	Spur, slopes SW.; desc. 18 ft. over W. slope.
60.30	Wash, 10 lks. wide, course SW.; asc. 42 ft. over SE. slope.
68.40	Ridge, bears NE. and SW.; desc. 125 ft. over W. slope.
78.00	Asc. 16 ft. over S. slope.
79.96	The cor. of secs. 14, 15, 22, and 23.
	Land, mountainous, Soil, rocky 4th rate. Timber, oak, and juniper. Undergrowth, oakbrush, manzanita, and cacti.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

N. 0° 01' W., on true line, bet. secs. 14 and 15.

Over mountainous land, through scattering timber and undergrowth. Asc. 125 ft. over S. slope.

7.50 Rocky ridge, bears E. & W.; desc. 94 ft. over N. slope.

20.40 Spring bears E., 75 lks. dist.

20.75 Wash, 10 lks. wide, course NW.; asc. 266 ft. over SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, above a cross (X) cut in rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\begin{array}{c} \frac{1}{4} \\ | \\ S15 \quad | \quad S14 \\ 1935 \end{array}$$

from which,

A white oak, 15 ins. in diam., bears N. 82° W., 153 lks. dist., marked $\frac{1}{4}$ S15 BT.

No other bearing trees available.

A cross (X) cut on a boulder, bears S. 86° 10' E., 68 lks. dist.

Asc. 113 ft. over SW. slope.

52.35 Spur, slopes W.; desc. 169 ft. over N. slope.

60.77 Wash, 15 lks. wide, course NW.; a spring of water, bears SE. 1 ch. dist., asc. 268 ft. over SW. slope.

73.30 Rocky ridge, bears E. and W., desc. gradually along W. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 5 ins. in the ground to bedrock, with a stone 4x4x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 10, 11, 14, and 15, with brass cap marked

$$\begin{array}{c} T6N \quad R9E \\ S10 \quad | \quad S11 \\ \hline S15 \quad | \quad S14 \end{array}$$

1935

from which,

A juniper, 4 ins. in diam., bears S. 37 $\frac{1}{2}$ ° E., 135 lks. dist., marked BT.

No other bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.


Chains	S. 89° 50' E., on a random line, bet. secs. 11 and 14.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.86	Intersect N. and S. line, 18 lks. S. of the cor. of secs. 11, 12, 13, and 14.
	Thence,
	N. 89° 58' W., on true line, bet. secs. 11 and 14.
	Over mountainous land, through scattering timber and undergrowth.
	Desc. 82 ft. over NW. slope.
23.80	Wash, 7 lks. wide, course NW.; asc. 85 ft. over NE. slope.
36.10	Ridge, bears N. and S.; desc. 44 ft. over W. slope.
39.93	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, with a stone 6x5x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ <u>S 11</u> S 14 1935
	No bearing trees available.
	Desc. 261 ft. over W. slope.
54.80	Wash, 10 lks. wide, course SW.; asc. 140 ft. over E. slope.
68.70	Ridge, bears N. and S.; desc. 70 ft. along N. slope.
74.90	Ridge, bears NW.; desc. 60 ft. over W. slope.
79.86	The cor. of secs. 10, 11, 14, and 15.
	Land, mountainous. Soil, rocky 4th rate. Timber, oak and juniper. Undergrowth, oakbrush, manzanita, and cacti.
	N. 0° 01' W., on true line, bet. secs. 10 and 11.
	Over mountainous land, through scattering timber and dense undergrowth.
	Asc. 56 ft. over S. slope.
6.40	Ridge, bears NW.; desc. 215 ft. over NE. slope.
27.07	Wash, 10 lks. wide, course W.; asc. 113 ft. over SW. slope.
32.65	Ridge, bears NE. and SW.; desc. 14 ft. over NW. slope.
35.30	Small wash, course SW.; asc. 14 ft. over S. slope.
35.90	Old road, from Ft. Reno to Ft. McDowell, bears NE. and W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in

Resurvey and Completion Survey of Subdivision of
T. 6. N., R. 9 E.

64

Chains

the ground to bedrock, with a stone 6x6x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked




from which,

A juniper, 8 ins. in diam., bears S. $11\frac{1}{2}^{\circ}$ E., 60 lks. dist., marked $\frac{1}{2}$ S11 BT.

No other bearing tree available.

Asc. 179 ft. over S. slope.

- 49.50 Spur, slopes SE.; desc. gradual NE. slope.
- 56.50 Swale, drains E.; asc. 180 ft. over SE. slope.
- 70.75 Ridge, bears NE. and SW.; desc. 71 ft. over NW. slope.
- 75.60 Wash, 5 lks. wide, course SW.; asc. 10 ft. over SW. slope.
- 77.20 End of spur, slopes W.; desc. slight NW. slope to
- 77.80 Wash, 5 lks. wide, course SW.; asc. 67 ft. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 4x4x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 2, 3, 10, and 11, with brass cap marked



No bearing trees available.

The original cor. of same secs. bears S. $81^{\circ} 53'$ E., 15.15 chs. dist., which is a stone 8x12x16 ins., marked with 5 notches on S face and 2 notches on E. face, and set in a mound of stone. Found no trace of the record bearing tree. Destroy all trace of this old cor. monument.

Land, mountainous.

Soil, rocky 4th rate.

Timber, juniper.

Undergrowth, oakbrush, manzanita, and cacti.

S. $89^{\circ} 58'$ E., on a random line, bet. secs. 2 and 11.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

- 79.80 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 1, 2, 11, and 12.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

65

Chains	
	Thence, S. 89° 59' W., on true line, bet. secs. 2 and 11. Over mountainous land, through scattering timber and undergrowth. Desc. 28 ft. over SW. slope.
2.10	Wash, 20 lks. wide, course SE.; asc. 368 ft. over NE. slope.
3.50	Road to Comet Mine, bears N. and S.
12.60	Ridge, bears N. and S.; desc. 91 ft. over SW. slope.
22.25	Spring bears S. 8° 05' E., 8.71 chs. dist.
27.65	Wash, 10 lks. wide, course S. Asc. 140 ft. along wash 10 lks. wide, course E.
38.60	Head of same wash, course E. Leave wash. Asc. 20 ft. to
39.90	Set an iron post 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with stone 8x8x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked <div style="text-align: center;"> $\frac{1}{4}$ $\frac{S2}{S11}$ 1935 </div> No bearing trees available. Asc. 478 ft. over E. slope.
56.80	Ridge, bears S. and N.; desc. 390 ft. over rolling SW. slope.
61.73	Wire fence, bears N. and S.
71.50	Spur, slopes SW.
77.30	Head of draw, course SW.; asc. 13 ft. over SW. slope.
79.80	The cor. of secs. 2, 3, 10, and 11. Land, mountainous. Soil, rocky 4th rate. Timber, juniper and oak. Undergrowth, oakbrush, manzanita, and cacti.
	N. 0° 01' W., on a random line, bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Intersect the cor. of secs. 2, 3, 34, and 35, on N. bdy. of Tp., hereinbefore described.
	Thence, S. 0° 01' E., on true line, bet. secs. 2 and 3. Over mountainous land, through scattering timber and undergrowth.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

Desc. 429 ft. over SE. slope.

14.10 Wash, 8 lks. wide, course SW.; continue descent of 382 ft. over rolling W. slope.

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 2x4x4 ins., marked with a cross (X) deposited at base, and in a mound of stone, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S3 | S2
 1935

No bearing trees available.

Desc. 60 ft. over S. slope.

42.75 Draw, course SW., heads about 10 chs. NE.; asc. 304 ft. over NW. slope.

60.70 Ridge, bears E. and W.; desc. 452 ft. over SW. slope.

80.04 The cor. of secs. 2, 3, 10, and 11.

Land, mountainous.

Soil, rocky 4th rate.

Timber, juniper and laurel.

Undergrowth, oakbrush, manzanita, and cacti.

From the cor. of secs. 33 and 34, on S. bdy. of Tp., hereinbefore described.

N. $0^{\circ} 02'$ W., on true line, bet. secs. 33 and 34.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 209 ft. over SE. slope.

6.00 Ridge, bears E. and W.; desc. 50 ft. over NW. slope.

11.40 Wash, 15 lks. wide, course NW.; asc. 101 ft. over SW. slope.

15.50 Spur, slopes NW.; desc. 70 ft. over N. slope.

18.70 Wash, 5 lks. wide, course W.; asc. 400 ft. over S. slope.

33.00 Ridge, bears NW. and SE.; thence along broken E. slope on gradual ascent.

40.00 Set an iron post 3 ft. long, 1 in. in diam., on bedrock, in crack in ledge, alongside a 6-inch cross (X) chiseled in same, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S33 | S34
 1935

No bearing trees available.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains	Desc. 551 ft. over NE. slope to wash.						
60.00	Low spur, slopes NE.						
65.00	Low spur, slopes NE.						
68.50	Wash, 15 lks. wide, course NE. Asc. gradual SE. slope.						
71.20	Low spur, slopes NE.; desc. gradual W. slope.						
79.70	Trail, bears NE. and SW.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock, with a stone 6x6x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 27, 28, 33, and 34, with brass cap marked						
	<table border="1"> <tr> <td colspan="2">T6N R9E</td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> </table> <p>1935</p>	T6N R9E		S28	S27	S33	S34
T6N R9E							
S28	S27						
S33	S34						
	No bearing trees available.						
	Land, mountainous. Soil, rocky 4th rate. Timber, oak and juniper. Undergrowth, oakbrush, manzanita, and cacti.						
	East, on a random line, bet. secs. 27 and 34.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
80.00	Intersect the cor. of secs. 26, 27, 34, and 35.						
	Thence,						
	West, on true line, bet. secs. 27 and 34.						
	Over mountainous land, through scattering timber and dense undergrowth.						
	Asc. 31 ft. over E. slope.						
4.00	Desc. 11 ft. over W. slope.						
6.10	Wash, 5 lks. wide, course NE.; asc. 156 ft. over E. slope.						
18.00	Rocky ridge, bears N. and S.; desc. 260 ft. over NW. slope.						
30.00	Wash, 10 lks. wide, course NW.; asc. 34 ft. over NE. slope.						
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 7x4x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked						
	<table border="1"> <tr> <td>$\frac{1}{4}$</td> <td>S 27</td> </tr> <tr> <td></td> <td>S 34</td> </tr> </table> <p>1935</p>	$\frac{1}{4}$	S 27		S 34		
$\frac{1}{4}$	S 27						
	S 34						
	No bearing trees available.						
	Asc. 62 ft. over NE. slope.						

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- 43.15 Ridge, bears N. and S.; desc. 327 ft. over NW. slope.
60.55 Wash, 10 lks. wide, course NW.; asc. 117 ft. over E. slope
78.80 U.S. Forest Service trail, bears NE. and SW.
80.00 The cor. of secs. 27, 28, 33, and 34.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak, and juniper.
Undergrowth, oakbrush, manzanita, and cacti.

N. 0° 02' W., on true line, bet. secs. 27 and 28.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 125 ft. over NW. slope.

- 9.80 Wash, 10 lks. wide, course NE.; asc. gradual SE. slope.
10.60 Small spur, slopes E.; desc. 41 ft. over NW. slope.
12.50 Wash, 15 lks. wide, course NE.; asc. 18 ft. over SE. slope.
15.00 Spur, slopes NE.; desc. 75 ft. over NW. slope.
19.95 Wash, 10 lks. wide, course NE.; asc. 10 ft. over SE. slope.
22.00 Rocky spur, slopes NE.; continue desc. of 158 ft. over NW. slope.
38.80 Boulder Creek, (dry), 40 lks. wide, course W.; asc. 20 ft. over S. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in ground to bedrock, with a stone 7x7x3 ins. marked with a cross (X) deposited at base, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S28 | S27
 1935

No bearing trees available.

The original $\frac{1}{4}$ sec. cor. of same secs. bears S. 71° 56' E., 30.91 chs. dist., which is a granite stone 6x10x14 ins., marked $\frac{1}{4}$ and set in a mound of stone. No bearing trees were recorded as accessory to this cor. Destroy all evidence of this cor. monument.

Continue over stony, level bottom land.

- 42.00 Leave level land, asc. 326 ft. over S. slope.
52.65 Knoll, on black spur, slopes W.; desc. 327 ft. over NW. slope.
70.00 Wash, 10 lks. wide, course NW.; thence along W. slope.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains

77.00 Wash, 15 lks. wide, course W.; asc. 24 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in ground to bedrock, with a stone 6x6x2 ins. marked with a cross (X) deposited at base, and raise a mound of stone around post, for cor. of secs. 21, 22, 27, and 28, with brass cap marked

T6N	R9E
S21	S22
S28	S27
1935	

No bearing trees available.

The original cor. of same secs. bears S. 69° 27' E., 27.47 chs. dist., which is a stone 8x8x18 ins. marked with 2 notches on S. face and 3 notches on E. face, and set in a mound of stone. No bearing trees were recorded as accessory to this cor. Destroy all evidence of this cor. monument.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

East, on a random line, bet. secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Intersect the cor. of secs. 22, 23, 26, and 27.

Thence,

West, on true line, bet. secs. 22 and 27.

Over mountainous land, through scattering timber and undergrowth.

Asc. gradually along N. slope.

3.00 Spur, slopes N.; high knoll bears S. about $3\frac{1}{2}$ chs. dist.,

Desc. 132 ft. over rolling N. slope.

12.70 Trail, Tonto to Sunflower Ranger Station, bears SE. and SW. at bend.

15.95 Same trail, bears NW. and SE.; on ridge which bears NW. and SE. Desc. 297 ft. over rolling S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 3x4x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 22
	S 27
	1935

No bearing trees available.

Desc. 34 ft. over S. slope.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- 45.00 Head of draw, course SW.; asc. 21 ft. over SE. slope.
54.45. Low ridge, bears NE. and SW.; desc. 226 ft. over NW. slope.
75.20 Wash, 10 lks. wide, course SW.; asc. gradual SE. slope.
80.00 The cor. of secs. 21, 22, 27, and 28.

Land, mountainous.
Soil, rocky 4th rate.
Timber, oak and juniper.
Undergrowth, oakbrush and laurel.

N. 0° 02' W., on true line bet. secs. 21 and 22.

Over mountainous land, through scattering timber and dense undergrowth.

Asc. 160 ft. over S. slope.

- 7.00 Stock driveway marker bears W. about 2 chs. dist.
14.10 Wash, near head, course SW.; asc. 70 ft. over S. slope of ridge.
18.80 Ridge, bears E. and W.; desc. 196 ft. over N. slope.
31.00 Trail, bears NW. and SE.
35.30 Wash, 35 lks. wide, course NW.; asc. 52 ft. over SW. slope.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in ground to bedrock, with a stone marked with a cross (X) deposited at base, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 |
 S21 S22
 |
 1935

No bearing trees available.

The original $\frac{1}{4}$ sec. cor. of same secs. bears S. 63° 53' E., 24.29 chs. dist., which is a mound of stone. Find no trace of the recorded bearing tree SW. of cor. Destroy this old cor. monument.

Asc. 108 ft. over S. slope.

- 46.85 Intersect line 6-7 of bdy. of Tract No. 41, at a point 46 lks. S. 84° 31' W. from angle point No. 7 thereof, hereinbefore described.
Thence across said Tract.
50.00 Spur, slopes W. Desc. 85 ft. over N. slope.
52.32 Intersect line 7-1 of the bdy. of Tract No. 41, at a point 5.44 chs. N. 4° 50' W. from angle point No. 7 thereof, hereinbefore described.

Resurvey and Completion Survey of Subdivision
of T. 6 N., R. 9 E.

Chains	<p>Leave said Tract.</p> <p>71.00 Wash, 10 lks. wide, course W. Asc. gradually over SW. slope.</p> <p>72.35 Spur, slopes W. Road brs. E. & W. Desc.</p> <p>74.55 Wash, 15 lks. wide, course SW. Asc. 15 ft. over SW. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. dian., 16 ins. in ground to bedrock, with a stone 5x5x2 ins. marked with a cross (X) deposited at base, and raise a mound of stone around post, for cor. of secs. 15, 16, 21, and 22, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T6N</td> <td>R9E</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> </table> <p>1935</p> </div> <p>No bearing trees available.</p> <p>Ran Valley Tank, (cement and stone construction), bears S. 70° 10' E., 44.55 chs. dist.</p> <p>The original cor. of same secs. bears S. 56° 46' E., 21.40 chs. dist., which is a stone 8x12x18 ins., unmarked, set in a mound of stone. Piece of old wood post lying on ground alongside.</p> <p>Find no trace of the recorded NE. bearing tree.</p> <p>Destroy all evidence of this old cor. monument.</p> <p>Land, mountainous.</p> <p>Soil, rocky 4th rate.</p> <p>Timber, oak and juniper.</p> <p>Undergrowth, oakbrush, manzanita, and cacti.</p>	T6N	R9E	S16	S15	S21	S22
T6N	R9E						
S16	S15						
S21	S22						
	<p>East, on a random line, bet. secs. 15 and 22.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>80.00 Intersect the cor. of secs. 14, 15, 22, and 23.</p> <p>Thence,</p> <p>West, on true line, bet. secs. 15 and 22.</p> <p>Over mountainous land, through scattering timber and dense undergrowth.</p> <p>Desc. 38 ft. along S. slope.</p> <p>7.30 Rock outcrop on line; desc. 208 ft. over W. slope.</p> <p>18.80 Wash, 15 lks. wide, course S. 80° W.; asc. 222 ft. over steep SE. slope.</p> <p>27.10 Saddle in spur, bearing N. and S.; desc., 178 ft. over W. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled in bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p>						

	<p style="text-align: center;"> $\frac{1}{4}$ <u>S 15</u> S 22 1935 </p> <p>No bearing trees available.</p> <p>Desc. 197 ft. over SW. slope.</p> <p>40.95 Wire drift fence, bears NE. and SW.</p> <p>49.35 Wash, 25 lks. wide, course NW.; thence on gradual descent over mesa.</p> <p>80.00 The cor. of secs. 15, 16, 21, and 22.</p> <p>Land, mountainous. Soil, rocky 4th rate. Timber, oak, and juniper. Undergrowth, oakbrush, manzanita, and cacti.</p>
	<p>N. 0° 02' W., on true line, bet. secs. 15 and 16.</p> <p>Over mountainous land, through scattering timber and dense undergrowth.</p> <p>Desc. 17 ft. over NW. slope.</p> <p>0.86 Wash, 50 lks. wide, course SW.; asc. gradually over SE. slope.</p> <p>10.00 Road, bears NE. and SW.; asc. 62 ft. over E. slope.</p> <p>12.06 Wire fence, bears NE. and SW.</p> <p>22.00 Wash, 10 lks. wide, course E., near head. Asc. 12 ft. over SE. slope.</p> <p>23.15 Spur, slopes E. Desc. 20 ft. over NE. slope.</p> <p>34.50 Wash, 10 lks. wide, course SW.; asc. 87 ft. over SW. slope.</p> <p>35.90 Wire fence, bears E. and W.; asc. 34 ft. over SW. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 6x6x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;"> $\frac{1}{4}$ S16 S15 1935 </p> <p>No bearing trees available.</p> <p>The original $\frac{1}{4}$ sec. cor. of same secs. bears S. 41° 47' E., 18.92 chs. dist., which is a stone 8x12x18 ins., marked $\frac{1}{4}$ on E. face, and set in a mound of stone. Find no trace of the recorded bearing trees accessory to this cor. Destroy all evidence of this old cor. monument.</p>

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

73

Chains	Asc. 16 ft. over SW. slope.						
42.90	Spur, slopes SE.; desc. 57 ft. over N. slope.						
56.50	Wash, 10 lks. wide, course SE.; asc. 98 ft. over SW. slope.						
66.45	Spur, slopes SE.; desc. 48 ft. over NE. slope.						
79.80	Wash, 10 lks. wide, course SE., thence over bottom land.						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x3 ins. marked with a cross (X) deposited at base of post, and in a mound of stone to top, for cor. of secs. 9, 10, 15, and 16, with brass cap marked						
	<table border="1"> <tr> <td colspan="2">T6N R9E</td> </tr> <tr> <td>S9</td> <td>S10</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> </table> <p>1935</p>	T6N R9E		S9	S10	S16	S15
T6N R9E							
S9	S10						
S16	S15						
	No bearing trees available.						
	The original cor. of same secs. bears S. 32° 11' E., 16.76 chs. dist., which is a stone 6x8x14 ins., marked with 4 notches on S. face and 3 notches on E. face, and firmly set in a mound of stone. Find no trace of the recorded bearing trees accessory to this cor. Destroy all evidence of this old cor. monument.						
	Land, mountainous. Soil, rocky 4th rate. Timber, oak and juniper Undergrowth, oakbrush, manzanita, and cacti.						
	East, on a random line, bet. secs. 10 and 15.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
80.04	Intersect N. and S. line, 12 lks. N. of the cor. of secs. 10, 11, 14, and 15.						
	Thence,						
	N. 89° 55' W., on true line, bet. secs. 10 and 15.						
	Over mountainous land, through scattering timber and undergrowth.						
	Desc. 51 ft. over rolling S. slope.						
7.55	Rocky spur, slopes SW.; desc. 488 ft. over SW. slope.						
27.20	Spur, slopes S.; continue descent.						
33.60	Wash, 20 lks. wide, course S.						
37.00	Wash, 10 lks. wide, course S.; asc. 39 ft. over SE. slope.						
40.02	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 2x2x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked						

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

$$\frac{1}{4} \frac{S10}{S15}$$

1935

No bearing trees available.

This $\frac{1}{4}$ sec. cor. is set in center of an old road, bearing NE. and SW.

Asc. 47 ft. over E. slope.

- 45.80 Ridge, bears NE. and SW.; desc. 178 ft. over SW. slope.
- 58.30 Wash, 10 lks. wide, course S.; asc. 13 ft. over SE. slope.
- 62.25 Ridge, bears N. and S.; desc. 122 ft. over SW. slope.
- 71.30 Wash, 10 lks. wide, course SW.; asc. 34 ft. over SE. slope.
- 77.35 Spur, slopes S.; desc. 33 ft. over SW. slope.
- 80.04 The cor. of secs. 9, 10, 15, and 16.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

N. $0^{\circ} 02'$ W., on true line, bet. secs. 9 and 10.

Over mountainous land, through scattering timber and undergrowth.

Asc. 235 ft. over SW. slope.

- 19.50 Spur, slopes SE.; desc. 34 ft. over NE. slope
- 23.00 Wash, 10 lks. wide, course SE.; asc. 194 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 4x4x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4}$$

S9 | S10

1935

No bearing trees available.

Desc. 34 ft. over NE. slope.

- 45.00 Swale, drains E.; asc. 486 ft. over SE. slope.
- 48.75 Road, bears NE. and SW.
- 75.00 Ridge, bears NE. and SW.; desc. gradual NW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 6x6x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 3, 4, 9, and 10, with brass cap marked

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

75

Chains

T6N R9E	
S4	S3
S9	S10
1935	

from which,

A cedar, 8 ins. in diam., bears N. 29° W., 254 lks. dist., marked T6N R9E S4 BT

A cedar, 6 ins. in diam., bears N. 20° E., 157 lks. dist., marked T6N R9E S3 BT.

A cedar, 30 ins. in diam., bears S. 17° E., 100 lks. dist., marked T6N R9E S10 BT.

A cedar, 4 ins. in diam., bears S. 55° W., 72 lks. dist., marked BT.

The original cor. of same secs. bears S. 3° 48' E., 14.66 chs. dist., which is a stone 10x14x16 ins., illegibly marked, and set in a mound of stone. Find no trace of the recorded bearing trees accessory to this cor. Destroy all evidence of this old cor. monument.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak and juniper.

Undergrowth, oakbrush, manzanita, and cacti.

S. 89° 55' E., on a random line, bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line 2 lks. N. of the cor. of secs. 2, 3, 10, and 11.

Thence,

N. 89° 54' W., on true line, bet. secs. 3 and 10.

Over mountainous land, through scattering timber and undergrowth.

Desc. 262 ft. over SW. slope.

30.60 Spur, slopes S.; desc. 69 ft. over W. slope.

35.50 Wash, 8 lks. wide, course S.; asc. 102 ft. over SE. slope.

40.03 Set an iron post 3 ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S3
	S10
	1935

No bearing trees available; raise a mound of stone 4 ft. base, 2 ft. high N. of cor.

The original $\frac{1}{4}$ sec. cor. of same secs. bears S. 57° 49' E., 14.82 chs. dist., which is a stone 8x10x12 ins., marked $\frac{1}{4}$, and firmly set in a mound of stone. Find no trace of the recorded accessories to this cor. Destroy all evidence of this old cor. monument.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

- Asc. 27 ft. over SE. slope.
- 42.45 Ridge, bears N. and S.; desc. 283 ft. over W. slope.
- 55.05 Wash, 15 lks. wide, course SW.; end of road from Bush Highway to mine, down this canyon about 20 chs. dist.
Asc. 257 ft. over SE. slope.
- 74.70 Ridge, bears N. and S.; desc. 101 ft. over W. slope.
- 80.06 The cor. of secs. 3, 4, 9, and 10.
Land, mountainous.
Soil, rocky 4th rate.
Timber, oak and juniper.
Undergrowth, oakbrush, manzanita, and cacti.
-
- N. 0° 02' W., on a random line, bet. secs. 3 and 4.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.83 Intersect the cor. of secs. 3, 4, 33, and 34, on N. bdy. of Tp., hereinbefore described.
Thence,
S. 0° 02' E., on true line, bet. secs. 3 and 4.
Over mountainous land, through scattering timber and undergrowth.
Desc. 231 ft. over SE. slope.
- 8.05 Wash, 25 lks. wide, course SW.; asc. 14 ft. over NW. slope.
- 10.95 Spur, slopes W.; desc. 111 ft. over SW. slope.
- 14.55 Same wash, course SE.; asc. 14 ft. over NE. slope.
- 22.75 Flat topped spur, slopes E.; desc. 78 ft. over SE. slope.
- 25.45 Same wash, course SW.; asc. 26 ft. over N. slope.
- 28.05 Spur, slopes SW.; desc. 99 ft. over S. slope.
- 33.30 Wash, 20 lks. wide, course SW.; asc. 60 ft. over NW. slope.
- 39.70 Spur, slopes W., gradual SW. slope.
- 39.83 Set an iron post, 3 ft. long, 1 in. in diam., on bedrock, alongside S. face of outcropping ledge, on which chisel a cross (X) about 1 lk. from cor. post, a cross (X) on ledge 2 lks. NW.; and a cross (X) on ledge, 2 lks. NE., and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S4 | S3
 1935

No bearing trees available.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains	Desc.
	36 ft. over SW. slope.
41.40	Wash, 10 lks. wide, course NW.; asc. 151 ft. over NW. slope.
46.00	Spur, slopes W.; desc. 90 ft. over S. slope
50.35	Wash, 10 lks. wide, course SW.; asc. 208 ft. over NW. slope.
57.60	Ridge, bears NW. and SE.; desc. 94 ft. over SW. slope.
62.90	Wash, 10 lks. wide, course NW.; asc. 210 ft. over N. slope.
70.50	Ridge, bears NW. and SE.; low saddle bears NW. about 5 chs. Desc. 92 ft. over W. slope.
79.83	The cor. of secs. 3, 4, 9, and 10. Land, mountainous. Soil, rocky 4th rate. Timber, oak and juniper. Undergrowth, oakbrush, manzanita, and cacti.

RESURVEY ($S\frac{1}{2}$), and SURVEY ($N\frac{1}{2}$).

From the cor. of secs. 32 and 33, on S. bdy. of Tp., hereinbefore described,

N. $0^{\circ} 02'$ W., on true line, bet. secs. 32 and 33.

Over mountainous land, through scattering timber and undergrowth.

Asc. 40 ft. over SW. slope.

2.55	Spur, slopes SW.; desc. 66 ft. over NW. slope.
7.35	Wash, 15 lks. wide, course SW.; asc. 129 ft. over S. slope.
15.00	Ridge, bears E. and W.; desc. 113 ft. over NW. slope.
22.00	Wash, 30 lks. wide, course SW.; asc. 121 ft. over SE. slope.
29.00	Spur, slopes W.; desc. 193 ft. over NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 6x6x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S32 | S33
 1935

No bearing trees available.

The original $\frac{1}{4}$ sec. cor. of same secs. bears N. $82^{\circ} 01'$ E., 34.15 chs. dist., which is a mound of stone 3 ft. base, 2 ft. high. Find no trace of the recorded bearing tree NW. of cor.

Destroy all evidence of the old cor. monument.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains

SURVEY.

Continue line and measurement as an original survey of the N. $\frac{1}{2}$ of line bet. secs. 32 and 33.

Desc. over gradual NW. slope.

- 41.70 Wash, 15 lks. wide, course SW.; thence over rolling W. slope.
- 58.00 Wash, 40 lks. wide, course SW.; asc. 21 ft. over SE. slope.
- 63.00 Ridge, bears NE. and SW.; desc. gradually over NW. slope.
- 70.00 Wash, 20 lks. wide, course SW.; asc. 249 ft. over S. slope.
- 80.00 Set an iron post 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, with stone 5x5x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 28, 29, 32, and 33, with brass cap marked

T6N	R9E
S29	S28
S32	S33
1935	

No bearing trees available.

Land, mountainous.

Soil, rocky 4th rate.

Timber, mesquite and catclaw.

Undergrowth, oakbrush, cacti, and sahuaros.

SURVEY.

East, on a random line, bet. secs. 28 and 33.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.88 Intersect the cor. of secs. 27, 28, 33, and 34.
- Thence,
- West, on true line, bet. secs. 28 and 33.
- Over mountainous land, through scattering timber and dense undergrowth.
- Desc. 7 ft. over NW. slope.
- 4.10 Wash, 10 lks. wide, course NE.; asc. 166 ft. over NE. slope.
- 12.00 Ridge, bears NW. and SE.; saddle about 15 chs. SE.; desc. 174 ft. over boulder strewn SW. slope.
- 26.60 Wash, 45 lks. wide, course NW.; asc. 20 ft. over E. slope.
- 30.00 Spur, slopes NW.; desc. 137 ft. over SW. slope.
- 39.94 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, alongside a boulder 4x4x4 ft., on east side of same, and on face of which chisel

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

79

Chains

X B0 S28, and in a mound of stone to top, for $\frac{1}{4}$ sec.
cor., with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S28} \\ \text{S33} \\ 1935 \end{array}$$

from which,

A mesquite, 10 ins. in diam., bears S. 65° W., 6.20 chs.
dist., marked $\frac{1}{4}$ S33 BT.

No other bearing tree available.

A good spring of water in center of wash, bears S. $31\frac{1}{4}^{\circ}$
W., 10.80 chs. dist.

Desc. 49 ft. over W. slope.

46.60 Wash, 30 lks. wide, course S.; asc. 103 ft. over E. slope.

55.00 Spur, slopes S.; desc. 161 ft. over SW. slope.

72.30 Wash, 25 lks. wide, course SW.; asc. 111 ft. over broken
SE. slope.

79.88 The cor. of secs. 28, 29, 32, and 33.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, sycamore, and mesquite.

Undergrowth, oakbrush, manzanita, Laurel, and cacti.

SURVEY.

N. $0^{\circ} 02'$ W., on true line, bet. secs. 28 and 29.

Over mountainous land, through scattering timber and
dense undergrowth.

Asc. 500 ft. over rough, broken SE. slope.

20.00 Rough spur, slopes E.; approximate W. bdy. of stock drive-
way. Desc. 23 ft. over NE. slope.

27.40 Wash, near head, course SE.; asc. 113 ft. over SE. slope.

35.00 Ridge, bears N. 80° E., and S. 80° W.; desc. 121 ft.
over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bedrock, with a stone 6x6x4 ins., marked
with a cross (X) deposited at base, and in a mound of
stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S29} \quad | \quad \text{S28} \\ 1935 \end{array}$$

No bearing trees available.

Desc. 33 ft. over NW. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains	
41.80	Wash, 25 lks. wide, course NW.; desc. 36 ft. over W.slope.
45.00	Desc. 425 ft. over broken NW. slope into canyon.
55.75	Bottom of canyon; wash, 25 lks. wide, course NE.; asc. 57 ft. over SE. slope.
58.40	Rocky point on spur, slopes NE.; desc. 254 ft. over N. slope.
68.00	Rocky wash, 10 lks. wide, course NE.; asc. 33 ft. over SE. slope.
70.00	Rocky spur, slopes NE.; desc. 86 ft. over NW. slope.
72.20	Rocky wash, 10 lks. wide, course NW.; asc. gradually over SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 16 ins. in the ground to bedrock, with a stone 5x5x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 20, 21, 28, and 29, with brass cap marked

T6N	R9E
S20	S21
S29	S28
1935	

No bearing trees available.

A peak bears N. 6° 50' W., about 25 chs. dist.

Asp Mt. bears N. 85° 40' E.

Crabtree Butte, bears S. 25° W.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, laurel, juniper, mesquite, and sycamore.

Undergrowth, oakbrush, manzanita, catclaw, and cacti.

RESURVEY.

East, on a random line, bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect the cor. of secs. 21, 22, 27, and 28.

Thence,

West, on true line, bet. secs. 21 and 28.

Over mountainous land, through scattering timber and undergrowth.

Desc. 35 ft. over SW. slope.

4.65 Enter wash, 15 lks. wide, course W. from SE. Down same on gradual descent.

17.70 Leave wash, turns NW.; asc. slight NE. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

81

Chains	
18.90	Spur, slopes NW.; desc. slight NW. slope.
25.50	Same wash, course W. from NE. Continue down same, on gradual descent.
37.55	Leave wash bottom, turns NW.; asc. steep bank, 15 ft.
38.60	Road, bears NW. and SE.
39.98	Set an iron post 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with stone 3x3x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{r} S21 \\ S28 \\ 1935 \end{array}$
	No bearing trees available.
	The original $\frac{1}{4}$ sec. cor. of same secs., bears S. 62° 28' E., 28.96 chs. dist., which is a malpais stone 8x10x22 ins., marked $\frac{1}{4}$, and set in a mound of stone. Find no trace of the recorded bearing trees. Destroy all evidence of this old cor. monument.
	Along N. edge of bank of wash; asc. 10 ft.
41.00	Desc. 10 ft. over NW. slope.
41.80	Bend in wash, from NE to NW.; asc. 23 ft. over NE. slope.
45.00	Spur, slopes NE.; desc. 34 ft. over NW. slope.
56.00	Wash, 25 lks. wide, course SW.; asc. 30 ft. over SE. slope.
58.65	Spur, slopes S.; desc. 58 ft. over SW. slope.
64.65	Boulder Creek, 75 lks. wide, with stream of water 10 lks. wide, 2 ins. deep, course E. 80° W., asc. 26 ft. over NE. slope.
69.00	Spur, slopes NW.; desc. 29 ft. over SW. slope.
69.60	Wash, 15 lks. wide, course N.; asc. gradual NE. slope.
77.00	Spur, slopes N.; desc. gradual SW. slope.
79.96	The cor. of secs. 20, 21, 28, and 29.
	Land, mountainous. Soil, rocky 4th rate. Timber, laurel, juniper, mesquite, and sycamore. Undergrowth, oakbrush, manzanita, and cacti.
	N. 0° 02' W., on true line, bet. secs. 20 and 21.
	Over mountainous land, through scattering timber and undergrowth.
	Desc. 61 ft. over NW. slope.
2.55	Boulder Creek, (dry), 50 lks. wide, course W.; asc. 585 ft. over SW. slope.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

Chains	
23.60	Ridge, bears NW. and SE.; desc. 399 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone 6x6x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S20 S21 1935
	No bearing trees available.
	The original $\frac{1}{4}$ sec. cor. of same secs. bears S. $53^{\circ} 03'$ E., 30.15 chs. dist., which is a granite stone 8x12x14 ins. above ground, marked $\frac{1}{4}$ on W. face. The original bearing tree, a dead juniper 16 ins. in diam., blazed and marked $\frac{1}{4}$ on S. face, bears E. 40 lks. Destroy all evidence of this old cor. monument.
	Desc. 175 ft. over NW. slope.
49.10	Old road, bears NW. and SE.
54.65	Intersect line 3-4 of the bdy. of Tract No. 41, at a point 4.53 chs. S. $6^{\circ} 44'$ E. from angle point No. 3 thereof, hereinbefore described. Thence across said Tract.
59.19	Intersect line 2-3 of the bdy. of Tract No. 41, identical with part of line 5-6 of the bdy. of Tract No. 40, at a point 53 lks. N. $85^{\circ} 33'$ E. from angle point No. 3 of Tract No. 31, and at 19.58 chs. S. $85^{\circ} 33'$ W. from angle point No. 6 of Tract No. 40, which is identical with angle point No. 2 of Tract No. 41, and with the original cor. of secs. 16, 17, 20, and 21. Said angle points hereinbefore described in the Tract survey notes.
	Thence, across Tract No. 40.
59.40	Wash, 15 lks. wide, course W. Asc. 20 ft. over SE. slope.
63.30	Point of spur slopes SW. Desc. 40 ft. over NW. slope.
66.30	Creek, 100 lks. wide, with running stream 20 lks. wide, 6 ins. deep, course SW. Asc. 99 ft. over SE. slope.
73.00	Top of ascent on E. side of butte, the top of which, 40 ft. above line point, bears W. about 2 chs. dist.
	Desc. 40 ft. over NE. slope.
79.20	Wash, 10 lks. wide, course SE. Asc. 20 ft. over SE. slope.
79.80	Road, bears NE. and SW.
80.00	True point for cor. of secs. 16, 17, 20 and 21, falls in road where it is impracticable to monument same, therefore establish witness cor. at a point 30 lks. N. $0^{\circ} 02'$ W., as hereinafter described.
	From sec. cor. point, the original cor. of same secs. bears S. $45^{\circ} 21'$ E., 27.45 chs. dist., hereinbefore described in Tract survey notes.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains	<p>Land, mountainous. Soil, rocky, 4th rate. . Timber, juniper, sycamore, oak, and laurel. Undergrowth, oakbrush, laurel, and cacti.</p>
	<p>From true point for cor. of secs. 16, 17, 20, and 21. East, on a random line, bet. secs. 16 and 21.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.94	Intersect the cor. of secs. 15, 16, 21, and 22. Thence, West, on true line, bet. secs. 16 and 21. Over mountainous land, through scattering timber and dense undergrowth. Desc. 14 ft. over W. slope.
0.90	Wash, 75 lks. wide, course SW.; asc. gradual SE. slope.
7.30	Road, bears NE. and SW.
8.90	Wire fence, bears NE. and SW.
13.80	Wash, 15 lks. wide, course SW.
28.70	Wash, 20 lks. wide, course SW.; asc. 41 ft. over SE. slope.
37.60	Spur, slopes SE.; desc. gradual SW. slope.
39.97	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 4x4x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S16}{S21}$ <p>1935</p>
	No bearing trees available.
	Desc. 33 ft. over SW. slope.
46.50	Bend in wash, 10 lks. wide, from NE. to S.; asc. 61 ft. over NE. slope.
54.50	Spur, slopes SE.; desc. 72 ft. over SW. slope.
60.10	Intersect line 6-7 of the bdy. of Tract No. 40, at a point 94 lks. S. $0^{\circ} 54'$ W. from angle point No. 7 thereof, hereinbefore described. Thence across said Tract,
65.05	Spring, on line, drains S.
66.20	Enter Ram Valley creek bottom; across same.
69.20	Center of wash, course SW.
73.10	Road, bears NE. and SW.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

74.20 Spring, bears N. 30 lks. dist.

75.60 Spring, bears N. 50 lks. dist.

76.00 Leave wash bottom; asc. 40 ft. over SE. slope.

79.90 Road, bears NE. and SW.

79.94 The true point for cor. of secs. 16, 17, 20, and 21.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, oak, juniper, sycamore, and walnut.

Undergrowth, oakbrush, catclaw, and cacti.

From true point for cor. of secs. 16, 17, 20, and 21,

N. $0^{\circ} 02'$ W., on true line, bet. secs. 16 and 17.Over mountainous land, through scattering timber and
undergrowth. Across Tract No. 40.

Asc. 5 ft. over S. slope.

0.30 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in
the ground to bedrock, with a stone 5x5x3 ins., marked
with a cross (X) deposited at base of post, and in a
mound of stone to top, for witness cor. of secs. 16, 17,
20, and 21, with brass cap marked

T6N R9E	
S17	S16
S20	S21

W C

1935

from which,

A cedar, 4 ins. in diam., bears N. 33° W., 82 lks. dist.,
marked WC BTA cedar, 4 ins. in diam., bears N. $86\frac{1}{2}^{\circ}$ E., 25 lks. dist.,
marked WC BTA cedar, 6 ins. in diam., bears S. 67° W., 80 lks. dist.,
marked WC T6N R9E S20 BT

No other bearing tree available.

U.S.B.M. 3435 bears S. 34° W., 2.87 chs. dist.

Asc. 148 ft. over SE. slope.

12.30 Ridge, bears E. and W.; desc. 259 ft. over NW. slope.

25.45 Wash, 10 lks. wide, course SW.; asc. 41 ft. over SE. slope.

26.97 Intersect line 1-2 of the bdy. of Tract No. 40, at a point
2.34 chs. N. $73^{\circ} 56'$ W. from angle point No. 1 thereof,
hereinbefore described. Leave said Tract.

30.00 Spur, slopes SW. Desc. 41 ft. over NW. slope.

37.00 Road, bears NE. and SW., in draw, course SW. Asc. grad-
ual SE. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

85

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in ground, to bedrock, with a stone 5x5x4 ins., marked with a cross (X) deposited at base, and raise mound of stone around post, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S17 | S16
 1935

No bearing trees available.

The original $\frac{1}{4}$ sec. cor. of same secs. bears S. 46° 55' E., 27.64 chs. dist., which is a mound of stone, from which stump of a juniper tree bears N. 25° W., 350 lks. dist. This stump agrees closely with the recorded position of the one bearing tree accessory to this cor. Destroy all evidence of this old cor. monument.

Asc. 271 ft. over SE. slope to spur.

45.30 Wash, 10 lks. wide, 4 ft. deep, course SE.; continue asc.

62.90 Enter flat-topped spur, slopes SW.; across rocky level.

68.00 Leave spur, desc. 38 ft. over N. slope.

70.35 Wash, 15 lks. wide, course W.; asc. 40 ft. over SW. slope.

75.80 Spur, slopes SW.; desc. gradual NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a cross (X) cut in surface rock, and in a mound of stone to top, for cor. of secs. 8, 9, 16, and 17, with brass cap marked

T6N R9E
 S8 | S9
 S17 | S16
 1935

from which,

A juniper, 6 ins. in diam., bears S. 85 $\frac{1}{2}$ ° E., 198 lks. dist., marked T6N R9E S16 BT.

A juniper, 6 ins. in diam., bears S. 50 $\frac{1}{2}$ ° W., 324 lks. dist., marked T6N R9E S17 BT.

No other bearing trees available.

The original cor. of same secs. bears S. 39° 16' E., 25.75 chs. dist., which is a granite stone 4x8x14 ins., unmarked, set in a mound of stone. Find no trace of the recorded bearing tree NW. of cor. Destroy all evidence of this old cor. monument.

Land, mountainous.

Soil, rocky 4th rate.

Timber, oak, and juniper.

Undergrowth, oakbrush and cacti.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

86

Chains	East, on a random line, bet. secs. 9 and 16.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	Intersect E. and S. line, 7 lks. E. of the cor. of secs. 9, 10, 15, and 16.
	Thence,
	E. 89' 57' W., on true line, bet. secs. 9 and 16.
	Over mountainous land, through scattering timber and undergrowth.
0.20	Wash, 10 lks. wide, course SE.
	Asc. 20 ft. over NE. slope.
4.70	Desc. gradual NW. slope.
7.80	Wash, 6 lks. wide, course NE.; asc. 148 ft. over E. slope.
15.65	Saddle in ridge, bears N. and S.; desc. 333 ft. over W. slope.
38.15	Wash, 8 lks. wide, course SW.; asc. 34 ft. over SE. slope.
39.96	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 8x8x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S9}{S16}$ 1935
	No bearing trees available.
	Group of small cabins of miners bears N. 15° W. Three cabins within radius of one chain. Mouth of tunnel No. 2 bears N. 18 $\frac{1}{2}$ ° E.
	Desc. 34 ft. over W. slope.
43.95	Wash, 20 lks. wide, course SW.; asc. 80 ft. over SE. slope.
44.65	Mine road, bears NE. and SW.
49.05	Spur, slopes SW.; desc. 50 ft. over SW. slope.
53.00	Wash, 10 lks. wide, course SW.; asc. 349 ft. over E. slope.
64.31	Same group of cabins, center point bears N. 48 $\frac{1}{2}$ ° E., and same tunnel bears N. 46° E.
64.60	Top of mesa; about 3 chs. wide, stony level surface.
	Desc. 127 ft. over W. slope.
79.92	The cor. of secs. 8, 9, 16, and 17.
	Land, mountainous. Soil, rocky 4th rate. Timber, oak, sycamore, and mesquite. Undergrowth, oakbrush, manzanita, and cacti.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

87

Chains

N. $0^{\circ} 02'$ W., on true line, bet. secs. 8 and 9.

Over mountainous land, through scattering timber and undergrowth.

Desc. 75 ft. over NW. slope.

4.65 Wash, 10 lks. wide, course SW.; asc. 160 ft. over SE. slope.

11.45 S. rim of malpais mesa, bears NE. and SW.; asc. 45 ft. over rocky top of same.

24.10 N. rim of mesa, bears NE. and SW.; leave mesa, desc. 49 ft. over cliff bearing E. and W., facing N.

24.20 Foot of same cliff; desc. 66 ft. over NW. slope.

28.60 Wash, 10 lks. wide, course SW.; heads 5 chs. NE.

38.40 Low saddle in spur, slopes SW.; desc. 11 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S8} \quad | \quad \text{S9} \\ 1935 \end{array}$$

from which

A laurel, 6 ins. in diam., bears N. 82° W., 9 lks. dist., marked $\frac{1}{4}$ S8 BT.A laurel, 6 ins. in diam., bears S. 65° E., 113 lks. dist., marked $\frac{1}{4}$ S9 BT.Mt. Ord bears N. $52^{\circ} 50'$ E.

Desc. 281 ft. over N. slope.

54.00 Wash, 15 lks. wide, course W. Asc. 114 ft. over SW. slope.

62.80 Woven wire fence, bears S. 80° E., and N. 80° W.64.23 Intersect line 5-6 of bdy. of Tract No. 37 at a point 7.50 chs. S. $71^{\circ} 23'$ E. from angle point No. 5 thereof, hereinbefore described. Thence across said Tract.

67.40 Spur, slopes W. Desc. gradually over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, with brass cap marked

$$\begin{array}{c} \text{T6N R9E} \\ \text{S5} \quad | \quad \text{S4} \\ \text{S8} \quad | \quad \text{S9} \\ 1935 \end{array}$$

No suitable bearing trees available.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

From above described reestablished cor. of secs. 4, 5, 8, and 9, the original cor. of same secs., hereinbefore described in Tract survey notes, and which is now angle point No. 6 of Tract No. 37, bears S. 21° 37' E. 19.50 chs. dist.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, oak, mesquite, and some laurel.

Undergrowth, oakbrush, laurel, catclaw, and cacti.

S. 89° 57' E., on a random line, bet. secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.88 Intersect N. & S. line at 5 lks. N. of the cor. of secs. 3, 4, 9, and 10.

Thence

N. 89° 55' W., on true line, bet. secs. 4 and 9.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 115 ft. over SW. slope.

0.55 Trail, bears N. and S.

5.35 Wash, 10 lks. wide, course S. Asc. 152 ft. over E. slope.

13.30 Ridge, bears N. and S. Desc. 106 ft. over SW. slope.

22.65 Wash, 5 lks. wide, course SW. Asc. 52 ft. over SE. slope.

26.50 Ridge, brs. N. and S., Desc. 255 ft. over W. slope.

39.94 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone 4x4x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 4}{S\ 9}$
1935

No bearing trees available.

McDowell Peak brs. S. 31° W.

A high peak bears S. 55° W., about 3 miles dist.

A high peak on W. side of Verde River, bears N. 84° 25' W.

The Diamond Ranch bears S. 60° 50' W.

Descend 380 ft. over W. slope.

61.55 Desc. 162 ft. over NW. slope to sec. cor.

68.78 Wire fence, bears N. 10° E., and S. 10° W.

70.37 Intersect line 6-7 of the bdy. of Tract No. 37, at a point 18.34 chs., N. 7° 12' E. from angle point No. 6 thereof, hereinbefore described.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

89

Chains	Thence across said Tract.
79.88	The cor. of secs. 4, 5, 8, and 9. Land, mountainous. Soil, rocky, 4th rate. Timber, cedar. Undergrowth, oakbrush, laurel, and mountain mahogany.
40.00	N. 0° 02' W., on a random line, bet. secs. 4 and 5. Set temp. $\frac{1}{4}$ sec. cor.
79.77	Intersect the cor. of secs. 4, 5, 32 and 33, on N. bdy. of the Tp., hereinbefore described. Thence S. 0° 02' E., on true line, bet. secs. 4 and 5. Over mountainous land, thru scattering timber and dense undergrowth. Desc. 42 ft. over SE. slope.
1.65	Wash, 7 lks. wide, course SW. Asc. 82 ft. over NW. slope.
11.90	Ridge, bears NE. and SW. Desc. 341 ft. over SE. slope.
24.46	Intersect line 1-2 of the bdy. of Tract No. 37, at a point 7.37 chs. S. 82° 44' E. from angle point No. 2 thereof, hereinbefore described. Thence across said Tract.
27.07	Spring, bears E. about 6 chs. dist.
33.20	Wash, 15 lks. wide, course W. Asc. 90 ft. over NW. slope.
39.77	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in ground with a stone 5x5x2 ins. marked with a cross (X) deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{1}{4} \\ \\ S5 \quad \quad S4 \\ \\ 1935 \end{array}$ No suitable bearing trees available. From this reestablished $\frac{1}{4}$ sec. cor., the original $\frac{1}{4}$ sec. cor. of same secs., hereinbefore described in Tract survey notes, and which is now angle point No. 7 of Tract No. 37, bears S. 38° 18' E., 20.31 chs. dist. Asc. 56 ft. over NW. slope.
41.65	Ridge, bears E. & W. Desc. 199 ft. over S. slope.
51.83	Intersect line 8-1 of the bdy. of Tract No. 37, at a point 18 lks. N. 18° 55' E. from angle point No. 8 thereof, hereinbefore described.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains	
	Leave said Tract.
52.01	Intersect line 7-8 of the bdy. of Tract No. 37 at a point 6 lks. S. 73° 36' E. from angle point No. 8 thereof, hereinbefore described.
	Thence across said Tract.
54.90	Wire fence, bears NE. and SW.
70.05	Road from Tom Daniels's place to Bush Highway, bears NE. and SW.
70.50	Wash, 15 lks. wide, course SW. Asc. 21 ft. over NW.slope.
79.77	The cor. of secs. 4, 5, 8, and 9.
	Land, mountainous. Soil, rocky, 4th rate. Timber, oak, laurel, and some sycamore. Undergrowth, oakbrush, catclaw, laurel, and cacti.
	From the cor. of secs. 31 and 32, on S. bdy. of Tp., hereinbefore described.
	N. 0° 03' W., on true line, bet. secs. 31 and 32.
	Over mountainous land, through scattering timber and dense undergrowth. Desc. 29 ft. over W. slope.
11.40	Wash, 10 lks. wide, course W.; asc. gradual SW. slope.
16.30	Ridge, bears E. and W.; desc. 266 ft. over N. slope.
28.40	Wash, 30 lks. wide, course W.; asc. 171 ft. over SW.slope to ¼ sec. cor.
39.50	Shallow wash, 10 lks. wide, course SW.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with stone 5x5x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked
	$\frac{1}{4}$ S31 S32 1935
	No bearing trees available.
	Asc. 20 ft. over SW. slope.
42.20	Desc. 5 ft. over N. slope.
42.30	Wash, 15 lks. wide, course SW.; asc. 89 ft. over SE.slope.
46.60	Spur, slopes SW.; asc. 44 ft. along broken W. slope.
55.00	Desc. 195 ft. over NW. slope, over huge boulders.
61.25	Junction of washes from NE. and SE.; thence W.; asc. 119 ft. over broken SW. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

66.80 Spur, slopes SW.; desc. 204 ft. over NW. slope.

79.40 Set an iron post, 3 ft. long, 2 ins. in diam., over a cross (X) cut in surface rock, and in a mound of stone to top, for witness cor. of secs. 29, 30, 31, and 32, with brass cap marked

WC	
T6N	R9E
S30	S29
S31	S32
1935	

No bearing trees available.

80.00 True point for cor. of secs. 29, 30, 31, and 32, falls on face of cliff, where it cannot be monumented, therefore establish witness cor. at 60 lks. S. 0° 03' E.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, palo verde, ironwood, and sycamore; some sahuaros.
Undergrowth, oakbrush, catclaw, and cacti.

SURVEY (E $\frac{1}{2}$) and RESURVEY (W $\frac{1}{2}$).

From true point for cor. of secs. 29, 30, 31, and 32.

East, on a random line, bet. secs. 29 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.88 Intersect the cor. of secs. 28, 29, 32, and 33.

Thence,

SURVEY.

West, on a true line, bet. secs. 29 and 32.

Over rough, mountainous land, through scattering timber and dense undergrowth.

Desc. 124 ft. over SW. slope.

9.30 Wash, 15 lks. wide, course SE.; asc. 243 ft. over SE. slope.

28.00 High ridge, bears N. and S., at W. end of stock driveway. Desc. 296 ft. over W. slope.

39.94 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, with a stone 3x4x5 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S29
	S32
	1935

No bearing trees available.

Chains

RESURVEY.

Continue line and measurement as resurvey of W. $\frac{1}{2}$ of line bet. secs. 29 and 32.

Desc. 186 ft. over W. slope.

47.00 Wash, 15 lks. wide, course NW.; desc. 83 ft. over N. slope.

60.40 Ridge, bears NW. and SE.; desc. 357 ft. over W. slope.

79.88 The true point for cor. of secs. 29, 30, 31, and 32.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, palo verde, ironwood, and mesquite,

Undergrowth, oakbrush, catclaw, and cacti.

SURVEY (W $\frac{1}{2}$) and RESURVEY (E $\frac{1}{2}$).

From true point for cor. of secs. 29, 30, 31, and 32,

West, on a random line, bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.44 Intersect the cor. of secs. 25, 30, 31, and 36, on W. bdy. of Tp., hereinbefore described.

Thence,

SURVEY.

East, on true line, bet. secs. 30 and 31.

Over mountainous land, through scattering timber and undergrowth.

Desc. 170 ft. over E. slope.

10.60 Wash, 10 lks. wide, course S.; asc. 34 ft. over SW. slope.

14.00 Rim of black mesa, bears NW. and S.; desc. 544 ft. over E. slope.

33.25 Wash, 10 lks. wide, course SE.; asc. gradual SW. slope.

39.44 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, with a stone 4x4x5 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 30
S 31
1935

No bearing trees available.

The original cor. of secs. 25, 30, 31, and 36, hereinbefore described, bears N. 87° 32' E., 4.18 chs. dist.

RESURVEY.

Continue line and measurement as resurvey of E. $\frac{1}{2}$ of line bet. secs. 30 and 31.


Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains	Asc. gradual SW. slope.
42.50	Spur, slopes SE.; desc. 137 ft. over NE. slope.
56.00	Wash, 30 lks. wide, course SW.; asc. gradual SW. slope.
57.27	Bush Highway, bears N. and S.
65.40	Spur, slopes SE.; desc. 185 ft. over NE. slope.
75.00	Sycamore Creek, 50 lks. wide, with stream of water 20 lks. wide, 5 ins. deep, course S.; asc. 165 ft. over series of cliffs bearing N. & S., facing W.
79.44	Intersect true point for cor. of secs. 29, 30, 31, and 32. Land, rough mountains. Soil, rocky, 4th rate. Timber, mesquite, juniper, and ironwood; some sycamores along creek. Undergrowth, oakbrush, catclaw, sahuaros, and cacti.
	From true point for cor. of secs. 29, 30, 31, and 32. N. 0° 03' W., on true line, bet. secs. 29 and 30. Over mountainous land, through scattering timber and undergrowth. Desc. 113 ft. over broken NW. slope.
5.00	Foot of descent, bears NE. and SW. Enter stony bottom land along creek.
5.20	Sycamore Creek, with a stream of water 20 lks. wide, 6 ins. deep, course S. 30° W. Thence across stony bottom land.
10.00	Leave bottom; bears NE. and SW.; asc. 365 ft. over SE. slope.
32.00	Spur, slopes E.; asc. 25 ft. over E. slope.
35.00	Desc. 20 ft. over NE. slope.
38.60	Wash, 10 lks. wide, course SE.; asc. 25 ft. over SE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., on bedrock, with a stone 4x4x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S30 S29 1935
	No bearing trees available.
	Crabtree Butte bears S. 89° E. $\frac{1}{4}$ sec. cor. of secs. 20 and 29 bears N. 45° E. Boulder Mt., (W. end), bears S. 51° E. Sycamore Creek in deep canyon, bears E. about 8 chs. dist. Spur, sloping S., bears W. about 3 chs. dist

BOOK 4100

Resurvey and Completion Survey of the Subdivision
of T. 6 N., R. 9 E.

Chains Asc. 53 ft. along E. slope.
54.40 Spur, slopes E., near end; desc. 19 ft. along NE. slope.
56.00 Wash, 10 lks. wide, course SE.; asc. 48 ft. over W. slope.
57.60 Wash, 5 lks. wide, course SW.; asc. 142 ft. over SE. slope.
59.45 Trail, bears NE. and SW.
70.90 Spur, slopes NE.; desc. 33 ft. over E. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, with a stone 5x5x4 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 19, 20, 29, and 30, with brass cap marked



from which

A cedar, 24 ins. in diam., bears N. 41° E., 272 lks. dist., marked T6N R9E S20 BT.

A cedar, 10 ins. in diam., bears N. 21° W., 263 lks. dist., marked T6N R9E S19 BT.

No other bearing tree available.

Crabtree Butte bears S. 54½° E.
Mt. Ord bears N. 38° E.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, oak, juniper, mesquite, and sycamore.
Undergrowth, oakbrush, manzanita, and cacti.

SURVEY (E½) and RESURVEY (W½).

East, on a random line, bet. secs. 20 and 29.
40.00 Set temp. ¼ sec. cor.
80.00 Intersect the cor. of secs. 20, 21, 28, and 29.
Thence,

SURVEY.

West, on true line, bet. secs. 20 and 29.
Over mountainous land, through scattering timber and dense undergrowth.
Desc. 9 ft. over W. slope.
1.70 Wash, 20 lks. wide, course N.; asc. 10 ft. over E. slope.
12.50 Spur, slopes N.; desc. 91 ft. over NE. slope.
16.00 Foot of descent; enter rocky wash, 50 lks. wide, course W. from NE. Desc. gradually down same.

Resurvey and Completion Survey of Subdivision of
T. 6 N., R. 9 E.

95

Feet	
20.00	Leave wash, turns to NW.; a tunnel bears S. 50 lks. dist. Asc. 6 ft. over toe of spur from S.
22.00	Gulch, 20 lks. wide, 5 ft. deep, course NE.; asc. 229 ft. over NE. slope.
29.00	Rocky spur, slopes NE.; thence along N. slope.
38.00	Ridge, 2 chs. wide, bears NW. and SE. Desc. slight S. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock, with a stone 6x6x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S 20 S 29 1935 No bearing trees available. $\frac{1}{4}$ sec. cor. of secs. 29 and 30, plainly visible, bears S. 45° W. <u>RESURVEY.</u> Continue line and measurement as resurvey of W. $\frac{1}{2}$ of line bet. secs. 20 and 29. Desc. 96 ft. over SW. slope. 51.50 Spur, slopes SW.; desc. 537 ft. over W. slope. 66.50 Sycamore Creek, 100 lks. wide, course S. 10° E., with stream of water 20 lks. wide, 6 ins. deep. Asc. 282 ft. over broken E. slope. 76.00 Spur, slopes S.; desc. 30 ft. over SW. slope. 78.40 Wash, 20 lks. wide, course SE.; asc. 10 ft. over N. slope. 80.00 The cor. of secs. 19, 20, 29, and 30. Land, mountainous. Soil, rocky, 4th rate. Timber, cedar, oak, laurel, and along creek, sycamores. Undergrowth, oakbrush, manzanita, and cacti. West, on a random line, bet. secs. 19 and 30. 40.00 Set temp. $\frac{1}{4}$ sec. cor. 79.40 Intersect the cor. of secs. 19, 24, 25, and 30, on W. bdy. of Tp., hereinbefore described. Thence, East, on a true line, bet. secs. 19 and 30. Over mountainous land, through scattering timber and under- growth.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

96

Chains	Asc. 29 ft. over W. slope.
2.00	Spur, slopes S.; desc. 154 ft. over SE. slope to wash.
3.40	Head of wash, course SE.
4.60	Spur, slopes SE.
10.70	Wash, 10 lks. wide, course S.; asc. 40 ft. over W. slope.
11.90	Spur, slopes S.; desc. 36 ft. over E. slope.
13.25	Wash, 20 lks. wide, course S.; asc. 41 ft. over W. slope.
14.90	Spur, slopes S.; desc. 76 ft. over E. slope.
19.80	Wash, 15 lks. wide, course S.; asc. 148 ft. over W. slope.
26.50	Old road, Ft. Reno to Ft. McDowell, bears N. and S., on spur, slopes S. Desc. 61 ft. over E. slope.
30.65	Wash, 10 lks. wide, course S. 10° E., asc. 170 ft. over W. slope.
36.40	Rocky spur, 50 lks. wide, course S.; desc. 24 ft. over E. slope.
39.40	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone 5x5x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ <u>S19</u> S30 1935
	No bearing trees available.
	The original cor. of secs. 19, 24, 25, and 30, hereinbefore described, bears N. 59° 39' E., 3.33 chs. dist.
	Desc. 207 ft. over E. slope.
43.25	Bush Highway, bears N. and S.
51.15	Wash, 10 lks. wide, course SE.; asc. 119 ft. over SW. slope.
67.40	Spur, slopes SE.; desc. 200 ft. over NE. slope.
74.90	Wash, 10 lks. wide, course NE.; asc. slight NW. slope.
76.00	Desc. 18 ft. over E. slope.
79.40	The cor. of secs. 19, 20, 29, and 30.
	Land, mountainous. Soil, rocky, 4th rate. Timber, oak, juniper, mesquite, and ironwood. Undergrowth, oakbrush, catclaw, and cacti.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

SURVEY.N. $0^{\circ} 03'$ W., on true line, bet. secs. 19 and 20.

Over mountainous land, through scattering timber and undergrowth.

Desc. gradual N. slope.

2.50 Wash, 20 lks. wide, course E.; asc. 88 ft. over SW. slope.

10.00 Boulder strewn spur, slopes W.; desc. 26 ft. along W. slope.

14.85 Wash, 5 lks. wide, course W.; asc. 51 ft. over SW. slope.

22.50 Spur, slopes SE., from N. Boulder and Sycamore creeks join in canyon about 40 chs. east. Asc. 75 ft. along top of spur.

37.00 Leave top of spur, slopes S. from NW.; desc. gradual NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to bedrock, with a stone 6x6x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$$\begin{array}{c} \frac{1}{4} \\ | \\ S19 \quad | \quad S20 \\ | \\ 1935 \end{array}$$

No bearing trees available.

Junction of Boulder and Sycamore Creeks, bears S. 56° E.Crabtree Butte, bears S. 35° E.Mt. Ord bears N. $42\frac{1}{2}^{\circ}$ E.

Desc. 135 ft. over NE. slope.

52.05 Wash, 20 lks. wide, course SE.; thence over rolling E. slope.

62.70 Wash, 25 lks. wide, course SE.; asc. 23 ft. over SW. slope.

73.05 Wash, 10 lks. wide, course SW.; asc. over SE. slope.

79.00 Desc. slightly over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in the ground to bedrock, with a stone 2x2x3 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 17, 18, 19, and 20, with brass cap marked

$$\begin{array}{c} T6N R9E \\ S18 \quad | \quad S17 \\ \hline S19 \quad | \quad S20 \\ 1935 \end{array}$$

No bearing trees available.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

The original cor. of same secs. bears N. $84^{\circ} 03'$ E.,
31.06 chs. dist., which is a mound of stone. Find no
trace of a marked stone or the recorded bearing trees
SE. and SW. of cor. Scatter the mound.

The original $\frac{1}{4}$ sec. cor. of secs. 18 and 19, hereinafter
described, bears N. $79^{\circ} 17'$ W., 8.33 chs. dist.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, oak, and juniper.

Undergrowth, oakbrush, catclaw, and cacti.

East, on a random line, bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect the true point for cor. of secs. 16, 17, 20, and
21.

Thence,

West, on true line, bet. secs. 17 and 20,

Over mountainous land, through scattering timber and
undergrowth. Across Tract No. 40.

3.00 Spur, slopes S.; desc. 63 ft. over SW. slope.

9.55 Road, bears NW. and SE.; enter bottom land, same bearing.

12.95 Road, bears NW. and SE.

18.54 Intersect line 4-5 of the bdy. of Tract No. 40, at 4.56
chs. S. $5^{\circ} 10'$ W. from angle point No. 4 thereof,
hereinbefore described. Leave said Tract.

22.60 Sycamore Creek, 20 lks. wide, 8 ins. deep, course SE.;
continue over bottom land.

28.70 Leave bottom land, bears NW. and SE.; asc. 45 ft. over
NE. slope.

39.98 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bedrock, with a stone 7x7x4 ins., marked
with a cross (X) deposited at base, and in a mound of
stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 17

S 20

1935

No bearing trees available.

The original $\frac{1}{4}$ sec. cor. of same secs., (now angle
point No. 5 of Tract No. 40), bears S. $40^{\circ} 54'$ E.,
29.65 chs. dist., hereinbefore described in notes of
Tract surveys.

The original cor. of secs. 17, 18, 19, and 20, herein-
before described, bears N. $70^{\circ} 31'$ W., 9.64 chs. dist.

Asc. 275 ft. over NE. slope.

Resurvey and Completion Survey of the Subdivision
of T. 6 N., R. 9 E.

Chains	
60.75	Ridge, bears NW. and SE.; saddle bears N. 2 chs. dist. Desc. 237 ft. over W. slope.
79.96	The cor. of secs. 17, 18, 19, and 20. Land, mountainous, except along creek bottom. Soil, rocky, 4th rate. Timber, oak, juniper, laurel, and sycamore. Undergrowth, oakbrush, catclaw, and cacti.
West, on a random line, bet. secs. 18 and 19.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.37	Intersect the cor. of secs. 13, 18, 19, and 24, on W. bdy. of Tp., hereinbefore described.
Thence,	
East, on a true line, bet. secs. 18 and 19:	
Over mountainous land, through scattering timber and dense undergrowth.	
Desc. 64 ft. over NE. slope.	
3.85	Wash, 35 lks. wide, course NE.; asc. 38 ft. over NW. slope.
6.70	Spur, slopes NE.; desc. 125 ft. over SE. slope.
10.95	Wash, 15 lks. wide, course NE.; asc. gradual NW. slope.
14.30	Spur, slopes NE.; desc. 100 ft. over E. slope.
23.45	Wash, 20 lks. wide, course N.; asc. 92 ft. over NW. slope.
27.20	Ridge, bears N. and S.; desc. 221 ft. over E. slope.
39.37	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with stone 5x5x4 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
$\frac{1}{4}$ <u>S 18</u> S 19 1935	
No bearing trees available.	
The original $\frac{1}{4}$ sec. cor. of same secs. bears N. 87° 13' E., 31.86 chs. dist., which is a mound of stone. Find no trace of marked stone or the recorded SE. bearing tree. Scatter the mound.	
The original cor. of secs. 13, 18, 19, and 24, herein- before described, bears N. 17° 27' E., 1.40 chs. dist.	
Desc. gradual E. slope.	
41.20	Wash, 10 lks. wide, course NW.; asc. gradual W. slope.
45.00	Spur, slopes N.; desc. 87 ft. over E. slope.
54.10	Bush Highway, bears N. and S.

Resurvey and Completion Survey of the Subdivision of
T. 6 N.; R. 9 E.

Chains

- 61.70 Wash, 10 lks. wide, course SE.; asc. 18 ft. over W. slope.
63.87 Spur, slopes SE.; desc. 52 ft. over NE. slope.
75.95 Wash, 10 lks. wide, course SE.; asc. slightly over S. slope.
79.37 The cor. of secs. 17, 18, 19, and 20.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, oak, laurel, and juniper.
Undergrowth, oakbrush, catclaw, and cacti.

N. $0^{\circ} 03'$ W., on true line, bet. secs. 17 and 18.

Over mountainous land, through scattering timber and undergrowth.

Asc. 118 ft. over SW. slope.

- 16.90 Ridge, bears E. and W.; desc. 277 ft. over N. slope.

- 34.15 Bush Highway, bears E. and W.

- 39.60 Wash, 10 lks. wide; course SE.; asc. gradual SE. slope.

- 40.00 Set an iron post; $\frac{3}{4}$ ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S18 | S17
 1935

from which,

A juniper, 6 ins. in diam., bears N. $26\frac{1}{4}^{\circ}$ W., 93 lks. dist.; marked $\frac{1}{4}$ S18 BT.

No other bearing tree available.

The original $\frac{1}{4}$ sec. cor. of same secs. bears N. $87^{\circ} 09'$ E., 29.34 chs. dist., which is a mound of stone. From which a willow, blazed but marks illegible, bears N. 38° W., 118 lks. dist. This agrees substantially with the recorded NW. bearing tree. Find no trace of the NE. bearing tree. Scatter the mound.

- 41.35 Intersect line 6-7 of the bdy. of Tract No. 39, at 9.70 chs. N. $89^{\circ} 47'$ E. from angle point No. 6 thereof, hereinbefore described. Thence across said Tract.

Desc. gradual N. slope.

- 41.50 Wash, 30 lks. wide, course E.; asc. 23 ft. over SE. slope.

- 45.30 Diamond Ranch fence, bears E. and W.

- 57.20 Spur, slopes E.; desc. gradual NE. slope.

- 76.65 Diamond Ranch road, bears NW. and SE. Enter field.

- 79.90 Small wash, course SE. Asc. slight SW. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

101

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 7, 8, 17, and 18, with brass cap marked

T6N	R9E
S7	S8
S18	S17
1935	

from which,

A sycamore, 18 ins. in diam., bears N. $77\frac{1}{2}^{\circ}$ E., 277 lks. dist., marked T6N R9E S8 BT.

A sycamore, 20 ins. in diam., bears S. 72° E., 216 lks. dist., marked T6N R9E S17 BT.

A walnut, 18 ins. in diam., bears S. $80\frac{1}{2}^{\circ}$ W., 140 lks. dist., marked T6N R9E S18 BT.

No other bearing tree available; raise a mound of stone 4 ft. base, 2 ft. high W. of cor.

The original cor. of same secs. bears N. $86^{\circ} 33'$ E. 28.73 chs. dist., which is a stone 10x16x18 ins. above ground, firmly set in ground and mound of stones, marked with 5 notches on E. face, with a cross (X) on top. A forked cottonwood tree bears N. 86° E., 2.73 lks. dist., which is probably the recorded bearing tree although no marking is visible. Obliterate the marking on the stone and scatter the mound.

The original $\frac{1}{4}$ sec. cor. of secs. 7 and 18, (now angle point No. 5 of Tract No. 39), bears N. $80^{\circ} 19'$ W., 11.42 chs. dist., hereinbefore described in Tract survey notes.

Land, mountainous and level.

Soil, rocky, 4th rate on slopes; in field, sandy, black loam, 2nd rate.

Timber, oak, juniper, and sycamore.

Undergrowth, oakbrush, laurel, and cacti.

East, on a random line, bet. secs. 8 and 17.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

79.88

Intersect N. and S. line, 14 lks. N. of the cor. of secs. 8, 9, 16, and 17.

Thence,

N. $89^{\circ} 54'$ W., on true line, bet. secs. 8 and 17.

Over mountainous land, through scattering timber and dense undergrowth.

Desc. 116 ft. over NW. slope.

6.60

Wash, 15 lks. wide, course SW.; asc. 80 ft. over SE. slope.

12.20

Rim of mesa, bears NE. and SW.

Desc. 88 ft. over W. slope, on mesa.

26.90

Rim of mesa, bears NW. and SW. Leave mesa; desc. 113 ft. over W. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N.; R. 9 E.

Chains

39.94 Set an iron post, 3 ft. long, 1 in. in diam., 13 ins. in the ground to bedrock, with a stone 3x3x2 ins., marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S 8}{S 17}$
1935

from which,

A juniper, 6 ins. in diam., bears N. $81\frac{1}{2}^{\circ}$ W., 93 lks. dist., marked $\frac{1}{4}$ S8 BT.

A juniper, 8 ins. in diam., bears S. 49° W., 102 lks. dist., marked $\frac{1}{4}$ S17 BT.

The original $\frac{1}{4}$ sec. cor. of same secs. bears N. $87^{\circ} 49'$ E., 28.80 chs. dist., which is a mound of stone. Find no trace of marked stone, or bearing tree. Scatter the mound.

The original cor. of secs. 7, 8, 17, and 18, hereinbefore described, bears N. $80^{\circ} 55'$ W., 11.40 chs. dist.

Desc. 50 ft. over W. slope.

48.65 Wash, 35 lks. wide, course S.; asc. gradual E. slope.

49.80 Road, bears N. and SW.

59.90 Spur, slopes SW.; desc. 49 ft. over W. slope.

71.00 Sycamore Creek, 40 lks. wide, course S., and Bush Highway, bears NW. and SE.; thence over nearly level bottom land.

71.12 Intersect line 7-8 of the bdy. of Tract No. 39, at 1.70 chs. S. $1^{\circ} 33'$ E. from angle point No. 8 thereof, hereinbefore described.

Thence across said Tract,

74.90 Wire fence, bears NW. and SE.; enter cultivated land.

79.88 The cor. of secs. 7, 8, 17, and 18.

Land, mountainous and level.
Soil, rocky, 4th rate on slopes, and black, sandy loam, 2d rate, in fields.
Timber, oak, juniper, and sycamore.
Undergrowth, oakbrush, cacti, and catclaw.

West, on a random line, bet. secs. 7 and 18.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.37 Intersect cor. of secs. 7, 12, 13, and 18, on W. bdy. of Tp., hereinbefore described.

Thence,

East, on true line, bet. secs. 7 and 18.

Over mountainous land, through scattering timber and dense undergrowth.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

103

Chains	
	Desc. 81 ft. over NE. slope.
9.90	Spur, slopes NE.; desc. 110 ft. over SE. slope.
20.25	Wash, 40 lks. wide, course N.; asc. 66 ft. over NW. slope.
33.45	Spur, slopes NE.; desc. gradual SE. slope, 83 ft.
34.60	Fence, bears NE. and SW.
39.37	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$. $\frac{S\ 7}{S18}$
	1935
	from which
	A juniper, 20 ins. in diam., bears N. 80° E., 109 lks. dist., marked $\frac{1}{4}$ S7 BT.
	A juniper, 10 ins. in diam., bears S. 49° E., 99 lks. dist., marked $\frac{1}{4}$ S18 BT.
	The original $\frac{1}{4}$ sec. cor. of same secs., (now angle point No. 5 of Tract No. 39), bears N. 80° 11' E., 28.80 chs. dist., hereinbefore described in Tract survey notes.
	The original cor. of secs. 7, 12, 13, and 18, hereinbefore described, bears N. 59° 19' E., 1.06 chs. dist.
	Desc. 29 ft. over SE. slope.
45.20	Wash, 10 lks. wide, course NE.; asc. 29 ft. over NW. slope.
54.22	Spur, slopes N.; desc. 114 ft. over NE. slope.
58.00	Spring near Diamond Ranch House, bears N. about 2.25 chs. dist.
	A cement water trough bears N. about 5 chs. dist.
	S.E. cor. of barn, bears N. 32 $\frac{1}{2}$ ° E., 5.25 chs. dist.
	House of Bernard Hughes, Diamond Ranch, bears N. 4.25 chs. dist.
68.19	Intersect line 5-6 of bdy. of Tract No. 39, at 1.78 chs., S. 2° 12' E. from angle point No. 5 thereof, hereinbefore described. Thence across said Tract.
72.80	Road, bears NW. and SE.
75.50	Foot of descent; irrigation ditch, bears NW. and SE. Thence, over level land.
78.50	Enter cultivated land, bears NW. and SE.
79.20	Small wash, course SE., continue over cultivated land.
79.37	The cor. of secs. 7, 8, 17, and 18. Land, mountainous, rolling and level. Soil, rocky, 4th rate on slopes; black loam, 2d rate, in field. Timber, oak, juniper, and sycamore. Undergrowth, oakbrush, catclaw, and cacti.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains	
	N. 0° 03' W., on true line, bet. secs. 7 and 8. Over level cultivated land, across Tract No. 39.
6.25	Wire fence, bears E. and W. Leave field, enter rolling land, bears NW. and SE.
12.50	Wire fence, bears E. and W.; corral bears W. about 10 lks. dist.
13.40	Wire fence, bears NW. and SE.
13.50	Bush Highway, bears NW. and SE.
19.10	Sycamore Creek, 30 lks. wide, with stream of water, 3 ft. wide, 2 ins. deep, course SE.
21.68	Intersect line 1-2 of the bdy. of Tract No. 39 at a point 9.22 chs. S. 89° 46' W. from angle point No. 1 thereof, hereinbefore described. Leave said Tract.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in ground to bedrock, with a stone 5x3x2 ins., marked with a cross (X), deposited at base, and raise a mound of stone around post, for $\frac{1}{4}$ sec. cor., with brass cap marked <div style="text-align: center;"> $\frac{1}{4}$ S7 S8 1935 </div> <p style="text-align: right;">from which,</p> <p>A juniper, 18 ins. diam., bears S. 15° E., 212 lks. dist., marked $\frac{1}{4}$ S8 BT.</p> <p>No other bearing tree available.</p> <p>Mt. Ord bears N. 61° E. Boulder Mt. brs. S. 26° E. Asp Mt. bears S. 62° E. Crabtree Butte bears S. 14$\frac{1}{2}$° E.</p> <p>The original $\frac{1}{4}$ sec. cor. of secs. 7 and 8 bears N. 85° 54' E., 28.43 chs. dist., which is a stone 8x8x22 ins., marked $\frac{1}{4}$, and set in a mound of stone. Stump of record NE. bearing tree, marking obliterated, bears N. 60° E., 276 lks. dist. Find no trace of the original SE. bearing tree. Destroy said cor. monument.</p> <p>Asc. gradual SW. slope.</p>
48.40	Spur, slopes W. Desc. 37 ft. over SW. slope.
52.15	Wash, 10 lks. wide, course W. Asc. 36 ft. over SW. slope.
56.40	Spur, slopes SW. Desc. 34 ft. over NW. slope.
61.55	Wash, 10 lks. wide, course SW. Asc. 113 ft. over S. slope.
71.75	Ridge, bears NE. and SW. Desc. 15 ft. over NW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in ground to bedrock, with a stone 4x4x4 ins. marked with a cross (X) deposited at base, and raise a mound of stone around post, for cor. of secs. 5, 6, 7, and 8, with

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

105

Chains

brass cap marked

T6N	R9E
S6	S5
S7	S8

1935

from which,

A juniper, 12 ins. diam., bears N. 87° W., 340 lks. dist., marked T6N R9E S6 BT.

No other bearing tree available.

The original cor. of secs. 5, 6, 7, and 8, which is a wooden stake, 2 ins. square, firmly set in ground, and mound of stone, faintly marked, bears N. 87° 58' E., 28.21 chs. dist.

No trace of the recorded SE. bearing tree can be found.
Destroy said cor. monument.

Land, level, rolling, and mountainous.

Soil, rocky, 4th rate.

Timber, juniper and sycamore.

Undergrowth, oakbrush and laurel.

S. 89° 54' E., on a random line, bet. secs. 5 and 8.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.76 Intersect N. and S. line at 30 lks. S. of the cor. of secs. 4, 5, 8, and 9.

Thence,

S. 89° 53' W., on true line, bet. secs. 5 and 8.

Over mountainous land, thru scattering timber and undergrowth,

Across Tract No. 37.

Desc. 41 ft. over NW. slope.

4.82 Intersect line 4-5 of the bdy. of Tract No. 37, at a point 7.32 chs. S. 9° 41' W. from angle point No. 4 thereof, hereinbefore described.

Leave said Tract.

8.65 Enter wash, 15 lks. wide, course W. from NE. Thence down wash.

14.05 Woven wire fence, bears N. and S.

17.55 Leave wash, course S. from E. Asc. 347 ft. over E. slope.

18.90 Road, bears NE. and SW.

19.25 Road, bears N. and S.

30.45 Ridge, bears N. and S. Desc. 132 ft. over W. slope.

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

39.88 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in ground to bedrock, with a stone 5x5x2 ins. marked with a cross (X) deposited at base, and raise mound of stone around post, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S5}{S8}$
1935

No suitable bearing trees available.

The original cor. of secs. 5, 6, 7, and 8, hereinbefore described, bears N. $83^{\circ} 25'$ W., 10.22 chs. dist.

41.40 Wash, 10 lks. wide, course SE. Asc. 107 ft. over SE. slope.

47.45 Spur, slopes S. Desc. 162 ft. over NE. slope.

63.00 Wash, 10 lks. wide, course SW. Asc. 63 ft. over SE. slope.

74.30 Ridge, bears N. and S. Desc. 50 ft. over W. slope.

79.76 The cor. of secs. 5, 6, 7, and 8.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, oak, juniper, and sycamore.

Undergrowth, oakbrush, laurel, and cacti.

West, on a random line, bet. secs. 6 and 7.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.30 Intersect the cor. of secs. 1, 6, 7, and 12, on W. bdy. of Tp., hereinbefore described.

Thence,

East, on true line, bet. secs. 6 and 7.

Over mountainous land, thru scattering timber and undergrowth.

Desc. 58 ft. over NE. slope.

4.64 Wire fence, bears NE. and SW.

5.90 Creek, 40 lks. wide, with stream of water 6 lks. wide, 5 ins. deep, course SE.; asc. 90 ft. over SW. slope.

8.30 Wire fence, bears NE. and SW.

32.30 Ridge, bears NW. and SE.; desc. 20 ft. over E. slope.

39.30 Set an iron post, 3 ft. long, 1 in. in diam., on bedrock, deposit a stone 4x4x3 ins. marked with a cross (X) at base of post, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S6}{S7}$
1935

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

107

Chains	from which,
	<p>A cedar, 8 ins. in diam., bears N. 72° W., 215 lks. dist., marked $\frac{1}{4}$ S6 BT.</p> <p>No other bearing tree available.</p> <p>Mt. Ord bears N. 70° 50' E. Asp Mt. bears S. 59° 50' E. The original cor. of secs. 1, 6, 7, and 12, (now angle point No. 2 of Tract No. 38), hereinbefore described, bears N. 37° 57' E., 1.27 chs. dist.</p> <p>Desc. 66 ft. over NE. slope.</p>
40.01	<p>Intersect line 2-3 of bdy. of Tract No. 38, at 1.00 ch. S. 4° 07' W. from angle point No. 2 thereof, hereinbefore described.</p> <p>Thence across said Tract.</p>
42.40	Bush Highway, bears NW. and SE.
44.20	Sycamore Creek, with a stream of water 3 ft. wide, 2 ins. deep, course S.; asc. 166 ft. over SW. slope.
54.70	Ridge, bears N. and S.; desc. 76 ft. over E. slope.
55.63	<p>Intersect line 7-1 of bdy. of Tract No. 38, at 1.00 ch. S. 3° 49' W. from angle point No. 1 thereof, hereinbefore described.</p> <p>Leave Tract No. 38.</p>
58.53	Creek, in ravine, with stream of water, 3 ft. wide, 1 in. deep, course SW.; asc. 144 ft. over W. slope.
66.60	Ridge, bears N. and S.; desc. 27 ft. over E. slope.
76.75	Wash, 10 lks. wide, course S.; asc. 35 ft. over W. slope.
79.30	<p>The cor. of secs. 5, 6, 7, and 8.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, oak, juniper, and sycamore. Undergrowth, oakbrush, catclaw, and cacti.</p>
	N. 0° 03' W., on random line, bet. secs. 5 and 6.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	<p>Intersect N. bdy. of Tp. 26 lks. E. of the cor. of secs. 5, 6, 31, and 32, hereinbefore described.</p> <p>Thence,</p> <p>S. 0° 14' E., on true line, bet. secs. 5 and 6.</p> <p>Over rolling land, through scattering timber and dense undergrowth.</p> <p>Desc. slightly over mesa.</p>
3.50	Leave mesa, bears NE. and SW., enter mountainous land;

Resurvey and Completion Survey of the Subdivision of
T. 6 N., R. 9 E.

Chains

desc. 242 ft. over S. slope.

39.40 Desc. 15 ft. over broken outcropping of malpais, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, with a stone 5x5x3 ins. marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S6 | S5
 1935

No bearing trees available.

Desc. 248 ft. over SE. slope.

52.20 Creek, in bottom of ravine, with stream of water 3 ft. wide, 2 ins. deep, course SW.; asc. 50 ft. over NW. slope.

53.50 Rim of malpais, 10 ft. high, bears NE. and SW; continue ascent over gradual NW. slope.

63.00 Ridge, bears NE. and SW.; desc. 191 ft. over SE. slope.

76.50 Wash, 15 lks. wide, course SW.; asc. 49 ft. over NW. slope.

80.00 The cor. of secs. 5, 6, 7, and 8.

Land, rolling and mountainous.

Soil, rocky, 4th rate.

Timber, oak and juniper.

Undergrowth, oakbrush, catclaw, and cacti.

Note:

Instrumental work in connection with the resurveys and surveys described in the foregoing field notes was completed December 7, 1935, but the permanent corner monuments of Tract No. 37 were set February 20 and 21, 1930.

Final Field Test of Buff
Transit No. 18,000
by
Benjamin J. Kinsey, U.S. Surveyor.

December, 8, 1935: at same station as described on page 2, hereof, I examine the adjustments of the transit and find no errors; then to test the working of the solar attachment proceed as follows:

At 9h.00m., a.m.; app.t., with latitude arc set $33^{\circ}49\frac{1}{2}'$ N., and declination arc set at $22^{\circ}38'S.$, determine a meridian with the solar which agrees with the true meridian.

At 12h.00m., app. noon, with latitude arc unchanged, observe the sun on the meridian; the resultant reading of the declination arc is $22^{\circ}40' N.$, which agrees with the computed declination of the sun.

At 3h.00m., p.m., app.t., with lat. arc unchanged set off $22^{\circ}40'S.$ and determine a meridian with the solar which agrees with the true meridian.

As all of the observations taken agree within 1' of the true meridian conclude that the adjustments of the instrument have been maintained during the surveys described herein.

Final Field Tests of Young & Sons
Transits Nos. 8540 & 8592,
by
Bert E. Wakeman, Public Land Surveyor.

December, 7, 1935: at same station as described on page 2 hereof, examine the adjustments of the transits and find no errors. Then to test the workings of the solar apparatus proceed as follows:

At 9h.00m., a.m.; app.t., with lat. arc set at $33^{\circ}49\frac{1}{2}'$ N. and declination arcs set at $22^{\circ}29'S.$, determine a meridian with the solar which agree with the true meridian.

At 12h.00m., app.t., noon with lat arc unchanged, observe the sun on the meridian; the resultant reading of the decl. arcs are $22^{\circ}31'S.$, which agrees with the computed declination of the sun.

At 3h.00m., p.m., app.t., with lat. arc unchanged, set off $22^{\circ}31'S.$ on the decl. arcs and determine meridians with the solar which agrees with the true meridian.

As all of the observations taken during the usual hours of solar work agree within 1' of the true meridian, conclude that the adjustments of the instruments have been maintained during the surveys herein described.

GENERAL DESCRIPTION.

Land: lies in the Mazatzal Range of mountains with elevation above sea level, ranging from 6,000 ft. in the northeastern quarter to 3,000 ft. in the southwestern quarter. The divide between Tonto and Sycamore Creeks lies N. and S. through the E. part.
Drainage: easternmost sections drain toward Tonto Creek, and the greater western area drains southerly by way of Sycamore Creek.

Soil: chiefly rocky and gravelly 4th. rate on slopes and in washes. Certain lands along Sycamore and Ram Valley Creeks which are being farmed are of a sandy, black loam capable of producing fairly good hay crops and good fruit. The formations are granite and malapai.

Timber: the predominating species are the juniper, oak, sycamore, paloverde, willow, and along the higher slopes are a few pinion and yellow pine, with merchantable value as posts and fuel.

Mineral: while there are no producing mines at present in the township, some development work is going on principally in sec. 9; the Comet Mine in sec. 11 has been worked considerably in the past, some evidence of gold and silver being present. Numerous unpatented claims are scattered throughout the area. The only patented claims lie in sec. 4.

Watering places: Sycamore Creek carries the largest stream of water the year round; Ram Valley Creek has intermittent water above sec. 21, springs in the latter section feed a stream of water for a $\frac{1}{2}$ mile above the creek's intersection with Sycamore Creek in section 20. Several other creeks carry intermittent water in the western part of the Tp. There are springs of living water in sec. 1, 11, 4, 5, 6, 7, 14, 15, 16, 17, 21, 22, 23, 24, 33, and 36.

Settlement: settlers are living in secs. 4, 9, 17, and 7. A large Transient Camp is built in sec. 17, NW $\frac{1}{4}$. Improvements generally consist of houses, fences, wells and smaller buildings, and cement troughs with pipe lines.

Roads: The Bush Highway crosses longitudinally across the W. side of Tp.; there are several other fair roads and an old road which once was used to connect Forts McDowell and Reno which crosses the Mazatzal divide is now nothing more than a trail.

General: All lands are within the Tonto National Forest with its Sunflower R.S. in sec. 6. A stock drive crosses NE and SW from secs. 12 and 13 to secs. 32 and 33. In connection with the drive a large watering reservoir is located in sec. 22. The lands are used chiefly for grazing.

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Daniel M. Wier, Public Land Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona, bearing date of the 19th day of April, 1934, and supplemental special instructions bearing date of the 22nd day of August, 1935, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed, ^{and resurveyed} all those parts or portions of

East Boundary

and Subdivision Lines of

Township No. 6 North, Range No. 9 East

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of ~~said survey~~ ^{and resurvey} have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special ^{and supplemental special} written instructions of the District Cadastral Engineer for Arizona and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey ^{and resurvey}.

Phoenix, Arizona
February 28, 1936.

Daniel M. Wier
Public Land Surveyor.

~~APPROVAL~~

~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL,~~

-----, 19

~~The foregoing field notes of the survey of~~ -----

~~executed by~~ -----
~~under his special instructions dated~~ -----, 19, ~~having been~~
~~critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys~~
~~they describe, are hereby approved.~~

~~U. S. Surveyor General.~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~ -----
~~has been correctly copied from the original notes on file in this office.~~

~~U. S. Surveyor General.~~

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Bert E. Wakeman, Public Land Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona, bearing date of the 19th day of April, 1934, and supplemental special instructions bearing date of the 22nd day of August, 1935, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed and resurveyed all those parts or portions of

Boundary of Tract No. 37,

Tie to U.S. Min. Mon. No. 1, Brown Mining District

and Subdivision Lines of

Township No. 6 North, Range No. 9 East

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey and resurvey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special and supplemental special written instructions of the District Cadastral Engineer for Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey and resurvey.

Phoenix, Arizona

Bert E. Wakeman Public Land Surveyor

February 28, 1936.

APPROVAL

Office of the United States Surveyor General,

19

The foregoing field notes of the survey of

executed by

under his special instructions dated, 19, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General

I certify that the foregoing transcript of the field notes of the above described surveys in

has been correctly copied from the original notes on file in this office.

U. S. Surveyor General

4-680
(August, 1926)

FIELD ASSISTANTS.

to Benj. J. Kinsey, U.S. Surveyor, Bert E. Wakeman & Daniel M. Wier, Public Land Surveyors.

NAMES.	CAPACITY.
Howard Osborn	1st & 2nd Chainman
Thornton Fitzhugh	1st & 2nd Chainman
Donald Gifford	1st & 2nd Chainman
Uyless Walters	Flagman, Axman
H. R. Ruddell	2nd Chainman, Flagman
J. C. Norman	Truckdriver
John Boggs	Truckdriver
Harry Wintz	Cornerman
Walter D. Eldridge Jr.	Axman, Flagman
H. A. Weedon	2nd Chainman, Cornerman
Dawson Cooley	Axman
H. E. Brister	Cornerman

118
114

BOOK 4100

CERTIFICATE OF UNITED STATES SURVEYOR

I, Benjamin J. Kinsey, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Arizona, bearing date of the 19th day of April, 1934, and supplemental special instructions bearing date of the 22nd day of August 1935, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed and resurveyed all those parts or portions of

Boundaries of Tracts Nos. 37, 38, 39, 40 and 41

South Bdy., West Bdy. and North Bdy., and

Subdivision Lines of

Township No. 6 North, Range No. 9 East

of the Gila and Salt

River Base and Meridian, in the State of Arizona, which are represented in

the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey and resurvey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special and supplemental special written instructions of the District Cadastral Engineer for Arizona

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey and resurvey.

Phoenix, Arizona, June 24, 1936. Benjamin J. Kinsey, U. S. Surveyor.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colorado, June 29, 1936.

The foregoing field notes of the survey and resurvey of

Tie to U.S. Min. Mon. No. 1, Brown Mining District,

Boundaries of Tracts Nos. 37, 38, 39, 40 and 41

East, South, West and North Boundaries and

Subdivision Lines of

Township No. 6 North, Range No. 9 East

of the Gila and Salt River Base and Meridian, in the State of Arizona.

executed by Benjamin J. Kinsey, U.S. Surveyor, and Daniel M. Wier and Bert E. Wakeman, Public Land Surveyors, under his special and supplemental special instructions dated April 19, 1934 and August 22, 1935 for Group 204, Arizona, having been

critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys and resurveys they describe, are hereby approved.

Daniel M. Wier, U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys.