

4198

4-679
(April 1933)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

BOOK 4183

FIELD NOTES

OF RESURVEY OF

EAST boundary of T. 11 N., R. 3 W. and

WEST boundary of T. 11 N., R. 2 W.

and of SURVEY of

NORTH boundary of T. 10 N., R. 2 W.

and

SOUTH boundary

EAST boundary

NORTH boundary and

SUBDIVISION LINES of

Township 11 North, Range 2 West

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Ty White, Norville E. Shearer and Frank Kennon

Public Land Surveyors

supplemental
Under special instructions dated July 27, 1938, which provided
for the surveys included under Group No. 223, Arizona, bearing the approval of the
Commissioner of the General Land Office under date of August 31, 1938
and assignment instructions dated July 27, 1938

Resurvey and Survey commenced August 19, 1938

Resurvey and Survey completed October 13, 1938

4198

4198

INDEX DIAGRAM.


Township , *Range*

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

1A

INDEX-DIAGRAM

BOOK 4198

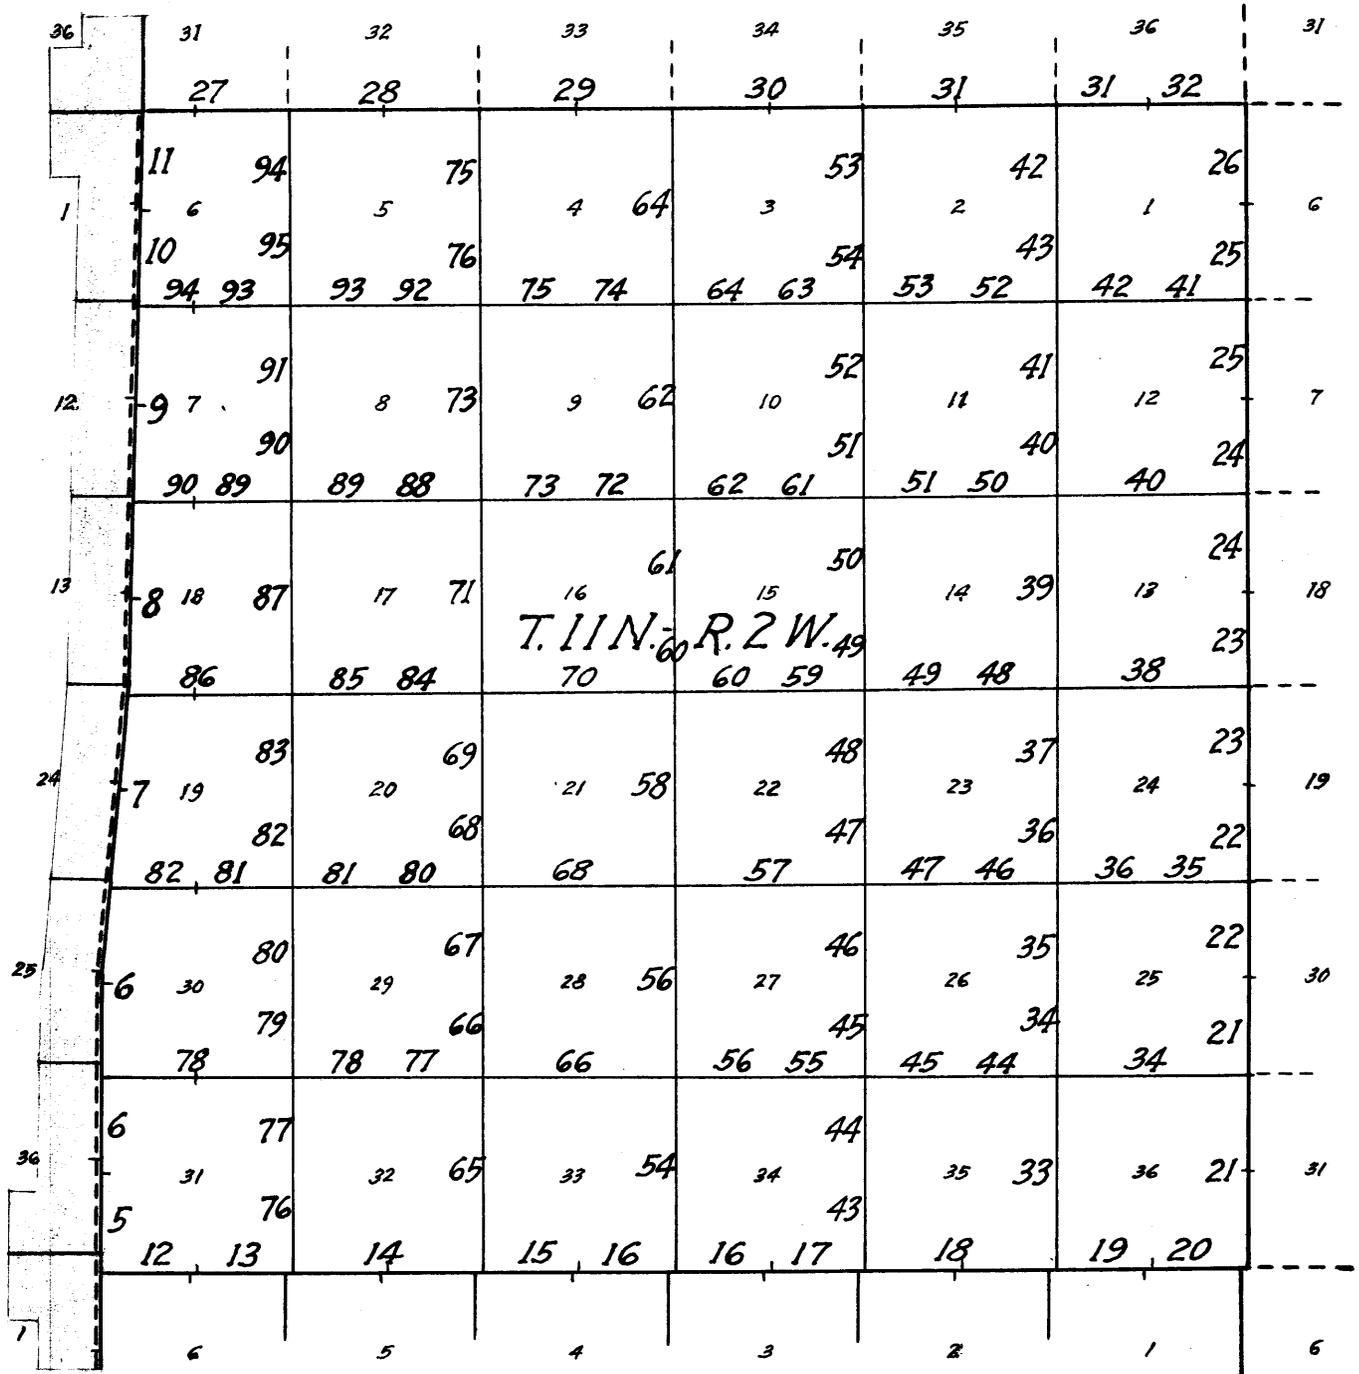

————— Accepted surveys.

===== Lines resurveyed under this group.

----- Unsurveyed.

————— Lines surveyed under this group.

▭ Areas surveyed as per accepted plats on file.

The surveys and resurveys herein described were executed by Ty White, Norville E. Shearer and Frank Kennon, Public Land Surveyors, using, respectively, Buff and Buff transits Nos. 18002 and 10125, and Lietz transit No. 6166. Each of these instruments is equipped with an improved Smith solar attachment and otherwise conforms to the Standard specifications of the General Land Office. The instruments were examined and tested by the District Cadastral Engineer for California and Arizona prior to the beginning of the surveys of this group, and were approved conditional upon the results of satisfactory field tests of same.

The azimuths of all of the lines of survey herein described were determined with the solar attachments.

All measurements were made with Lufkin and Dietzgen steel tapes, 5 chs. in length, graduated every link for the first 100 lks., and the remainder at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard tape and found correct. All of the measurements were made on the slope, the vertical angle of each interval determined with a clinometer in good adjustment, and the horizontal equivalents entered in the field notes.

PRELIMINARY FIELD TESTS OF INSTRUMENTS.

Buff and Buff transit No. 18002
Ty White, Public Land Surveyor.

Sept. 7, 1938; at camp about 20 chs. S. of the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, T. 11 N., R. 2 W., G. & S.R. Meridian, Arizona, latitude $34^{\circ} 15' 15''$ N., longitude $112^{\circ} 28\frac{1}{2}'$ W.; examine the adjustments of Buff and Buff transit No. 18002 and find no errors, then, to test the workings of the solar apparatus proceed as follows:

At 8h. 40m., p.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack in a stake driven firmly in the ground about 8 chs. N.

Azimuth of Polaris at eastern elongation: $1^{\circ} 14' 48''$.

Sept. 8: lay off the azimuth of Polaris $1^{\circ} 15'$ to the west, and mark the meridian thus determined, by a tack in a stake driven firmly in the ground about 8 chs. N.

Sept. 11, 1938; at 8h. 00m., a.m., app.t., set off $34^{\circ} 15'$ N. on the latitude arc; $4^{\circ} 40\frac{1}{2}'$ N. on the declination arc; and determine a meridian with the solar which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of $4^{\circ} 36'$ N. on the declination arc, which agrees with the computed declination of the sun.

At 4h. 00m., p.m., app.t., with the latitude arc unchanged; set off $4^{\circ} 33'$ N. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1' 30''$ of the true meridian, conclude that this instrument is in satisfactory adjustment on this date, prior to beginning the surveys with

same which are described in the field notes herein.

Lietz transit No. 6166
Frank Kennon, Public Land Surveyor.

Sept. 18, 1938; at same station, using the meridian established by Ty White, Public Land Surveyor, by Polaris observation, test the solar apparatus of Lietz transit No. 6166 as follows:

At 8h. 00m., a.m., app.t., set off $34^{\circ} 15'$ N. on the latitude arc; $1^{\circ} 59\frac{1}{2}'$ N. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged; observe the sun on the meridian, and obtain a reading of $1^{\circ} 55'$ N. on the declination arc, which agrees with the computed declination of the sun.

At 4h. 00m., p.m., app.t., with the latitude arc unchanged; set off $1^{\circ} 51\frac{1}{2}'$ N. on the declination arc, and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1' 30''$ of the true meridian, conclude that this instrument is in satisfactory adjustment on this date, prior to beginning the surveys with same which are herein described.

Buff and Buff transit No. 10125
Norville E. Shearer, Public Land Surveyor

The solar apparatus of Buff and Buff transit No. 10125, used by Norville E. Shearer, Public Land Surveyor, in the execution of surveys herein described, was tested August 18, 1938, at station in Sec. 2, T. 9 N., R. 2 W., on meridian determined by Polaris observation, as described in the field notes of survey of T. 10 N., R. 2 W. This test also applies as a preliminary test of same instrument for the surveys herein described.

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

BOOK 4198

3.

Chains

The east boundary of T. 11 N., R. 3 W. was surveyed by O.H. Case, U.S. Deputy Surveyor in 1871, establishing common reference corners thereon at 40 ch. intervals counting from the N.

In 1919, J.P. Davis, U. S. Surveyor, in connection with his survey of T. 12 N., R. 3 W., reconstructed the cor. of Ts. 11 and 12 N., Rs. 2 and 3 W. in its original position with same reference, monumenting same with regulation brass-capped iron post.

In 1925, U. S. Transitman, Wesson Cook, executed resurvey of 2 miles of the line, bet. secs. 7 and 12, and bet. secs. 13 and 18, reconstructing the existing cor. monuments in their original positions, and reestablishing missing cors. at proportional intervals, monumenting both with regulation brass-capped iron posts, with original common reference.

In 1933, Benjamin J. Kinsey, U.S. Surveyor, resurveyed the N. 1 mile and the S. 3 miles of this Tp. bdy., reconstructing existing original cor. monuments, including the cor. of Ts. 10 and 11 N., Rs. 2 and 3 W., in their original positions, and reestablishing missing cors. at proportional intervals, monumenting both with regulation brass-capped iron posts, with original common reference.

No other resurvey or retracement of any part of this Tp. bdy. is of record.

The following notes describe a resurvey of the entire W. bdy. of T. 11 N., R. 2 W., northerly from the closing cor. of Ts. 10 and 11 N., R. 2 W. (established under this group), reestablishing $\frac{1}{4}$ sec. cors. thereon, referring to areas in T. 11 N., R. 2 W. only, at midpoints in latitude between the closing corners of secs. E. of the line, except the W. $\frac{1}{4}$ sec. cor. of sec. 6 which is reestablished at 40.00 chs. N. latitude from the closing cor. of secs. 6 and 7; and a resurvey of the entire E. bdy. of T. 11 N., R. 3 W.; altering all of the $\frac{1}{4}$ sec. and sec. cor. monuments thereon to refer to areas W. of line only.

Retracement for Resurvey.

From cor. of Ts. 10 and 11 N., R. 3 W.,

N. $0^{\circ} 15'$ W., on random line, E. of sec. 36 (S. $\frac{1}{2}$).

40.36 Intersect the $\frac{1}{4}$ sec. cor.

True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore; N. $0^{\circ} 15'$ W., 40.36 chs.

Thence

N. $0^{\circ} 35'$ W., on random line, E. of sec. 36 (N. $\frac{1}{2}$).

39.07 A point $46\frac{1}{2}$ lks. W. of cor. of secs. 25, 30, 31 and 36.

True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 36 are therefore, N. $0^{\circ} 06'$ E., 39.07 chs.

From sec. cor.

N. $0^{\circ} 35'$ W., on random line, E. of sec. 25 (S. $\frac{1}{2}$).

39.07 A point $46\frac{1}{2}$ lks. W. of the $\frac{1}{4}$ sec. cor.

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

BOOK 4198

4.

Chains	<p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore, N. $0^{\circ} 06' E.$, 39.07 chs.</p> <p>From $\frac{1}{4}$ sec. cor.,</p> <p>N. $6^{\circ} 28' E.$, on random line, E. of sec. 25 (N. $\frac{1}{2}$).</p> <p>39.31 Intersect the cor. of secs. 19, 24, 25 and 30.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 25 are therefore, N. $6^{\circ} 28' E.$, 39.31 chs.</p>
39.31	<p>N. $6^{\circ} 28' E.$, on random line, E. of sec. 24 (S. $\frac{1}{2}$).</p> <p>Intersect the $\frac{1}{4}$ sec. cor.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 24, are therefore, N. $6^{\circ} 28' E.$, 39.31 chs.</p> <p>Thence,</p> <p>N. $6^{\circ} 28' E.$, on random line, E. of sec. 24 (N. $\frac{1}{2}$).</p> <p>39.31 Intersect the cor. of secs. 13, 18, 19 and 24.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 24 are therefore, N. $6^{\circ} 28' E.$, 39.31 chs.</p>
39.68	<p>N. $1^{\circ} 19' E.$, on random line, E. of sec. 13 (S. $\frac{1}{2}$).</p> <p>Intersect the $\frac{1}{4}$ sec. cor.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore, N. $1^{\circ} 19' E.$, 39.68 chs.</p> <p>Thence</p> <p>N. $1^{\circ} 19' E.$, on random line, E. of sec. 13 (N. $\frac{1}{2}$).</p> <p>39.38 Intersect the witness cor. to cor. of secs. 7, 12, 13 and 18.</p> <p>39.68 (Record 0.30 chs. N. $1^{\circ} 19' E.$ from W.C. to cor. point) Intersect the true point for cor. of secs. 7, 12, 13 and 18.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 13 are therefore, N. $1^{\circ} 19' E.$, 39.68 chs.</p>
39.68	<p>From true point for cor. of secs. 7, 12, 13 and 18,</p> <p>N. $1^{\circ} 19' E.$, on random line, E. of sec. 12 (S. $\frac{1}{2}$).</p> <p>39.68 Intersect the $\frac{1}{4}$ sec. cor.</p> <p>True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore, N. $1^{\circ} 19' E.$, 39.68 chs.</p> <p>Thence</p> <p>N. $1^{\circ} 19' E.$, on random line, E. of sec. 12 (N. $\frac{1}{2}$).</p> <p>39.68 Intersect the cor. of secs. 1, 6, 7 and 12.</p> <p>True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 12 are therefore, N. $1^{\circ} 19' E.$, 39.68 chs.</p>

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

BOOK 4198

. 5.

Chains	N. 1° 19' E., on random line, E. of sec. 1 (S. $\frac{1}{2}$).
39.68	Intersect the $\frac{1}{4}$ sec. cor. True course and dist. of S. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore, N. 1° 19' E., 39.68 chs. Thence N. 1° 19' E., on random line, E. of sec. 1 (N. $\frac{1}{2}$).
39.68	Intersect the cor. of Ts. 11 and 12 N., Rs. 2 and 3 W. True course and dist. of N. $\frac{1}{2}$ of E. bdy. of sec. 1 are therefore, N. 1° 19' E., 39.68 chs..
<u>RESURVEY</u>	
Note: The topography obtained in the resurvey described in the following notes is omitted in view of the fact that it agrees substantially with that contained in the official record of the previous resurveys.	
From the closing cor. of Ts. 10 and 11 N., R. 2 W., established on the E. bdy. of T. 10 N., R. 3 W. as hereinafter described,	
7.93	N. 0° 03' W., on true line, on W. bdy. of sec. 31. Intersect the cor. of Ts. 10 and 11 N., R. 3 W., described in field notes of resurvey of part of E. bdy. of T. 10 N., R. 3 W., executed under this group and incorporated with field notes of survey of T. 10 N., R. 2 W.
40.00	Thence N. 0° 15' W., on true line, continuing measurement of W. bdy. of sec. 31. (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 31, with brass cap marked $\frac{1}{4}$ S 31 1938 No bearing trees available. Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.
48.29	(40.36 chs. N. 0° 15' W. from cor. of Ts. 10 and 11 N., R. 3 W.) Intersect the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is an iron post, 1 in. in diam., projecting 20 ins. above ground, firmly set in ground and in a mound of stone to top, and marked on brass cap as described in the official record. Alter this cor. monument to refer to the quarters of sec. 36 only by changing marking on brass cap to read $\frac{1}{4}$ S 36 1933 No bearing trees available.

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

BOOK 4198

6.

Chains	Thence,								
	N. 0° 06' E., on true line, continuing measurement of W. bdy. of sec. 31.								
80.00	Intersect the subdivision line bet. secs. 30 and 31, surveyed due West. Closing cor. of said secs. established at this point as hereinafter described.								
	From closing cor. of secs. 30 and 31,								
	N. 0° 06' E., on true line, on W. bdy. of sec. 30.								
7.36	(39.07 chs. N. 0° 06' E. from $\frac{1}{4}$ sec. cor. of sec. 36) Intersect the cor. of secs. 25, 30, 31 and 36, which is an iron post, 2 ins. in diam., projecting 19 ins. above ground, firmly set in ground and mound of stone and marked on brass cap as described in the official record.								
	Alter this cor. monument to refer to secs. 25 and 36 only by changing marking on brass cap to read								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">T11N</td> <td style="padding: 0 5px;">T11N</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S25</td> <td style="padding: 0 5px;">R2W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S36</td> <td style="padding: 0 5px;">S30</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R3W</td> <td></td> </tr> </table>	T11N	T11N	S25	R2W	S36	S30	R3W	
T11N	T11N								
S25	R2W								
S36	S30								
R3W									
	1933								
	No bearing trees available.								
	Continue line and measurement.								
40.10	(Midpoint in latitude) Set an iron post, 3 ft. long, 1 in. in diam., 23 ins. in ground to bedrock, and in a mound of stone to top, for reestablished $\frac{1}{4}$ sec. cor. of sec. 30, with brass cap marked								
	$\frac{1}{4}$ S30								
	1938								
	No bearing trees available.								
	Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.								
46.43	(39.07 chs. N. 0° 06' E. from cor. of secs. 25 and 36) Intersect the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is an iron post, 1 in. in diam., projecting 30 ins. above ground, firmly set in ground and mound of stone and marked on brass cap as described in the official record.								
	Alter this cor. monument to refer to the quarters of sec. 25 only by changing marking on brass cap to read								
	$\frac{1}{4}$ S25								
	1933								
	No bearing trees available.								
	Thence								
	N. 6° 28' E., on true line, continuing measurement of W. bdy. of sec. 30.								
80.42	Intersect the subdivision line bet. secs. 19 and 30 surveyed due West. Closing cor. of said secs. established at this point as hereinafter described.								

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

Chains

From closing cor. of secs. 19 and 30,
N. 6° 28' E., on true line, on w. bdy. of sec. 19.

5.32 (39.31 chs. N. 6° 28' E. from $\frac{1}{4}$ sec. cor. of sec. 25)
Intersect the cor. of secs. 19, 24, 25 and 30, which is
an iron post, 2 ins. in diam., projecting 10 ins. above
ground, firmly set, properly marked on brass cap and
witnessed by three properly marked juniper bearing trees,
N. 18° E., 57 lks.; S. 71° E., 241 lks. and S. 81 $\frac{1}{4}$ ° W.,
58 lks. dist.

Alter this cor. monument to refer to secs. 24 and 25 only
by changing marking on the brass cap to read

T11N	T11N
S24	R2W
S25	S19
R3W	

1933

Obliterate the marking on the bearing trees NE. and
SE. of cor.

No bearing tree available NW. of cor.

Continue line and measurement.

40.19 (Midpoint) Set an iron post, 3 ft. long, 1 in. in diam.,
22 ins. in ground to bedrock, and in a mound of stone
to top, for reestablished $\frac{1}{4}$ sec. cor. of sec. 19, with
brass cap marked

| $\frac{1}{4}$ S19

1938

from which

A juniper, 4 ins. diam., bears N. 69 $\frac{1}{2}$ ° E., 17 lks.
dist., marked $\frac{1}{4}$ S19 BT.

A juniper, 4 ins. diam., bears S. 43 $\frac{3}{4}$ ° E., 153 lks.
dist., marked $\frac{1}{4}$ S19 BT.

44.63 (39.31 chs. N. 6° 28' E. from cor. of secs. 24 and 25)
Intersect the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which is an
iron post, 1 in. in diam., projecting 14 ins. above
ground, firmly set in ground and mound of stone, proper-
ly marked on brass cap and witnessed by two properly
marked juniper bearing trees; S. 38° W., 88 lks., and
N. 80 $\frac{3}{4}$ ° E., 60 lks. dist.

Alter this cor. monument to refer to the quarters of sec.
24 only by changing marking on brass cap to read

$\frac{1}{4}$ S24 |

1933

Obliterate the marking on the bearing tree NE. of cor.

No other bearing tree is available in sec. 24.

Continue line and measurement.

80.38 Intersect the subdivision line bet. secs. 18 and 19
surveyed due West. Closing cor. of said secs. estab-
lished at this point as hereinafter described.

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

BOOK 4198

8.

Chains	<p>From closing cor. of secs. 18 and 19.</p> <p>N. 6° 28' E., on true line, on W. bdy. of sec. 18.</p> <p>3.56 (39.31 chs. N. 6° 28' E. from $\frac{1}{4}$ sec. cor. of sec. 24) Intersect the cor. of secs. 13, 18, 19 and 24, which is an iron post, 2 ins. in diam., projecting 22 ins. above ground, firmly set in ground and mound of stone and marked on brass cap as described in the official record</p> <p>Alter this cor. monument to refer to secs. 13 and 24 only by changing marking on brass cap to read</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T11N</td> <td>T11N</td> </tr> <tr> <td>S13</td> <td>R2W</td> </tr> <tr> <td>S24</td> <td>S18</td> </tr> <tr> <td>R3W</td> <td></td> </tr> </table> <p style="text-align: center;">1925</p> <p>No bearing trees available.</p> <p>Thence</p> <p>N. 1° 19' E., on true line, continuing measurement of W. bdy. of sec. 18.</p> <p>40.02 (Midpoint in latitude) Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, with a stone 2x4x10 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for reestablished $\frac{1}{4}$ sec. cor. of sec. 18 with brass cap marked</p> <p style="text-align: center;"> $\frac{1}{4}$ S18</p> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>43.24 (39.68 chs. N. 1° 19' E. from cor. of secs. 13 and 24) Intersect the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, which is an iron post, 1 in. in diam., projecting 30 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap and witnessed by two properly marked juniper bearing trees, N. 88° W., 244 lks., and S. 69° E., 165 lks. dist.</p> <p>Alter this cor. monument to refer to the quarters of sec. 13 only by changing the marking on the brass cap to read</p> <p style="text-align: center;">$\frac{1}{4}$ S13</p> <p style="text-align: center;">1938</p> <p>Obliterate the marking on the bearing tree SE. of cor.</p> <p>No other bearing tree available in sec. 13.</p> <p>Continue line and measurement.</p> <p>80.02 Intersect the subdivision line bet. secs. 7 and 18 surveyed due West. Closing cor. of said secs. established at this point as hereinafter described.</p>	T11N	T11N	S13	R2W	S24	S18	R3W	
T11N	T11N								
S13	R2W								
S24	S18								
R3W									

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

BOOK 4198

9.

Chains

From closing cor. of secs. 7 and 18,

N. $1^{\circ} 19'$ E., on true line, on W. bdy, of sec. 7.

2.60

Intersect the witness cor. to cor. of secs. 7, 12, 13 and 18, which is an iron post, 2 ins. in diam., projecting 24 ins. above ground, firmly set in ground and mound of stone and marked on brass cap as described in the official record

Alter this witness cor. monument to witness the true point for cor. of secs. 12 and 13 only (0.30 chs. S. $1^{\circ} 19'$ W. therefrom) by changing marking on brass cap to read

WC	
T11N	T11N
S12	R2W
S13	S 7
R3W	

1925

No bearing trees available.

2.90

(39.68 chs. N. $1^{\circ} 19'$ E. from $\frac{1}{4}$ sec. cor. of sec. 13) Intersect true point for cor. of secs. 12 and 13, in bottom of gulch, course E.

Continue line and measurement.

40.03

Set an iron post, 3 ft. long, 1 in. in diam., on exposed bedrock, and in a mound of stone to top, for witness cor. to reestablished $\frac{1}{4}$ sec. cor. of sec. 7 with brass cap marked

W C	
	$\frac{1}{4}$ S7

1938

from which

A juniper, 4 ins. diam., bears N. $31\frac{1}{2}^{\circ}$ E., 198 lks. dist., marked WC $\frac{1}{4}$ S7 BT.

A juniper, 5 ins. diam., bears S. $79\frac{1}{2}^{\circ}$ E., 211 lks. dist., marked WC $\frac{1}{4}$ S7 BT.

40.08

(Midpoint) True point for reestablishment of $\frac{1}{4}$ sec. cor. of sec. 7, falls on sloping ledge where it is impracticable to monument the cor., therefore establish witness cor. 5 lks. S. $1^{\circ} 19'$ W..

42.58

(39.68 chs. N. $1^{\circ} 19'$ E. from point for cor. of secs. 12 and 13) Intersect the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which is an iron post, 1 in. in diam., projecting 9 ins. above ground, firmly set, properly marked on brass cap, and witnessed by two properly marked juniper bearing trees, S. 17° W., 257 lks. and N. $61\frac{1}{2}^{\circ}$ W., 403 lks. dist.

Alter this cor. monument to refer to the quarters of sec. 12 only by changing the marking on the brass cap to read

$\frac{1}{4}$ S12	
-------------------	--

1938

No change in the accessories is required.

Continue line and measurement.

BOOK 4198

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

Chains

80.16

Intersect the subdivision line bet. secs. 6 and 7 surveyed due West. Closing cor. of said sees. established at this point as hereinafter described.

From closing cor. or secs. 6 and 7.

N. 1° 19' E., on true line, on W. bdy. of sec. 6.

2.10

(39.68 chs. N. 1° 19' E. from $\frac{1}{4}$ sec. cor. of sec. 12) intersect the cor. of secs. 1, 6, 7 and 12, which is an iron post, 2 ins. in diam., projecting 8 ins. above ground, firmly set, properly marked on brass cap, and witnessed by a mound of stone W. of cor., and one properly marked juniper bearing tree S. 13 $\frac{1}{2}$ ° W., 608 lks. dist.

Alter this cor. monument to refer to secs. 1 and 12 only by changing the marking on brass cap to read

T11N		T11N
S1		R2W
S12		S6
R3W		

1925

No change in the accessories is required.

Continue line and measurement.

40.01

(40.00 chs. in latitude). Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for reestablished $\frac{1}{4}$ sec. cor. of sec. 6, with brass cap marked

| $\frac{1}{4}$ S6

1938

from which

A pinyon, 5 ins. diam., bears N. 23 $\frac{3}{4}$ ° E., 76 lks. dist., marked $\frac{1}{4}$ S6 BT.

A pinyon, 14 ins. diam., bears S. 81 $\frac{1}{4}$ ° E., 55 lks. dist., marked $\frac{1}{4}$ S6 BT.

41.78

(39.68 chs. N. 1° 19' E. from cor. of secs. 1 and 12) intersect the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which is an iron post, 1 in. in diam., projecting 18 ins. above ground, firmly set in ground and mound of stone, properly marked on brass cap, and witnessed by two properly marked juniper bearing trees, N. 17° W., 53 lks., and S. 25° E., 40 lks. dist.

Alter this cor. monument to refer to the quarters of sec. 1 only by changing the marking on the brass cap to read

$\frac{1}{4}$ S1 |

1938

Obliterate the marking on the bearing tree SE. of cor. and establish new bearing tree:

A pinyon, 5 ins. diam., bears S. 56° W., 155 lks. dist., marked $\frac{1}{4}$ S1 BT.

Continue line and measurement.

Resurvey: West boundary of T. 11 N., R. 2 W. and
East boundary of T. 11 N., R. 3 W.

4000 4100

Chains

81.46

(39.68 chs. N. 1° 19' E. from $\frac{1}{4}$ sec. cor. of sec. 1)
Intersect the cor. of Ts. 11 and 12 N., Rs. 2 and 3 W.,
which is an iron post, 3 ins. in diam., projecting 12
ins. above ground, firmly set, properly marked on brass
cap, and witnessed by mound of stone S. of cor. No
bearing trees.

BOOK 4198

Survey: South boundary of T. 11 N., R. 2 W. and
North boundary of T. 10 N., R. 2 W.

12

Chains

From the cor. of T. 10 N., R. 2 W. only (NE. cor.)

West, on random line, setting temp. $\frac{1}{4}$ sec. and sec. cors. alternately, at 40 ch. intervals, for reference to areas in T. 10 N., R. 2 W., only, and at

477.32

Intersect the E. bdy. of T. 10 N., R. 3 W.

Set an iron post, 3 ft. long, 3 ins. in diam., 27 ins. in ground, for closing cor. of Ts. 10 and 11 N., R. 2 W., with brass cap marked

T10N	T11N	
R3W	S31	CC
S1	S 6	
	R2W	

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 3 ft. high, E. of cor.

From the point of intersection the cor. of Ts. 10 and 11 N., R. 3 W., described in field notes of survey of T. 10 N., R. 2 W., this group, bears N. $0^{\circ} 03' W.$, 7.93 chs. dist., and a barbed wire fence (4 wire) bearing E. and W., bears N., 3.53 chs. dist.

From closing cor. of Ts. 10 and 11 N., R. 2 W.,

East, on S. bdy. of sec. 31.

Over nearly level land, thru scattering timber and undergrowth.

5.60 Road, bears N. and S.

15.45 Road, bears N. $80^{\circ} E.$ and S. $80^{\circ} W.$

21.30 Cut wash, course S. $30^{\circ} E.$; enter gently rolling land; asc. 12 ft. over SW. slope.

25.50 Enter rolling land; desc. 28 ft. over SE. slope.

31.18 Draw, course SE.; asc. 8 ft. over SW. slope.

36.10 Desc. 9 ft. over SE. slope to

37.32 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, a glass bottle deposited at base, for $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap marked

$\frac{1}{4}$ S6

1938

No bearing trees available.

Raise a mound of stone, 3 ft. high, 3 ft. base, S. of cor.

Desc. 24 ft. over SE. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground with a glass bottle deposited at base, for $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap marked

Chains

4 S31

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 20 ft. over E. slope.

44.50 Wash, course S. 30° E.; asc. 25 ft. over SW. slope.

47.70 Desc. 57 ft. over SE. slope.

51.67 Fence, bears N. and S.

55.20 Blind Indian Creek (dry) 50 lks. wide, course S. 30° W.; asc. 90 ft. over NW. and N. slopes

59.20 Old adobe house, bears S., 1.20 chs. dist.

61.90 Barbed wire fence, bears N. and S.; turns to N. 70° W. at about 2 chs. N. of this point.

64.45 Cellar Springs Creek, 40 lks. wide, containing a small stream of running water, course NW. Asc. 52 ft. over NW. slope to

77.32 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 5 and 6, with brass cap marked

T11N R2W	
S31	
S6	S5
T10N	R2W

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

Asc. 24 ft. over NW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 31 and 32, with brass cap marked

T11N R2W	
S31	S32
S 5	
T10N	R2W

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, nearly level, gently rolling and rolling.
 Soil, rocky, 4th rate.
 Timber, oak, juniper and cottonwood.
 Undergrowth, oakbrush and catclaw.

Survey: South boundary of T. 11 N., R. 2 W. and North boundary of T. 10 N., R. 2 W.

14


Chains									
	East, on S. bdy. of sec. 32.								
	Over mountainous land, thru scattering timber and undergrowth.								
	Asc. 56 ft. over NW. slope								
6.65	Desc. 20 ft. over N. slope.								
14.40	Asc. 242 ft. over NW. slope to								
35.10	Asc. 16 ft. over N. slope to								
37.32	(40.00 chs. E. from cor. of secs. 5 and 6) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 5 only, with brass cap marked								
	$\frac{1}{4}$ S5								
	1938								
	No bearing trees available.								
	Raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.								
39.00	Asc. 10 ft. over N. slope. Spur, slopes S. 80° W. from E.; asc. 14 ft. along top of spur to								
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock, with a stone 8x12x12 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec 32 only, with brass cap marked								
	$\frac{1}{4}$ S32								
	1938								
	No bearing trees available.								
45.60	Ridge, bears N. and S. At 2 chs. N. this ridge turns to NE.; desc. 72 ft. over E. slope.								
47.75	U.S.F.S. trail, bears N. 80° W. and S. 80° E.								
51.20	Bottom of ravine, course S. 20° W.; asc. 403 ft. over W. slope to								
77.00	Ridge, bears N. 20° E. and S. 20° W. Peak in same bears NE. 2 chs. dist. Desc. slightly over SE. slope to								
77.32	(80.00 chs. E. from cor. of secs. 5 and 6) Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock with a stone, 1x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 4 and 5, with brass cap marked								
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td colspan="2" style="text-align: center;">S32</td> </tr> <tr> <td>S5</td> <td>S4</td> </tr> <tr> <td>T10N</td> <td>R2W</td> </tr> </table>	T11N	R2W	S32		S5	S4	T10N	R2W
T11N	R2W								
S32									
S5	S4								
T10N	R2W								
	1938								
	No bearing trees available.								
	Desc. 42 ft. over SE. slope to								

Survey: South boundary of T. 11 N., R. 2 W. and
North boundary of T. 10 N., R. 2 W.

Block 4198

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock with a stone 2x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 32 and 33, with brass cap marked



1938

No bearing trees available.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper and oak.
Undergrowth, oakbrush, catclaw and buckbrush.

East, on S. bdy. of sec. 33.

Over mountainous land, thru scattering timber and undergrowth.

Desc. 362 ft. over steep SE. slope to

15.10 Foot of steep slope bears NE. and SW. Thence over gently rolling land on N. edge of Cellar Basin. Desc. 27 ft. over SE. slope.

25.80 Thence along S. slope, ascending 30 ft. to

37.32 (40.00 chs. E. from cor. of secs. 4 and 5)
Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 4 only, with brass cap marked




1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, S. of cor.

Desc. slightly over S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap marked



1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Continue over gently rolling land at N. edge of Cellar Basin. Desc. 18 ft. over SE. slope.

48.70 Wash, course S. 60° W.; heads about 5 chs. NE.; asc. 50 ft. over SW. slope.

Survey: South boundary of T. 11 N., R. 2 W. and
North boundary of T. 10 N., R. 2 W.

16

Chains									
57.40	Road, bears N. and S.								
58.57	Desc. 36 ft. over S. slope.								
72.00	Asc. 12 ft. over SW. slope to								
77.32	(80.00 chs. E. from cor. of secs. 4 and 5) Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 3 and 4, with brass cap marked								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td colspan="2" style="text-align: center;">S33</td> </tr> <tr> <td>S4</td> <td>S3</td> </tr> <tr> <td>T10N</td> <td>R2W</td> </tr> </table> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.</p> <p>Asc. gradually over SW. slope to</p>	T11N	R2W	S33		S4	S3	T10N	R2W
T11N	R2W								
S33									
S4	S3								
T10N	R2W								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 33 and 34, with brass cap marked								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> <tr> <td colspan="2" style="text-align: center;">S3</td> </tr> <tr> <td>T10N</td> <td>R2W</td> </tr> </table> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <p>Land, mountainous and gently rolling. Soil, rocky, 4th rate. Timber, juniper. Undergrowth, oakbrush and catclaw.</p>	T11N	R2W	S33	S34	S3		T10N	R2W
T11N	R2W								
S33	S34								
S3									
T10N	R2W								
	<p>East, on true line, on S. bdy. of sec. 34.</p> <p>Over gently rolling land, thru scattering timber and under- growth.</p> <p>Across N. edge of Cellar Basin. Asc. 20 ft. over SW. slope.</p>								
15.10	Low ridge, bears NW. and SE. Drainage divide bet. Cellar Spring and Blind Indian Creeks. Leave Cellar Basin. Desc. 33 ft. over NE. slope.								
27.30	Draw, course N. 40° W. Asc. 26 ft. over NW. slope to								
37.32	(40.00 chs. E. from cor. of secs. 3 and 4) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for ¼ sec. cor. of sec. 3 only, with brass cap marked								
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>¼ S3</td> </tr> </table> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p>	¼ S3							
¼ S3									

Survey: South boundary of T. 11 N., R. 2 W. and
 North boundary of T. 10 N., R. 2 W.

8009 9198

Chains

. A pinyon, 3 ins. diam., bears S. $53\frac{3}{4}^{\circ}$ E., 325 lks. dist., marked BT. only.

A pinyon, 4 ins. diam., bears S. $42\frac{3}{4}^{\circ}$ W., 516 lks. dist., marked $\frac{1}{4}$ S3 BT.

Asc. 7 ft. over NW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 34 only, with brass cap marked

$\frac{1}{4}$ S34

1938

from which

A pinyon, 3 ins. diam., bears N. $31\frac{1}{4}^{\circ}$ E., 175 lks. dist., marked BT. only.

A juniper, 5 ins. diam., bears N. $58\frac{3}{4}^{\circ}$ W., 413 lks. dist., marked $\frac{1}{4}$ S34 BT.

Asc. 13 ft. over NW. slope.

47.50 Desc. 18 ft. over NE. slope.

56.30 Draw, course N. 30° W. Leave gently rolling and enter mountainous land; asc. 179 ft. over W. slope.

60.15 Barbed wire fence, bears N. and S.

70.00 Spur, slopes N. 30° W.; desc. 37 ft. over NE. slope to

77.32 (80.00 chs. E. from cor. of secs. 3 and 4)
 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 2 and 3, with brass cap marked

T11N	R2W
S34	
S3	S2
T10N	R2W

1938

No bearing trees available.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

Desc. 15 ft. over NE. slope.

78.90 Draw, course NW.; asc. 62 ft. over SW. slope.

79.50 Spur, slopes NW.; desc. 8 ft. over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 34 and 35, with brass cap marked

T11N	R2W
S34 S35	
S2	
T10N	R2W

1938

No bearing trees available.

Survey: South boundary of T. 11 N., R. 2 W. and
North boundary of T. 10 N., R. 2 W.

18

Chains	
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Land, gently rolling and mountainous. Soil, rocky, 3rd and 4th rates. Timber, oak, juniper and pinyon. Undergrowth, oakbrush, buckbrush, catclaw and cacti.</p>
	<p>East, on S. bdy. of sec. 35.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 40 ft. over NE. slope.</p>
3.80	Draw, course N. 20° W.; asc. 74 ft. over W. slope.
6.20	Point of spur, slopes NW.; desc. 133 ft. over NE. slope.
30.20	Draw, course N. 80° W.; asc. 250 ft. over SW. slope.
36.70	Spur, slopes N. 60° W.; desc. 16 ft. over NE. slope to
37.32	<p>(40.00 chs. E. from cor. of secs. 2 and 3) Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 2 only, with brass cap marked</p> <p style="text-align: center;"><u>$\frac{1}{4}$ S2</u></p> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 2½ ft. base, 2 ft. high, S. of cor.</p> <p>Desc. 40 ft. over NE. slope to</p>
40.00	<p>Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap marked</p> <p style="text-align: center;"><u>$\frac{1}{4}$ S35</u></p> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.</p> <p>Desc. 93 ft. over NE. slope.</p>
48.10	Draw, course N. 70° W.; asc. 185 ft. over SW. slope.
53.50	Spur, slopes N. 65° W.; desc. 97 ft. over NE. slope.
62.10	Draw, course NW.; asc. 225 ft. over W. slope.
69.20	Spur, slopes N.; desc. 92 ft. over E. slope.
73.90	Draw, course N. 30° W.; asc. 122 ft. over SW. slope to
77.32	<p>(80.00 chs. E. from cor. of secs. 2 and 3) Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 1 and 2, with brass cap marked</p>

Survey: South boundary of T. 11 N., R. 2 W. and
 North boundary of T. 10 N., R. 2 W.

1938

Chains

T11N R2W
S35
 S2 | S1
 T10N | R2W

.1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Asc. 20 ft. over SW. slope to

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in ground to bedrock with a stone 2x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 35 and 36, with brass cap marked

T11N R2W
S35 | S36
 S1
 T10N R2W

1938

No bearing trees available.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, juniper.
 Undergrowth, oakbrush, laurel and catclaw.

East, on S. bdy. of sec. 36.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 430 ft. over SW. and S. slopes to

23.75

Spur, slopes N. 80° W.; asc. 220 ft. over N. slope.

37.10

Head of ravine, course N. 80° W.; asc. 5 ft. over SW. slope to

37.32

(40.00 chs. E. from cor. of secs. 1 and 2)
 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for 1/4 sec. cor. of sec. 1 only, with brass cap marked

1/4 S 1

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Asc. 52 ft. over SW. slope to

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for 1/4 sec. cor. of sec. 36 only, with brass cap marked

1/4 S 36

1938

BOOK 4198

Survey: South boundary of T. 11 N., R. 2 W. and
North boundary of T. 10 N., R. 2 W.

20

Chains	
	<p>No bearing trees available.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Asc. 457 ft. over SW. slope.</p>
55.55	Spur, slopes N. 30° W.; desc. 322 ft. over NE. slope.
72.90	Bottom of ravine, course N. 30° W.; asc. 165 ft. over W. slope to
77.32	<p>(80.00 chs. E. from cor. of secs. 1 and 2)</p> <p>Intersect the cor. of T. 10 N., R. 2 W. only (NE. cor.) established under this group due North from original cor. of secs. 13, 18, 19 and 24, Ts. 10 N., Rs. 1 and 2 W., and theoretically due West from cor. of Ts. 10 and 11 N., Rs. 1 E. and 1 W. on the Gila and Salt River Meridian, as described in notes of survey and resurvey of E. bdy. of T. 10 N., R. 2 W., incorporated with field notes of survey and resurvey of subdivision of T. 10 N., R. 2 W.</p> <p>Asc. 65 ft. over W. slope to</p>
80.00	<p>Set an iron post, 3 ft. long, 3 ins. in diam., 27 ins. in ground, for cor. of T. 11 N., R. 2 W. only, (SE. cor.) with brass cap marked</p> <div style="text-align: center;"> <p>T11N R2W S36 </p> <p>1938</p> <p>from which</p> <p>A juniper, 3 ins. diam., bears N. 72½° W., 26 lks. dist., marked BT. only.</p> <p>An oak, 3½ ins. diam., bears N. 32½° W., 36 lks. dist., marked T11N R2W S36 BT.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pine and oak. Undergrowth, oakbrush, manzanita, laurel, buckbrush and catclaw.</p> </div>

Survey: East boundary of T. 11 N., R. 2 W.

Chains	<p>From the cor. of T. 11 N., R. 2 W. only (SE. cor.) here- inbefore described.</p> <p>North, bet. secs. 31 and 36.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 58 ft. over W. slope to</p> <p>21.20 Spur, slopes N. 10° W.; desc. 222 ft. over NE. and E. slopes to</p> <p>35.73 Same spur, slopes N. 30° E.; desc. 110 ft. over NW. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">S 36 S31 1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.</p> <p>Desc. 180 ft. over NW. slope to</p> <p>53.25 Head of ravine, course NW.; asc. 28 ft. over SW. slope.</p> <p>56.70 Same spur, slopes N. 30° W.; desc. 484 ft. over NE. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock with a stone 2x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 25, 30, 31 and 36, with brass cap marked</p> <p style="text-align: center;">T11N R2W RLW S25 S30 S36 S31 1938</p> <p>No bearing trees available.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, pine, oak and juniper. Undergrowth, oakbrush, manzanita, mahogany and laurel.</p>
	<p>North, bet. secs. 25 and 30.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 40 ft. over NE. slope.</p> <p>3.40 Wash, 20 lks. wide, in bottom of ravine, course N. 30° W.; asc. 94 ft. over SW. slope.</p> <p>16.98 Point of spur, slopes N. 60° W.; desc. 151 ft. over NW. slope.</p>

Survey: East boundary of T. 11 N., R. 2 W.

22

Chains	
36.52	Wash, 8 lks. wide, in bottom of ravine, course W.; asc. 62 ft. over S. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 1x3x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S25 S30 1938
	No bearing trees available.
	Asc. 134 ft. over S. slope.
46.65	Ridge, bears E. and W.; desc. 260 ft. over NW. slope.
62.30	Wash, 4 lks. wide, course W.; asc. 114 ft. over S. slope.
67.52	Spur, slopes W.; desc. 96 ft. over N. slope.
70.48	Wash, 4 lks. wide, course W.; asc. 56 ft. over SW. slope.
74.03	Spurs sloping W. and NW., from E.; desc. 213 ft. over NE. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap marked
	T11N R2W R1W S24 S19 S25 S30 1938
	No bearing trees available.
	Land, mountainous. Soil, rocky, 4th rate. Timber, oak, juniper and pinyon. Undergrowth, oakbrush, laurel, catclaw, mahogany and buck-brush.
	North, bet. secs. 19 and 24.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Desc. 124 ft. over NE. slope.
5.45	Wash, 10 lks. wide, course W. for 4 chs., thence NW.; asc. 112 ft. over S. slope.
9.29	Spur, slopes W.; desc. 360 ft. over N. slope.
9.50	Barbed wire fence (4 wire) bears N. 70° W. and S. 70° E.
19.80	Blind Indian Creek (dry) 40 lks. wide, course NW.; asc. 260 ft. over S. slope.
30.18	Point of spur, slopes SW.; desc. 44 ft. over NW. slope.

Chains

- 33.57 Wash, 5 lks. wide, course SW.; asc. 349 ft. over steep SW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (+) chiseled on exposed bedrock and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
S24 | S19
1938
- No bearing trees available.
- Asc. 86 ft. over SW. slope.
- 48.08 Spur, slopes W.; desc. 183 ft. over steep NW. slope.
- 54.34 Wash, 4 lks. wide, course W.; asc. 46 ft. over S. slope.
- 56.14 Spur, slopes W.; desc. 32 ft. over N. slope.
- 58.59 Wash, 6 lks. wide, course W.; asc. 26 ft. over S. slope.
- 60.34 Spur, slopes W.; desc. 46 ft. over N. slope.
- 70.31 Wash, 5 lks. wide, course W.; asc. 40 ft. over S. slope.
- 72.83 Spur, slopes W.; desc. 90 ft. over N. slope.
- 79.62 Wash, 12 lks. wide, course SW.; asc. 11 ft. over SE. slope to

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in ground to bedrock, and in a mound of stone to top, for cor. of secs. 13, 18, 19 and 24, with brass cap marked

T11N	
R2W	R1W
S13	S18
S24	S19

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.
Soil, rocky, 4th rate.
Timber, juniper, pinyon, oak and cottonwood.
Undergrowth, oakbrush, laurel, mahogany, catclaw and buckbrush.

- North, bet. secs. 13 and 18.
- Over mountainous land, thru scattering timber and dense undergrowth.
- Asc. 25 ft. over SE. slope to
- 1.50 Wash, 10 lks. wide, course SE.; asc. 80 ft. over SW. slope to
- 6.25 Same wash, course SW. from N. 30° W.; joined at this point

Survey: East boundary of T. 11 N., R. 2 W.

24

Chains	by another wash from NE. Asc. 409 ft. over rolling SW. slope to $\frac{1}{4}$ sec. cor.
14.44	U.S. Forest Service trail, bears NW. and SE.
39.13	Barbed wire fence (4 wire) bears NE. and SW.
40.00	Set an iron post, $\frac{3}{4}$ ft. long, 1 in. in diam., 16 ins. in ground to bedrock, with a stone 6x8x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S13 S18 1938
	No bearing trees available.
	Asc. 54 ft. over SW. slope.
48.25	Ridge, bears E. and W. Saddle bears W., 12 chs. dist.; desc. 105 ft. over N. slope.
59.00	Wash, 4 lks. wide, course W.; asc. 110 ft. over S. slope.
64.31	Spur, slopes W.; desc. 69 ft. over N. slope.
66.36	Wash, 6 lks. wide, course W.; asc. 89 ft. over S. slope.
71.48	Point of spur, slopes W.; desc. 72 ft. over NW. slope.
77.21	Wash, 5 lks. wide, course SW.; asc. 97 ft. over S. slope to
80.00	Set an iron post, $\frac{3}{4}$ ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 7, 12, 13 and 18, with brass cap marked
	T11N R2W R1W S12 S7 S13 S18 1938
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
	Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, juniper and pinyon. Undergrowth, oakbrush, laurel, catclaw, buckbrush and mahogany.
	North, bet. secs. 7 and 12.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 36 ft. over S. slope.
4.56	Spur, slopes SW.; desc. 41 ft. over NW. slope.
20.23	Wash, 5 lks. wide, course S. 30° W.; asc. 120 ft. over SE. slope.

Chains

30.74 Spur, slopes SW.; desc. 120 ft. over NW. slope to $\frac{1}{4}$ sec. cor.

35.57 Barbed wire fence (4 wire) bears S. $82\frac{1}{2}^{\circ}$ E. and N. $82\frac{1}{2}^{\circ}$ W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S12 | S7

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Desc. 51 ft. over NW. slope.

49.89 Wash, course SW.; asc. 477 ft. over S. slope.

71.44 Spur, slopes SW.; desc. 55 ft. over NW. slope.

76.74 Wash, course SW.; asc. 94 ft. over SE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 1, 6, 7 and 12, with brass cap marked

T11N

R2W	R1W
S1	S6
S12	S7

1938

No bearing trees available.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper and pinyon.

Undergrowth, oakbrush, mahogany, laurel, catclaw, buckbrush and manzanita.

North, bet. secs. 1 and 6.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 112 ft. over SE. slope.

3.84 Dim trail, bears SE. and W.

5.01 Ridge, bears E. and W. At about 4 chs. W. turns to SW. U.S. Forest Service tower on Tower Mountain, bears S. $24^{\circ} 14'$ E. U.S.F.S. tower on Mt. Union, bears N. $4^{\circ} 25'$ E. Desc. 165 ft. over NW. slope.

14.73 Wash, course W.; asc. 194 ft. over SW. slope.

24.70 Spur, ridge, bearing W. and SE.; sloping W.; desc. 272 ft. over N. slope to

Chains				
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked			
	4			
	S1 S6			
	1938			
	No bearing trees available.			
	Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.			
	Desc. 94 ft. over N. slope.			
43.52	Wash, course NW: for about 2 chs., thence W.; asc. 93 ft. over S. slope.			
51.51	Spur, slopes W.; desc. 122 ft. over N. slope.			
57.63	Wash, course W.; asc. 44 ft. over S. slope.			
61.79	Point of spur, slopes SW.; desc. 29 ft. over NW. slope.			
64.05	Wash, course SW.; asc. 182 ft. over SE. slope to			
80.00	Set an iron post, 3 ft. long, 3 ins. in diam., 27 ins. in ground, for cor. of T. 11 N.; R. 2 W.; only (NE. cor.) with brass cap marked			
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td style="padding: 2px;">T 11 N</td></tr> <tr><td style="padding: 2px;">R 2 W</td></tr> <tr><td style="padding: 2px;">S 1</td></tr> </table>	T 11 N	R 2 W	S 1
T 11 N				
R 2 W				
S 1				
	1938			
	No bearing trees available.			
	Raise a mound of stone, 3 ft. base, 2 ft. high, SW. of cor.			
	Land, mountainous.			
	Soil, rocky, 3rd and 4th rates:			
	Timber, juniper, pinyon and cottonwood.			
	Undergrowth, oakbrush, laurel, manzanita, catclaw, buckbrush and mahogany.			

Survey: North Boundary of T. 11 N., R. 2 W.

BOOK 4198

Chains

From the cor. of T. 11 N., R. 2 W. only (NE. cor.)

West, on random line, setting temp. $\frac{1}{4}$ sec. and sec. cors. alternately, at 40 ch. intervals, and at 460.80 chs. intersect N. and S. line 143 lks. S. of the cor. of Ts. 11 and 12 N., Rs. 2 and 3 W., hereinbefore described.

Thence

S. $89^{\circ} 49'$ E., on true line, bet. secs. 6 and 31.

Over rolling and mountainous land, thru scattering timber and undergrowth, nearly parallel to barbed wire fence (4 wire) about 20 lks. S. of line.

Asc. 178 ft. over SW. and W. slopes.

15.85 Fence cor. bears S. about 20 lks. dist. from which barbed wire fences extend W. and S. 52° E.

18.44 Spur, slopes SW.; desc. 52 ft. over E. slope to

20.80 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{S\ 31}{S\ 6}$

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 57 ft. over E. slope.

23.06 Wash, course S. 30° E.; asc. 34 ft. over SW. slope.

26.46 Point of spur, slopes S.; desc. 36 ft. over SE. slope.

31.00 Wash; course SW.; asc. 167 ft. over NW. slope.

41.60 Spur, slopes S. $43\frac{1}{2}^{\circ}$ W.; fence cor. on line at this point from which barbed wire fences extend S. $43\frac{1}{2}^{\circ}$ W., N. $43\frac{1}{2}^{\circ}$ E. & S. 30° E.; desc. 194 ft. over SE. slope.

55.90 Wash, course SW.; asc. 166 ft. over W. slope.

58.11 Spur, slopes S.; desc. 71 ft. over E. slope to

60.80 Set an iron post, 3 ft. long, 2 ins. in diam., 24 ins. in ground to bedrock, and in a small mound of stone on top, for cor. of secs. 5, 6, 31 and 32, with brass cap marked

T12N	R2W
S31	S32
S6	S5
T11N	

1938

from which

A juniper, 14 ins. diam., bears N. 33° E., 23 lks. dist., marked T12N R2W S32 BT.

A pinyon, 10 ins. diam., bears S. $26\frac{1}{2}^{\circ}$ E., 117 lks. dist., marked T11N R2W S5 BT.

A pinyon, 8 ins. diam., bears N. 17° W., 63 lks. dist., marked T12N R2W S31 BT.

Chains									
	No other bearing tree available.								
	Land, rolling and mountainous. Soil, rocky, 4th rate. Timber, juniper and pinyon. Undergrowth, oakbrush, laurel, catclaw, buckbrush and el jerito.								
	S. 89° 49' E., on true line, bet. secs. 5 and 32. Over mountainous land, thru dense timber and undergrowth. Desc. 16 ft. over E. slope.								
0.50	Wash, course S. 30° E.; asc. 93 ft. over SW. slope.								
4.50	Spur, slopes S. 30° E.; desc. 297 ft. over E. slope.								
12.87	John Lange's ranch house, bears S. 63° 55' E.								
29.92	Wash, course S. 30° E.; asc. 80 ft. over W. slope.								
33.53	Spur, slopes S.; desc. 167 ft. over E. slope to $\frac{1}{4}$ sec. cor.								
33.69	John Lange's ranch house, bears S. 46° 45' E.								
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in ground to bedrock, and in a small mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked								
	$\frac{1}{4}$ $\frac{S\ 32}{S\ 5}$								
	1938								
	from which								
	A pinyon, 6 ins. diam., bears N. 13 $\frac{1}{4}$ ° E., 20 lks. dist., marked $\frac{1}{4}$ S32 BT.								
	A pinyon, 6 ins. diam., bears S. 74° E., 83 lks. dist., marked $\frac{1}{4}$ S5 BT.								
	Desc. 67 ft. over E. slope.								
53.10	Slate Creek (dry) 80 lks. wide, course S. 4 $\frac{1}{4}$ ° E.; asc. 45 ft. over SW. slope.								
58.30	Asc. 15 ft. over S. slope.								
65.14	Desc. 66 ft. over SE. slope.								
67.45	Wash, course SW.; asc. 255 ft. over broken NW. slope to								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 4, 5, 32 and 33, with brass cap marked								
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T12N</td> <td>R2W</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> <tr> <td>S 5</td> <td>S 4</td> </tr> <tr> <td colspan="2" style="text-align: center;">T11N</td> </tr> </table>	T12N	R2W	S32	S33	S 5	S 4	T11N	
T12N	R2W								
S32	S33								
S 5	S 4								
T11N									
	1938								
	from which								
	A pinyon, 6 ins. diam., bears N. 63° E., 40 lks. dist., marked T12N R2W S33 BT.								

Survey: North boundary of T. 11 N., R. 2 W.

BOOK 4133

Chains

- A pinyon, 6 ins. diam., bears S. 27° E., 54 lks. dist., marked T11N R2W S4 BT.
- A pinyon, 6 ins. diam., bears S. 68° W., 22 lks. dist., marked T11N R2W S5 BT.
- A pinyon, 10 ins. diam., bears N. 67° W., 81 lks. dist., marked T12N R2W S32 BT.

Land, mountainous.
 Soil, rocky, 4th rate.
 Timber, juniper, pinyon and cottonwood.
 Undergrowth, oakbrush, laurel, buckbrush, mahogany, catclaw and el jerito.

S. 89° 49' E., on true line, bet. secs. 4 and 33.

Over mountainous land, thru scattering timber and undergrowth.

Asc. 155 ft. over NW. slope.

8.15 Ridge, bears N. 30° E. and S. 30° W.; desc. 172 ft. over E. slope.

20.96 Wash, course S.; asc. 149 ft. over W. slope.

25.85 Barbed wire fence (4 wire) bears N. 10° E. and S. 10° W.

26.36 Spur, slopes S.; desc. 161 ft. over SE. slope.

39.10 Wash, course S. 30° W.; asc. 23 ft. over NW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{S \ 33}{S \ 4}$

1938

from which

A pinyon, 4 ins. diam., bears N. 23° E., 48 lks. dist., marked $\frac{1}{4}$ S33 BT.

A pinyon, 12 ins. diam., bears S. 12° W., 61 lks. dist., marked $\frac{1}{4}$ S4 BT.

Asc. 158 ft. over NW. slope.

48.85 Ridge, bears NE. and SW.; desc. 188 ft. over SE. slope.

64.73 Wash, course S.; asc. 202 ft. over NW. slope.

74.70 Spur slopes S. 30° W.; desc. 82 ft. over SE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 3, 4, 33 and 34, with brass cap marked

T12N	R2W
S33	S34
S 4	S 3
T11N	

1938

No bearing trees available.

Survey: North boundary of T. 11 N., R. 2 W.

30

Chains	<p>Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pinyon and cottonwood. Undergrowth, oakbrush, laurel, buckbrush, catclaw and mahogany.</p> <hr/> <p>S. 89° 49' E., on true line, bet. secs. 3 and 34. Over mountainous land, thru scattering timber and dense undergrowth. Desc. 115 ft. over SE. slope.</p> <p>5.85 Wash, 30 lks. wide, course SW.; asc. 330 ft. over NW. slope.</p> <p>27.21 Ridge, bears N. and SW.; desc. 206 ft. over SE. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock with a stone 2x10x12 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> <table border="0"> <tr> <td></td> <td>S</td> <td>34</td> <td></td> </tr> <tr> <td>$\frac{1}{4}$</td> <td></td> <td>S</td> <td>3</td> </tr> </table> <p>1938</p> </div> <p>No bearing trees available.</p> <p>Desc. 94 ft. over SE. slope.</p> <p>42.10 Ash Creek (dry) 30 lks. wide, course S. 15° E. from NE.; asc. 396 ft. over NW. slope.</p> <p>62.75 Ridge, bears NE. and SW.; asc. slightly to</p> <p>66.62 Spur, slopes S.; desc. 106 ft. over E. slope.</p> <p>71.70 Wash, course SE.; asc. 47 ft. over SW. slope.</p> <p>76.93 Spur, slopes S.; desc. 27 ft. over SE. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 2, 3, 34 and 35, with brass cap marked</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T12N.</td> <td>R2W</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> <tr> <td>S 3</td> <td>S. 2</td> </tr> <tr> <td colspan="2">T11N</td> </tr> </table> <p>1938</p> </div> <p>No bearing trees available.</p> <p>Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pinyon and cottonwood. Undergrowth, oakbrush, laurel, buckbrush, catclaw and mahogany.</p>		S	34		$\frac{1}{4}$		S	3	T12N.	R2W	S34	S35	S 3	S. 2	T11N	
	S	34															
$\frac{1}{4}$		S	3														
T12N.	R2W																
S34	S35																
S 3	S. 2																
T11N																	

Survey: North boundary of T. 11 N., R. 2 W.

BOOK 4188

31

Chains	<p>S. 89° 49' E., on true line, bet. secs. 2 and 35.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 100 ft. over SE. slope.</p> <p>6.53 Wash, course S.; asc. 250 ft. over W. slope.</p> <p>17.14 Spur, slopes S.; desc. 42 ft. over SE. slope.</p> <p>31.40 Wash, course SW.; asc. 95 ft. over NW. slope.</p> <p>34.32 Ridge, bears N. and S., turns to SW. at about 5 chs. S. of this point; desc. 99 ft. over SE. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> $\frac{1}{4} \begin{array}{r} S 35 \\ S 2 \end{array}$ <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.</p> <p>Desc. 15 ft. over SE. slope to</p> <p>42.10 Wash, course SE.; asc. slightly over SW. slope.</p> <p>45.88 Desc. 280 ft. over SE. slope to</p> <p>57.75 Wash, course SE.; asc. 121 ft. over SW. slope.</p> <p>65.46 Point of spur, slopes S.; desc. 95 ft. over SE. slope.</p> <p>71.10 Bottom of Crooks Canyon, 50 lks. wide, course SW.; asc. 286 ft. over W. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 1, 2, 35 and 36, with brass cap marked</p> $\begin{array}{c c} T12N & R2W \\ S35 & S36 \\ \hline S 2 & S 1 \\ T11N & \end{array}$ <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, 3 ft. base, 2$\frac{1}{2}$ ft. high, W. of cor.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pinyon and cottonwood. Undergrowth, oakbrush, laurel, buckbrush, mahogany and catclaw.</p>
	<p>S. 89° 49' E., on true line, bet. secs. 1 and 36.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p>

Survey: North boundary of T. 11 N., R. 2 W.

32

Chains	
	Asc. 63 ft. over W. slope.
2.65	Spur, slopes NW.; desc. 42 ft. over E. slope.
7.59	Wash, 30 lks. wide, course N. 15° W., asc. 394 ft. over W. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 11 ins. in ground to bedrock, with a stone 6x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S. 36}{S. 1}$
	1938
	No bearing trees available.
	Asc. 129 ft. over W. slope.
43.85	Improved mine trail, bears N. and S.
56.16	Spur, slopes S.; desc. 66 ft. over E. slope.
60.66	Wash, course S.; asc. 325 ft. over W. slope.
77.00	Spur, slopes S.; desc. 53 ft. over SE. slope to
80.00	The cor. of T. 11 N., R. 2 W. only (NE. cor.) hereinbefore described.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, pinyon, juniper and cottonwood.
	Undergrowth, oakbrush, laurel, buckbrush, mahogany and catclaw.

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4193

33

Chains

Commence the subdivision of T. 11 N., R. 2 W. at the cor. of secs. 35 and 36, on S. bdy. of the Tp., hereinbefore described.

Thence

N. 0° 01' W., bet. secs. 35 and 36.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 10 ft. over SW. slope.

1.90 Spur, slopes W.; desc. 107 ft. over N. slope.

7.50 Bottom of ravine, 5 lks. wide, course NW.; asc. 44 ft. over SW. slope.

15.70 Spur, slopes NW.; desc. 231 ft. over N. slope.

23.35 Bottom of ravine, course NW.; asc. 10 ft. over SW. slope.

25.00 Point of spur, slopes W.; desc. 79 ft. over NW. slope.

27.08 Bottom of ravine, course W.; asc. 211 ft. over S. slope.

32.50 Spur, slopes W.; desc. 168 ft. over NW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

4

S35 | S36

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Desc. 162 ft. over broken NW. slope.

47.90 Wash, 30 lks. wide, course SW. in bottom of canyon; asc. 492 ft. over SE. slope.

70.70 Spur ridge, bearing NE. and SW., sloping SW.; asc. 12 ft. over W. slope to

76.00 Head of spur, sloping W.; desc. 65 ft. over NW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock with a stone 2x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 25, 26, 35 and 36, with brass cap marked

T11N	R2W
S26	S25
S35	S36

1938

No bearing trees available.

Land, mountainous.

Soil, rocky, 3rd and 4th rates.

Timber, oak, pinyon and juniper.

Undergrowth, laurel, manzanita and mahogany.

Survey: Subdivision of T. 11 N., R. 2 W.

34

Chains	East, on random line, bet. secs. 25 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.96	Intersect E. bdy. of the Tp. 2 lks. S. of cor. of secs. 25, 30, 31 and 36, hereinbefore described.
	Thence
	S. 89° 59' W., on true line, bet. secs. 25 and 36.
	Over mountainous land; thru scattering timber and dense undergrowth.
	Asc. 260 ft. over NE. slope.
9.50	Spur, slopes N. 30° W.; desc. 500 ft. over W. slope.
30.50	Bottom of ravine, .8 lks. wide, course NW.; asc. 88 ft. over NE. slope.
37.78	Long spur, slopes NW.; desc. 18 ft. over SW. slope to
39.98	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 25}{S\ 36}$
	1938.
	No bearing trees available.
	Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.
	Desc. 5 ft. over SW. slope.
43.20	Head of ravine, course SW.; asc. 12 ft. over SE. slope.
45.10	Same spur, slopes SW.; desc. 263 ft. over NW. slope.
60.90	Bottom of gulch, course SW.; asc. 263 ft. over SE. slope.
75.90	Dim trail, bears NE. and SW.
76.00	Spur ridge, bears NE. and SW. sloping SW.; desc. 71 ft. over NW. slope to
79.96	Cor. of secs. 25, 26, 35 and 36.
	Land, mountainous.
	Soil, rocky, 3rd and 4th rates.
	Timber, oak, pinyon and juniper.
	Undergrowth, oakbrush, laurel and mahogany.
	N. 0° 01' W., bet. secs. 25 and 26.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Desc. 430 ft. over broken NW. slope.
1.74	Mike's Spring N. 72° W.
21.96	Bottom of ravine, 5 lks. wide, course N. 70° W.; asc. 164 ft. over S. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

35

Chains	
27.50	Spur, slopes W. Mike's Spring bears S. 42° W. Desc. 238 ft. over broken NW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S26 S25
	1938 from which
	A pinyon, .8 ins. diam., bears N. 22 $\frac{1}{2}$ ° E., 34 lks. dist., marked $\frac{1}{4}$ S25 BT.
	A pinyon, 5 ins. diam., bears S. 49 $\frac{1}{4}$ ° W., 23 lks. dist., marked $\frac{1}{4}$ S26 BT.
	Desc. 167 ft. over broken NW. slope.
47.10	Blind Indian Creek (dry) .25 lks. wide, course SW. from N. 8° E. in bottom of canyon. Asc. 30 ft. in bottom of canyon to
60.00	Leave bottom of canyon; asc. 173 ft. over S. slope.
65.20	Point of spur, slopes SE.; desc. 18 ft. over NE. slope.
69.00	Bottom of ravine, 4 lks. wide, course SE.; asc. 206 ft. over S. slope.
75.50	Spur, slopes SE.; desc. 56 ft. over NE. slope to
80.00	True point for cor. of secs. 23, 24, 25 and 26, falls in bottom of rocky ravine course SE. where it is impracticable to monument the cor.; therefore establish witness cor. 10 lks. N. 0° 01' W., as hereinafter described.
	Land, mountainous. Soil, rocky, 3rd and 4th rates. Timber, pinyon, juniper and oak. Undergrowth, mahogany, laurel, oak, manzanita and catclaw.
	N. 89° 59' E., on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	Intersect the E. bdy. of the Tp. 4 lks. N. of cor. of secs. 19, 24, 25 and 30, hereinbefore described.
	Thence
	N. 89° 59' W., on true line, bet. secs. 24 and 25.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 26 ft. over NE. slope.
1.25	Desc. 12 ft. over N. slope to
4.62	Spur, slopes NW.; desc. 312 ft. over broken W. and NW. slopes.
18.62	Bottom of ravine, 5 lks. wide, course SW.; asc. 168 ft. over SE. slope.

Survey: Subdivision of T. 11' N., R. 2 W.

36

Chains	<p>23.22 Spur, slopes SW.; desc. 386' ft. over NW. slope to</p> <p>39.96 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">$\frac{S\ 24}{S\ 25}$</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>An oak, 5 ins. diam., bears S. 41° W., 23 lks. dist., marked $\frac{1}{4}$ S25 BT.</p> <p>A pinyon, .3 ins. diam., bears N. 20° W., 60 lks. dist., marked BT only.</p> <p>Desc. 13 ft. over NW. slope..</p> <p>41.12 Blind Indian Creek (dry) 30 lks. wide, course SW.; asc. 175 ft. over SE. slope.</p> <p>61.62 Point of spur, slopes SW.; desc. 93 ft. over W. slope.</p> <p>65.02 Bottom of ravine, 4 lks. wide, course S.; asc. 102 ft. over SE. slope.</p> <p>69.82 Point of spur, slopes S.; desc. 86 ft. over SW. slope.</p> <p>74.02 Bottom of ravine, 5 lks. wide, course SE. from N.; asc. 130 ft. over SE. slope to</p> <p>79.92 True point for cor. of secs. 23, 24, 25 and 26, in bottom of ravine, course SE. (W.C. 0.10 chs. N. 0° 01' W.).</p> <p>Land, mountainous. Soil, rocky, 3rd and 4th rates. Timber, pinyon, juniper and oak. Undergrowth, mahogany, laurel, oakbrush and manzanita.</p> <hr/> <p>From true point for cor. of secs. 23, 24, 25 and 26, N. 0° 01' W., bet. secs. 23 and 24.</p> <p>Over mountainous land, thru scattering timber and undergrowth.</p> <p>Asc. 115 ft. over SE. slope.</p> <p>0.10 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for witness cor. to cor. of secs. 23, 24, 25 and 26, with brass cap marked</p> <p style="text-align: center;"> <table style="margin: auto;"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;">WC</td> </tr> </table> </p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A juniper, 7 ins. diam., bears N. 28$\frac{1}{4}$° E., 34 lks. dist., marked WC T11N R2W S24 BT.</p> <p>A pinyon, 12 ins. diam., bears S. 16$\frac{1}{4}$° E., 22 lks. dist., marked WC T11N R2W S25 BT.</p>	T11N	R2W	S23	S24	S26	S25	WC	
T11N	R2W								
S23	S24								
S26	S25								
WC									

Survey: Subdivision of T. 11 N., R. 2 W.

Chains	<p>A pinyon, 6 ins. diam., bears S. 15° W.; 34 lks. dist., marked WC T11N R2W S26 BT.</p> <p>A pinyon, 6 ins. diam., bears N. 50° W., 70 lks. dist., marked WC T11N R2W S23 BT.</p>
16.15	Pasture fence, bears NW. and SE., extends SE. to improved spring and stock tank in wash, at which point the fence turns to NE.
17.65	Spur, slopes SE.; desc. 90 ft. over NE. slope.
21.63	Wash, course SE.; asc. 276 ft. over SW. slope.
34.23	U.S. Forest Service trail, bears N. 80° E. and S. 87° W.
35.68	Ridge, bears E. and W.; general bearing is NE. and SW; U.S.F.S. barbed wire fence (4 wire) along top of this ridge. Desc. 46 ft. over N. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock with a stone 2x10x12 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	<p>4</p> <p>S23 S24</p> <p>1938</p>
	No bearing trees available.
	Desc. 128 ft. over N. slope.
47.78	Wash, 10 lks. wide, course W. from NE.; asc. 329 ft. over S. slope.
60.10	Spur, slopes S. 70° W.; desc. 290 ft. over N. slope.
73.65	Wash, 5 lks. wide, course W.; asc. 116 ft. over S. slope to
80.00	Spur, slopes W. Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock with a stone 3x8x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 13, 14, 23 and 24, with brass cap marked
	<p>T11N R2W</p> <p>S14 S13.</p> <p>S23 S24</p> <p>1938</p>
	No bearing trees available.
	Land, mountainous. Soil, rocky, 4th rate. Timber, juniper and pinyon. Undergrowth, oakbrush, laurel, mahogany, buckbrush and catclaw.
	S. 89° 59' E., on random line, bet. secs. 13 and 24.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.96	Intersect E. bdy. of the Tp. 2 lks. N. of cor. of secs.

Survey: Subdivision of T. 11 N., R. 2 W.

38

Chains	
	13, 18, 19 and 24, hereinbefore described.
	Thence,
	N. 89° 58' W., on true line, bet. secs. 13 and 24.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 10 ft. over SE. slope.
0.80	Point of spur, slopes SE.; desc. 51 ft. over SW. slope.
5.41	Wash, 8 lks. wide, course SE.; asc. 224 ft. over SE. slope.
12.76	Point of spur, slopes S.; desc. 42 ft. over SW. slope.
15.90	Wash, 4 lks. wide, course S. 5° E.; asc. 275 ft. over SE. slope.
18.56	U.S. Forest Service trail, bears NE. and SW.
25.17	Spur, slopes S. 5° E. U.S. Forest Service tower on Tower Mountain, bears S. 38° 02' E. Desc. 5 ft. over SW. slope.
26.58	Barbed wire fence (4 wire) bears NE. and SW.
27.20	Head of ravine, course S.; asc. 12 ft. over SE. slope.
29.28	Ridge, bears N. 30° E. and S. 30° W.; desc. 268 ft. over NW. slope to
39.98	Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in ground to bedrock, a stone 4x6x7 ins. marked with a cross (+) deposited at base, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S \ 13}{S \ 24}$
	1938'
	No bearing trees available.
	Desc. 213 ft. over NW. slope.
53.30	Wash, 6 lks. wide, course SW.; asc. 84 ft. over SE. slope.
59.56	Spur, slopes SW. from N.; desc. 148 ft. over SW. slope.
68.05	Wash, 5 lks. wide, course S. from NE.; asc. 110 ft. over SE. slope.
74.27	Spur, slopes W. from N. 60° E.; desc. 105 ft. on top of same to
79.96	Cor. of secs. 13, 14, 23 and 24.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, juniper and pinyon.
	Undergrowth, oakbrush, laurel, catclaw, mahogany and buckbrush.

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

39

Chains

N. 0° 01' W., bet. secs. 13 and 14.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 112 ft. over steep N. slope.

3.51 Bottom of ravine, course W. near head; asc. 154 ft. over S. slope.

9.35 Spur, slopes W.; desc. 76 ft. over N. slope.

12.74 Bottom of ravine, course W.; asc. 219 ft. over SW. slope.

21.68 Point of spur, slopes W.; desc. 112 ft. over NW. slope.

27.29 Bottom of ravine, course S. 60° W.; asc. 305 ft. over SE. slope.

38.30 Spur, slopes SW. from E., near point of same; desc. 22 ft. over NW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 17 ins. in ground to bedrock with a stone 2x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S14 | S13

1938

No bearing trees available.

Desc. 21 ft. over NW. slope.

43.20 Wash, course W. turns to S. about 6 chs. W.; asc. 68 ft. over S. slope.

48.78 Ridge, bears E. and W. general bearing NE. and SW.; desc. 146 ft. over NW. slope.

59.83 Bottom of ravine, course SW.; asc. 153 ft. over S. slope.

70.45 Ridge, bears NE. and SW.; dim trail along top of same. Desc. 59 ft. over NW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in ground to bedrock with a stone 4x4x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

T11N	R2W
S11	S12
S14	S13

1938

No bearing trees available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper, and pinyon.

Undergrowth, oakbrush, laurel, mahogany, catclaw and buckbrush.

Chains	
	S. 89° 58' E., on random line, bet. secs. 12 and 13,
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	Intersect E. bdy. of the tp. 4 lks. S. of the cor. of secs. 7, 12, 13 and 18, hereinbefore described.
	Thence
	West, on true line, bet. secs. 12 and 13.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Desc. 29 ft. over S. slope.
5.12	Spur, slopes SW.; desc. 140 ft. over NW. slope.
10.05	Wash, course SW.; asc. 54 ft. over SE. slope.
17.06	Spur, slopes SW.; desc. 220 ft. over SW. slope.
31.52	Wash, course SW.; asc. 30 ft. over SE. slope to
40.01	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 2x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S\ 12}{S\ 13}$
	1938
	No bearing trees available.
	Asc. 5 ft. over SE. slope.
43.84	Ridge, bears NE. and SW.; desc. 196 ft. over NW. slope.
55.93	Bottom of ravine, course SW.; asc. 107 ft. over SE. slope.
63.02	Ridge, bears NE. and SW.; desc. 175 ft. over NW. slope to sec. cor.
66.08	Dim trail, bears S. 60° W. and N. 60° E. Earth dam and stock tank bears N. about 14 chs. dist.
80.02	Cor. of secs. 11, 12, 13 and 14,
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, juniper and pinyon.
	Undergrowth, oakbrush, laurel, mahogany, buckbrush and catclaw.
	N. 0° 01' W., bet. secs. 11 and 12.
	Over mountainous land, thru scattering timber and undergrowth.
	Desc. 73 ft. over NW. slope.
3.71	Wash, course W. from NE.; asc. 135 ft. over SW. slope.
16.38	Spur, slopes S. 80° W.; desc. 178 ft. over NW. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

Chains	
26.70	Wash, course SW.; asc. 111 ft. over S. slope.
38.32	Barbed wire fence (4 wire) bears N. 88° W. and S. 88° E.
38.72	Spur, slopes W.; desc. 5 ft. over N. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock with a stone 4x4x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked
	<p>4</p> <p>S 11 S 12</p> <p>1938</p> <p>No bearing trees available.</p> <p>Desc. 102 ft. over N. slope.</p>
48.28	Wash, course W.; asc. 226 ft. over SE. slope.
57.33	Spur, slopes SW.; desc. 131 ft. over NW. slope.
71.23	Wash from NE., course W. for 2 chs., thence SW.; asc. 241 ft. over S. slope to sec. cor.
79.70	Improved mine trail, bears NE. and SW.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 1, 2, 11, and 12, with brass cap marked
	<p>T11N R2W</p> <p>S 2 S 1</p> <p>--- ---</p> <p>S11 S 12</p> <p>1938</p> <p>No bearing trees available. Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.</p> <p>Land, mountainous.</p> <p>Soil, 4th rate.</p> <p>Timber, pinyon and juniper.</p> <p>Undergrowth, oakbrush, laurel, catclaw, buckbrush and mahogany.</p>
	East, on random line, bet. secs. 1 and 12.
40.00	Set temp. 1/4 sec. cor.
80.00	Intersect E. bdy. of the Tp. 4 lks. N. of cor. of secs. 1, 6, 7 and 12, hereinbefore described.
	Thence,
	N. 89° 58' W., on true line, bet. secs. 1 and 12.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 147 ft. over SE. slope.
7.80	Dim. trail, bears NE. and SW.
8.10	Ridge, bears NE. and SW.; desc. 119 ft. over NW. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

42

Chains	
11.65	Head of wash, course NW.; asc. 36 ft. over NE. slope.
16.35	Spur ridge bearing NW. and SE. sloping NW.; desc. 211 ft. over W. slope.
21.70	Dim trail, bears NW. and SE.
32.00	Wash, course NW.; desc. 126 ft. over N. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in ground to bedrock with a stone 4x6x7 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S 1}{S 12}$
	1938
	No bearing trees available.
	Desc. 82 ft. over N. slope to
47.94	Point of spur, slopes N. 60° W.; desc. 163 ft. over W. slope.
59.98	Wash, course S. 70° W.; asc. 37 ft. over SE. slope.
63.54	Spur, slopes SW.; desc. 35 ft. over W. slope.
66.78	Braylock mine shaft and shacks (abandoned) bears N. 4.80 chs. dist.
70.30	Head of wash, course SW.; asc. 120 ft. over S. slope to sec. cor.
79.68	Improved mine trail, bears N. 65° E. and S. 65° W.
80.00	Cor. of secs. 1, 2, 11 and 12.
	Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pinyon and cottonwood. Undergrowth, manzanita, oakbrush, laurel, catclaw, buckbrush and mahogany.
	N. 0° 01' W., on random line, bet. secs. 1 and 2.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.17	Intersect the cor. of secs. 1, 2, 35 and 36, on N. bdy. of the Tp., hereinbefore described.
	Thence,
	S. 0° 01' E., on true line, bet. secs. 1 and 2.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Desc. 7 ft. over SW. slope.
3.17	Wash, course W. from S. 30° E.; asc. 244 ft. over N. slope.
26.08	Spur ridge, bears E. and W. sloping W.; desc. 177 ft. over S. slope.
39.36	Wash, course W.; asc. 26 ft. over NW. slope to

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 418

43

Chains	
40.17	<p>Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in ground to bedrock with a stone 2x2x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 2 S 1</p> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Asc. 110 ft. over NW. slope.</p>
50.41	<p>Spur ridge, bears N. 60° E. and S. 60° W. sloping SW.; desc. 336 ft. over SE. slope.</p>
64.53	<p>Wash, course S. 60° W.; asc. 199 ft. over NW. slope.</p>
75.98	<p>Spur, slopes S. 60° W.; desc. 13 ft. over S. slope to</p>
80.17	<p>Cor. of secs. 1, 2, 11 and 12.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, juniper and pinyon. Undergrowth; oakbrush, laurel, catclaw, mahogany and buckbrush.</p>
12.90	<p>From the cor. of secs. 34 and 35, on S. bdy. of the Tp. hereinbefore described.</p> <p>N. 0° 01' W., bet. secs. 34 and 35.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 250 ft. over NE. slope.</p>
16.50	<p>Spur; slopes NW.; desc. 163 ft. over N. slope to</p>
35.55	<p>Wash, 10 lks. wide, course N. 60° W.; enter nearly level land.</p>
37.90	<p>Blind Indian Creek (dry) 20 lks. wide, course S. 60° W.</p>
40.00	<p>Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S 34 S 35</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A hackberry, 6 ins. diam., bears N. 26° E., 9 lks. dist., marked $\frac{1}{4}$ S35 BT.</p> <p>A willow, 6 ins. diam., bears S. 87$\frac{1}{4}$° W., 4 lks. dist., marked $\frac{1}{4}$ S34 BT.</p>

Survey: Subdivision of T. 11 N., R. 2 W.

44

Chains	Continue over nearly level land, bears NE. and SW.						
42.60	Leave nearly level and enter mountainous land; asc. 265 ft. over S. slope.						
50.60	Barbed wire fence (4 wire) bears N. $43\frac{1}{2}^{\circ}$ E. and S. $43\frac{1}{2}^{\circ}$ W.						
52.58	SW. end of spur ridge bearing NE. and SW., sloping SW.; asc. 35 ft. over W. and SW. slopes to						
61.90	Point of spur, slopes W.; desc. 47 ft. over NW. slope.						
69.00	Drain, course SW. near head; asc. 189 ft. over SW. slope to						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 26, 27, 34 and 35, with brass cap marked						
	<table border="1"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> </table>	T11N	R2W	S27	S26	S34	S35
T11N	R2W						
S27	S26						
S34	S35						
	1938						
	from which						
	A pinyon, 6 ins. diam., bears N. $34\frac{1}{2}^{\circ}$ E., 37 lks. dist., marked T11N R2W S26 BT.						
	A pinyon, 6 ins. diam., bears S. $59\frac{1}{2}^{\circ}$ E., 105 lks. dist., marked T11N R2W S35 BT.						
	A pinyon, 6 ins. diam., bears S. $49\frac{1}{2}^{\circ}$ W., 26 lks. dist., marked T11N R2W S34 BT.						
	A pinyon, 6 ins. diam., bears N. 33° W., 26 lks. dist., marked T11N R2W S27 BT.						
	Land, mountainous. Soil, rocky, 3rd and 4th rates. Timber, oak, pinyon, juniper and hackberry. Undergrowth, oakbrush, laurel, locust and catclaw.						
	East, on random line, bet. secs. 26 and 35,						
40.00	Set temp. 4 sec. cor.						
80.00	Intersect N. and S. line 2 lks. N. of the cor. of secs. 25, 26, 35 and 36.						
	Thence						
	N. $89^{\circ} 59'$ W., on true line, bet. secs. 26 and 35.						
	Over mountainous land, thru scattering timber and dense undergrowth.						
	Desc. 477 ft. over NW. slope.						
17.10	Bottom of ravine, course NW.; asc. 40 ft. over NE. slope.						
23.40	Spur, slopes N. from SE.; desc. 358 ft. over W. slope.						
36.60	Blind Indian Creek (dry) 30 lks, wide, course SW.; asc. 39 ft. over SE. slope to						
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in						

Chains

ground to bedrock with a stone 2x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$

1938

No bearing trees available.

- Asc. 48 ft. over SE. slope to
- 45.00 Bottom of ravine, 10 lks. wide, course SE.; asc. 286 ft. over E. slope.
- 56.30 Spur, slopes SE.; desc. 165 ft. over SW. slope.
- 66.90 Wash, 10 lks. wide, course S. 25° E.; asc. 191 ft. over E. slope.
- 74.00 Spur ridge bears N. 26° W. and S. 26° E.; sloping SE. Barbed wire fence (.4 wire) bears N. 26 $\frac{1}{2}$ ° W. and S. 26 $\frac{1}{2}$ ° E.; desc. 113 ft. over SW. slope to
- 80.00 Cor. of secs. 26, 27, 34 and 35.

Land, mountainous.

Soil, rocky, 3rd and 4th rates.

Timber, oak, pinyon, juniper and hackberry.

Undergrowth, oakbrush, laurel, catclaw and cacti.

N. 0° 01' W., bet. secs. 26 and 27.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 135 ft. over SW. slope.

- 6.70 Spur, slopes SW. from E.; desc. 116 ft. over broken NW. slope.
- 14.00 Bottom of ravine, 8 lks. wide, course W.; asc. 49 ft. over SW. slope.
- 16.20 Spur, slopes W.; desc. 74 ft. over NW. slope.
- 21.70 Bottom of ravine, course W.; asc. 87 ft. over SW. slope.
- 25.20 Spur, slopes W.; desc. 163 ft. over NW. slope.
- 31.40 Wash, 20 lks. wide, course S. 70° W.; asc. 112 ft. over SW. slope.
- 35.00 Spur, slopes W.; desc. 94 ft. over NW. slope.
- 36.30 Drain, course NW.; asc. 18 ft. over SW. slope.
- 38.00 Point of spur, slopes W.; desc. 11 ft. over NW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam.; 18 ins. in ground to bedrock with a stone 2x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 27 | S 26

1938

Survey: Subdivision of T. 11 N., R. 2 W.

46

Chains	No bearing trees available.						
	Desc. 49 ft. over NW. slope.						
44.80	Wash, 15 lks. wide, course S. 60° W.; asc. 302 ft. over SE. slope.						
54.60	Long spur, slopes S. 20° W.; desc. 302 ft. over NW. slope.						
67.70	wash, 10 lks. wide, course W.; asc. 92 ft. over S. slope.						
71.50	Point of spur, slopes W.; desc. 159 ft. over NW. slope.						
79.00	Wash, 15 lks. wide, course SW.; asc. 15 ft. over SE. slope to						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked						
	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>T11N</th> <th>R2W</th> </tr> </thead> <tbody> <tr> <td>S22</td> <td>S23</td> </tr> <tr> <td>S27</td> <td>S26</td> </tr> </tbody> </table>	T11N	R2W	S22	S23	S27	S26
T11N	R2W						
S22	S23						
S27	S26						
	1938						
	from which						
	A pinyon, 6 ins. diam., bears N. 21° E., 100 lks. dist., marked T11N R2W S23 BT.						
	A pinyon, 6 ins. diam., bears S. 48½° E., 48 lks. dist., marked T11N R2W S26 BT.						
	A pinyon, 6 ins. diam., bears S. 30° W., 23 lks. dist., marked T11N R2W S27 BT.						
	A pinyon, 8 ins. diam., bears N. 53¼° W., 98 lks. dist., marked T11N R2W S22 BT.						
	Land, mountainous and nearly level. Soil, rocky, 4th rate. Timber, juniper, pinyon, hackberry and oak. Undergrowth, oakbrush, laurel, catclaw and locust.						
	S. 89° 59' E., on random line, bet. secs. 23 and 26.						
40.00	Set temp. ¼ sec. cor.						
80.00	Intersect N. and S. line 11 lks. N. of the true point for cor. of secs. 23, 24, 25 and 26 (W.C. 0.10 chs. N. 0° 01' W.)						
	From true point for sec. cor.						
	N. 89° 54' W., on true line, bet. secs. 23 and 26.						
	Over mountainous land, thru scattering timber and dense undergrowth.						
	Asc. 121 ft. over NE. slope.						
4.00	Spur, slopes S. from N. 30° W.; desc. 223 ft. over W. slope.						
13.30	Wash, 15 lks. wide, course S. 20° E.; asc. 224 ft. over E. slope.						
24.40	Spur, slopes S. 20° E.; desc. 134 ft. over W. slope.						

Chains	
30.50	Wash, 12 lks. wide, course S.; asc. 145 ft. over SE. slope.
37.00	Spur, slopes S. 20° E.; desc. 30 ft. over SW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S\ 23}{S\ 26}$
	1938
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 25 ft. over SW. slope.
42.00	Wash, 10 lks. wide, course S. near head; asc. 32 ft. over SE. slope.
43.70	Point of short spur, slopes S.; desc. 10 ft. over SW. slope.
44.30	Drain, course SE. near head; asc. 96 ft. over SE. slope.
50.00	Ridge, bears N. 60° E. and S. 34° W.; desc. 218 ft. over broken NW. slope to head of ravine.
50.25	U.S.F.S. barbed wire fence (.4 wire) bears N. 60° E. and S. 34° W.
58.40	Head of ravine, course N. 60° W.; desc. 181 ft. over NW. slope.
72.50	Bottom of ravine, course NW.; asc. 41 ft. over NE. slope.
78.50	Desc. 72 ft. over NW. slope.
78.70	Wash, 15 lks. wide, course SW.; asc. 9 ft. over SE. slope to
80.00	Cor. of secs. 22, 23, 26 and 27.
	Land, mountainous, Soil, rocky, 4th rate. Timber, pinyon, juniper, oak and hackberry. Undergrowth, oakbrush and manzanita.
	N. 0° 01' W., bet. secs. 22 and 23.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 240 ft. over SE. slope.
8.00	Dim trail, bears N. 79° E. and S. 49½° W.
8.10	Ridge, bears N. 79° E. and S. 49° W.; U.S.F.S. barbed wire fence (4 wire) along top of same; desc. 263 ft. over N. slope.
19.50	Drain, course N. 20° W.; asc. 10 ft. over W. slope.
21.70	Point of spur, slopes NW.; desc. 62 ft. over N. slope.
23.50	Wash, 20 lks. wide, course N. 70° W. for 4 chs., thence

Chains	SW.; ascend 79 ft. over S. slope.
30.00	Point of spur, slopes SW.; asc. 15 ft. over W. slope to
38.10	Desc. 26 ft. over NW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S 22 S 23 1938 from which
	A pinyon, 6 ins. diam., bears S. $5\frac{1}{4}^{\circ}$ E., 91 lks. dist., marked $\frac{1}{4}$ S22 BT.
	A pinyon, 6 ins. diam., bears N. $8\frac{1}{2}^{\circ}$ W., 26 lks. dist., marked $\frac{1}{4}$ S23 BT.
	Desc. 22 ft. over NW. slope.
41.90	Wash, 5 lks. wide, course SW.; asc. 292 ft. over SE. slope.
59.50	Spur ridge, bears N. 60° E. and S. 60° W., sloping SW.; desc. 239 ft. over broken NW. slope.
69.90	Wash, 15 lks. wide; course S. 60° W.; asc. 132 ft. over SE. slope.
77.75	Desc. 22 ft. over E. slope.
79.60	Bottom of ravine, course S. 70° E.; asc. 10 ft. over SW. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 14, 15, 22 and 23, with brass cap marked
	T11N R2W S15 S14 S22 S23 1938
	No bearing trees available.
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, mountainous. Soil, rocky, 4th rate. Timber, pinyon, oak, juniper and hackberry. Undergrowth, oakbrush, manzanita, catclaw, locust, laurel and cacti.
	S. $89^{\circ} 54'$ E., on random line, bet. secs. 14 and 23.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.90	Intersect N. and S. line 7 lks. S. of the cor. of secs. 13, 14, 23 and 24.
	Thence,
	N. $89^{\circ} 57'$ W., on true line, bet. secs. 14 and 23.

Survey: Subdivision of T. 11 N., R. 2. W.

BOOK 4188

49

Chains	
	Over mountainous land, thru scattering timber and dense undergrowth.
	Desc. 20 ft. on top of spur sloping W.
1.50	Point of spur, sloping W.; desc. 164 ft. over W. slope.
11.40	Wash, 20 lks. wide, course S.; asc. 134 ft. over SE. slope.
16.10	Point of spur, slopes S.; desc. 60 ft. over SW. slope.
19.20	Bottom of ravine, 10 lks. wide, course S. 20° E.; asc. 205 ft. over broken SE. slope.
32.30	Spur, slopes S. 10° W.; desc. 110 ft. over W. slope.
37.10	Bottom of ravine, course SW.; asc. 39 ft. over SE. slope to
39.95	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} \frac{S\ 14}{S\ 23} \\ 1938 \end{array}$
	No bearing trees available.
	Raise a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, N. of cor.
	Asc. 25 ft. over SE. slope.
47.90	Spur ridge bears NE. and SW.; sloping SW.; desc. 390 ft. over broken NW. slope.
66.90	Wash, 15 lks. wide, course SW.; asc. 84 ft. over SE. slope.
76.10	Point of spur, slopes S.; desc. 40 ft. over SW. slope to
79.90	Cor. of secs. 14, 15, 22 and 23.
	Land, mountainous. Soil, rocky, 4th rate. Timber, oak, pinyon and juniper. Undergrowth, oakbrush, manzanita, laurel, locust, catclaw and cacti.
	N. 0° 01' W., bet. secs. 14 and 15.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Asc. 209 ft. over SW. slope to
9.30	Spur, slopes S. 30° E.; asc. 123 ft. over E. and SE. slopes.
22.50	Ridge, bears N. 36° E. and S. 36° W.; dim trail along top of same; desc. 127 ft. over NW. slope.
31.90	Bottom of ravine, 5 lks. wide, course NW.; asc. 53 ft. over SW. slope.
35.90	Spur, slopes NW.; desc. 86 ft. over N. slope to

Survey: Subdivision of T. 11 N., R. 2 W.

50

Chains	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked <p style="text-align: center;">4</p> <p style="text-align: center;">S 15 S 14</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A pinyon, 7 ins. diam., bears S. $20\frac{1}{4}^{\circ}$ E., 254 lks. dist., marked $\frac{1}{4}$ S14 BT.</p> <p>A pinyon, 5 ins. diam., bears N. 54° W., 72 lks. dist., marked $\frac{1}{4}$ S15 BT.</p> <p>Desc. 329 ft. over NW. slope.</p>
59.10	Wash, 20 lks. wide, course SW.; mine road in bottom of same; asc. 173 ft. over broken S. slope.
73.30	Point of spur, slopes SE.; desc. 55 ft. over NE. slope.
76.70	Bottom of ravine, 4 lks. wide, course E.; asc. 71 ft. over SE. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in ground to bedrock and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap marked <p style="text-align: center;">T11N R2W</p> <p style="text-align: center;">S10 S11</p> <p style="text-align: center;">S15 S14</p> <p style="text-align: center;">1938</p> <p>A juniper, 6 ins. diam., bears N. 68° W., 9 lks. dist., marked BT only.</p> <p>No other bearing trees available.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, pinyon, oak and juniper. Undergrowth, oakbrush, laurel, manzanita, catclaw and cacti.</p> <hr/> <p>S. $89^{\circ} 57'$ E.; on random line, bet. secs. 11 and 14.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	Intersect N. and S. line, 2 lks. S. of cor. of secs. 11, 12, 13 and 14. <p>Thence</p> <p>N. $89^{\circ} 58'$ W., on true line, bet. secs. 11 and 14.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 269 ft. over NW. slope.</p>
19.52	Bottom of ravine, 10 lks. wide, course NW.; asc. 130 ft. over NE. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

51

Chains

- 24.02 Point of spur, slopes N.; desc. 217 ft. over NW. slope to
- 40.01 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{S 11}{S 14}$
- 1938
- No bearing trees available.
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- Desc. 212 ft. over W. slope.
- 54.02 Enter wash, 30 lks. wide, course W. from NE.; mine road in bottom of same; desc. gradually in wash, and along road.
- 55.02 Mouth of wash from N.
- 56.32 Leave wash and road, course S. 35° W. from E.; asc. 244 ft. over SE. slope.
- 69.22 Spur, slopes SW.; desc. 198 ft. over W. slope.
- 78.26 Wash, 15 lks. wide, course S.; asc. 70 ft. over SE. slope to
- 80.02 Cor. of secs. 10, 11, 14 and 15.
- Land, mountainous.
Soil, rocky, 4th rate.
Timber, oak and juniper.
Undergrowth, oakbrush, manzanita, locust, laurel and cat-claw.
-
- N. 0° 01' W., bet. secs. 10 and 11.
- Over mountainous land, thru scattering timber and dense undergrowth.
- Asc. 189 ft. over broken SE. slope.
- 20.30 Ridge, bears N. 40° E. and S. 25° W.; desc. 219 ft. over broken NW. slope.
- 38.20 Bottom of ravine, 10 lks. wide, course N. 60° W.; asc. 53 ft. over SW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam.; 10 ins. in ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{S 10 | S 11}{1938}$
- from which
- A pinyon, 8 ins. diam., bears S. 42° E., 23 lks. dist., marked $\frac{1}{4}$ S11 BT.
- A pinyon, 6 ins. diam., bears N. 44° W., 110 lks. dist., marked $\frac{1}{4}$ S10 BT.

Survey: Subdivision of T. 11 N., R. 2 W.

52

Chains	Asc. 4 ft. over SW. slope.						
40.50	Point of spur, slopes N. 60° W.; desc. 70 ft. over NW. slope.						
43.30	Wash, 10 lks. wide, course SW.; near head; asc. 139 ft. over SW. slope.						
48.00	Spur, slopes W.; desc. 312 ft. over broken NW. slope.						
51.60	Fence, bears N. 55° W. and S. 55° E.						
64.70	Bottom of ravine, 8 lks. wide, course W.; joins bottom of Crooks Canyon W. 1.00 chs. dist. in bend course SW. from NW.; asc. 208 ft. over SW. slope.						
76.00	Point of spur, slopes W.; desc. 55 ft. over NW. slope to						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground for cor. of secs. 2, 3, 10 and 11, with brass cap marked						
	<table border="1"> <tbody> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td>S3</td> <td>S2</td> </tr> <tr> <td>S10</td> <td>S11</td> </tr> </tbody> </table>	T11N	R2W	S3	S2	S10	S11
T11N	R2W						
S3	S2						
S10	S11						
	1938						
	No bearing trees available.						
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.						
	Land, mountainous.						
	Soil, rocky, 4th rate.						
	Timber, oak, juniper and pinyon.						
	Undergrowth, oakbrush, manzanita, laurel, locust and cacti.						
	S. 89° 50' E., on random line, bet. secs. 2 and 11.						
40.00	Set temp. $\frac{1}{4}$ sec. cor.						
80.12	Intersect N. and S. line 5 lks. S. of cor. of secs. 1, 2, 11 and 12.						
	Thence,						
	West, on true line, bet. secs. 2 and 11.						
	Over mountainous land, thru scattering timber and dense undergrowth.						
	Desc. 15 ft. over S. slope to						
6.92	Spur, slopes SW.; desc. 336 ft. over NW. slope.						
21.82	Wash, 15 lks. wide, course S. 10° W. from NE.; asc. 97 ft. over SE. slope.						
25.32	Point of spur, slopes S.; desc. 49 ft. over SW. slope.						
28.32	Bottom of ravine, 10 lks. wide, course SE.; asc. 206 ft. over E. slope.						
37.92	Spur ridge, bears NE. and S. 10° W. sloping SW.; desc. 65 ft. over NW. slope to						
40.06	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked						

Chains	
	$\frac{S 2}{S 11}$ 1938 from which
	A pinyon, 6 ins. diam., bears N. 10° E., 46 lks. dist., marked $\frac{1}{4}$ S2 BT.
	A pinyon, 4 ins. diam., bears S. 49° E., 29 lks. dist., marked $\frac{1}{4}$ S11 BT.
	Desc. 185 ft. over NW. slope.
46.42	Wash, 10 lks. wide, course S. 50° W.; asc. 170 ft. over SE. slope.
54.02	Ridge, bears N. 40° E. and S. 50° W.; desc. 367 ft. over broken NW. slope to
66.72	Enter bottom of ravine, 10 lks. wide, course W. from N. 70° E.; desc. 110 ft. in bottom of ravine to
70.12	Leave bottom of ravine, course N. 70° W.; desc. 135 ft. over NW. slope to
80.12	Cor. of secs. 2, 3, 10 and 11. Land, mountainous. Soil, rocky, 4th rate. Timber, pinyon, juniper and oak. Undergrowth, oakbrush, manzanita, laurel, locust and cacti.
	N. 0° 01' W., on random line, bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.33	Intersect the cor. of secs. 2, 3, 34 and 35, on N. bdy. of the Tp., hereinbefore described.
	Thence, S. 0° 01' E., on true line, bet. secs. 2 and 3. Over mountainous land, thru scattering timber and dense undergrowth. Desc. 145 ft. over SE. slope.
11.63	Wash, 20 lks. wide, course S. 70° W.; asc. 35 ft. over N. slope.
14.43	Spur, slopes W.; desc. 64 ft. over S. slope.
17.73	Wash, 10 lks. wide, course W.; asc. 209 ft. over broken NW. slope.
34.53	Ridge, bears N. 40° E. and S. 40° W.; dim trail along same. Desc. 124 ft. over SE. slope to
40.33	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in ground, to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S 3}{S 2}$ 1938

Chains	<p>No bearing trees available.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Desc. 524 ft. over broken SE. slope.</p>
76.93	Bottom of Crooks Canyon, 30 lks. wide, course SW.; asc. 118 ft. over NW. slope.
80.33	Cor. of secs. 2, 3, 10 and 11.
	<p>Land, mountainous.</p> <p>Soil, rocky, 4th rate.</p> <p>Timber, pinyon, oak and juniper.</p> <p>Undergrowth, oakbrush, manzanita, laurel, locust, catclaw and cacti.</p>
	<p>From the cor. of secs. 33 and 34, on S. bdy. of the Tp., hereinbefore described,</p> <p>N. 0° 02' W., bet. secs. 33 and 34.</p> <p>Over gently rolling land, thru scattering timber and dense undergrowth.</p> <p>Asc. 28 ft. over SW. slope.</p>
10.00	Low ridge, bears E. and W.; desc. 9 ft. over N. slope.
11.00	Head of ravine, course NW.; asc. 20 ft. over SW. slope.
20.40	Spur, slopes NW.; enter mountainous land; desc. 236 ft. over steep NE. slope.
34.30	Blind Indian Creek (dry) 80 lks. wide, course N. 35½° W. from S. 76° E. Thence over gently rolling land. Asc. 15 ft. over SW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for ¼ sec. cor., with brass cap marked
	<p style="text-align: center;">S 33 S 34</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A pinyon, 3 ins. diam., bears N. 51½° E., 28 lks. dist., marked BT.</p> <p>A pinyon, 5 ins. diam., bears N. 66½° W., 31 lks. dist., marked ¼ S33 BT.</p> <p>Asc. gradually over gently rolling W. slope.</p>
59.90	Cut wash, 20 lks. wide, 8 ft. deep, course S. 80° W.; asc. gradually over SW. slope.
65.40	Cut wash, 20 lks. wide, 30 ft. deep, course S. 70° W.; asc. 73 ft. over S. slope.
76.20	Spur, slopes S. 70° W.; desc. 48 ft. over NW. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in ground, for cor. of secs. 27, 28, 33 and 34, with brass cap marked

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

55

Chains

T11N	R2W
S28	S27
S33	S34

1938

from which

A juniper, 6 ins. diam., bears N. $65\frac{1}{2}^{\circ}$ E., 106 lks. dist., marked BT only.

A juniper, 12 ins. diam., bears N. $40\frac{1}{2}^{\circ}$ W., 224 lks. dist., marked T11N R2W S28 BT.

No other bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling and mountainous.

Soil, rocky, 3rd and 4th rates.

Timber, pinyon, juniper, oak and cottonwood.

Undergrowth, laurel, oakbrush and mahogany.

East, on random line, bet. secs. 27 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect N. and S. line 5 lks. S. of cor. of secs. 26, 27, 34 and 35.

Thence

S. $89^{\circ} 58'$ W., on true line, bet. secs. 27 and 34.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 27 ft. over SW. slope.

1.42 Bottom of ravine, course S. 10° W. near head; asc. 96 ft. over SE. slope.

5.02 Spur, slopes SW.; desc. 77 ft. over NW. and N. slopes to

12.42 Point of short spur, slopes NW.; desc. 321 ft. over W. slope.

28.72 Draw, course NW., leave mountainous and enter rolling land. Desc. 38 ft. over NW. slope to

40.01 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 27
	S 34

1938

from which

A pinyon, 6 ins. diam., bears S. 80° W., 115 lks. dist., marked $\frac{1}{4}$ S34 BT.

No other bearing tree available.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 43 ft. over NW. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

56

Chains										
49.42	Wash, 30 lks. wide, 4 ft. deep, course SW.; asc. 37 ft. over SE. slope.									
65.02	Spur, slopes SW.; desc. 86 ft. over NW. slope to									
80.02	Cor. of secs. 27, 28, 33 and 34.									
	Land, mountainous and rolling. Soil, rocky, 3rd and 4th rates. Timber, oak, juniper and pinyon. Undergrowth, oakbrush, mahogany, laurel and manzanita.									
	N. 0° 02' W., bet. secs. 27 and 28.									
	Over rolling land, thru scattering timber and dense undergrowth.									
	Desc. 12 ft. over NW. slope.									
2.00	Wash, 15 lks. wide, course SW.; asc. 99 ft. over S. slope.									
19.60	Spur, slopes SW.; desc. 55 ft. over NW. slope.									
32.50	Wash, 10 lks. wide, course SW.; asc. 40 ft. over S. slope to									
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked									
	<table border="1"> <tr> <td></td> <td>$\frac{1}{4}$</td> <td></td> </tr> <tr> <td></td> <td>S28</td> <td> S27</td> </tr> <tr> <td></td> <td colspan="2" style="text-align: center;">1938</td> </tr> </table>		$\frac{1}{4}$			S28	S27		1938	
	$\frac{1}{4}$									
	S28	S27								
	1938									
	No bearing trees available.									
	Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.									
	Asc. 10 ft. over S. slope.									
44.50	Spur, slopes SW.; desc. 32 ft. over NW. slope.									
47.50	Wash, 30 lks. wide, course SW.; asc. 161 ft. over S. slope.									
64.12	Barbed wire fence (4 wire) bears N. 70° E. and S. 70° W.									
68.70	Spur, slopes SW.; desc. 73 ft. over NW. slope.									
74.70	Dim trail, bears N. 80° E. and S. 80° W.									
78.80	Wash, 10 lks. wide, 4 ft. deep, course SW.; asc. 16 ft. over SW. slope to									
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 21, 22, 27 and 28, with brass cap marked									
	<table border="1"> <tr> <td>T11N</td> <td>R2W.</td> </tr> <tr> <td>S21</td> <td> S22</td> </tr> <tr> <td>S28</td> <td> S27</td> </tr> </table>	T11N	R2W.	S21	S22	S28	S27			
T11N	R2W.									
S21	S22									
S28	S27									
	1938									
	No bearing trees available.									
	Raise a mound of stone, 3 ft. base, 2 ft. high, W.									

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

57

Chains	of cor. Land, rolling. Soil, rocky, 3rd and 4th rates. Timber, pinyon, juniper and oak. Undergrowth, oakbrush, manzanita, mahogany and laurel.
	N. 89° 58' E., on random line, bet. secs. 22 and 27.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Intersect N. and S. line 6 lks. S. of cor. of secs. 22, 23, 26 and 27.
	Thence, S. 89° 55' W., on true line, bet. secs. 22 and 27. Over mountainous land, thru scattering timber and dense undergrowth. Asc. 150 ft. over SE. slope.
16.84	Dim' trail, bears NE. and SW.
17.46	Desc. 33 ft. over S. slope.
22.34	Barbed wire fence (4 wire) bears NE. and SW.
22.84	Ridge bears NE. and SW.; desc. 297 ft. over W. slope.
28.64	Same trail, bears NW. and SE.
39.04	Head of draw, course SW. Leave mountainous and enter rolling land; desc. slightly over SW. slope to
40.02	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 22}{S 27}$
	1938
	from which
	A juniper, 4 ins. diam., bears S. 17° E., 318 lks. dist., marked BT only.
	A pinyon, 3 ins. diam., bears N. 35 $\frac{1}{2}$ ° W., 40 lks. dist., marked BT only.
	Continue over rolling land. Desc. 85 ft. over SW. slope to
59.74	Wash, 40 lks. wide, course S.; asc. 25 ft. over SE. slope.
62.85	Desc. 25 ft. over SW. slope.
65.54	Wash, 4 lks. wide, course S.; asc. 26 ft. over SE. slope.
69.10	Spur, slopes SW.; desc. 15 ft. over NW. slope.
77.74	Wash, 10 lks. wide, course SW.; desc. slightly over SW. slope to
80.04	Cor. of secs. 21, 22, 27 and 28. Land, mountainous and rolling. Soil, rocky, 3rd and 4th rates.

Survey: Subdivision of T. 11 N., R. 2 W.

58

Chains	<p>Timber, pinyon, juniper and oak. Undergrowth, oakbrush, laurel and mahogany.</p> <hr/> <p>N. 0° 02' W., bet. secs. 21 and 22.</p> <p>Over rolling land, thru scattering timber and dense undergrowth.</p> <p>Asc. gradually over SW. slope.</p> <p>10.00 Desc. 8 ft. over NW. slope.</p> <p>13.50 Wash, 15 lks. wide, course S. 70° W.; asc. 64 ft. over SE. slope.</p> <p>24.50 Spur, ridge, bears N. 70° E. and S. 70° W. sloping SW.; desc. 90 ft. over NW. slope.</p> <p>25.02 Dim trail, bears N. 70° E. and S. 70° W.</p> <p>35.80 Bottom of ravine, 5 lks. wide, course S. 60° W.; asc. 31 ft. over S. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass tap marked</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S21 S22</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A juniper, 4 ins. diam., bears N. 42$\frac{1}{4}$° E., 125 lks. dist., marked $\frac{1}{4}$ S22 BT.</p> <p>A juniper, 4 ins. diam., bears N. 37$\frac{1}{4}$° W., 208 lks. dist., marked $\frac{1}{4}$ S21 BT.</p> <p>Asc. 59 ft. over S. slope.</p> <p>46.00 Spur, slopes S. 70° W. from E.; desc. 25 ft. over N. slope to</p> <p>56.10 Leave rolling and enter mountainous land. Desc. 150 ft. over steep N. slope.</p> <p>63.44 Bottom of ravine, 4 lks. wide, course S. 70° W.; asc. 86 ft. over S. slope.</p> <p>68.00 Spur, slopes W.; desc. 82 ft. over NW. slope.</p> <p>71.30 Bottom of ravine, 3 lks. wide, course S. 80° W.; asc. 117 ft. over S. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 15, 16, 21 and 22, with brass cap marked</p> <p style="text-align: center;">T11N R2W S16 S15 S21 S22</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A pinyon, 5 ins. diam., bears N. 17$\frac{1}{4}$° E., 57 lks. dist., marked T11N R2W S15 BT.</p>
--------	--

Survey: Subdivision of T. 11 N., R. 2 W.

Chains

A juniper, 6 ins. diam., bears S. 81° E.; 74 lks. dist., marked BT only.

A juniper, 5 ins. diam., bears S. 66½° W., 75 lks. dist., marked BT only.

A pinyon, 6 ins. diam., bears N. 34½° W., 63 lks. dist., marked T11N R2W S16 BT.

Land, rolling and mountainous.
Soil, rocky, 3rd and 4th rates.
Timber, pinyon, juniper, and oak.
Undergrowth, laurel, oakbrush, mahogany and manzanita.

N. 89° 55' E., on random line, bet. secs. 15 and 22.

40.00 Set temp. ¼ sec. cor.

80.00 Intersect N. and S. line 11 lks. N. of cor. of secs. 14, 15, 22 and 23.

Thence

N. 89° 59' W., on true line, bet. secs. 15 and 22.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 7 ft. over SW. slope.

2.30 Bottom of ravine, course S. 80° E. from N. 20° W.; asc. 122 ft. over SE. slope.

10.50 Spur, slopes S.; desc. 54 ft. over W. slope.

14.60 Bottom of ravine, 4 lks. wide, course S. near head; asc. 139 ft. over SE. slope.

23.80 Spur ridge, bears NE. and SW.; dim trail along top of same; desc. 85 ft. over NW. and N. slopes to

30.20 Spur, slopes NW.; desc. 172 ft. over W. slope to

34.40 Bottom of ravine, course NW. near head; asc. 18 ft. over NE. slope to

39.00 Desc. slightly over N. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for ¼ sec. cor., with brass cap marked

¼ $\frac{S 15}{S 22}$

1938

from which

A pinyon, 3 ins. diam., bears S. 6½° W., 41 lks. dist., marked BT only.

A pinyon, 3 ins. diam., bears N. 7½° W., 83 lks. dist., marked BT only.

Desc. 25 ft. over N. slope to

42.70 Spur, slopes N. 85° W.; desc. 165 ft. over SW. slope.

50.60 Desc. 137 ft. over S. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

60

Chains

- 51.75 Trail, bears NW. and S.
- 71.00 Head of ravine, course SW.; asc. 58 ft. over SE. slope to
- 80.00 Cor. of secs. 15, 16, 21 and 22.
- Land, mountainous.
Soil, rocky, 3rd and 4th rates.
Timber, pinyon, juniper and oak.
Undergrowth, laurel, mahogany and oakbrush.
-
- N. 0° 02' W., bet. secs. 15 and 16.
- Over mountainous land, thru scattering timber and dense undergrowth.
- Asc. 7 ft. over S. slope.
- 0.70 Spur, slopes W.; desc. 157 ft. over N. slope.
- 11.33 Wash, course S. 75° W.; asc. 79 ft. over S. slope.
- 14.37 Mine road, bears N. 80° W. and E.
- 20.00 Ridge, bears N. 60° W. and S. 60° E.; desc. 107 ft. over NE. slope.
- 28.15 Wash, course W. from SE.; asc. 20 ft. over S. slope.
- 28.90 Low spur, slopes N. 80° W.; desc. 24 ft. over N. slope.
- 32.49 Wash, S. 60° W. from N. 30° E. near head; asc. 77 ft. over SW. slope,
- 36.93 Point of spur, slopes N. 80° W.; desc. 7 ft. over N. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- .4
- S16 | S15
- 1938
- from which
- A juniper, 16 ins. diam., bears S. 10° E., 9 lks. dist., marked $\frac{1}{4}$ S15 BT,
- A pinyon, 10 ins. diam., bears N. 77° W., 28 lks. dist., marked $\frac{1}{4}$ S16 BT.
- 40.10 Wash, course W.; asc. 39 ft. over S. slope.
- 41.27 Spur, slopes W.; desc. 110 ft. over steep NW. slope to
- 47.40 SE. or left edge of bottom of Crook Canyon, bears NE. and SW. Thence across bottom of canyon. Desc. 22 ft. over gradual NW. slope to
- 61.56 Wash, 120 lks. wide, course S. 60° W. from N. 30° E. Asc. 10 ft. over gradual SE. slope in bottom of canyon.
- 63.80 NW. or right edge of bottom of Crooks Canyon, bears NE. and SW. Leave bottom of canyon; asc. 153 ft. over SE. slope.

Chains

75.74 Desc. 72 ft. over NE. slope.

78.56 Bottom of ravine, course SE.; asc. 42 ft. over SW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 9, 10, 15 and 16, with brass cap marked

T11N	R2W
S9	S10
S16	S15

1938.

from which

A pinyon, 8 ins. diam., bears S. 8° E., 150 lks. dist., marked T11N R2W S15 BT.

A black oak, 8 ins. diam., bears S. 37° W., 34 lks. dist., marked T11N R2W S16 BT.

No other bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper, pinyon, oak and cottonwood.

Undergrowth, oakbrush, laurel, mahogany, buckbrush and catclaw.

S. 89° 59' E., on random line, bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

79.92 Intersect N. and S. line 2 lks. N. of cor. of secs. 10, 11, 14 and 15.

Thence

N. 89° 58' W., on true line, bet. secs. 10 and 15.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 152 ft. over SE. slope.

8.92 Ridge, bears N. 30° E. and S. 30° W.; desc. 201 ft. over NW. slope.

14.02 Wash, course N. 20° W., near head; asc. 57 ft. over NE. slope.

17.02 Spur, slopes N. 15° W.; desc. 87 ft. over W. slope.

19.32 Wash, course N. 20° W.; asc. 83 ft. over NE. slope.

23.02 Spur, slopes N. 15° W.; desc. 320 ft. over W. and SW. slopes to

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for 1/4 sec. cor., with brass cap marked

S 10
1/4 S15

1938

Chains	<p>No bearing trees available.</p> <p>Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.</p> <p>Desc. 6 ft. over SW. slope.</p> <p>40.24 Wash, course NW.; asc. 116 ft. over NE. slope.</p> <p>50.67 Spur, slopes N. 30° W.; desc. 203 ft. over steep W. slope to</p> <p>55.12 Wash, course N. 30° W.; desc. slightly over NW. slope to</p> <p>56.22 Wash, course N.; asc. 108 ft. over NE. slope.</p> <p>60.62 Point of spur, slopes N.; desc. 133 ft. over broken NW. slope.</p> <p>66.32 Wash, 100 lks. wide, course SW. in bottom of Crooks Canyon; asc. 103 ft. over SE. slope.</p> <p>75.92 Point of spur, slopes SE.; desc. 28 ft. over SW. slope to</p> <p>79.92 Cor. of secs. 9, 10, 15 and 16.</p> <p>Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pinyon, oak and cottonwood. Undergrowth, oakbrush, laurel, mahogany, buckbrush and catclaw.</p>
	<p>N. 0° 02' W., bet. secs. 9 and 10.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Asc. 176 ft. over SW. slope.</p> <p>9.49 Spur, slopes S. 30° E.; desc. 109 ft. over NE. slope.</p> <p>20.43 Wash, course S. 30° E.; asc. 257 ft. over SW. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">4</p> <p style="text-align: center;">S9 S10</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A pinyon, 8 ins. diam., bears N. 37° E., 142 lks. dist., marked $\frac{1}{4}$ S10 BT.</p> <p>A pinyon, 8 ins. diam., bears S. 74° W., 14 lks. dist., marked $\frac{1}{4}$ S9 BT.</p> <p>Asc. 138 ft. over SW. slope.</p> <p>49.04 Spur, slopes S. 30° E.; desc. 25 ft. over NE. slope.</p> <p>60.54 Wash; course S. 30° E.; asc. 193 ft. over S. slope.</p> <p>69.36 Barbed wire fence (4 wire) bears N. 48$\frac{1}{4}$° E. and S. 65$\frac{1}{2}$° W.</p> <p>69.74 Ridge, bears N. 48$\frac{1}{4}$° E. and S. 65$\frac{1}{2}$° W.; desc. 168 ft. over NW. slope to</p>

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

63

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 3, 4, 9 and 10, with brass cap marked

T11N	R2W
S4	S3
S9	S10

1938

from which

A pinyon, 8 ins. diam., bears N. 44° E., 66 lks. dist., marked T11N R2W S3 BT.

A pinyon, 10 ins. diam., bears S. 45° W., 1½ lks. dist., marked T11N R2W S9 BT.

No other bearing trees available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, juniper and pinyon.

Undergrowth, oakbrush, laurel, buckbrush, catclaw and mahogany.

S. 89° 58' E., on random line, bet. secs. 3 and 10.

40.00 Set temp. ¼ sec. cor.

79.92 Intersect N. and S. line 9 lks. S. of the cor. of secs. 2, 3, 10 and 11.

Thence

S. 89° 58' W., on true line, bet. secs. 3 and 10.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 133 ft. over NW. slope.

3.27 Bottom of Crooks Canyon, 80 lks. wide, course S. 30° W.; asc. 424 ft. over E. slope.

15.03 Barbed wire fence (4 wire) bears N. 24½° W. and S. 24½° E.

15.63 Spur, slopes S.; desc. 246 ft. over W. slope.

23.21 Bottom of ravine, course S.; asc. 298 ft. over E. slope.

34.92 Spur, slopes S.; desc. 87 ft. over W. slope to

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for ¼ sec. cor., with brass cap marked

¼	S 3
S 10	

1938

No bearing trees available.

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Desc. 87 ft. over W. slope.

43.38 Bottom of ravine, course S.; asc. 179 ft. over E. slope.

Survey: Subdivision of T. 11 N., R. 2 W.

64

Chains	
49.93	Spur, slopes S.; desc. 87 ft. over W. slope.
54.09	Bottom of ravine, course S. near head; asc. 144 ft. over SE. slope.
65.57	Barbed wire fence (4 wire) bears N. 60° E. and S. 60° W.
68.67	Ridge, bears N. 60° E. and S. 45° W.; desc. 219 ft. over NW. slope to
79.92	Cor. of secs. 3, 4, 9 and 10. Land, mountainous. Soil, rocky, 4th rate. Timber, juniper and pinyon. Undergrowth, oakbrush, laurel, buckbrush, catclaw and mahogany.
	N. 0° 02' W., on random line, bet. secs. 3 and 4.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.62	Intersect the cor. of secs. 3, 4, 33 and 34, on N. bdy. of the Tp., hereinbefore described.
	Thence, S. 0° 02' E., on true line, bet. secs. 3 and 4. Over mountainous land, thru scattering timber and dense undergrowth. Desc. 96 ft. over SE. slope.
6.55	Wash, 30 lks. wide, course SW.; asc. 162 ft. over NW. slope.
21.47	Spur, slopes SW.; desc. 157 ft. over SE. slope.
26.86	Bottom of ravine, course SW.; asc. 122 ft. over NW. slope.
30.69	Barbed wire fence, bears N. 52° W. and S. 52° E.
36.67	Ridge, bears N. 30° E. and S. 30° W.; desc. 38 ft. over SE. slope to
40.62	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	S4 S3 1938
	No bearing trees available. Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor. Desc. 392 ft. over SE. slope.
58.82	Ash Creek (dry) 30 lks. wide, course S. 60° W.; asc. 388 ft. over steep broken N. slope.
73.62	Spur, slopes W.; desc. 150 ft. over steep S. slope.
78.57	Bottom of ravine, course W.; asc. 56 ft. over NW. slope to

Survey: subdivision of T. 11 N., R. 2 W.

BOOK 4193

65

Chains	
80.62	Cor. of secs. 3, 4, 9 and 10. Land, mountainous. Soil, rocky, 4th rate. Timber, juniper, pinyon and cottonwood. Undergrowth, laurel, mahogany, oakbrush, catclaw and buckbrush.
	From the cor. of secs. 32 and 33, on S. bdy. of the Tp. hereinbefore described. N. 0° 02' W., bet. secs. 32 and 33. Over mountainous land, thru scattering timber and undergrowth. Asc. 49 ft. over SE. slope.
2.00	Round rocky peak, bears W.; 2.10 chs. dist.; desc. 29 ft. over NE. slope to
5.50	Ridge, bears NE. and SW.; desc. 200 ft. over NW. slope to
19.40	Bottom of ravine, course N. 20° E.; desc. 260 ft. over NE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked <div style="text-align: center;"> $\frac{1}{4}$ S32 S33 1938 No bearing trees available. Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor. Desc. 57 ft. over NE. slope to</div>
44.00	S. edge of bottom of canyon, bears E. and W.; thence across nearly level bottom of canyon.
47.60	Blind Indian Creek (dry) 120 lks. wide, course W. Continue across nearly level bottom of canyon.
49.00	Road, bears E. and W.
51.00	N. edge of bottom of canyon, bears E. and W.; leave bottom of canyon; asc. 315 ft. over SW. slope.
71.90	Spur, slopes SE.; asc. gradually over E. and SE. slopes to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock with a stone 2x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 28, 29, 32 and 33, with brass cap marked <div style="text-align: center;"> T11N R2W S29 S28 S32 S33 1938 No bearing trees available.</div>

Survey: Subdivision of T. 11 N., R. 2 W.

66

Chains	Land, mountainous. Soil, rocky, 3rd and 4th rates. Timber, oak, juniper and cottonwood. Undergrowth, oakbrush.
	East, on random line, bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Intersect the cor. of secs. 27, 28, 33 and 34.
	Thence
	west, on true line, bet. secs. 28 and 33.
	Over rolling land, thru scattering timber and dense undergrowth.
	Desc. 22 ft. over NW. slope.
5.84	Wash, 25 lks. wide, course SW.; desc. 50 ft. over S. and SW. slopes.
30.44	Wash, 30 lks. wide, course S. 10° E.; leave rolling and enter mountainous land; asc. 211 ft. over SE. slope to
40.02	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 2x6x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S\ 28}{S\ 33}$
	1938
	No bearing trees available.
	Asc. 34 ft. over E. slope.
42.24	Spur, slopes SE.; desc. 48 ft. over SW. slope.
51.14	Bottom of ravine, course S. 10° E.; asc. 92 ft. over E. slope.
56.02	U. S. Geological Survey Bench Mark, which is a $\frac{1}{2}$ in. diam. drill hole in large boulder, witnessed by a mound of stone, 6 ft. base, 3 ft. high, to N., and marked "USBM 4175", bears S., 1.05 chs. dist.
57.30	E. edge of top of ridge, bears N. 30° W. and S. 30° E. Thence across nearly level top of ridge
62.04	W. edge of top of ridge, bears N. 30° W. and S. 30° E.; leave top of ridge, desc. 138 ft. over SW. slope.
78.04	Head of ravine, course SE.; asc. 25 ft. over SE. slope to
80.04	Cor. of secs. 28, 29, 32 and 33.
	Land, rolling and mountainous. Soil, rocky, 3rd and 4th rates. Timber, oak, juniper and cottonwood. Undergrowth, oakbrush, laurel, catclaw and locust.
	N. 0° 02' W., bet. secs. 28 and 29.
	Over mountainous land, thru scattering timber and dense

Survey: Subdivision of T. 11 N., R. 2 W.

Chains

undergrowth.

Asc. 28 ft. over SE. slope.

4.80 Spur, slopes S. 60° W.; desc. 175 ft. over NW. slope.

11.70 Wash, 12 lks. wide, course S. 60° W.; asc. 115 ft. over SE. slope.

26.00 Point of spur, slopes SE.; leave mountainous and enter rolling land; desc. 38 ft. over NE. slope.

30.20 Drain, course S. 70° E.; asc. 73 ft. over S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock, with a stone 2x4x10 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked

S29 | S28

1938

No bearing trees available.

Thence over nearly level land.

40.50 Barbed wire fence (4 wire) bears N. 70° E. and S. 70° W.

63.20 Leave nearly level and enter rolling land; descend 128 ft. over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 22 ins. in ground to bedrock and in a mound of stone to top, for cor. of secs. 20, 21, 28 and 29, with brass cap marked

T11N R2W
S20 | S21
S29 | S28

1938

from which

A juniper, 6 ins. diam., bears N. 47¼° E., 167 lks. dist., marked T11N R2W S21 BT.

A juniper, 6 ins. diam., bears S. 64¼° E., 29 lks. dist., marked T11N R2W S28 BT.

A juniper, 4 ins. diam., bears S. 41¼° W., 110 lks. dist., marked BT only.

A juniper, 12 ins. diam., bears N. 21¼° W., 127 lks. dist., marked T11N R2W S20 BT.

Land, mountainous, rolling and nearly level.

Soil, rocky, 3rd and 4th rates.

Timber, juniper and oak.

Undergrowth, oakbrush, laurel, catclaw and cacti.

East, on random line, bet. secs. 21 and 28.

40.00 Set temp. ¼ sec. cor.

80.00 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Survey: Subdivision of T. 11 N., R. 2 W.

68

Chains	
	Thence
	S. 89° 59' W., on true line, bet. secs. 21 and 28.
	Over rolling land, thru scattering timber and undergrowth.
	Desc. 40 ft. over SW. slope to
10.00	Wash, 20 lks. wide, course SW.; asc. 15 ft. over SE. slope.
14.20	Spur, slopes SW.; desc. 20 ft. over W. slope.
21.30	Wash, 10 lks. wide, course SW.; asc. 60 ft. over SE. slope.
27.15	Spur, slopes SW.; desc. 100 ft. over W. slope.
35.00	Wash, 10 lks. wide, course SW.; asc. 31 ft. over SE. slope.
39.10	Dim trail, bears NW. and SE.
39.20	Spur, slopes SW.; desc. 4 ft. over W. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 2x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 21 \\ S 28 \end{array}$
	1938
	No bearing trees available.
	Desc. 74 ft. over W. slope.
66.00	Wash, 10 lks. wide, course NW.; asc. 40 ft. over NE. slope to
80.00	Cor. of secs. 20, 21, 28 and 29.
	Land, rolling.
	Soil, rocky, 3rd and 4th rates.
	Timber, oak and juniper.
	Undergrowth, oakbrush, laurel and locust.
	N. 0° 02' W., bet. secs. 20 and 21.
	Over rolling land, thru scattering timber and undergrowth.
	Desc. 70 ft. over NE. slope.
13.70	Wash, 20 lks. wide, course N. 47° W.; asc. 88 ft. over S. slope.
15.90	Dim trail, bears N. 47° W. and S. 47° E.
30.60	Spur, slopes W.; enter mountainous land; desc. 49 ft. over N. slope.
36.10	Wash, 5 lks. wide, course NW.; asc. 42 ft. over S. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S20 | S21

1938

Survey: Subdivision of T. 11 N., R. 2 W.:

E. 1198

69

Chains	from which
	A juniper, 12 ins. diam., bears S. 79° E., 29 lks. dist., marked $\frac{1}{4}$ S21 BT.
	A juniper, 6 ins. diam., bears S. 39 $\frac{1}{4}$ ° W., 93 lks. dist., marked $\frac{1}{4}$ S20 BT.
	Asc. 79 ft. over S. slope.
47.00	Spur, slopes S. 60° W. from E.; desc. 141 ft. over N. slope.
47.10	Barbed wire (3 wire) fence, bears N. 62 $\frac{1}{2}$ ° E. and S. 62 $\frac{1}{2}$ ° W. Dim trail along S. side of same.
49.28	Intersect line 3-4 of the boundary of forest Homestead Entry Survey No. 337 at a point 14.56 chs. S. 68° 53' W. 14.56 chs. from cor. No. 3 thereof, which is a granite stone witnessed by two juniper bearing trees and mound of stone NW. The stone and bearing trees are marked as described in the official record. Thence across said homestead.
59.00	Foot of descent, bears E. and W.; leave mountainous and enter nearly level land in bottom of Crooks Canyon.
65.46	Fence, bears N. 60° E. and S. 70° W.
67.20	Galvanized iron shed, bears W., 2,00 chs. dist.
69.90	Fence, bears E. and W.
70.70	Fence, bears E. and W.
72.57	Roy Shields' ranch house, bears S. 41° 43' W., 12.10 chs. dist.
75.51	Intersect line 1-2 of the boundary of forest Homestead Entry Survey No. 337 at a point 29.47 chs. N. 45° 23' E. from Cor. No. 1 thereof, which is a granite stone witnessed by two juniper bearing trees and mound of stone E. The stone and bearing trees are marked as described in the official record. Leave said homestead.
77.00	Fence, bears NE. and SW.
77.60	Crooks Canyon Wash, 30 lks. wide, course SW. Continue across bottom of Crooks Canyon.
80.00	True point for cor. of secs. 16, 17, 20 and 21 is in washed land subject to erosion from floods and where it is impracticable to monument the cor., therefore establish witness cor., S. 89° 57' W., 1.05 chs. dist. as hereinafter described.
	Land, rolling, mountainous and nearly level. Soil, gravelly and rocky, 3rd and 4th rates. Some sandy loam, 1st rate in bottom of Crooks Canyon. Timber, pinyon, juniper, oak, ash and cottonwood. Undergrowth, oakbrush, catclaw and arrowweed.
40.00	N. 89° 59' E., on random line, bet. secs. 16 and 21. Set temp. $\frac{1}{4}$ sec. cor.
79.98	Intersect N. and S. line 5 lks. S. of the cor. of secs. 15, 16, 21 and 22.

Survey: Subdivision of T. 11 N., R. 2 W.

70

Chains	
	Thence
	S. 89°57' W., on true line bet. secs. 16 and 21.
	Over mountainous land, thru scattering timber and dense undergrowth.
	Along S. slope of spur sloping W., the top of which is about 70 lks. N. of line. Desc. 80 ft. to
22.00	Spur, slopes S. 70° W., from N. 85° E.; desc. 60 ft. over NW. slope.
36.58	Draw, 10 lks. wide, course N. 70° W.; asc. 40 ft. over NE. slope to
39.99	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor.; with brass cap marked
	$\frac{S\ 16}{\frac{1}{4}\ S\ 21}$
	1938
	from which
	A pinyon, 6 ins. diam., bears N. 66 $\frac{1}{2}$ ° E., 40 lks. dist., marked $\frac{1}{4}$ S16 BT.
	A juniper, 6 ins. diam., bears S. 49 $\frac{1}{2}$ ° E., 33 lks. dist., marked $\frac{1}{4}$ S21 BT.
	Asc. 6 ft. over NE. slope to
40.58	Edge of spur, bears N. 60° W. and S. 60° E. Thence across nearly level top of spur sloping N. 60° W.
42.28	Barbed wire fence (3 wire) bears N. 62° W. and S. 62° E.
46.48	Edge of spur bears N. 60° W. and S. 60° E.; leave top of spur; desc. 66 ft. over SW. slope.
47.78	Head of draw, course NW.; asc. 50 ft. over NE; slope.
63.68	Point of spur, slopes NW.; desc. 109 ft. over NW. slope.
68.82	Irrigation ditch, 3 $\frac{1}{2}$ lks. wide, 1 ft. deep, course SW.
70.45	Foot of descent, bears NE. and SW. Thence over nearly level land in bottom of Crooks Canyon.
71.96	Intersect line 2-3 of boundary of forest Homestead Entry Survey No. 337 at a point 2.89 chs. S. 12°20'E. from Cor. No. 2 thereof, which is a granite stone witnessed by two oak bearing trees and mound of stone S. The stone and bearing trees are marked as described in the official record. Thence across said homestead.
75.43	Intersect line, 1-2 of the boundary of forest Homestead Entry Survey No. 337 at a point 4.01 chs. S. 45°23'W. from Cor. No. 2 thereof. Leave said homestead.
75.68	Fence, bears NE. and SW.
76.38	Crooks Canyon Wash, 30 lks. wide, course SW. Continue across bottom of canyon.
79.98	True point for cor. of secs. 16, 17, 20 and 21 (W.C. 1.05 chs. S. 89°57' W.)

Survey: Subdivision of T. 11 N., R. 2 W.

E 11 N 4188

71

Chains

Land, mountainous, rolling and nearly level.
Soil, gravelly and rocky, 3rd and 4th rates. Some sandy
1st rate in bottom of Crooks Canyon.
Timber, juniper, oak, pinyon, ash, cottonwood and hack-
berry.
Undergrowth, oakbrush, manzanita and catclaw.

From true point for cor. of secs. 16, 17, 20 and 21.

N. 0° 02' W., bet. secs. 16 and 17.

Over nearly level land, thru scattering timber and dense
undergrowth, in bottom of Crooks Canyon.

- 0.40 Mine road, bears NE. and SW.
- 3.80 NW. edge of bottom of Crooks Canyon, bears E. and W.
General bearing NE. and SW.; leave bottom of canyon;
asc. 35 ft. to
- 5.00 Top of bank, bears E. and W.; enter rolling land; asc. 57
ft. over S. slope.
- 14.20 Barbed wire fence (4 wire) bears NE. and SW.
- 18.60 Low ridge, bears E. and W.; desc. 61 ft. over N. slope.
- 25.30 Wash, 20 lks. wide, course S. 70° W.; asc. 38 ft. over
S. slope to
- 34.00 Foot of sandstone bank, bears E. and W.; asc. 25 ft. to
- 35.15 Top of bank, bears E. and W.; thence over gently rolling
land. Asc. 15 ft. over SW. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in
ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
- S17 | S16
- 1938
- from which
- A pinyon, 10 ins. diam., bears S. 30° E., 27 lks.
dist., marked $\frac{1}{4}$ S16 BT.
- A pinyon, 8 ins. diam., bears N. 81° W., 20 lks.
dist., marked $\frac{1}{4}$ S17 BT.
- Continue over gently rolling land; asc. gradually over
SW. and W. slopes.
- 50.00 Barbed wire fence (3 wire) bears NW. and SE;
- 70.88 Top of bank, bears NE. and SW.; enter mountainous land;
desc. 87 ft. over steep NW. slope.
- 73.00 Wash, 10 lks. wide in bottom of ravine, course SW.; asc.
94 ft. over S. slope to
- 77.85 Top of bank, bears E. and SW.; enter rolling land; asc.
5 ft. over S. slope.
- 79.30 Spur, slopes W.; desc. 10 ft. over NW. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in

Survey: Subdivision of T. 11 N., R. 2 W.

72

Chains

ground, for cor. of secs. 8, 9, 16 and 17, with brass cap marked

T11N	R2W
S8	S9
S17	S16

1938

from which

A pinyon, 8 ins. diam., bears N. $64\frac{1}{2}^\circ$ E., 39 lks. dist., marked T11N R2W S9 BT.

A pinyon, 12 ins. diam., bears S. 34° E., 60 lks. dist., marked T11N R2W S16 BT.

A pinyon, 14 ins. diam., bears S. $49\frac{1}{4}^\circ$ W., 99 lks. dist., marked T11N R2W S17 BT.

A pinyon, 10 ins. diam., bears N. $62\frac{1}{2}^\circ$ W., 37 lks. dist., marked T11N R2W S8 BT.

Land, nearly level, rolling and mountainous.

Soil, rocky, 3rd and 4th rates.

Timber, pinyon, juniper and oak.

Undergrowth, oakbrush, manzanita and catclaw.

N. $89^\circ 57'$ E., on random line, bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line 2 lks. N. of the cor. of secs. 9, 10, 15 and 16.

Thence,

S. $89^\circ 58'$ W., on true line, bet. secs. 9 and 16.

Over mountainous land, thru scattering timber and dense undergrowth.

Desc. 33 ft. over SW. slope.

1.04 Bottom of ravine, 10 lks. wide, course SE.; asc. 208 ft. over SE. slope.

22.24 Spur, slopes S.; desc. 114 ft. over W. slope.

26.74 Wash, 15 lks. wide, course S.; asc. 117 ft. over E. slope.

31.24 Spur, slopes S.; desc. 66 ft. over W. slope to

36.75 Draw, course S., enter rolling lands; asc. 19 ft. over E. slope to

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 9
	S 16

1938

from which

A pinyon, 6 ins. diam., bears S. $31\frac{1}{2}^\circ$ E., 64 lks. dist., marked $\frac{1}{4}$ S16 BT.

A pinyon, 6 ins. diam., bears N. $57\frac{1}{2}^\circ$ W., 24 lks. dist., marked $\frac{1}{4}$ S9 BT.

Survey; Subdivision of T. 11 N., R. 2 W.

BOOK 4198

73

Chains	
	Asc. 20 ft. over E. slope.
44.29	Ridge, bears N. and S.; desc. 37 ft. over SW. and S. slopes to
51.14	Spur, slopes S. 80° W. Trail bears N. 20° E. and S., extends to corral 2.00 chs. NE. and at 1.00 ch. S. turns to E.; desc. 52 ft. over NW. slope to
56.88	Desc. gradually over N. slope to
59.27	Asc. 47 ft. over NE. slope.
70.04	Short spur, slopes N.; desc. 25 ft. over NW. slope to
80.04	Cor. of sees. 8, 9, 16 and 17.
	Land, mountainous and rolling. Soil, rocky, 3rd and 4th rates. Timber, juniper, pinyon and oak. Undergrowth, oakbrush, manzanita, cacti, laurel and buckbrush.
	N. 0° 02' W., bet. secs. 8 and 9.
	Over rolling land, thru scattering timber and undergrowth.
	Desc. 96 ft. over NW. slope.
14.60	Barbed wire fence (4 wire) bears E. and W.
39.00	Foot of descent bears NE. and SW.; leave rolling and enter nearly level land.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 24 ins. in ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	†
	S8 S9
	1938
	from which
	• A willow, 6 ins. diam., bears S. 61½° E., 36 lks. dist., marked $\frac{1}{4}$ S9 BT;
	• A willow, 6 ins. diam., bears S. 78° W., 172 lks. dist., marked $\frac{1}{4}$ S8 BT.
42.10	Ash Creek (dry) 30 lks. wide, course S. 60° W. Continue over nearly level land.
49.40	Foot of slope bears NE. and SW.; leave nearly level and enter mountainous land; asc. 127 ft. over SE. slope to
56.50	SE. edge of top of Battleship Butte, bearing NE. and SW. Thence across top of same, extending NE. about 3 chs. and SW. about 2 chs.
58.90	NW. edge of top of Battleship Butte bearing NE. and SW. Leave top of butte; desc. 106 ft. over precipitous NW. slope to
61.00	Foot of butte, bears NE. and SW.; thence over gently rolling land; ascend 45 ft. over E. and SE. slopes to

Chains							
80.00	<p>Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 4, 5, 8 and 9, with brass cap marked</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td>S 5</td> <td>S 4</td> </tr> <tr> <td>S 8</td> <td>S 9</td> </tr> </table> </div> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <p>A pinyon, 12 ins. diam., bears N. 50° E., 77 lks. dist., marked T11N R2W S4 BT.</p> <p>A juniper, 8 ins. diam., bears S. 47½° E., 63 lks. dist., marked T11N R2W S9 BT.</p> <p>A juniper, 6 ins. diam., bears S. 76½° W., 77 lks. dist., marked T11N R2W S8 BT.</p> <p>A pinyon, 14 ins. diam., bears N. 6¼° W., 70 lks. dist., marked T11N R2W S5 BT.</p> <p>Land, rolling, nearly level, mountainous and gently rolling. Soil, rocky, 3rd and 4th rates. Timber, juniper, pinyon, oak, willow and ash. Undergrowth, oakbrush and manzanita.</p>	T11N	R2W	S 5	S 4	S 8	S 9
T11N	R2W						
S 5	S 4						
S 8	S 9						
40.00	<p>N. 89° 58' E., on random line, bet. secs. 4 and 9.</p> <p>Set temp. ¼ sec. cor.</p>						
80.02	<p>Intersect the cor. of secs. 3, 4, 9 and 10.</p> <p>Thence,</p> <p>S. 89° 58' W., on true line, bet. secs. 4 and 9.</p> <p>Over mountainous land, thru scattering timber and dense undergrowth.</p> <p>Desc. 107 ft. over NW. slope.</p>						
5.02	<p>Bottom of ravine, 12 lks. wide, course N.; asc. 101 ft. over NE. slope.</p>						
14.52	<p>Spur, slopes NW.; desc. 269 ft. over W. slope.</p>						
29.22	<p>Bottom of ravine, course NW.; asc. 20 ft. over NE. slope.</p>						
30.62	<p>Point of spur, slopes NW.; desc. 151 ft. over NW. slope.</p>						
34.82	<p>Ash Creek (dry) 30 lks. wide, course SW.; asc. 116 ft. over broken SE. slope to ¼ sec. cor.</p>						
37.02	<p>Barbed wire fence (3 wire) bears N. and S. Fence cor. bears S. 20 lks. dist. from which fences extend W. and N.</p>						
40.01	<p>Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for ¼ sec. cor., with brass cap marked</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr> <td>¼</td> <td>S 4</td> </tr> <tr> <td></td> <td>S 9</td> </tr> </table> </div> <p style="text-align: center;">1938</p>	¼	S 4		S 9		
¼	S 4						
	S 9						

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

Chains	<p>No bearing trees available.</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.</p> <p>Asc. 80 ft. over SE. slope.</p> <p>49.72 Spur, slopes SW.; desc. 200 ft. over W. slope to</p> <p>57.62 Foot of descent; bears N. and S. Leave mountainous and enter nearly level land.</p> <p>59.42 Barbed wire fence (4 wire) bears N. and S. Fence cor. bears S. 80 lks. dist. from which fences extend E. and N.</p> <p>72.02 Wash, 15 lks. wide, course S.; enter gently rolling land; asc. 16 ft. over SE. slope to</p> <p>80.02 Cor. of secs. 4, 5, 8 and 9.</p> <p>Land, mountainous, nearly level and gently rolling. Soil, rocky, 3rd and 4th rates. Timber, juniper, pinyon, oak, ash and willow. Undergrowth, oakbrush and manzanita.</p> <hr/> <p>N. 0° 02' W., on random line, bet. secs. 4 and 5.</p> <p>40.00 Set temp. ¼ sec. cor.</p> <p>80.86 Intersect the cor. of secs. 4, 5, 32 and 33, on N. bdy. of the Tp., hereinbefore described.</p> <p>Thence,</p> <p>S. 0° 02' E., on true line, bet. secs. 4 and 5.</p> <p>Over mountainous land, thru scattering timber and undergrowth.</p> <p>Asc. 146 ft. over NW. slope.</p> <p>8.86 Ridge, bears NE. and SW.; desc. 230 ft. over SE. slope to</p> <p>25.86 Top of sandstone bluff, bears NE. and SW. facing SE.; desc. 136 ft. over same.</p> <p>30.36 Bottom of gulch, 10 lks. wide, course S. 70° W.; a spring, bears W., 100 lks. dist. Asc. 85 ft. over steep NW. slope to</p> <p>40.86 True point for ¼ sec. cor. falls on precipitous sandy slope where it is impracticable to monument the cor., therefore establish witness cor.; S. 0° 02' E., 1.70 chs. dist.</p> <p>Asc. 40 ft. over steep NW. slope to</p> <p>42.46 Spur, slopes SW.; across top of same to</p> <p>42.56 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for witness cor. to ¼ sec. cor., with brass cap marked</p> <p style="text-align: center;">W C ¼ S5 S4 1938</p>
--------	---

Chains	
	<p style="text-align: right;">from which</p> <p>A pinyon, 6 ins. diam., bears S. $62\frac{1}{2}^{\circ}$ E., 45 lks. dist., marked WC $\frac{1}{4}$ S4 BT.</p> <p>A pinyon, 6 ins. diam., bears S. $62\frac{1}{2}^{\circ}$ W., 107 lks. dist., marked WC $\frac{1}{4}$ S5 BT.</p> <p>Thence over rolling land:</p> <p>Desc. 55 ft. over SE. slope.</p>
44.86	Barbed wire fence (4 wire) bears N. 10° W. and S. 10° E.
50.56	Thence along E. slope descending gradually to
66.05	Top of bank, bears NE. and SW.; desc. 83 ft. over steep SE. slope to
69.45	Foot of bank, bears NE. and SW.; enter gently rolling land; desc. 30 ft. over SE. slope to
80.86	Cor. of secs. 4, 5, 8 and 9.
	<p>Land, mountainous and rolling.</p> <p>Soil, sandy and rocky, 3rd and 4th rates.</p> <p>Timber, juniper, oak, pinyon, ash and cypress.</p> <p>Undergrowth, oakbrush, manzanita and cacti.</p>
	<p>From cor. of secs. 31 and 32, on S. bdy. of Tp. hereinbefore described.</p> <p>N. $0^{\circ} 03'$ W., bet. secs. 31 and 32.</p> <p>Over mountainous land, thru scattering timber and undergrowth.</p> <p>Desc. 63 ft. over NW. slope.</p>
3.58	Bottom of ravine, 10 lks. wide, course W.; asc. 31 ft. over S. slope.
4.60	Spur, slopes W.; desc. 32 ft. over NW. slope.
5.82	Bottom of ravine; 4 lks. wide, course SW.; asc. 103 ft. over S. slope.
12.94	Road, bears NE. and SW.
14.60	Ridge, bears NE. and SW.; desc. 113 ft. over NW. slope.
24.10	Foot of descent, bears NE. and SW.; thence over nearly level land.
28.01	Blind Indian Creek (dry) 60 lks. wide, course S. 30° W.; Continue across nearly level land.
39.60	Foot of ascent, bears NE. and SW.; enter mountainous land; asc. 26 ft. over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	<p>4</p> <p>S31 S32</p> <p>1938</p> <p style="text-align: right;">from which</p>

Survey: Subdivision of T. 11 N., R. 2 W.

4198

Chains

A juniper, 5 ins. diam., bears N. $33\frac{1}{4}^{\circ}$ E., 196 lks. dist., marked $\frac{1}{4}$ S32 BT.

A juniper, 4 ins. diam., bears N. $73\frac{3}{4}^{\circ}$ W., 20 lks. dist., marked $\frac{1}{4}$ S31 BT.

Asc. 343 ft. over SE. slope.

64.30 Spur, slopes S. 5° W.; asc. 72 ft. along W. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in ground to bedrock with a stone 4x5x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T11N	R2W
S30	S29
S31	S32

1938

from which

A juniper, 3 ins. diam., bears N. $85\frac{1}{4}^{\circ}$ E., 36 lks. dist., marked BT only.

A juniper, 5 ins. diam., bears S. $10\frac{1}{2}^{\circ}$ E., 51 lks. dist., marked T11N R2W S32 BT.

No other bearing trees available.

Land, mountainous and nearly level.
Soil, rocky, 3rd and 4th rates.
Timber, juniper and oak.
Undergrowth, oakbrush, laurel and mahogany.

East, on random line, bet. secs. 29 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect N. and S. line 2 lks. S. of the cor. of secs. 28, 29, 32 and 33.

Thence

S. $89^{\circ} 59'$ W., on true line, bet. secs. 29 and 32.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 32 ft. over SE. slope.

4.72 Spur, slopes SW.; desc. 262 ft. over W. slope.

16.94 Bottom of ravine, 4 lks. wide, course S. 30° W.; asc. 60 ft. over SE. slope.

24.44 Spur, slopes S.; desc. 93 ft. over SW. slope to

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor.; with brass cap marked

$\frac{1}{4}$ S 29
S 32

1938

from which

A juniper, 4 ins. diam., bears N. 11° E., 74 lks.

Survey: Subdivision of T. 11 N., R. 2 W.

78

Chains	<p>dist., marked BT only.</p> <p>A juniper, 12 ins. diam., bears S. $10\frac{1}{2}^{\circ}$ E., 150 lks. dist., marked $\frac{1}{4}$ S32 BT.</p> <p>Desc. 25 ft. over SW. slope.</p>
40.85	Bottom of ravine, 6 lks. wide, course S.; asc. 33 ft. over SE. slope.
44.84	Spur, slopes S.; desc. 67 ft. over SW. slope.
59.54	Bottom of ravine, 6 lks. wide, course S.; asc. 379 ft. over E. slope.
77.94	Top of knoll, bears N. and S.; desc. 16 ft. over W. slope to
79.94	Cor. of secs. 29, 30, 31 and 32.
	<p>Land, mountainous.</p> <p>Soil, rocky, 3rd and 4th rates.</p> <p>Timber, juniper and oak.</p> <p>Undergrowth, oakbrush, manzanita, laurel and cacti.</p>
	<p>West, bet. secs. 30 and 31.</p> <p>Over mountainous land, thru scattering timber and undergrowth.</p> <p>Desc. 340 ft. over W. slope.</p>
13.19	Barbed wire fence (4 wire) bears N. 30° E. and S. 30° W.
16.80	Wash, 10 lks. wide, course S.; enter rolling land; asc. 34 ft. over E. slope.
26.90	Knoll, bears S. 100 lks. dist., in ridge bearing N. and S.; desc. 60 ft. over NW. slope.
33.70	Wash, 5 lks. wide; course SW.; enter gently rolling and nearly level land; asc. gradually over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 30 \\ S 31 \end{array}$ <p>1938</p> <p>No bearing trees available.</p> <p>Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p> <p>Continue over gently rolling and nearly level land; asc. gradually over SE. slope.</p>
49.20	Road; bears NE. and SW., on low spur sloping SW.; desc. 24 ft. over W. slope.
61.60	Wash, 15 lks. wide, 12 ft. deep, course S.; asc. gradually over E. slope.
67.08	Barbed wire fence (3 wire) bears N. and S. on low spur sloping S.; desc. 15 ft. over W. slope.
74.10	Wash; 8 lks. wide, 6 ft. deep, course S.; asc. gradually

Survey: Subdivision of T. 11 N., R. 2 W.

D. 11 N. 4198

79

Chains	over SE. and S. slopes to												
79.97	Intersect W. bdy. of the Tp. Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for closing cor. of secs. 30 and 31, with brass cap marked												
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">T11N</td> <td style="padding: 0 5px;">T11N</td> <td></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R3W</td> <td style="padding: 0 5px;">S30</td> <td style="padding: 0 5px;">CC</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S36</td> <td style="padding: 0 5px;">S31</td> <td></td> </tr> <tr> <td></td> <td style="padding: 0 5px;">R2W</td> <td></td> </tr> </table>	T11N	T11N		R3W	S30	CC	S36	S31			R2W	
T11N	T11N												
R3W	S30	CC											
S36	S31												
	R2W												
	1938												
	No bearing trees available.												
	Dig pits 18x18x12 ins., N., S. and E. of post, 3 ft. dist.												
	From the point of intersection the cor. of secs. 25 and 36, T. 11 N., R. 3 W., hereinbefore described, bears N. 0° 06' E., 7.36 chs. dist.												
	Land, mountainous, rolling, nearly level and gently rolling. Soil, rocky, 3rd and 4th rates. Timber, oak, juniper and palo verde. Undergrowth, oakbrush, laurel, manzanita and cacti.												
	From the cor. of secs. 29, 30, 31 and 32.												
	N. 0° 03' W., bet. secs. 29 and 30.												
	Over mountainous land, thru scattering timber and dense undergrowth.												
	Desc. 24 ft. over W. slope.												
3.38	Desc. 252 ft. over NW. slope.												
18.12	Barbed wire fence (4 wire) bears NE. and SW.												
18.80	Wash, 10 lks. wide, course SW.; leave mountainous and enter rolling land; asc. 20 ft. over SE. slope.												
20.50	Point of low spur, slopes SE.; desc. 11 ft. over NE. slope.												
22.00	Same wash, 10 lks. wide, course SE.; asc. 57 ft. over SW. slope to												
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in ground to bedrock with a stone 2x3x6 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked												
	4.												
	S 30 S 29												
	1938												
	No bearing trees available.												
	Asc. 18 ft. over SW. slope.												
42.60	Low ridge, bears E. and W.; drainage divide bet. Blind Indian and Milk Creeks; desc. 47 ft. over N. slope,												

Chains							
52.10	Draw, 7 lks. wide, course N. 80° W.; asc. 18 ft. over S. slope.						
56.00	Low flat topped spur, slopes W.; desc. 30 ft. over N. slope.						
60.20	Wash, 20 lks. wide, course W.; asc. 49 ft. over S. slope.						
66.75	Flat topped spur, slopes W.; desc. 25 ft. over N. slope.						
70.60	Wash, 6 lks. wide, course W.; asc. 30 ft. over SW. slope.						
78.15	Low spur, slopes NW.; desc. 25 ft. over NE. slope to						
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock, and in a mound of stone to top, for cor. of secs. 19, 20, 29 and 30, with brass cap marked						
	<table border="1" style="margin: auto;"> <tr> <td>T11N</td> <td>R2W</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> </table>	T11N	R2W	S19	S20	S30	S29
T11N	R2W						
S19	S20						
S30	S29						
	1938						
	from which						
	A juniper, 13 ins. diam., bears N. 18½° E., 71 lks. dist., marked T11N R2W S20 BT.						
	A pinyon, 6 ins. diam., bears S. 63½° E., 245 lks. dist., marked T11N R2W S29 BT.						
	A juniper, 5 ins. diam., bears S. 61½° W., 109 lks. dist., marked T11N R2W S30 BT.						
	A juniper, 10 ins. diam., bears N. 18½° W., 69 lks. dist., marked T11N R2W S19 BT.						
	Land, mountainous and rolling. Soil, gravelly and rocky, 3rd and 4th rates. Timber, oak, juniper and pinyon. Undergrowth, oakbrush, laurel and cacti.						
	N. 89° 59' E., on random line, bet. secs. 20 and 29.						
40.00	Set temp. ¼ sec. cor.						
79.94	Intersect N. and S. line 4 lks. N. of the cor. of secs. 20, 21, 28 and 29.						
	Thence						
	N. 89° 59' W., on true line, bet. secs. 20 and 29.						
	Over rolling land, thru scattering timber and undergrowth.						
	Asc. 31 ft. over NE. slope to						
4.85	Enter mountainous land; asc. 197 ft. over E. slope.						
17.23	Top of round knoll; desc. 176 ft. over W. slope.						
26.00	Bottom of ravine; course N. 5° W.; asc. 143 ft. over E. slope.						
33.96	Spur, slopes N. 5° W.; desc. 92 ft. over W. slope.						
38.00	Bottom of ravine; 6 lks. wide, course N. 2° W.; asc. 20 ft. over E. slope to						

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

81

Chains

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{S 20}{S 29}$$

1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

Asc. 50 ft. over E. slope.

50.50 Spur, slopes N.; desc. 27 ft. over W. slope.

53.90 Head of draw, course N.; asc. 39 ft. over E. slope.

64.00 Spur, slopes N.; desc. 317 ft. over broken W. and NW. slopes.

78.20 Bottom of ravine, course NW.; asc. 25 ft. over NE. slope to

79.94 Cor. of secs. 19, 20, 29 and 30.

Land, rolling and mountainous.
Soil, rocky, 3rd and 4th rates.
Timber, oak and juniper.
Undergrowth, oakbrush and catclaw.

West, bet. secs. 19 and 30.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 8 ft. over NE. slope.

1.60 Spur, slopes NW.; desc. 119 ft. over W. slope.

16.00 Bottom of ravine, 10 lks. wide, course NW.; asc. 49 ft. over NE. slope.

18.35 Point of spur, slopes NW.; desc. 54 ft. over W. slope to

19.80 Left bank of Milk Creek, bears NE. and SW. Thence across dry bed of Milk Creek about 200 lks. wide, course SW.

21.20 Right bank of Milk Creek, bears NE. and SW.; leave creek bed; asc. 10 ft. over SE. slope.

23.27 Desc. 12 ft. over SW. slope to

27.00 Right bank of Milk Creek, bears NW. and SE.; reenter dry creek bed, course NW.

29.30 Road, following Milk Creek, bears NE. and SW.

30.77 Left bank of Milk Creek, bears NW. and SE.; leave creek bed. Thence along rolling N. slope descending gradually to $\frac{1}{4}$ sec. cor.

33.80 Same road, bears NW. and SE.

35.60 Same road, bears NE. and SW.

36.80 Same road, bears SE. and NW.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{S\ 19}{S\ 30}$$

1938

from which

An ash, 7 ins. diam., bears N. 13° E., 257 lks. dist., marked $\frac{1}{4}$ S19 BT.

An oak, 6 ins. diam., bears S. $35\frac{1}{2}^{\circ}$ W., 95 lks. dist., marked $\frac{1}{4}$ S30 BT.

Desc. gradually over NW. slope.

42.90 Same road, bears NE. and SW.

44.30 Left bank of Milk Creek, bears NE. and SW.; thence across dry bed of creek about 150 lks. wide, course SW.

46.90 Right bank of Milk Creek, bears NE. and SW.; leave creek bed; asc. 58 ft. over broken SE. slope.

49.81 Point of spur, slopes SW.; desc. 48 ft. over SW. slope.

60.00 Bottom of ravine, 14 lks. wide, course S.; asc. 60 ft. over E. slope.

63.60 Spur, slopes S.; desc. 34 ft. over SW. and S. slopes to closing cor.

65.44 Barbed wire fence (4 wire) bears N. and S.

76.03 Intersect W. bdy. of the Tp.,
Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for closing cor. of secs. 19 and 30, with brass cap marked

T11N	T11N	
R3W	S19	CC
S25	S30	
	R2W	

1938

from which

A juniper, 14 ins. diam., bears N. 86° E., 239 lks. dist., marked T11N R2W S19 CC BT.

A juniper, 14 ins. diam., bears S. 64° E., 226 lks. dist., marked T11N R2W S30 CC BT.

From the point of intersection the cor. of secs. 24 and 25, T. 11 N., R. 3 W., hereinbefore described, bears N. $6^{\circ} 28'$ E., 5.32 chs. dist.

Land, mountainous and rolling.
Soil, rocky, 3rd and 4th rates.
Timber, juniper, pinyon, oak, ash and cottonwood.
Undergrowth, oakbrush, locust, laurel and cacti.

From the cor. of secs. 19, 20, 29 and 30.

N. $0^{\circ} 03'$ W., bet. secs. 19 and 20.

Chains	Over mountainous land, thru scattering timber and dense undergrowth.
	Desc. 48 ft. over NE. slope.
1.40	Bottom of ravine, 3 lks. wide, course NW.; asc. 40 ft. over SW. slope.
4.00	Desc. 16 ft. over W. slope.
8.00	Asc. 91 ft. over SW. slope.
21.00	Spur, slopes NW.; desc. 162 ft. over steep N. slope to
34.80	Left bank of Milk Creek, bears E. and SW.; thence across creek bed. Desc. 10 ft. to
36.00	Stream of running water, 6 lks. wide, 2 ins. deep, course SW. from E. Continue across creek bed; asc. 7 ft. to right bank.
36.95	Road, bears W. and S. 80° E.
39.00	Right bank of Milk Creek, bears E. and SW.; leave creek bed and reenter mountainous land; asc. 24 ft. over steep S. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	4
	S19 S20
	1938
	from which
	A hackberry, 3 ins. diam., bears S. 56 $\frac{1}{2}$ ° E., 28 lks. dist., marked BT only.
	A juniper, 7 ins. diam., bears S. 23 $\frac{3}{4}$ ° W., 72 lks. dist., marked $\frac{1}{4}$ S19 BT.
	Asc. 216 ft. over steep S. slope.
43.00	Barbed wire fence (4 wire) bears E. and W.
45.00	Spur, slopes SW.; asc. 120 ft. over W. and SW. slopes to
64.20	Spur, slopes W.; desc. 204 ft. over NW. and W. slopes to
73.10	Bend in wash, 15 lks. wide, course SW. from NW., bears W., 40 lks. dist.; asc. 72 ft. over SW. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 17, 18, 19 and 20, with brass cap marked
	T11N R2W S18 S17 S19 S20
	1938
	from which
	A juniper, 8 ins. diam., bears N. 55 $\frac{3}{4}$ ° E., 99 lks. dist., marked T11N R2W S17 BT.

Chains

A juniper, 16 ins. diam., bears S. 45 $\frac{1}{2}$ ° E., 88 lks. dist., marked T11N R2W S20 BT.

A juniper, 4 ins. diam., bears S. 56° W., 94 lks. dist., marked BT only.

A juniper, 6 ins. diam., bears N. 87 $\frac{1}{4}$ ° W., 406 lks. dist., marked T11N R2W S18 BT.

Land, mountainous.
Soil, rocky, 3rd and 4th rates.
Timber, juniper and mesquite.
Undergrowth, oakbrush, mahogany, el jerito, cacti and catclaw.

S. 89° 59' E., on random line, bet. secs. 17 and 20.

40.00' Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect N. and S. line 9 lks. S. of the true point for cor. of secs. 16, 17, 20 and 21 (W.C. 1.05 chs. S. 89° 57' W.)

From true point for sec. cor.

S. 89° 57' W., on true line, bet. secs. 17 and 20.


Over nearly level land, thru scattering timber and undergrowth.

In bottom of Crooks Canyon, course SW.

0.25 Mine road, bears NE. and SW.

0.80 NW. edge of bottom of Crooks Canyon, bears N. and SW.; general bearing NE. and SW.; leave bottom of canyon and enter mountainous land; asc. 72 ft. over steep SE. slope.

1.05 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bed rock, and in a mound of stone to top, for witness cor. to cor. of secs. 16, 17, 20 and 21, with brass cap marked

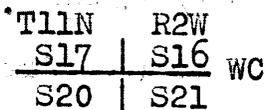

1938

from which

A cottonwood, 24 ins. diam., bears N. 72° E., 133 lks. dist., marked WC T11N R2W S16 BT.

An ash, 12 ins. diam., bears S. 74 $\frac{1}{2}$ ° E., 227 lks. dist., marked WC T11N R2W S21 BT.

A juniper, 8 ins. diam., bears S. 39° W., 134 lks. dist., marked WC T11N R2W S20 BT.

A juniper, 6 ins. diam., bears N. 43 $\frac{1}{4}$ ° W., 57 lks. dist., marked T11N R2W S17 BT.

4.66 Top of steep slope bears N. and SW. Leave mountainous and enter rolling land; asc. 25 ft. over gradual SE. slope to.

15.00 Spur, slopes S. 30° W.; desc. 100 ft. over W. slope.

Chains	
18.37	Barbed wire fence (3 wire) bears N. 44°20'E. and S. 44°20'W.
18.61	Intersect line 3-4 of boundary of forest Homestead Entry Survey No. 365 at a point S. 45°20'W. 4.40 chs. from Cor. No. 3 thereof which is a diorite stone witnessed by two juniper bearing trees and a mound of stone W. The stone and bearing trees are marked as described in the official record. Thence across said homestead.
28.50	Foot of descent, bears NE. and S.; leave rolling and enter nearly level bottom land.
30.00	Wash, 8 lks. wide, course SW.; continue over nearly level bottom land.
30.25	Barbed wire fence (2 wire) bears N. and SW.; enter small field.
34.35	Barbed wire fence (2 wire) bears NW. and SE.; leave field.
36.10	Left bank of Milk Creek, bears N. and S.; thence across creek bed.
36.50	Stream of running water, 4 lks. wide, 1 in. deep, course S..
37.00	Right bank of Milk Creek, bears N. and S.; leave creek bed; continue over nearly level bottom land.
37.23	Intersect line 1-4 of the boundary of forest Homestead Entry Survey No. 365 at a point N. 1° 03' W., 18.06 chs. from cor. No. 4 thereof, which is a granite stone witnessed by two bearing trees and a mound of stone NE. Stone and bearing trees are marked as described in the official record. Leave said homestead.
37.30	Barbed wire fence (3 wire) bears NW. and SE.
39.20	Road, bears N. and S.
39.98	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S 17}{S 20}$
	1938
	from which
	A juniper, 4 ins. diam., bears S. 68° W., 250 lks. dist., marked $\frac{1}{4}$ S20 BT.
	A juniper, 6 ins. diam., bears N. 63° W., 183 lks. dist., marked $\frac{1}{4}$ S17 BT.
	Continue over nearly level bottomland.
42.00	Foot of ascent, bears N. 20° W. and S. 20° E.; leave nearly level bottom land and enter mountainous land; asc. 100 ft. over E. slope.
45.92	Spur, slopes S. 10° E.; desc. 40 ft. over SW. slope.
49.85	Bottom of ravine, 4 lks. wide, course SE.; asc. 280 ft. over E. slope.
71.10	Spur ridge, bears S. 5° E. from N. 10° E., sloping S.; desc. 197 ft. over SW. slope to

Chains	
79.96	Cor. of secs. 17, 18, 19 and 20. Land, mountainous, rolling and nearly level. Soil, rocky, 3rd and 4th rates, except in bottom land along Milk Creek, where the soil is sandy 1st and 2nd rates. Timber, cottonwood, juniper, oak, ash and mesquite. Undergrowth, oakbrush, mahogany, catclaw and cacti.
	West, bet. secs. 18 and 19. Over mountainous land, thru scattering timber and dense undergrowth. Desc. 65 ft. over SW. slope.
3.00	Wash, 15 lks. wide, course SE. in bottom of rocky ravine; asc. 473 ft. over steep NE. slope.
30.50	Ridge, bears N. and S.; a saddle in same, 80 ft. below this point bears N., 8 chs. dist.; desc. 233 ft. over broken NW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in ground to bedrock with a stone 2x4x8 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{c} \frac{S\ 18}{S\ 19} \\ 1938 \end{array}$ No bearing trees available. Desc. 184 ft. over broken W. slope.
48.60	Bottom of ravine, course S.; asc. 77 ft. over E. slope.
51.30	Spur, slopes S.; desc. 10 ft. over SW. slope.
52.90	Head of ravine, course S.; asc. 85 ft. over SE. slope.
56.50	Spur, slopes SW.; desc. 64 ft. over W. slope.
61.85	Head of wash, course S. 5° W.; desc. 63 ft. over steep S. slope to closing cor.
66.00	Barbed wire fence (4 wire) bears N. and S.
66.69	Intersect W. bdy. of the Tp., on spur sloping S. 60° W. Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in ground to bedrock, and in a mound of stone to top, for closing cor. of secs. 18 and 19, with brass cap marked $\begin{array}{c c} T11N & T11N \\ T11N & S18 \\ R3W & \hline S24 & S19 \\ & R2W \end{array} \quad CC$ 1938 from which A juniper, 12 ins. diam., bears N. 47½° E., 191 lks. dist., marked T11N R2W S18 CC BT.

Chains

A juniper, 7 ins. diam., bears S. $72\frac{1}{2}^{\circ}$ E., 194 lks. dist., marked T11N R2W S19 CC BT.

From the point of intersection the cor. of secs. 13 and 24, T. 11 N., R. 3 W., hereinbefore described, bears N. $6^{\circ} 28'$ E., 3.56 chs. dist.

Land, mountainous.

Soil, rocky, 3rd and 4th rates.

Timber, juniper, oak and mesquite.

Undergrowth, oakbrush, manzanita, mahogany, catclaw and cacti.

From cor. of secs. 17, 18, 19 and 20.

N. $0^{\circ} 03'$ W., bet. secs. 17 and 18.

Over mountainous land, thru scattering timber and dense undergrowth.

Asc. 100 ft. over SW. slope.

4.50 Point of short spur, slopes W.; desc. 138 ft. over NW. slope.

9.00 Leave scattering and enter dense timber, bears E. and W.

10.60 Wash, 30 lks. wide, course SW.; enter rolling land; asc. 80 ft. over SE, slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

4
S18 | S17

1938

from which

A juniper, 5 ins. diam., bears S. $54\frac{1}{2}^{\circ}$ E., 48 lks. dist., marked $\frac{1}{4}$ S17 BT.

A juniper limb, 10 ins. diam., bears N. $19\frac{1}{2}^{\circ}$ W., 51 lks. dist., marked $\frac{1}{4}$ S18 BT.

U.S.L.M. No. 337, bears N. $29^{\circ} 43'$ E., which is a malpais boulder in place, witnessed by mound of stone and three juniper bearing trees. Boulder and bearing trees are marked as described in the official record.

Asc. 10 ft. over SE. slope.

43.00 Point of low spur slopes E.; desc. 48 ft. over NE. slope.

60.70 Wash, 20 lks. wide, course SE.; enter mountainous land; asc. 118 ft. over SW. slope.

78.53 Long spur, slopes S. 20° E.; asc. 6 ft. over E. slope to sec. cor.

78.74 U.S.L.M. No. 337, bears S. $29^{\circ} 14'$ E., hereinbefore described.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on exposed bedrock and in a mound of stone to top, for cor. of secs. 7, 8, 17 and 18, with brass cap marked

Survey: Subdivision of T. 11 N., R. 2 W.

Chains	<p style="text-align: center;">T11N R2W $\frac{S7}{S18} \mid \frac{S8}{S17}$ 1938</p> <p style="text-align: right;">from which</p> <p>A juniper, 6 ins. diam., bears N. $36\frac{3}{4}^\circ$ E., 58 lks. dist., marked T11N R2W S8 BT.</p> <p>A juniper, 5 ins. diam., bears S. $68\frac{1}{2}^\circ$ E., 167 lks. dist., marked T11N R2W S17 BT.</p> <p>A juniper, 6 ins. diam., bears N. $59\frac{1}{4}^\circ$ W., 90 lks. dist., marked T11N R2W S7 BT.</p> <p>No other bearing tree available.</p> <p>Land, mountainous and rolling. Soil, rocky, 3rd and 4th rates. Timber, juniper, pinyon, oak and mesquite. Undergrowth, oakbrush, manzanita, mahogany, cacti and catclaw.</p> <hr/> <p>N. $89^\circ 57'$ E., on random line, bet. secs. 8 and 17.</p> <p>40.00 Set temp. $\frac{1}{4}$ sec. cor.</p> <p>79.98 Intersect N. and S. line 5 lks. S. of the cor. of secs. 8, 9, 16 and 17.</p> <p>Thence,</p> <p>S. $89^\circ 55'$ W., on true line, bet. secs. 8 and 17.</p> <p>Over rolling land, thru scattering timber and dense undergrowth.</p> <p>Desc. 130 ft. over rolling NW. slope.</p> <p>9.58 Barbed wire fence (4 wire) bears NW. and SE.</p> <p>23.73 Ash Creek (dry) 35 lks. wide, course S. 30° W.; thence across nearly level bottomland.</p> <p>26.45 Leave bottom land, bears NE. and SW.; enter rolling land; asc. 53 ft. over SE. slope.</p> <p>28.73 Dim. road, bears N. and S.</p> <p>33.97 Intersect line 2-3 of the boundary of forest Homestead Entry Survey No. 338 at a point S. $20^\circ 46'$ E., 7.63 chs. from cor. No. 2 thereof, which is a granite stone witnessed by two juniper bearing trees and a mound of stone SW. Stone and bearing trees are marked as described in the official record. Thence across said homestead.</p> <p>38.98 Spur, slopes S.; desc. 17 ft. over SW. slope to</p> <p>39.99 set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">$\frac{S8}{S17}$ 1938</p> <p style="text-align: right;">from which</p>
--------	--

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

89

Chains	
	A pinyon, 7 ins. diam., bears N. $37\frac{1}{2}^{\circ}$ E., 38 lks. dist., marked $\frac{1}{4}$ S8 BT.
	A juniper, 6 ins. diam., bears S. $45\frac{1}{4}^{\circ}$ W., 47 lks. dist., marked $\frac{1}{4}$ S17 BT.
	Desc. 52 ft. over SW. slope.
45.40	Foot of descent, bears N. and S.; thence over nearly level bottom land.
46.93	Left bank of Milk Creek, bears N. and S.; thence across creek bed, course S.
47.38	Barbed wire fence (.4 wire) bears N. and S.
51.40	Right bank of Milk Creek bears N. 7° E. and S.; leave creek bed, thence over nearly level bottom land.
53.98	Road, bears N. and S.
55.06	Intersect line 1-2 of the boundary of forest Homestead Survey No. 338 at a point N. $68^{\circ}40'$ E., 44 lks. from Cor. No. 1 thereof, which is a granite stone witnessed by two juniper bearing trees and a mound of stone E. Stone and bearing trees are marked as described in the official record. Leave said homestead.
56.00	Cut wash, 15 lks. wide, 6 ft. deep, course S.; leave nearly level land and enter rolling land; asc. 97 ft. over E. slope to
64.48	Top of ascent, bears N. and S.; thence over nearly level land.
68.18	Road, bears NW. and S.
71.30	Enter rolling land; desc. 17 ft. over SW. slope.
73.25	Wash, 15 lks. wide, course S. 20° E.; enter mountainous land; asc. 80 ft. over E. slope to
79.98	Cor. of secs. 7, 8, 17 and 18. Land, rolling, nearly level and mountainous. Soil, sandy, gravelly and rocky, 2nd, 3rd and 4th rates. Timber, juniper, pinyon, mesquite, cottonwood, ash and willow. Undergrowth, oakbrush, mahogany, manzanita, mesquite and catclaw.
	West, bet. secs. 7 and 18. Over mountainous land, thru dense timber and undergrowth. Asc. 10 ft. over E. slope.
1.30	Long spur, slopes SE.; desc. 100 ft. over SW. slope.
12.00	Wash, 15 lks. wide, course SE.; enter gently rolling land; asc. 50 ft. over gradual NE. slope to
28.80	Foot of steep ascent, bears NW. and SE., enter mountainous land; asc. 220 ft. over rocky NE. slope to $\frac{1}{4}$ sec. cor.
30.00	Leave dense and enter scattering timber, bears NE. and SE.

Survey: Subdivision of T. 11 N., R. 2 W.

90

Chains

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{r} \text{S } 7 \\ \hline \text{S } 18 \end{array}$$

1938

from which

A juniper, 6 ins. diam., bears N. 35° E., 144 lks. dist., marked $\frac{1}{4}$ S7 BT.

An oak, 4 ins. diam., bears S. 26° E., 50 lks. dist.; marked BT only.

Asc. 132 ft. over rocky NE. slope.

43.50

Spur, slopes N. 15° W.; desc. 237 ft. over W. slope.

54.15

Bottom of ravine, 3 lks. wide, course N.; asc. 40 ft. over NE. slope.

60.00

Point of spur, slopes NE.; desc. 26 ft. over NW. slope.

61.50

Bottom of ravine, 3 lks. wide, course NE.; asc. 26 ft. over NE. slope to closing cor.

64.47

Barbed wire fence (4 wire) bears N. and S.

64.58

intersect w. Bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in ground to bedrock with a stone 2x4x4 ins. marked with a cross (+) deposited at base, and in a mound of stone to top, for closing cor. of secs. 7 and 18, with brass cap marked

T11N	T11N	
R3W	S7	CC
S13	S18	
	R2W	

1938

No bearing trees available.

From this point of intersection the witness cor. to cor. of secs. 12 and 13, T. 11 N., R. 3 W., hereinbefore described, bears N. 1°19'E., 2.60 chs. dist. The true point for cor. of secs. 12 and 13 in bottom of gulch, course E., is 30 lks. N. 1°19'E. from the W.C., or 2.90 chs. N. 1°19'E. from the closing cor. of secs. 7 and 18.

Land, mountainous and rolling.

Soil, rocky, 3rd and 4th rates.

Timber, juniper, pinyon and oak.

Undergrowth, oakbrush, mahogany, manzanita, el jerito, catclaw and cacti.

From cor. of secs. 7, 8, 17 and 18.

N. 0° 03' W., bet. secs. 7 and 8.

Over mountainous land, thru dense timber and undergrowth.

Desc. 52 ft. over NE. slope to

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

91

Chains

- 9.95 Asc. gradually over E. slope to
- 15.50 Cut wash, 6 lks. wide, 4 ft. deep, course SE.; enter gently rolling land. Asc. gradually over SE. and E. slopes to $\frac{1}{4}$ sec. cor.
- 20.80 Road, bears NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- . 4
S7 | S8
1938
- from which
- A juniper, 5 ins. diam., bears S. 26° E., 109 lks. dist., marked $\frac{1}{4}$ S8 BT.
- A juniper, 6 ins. diam., bears S. 34° W., 81 lks. dist., marked $\frac{1}{4}$ S7 BT.
- Continue over gently rolling land; asc. slightly over E. slope to
- 43.00 Wash, 10 lks. wide, course SE.; asc. 70 ft. over SW. slope.
- 54.10 Road, bears E. and W.
- 55.68 Barbed wire fence (3 wire) bears E. and W.
- 59.30 Low spur, slopes SE.; desc. gradually over NE. slope.
- 70:50 Cut wash, 20 lks. wide, 5 ft. deep, course SE.; asc. 22 ft. over SW. slope to sec. cor.
- 78.60 Barbed wire fence (3 wire) bears E. and W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T11N	R2W
S6	S5
S7	S8

1938

from which

- A juniper, 14 ins. diam., bears N. 74 $\frac{1}{4}$ ° E., 147 lks. dist., marked T11N R2W S5 BT.
- A pinyon, 3 ins. diam., bears S. 61° E.; 58 lks. dist., marked BT only.
- A juniper, 4 ins. diam., bears S. 23° W., 116 lks. dist., marked BT only.
- A pinyon, 3 ins. diam., bears N. 25 $\frac{1}{2}$ ° W., 19 lks. dist., marked BT only.

Land, mountainous and gently rolling.
Soil, sandy, gravelly and rocky, 2nd, 3rd and 4th rates.
Timber, juniper, and pinyon.
Undergrowth, oakbrush, mahogany, manzanita, catclaw and cacti.

Chains	
	N. 89°55' E., on random line, bet. secs. 5 and 8.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.94	Intersect N. and S. line 9 lks. N. of the cor. of secs. 4, 5, 8 and 9.
	Thence
	S. 89°59' W., on true line, bet. secs. 5 and 8.
	Over rolling and mountainous land, thru scattering timber and dense undergrowth.
	Asc. 63 ft. over SE. slope.
5.25	Spur, slopes S.; desc. 98 ft. over W. slope.
11.14	Bottom of ravine, 6 lks. wide, course S. 20° W.; asc. 104 ft. over broken E. slope.
22.94	Spur, slopes S.; desc. 150 ft. over broken W. slope.
38.90	Bottom of ravine, 3 lks. wide, course S. 10° W.; asc. 33 ft. over E. slope to
39.97	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{S}{S} \frac{5}{8}$
	1938
	from which
	A juniper, 5 ins. diam., bears S. 26° W., 26 lks. dist., marked $\frac{1}{4}$ S8 BT.
	A juniper, 14 ins. diam., bears N. 44° W., 61 lks. dist., marked $\frac{1}{4}$ S5 BT.
	Asc. 14 ft. over E. slope:
41.19	Spur, slopes S.; desc. 86 ft. over SW. slope.
41.29	Barbed wire fence (4 wire) bears NE. and SW.
47.74	Left bank of Milk Creek, bears N. and S.; thence across creek bed course S.
48.81	Intersect line 4-5 of the boundary of forest Homestead Entry Survey No. 339 at a point S. 21°35' E., 2.49 chs. dist. from Cor. No: 4 thereof which is a granite stone witnessed by two bearing trees and a mound of stone SW. Stone and bearing trees are marked as described in the official record. Thence across said homestead.
48.98	Right bank of Milk Creek, bears N. and S.; leave creek bed. Thence over nearly level bottom land.
49.34	Barbed wire fence (4 wire) bears N. and S.
52.89	Road, bears N. 10° E. and S. 10° W.
53.93	Intersect line 2-3 of the boundary of forest Homestead Entry Survey No. 339 at a point S. 14° 05' W., 4.03 chs. dist. from Cor. No: 3 thereof, which is a granite stone witnessed by two oak bearing trees and a mound of stone SE. Stone and bearing trees are marked as described

Survey: Subdivision of T. 11 N., R. 2 W.

BOOK 4198

93

Chains	in the official record. Leave said homestead.
53.96	Barbed wire fence (4 wire) bears N. 10° E. and S. 10° W.
53.98	W. edge of bottom land, bears N. and S.; enter mountainous land; asc. 48 ft. over E. slope.
56.95	Spur, slopes SE.; desc. 46 ft. over SW. slope.
59.54	Improved spring with piped outlet, bears S., 2.50 chs. dist.
61.28	Barbed wire fence (4 wire) bears NW. and SE., turning to E. at 2.00 chs. SE.
61.94	Wash, 30 lks. wide, course SE.; asc. 137 ft. over NE. slope to
70.24	Top of bluff, bears SE. and N. turning to W. at about 1 ch. N. Asc. gradually over NE. slope.
71.45	Point in the top of same bluff sloping NE.; desc. 28 ft. over steep broken N. slope of bluff near its top.
73.40	Asc. 18 ft. over steep broken N. slope of bluff.
78.44	Spur, slopes SE. and top of bluff, bearing NW. and E.; leave mountainous and enter gently rolling land; desc. 5 ft. over SW. slope to
79.94	Cor. of secs. 5, 6, 7 and 8. Land, rolling, mountainous and nearly level. Soil, sandy, gravelly and rocky, 2nd, 3rd and 4th rates. Timber, pinyon, juniper and cottonwood. Undergrowth, oakbrush, mahogany, catclaw and cacti.
	West, bet. secs. 6 and 7. over gently rolling land thru scattering timber and dense undergrowth. Desc. 10 ft. over SW. slope.
5.50	Head of wash, course SE.; asc. gradually over E. slope.
12.00	Long low spur, slopes SE.; desc. gradually over SW. slope.
17.80	Cut wash, 10 lks. wide, 8 ft. deep, course S.; thence over S. slope.
26.50	Cut wash, 5 lks. wide, 5 ft. deep, course S. 15° E.; asc. 35 ft. over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	* $\frac{S 6}{S 7}$
	1938
	from which
	A juniper, 7 ins. diam., bears N. 87 $\frac{1}{4}$ ° E., 311 lks. dist., marked $\frac{1}{4}$ S6 BT.
	A juniper, 6 ins. diam., bears S. 32° W., 205 lks. dist., marked $\frac{1}{4}$ S7 BT.

Survey: Subdivision of T. 11 N., R. 2 W.

94

Chains	Asc. 12 ft. over SE. slope.												
44.00	Low spur, slopes S.; desc. 15 ft. over W. slope to												
47.80	Cut wash, 5 lks. wide, 6 ft. deep course S.												
53.00	Cut wash, 12 lks. wide, 8 ft. deep, course S.; asc. 16 ft. over E. slope.												
58.40	Low spur, slopes S. 20° E. from N.; desc. 28 ft. over SW. slope to												
62.52	Intersect W. bdy. of the Tp., Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in ground, for closing cor. of secs. 6 and 7, with brass cap marked												
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T11N</td> <td>T11N</td> <td></td> </tr> <tr> <td>R3W</td> <td>S 6</td> <td></td> </tr> <tr> <td>S12</td> <td>S 7</td> <td>CC</td> </tr> <tr> <td></td> <td>R2W</td> <td></td> </tr> </table>	T11N	T11N		R3W	S 6		S12	S 7	CC		R2W	
T11N	T11N												
R3W	S 6												
S12	S 7	CC											
	R2W												
	1938												
	from which												
	A juniper, 6 ins. diam., bears N. 74½° E., 234 lks. dist., marked T11N R2W S6 CC BT.												
	A juniper, 8 ins. diam., bears S. 13° E., 70 lks. dist., marked T11N R2W S7 CC BT.												
	From the point of intersection the cor. of secs. 1 and 12, T. 11 N., R. 3 W., hereinbefore described, bears N. 1° 19' E., 2.10 chs. dist.												
	Land, gently rolling. Soil, sandy and rocky, 2nd and 3rd rates. Timber, juniper, pinyon and mesquite. Undergrowth, oakbrush, mahogany, mesquite, catclaw and cacti.												
	From the cor. of secs. 5, 6, 7 and 8.												
	N. 0° 03' W., on random line, bet. secs. 5 and 6.												
40.00	Set temp. ¼ sec. cor.												
81.29	Intersect N. bdy. of the tp. 7 lks, E. of cor. of secs. 5, 6, 31 and 32, hereinbefore described.												
	Thence												
	S. 0° 06' E., on true line, bet. secs. 5 and 6.												
	Over mountainous land, thru scattering timber and dense undergrowth.												
	Desc. 123 ft. over E. slope to												
9.54	Spur, slopes SE.; desc. 82 ft. over broken S. slope.												
13.32	Wash, course E. from NW.; asc. 19 ft. over NE. slope.												
16.09	Point of spur, slopes SE.; desc. 43 ft. over S. slope.												
19.06	Wash, course N. 75° E., enter rolling land; asc. 53 ft. over NE. slope to												

Chains

- 26.04 Thence over rolling E. slope. Desc. 72 ft. to $\frac{1}{4}$ sec. cor.
- 40.17 Barbed wire fence, bears N. 30° W. and S. 30° E.
- 41.29 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
- S6 | S5
- 1938
- from which
- A pinyon, 12 ins. diam., bears N. 71½° E., 47 lks. dist., marked $\frac{1}{4}$ S5 BT.
- A pinyon, 6 ins. diam., bears N. 52° W., 98 lks. dist., marked $\frac{1}{4}$ S6 BT.
- Continue over rolling land. Desc. slightly over E. slope to
- 49.19 Desc. 74 ft. over SE. slope to
- 54.44 Enter wash, course S. from NW.; desc. 6 ft. in wash to
- 55.94 Leave wash, course SE. from N. and NW.; asc. 40 ft. over NE. slope.
- 61.59 Desc. 60 ft. over E. and SE. slopes.
- 72.91 Wash, course N. 70° E.; asc. 70 ft. over broken NE. slope.
- 79.59 Spur, slopes SE.; desc. 6 ft. over SW. slope to
- 81.29 Cor. of secs. 5, 6, 7 and 8.

Land, mountainous and rolling.
Soil, rocky, 3rd and 4th rates.
Timber, pinyon and juniper.
Undergrowth, cacti, laurel, buckbrush, catclaw and manzanita.

GENERAL DESCRIPTION

The land in T. 11 N., R. 2 W., is mountainous and rolling in character of surface, lying wholly within the Prescott National Forest and within the Bradshaw Mountains. The elevations vary from about 6,000 ft. on the E. bdy., sloping southwesterly by long spur ridges to 3,600 feet in the SW. cor. of the Tp., with no outstanding prominent peaks.

Drainage of the Tp. is all towards the southwest and is afforded by two principal systems: Blind Indian Creek which enters the Tp. in sec. 24, meanders thru the southerly sections and leaving the S. bdy. of sec. 31, and Milk Creek with its tributaries, Ash and Slate Creeks and Crooks Canyon, which drains the remainder portion of the Tp. and it leaves the Tp. in sec. 30. These creeks have wide, sandy beds with occasional active, seep springs. These two creeks are tributaries of the Hassayampa River. Intermediate drainage of the long spur ridges and mountain slopes is afforded by numerous deep cut washes.

There is a scattering growth of juniper and pinyon timber over most of the township, and a scattering growth of

Chains

cottonwood, hickory, walnut, ash and willow trees along the creeks and other water courses. There is a fairly dense undergrowth of oakbrush, manzanita, laurel, buckbrush, mahogany and catclaw over most of the township.

The soil is a heavy sandy loam of 2nd and 3rd rates along the creek bottoms and of a gravelly, rocky nature of 3rd and 4th rates on the mountain slopes. A few small areas in the bottom land along Milk Creek have a sandy 1st rate soil.

Near the SW. cor. of sec. 1, is the abandoned shaft and buildings of the Braylock gold mine, inactive since 1930. There is no other evidence of any minerals or mining activity except for scattered placer workings.

Along Milk Creek, in secs. 8, 17, 20 and 21, there are four Homestead Entry Surveys, each of which has been partly improved for semi-irrigated crops and orchards and with limited ranching layouts. In secs. 5 and 19 there are squatter rancher's improved areas and cabins.

There are numerous active and improved springs throughout the township: the most active of which are in secs. 1, 4, 8, 24, 29 and 33. These springs and the occasional seeps in the creeks furnish the necessary water for the stock grazing that is engaged in over the entire township. For allotment of these grazing rights, there are numerous barbed wire fences over the Tp.

There is a fair, semi-improved road running through the westerly sections, following Milk Creek closely, entering the Tp. in sec. 31; one fork to leave the Tp. at the W. bdy. of sec. 7 and another fork through the N. bdy. of sec. 5. Numerous short side roads up the canyons and semi-improved trails on top of the spur ridges, makes the entire township accessible.

FINAL FIELD TESTS OF INSTRUMENTS.

Buff and Buff transit No. 18002
Ty White, Public Land Surveyor.

October 2, 1938; in camp near the center of sec. 20, T. 11 N., R. 2 W., G. & S.R.M., Arizona, in latitude $34^{\circ}16'48''$ N., longitude $112^{\circ}29'12''$ W., examine the adjustments of Buff and Buff transit No. 18002 and find no errors; then to test the workings of the solar apparatus proceed as follows:

At 7h.2m., p.m., l.m.t., observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and marking the mean point in the line thus determined by a tack in a stake driven firmly in the ground about 15 chs. N.

Azimuth of Polaris at eastern elongation: $1^{\circ}14'37''$.

October 3: lay off the azimuth of Polaris $1^{\circ}14\frac{1}{2}'$ to the west and mark the meridian thus determined by a tack in a stake driven firmly in the ground about 15 chs. N.

October 14, 1938: at 9h.00m., a.m., app.t., at same station, set off $34^{\circ}17'$ N. on the latitude arc; $8^{\circ}03'$ S. on the declination arc, and determine a meridian with the solar, which agrees with the true meridian.

Chains

At app. noon, with the latitude arc unchanged; observe the sun on the meridian, and obtain a reading of $8^{\circ} 06'$ S. on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged; set off $8^{\circ} 08\frac{1}{2}'$ S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1'30''$ of the true meridian, conclude that this instrument has remained in satisfactory adjustment throughout the surveys executed with same as described in the foregoing field notes.

Buff and Buff transit No. 10125
Norville E. Shearer, Public Land Surveyor.

October 14, 1938: at same station, using the meridian established by Ty White, Public Land Surveyor by Polaris observation, test the solar apparatus of Buff and Buff transit No. 10125 as follows:

At 9h. 00m., a.m., app.t., set off $34^{\circ} 17'$ N. on the latitude arc; $8^{\circ} 03'$ S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged; observe the sun on the meridian, and obtain a reading of $8^{\circ} 06'$ S. on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged; set off $8^{\circ} 08\frac{1}{2}'$ S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1'30''$ of the true meridian, conclude that this instrument has remained in satisfactory adjustment throughout the surveys executed with same as described in the foregoing field notes.

Lietz transit No. 6166.
Frank Kennon, Public Land Surveyor.

October 14, 1938; at same station, using the meridian established by Ty White, Public Land Surveyor by Polaris observation, test the solar apparatus of Lietz transit No. 6166 as follows:

At 9h. 00m., a.m., app.t., set off $34^{\circ} 17'$ N. on the latitude arc; $8^{\circ} 03'$ S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged; observe the sun on the meridian, and obtain a reading of $8^{\circ} 06'$ S. on the declination arc, which agrees with the true meridian.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged; set off $8^{\circ} 08\frac{1}{2}'$ S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work, come within 1'30" of the true meridian, conclude that this instrument has remained in satisfactory adjustment throughout the surveys executed with same as described in the foregoing field notes.

103
99

4-680
(Revised May 1934)

APR 1936

FIELD ASSISTANTS

To

Norville E. Shearer, Public Land Surveyor.

NAMES	CAPACITY
Charles F. Bobo, Jr.	Principal Assistant
Jack Bowker	Chainman
James Pearce	Cornerman
Ernest Crofford	Flagman
Louis L. Francis, Jr.	Axman
Jack Williams	Axman
Ralph W. Knotts	Axman

104
108

BOOK 4198

CERTIFICATE OF ~~UNITED STATES~~ SURVEYOR

I, Norville E. Shearer, Public Land Surveyor, HEREBY CERTIFY upon honor that, in
 pursuance of ^{supplemental} special instructions bearing date of the 27th day of July, 1938,
 received from the district cadastral engineer for Arizona, with assignment
 instructions dated July 27, 1938, I have surveyed the North bdy. of T. 10N, R. 2W,
the South bdy, North bdy. part of the East boundary and part of the
Subdivision lines of
Township 11 North, Range 2 West
 of the Gila and Salt River Meridian, in the State of Arizona, which are
 represented in the foregoing field notes as having been executed by me and under my direction; and that said
 survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
 of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Phoenix, Arizona
January 24, 1939

Norville E. Shearer
Public Land Surveyor

~~CERTIFICATE OF APPROVAL~~

~~Office of U.S. Supervisor of Surveys,~~

~~10~~

~~The foregoing field notes of the survey of~~

~~executed by~~
~~under special instructions dated~~, and assignment
~~instructions dated~~, having been critically examined, and
 the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey
 therein described, are hereby approved.

~~U.S. Supervisor of Surveys~~

~~CERTIFICATE OF TRANSCRIPT~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes on file in the public survey office.~~

~~U.S. Supervisor of Surveys~~

106
107
BOOK 4198

CERTIFICATE OF ~~UNITED STATES~~ SURVEYOR

I, Frank Kennon, Public Land Surveyor, HEREBY CERTIFY upon honor that, in pursuance of ^{supplemental} special instructions bearing date of the 27th day of July, 1938, received from the district cadastral engineer for Arizona, with assignment instructions dated July 27, 1938, I have surveyed
part of the Subdivision lines of
Township 11 North, Range 2 West

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Phoenix, Arizona
January 4, 1939
Frank Kennon
Public Land Surveyor

~~CERTIFICATE OF APPROVAL~~

~~OFFICE OF U.S. SUPERVISOR OF SURVEYS,~~

~~-----, 19-----~~

~~The foregoing field notes of the survey of -----~~

~~executed by -----, under special instructions dated -----, and assignment instructions dated -----, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey therein described, are hereby approved.~~

~~-----
U.S. Supervisor of Surveys.~~

~~CERTIFICATE OF TRANSCRIPT~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in -----, is a true copy of the original field notes on file in the public survey office.~~

~~-----
U.S. Supervisor of Surveys.~~

107
103

4-680
(Revised May 1934)

FIELD ASSISTANTS

TO

Ty White, Public Land Surveyor

NAMES	CAPACITY
Bert E. Wakeman	Principal Assistant
Ellis W. Murphy	Chainman
Landon Bates	Chainman
Frank M. Stivers	Cornerman
Lavell Palmer	Axman
Kenneth H. Strotjost	Axman
James N. Pool	Flagman

108
104

BOOK 4198

CERTIFICATE OF UNITED STATES SURVEYOR

I, Ty White Public Land Surveyor, HEREBY CERTIFY upon honor that, in
pursuance of ^{supplemental} special instructions bearing date of the 27th day of July, 1938,
received from the district cadastral engineer for Arizona, with assignment
instructions dated July 27, 1938, I have resurveyed the East boundary of T.11N,
R.3W., and West boundary of T.11N, R.2W.; and surveyed part of the East
boundary and part of the Subdivision lines of
Township 11 North, Range 2 West

of the Gila and Salt River Meridian, in the State of Arizona, which are
represented in the foregoing field notes as having been executed by me and under my direction; and that said
resurvey and
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Phoenix, Arizona
June 12, 1939

Ty White
Public Land Surveyor

CERTIFICATE OF APPROVAL

OFFICE OF THE SUPERVISOR OF SURVEYS,

Denver, Colorado, JAN 15 1940, 1939

The foregoing field notes of the resurvey of the East bdy of T.11N, R.3W., and West
bdy. of T.11N, R.2W., and of the survey of the North bdy. of T.10N, R.2W., and
the South, East and North bdrs. and Subdivision lines of Township 11
North, Range 2 West, of the Gila and Salt River Meridian, State of Arizona
executed by Ty White, Norville E. Shearer and Frank Kennon, Public Land Surveyors,
^{supplemental}
under special instructions dated July 27, 1938, for Group 223, Arizona, and assignment
instructions dated July 27, 1938, having been critically examined, and
the necessary corrections made prior to their certification by the engineer, the said field notes, and the ^{re} surveys
and surveys
therein described, are hereby approved.

Wm. H. Simpson
Supervisor of Surveys.

~~CERTIFICATE OF TRANSCRIPT~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes on file in the public survey office.~~

~~U.S. Supervisor of Surveys.~~