

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

BOOK 4231

FIELD NOTES

of the survey of

NORTH BOUNDARY,

AND

SUBDIVISION LINES OF

TOWNSHIP 9 SOUTH, RANGE 2 WEST.

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

Horace M. Muscott, Surveyor,

Claude F. Warner, Transitman,

Frank Motch, Public Land Surveyor.

Under special instructions dated December 1, 1937, which provided for the surveys included under Group No. 197, Arizona, bearing the approval of the Commissioner of the General Land Office under date of January 14, 1938 and assignment instructions dated February 3, 1938.

Survey commenced March 4, 1938.

Survey completed April 1, 1938.

4231

4231

INDEX DIAGRAM.

Township _____, *Range* _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

~INDEX-DIAGRAM~

BOOK 4231

36	31	32	33	34	35	36	31
	3	3 4	4 5	5 6	6	7	
1	6 56 57	5 45	4 37	3 28	2 19	1	6
	56	55	45 44	37 36	28 27	17 18	
12	7 55 54	8 44	9 35	10 27 26	11 17 16	12	7
	54	53	43	35 34	26	15 16	
13	18 53 52	17 42	16 34 T. 9 S. 33	15 25 R. 2 W. 24	14 15 14	13	18
	52	51	42	33	24	14 13	
24	19 51 50	20 41	21 32	22 23	23 12 11	24	19
	49 50	49 48	41 40	32 31	22	11	
25	30 48	29 40	28 31	27 21	26 10	25	30
	47	47 46	39 30	30	21 20	9	
36	31 46 45	32 38	33 29	34 20 19	35 8	36	31

2nd Standard Parallel South

— Lines of accepted surveys or resurveys.

— Lines surveyed under this group.

 Areas surveyed as per accepted plats on file.

 Areas surveyed under current group No. 198 (approval pending)

The surveys herein described were executed by Horace M. Muscott, Surveyor, Claude F. Warner, Transitman and Frank Moteh, Public Land Surveyor, using respectively, Buff and Buff transit No. 16723, Buff and Buff transit No. 9984, and Young and Sons' transit No. 8526. Each of these instruments is equipped with an improved Smith solar attachment and otherwise conforms to the standard specifications of the General Land Office. The instruments were examined and tested by the District Cadastral Engineer for Arizona and California prior to the beginning of the surveys of this group, and were approved conditional upon satisfactory results of field tests of same.

The azimuths of all of the lines of survey herein described were determined with the solar attachments.

All measurements were made with Lallie steel tapes, 5 chs. in length, graduated every link for the first 100 lks., and the remainder at intervals of 10 lks. The tapes were tested by comparison with a Lufkin standard tape and found to be correct. All of the measurements were made on the slope, the vertical angle of each interval determined with a clinometer in good adjustment and the horizontal equivalents entered in the field notes.

PRELIMINARY FIELD TESTS OF INSTRUMENTS.

Buff and Buff transit No. 16723
Horace M. Muscott, Surveyor.

March 19, 1938; at camp in SE $\frac{1}{4}$ of sec. 36, T. 5 S., R. 4 W., G. & S.R. Meridian, Arizona, in latitude 32° 57' N., longitude 112° 37' W., examine the adjustments of Buff and Buff transit No. 16723 and find no errors; then, to test the solar apparatus of same by comparing its indications with a true meridian determined at this station by Polaris observations on January 16, 1938 as described in field notes of survey of 1st Standard Parallel South thru Rs. 1 and 2 W., proceed as follows:

At 8h. 00m., a.m., app.t., set off 32° 57' N. on the lat. arc; 0° 37 $\frac{1}{2}$ ' S. on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of 0° 34' S. on the declination arc, which agrees with the computed declination of the sun.

At 4h. 00m., p.m., app.t., with the latitude arc unchanged, set off 0° 29 $\frac{1}{2}$ ' S. on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within 1' 30" of the true meridian, conclude that the adjustments of this instrument are satisfactory on this date, prior to beginning the surveys with same which are hereinafter described.

Buff and Buff transit No. 9984
Claude F. Warner, Transitman.

March 13, 1938; at same station as above, examine the adjustments of Buff and Buff transit No. 9984 and find no errors; then to test the solar apparatus of same by comparing its indications with the same true meridian, proceed as follows:

At 8h.00m., a.m., app.t., set off $32^{\circ}57'N.$ on the latitude arc; $2^{\circ}59\frac{1}{2}'S.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of $2^{\circ}56\frac{1}{2}'S.$ on the declination arc, which agrees with the computed declination of the sun.

At 4h.00m., p.m., app.t., with the latitude arc unchanged, set off $2^{\circ}51\frac{1}{2}'S.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1'30''$ of the true meridian, conclude that the adjustments of this instrument are satisfactory on this date, prior to beginning the surveys with same which are hereinafter described.

Young and Sons' transit No. 8526
Frank Moteh, Public Land Surveyor.

March 1, 1938; at same station as above; examine the adjustments of Young and Sons' transit No. 8526 and find no errors; then, to test the solar apparatus of same by comparing its indications with the same true meridian, proceed as follows:

At 8h.00m., a.m., app.t., set off $32^{\circ}57'N.$ on the latitude arc; $7^{\circ}38\frac{1}{2}'S.$ on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of $7^{\circ}35\frac{1}{2}'S.$ on the declination arc, which agrees with the computed declination of the sun.

At 4h.00m., p.m., app.t., with the latitude arc unchanged, set off $7^{\circ}31'S.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1'30''$ of the true meridian, conclude that the adjustments of this instrument are satisfactory on this date, prior to beginning the surveys with same which are hereinafter described.

Chains

From the cor. of Ts. 8 and 9 S., Rs. 1 and 2 W.

West, on random line, N. of T. 9 S., R. 2 W., setting temp. $\frac{1}{4}$ sec. and sec. cors. alternately, at 40 ch. intervals, and at 479.93 Intersect N. and S. line 18 lks. N. of the cor. of Ts. 8 and 9 S., Rs. 2 and 3 W., which is an iron post, 3 ins. in diam., projecting 8 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record.

Thence

N. $89^{\circ} 59'$ E., on true line, bet. secs. 6 and 31.

Over nearly level land, thru scattering timber and undergrowth.

39.93 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S \ 31}{S \ 6}$$

1938

from which

A paloverde, 5 ins. diam., bears S. $17\frac{1}{2}^{\circ}$ W., 60 lks. dist., marked $\frac{1}{4}$ S6 BT.

A paloverde, 5 ins. diam., bears N. $9\frac{1}{2}^{\circ}$ W., 76 lks. dist., marked $\frac{1}{4}$ S31 BT.

59.30 Wash, 5 lks. wide, course N. 80° W.

79.93 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap marked

$$\begin{array}{c} T8S \ R2W \\ \hline S31 \ | \ S32 \\ \hline S6 \ | \ S5 \\ \hline T9S \end{array}$$

1938

from which

A paloverde, 6 ins. diam., bears N. $29\frac{1}{2}^{\circ}$ E., 728 lks. dist., marked T8S R2W S32 BT.

A paloverde, 6 ins. diam., bears S. 69° E., 71 lks. dist., marked T9S R2W S5 BT.

A paloverde, 6 ins. diam., bears S. $59\frac{1}{2}^{\circ}$ W., 107 lks. dist., marked T9S R2W S6 BT.

A paloverde, 10 ins. diam., bears N. $53\frac{1}{2}^{\circ}$ W., 490 lks. dist., marked T8S R2W S31 BT.

Land, nearly level.

Soil, gravelly, 3rd rate.

Timber, paloverde and ironwood.

Undergrowth, greasewood, sagebrush and cacti.

N. $89^{\circ} 59'$ E., on true line, bet. secs. 5 and 32.

Over nearly level land, thru scattering timber and undergrowth.

Survey: North boundary of T. 9 S., R. 2 W.

4.

Chains	
24.50	Junction of a series of shallow washes, course S. 70° W. from E. Thence along shallow wash, course W., paralleled on each side by a series of small washes.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \begin{array}{l} S 32 \\ S 5 \end{array}$ 1938 from which A mesquite, 8 ins. diam., bears S. 22° W., 79 lks. dist., marked $\frac{1}{4}$ S5 BT. A mesquite, 6 ins. diam., bears N. 5 $\frac{1}{2}$ ° W., 33 lks. dist., marked $\frac{1}{4}$ S32 BT. Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Continue over nearly level land, within a series of small washes, course W.
58.60	Leave series of washes at junction with wash from SE.
70.00	Leave nearly level and enter gently rolling land. Asc. 52 ft. over SW. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for cor. of secs. 4, 5, 32 and 33, with brass cap marked $\begin{array}{cc} T8S & R2W \\ S32 & S33 \\ \hline S5 & S4 \\ T9S & \end{array}$ 1938 No bearing trees available. Land, nearly level and gently rolling. Soil, gravelly and rocky, 3rd rate. Timber, paloverde, mesquite and ironwood. Undergrowth, greasewood, sagebrush and cacti.
	N. 89° 59' E., on true line, bet. secs. 4 and 33. Over gently rolling land, thru scattering timber and undergrowth. Ascend gradually over S. slope.
16.70	Wash, 10 lks. wide, course SW. Enter heavily rolling land. Asc. 90 ft. over SW. slope.
29.85	Spur, slopes S. near point of same. Desc. 68 ft. over SE. slope.
39.00	Wash, 10 lks. wide, course S. Asc. 9 ft. over SW. slope to

Survey: North boundary of T. 9 S., R. 2 W.

BOOK 4281

5.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked.

1/4 S 33 / S 4

1938

No bearing trees available.

Asc. 46 ft. over SW. slope.

45.10 Spur, slopes S. Desc. 29 ft. over SE. slope.

50.00 Thence over gently rolling land; asc. gradually over S. slope.

71.80 Wash, 10 lks. wide, course SW. Enter heavily rolling land. Asc. 70 ft. over W. slope.

76.25 Spur, slopes SW. Desc. 11 ft. over S. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 4 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for cor. of secs. 3, 4, 33 and 34, with brass cap marked

T8S R2W / S33 S34 / S4 S3

T9S

1938

No bearing trees available.

Land, gently and heavily rolling. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.

N. 89° 59' E., on true line, bet. secs. 3 and 34.

Over heavily rolling land, thru scattering timber and undergrowth.

Desc. 22 ft. over S. and SE. slopes.

10.00 Saddle in ridge, bears S. 60° E. and N. 60° W. Asc. 60 ft. over NW. slope.

16.30 Point of short spur, slopes N. Desc. 60 ft. over NE. slope.

25.00 Thence over gently rolling land. Asc. gradually over N. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

1/4 S 34 / S 3

1938

Survey: North boundary of T. 9 S., R. 2 W.

6.

Chains	<p>No bearing trees available.</p> <p>Ascend gradually over N. slope.</p> <p>44.75 Wash, 10 lks. wide, course N. 80° W. Asc. 47 ft. over SW. slope.</p> <p>63.00 Point of spur, slopes SW. Asc. gradually over S. slope.</p> <p>75.00 Drain, course SW. Asc. gradually over W. slope to</p> <p>79.00 Point of low, short spur, slopes SW. Desc. slightly over SE. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on exposed bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for cor. of secs. 2, 3, 34 and 35, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T8S</td> <td>R2W</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> <tr> <td>S3</td> <td>S2</td> </tr> <tr> <td colspan="2">T9S</td> </tr> </table> <p>1938</p> </div> <p>No bearing trees available.</p> <p>Land, heavily and gently rolling. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde and ironwood. Undergrowth, sagebrush, greasewood and cacti.</p> <hr/> <p>N. 89° 59' E., on true line, bet. secs. 2 and 35.</p> <p>Over gently rolling land, thru scattering timber and undergrowth.</p> <p>Desc. gradually over SE. slope.</p> <p>5.75 Wash, 15 lks. wide, course SW. Asc. 46 ft. over SW. slope.</p> <p>16.14 Asc. gradually over S. slope.</p> <p>27.35 Wash, 10 lks. wide, course S. 70° W. Enter mountainous land. Asc. 103 ft. over W. slope to</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., on exposed bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr> <td>1/4</td> <td>S 35</td> </tr> <tr> <td></td> <td>S 2</td> </tr> </table> <p>1938</p> </div> <p>No bearing trees available.</p> <p>Asc. 452 ft. over steep W. slope.</p> <p>56.70 Ridge, bears NW. and SE. Desc. 319 ft. over NE. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 1, 2, 35 and 36, with brass cap marked</p>	T8S	R2W	S34	S35	S3	S2	T9S		1/4	S 35		S 2
T8S	R2W												
S34	S35												
S3	S2												
T9S													
1/4	S 35												
	S 2												

Survey: North boundary of T. 9 S., R. 2 W.

BOOK 4231

7.

Chains

T8S	R2W
S35	S36
S2	S1

T9S

1938

No bearing trees available.

Land, gently and heavily rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde and ironwood.
 Undergrowth, sagebrush, greasewood and cacti.

N. 89° 59' E., on true line, bet. secs. 1 and 36.

Over mountainous land, thru scattering timber and undergrowth.

Desc. 6 ft. over NE. slope.

2.25 Wash, 10 lks. wide, course NW. Asc. 96 ft. over SW. slope.

12.20 Ridge, bears NW. and SE. Desc. 115 ft. over NE. slope.

17.90 Bottom of ravine, 10 lks. wide, course SE. Enter gently rolling land. Asc. gradually over SW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

S 36
$\frac{1}{4}$ S 1

1938

No bearing trees available.

Thence over heavily rolling land.

Asc. 72 ft. over W. slope.

51.35 Spur, slopes S. Desc. 84 ft. over SE. slope.

64.20 Wash, 10 lks. wide, course SW. Enter mountainous land. Asc. 130 ft. over W. slope to

80.00 The cor. of Ts. 8 and 9 S., Rs. 1 and 2 W., established under this group as described in field notes of survey of West bdy. of T. 9 S.; R. 1 W.

Land, mountainous, gently and heavily rolling.
 Soil, rocky, 4th rate.
 Timber, paloverde and ironwood.
 Undergrowth, greasewood, sagebrush and cacti.

Chains	
	Commence the survey of the subdivision lines of T. 9 S., R. 2 W. at the std. cor. of secs. 35 and 36 on the S. bdy. of the Tp. (2nd Std. Par. S.), reestablished in 1924, which is an iron post, 2 ins. in diam., projecting 14 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record.
	Thence
	N. 0° 01' W., bet. secs. 35 and 36.
	Over gently rolling land, thru scattering timber and undergrowth.
	Desc. 126 ft. over gradual NE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S35 S36
	1938
	from which
	A paloverde, 5 ins. diam., bears N. 33 $\frac{1}{2}$ ° E., 29 lks. dist., marked $\frac{1}{4}$ S36 BT.
	A paloverde, 4 ins. diam., bears S. 50 $\frac{1}{2}$ ° W., 22 lks. dist., marked $\frac{1}{4}$ S35 BT.
	Desc. 26 ft. over gradual NE. slope.
47.50	Wash, 30 lks. wide, banks 8 ft. high, course N. 80° W. Asc. 25 ft. over gradual SW. slope to
61.00	Foot of slope bears NW. and SE. Enter heavily rolling and mountainous land. Asc. 215 ft. over rocky SW. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked
	T9S R2W S26 S25 S35 S36
	1938
	from which
	A paloverde, 4 ins. diam., bears N. 72 $\frac{1}{2}$ ° E., 57 lks. dist., marked T9S R2W S25 BT.
	A paloverde fork, 9 ins. diam., bears S. 31° E., 131 lks. dist., marked T9S R2W S36 BT.
	A paloverde fork, 4 ins. diam., bears S. 33° W., 147 lks. dist., marked T9S R2W S35 BT.
	A paloverde, 4 ins. diam., bears N. 57 $\frac{1}{2}$ ° W., 26 lks. dist., marked T9S R2W S26 BT.
	Land, gently and heavily rolling and mountainous. Soil, rocky, 4th rate. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.

Chains	East, on random line, bet. secs. 25 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect E. bdy. of Tp. 4 lks. S. of the cor. of secs. 25, 30, 31 and 36, established under this group, as described in the field notes of the survey of the W. bdy. of T. 9 S., R. 2 W.
	Thence
	S. $89^{\circ} 58'$ W., on true line, bet. secs. 25 and 36.
	Over mountainous land, thru scattering timber and undergrowth.
	Along N. slope to
0.40	Spur, slopes N. 80° W. near point of same. Desc. 206 ft. over SW. slope.
19.10	Wash, 15 lks. wide, in bottom of gulch, course S. Asc. 239 ft. over NE. slope.
26.90	Short spur, slopes SE. Desc. 25 ft. over SW. slope.
29.50	Head of ravine, course S. Asc. 25 ft. over SE. slope.
31.90	Short spur, slopes S. 20° W. Desc. 238 ft. over SW. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4} \frac{S 25}{S 36}$
	1938
	from which
	A paloverde, 4 ins. diam., bears S. $31\frac{1}{4}^{\circ}$ W., 50 lks. dist., marked $\frac{1}{4}$ S36 BT.
	An ironwood, 6 ins. diam., bears N. $67\frac{1}{4}^{\circ}$ W., 34 lks. dist., marked $\frac{1}{4}$ S25 BT.
	Desc. 45 ft. over SW. slope.
46.20	Wash, 40 lks. wide, course N. 30° W. Asc. 477 ft. over NE. slope.
68.65	Spur, slopes NW. Desc. 327 ft. over steep, SW. slope to
80.00	The cor. of secs. 25, 26, 35 and 36.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, paloverde and ironwood.
	Undergrowth, greasewood and cacti.
	N. $0^{\circ} 01'$ W., bet. secs. 25 and 26.
	Over mountainous land, thru scattering timber and undergrowth.
	Asc. 200 ft. over steep SW. slope.
9.60	Spur, slopes NW. Desc. 421 ft. over steep NE. slope to

Survey: Subdivision Lines: T. 9 S., R. 2 W.

10

Chains

- 28.40 Foot of steep slope, bears NW. and SE. Enter gently rolling land. Desc. 15 ft. over gradual NE. slope to
- 33.55 Wash, 40 lks. wide, course N. 80° W. Thence over W. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
- S26 | S25
- 1938
- from which
- A paloverde, 5 ins. diam., bears S. 53 $\frac{1}{2}$ ° W., 40 lks. dist., marked $\frac{1}{4}$ S26 BT.
- No other bearing tree available.
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Continue over W. slope.
- 47.90 Wash, 35 lks. wide, course S. 56° W., from N. 70° E. Asc. 56 ft. over S. slope to
- 64.20 Low ridge, bears S. 70° E. and N. 70° W. Desc. 59 ft. over N. slope.
- 68.10 Small wash, course N. 70° W. Enter heavily rolling land. Asc. 54 ft. over SW. slope.
- 72.40 Low short spur, slopes NW. Desc. 50 ft. over NE. slope.
- 78.20 Small wash, course W. Asc. 21 ft. over S. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 23, 24, 25 and 26, with brass cap marked
- T9S . R2W
S23 | S24
S26 | S25
- 1938
- from which:
- A paloverde, 4 ins. diam., bears N. 16 $\frac{3}{4}$ ° E., 122 lks. dist., marked T9S R2W S24 BT.
- A paloverde, 4 ins. diam., bears S. 79° E., 84 lks. dist., marked T9S R2W S25 BT.
- An ironwood, 4 ins. diam., bears S. 46 $\frac{3}{4}$ ° W., 123 lks. dist., marked T9S R2W S26 BT.
- A paloverde, 4 ins. diam., bears N. 57 $\frac{1}{2}$ ° W., 65 lks. dist., marked T9S R2W S23 BT.
- Land, mountainous, gently and heavily rolling.
Soil, rocky, 4th rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush and cacti.

Survey: Subdivision Lines: T. 9 S., R. 2 W.

BOOK 4231

11

Chains	N. 89° 58' E., on random line, bet. secs. 24 and 25.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.04	Intersect E. bdy. of Tp. 4 lks. S. of the cor. of secs. 19, 24, 25 and 30, established under this group as described in the field notes of the survey of the W. bdy. of T. 9 S., R. 1 W.
	Thence
	S. 89° 56' W., on true line, bet. secs. 24 and 25.
	Over gently rolling land, thru scattering timber and undergrowth.
	Desc. 86 ft. over gradual W. slope.
11.80	Wash, 20 lks. wide, course SW. Asc. 55 ft. over gradual SE. slope.
25.00	Low spur, slopes S. Desc. 40 ft. over gradual SW. slope to
40.02	Set an iron post, $\frac{3}{4}$ ft. long, 1 in. in diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S\ 24}{S\ 25}$
	1938
	from which
	A paloverde, 4 ins. diam., bears S. 51 $\frac{1}{4}$ ° W., 58 lks. dist., marked $\frac{1}{4}$ S25 BT.
	A paloverde, 4 ins. diam., bears N. 63 $\frac{1}{2}$ ° W., 42 lks. dist., marked $\frac{1}{4}$ S24 BT.
	Desc. 12 ft. over SW. slope.
44.30	Wash, 30 lks. wide, course SW. Asc. 30 ft. over SE. slope.
61.10	Low ridge, bears N. 30° E. and S. 30° W. Desc. 52 ft. over SW. slope.
73.00	Desc. gradually over S. slope to
80.04	The cor. of secs. 23, 24, 25 and 26.
	Land, gently rolling.
	Soil, gravelly and rocky, 4th rate.
	Timber, paloverde and ironwood.
	Undergrowth, greasewood, sagebrush and cacti.
	N. 0° 01' W., bet. secs. 23 and 24.
	Over gently rolling land, thru scattering timber and undergrowth.
	Asc. 7 ft. over S. slope.
0.80	Low spur, slopes W. Desc. 40 ft. over NW. slope.
15.00	Asc. 14 ft. over SW. slope.
18.70	Low spur, slopes W. Desc. 30 ft. over N. slope.

Survey: Subdivision Lines: T. 9 S., R. 2 W.

12

Chains									
21.55	Wash, 50 lks. wide, 10 ft. deep, course NW. from E. Thence over W. slope. Asc. 26 ft. to								
31.50	Wash, 20 lks. wide, 10 ft. deep, course W. Asc. 30 ft. over SW. slope to								
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked								
	<table border="1" style="margin: auto;"> <tr> <td>S23</td> <td> </td> <td>S24</td> </tr> </table>	S23		S24					
S23		S24							
	1938								
	from which								
	An ironwood, 5 ins. diam., bears N. $41\frac{3}{4}^{\circ}$ E., 90 lks. dist., marked $\frac{1}{4}$ S24 BT.								
	A paloverde, 4 ins. diam., bears N. $23\frac{1}{2}^{\circ}$ W., 105 lks. dist., marked $\frac{1}{4}$ S23 BT.								
	Asc. 22 ft. over SW. slope.								
42.10	Low spur, slopes W. Desc. 20 ft. over N. slope.								
58.00	Wash, 20 lks. wide, course W. Asc. 15 ft. over gradual SW. slope to								
70.80	Foot of slope, bears NW. and SE. Enter heavily rolling land. Asc. 103 ft. over SW. slope to								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 13, 14, 23, and 24, with brass cap marked								
	<table border="1" style="margin: auto;"> <tr> <td>T9S</td> <td>R2W</td> </tr> <tr> <td>S14</td> <td> </td> <td>S13</td> </tr> <tr> <td>S23</td> <td> </td> <td>S24</td> </tr> </table>	T9S	R2W	S14		S13	S23		S24
T9S	R2W								
S14		S13							
S23		S24							
	1938								
	from which								
	A paloverde, 4 ins. diam., bears N. $24\frac{1}{4}^{\circ}$ E., 34 lks. dist., marked T9S R2W S13 BT.								
	A paloverde, 6 ins. diam., bears S. $69\frac{1}{2}^{\circ}$ W., 97 lks. dist., marked T9S R2W S23 BT.								
	A paloverde, 4 ins. diam., bears N. $30\frac{1}{4}^{\circ}$ W., 83 lks. dist., marked T9S R2W S14 BT.								
	No SE. bearing tree available.								
	Land, gently and heavily rolling. Soil, gravelly and rocky, 4th rate. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.								
	N. $89^{\circ} 56'$ E., on random line, bet. secs. 13 and 24.								
40.00	Set temp. $\frac{1}{4}$ sec. cor.								
56.62	Discontinue chaining at this point, owing to precipitous								

Survey: Subdivision Lines: T. 9 S., R. 2 W.

BOOK 4231

13

Chains

slopes and cliffs ahead and triangulate measurement of the remainder of the random sec. line as follows:

Designate 56.62 ch. station on random sec. line as triangulation point "A":


Set flag "B" ahead on random line at its intersection with E. bdy. of Tp. 3 lks. S. of the cor. of secs. 13, 18, 19 and 24.

Vertical angle from "A" to "B" is -21° .

From "B" chain a base S. $9^{\circ} 58\frac{1}{2}'$ E., 4.99 chs. to point "C". A longer base is impracticable. From "C" a flag at point "A" bears N. $78^{\circ} 39'$ W.

Included angles of triangle "A-B-C" are; $11^{\circ} 25'$, $99^{\circ} 54\frac{1}{2}'$, and $68^{\circ} 40\frac{1}{2}'$, the sum of which is $180^{\circ} 00'$.

Chained dist. on random line to "A" = 56.62 chs. N. $89^{\circ} 56'$ E.
 Triangulated dist. "A" to "B" = 23.48 " "
 Total length of random line = 80.10 chs. N. $89^{\circ} 56'$ E.

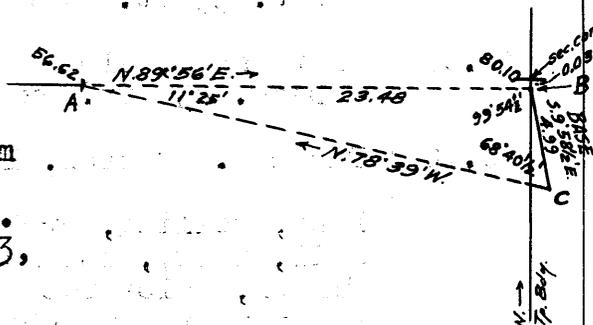

80.10 Intersect E. bdy. of Tp. 3 lks. S. of the cor. of secs. 13, 18, 19 and 24, established under this group as described in field notes of survey of W. bdy. of T. 9 S., R. 1 W.

Thence

S. $89^{\circ} 55'$ W., on true line, bet. secs. 13 and 24.

Over gently rolling land, thru scattering timber and undergrowth.

Asc. gradually over SE. slope.

3.50 Wash, 10 lks. wide, course SE. Discontinue chaining. Enter mountainous land. Asc. 600 ft. over precipitous NE. slope, and cliffs. Measurement by triangulation hereinbefore described.

23.48 Top of cliff, 135 ft. high, bearing NW. and SE., facing NE. Resume chaining and continue line and measurement.

23.55 Ridge of Sand Tank Mountains, bears NW. and SE. Desc. 419 ft. over steep, broken, rocky SW. slope to

36.10 Thence over steep S. slope, descending gradually to

40:05 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S 13}{S 24}$

1938

from which

A paloverde, 4 ins. diam., bears S. $43\frac{1}{4}^{\circ}$ W., 149 lks. dist., marked $\frac{1}{4}$ S24 BT.

An ironwood, 4 ins. diam., bears N. $84\frac{3}{4}^{\circ}$ W., 129 lks. dist., marked $\frac{1}{4}$ S13 BT.

Desc. 18 ft. over SW. slope.

Chains

43.10 Bottom of ravine, 20 lks. wide, near head, course S.
Asc. 55 ft. over SE. slope.

48.00 Short spur, slopes S. 20° W. Enter heavily rolling land.
Desc. 290 ft. over SW. slope to

80.10 The cor. of secs. 13, 14, 23 and 24.


Land, rolling, broken and mountainous.
Soil, rocky, 4th rate.
Timber, paloverde and ironwood.
Undergrowth, sagebrush, greasewood and cacti.

N. 0° 01' W., bet. secs. 13 and 14.

Over mountainous land, thru scattering timber and undergrowth.

Asc. 126 ft. over rocky SW. slope to

8.37 Discontinue chaining on sec. line at this point owing to line crossing over top of a high, notched peak in a ridge of the Sand Tank Mountains. Chain measurement to a point on sec. line on N. side of peak by means of a traverse in sec. 13, crossing the ridge thru a saddle between two peaks as follows:

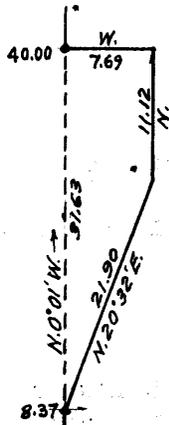

From 8.37 ch. station on sec. line;

N. 20° 32' E., 21.90 chs.; thence,

North, 11.12 chs.; thence

West, 7.69 chs., returning to sec. line at 40.00 ch. station thereon.

From 8.37 ch. station, asc. 1035 ft. over broken precipitous SW. and S. slopes to

33.00 (Approx.) Top of high, notched peak in a ridge of the Sand Tank Mountains, bearing N. 70° W. and S. 70° E. Top of this peak is about 500 ft. above a saddle in the ridge, which is 7.70 chs. E. of peak. The N. and S. sides of the peak have sheer faces about 280 ft. high, and the peak slopes precipitously to E. and steeply to W. Desc. 819 ft. over precipitous broken N. and NW. slopes over a cliff and slide rock to

40.00 Traverse point on sec. line:
Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S14 | S13

1938

No bearing trees available.

Raise a mound of stone, 4 ft. base, 2 1/2 ft. high, W. of cor.

Thence on sec. line, continuing measurement from sec. cor.

Desc. 383 ft. over steep, rocky NW. slope to

Survey: Subdivision Lines: T. 9 S., R. 2 W.

BOOK 4231

15

Chains

- 57.20 Foot of steep slope, bears E. and W. Enter rolling land. Desc. 36 ft. over gradual N. slope.
- 60.40 Wash, 100' lks. wide, course W. Asc. 17 ft. over SW. slope.
- 64.24 Desc. 31 ft. over NW. slope.
- 67.20 Asc. 26 ft. over SW. slope.
- 70.48 Desc. 23 ft. over NW. slope.
- 75.50 Asc. gradually over W. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 11, 12, 13 and 14, with brass cap marked

T9S	R2W
S11	S12
S14	S13

1938

No bearing trees available.

• Raise a mound of stone, 3' ft. base, 2 ft. high, W. of cor.

Land, mountainous, broken and rolling.

Soil, rocky, 4th rate.

Timber, paloverde and ironwood.

Undergrowth, greasewood and cacti.


N. 89° 55' E., on random line, bet. secs. 12 and 13.

- 40.00 Set temp. $\frac{1}{4}$ set. cor.

- 71.85 Discontinue chaining on random sec. line at this point owing to a high peak ahead, with sheer cliffs on its W., N. and E. sides. Obtain measurement of the remainder of the random sec. line by a traverse line around the S. side of the peak as follows:

From 71.85 ch. station;

S. 39 $\frac{1}{4}$ ° E., 3.92 chs.; thence,
 N. 78 $\frac{1}{2}$ ° E., 4.53 chs.; thence,
 N. 74° 41' E., 1.42 chs. to the
 W.C. to the cor. of secs. 7, 12,
 13 and 18, on E. bdy. of the Tp.,
 established under this group as
 described in field notes of sur-
 vey of W. bdy. of T. 9 S., R. 1 W.
 The point for said sec. cor. is
 on face of cliffs, and the W.C. is
 1.70 chs. S. from the cor. point.

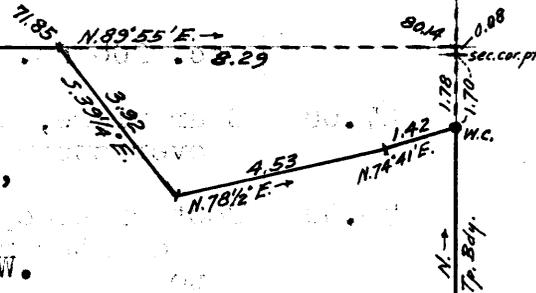

The lat. and dep. of the traverse from 71.85 ch. station to the point for cor. of secs. 7, 12, 13 and 18 are, 0.06 chs. S. and 8.29 chs. E., respectively. The lat. and dep. of random line to 71.85 ch. station are 0.10 chs. N. and 71.85 chs. E., respectively.

The lat. and dep. of the true sec. line are: 0.04 chs. N. and 80.14 chs. E., respectively.

The random sec. line extended would therefore at

- 80.14 Intersect the E. bdy. of the Tp., 8 lks. N. of the true

Survey: Subdivision Lines: T. 9 S., R. 2 W.

16

Chain	<p>point for cor. of secs. 7, 12, 13 and 18.</p> <p>Thence</p> <p>S. 89° 58' W., on true line, bet. secs. 12 and 13.</p> <p>Over mountainous land, thru very scattering timber and undergrowth. Measurement of 8.29 chs. by traverse hereinbefore described.</p> <p>Asc. about 200 ft. over cliff facing NE.</p> <p>1.00 (Approx.) Top of cliff, bears NW. and SE. Over top of peak to</p> <p>2.50 (Approx.) Top of same cliff, 250 ft. high, bearing NE. and S., facing NW. and W. Desc. about 375 ft. over cliff and precipitous broken W. slope to</p> <p>6.80 (Approx.) Foot of precipitous slope, bears N. and S. Desc. about 40 ft. over W. slope to</p> <p>8.29 A point 2 lks. S. of traverse point. Thence on sec. line, continuing measurement. Desc. 359 ft. over steep W. slope.</p> <p>24.20 Wash, 40 lks. wide, in gulch, course N. Asc. 92 ft. over NE. slope.</p> <p>32.70 Point of rocky spur, slopes N. Desc. 43 ft. over NW. slope.</p> <p>36.10 Wash, 10 lks. wide, course N. Asc. 59 ft. over NE. slope to</p> <p>40.07 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> $\frac{S\ 12}{S\ 13}$ <p>1938</p> </div> <p>No bearing trees available.</p> <p>Asc. 206 ft. over broken NE. slope.</p> <p>67.00 Spur ridge, bears NW. and SE., sloping NW. Desc. 437 ft. over steep NW. slope to</p> <p>78.00 Foot of steep slope, bears N. and S. Leave mountainous and enter rolling land. Desc. slightly over W. slope to</p> <p>80.14 The cor. of secs. 11, 12, 13 and 14.</p> <p>Land, mountainous, broken and rolling. Soil, rocky, 4th rate. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.</p> <hr/> <p>N. 0° 01' W., bet. secs. 11 and 12.</p> <p>Over rolling land, thru scattering timber and undergrowth.</p> <p>Asc. 65 ft. over W. and SW. slopes.</p>
-------	--

Chains

12.00 Low spur ridge, bears N. 60° E. and S. 60° W. sloping SW., and turning to SE. at about 5 chs. NE. from this point. Desc. 80 ft. over NW. slope to

22.00 Asc. 50 ft. over W. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in the ground to bedrock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

4

S11 | S12

1938

from which

A paloverde, 3 ins. diam., bears S. 70 3/4° E., 43 lks. dist., marked 1/4 S12 BT.

A catclaw, 3 ins. diam., bears S. 87° W., 21 lks. dist., marked 1/4 S11 BT.

Asc. 14 ft. over W. slope.

41.50 Desc. slightly over NW. slope.

43.70 Wash, 40 lks. wide, course W. Asc. gradually over W. slope.

59.60 Wash, 25 lks. wide, course S. 70° W. Asc. 90 ft. over S. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 18 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 1, 2, 11 and 12, with brass cap marked

T9S	R2W.
S2	S1
S11	S12

1938

No bearing trees available.

Land, rolling.

Soil, rocky, 3rd and 4th rates.

Timber, paloverde, ironwood, mesquite and catclaw.


Undergrowth, greasewood, sagebrush, catclaw and cacti.

N. 89° 58' E., on random line, bet. secs. 1 and 12.

40.00 Set temp. 1/4 sec. cor.

78.62 Discontinue chaining on random sec. line at this point, owing to cliffs ahead on NW. side of a high peak. Obtain measurement of remainder of line by a traverse line around base of cliffs as follows:

From 78.62 ch. station on random sec. line;
 N. 15 1/2° E., 1.09 chs.; thence,
 S. 88 1/2° E., 1.11 chs. to the witness cor. to secs. 1, 6, 7 and 12, established under this group at 1.00 ch. N. of the true sec. cor. point, as described in the field notes of

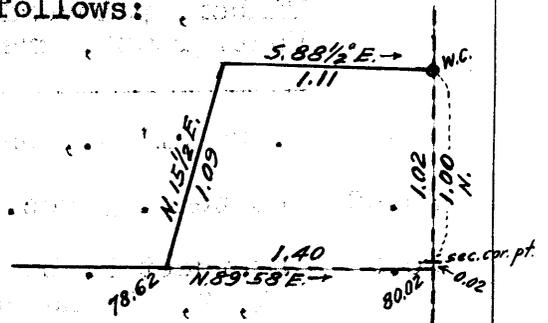

Chains	
	<p>survey of W. bdy. of T. 9 S., R. 1 W.</p> <p>The lat. and dep. of traverse from 78.62 ch. point on random sec. line to the sec. cor. point are therefore; 0.02 chs. N. and 1.40 chs. E., respectively. The lat. and dep. of random sec. line to 78.62 ch. station are; 0.05 chs. N., and 78.62 chs. E., respectively.</p> <p>The lat. and dep. of true sec. line are therefore; 0.07 chs. N. and 80.02 chs. E., respectively. The random line extended will therefore at</p>
80.02	<p>Intersect E. bdy. of Tp. 2 lks. S. of the true point for cor. of secs. 1, 6, 7 and 12.</p> <p>Thence</p> <p>S. 89° 57' W., on true line, bet. secs. 1 and 12.</p> <p>Over mountainous land, thru very scattering timber and undergrowth.</p> <p>Desc. over NW. face of cliffs. Measurement by traverse hereinbefore described.</p>
1.40	<p>A point 2 lks. N. of traverse point. Thence on sec. line continuing measurement. Desc. 460 ft. over steep W. slope to</p>
15.69	<p>Foot of steep slope. Enter rolling land. Desc. 52 ft. over gradual W. slope.</p>
32.00	<p>Wash, 20 lks. wide, course SW. Asc. 18 ft. over SE. slope.</p>
37.00	<p>Asc. gradually over S. slope to</p>
40.01	<p>Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p>
	$\frac{1}{4} \frac{S \ 1}{S \ 12}$ <p>1938</p> <p>No bearing trees available.</p>
	<p>Asc. 46 ft. over S. slope.</p>
47.32	<p>Desc. 85 ft. over S. slopes.</p>
59.70	<p>Asc. 30 ft. over S. slope.</p>
64.00	<p>Desc. 70 ft. over S. slope to</p>
80.02	<p>The cor. of secs. 1, 2, 11 and 12.</p> <p>Land, mountainous and rolling. Soil, rocky, 3rd and 4th rates. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, sagebrush, catclaw and cacti.</p>
	<p>N. 0° 01' W., on random line, bet. secs. 1 and 2.</p>
40.00	<p>Set temp. $\frac{1}{4}$ sec. cor.</p>
80.00	<p>Intersect N. bdy. of Tp. 12 lks. W. of the cor. of secs. 1, 2, 35 and 36, hereinbefore described.</p>

Survey: Subdivision Lines: T. 9 S., R. 2 W.

19

Chains	
	Thence
	S. 0° 04' W., on true line, bet. secs. 1 and 2.
	Over mountainous and heavily rolling land, thru scattering timber and undergrowth.
	Asc. 76 ft. over NE. slope.
17.10	Ridge, bears NW. and SE. Desc. 105 ft. over S. slope.
27.50	Head of drain, course SE. Asc. 185 ft. over NE. slope.
38.90	Spur, slopes SE. Desc. 15 ft. over S. slope to
40.00	True point for $\frac{1}{4}$ sec. cor. is on insecure ground at top of cliff, bearing E. and W. where it is impracticable to monument the cor., therefore establish witness cor. 1.20 chs. S. 0° 04' W. Desc. 140 ft. over S. face of cliff to
41.20	Base of cliff, bears E. and W. Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock over a cross (X) marked thereon, and in a mound of stone to top, for witness cor. to $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ W C S2 S1 1938
	No bearing trees available.
	Desc. 200 ft. over steep S. slope.
56.50	Wash, 30 lks. wide, course W. Asc. 116 ft. over N. slope.
57.80	Mine prospect shaft bears E., 7.70 chs. dist.
67.30	Ridge, bears E. and W. Desc. 137 ft. over S. slope to
80.00	The cor. of secs. 1, 2, 11 and 12. Land, mountainous, heavily rolling and broken. Soil, rocky, 4th rate. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, sagebrush, catclaw and cacti.
	From the std. cor. of secs. 34 and 35 on the S. bdy. of the Tp. (2nd Std. Par. S.) reestablished in 1924, which is an iron post, 2 ins. in diam.; projecting 36 ins. above ground, firmly set in a mound of stone, and marked on brass cap as described in the official record.
	N. 0° 01' W., bet. secs. 34 and 35.
	Over mountainous land, thru scattering timber and undergrowth.
	Asc. 85 ft. over steep, W. slope.
11.74	Desc. 20 ft. over W. slope
19.40	Spur, slopes N. 10° W. Desc. 300 ft. over NE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock, and in a mound of stone to top,

Chains

for $\frac{1}{4}$ sec. cor., with brass cap marked

S34 | S35

1938

from which

A paloverde, 4 ins. diam., bears S. $57\frac{1}{4}^\circ$ E., 71 lks. dist., marked $\frac{1}{4}$ S35 BT.

A paloverde, 6 ins. diam., bears N. $46\frac{1}{4}^\circ$ W., 43 lks. dist., marked $\frac{1}{4}$ S34 BT.

Desc. 260 ft. over steep E. and NE. slopes to

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base and in a mound of stone to top, for cor. of secs. 26, 27, 34 and 35, with brass cap marked

T9S	R2W
S27	S26
S34	S35

1938

from which

A paloverde, 4 ins. diam., bears S. 20° W., 64 lks. dist., marked T9S R2W S34 BT.

A paloverde, 5 ins. diam., bears N. 76° W., 126 lks. dist., marked T9S R2W S27 BT.

No NE. and SE. bearing trees available.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, paloverde.

Undergrowth, greasewood and cacti.

East, on random line, bet. secs. 26 and 35.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.04

Intersect N. and S. line 5 lks. N. of the cor. of secs. 25, 26, 35 and 36.

Thence

N. $89^\circ 58'$ W., on true line, bet. secs. 26 and 35.

Over mountainous land, thru scattering timber and undergrowth.

Desc. 254 ft. over steep SW. slope to

12.00

Foot of steep slope bears NW. and SE. Enter gently rolling land. Desc. 55 ft. over gradual SW. slope.

36.50

Wash, 30 lks. wide, course NW. Asc. 10 ft. over NE. slope to

40.02

Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

Chains	
	$\frac{1}{4}$ $\frac{S 26}{S 35}$ 1938 from which A paloverde, 5 ins. diam., bears S. $42\frac{1}{2}^{\circ}$ W., 98 lks. dist., marked $\frac{1}{4}$ S35 BT. A paloverde, 5 ins. diam., bears N. 77° W., 133 lks. dist., marked $\frac{1}{4}$ S26 BT. Desc. gradually over N. and NW. slopes. 72.30 Wash, 20 lks. wide, 10 ft. deep, course N. 60° E., from S. Asc. gradually over NE. slope to 78.60 Foot of steep slope, bears NE. and SE. Enter mountainous land. Asc. 52 ft. over NE. slope to 80.04 The cor. of secs. 26, 27, 34 and 35. Land, mountainous and gently rolling. Soil, rocky, 4th. rate. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.
	<hr/> N. $0^{\circ} 01'$ W., bet. secs. 26 and 27. Over mountainous land, thru scattering timber and undergrowth. Desc. 138 ft. over NE. slope. 17.30 Wash, 50 lks. wide, course N. 84° W., from N. 72° E. Asc. 365 ft. over SW. slope. 39.10 Ridge, bears N. 80° W. and S. 80° E. Turns to NE. at about 15 chs. S. 80° E. from this point. Desc. 15 ft. over N. slope to 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S27 S26 1938 from which A paloverde, 4 ins. diam., bears S. $18\frac{1}{2}^{\circ}$ E., 81 lks. dist., marked $\frac{1}{4}$ S26 BT. A paloverde, 4 ins. diam., bears N. $75\frac{1}{2}^{\circ}$ W., 81 lks. dist., marked $\frac{1}{4}$ S27 BT. Desc. 361 ft. over N. slope. 65.10 Small short wash, course N. 30° E. Enter rolling land. Asc. 10 ft. over E. slope. 67.00 Desc. 25 ft. over NE. slope. 74.50 Wash, 10 lks. wide, course N. 70° W. Enter nearly level land. 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in

22.

Chains

the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked

T9S	R2W
S22	S23
S27	S26

1938

from which

A mesquite, 10 ins. diam., bears S. 59° E., 85 lks. dist., marked T9S R2W S26 BT.

A paloverde, 6 ins. diam., bears N. 76½° W., 191 lks. dist., marked T9S R2W S22 BT.

No NE. and SW. bearing trees available.

Raise a mound of stone, .3 ft. base, 2 ft. high, W. of cor.

Land, mountainous, rolling and nearly level.

Soil, rocky, 4th rate.

Timber, paloverde and mesquite.

Undergrowth, greasewood, sagebrush and cacti.

S. 89° 58' E., on random line, bet. secs. 23 and 26.

40.00 Set temp. ¼ sec. cor.

80.12 Intersect N. and S. line, 8 lks. S. of the cor. of secs. 23, 24, 25 and 26.

Thence

S. 89° 59' W., on true line, bet. secs. 23 and 26.

Over gently rolling and nearly level land, thru scattering timber and undergrowth. Desc. gradually over S. and SW. slopes.

9.20 Wash, 10 lks. wide, course N. 80° W. Desc. gradually over N. and NW. slopes.

23.12 Same wash, course SW. Desc. gradually over S. slope to

40.06 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked

¼	S 23
	S 26

1938

from which

A paloverde, 5 ins. diam., bears N. 23° E., 287 lks. dist., marked ¼ S23 BT.

A paloverde, 6 ins. diam., bears S. 27½° W., 127 lks. dist., marked ¼ S26 BT.

40.12 Same wash, course NW. Asc. 45 ft. over N. slope.

57.25 Desc. 62 ft. over NW. slope.

79.62 Wash, 15 lks. wide, course NW.

80.12 The cor. of secs. 22, 23, 26 and 27.

Chains

- Land, gently rolling and nearly level.
Soil, gravelly and rocky, 4th rate.
Timber, paloverde and ironwood.
Undergrowth, sagebrush, greasewood and cacti.
-
- N. 0° 01' W.; bet. secs. 22 and 23:
Over nearly level land, thru scattering timber and undergrowth.
- 2.60 Wash, 15 lks. wide, course NW.
- 7.60 Wash, 15 lks. wide, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
S22 | S23
1938
from which
- A paloverde, 4 ins. diam., bears N. 52 $\frac{1}{4}$ ° E., 222 lks. dist., marked $\frac{1}{4}$ S23 BT.
- A paloverde, 4 ins. diam., bears S. 66° W., 193 lks. dist., marked $\frac{1}{4}$ S22 BT.
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 43.60 Wash, 40 lks. wide, course N. 80° W. Thence over gently rolling land. Asc. 21 ft. over S. slope.
- 52.60 Low spur, slopes W. Desc. 37 ft. over N. slope.
- 56.66 Wash, 15 lks. wide, course N. 70° W. Thence over nearly level land.
- 71.15 Enter gently rolling land. Asc. 40 ft. over S. slope.
- 77.00 Low spur, slopes W. Desc. 31 ft. over N. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock and in a mound of stone to top, for cor. of secs. 14, 15, 22 and 23, with brass cap marked
- T9S R2W
S15 | S14
S22 | S23
1938
from which
- An ironwood, 5 ins. diam., bears N. 29 $\frac{1}{4}$ ° E., 186 lks. dist., marked T9S R2W S14 BT.
- An ironwood, 4 ins. diam., bears S. 0 $\frac{1}{2}$ ° E., 125 lks. dist., marked T9S R2W S23 BT.
- A paloverde, 5 ins. diam., bears N. 89 $\frac{1}{4}$ ° W., 66 lks. dist., marked T9S R2W S15 BT.
- No SW. bearing tree available.

Survey: 'Subdivision Lines: T. 9 S., R. 2 W.

Chains	Land, nearly level and gently rolling. Soil, gravelly and rocky, 4th rate. Timber, paloverde and ironwood. Undergrowth, greasewood and cacti.
	N. 89° 59' E., on random line, bet. secs. 14 and 23.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.18	Intersect the cor. of secs. 13, 14, 23 and 24. Thence S. 89° 59' W., on true line, bet. secs. 14 and 23. Over heavily rolling land, thru scattering timber and undergrowth. Desc. 71 ft. over SW. slope to
8.18	Foot of slope, bears NW. and SE. Enter gently rolling land. Desc. 63 ft. over gradual SW. slope.
23.20	Thence over nearly level land.
40.09	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ $\frac{S 14}{S 23}$ 1938 from which
	A paloverde, 5 ins. diam., bears N. 45° E., 35 lks. dist., marked $\frac{1}{4}$ S14 BT.
	A paloverde, 6 ins. diam., bears S. 85 $\frac{1}{4}$ ° E., 29 $\frac{3}{4}$ lks. dist., marked $\frac{1}{4}$ S23 BT.
45.18	Wash, 20 lks. wide, course SW. Enter rolling land. Asc. 52 ft. over SE. slope.
51.40	Thence along rolling S. slope. Asc. gradually.
59.80	Desc. 63 ft. over SW. slope.
66.94	Asc. 34 ft. over SE. slope.
71.91	Low spur, slopes S. 10° W. Turns to W. about 3 chs. SW. from this point. Desc. 50 ft. over NW. and N. slopes to
80.18	The cor. of secs. 14, 15, 22 and 23. Land, heavily and gently rolling and nearly level. Soil, rocky, 4th rate. Timber, paloverde and ironwood. Undergrowth, sagebrush, greasewood and cacti.
	N. 0° 01' W., bet. secs. 14 and 15. Over gently rolling and nearly level land, thru scattering timber and undergrowth. Desc. gradually over NW. and W. slopes.
20.40	Asc. 35 ft. over SW. slope.
24.77	Desc. 35 ft. over NW. slope.

Survey: Subdivision Lines: T. 9 S., T. 2 W.

BOOK 4231

25

Chains

33.05 Wash, 20 lks. wide, course W. Asc. 15 ft. over S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

 $\frac{1}{4}$

S15 | S14

1938

from which

A paloverde, 4 ins. diam., bears N. $41\frac{1}{2}^{\circ}$ E., 145 lks. dist., marked $\frac{1}{4}$ S14 BT.

A paloverde, 4 ins. diam., bears S. $61\frac{1}{2}^{\circ}$ W., 155 lks. dist., marked $\frac{1}{4}$ S15 BT.

Enter heavily rolling and mountainous land. Asc. 164 ft. over S. slope.

52.20 Ridge, bears E. and W. Desc. 105 ft. over N. slope.

58.00 Drain, course W. Asc. 137 ft. over S. slope.

68.20 Spur ridge, bears E. and W., sloping W. Turns to NW. at about 6 chs. W. of this point. Desc. 164 ft. over N. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground, to bedrock and in a mound of stone to top, for cor. of secs. 10, 11, 14 and 15, with brass cap marked

T9S R2W

S10 | S11

S15 | S14

1938

from which

A paloverde, 7 ins. diam., bears N. 1° E., 248 lks. dist., marked T9S R2W S11 BT.

A paloverde, 5 ins. diam., bears S. $49\frac{1}{2}^{\circ}$ E., 186 lks. dist., marked T9S R2W S14 BT.

A paloverde, 3 ins. diam., bears S. $38\frac{1}{4}^{\circ}$ W., 124 lks. dist., marked T9S R2W S15 BT.

A paloverde, 4 ins. diam., bears N. $25\frac{1}{4}^{\circ}$ W., 242 lks. dist., marked T9S R2W S10 BT.

Land, gently rolling, nearly level, heavily rolling and mountainous.

Soil, rocky, 4th rate.

Timber, paloverde, ironwood and mesquite.

Undergrowth, catclaw, sagebrush and cacti.

N. $89^{\circ} 59'$ E.; on random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 11, 12, 13 and 14.

Thence

Chains	<p>S. 89° 57' W., on true line, bet. secs. 11 and 14.</p> <p>Over gently rolling land, thru scattering timber and undergrowth.</p> <p>Desc. 10 ft. over W. slope.</p> <p>3.32 Head of draw course SW. Desc. gradually over S. slope.</p> <p>11.26 Enter heavily rolling, mountainous land. Asc. 75 ft. over SE. slope.</p> <p>19.54 Spur ridge, bears NE. and SW. sloping SW. Desc. 80 ft. over NW. slope.</p> <p>25.14 Head of draw, course NE. Asc. 31 ft. over E. slope.</p> <p>31.00 Spur, slopes NE. Desc. 118 ft. over NW. slope to</p> <p>40.07 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">.4 $\frac{S 11}{S 14}$</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p> <ul style="list-style-type: none"> • A paloverde, 4 ins. diam., bears S. 64$\frac{1}{4}$° E., 108 lks. dist., marked $\frac{1}{2}$ S14 BT. • A paloverde, 4 ins. diam., bears N. 66° W., 59 lks. dist., marked $\frac{1}{2}$ S11 BT. <p>Desc. 10 ft. over NW. slope.</p> <p>41.16 Enter gently rolling land. Desc. 60 ft. over N. slope to</p> <p>80.14 The cor. of secs. 10, 11, 14 and 15.</p> <p>Land, gently and heavily rolling and mountainous. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, sagebrush and cacti.</p>
14.00	<p>N. 0° 01' W., bet. secs. 10 and 11.</p> <p>Over gently rolling land, thru scattering timber and undergrowth.</p> <p>Desc. gradually over N. slope.</p> <p>Asc. 50 ft. over SE. slope.</p> <p>24.32 Desc. 35 ft. over NE. slope.</p> <p>29.95 Asc. 29 ft. over SW. slope.</p> <p>35.00 Desc. gradually over W. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">.4</p> <p style="text-align: center;">S10 S11</p> <p style="text-align: center;">1938</p> <p style="text-align: right;">from which</p>

Survey: Subdivision Lines: T. 9 S., R. 2 W.

BOOK 4251

Chains

An ironwood, 4 ins. diam., bears N. $13\frac{1}{2}^{\circ}$ E., 51 lks. dist., marked $\frac{1}{4}$ S11 BT.

An ironwood, 5 ins. diam., bears S. $13\frac{3}{4}^{\circ}$ W., 185 lks. dist., marked $\frac{1}{4}$ S10 BT.

Desc. 30 ft. over NW. slope.

47.00 Wash, 80 lks. wide, course S. 70° W. Enter mountainous land. Ascend 340 ft. over S. slope.

58.50 Spur, slopes W. Desc. 236 ft. over NE. slope.

69.50 Head of gulch, course W. Asc. 108 ft. over S. slope.

73.60 Spur, slopes W. Desc. 147 ft. over N. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 4 ins. in the ground to bedrock; over a cross (X) marked thereon, and in a mound of stone to top, for cor. of secs. 2, 3, 10 and 11, with brass cap marked

T9S	R2W
63	S2
S10	S11

1938

No bearing trees available.

Land, gently rolling and mountainous.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, sagebrush, catclaw, greasewood and cacti.

N. $89^{\circ} 57'$ E., on random line, bet. secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line, 3 lks. S. of the cor. of secs. 1, 2, 11 and 12.

Thence

S. $89^{\circ} 56'$ W., on true line, bet. secs. 2 and 11.

Over heavily rolling land, thru scattering timber and undergrowth. Asc. 19 ft. over S. slope.

4.14 Desc. 65 ft. over S. slope.

28.10 Enter mountainous land. Asc. 176 ft. over E. slope.

37.80 Spur, slopes S. Desc. 80 ft. over SW. slope to

40.05 Set an iron post, 3 ft. long, 1 in. in diam.; 4 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 2
	S 11

1938

No bearing trees available.

Descend 108 ft. over SW. slope.

Survey: Subdivision Lines: T. 9 S., R. 2 W.

28

Chains

- 55.10 Drain, near head, course NW. Asc. 74 ft. over NE. slope.
- 61.10 Point of spur, slopes N. Desc. 128 ft. over NW. and N. slopes to
- 80.10 The cor. of secs. 2, 3, 10 and 11.
- Land, heavily rolling and mountainous.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, catclaw and cacti.
-
- N. 0° 01' W., on random line, bet. secs. 2 and 3.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.09 Intersect N. bdy. of Tp., 9 lks. W. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described.
- Thence
- S. 0° 03' W., on true line, bet. secs. 2 and 3.
- Over gently rolling land, thru scattering timber and undergrowth. Desc. 7 ft. over SE. slope.
- 3.09 Wash, 20 lks. wide, course W. Asc. 12 ft. over N. slope to
- 8.00 Enter heavily rolling and mountainous land. Asc. 140 ft. over N. slope.
- 22.84 Ridge, bears E. and W. Desc. 58 ft. over SW. slope.
- 34.89 Wash, 40 lks. wide, course W. Asc. 15 ft. over N. slope to
- 40.09 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
- S3 | S2
- 1938
- No bearing trees available.
- Asc. 400 ft. over N. slope.
- 61.39 Ridge, bears E. and W. Desc. 484 ft. over S. slope.
- 79.39 Bottom of gulch, 15 lks. wide, course SW. Asc. 8 ft. over N. slope to
- 80.09 The cor. of secs. 2, 3, 10 and 11.
- Land, gently and heavily rolling and mountainous.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, catclaw and cacti.
-

Chains

From the standard cor. of secs. 33 and 34, on the S. bdy. of Tp. (2nd Std. Par. S.) reestablished in 1924, which is an iron post, 2 ins. in diam., projecting 36 ins. above ground, firmly set in a mound of stone to top, with brass cap marked as described in the official record.

N. 0° 02' W., bet. secs. 33 and 34.


Over heavily rolling and mountainous land, thru scattering timber and undergrowth.

Asc. 300 ft. over SW. slope to

34.20 Top of cliff, 60 ft. high, bearing NW. and SE., facing SW. Asc. 7 ft. over W. slope.

35.31 Desc. 27 ft. over W. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked



No bearing trees available.


Desc. 40 ft. over rolling W. slope.

60.50 Ridge, bears N. 20° W. and S. 20° E. Desc. 60 ft. over NE. slope;

69.41 Asc. 34 ft. over E. slope.

74.38 Desc. 50 ft. over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 27, 28, 33 and 34, with brass cap marked



1938

No bearing trees available.

Land, heavily rolling and mountainous.
Soil, rocky, 4th rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush and cacti.

East, on random line, bet. secs. 27 and 34.

40.00 Set temp. 1/4 sec. cor.

80.14 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 26, 27, 34 and 35.

Thence

Chains	N. 89° 56' W., on true line, bet. secs. 27 and 34.
	Over mountainous land, thru scattering timber and undergrowth.
	Asc. 71 ft. over NE. slope.
3.80	Spur, slopes NW. from S. Desc. 145 ft. over W. slope.
10.40	Bottom of ravine, course N. Asc. 134 ft. over NE. slope.
23.84	Spur, slopes N. Desc. 159 ft. over W. slope.
37.70	Wash, 35 lks. wide, in bottom of ravine, course N. Asc. 110 ft. over E. slope.
40.07	Set an iron post, 3 ft. long, 1 in. in diam., 22 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ $\frac{S. 27}{S. 34}$
	1938
	No bearing trees available.
	Asc. 381 ft. over E. slope.
63.88	Spur, slopes NE. from S. Desc. 187 ft. over NW. slope.
69.84	Bottom of gulch, 8 lks. wide, course NE. Asc. 251 ft. over NE. slope to
80.14	The cor. of secs. 27, 28, 33 and 34.
	Land, mountainous.
	Soil, rocky, 4th rate.
	Timber, paloverde, ironwood and mesquite.
	Undergrowth, greasewood, catclaw and cacti.
	N. 0° 02' W., bet. secs. 27 and 28.
	Over mountainous land, thru scattering timber and undergrowth.
	Desc. slightly over NE. slope to
1.00	Ridge, bears NE. and S. 85° W. sloping NE. into saddle. Desc. 167 ft. over NW. slope.
10.00	Head of drain, course W. Asc. 57 ft. over SW. slope.
17.00	Same ridge, bears W., from SE. Desc. 143 ft. over N. slope.
23.30	Head of drain, course E. Asc. 146 ft. over SE. slope.
30.23	Same ridge, bears NE. and SW. Desc. 175 ft. over N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 5 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

Chains	<p>No bearing trees available.</p> <p>Desc. 98 ft. over N. slope.</p> <p>48.20 • Bottom of gulch, course NW., near head. Asc. 110 ft. over SW. slope.</p> <p>58.00 Same ridge, bears NW. and SE. Desc. 238 ft. over NE. slope.</p> <p>71.68 Wash, 70 lks. wide, course W. for 4.00 chs., thence NW. Asc. 39 ft. over SW. slope to</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 4 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for cor. of secs. 21, 22, 27, and 28, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T9S</td> <td>R2W</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> </table> <p>1938</p> <p>from which</p> <p>A paloverde, 4 ins. diam., bears N. 64½° E., 48 lks. dist., marked T9S R2W S22 BT.</p> <p>No other bearing trees available.</p> <p>Land, mountainous, Soil, rocky, 4th rate. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, catclaw and cacti.</p> </div> <hr/> <p>S. 89° 56' E., on random line, bet. secs. 22 and 27.</p> <p>40.00 Set temp. ¼ sec. cor.</p> <p>80.12 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 22, 23, 26 and 27.</p> <p>Thence</p> <p>N. 89° 55' W., on true line, bet. secs. 22 and 27.</p> <p>Over nearly level land, thru scattering timber and undergrowth.</p> <p>4.60 Wash, 20 lks. wide, course NW.</p> <p>10.12 Foot of slope, bears NW. and SE. Enter heavily rolling and mountainous land. Asc. 220 ft. over NE. slope.</p> <p>34.92 Ridge, bears NW. and SE. Desc. 113 ft. over W. slope to</p> <p>40.06 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr> <td>¼</td> <td>S 22</td> </tr> <tr> <td></td> <td>S 27</td> </tr> </table> <p>1938</p> <p>No bearing trees available.</p> <p>Desc. 30 ft. over W. slope.</p> </div>	T9S	R2W	S21	S22	S28	S27	¼	S 22		S 27
T9S	R2W										
S21	S22										
S28	S27										
¼	S 22										
	S 27										

Chains

- 46.12 Draw, course NW. Asc. 63 ft. over NE. slope.
- 51.12 Point of spur, slopes N. Desc. 109 ft. over NW. slope.
- 58.77 Head of draw, course N. Asc. 80 ft. over NE. and N. slopes.
- 68.69 Desc. gradually over N. slope.
- 73.32 Spur, slopes NW. Desc. 181 ft. over SW. slope to
- 80.12 The cor. of secs. 21, 22, 27 and 28.

Land, nearly level, heavily rolling and mountainous.
 Soil, rocky, 4th rate.
 Timber, paloverde, ironwood, and mesquite.
 Undergrowth, greasewood, cholla, ocotillo, sagebrush and
 catclaw.

N. 0° 02' W., bet. secs. 21 and 22.

Over heavily rolling land, thru scattering timber and
 undergrowth.

Asc. 30 ft. over SW. slope.

- 6.00 Point of spur, slopes NW. Desc. 43 ft. over N. slope.
- 9.60 Wash, 15 lks. wide, course SW. Asc. 170 ft. over S. slope.
- 17.90 Spur, slopes W. Desc. 124 ft. over N. slope to
- 32.23 Thence over gently rolling land. Desc. 14 ft. over N.
slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in
the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S21 | S22

1938

No bearing trees available.

Raise a mound of stone, 2½ ft. base, 2½ ft. high, W.
of cor.

Desc. 10 ft. over N. slope.

- 43.90 Wash, 10 lks. wide, course W. Asc. 15 ft. over SW. slope.
- 50.00 Low ridge, bears NW. and SE. Desc. 20 ft. over NE. slope
to
- 61.00 Thence over nearly level land.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in
the ground, for cor. of secs. 15, 16, 21 and 22, with
brass cap marked

T9S	R2W
S16	S15
S21	S22

1938

Chains

No bearing trees available.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high,
W. of cor.

Land, heavily and gently rolling and nearly level.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

S. $89^{\circ} 55'$ E., on random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect N. and S. line, 19 lks. S. of the cor. of secs.
14, 15, 22 and 23.

Thence

S. $89^{\circ} 57'$ W., on true line, bet. secs. 15 and 22.

Over gently rolling land, thru scattering timber and
undergrowth. Desc. 65 ft. over N. and NW. slopes.

27.52 Asc. 50 ft. over SE. slope.

36.94 Top of ascent on S. side of hill. Top of hill, 30 ft.
above this point, bears N. 2.00 chs. dist. Desc. 30 ft.
over SW. slope to.

40.07 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in
the ground to bedrock, with a stone marked with a cross
(X) deposited at base, and in a mound of stone to top,
for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S 15}{S 22}$

1938

No bearing trees available.

Desc. 49 ft. over SW. slope.

48.54 Wash, 50 lks. wide, course NW. Thence over nearly level
land.

53.74 Wash, 50 lks. wide, course NW.

80.14 The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling, hilly and nearly level.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

N. $0^{\circ} 02'$ W., bet. secs. 15 and 16.

Over nearly level land, thru scattering timber and under-
growth.

11.30 Wash, 100 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 18 ins. in
the ground to bedrock, and in a mound of stone to top,
for $\frac{1}{4}$ sec. cor., with brass cap marked

Chains	<p style="text-align: center;"> $\frac{1}{4}$ S16 S15 1938 from which A paloverde, 5 ins. diam., bears S. $85\frac{1}{2}^\circ$ E., 88 lks. dist., marked $\frac{1}{4}$ S15 BT. A paloverde, 4 ins. diam., bears S. $88\frac{1}{2}^\circ$ W., 53 lks. dist., marked $\frac{1}{4}$ S16 BT. Continue over nearly level land. 48.50 Wash, 30 lks, wide, course S. 30° W.. 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for the cor. of secs. 9, 10, 15 and 16, with brass cap marked <div style="text-align: center;"> <table border="1"> <tr> <td>T9S</td> <td>R2W</td> </tr> <tr> <td>S9</td> <td>S10</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> </table> 1938 from which A paloverde, 4 ins. diam., bears N. 57° E., 182 lks. dist., marked T9S R2W S10 BT. A paloverde, 6 ins. diam., bears S. $40\frac{1}{2}^\circ$ E., 131 lks. dist., marked T9S R2W S15 BT. A paloverde, 4 ins. diam., bears S. $52\frac{1}{2}^\circ$ W., 69 lks. dist., marked T9S R2W S16 BT. A paloverde, 5 ins. diam., bears N. $46\frac{1}{4}^\circ$ W., 202 lks. dist., marked T9S R2W S9 BT. Land, nearly level. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush, catclaw and cacti. </div> <hr/> N. $89^\circ 57'$ E., on random line, bet. secs. 10 and 15. 40.00 Set temp. $\frac{1}{4}$ sec. cor. 80.16 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 10, 11, 14 and 15. Thence N. $89^\circ 59'$ W., on true line, bet. secs. 10 and 15, Over heavily rolling and mountainous land, thru scattering timber and undergrowth. Asc. 22 ft. over N. slope. 3.10 Desc. 11 ft. over NW. slope. 4.60 Asc. 150 ft. over NE. slope. 19.26 Spur ridge, bears NW, and SE., sloping NW. Desc. 137 ft. over W. slope. 24.56 Head of drain, course SW. Asc. 117 ft. over SE. slope. </p>	T9S	R2W	S9	S10	S16	S15
T9S	R2W						
S9	S10						
S16	S15						

Survey: Subdivision Lines: T. 9 S., R. 2 W.

BOOK 4201

Chains	
35.86	Same ridge, bears NE. and SW. sloping SW. Desc. 92 ft. over W. slope to
40.08	Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 10}{S 15}$
	1938
	from which
	A paloverde, 4 ins. diam., bears N. $0\frac{1}{2}^\circ$ W., 48 lks. dist., marked $\frac{1}{4}$ S10 BT.
	A paloverde, 4 ins. diam., bears S. $54\frac{1}{2}^\circ$ E., 159 lks. dist., marked $\frac{1}{4}$ S15 BT.
	Desc. 92 ft. over W. slope to
50.86	Leave heavily rolling and enter nearly level land.
80.16	The cor. of secs. 9, 10, 15 and 16.
	Land, heavily rolling, mountainous and nearly level. Soil, rocky, 4th rate.
	Timber, paloverde, ironwood and mesquite.
	Undergrowth, greasewood, sagebrush, catclaw and cacti.
N. $0^\circ 02'$ W., bet. secs. 9 and 10.	
	Over nearly level land, thru scattering timber and undergrowth.
6.30	Wash, 40 lks. wide, course S. 75° W. Asc. 9 ft. over S. slope to
8.60	Thence over nearly level land.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S9 S10
	1938
	from which
	A paloverde, 4 ins. diam., bears N. $42\frac{3}{4}^\circ$ E., 182 lks. dist., marked $\frac{1}{4}$ S10 BT.
	A paloverde, 3 ins. diam., bears N. $52\frac{1}{2}^\circ$ W., 159 lks. dist., marked $\frac{1}{4}$ S9 BT.
	Continue over nearly level land.
60.00	Wash, 30 lks. wide, course SW.
74.00	Enter gently rolling land. Asc. 34 ft. over S. slope to
79.00	Enter nearly level land.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 3, 4, 9 and 10, with brass cap marked

Survey: Subdivision Lines: T. 9 S., R. 2 W.

36

Chains

T9S	R2W
S4	S3
S9	S10

1938

from which

A paloverde, 4 ins. diam., bears N. $58\frac{1}{2}^\circ$ E., 179 lks. dist., marked T9S R2W S3 BT.

A paloverde, 4 ins. diam., bears S. 31° E., 176 lks. dist., marked T9S R2W S10 BT.

A paloverde, 4 ins. diam., bears S. 25° W., 159 lks. dist., marked T9S R2W S9 BT.

No other bearing tree available.

Land, nearly level and gently rolling.

Soil, rocky, 4th rate.

Timber, paloverde, ironwood and mesquite.

Undergrowth, greasewood, sagebrush, catclaw and cacti.

S. $89^\circ 59'$ E., on random line, bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.18 Intersect N. and S. line, 8 lks. S. of the cor. of secs. 2, 3; 10 and 11.

Thence

S. $89^\circ 58'$ W.; on true line, bet. secs. 3 and 10.

Over mountainous and heavily rolling land, thru medium timber and undergrowth. Desc. 15 ft. over N. slope.

0.83 Bottom of gulch, 20 lks. wide, course SW. Asc. gradually over S. slope.

4.73 Asc. 81 ft. over SE. slope.

12.78 Point of spur, slopes S. Desc. 107 ft. over SW. slope.

24.03 Bottom of gulch, 8 lks. wide, course SW. A rock tank, 4 ft. in diameter, containing water 18 ins. deep, bears N., 20 lks. dist. Asc. 44 ft. over SE. slope.

33.98 Point of spur, slopes S. Desc. 80 ft. over SW. slope to

40.09 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 3
	S 10

1938

from which

A paloverde, 5 ins. diam., bears S. 23° E., 40 lks. dist., marked $\frac{1}{4}$ S10 BT.

A paloverde, 4 ins. diam., bears N. $48\frac{1}{2}^\circ$ W., 55 lks. dist., marked $\frac{1}{4}$ S3 BT.

Thence over gently rolling land. Desc. 82 ft. over SW. slope to

Survey: Subdivision Lines: T. 9 S., R. 2 W.

37

Chains

57.00 Enter nearly level land.

80.18 The cor. of secs. 3, 4, 9 and 10.
Land, mountainous, heavily and gently rolling and nearly level.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

N. 0° 02' W., on random line, bet. secs. 3 and 4.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. bdy. of Tp.; 35 lks. W. of the cor. of secs. 3, 4, 33 and 34, hereinbefore described.
Thence
S. 0° 13' W., on true line, bet. secs. 3 and 4.
Over heavily rolling land, thru medium timber and undergrowth. Desc. 64 ft. over S. slope.

10.62 Thence over nearly level land.

30.00 Enter gently rolling land. Asc. 34 ft. over NW. slope.

35.50 Desc. 42 ft. over SW. slope to

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S4 | S3

1938

from which

An ironwood, 4 ins. diam., bears N. 42 $\frac{1}{2}$ ° E., 73 lks. dist., marked $\frac{1}{4}$ S3 BT.

An ironwood, 3 ins. diam., bears N. 73° W., 23 lks. dist.; marked $\frac{1}{4}$ S4 BT.

Desc. 8 ft. over SW. slope.

41.37 Thence over nearly level land.

55.04 Wash, 40 lks. wide, course N. 70° W.

66.14 Wash, 20 lks. wide, course W.

80.04 The cor. of secs. 3, 4, 9 and 10.
Land, heavily and gently rolling and nearly level.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

The standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., (2nd Std. Par. S.) reestablished in 1924, is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record, and is alongside

Chains

a fence bearing N. 48° 20' E., and S. 48° 20' W., terminating at base of a knoll near center of sec. 33.

From above described sec. cor.;

N. 0° 02' W., bet. secs. 32 and 33.

Over nearly level land, thru scattering timber and undergrowth.

10.60 Wash, 100 lks. wide, 3 ft. deep, course N. 70° W.

31.30 Foot of slope, bears E. and W. Enter mountainous land. Asc. 136 ft. over S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., on exposed bedrock, over a cross (X) marked thereon and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

S32 | S33

1938

No bearing trees available.

This cor. is at base of a cliff bearing E. and N. 70° W., facing S. and SW.

Asc. 106 ft. over cliff and precipitous S. slope.

42.30 Spur, slopes N. 70° W. Desc. 18 ft. over N. slope to

43.90 Enter gently rolling land. Desc. 53 ft. over gradual N. and NE. slopes.

60.94 Enter heavily rolling and mountainous land. Desc. 108 ft. over NE. slope.

72.72 Bottom of ravine, 5 lks. wide, course E. near head. Asc. 130 ft. over SE. slope.

77.06 Short spur, slopes E. near point of same. Desc. 40 ft. over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., on exposed bedrock, over a cross (X) marked thereon and in a mound of stone to top, for cor. of secs. 28, 29, 32 and 33, with brass cap marked

T9S R2W
S29 | S28
S32 | S33

1938

No bearing trees available.

Land, nearly level, gently and heavily rolling, and / mountainous.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde and ironwood.
Undergrowth, sagebrush, greasewood and cacti.

East, on random line, bet. secs. 28 and 33.

40.00 Set temp. 1/4 sec. cor.

79.86 Intersect N. and S. line, 7 lks. N. of the cor. of secs.

Survey: Subdivision Lines: T. 9 S., R. 2 W.

39

Chains

27, 28, 33 and 34.

Thence

N. 89° 57' W., on true line, bet. secs. 28 and 33.

Over mountainous land, thru scattering timber and undergrowth. Asc. 41 ft. over NE. slope.

4.92 Ridge, bears N. 85° E. and S. sloping NE. Desc. 500 ft. over W. slope.

22.42 Wash, 20 lks. wide, in bottom of canyon, course N. 20° W. Asc. 338 ft. over NE. slope.

39.07 Spur, slopes N. near point of same. Desc. 10 ft. over W. slope to

39.93 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \begin{array}{l} S 28 \\ S 33 \end{array}$

1938

No bearing trees available.

Desc. 52 ft. over W. slope.

42.93 Swale drains NW. Asc. 52 ft. over NE. slope.

48.07 Top of hill bears NW. and SE. Desc. 414 ft. over SW. slope.

68.40 Wash, 20 lks. wide, in bottom of canyon, course NW. Asc. 158 ft. over NE. slope to

79.86 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous.

Soil, rocky, 4th rate.

Timber, paloverde and ironwood.

Undergrowth, sagebrush, greasewood and cacti.

N. 0° 02' W., bet. secs. 28 and 29.

Over mountainous land, thru scattering timber and undergrowth. Desc. 182 ft. over NE. slope.

28.00 Wash, 30 lks. wide, in bottom of canyon, course NW. Asc. 190 ft. over SW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$

S29 | S28

1938

from which

A paloverde, 4 ins. diam., bears S. 58 $\frac{1}{2}$ ° E., 115 lks. dist., marked $\frac{1}{4}$ S28 BT.

Chains

A paloverde, 4 ins. diam., bears N. 24½° W., 137 lks. dist., marked ¼ S29 BT.

Asc. 148 ft. over SW. slope.

47.20 Spur, slopes N. 80° W. Desc. 217 ft. over NE. slope.

55.70 Bottom of gulch, course N. 80° W. Asc. 236 ft. over SW. slope.

72.00 Spur, slopes NW. Desc. 45 ft. over NE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 20, 21, 28 and 29, with brass cap marked

T9S	R2W
S20	S21
S29	S28

1938

No bearing trees available.

Land, mountainous.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

S. 89° 57' E., on random line, bet. secs. 21 and 28.

40.00 Set temp. ¼ sec. cor.

79.88 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence

N. 89° 56' W., on true line, bet. secs. 21 and 28.

Over mountainous land, thru medium timber and undergrowth. Desc. 54 ft. over SW. slope.

7.88 Wash, 100 lks. wide, course N. Asc. 298 ft. over NE. slope.

25.08 NW. end of ridge, bearing NW. and SE. Desc. 184 ft. over W. slope to

39.94 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked

¼	S 21
	S 28

1938

from which

A paloverde, 4 ins. diam., bears S. 38½° E., 66 lks. dist., marked ¼ S28 BT.

No other bearing tree available.

Desc. 89 ft. over W. slope.

54.68 Wash, 30 lks. wide, course N. Asc. 258 ft. over E. slope.

Chains

- 64.38 Spur, slopes N. Desc. 123 ft. over W. slope.
- 70.78 Bottom of ravine, course N.; near head. Asc. 148 ft. over NE. slope to
- 79.88 The cor. of secs. 20, 21, 28 and 29.
- Land, mountainous.
Soil, rocky, 4th rate.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

N. 0° 02' W., bet. secs. 20 and 21.

Over mountainous and heavily rolling land, thru scattering timber and undergrowth. Desc. 333 ft. over NE. slope to

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S20 | S21

1938

No bearing trees available.

Desc. 40 ft. over NE. slope.

- 46.05 Wash, 60 lks. wide, course W. Enter gently rolling land. Asc. 75 ft. over SW. slope.

- 65.80 Flat topped spur, slopes W. Desc. 40 ft. over NW. slope to

- 76.00 Foot of slope, bears E. and W. Enter nearly level land.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 16, 17, 20 and 21, with brass cap marked

T9S R2W
S17 | S16
S20 | S21

1938

from which

An ironwood, 6 ins. diam., bears S. 20° E., 182 lks. dist., marked T9S R2W S21 BT.

An ironwood, 4 ins. diam., bears N. 33 $\frac{1}{4}$ ° W., 101 lks. dist., marked T9S R2W S17 BT.

No other bearing trees available.

Land, mountainous, heavily and gently rolling and nearly level.

Soil, gravelly and rocky, 3rd and 4th rates.

Timber, paloverde, ironwood and mesquite.

Undergrowth, greasewood, sagebrush, catclaw and cacti.

BOOK 4281

Chains

S. 89° 56' E., on random line, bet. secs. 16 and 21.
 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 79.86 Intersect the cor. of secs. 15, 16, 21 and 22.
 Thence
 N. 89° 56' W., on true line, bet. secs. 16 and 21.
 Over nearly level land, thru scattering timber and undergrowth.
 35.00 Enter gently rolling land. Asc. 40 ft. over NE. slope to
 39.93 Set an iron post, 3 ft. long, 1 in. in diam., on exposed bedrock, over a cross (X) marked thereon and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 16
 $\frac{1}{4}$ S 21
 1938

No bearing trees available.
 Asc. 26 ft. over NE. slope
 49.86 Low spur, slopes NW. Desc. 57 ft. over W. slope to
 64.86 Foot of slope bears N. and S. Enter nearly level land.
 79.86 The cor. of secs. 16; 17, 20 and 21.
 Land, nearly level and gently rolling.
 Soil, gravelly and rocky, 3rd and 4th rates.
 Timber, paloverde, ironwood and mesquite.
 Undergrowth, greasewood, sagebrush, catclaw and cacti.

N.0° 02' W., bet. secs. 16 and 17.
 Over nearly level land, thru medium timber and undergrowth.
 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S17 | S16
 1938
 from which

- A paloverde, 8 ins. diam., bears N. 35° E., 21 lks. dist., marked $\frac{1}{4}$ S 16 BT.
- A paloverde, 4 ins. diam., bears N. 35½° W., 120 lks. dist., marked $\frac{1}{4}$ S17 BT.

Continue over nearly level land, thru medium timber and undergrowth.
 42.40 Wash, 80 lks. wide, course N. 60° W.
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap marked

Survey: Subdivision Lines: T. 9 S., R. 2 W.:

43

Chains

T9S	R2W
S8	S9
S17	S16

1938

from which

An ironwood, 4 ins. diam., bears N. $17\frac{1}{2}^{\circ}$ E., 123 lks. dist., marked T9S R2W S9 BT.

An ironwood, 8 ins. diam., bears S. $53\frac{1}{2}^{\circ}$ E., 47 lks. dist., marked T9S R2W S16 BT.

An ironwood, 5 ins. diam., bears S. $24\frac{1}{4}^{\circ}$ W., 62 lks. dist., marked T9S R2W S17 BT.

An ironwood, 4 ins. diam., bears N. $53\frac{1}{4}^{\circ}$ W., 65 lks. dist., marked T9S R2W S8 BT.

Land, nearly level.

Soil, gravelly and rocky, 3rd and 4th rates.

Timber, paloverde, ironwood and mesquite.

Undergrowth, greasewood, sagebrush, catclaw and cacti.

S. $89^{\circ} 56'$ E., on random line, bet. secs. 9 and 16.

40.00' Set temp. $\frac{1}{4}$ sec. cor.

79.86 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 9, 10, 15 and 16.

Thence

N. $89^{\circ} 52'$ W., on true line, bet. secs. 9 and 16.

Over nearly level land, thru medium timber and undergrowth.

39.93 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 9
	S 16

1938

from which

A paloverde, 5 ins. diam., bears S. 25° E., 26 lks. dist., marked $\frac{1}{4}$ S16 BT.

A paloverde, 10 ins. diam., bears N. $12\frac{1}{2}^{\circ}$ W., 108 lks. dist., marked $\frac{1}{4}$ S9 BT.

Continue over nearly level land, thru timber and undergrowth.

79.86 The cor. of secs. 8, 9, 16 and 17.

Land, nearly level.

Soil, gravelly and rocky, 3rd and 4th rates.

Timber, paloverde, ironwood and mesquite.

Undergrowth, ocotillo, greasewood, sagebrush, catclaw and cacti.

Chains


N. 0° 02' W., bet. secs. 8 and 9.

Over nearly level land, thru scattering timber and undergrowth.

27.00 Wash, 30 lks. wide, course W.

38.10 Wash, 20 lks. wide, course W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




1938

No bearing trees available.

Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Continue over nearly level land.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap marked



1938

No bearing trees available.

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, nearly level.

Soil, gravelly and rocky, 3rd and 4th rates.

Timber, paloverde, ironwood and mesquite.

Undergrowth, greasewood, sagebrush, catclaw and cacti.

S. 89° 52' E., on random line, bet. secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. cor.


79.88 Intersect N. and S. line, 3 lks. S. of the cor. of secs. 3, 4, 9 and 10.

Thence

N. 89° 53' W., on true line, bet. secs. 4 and 9.

Over nearly level land, thru scattering timber and undergrowth.

39.94 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground, to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



1938

Survey: Subdivision: Lines: T. 9 S., R. 2 W.

BOOK 4281

45

Chains

	<p>No bearing trees available.</p> <p>Continue over nearly level land.</p> <p>79.88 The cor. of secs. 4, 5, 8 and 9.</p> <p>Land, nearly level. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, sagebrush, catclaw and cacti.</p>
40.00	<p>N. 0° 02' W., on random line, bet. secs. 4 and 5.</p> <p>Set temp. $\frac{1}{4}$ sec. cor.</p>
79.80	<p>Intersect N. bdy. of Tp., 23 lks. W. of the cor. of secs. 4, 5, 32 and 33, hereinbefore described.</p> <p>Thence</p> <p>S. 0° 08' W., on true line, bet. secs. 4 and 5.</p> <p>Over gently rolling land, thru scattering timber and undergrowth. Desc. 50 ft. over SW. slope.</p>
8.30	<p>Wash, 30 lks. wide, course NW. Thence over nearly level land.</p>
29.69	<p>Wash, 40 lks. wide, course NW.</p>
39.80	<p>Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground, to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S5 S4</p> <p style="text-align: center;">1938</p> <p>No bearing trees available.</p> <p>Continue over nearly level land.</p>
61.80	<p>Wash, 10 lks. wide, course W.</p>
79.80	<p>The cor. of secs. 4, 5, 8 and 9.</p> <p>Land, gently rolling and nearly level. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, sagebrush, catclaw and cacti.</p>
6.75	<p>From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., (2nd Std. Par. S.) reestablished in 1924, which is an iron post, 2 ins. in diam., projecting 12 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record.</p> <p>N. 0° 03' W., bet. secs. 31 and 32.</p> <p>Over nearly level land, thru scattering timber and undergrowth.</p> <p>Road (ungraded) from Cazlon to Gila Bend, bears N. 15° W. and S. 45° E.</p>

Chains									
22.14	Sauceda Wash, 50 lks. wide, course N. 38° W.								
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap marked								
	<table border="1" style="margin: auto;"> <tr> <td>S31</td> <td> </td> <td>S32</td> </tr> <tr> <td colspan="3" style="text-align: center;">1938</td> </tr> </table>	S31		S32	1938				
S31		S32							
1938									
	No bearing trees available.								
	Continue over nearly level land.								
49.22	Wash, 60 lks. wide, course W., from SE.								
63.30	Foot of slope, bears E. and W. Enter heavily rolling land. Asc. 114 ft. over S. slope.								
71.85	Spur, slopes W. Desc. 29 ft. over NW. slope.								
78.40	Asc. 26 ft. over SW. slope to								
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., on exposed bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for cor. of secs. 29, 30, 31 and 32, with brass cap marked								
	<table border="1" style="margin: auto;"> <tr> <td>T9S</td> <td>R2W</td> </tr> <tr> <td>S30</td> <td> S29</td> </tr> <tr> <td>S31</td> <td> S32</td> </tr> <tr> <td colspan="2" style="text-align: center;">1938</td> </tr> </table>	T9S	R2W	S30	S29	S31	S32	1938	
T9S	R2W								
S30	S29								
S31	S32								
1938									
	No bearing trees available.								
	Land, nearly level and heavily rolling. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and ironwood.								
	East, on randomline, bet. secs. 29 and 32.								
40.00	Set temp. ¼ sec. cor.								
80.02	Intersect the cor. of secs. 28, 29, 32 and 33. Thence								
	West, on true line, bet. secs. 29 and 32.								
	Over mountainous land, thru scattering timber and undergrowth. Asc. 102 ft. over NE. slope.								
3.87	Top of knoll at SE. end of ridge extending NW. Desc. 246 ft. over steep SW. slope to								
22.66	Foot of steep descent, bears NW. and SE. Enter gently rolling land. Desc. gradually over SW. slope.								
27.50	Head of draw, course NW. Desc. 60 ft. over N. slope to								
40.01.	Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to bedrock, with a stone marked with a cross								

Survey: Subdivision Lines: T. 9 S., R. 2 W.

47

Chains

(X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \frac{S 29}{S 32}$

1938

No bearing trees available.

Desc. 30 ft. over N. slope.

54.50 Asc. 30 ft. over N. slope.

60.00 Desc. gradually over N. slope.

75.00 Spur, slopes NW. Enter heavily rolling land. Desc. 56 ft. over SW. slope to

80.02 The cor. of secs. 29, 30, 31 and 32.

Land, mountainous, gently and heavily rolling.

Soil, rocky, 4th rate.

Timber, paloverde and ironwood.

Undergrowth, greasewood, sagebrush and cacti.

West, on random line, bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.95 Intersect the cor. of secs. 25, 30, 31 and 36 on W. bdy. of the Tp.; which is an iron post, 2 ins. in diam., projecting 20 ins. above ground, firmly set in ground and in a mound of stone to top, with brass cap marked as described in the official record.

Thence

East, on true line, bet. secs. 30 and 31.

Over gently rolling and nearly level land, thru scattering timber and undergrowth.

33.32 Saucedá Wash, 100 lks. wide, course NW.

36.83 Road (ungraded) from Cazlon to Gila Bend, bears NW. and SE.

39.95 Set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4} \frac{S 30}{S 31}$

1938

No bearing trees available.

Continue over gently rolling and nearly level land.

70.00 Enter rolling land. Asc. 52 ft. over SW. slope to

79.95 The cor. of secs. 29, 30, 31 and 32.

Land, gently rolling, nearly level and rolling.

Soil, gravelly, 3rd rate.

Timber, paloverde, ironwood and mesquite.

Undergrowth, greasewood, catclaw, sagebrush and cacti.

Survey: Subdivision Lines: T. 9 S., R. 2 W.

Chains	N. 0° 03' W., bet. secs. 29 and 30. Over heavily rolling and mountainous land, thru scattering timber and undergrowth. Asc. 75 ft. over SW. slope.
6.03	Spur, slopes W., from SE. Desc. 133 ft. over N. slope.
22.28	Bottom of ravine, 20 lks. wide, course W. for about 10 chs., thence NW. Asc. 130 ft. over SE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
 S30 S29 1938
	No bearing trees available. Asc. 191 ft. over SW. slope.
51.70	Ridge, bears NW. and SE. Desc. 63 ft. over NE. slope.
56.61	Head of swale, course NE. Asc. 31 ft. over SE. slope.
59.57	Spur, slopes NE. Desc. 200 ft. over NW. slope.
67.71	Wash, 10 lks. wide, in bottom of gulch, course NW., near head. Asc. 168 ft. over S. slope.
74.38	Fork of spurs, sloping NW. and N. 10° E., from SE. Desc. 44 ft. over NW. slope.
77.25	Head of ravine, course NW. Desc. 60 ft. over W. slope to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 19, 20, 29 and 30, with brass cap marked
 T9S • R2W S19 S20 S30 S29 1938
	No bearing trees available. Land, heavily rolling and mountainous. Soil, rocky, 4th rate. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.
	East, on random line, bet. secs. 20 and 29.
40.00.	Set temp. $\frac{1}{4}$ sec. cor.
80.08	Intersect N. and S. line; 5 lks. S. of the cor. of secs. 20, 21, 28 and 29
	Thence S. 89° 58' W., on true line, bet. secs. 20 and 29.

Survey: Subdivision Lines: T. 9 S., R. 2 W. BOOK 400

49

Chains	Over mountainous and heavily rolling land, thru medium timber and undergrowth. Asc. 10 ft. over NE. slope.
2.80	Spur, slopes NW. Desc. 335 ft. over W. slope.
20.80	Wash, 35 lks. wide, course N. Asc. 90 ft. over NE. slope.
38.80	Spur, slopes N. Desc. 21 ft. over NW. slope to
40.04	3 ft. long, Set an iron post, 1 in. in diam., 12 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$ S 20 S 29
	1938
	from which
	A paloverde, 4 ins. diam., bears N. $11\frac{1}{2}^{\circ}$ E., 111 lks. dist., marked $\frac{1}{4}$ S20 BT.
	A paloverde, 6 ins. diam., bears S. $17\frac{3}{4}^{\circ}$ W., 108 lks. dist., marked $\frac{1}{4}$ S29 BT.
	Desc. 52 ft. over W. slope.
45.95	Foot of slope, bears N. and S. Enter gently rolling and nearly level land.
58.35	Wash, 20 lks. wide, course N. 20° W. Enter heavily rolling and mountainous land. Asc. 178 ft. over E. slope.
77.61	Spur, slopes N. 10° W. from S. 10° W. Desc. 49 ft. over W. slope to
80.08	The cor. of secs. 19, 20, 29 and 30. Land, mountainous, heavily and gently rolling and nearly level. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde, ironwood and mesquite. Undergrowth, greasewood, sagebrush and cacti.
	West, on random line, bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	Intersect W. bdy. of Tp., 12 lks. N. of the cor. of secs. 19, 24, 25 and 30, which is an iron post, 2 ins. in diam., projecting 6 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record.
	Thence
	N. $89^{\circ} 55'$ E., on true line, bet. secs. 19 and 30.
	Over nearly level land, thru scattering timber and undergrowth.
20.60	Foot of slope, bears NW. and SE. Enter heavily rolling and mountainous land. Asc. 111 ft. over SW. slope.
30.43	Ridge, bears NW. and SE. Thence across top of ridge to
32.20	Leave top of ridge; desc. 114 ft. over NE. slope to

Chains

39.92 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S 19}{S 30}$

1938

No bearing trees available.

Enter gently rolling land; desc. 15 ft. over NE. slope.

42.16 Wash, 15 lks. wide, course NW. Asc. 66 ft. over NW. slope.

56.77 Desc. 15 ft. over N. slope.

64.14 Wash, 15 lks. wide, course NW. Enter mountainous land. Asc. 166 ft. over SW. slope.

72.93 Spur, slopes NW. Desc. 46 ft. over E. slope.

77.40 Bottom of ravine, course NW. Asc. 34 ft. over W. slope to

79.92 The cor. of secs. 19, 20, 29 and 30.

Land, nearly level, gently and heavily rolling and mountainous.

Soil, rocky, 3rd and 4th rates.

Timber, paloverde and ironwood.

Undergrowth, greasewood, sagebrush and cacti.

N. 0° 03' W., bet. secs. 19 and 20.

Over heavily rolling land, thru scattering timber and undergrowth. Desc. gradually over W. slope.

5.00 Asc. 21 ft. over SW. slope.

8.68 Spur, slopes NW. Desc. 207 ft. over NE. slope.

35.84 Wash, 20 lks. wide, course N. 80° W. Asc. 46 ft. over S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 4 ins. in the ground to bedrock, over a cross (X) marked thereon, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S19 | S20

1938

No bearing trees available.

Asc. 18 ft. over S. slope.

41.37 Spur, slopes NW. Desc. 67 ft. over N. slope to

47.50 Foot of slope, bears E. and NW. Enter nearly level land. Desc. slightly to

57.38 Wash, 15 lks. wide, course W. Enter rolling and hilly land. Asc. 113 ft. over SE. slope.

Chains

69.36 Top of hill, Desc. 63 ft. over NW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 17, 18, 19 and 20, with brass cap marked

T9S	R2W
S18	S17
S19	S20

1938

No bearing trees available.

Land, heavily rolling, nearly level and hilly.
Soil, rocky, 4th rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush and cacti.

N. 89° 58' E., on random line, bet. secs. 17 and 20.

40.00 Set temp. 1/4 sec. cor.

80.12 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 16, 17, 20 and 21.

Thence

S. 89° 56' W., on true line, bet. secs. 17 and 20.

Over nearly level land, thru scattering timber and undergrowth.

22.70 Enter gently rolling land. Desc. 23 ft. over W. slope to

26.99 Wash, 40 lks. wide, course NW. Desc. gradually over NW. slope.

40.06 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for 1/4 sec. cor., with brass cap marked

1/4 S 17
4 S 20

1938

No bearing trees available.

Continue over gently rolling land, descending gradually over NW. slope.

48.65 Wash, 20 lks. wide, course NW. Desc. gradually over N. slope.

66.50 Asc. 30 ft. over NE. slope.

71.00 Asc. gradually over N. slope.

77.20 Desc. 17 ft. over NW. slope to

80.12 The cor. of secs. 17, 18, 19 and 20.

Land, nearly level and gently rolling.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

Chains	S. 89° 55' W., on random line, bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.85	Intersect the cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp., which is an iron post, 2 ins. in diam., projecting 8 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record.
	Thence
	N. 89° 55' E., on true line, bet. secs. 18 and 19.
	Over level land, thru scattering timber and undergrowth.
8.75	Wash, 25 lks. wide, course NW.
39.85	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 18}{S 19}$
	1938
	No bearing trees available.
	Continue over level land.
46.37	Drain, 5 lks. wide, course NW. Leave level and enter hilly land. Asc. 65 ft. over SW. slope.
57.30	Desc. 75 ft. over S. and SE. slopes.
74.80	Asc. 23 ft. over NW. slope to
79.85	The cor. of secs. 17, 18, 19 and 20.
	Land, level and hilly. Soil, gravelly and rocky, 3rd and 4th rates. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush and cacti.
	N. 0° 03' W., bet. secs. 17 and 18.
	Over hilly and gently rolling land, thru scattering timber and undergrowth. Desc. 23 ft. over NW. slope.
4.90	Asc. 52 ft. over SW. slope.
9.93	Asc. slightly over W. slope.
13.15	Desc. 55 ft. over NW. slope.
19.60	Desc. gradually over E. slope.
35.95	Desc. 32 ft. over NE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground, to bedrock with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S18 S17
	1938


Chains

No bearing trees available.

Desc. 23 ft. over NE. slope.

46.57 Wash, 150 lks. wide, course N. 71° W. Thence over nearly level land.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to bedrock with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for cor. of secs. 7, 8, 17 and 18, with brass cap marked



1938

No bearing trees available.

Land, hilly, gently rolling and nearly level.
Soil, rocky, 4th rate in S. half; sandy, 2nd rate in N. half.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush, cacti and catclaw.

N. 89° 56' E., on random line, bet. secs. 8 and 17.

40.00 Set temp. ¼ sec. cor.


80.08 Intersect N. and S. line, 3 lks. S. of the cor. of secs. 8, 9, 16 and 17.

Thence

S. 89° 55' W., on true line, bet. secs. 8 and 17.

Over nearly level land, thru scattering timber and undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked



1938

No bearing trees available.

Raise a mound of stone, 2½ ft. base, 2½ ft. high, N. of cor.

51.78 Wash, 15 lks. wide, course SE. for 1 ch., thence N. 70° W.

53.78 Same wash, course N. 70° W.

78.37 Wash, 10 lks. wide, course NW.

80.08 The cor. of secs. 7, 8, 17 and 18.

Land, nearly level.
Soil, gravelly and rocky, 3rd and 4th rates.
Timber, paloverde, ironwood and mesquite.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

Chains	
	S. 89° 55' W., on random line, bet. secs. 7 and 18.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.74	Intersect W. bdy. of Tp., 7 lks. N. of the cor. of secs. 7, 12, 13 and 18, which is an iron post, 2 ins. in diam., projecting 20 ins. above ground, firmly set in ground and in a mound of stone to top, with brass cap marked as described in the official record.
	Thence
	N. 89° 52' E., on true line, bet. secs. 7 and 18.
	Over gently rolling land, thru scattering timber and undergrowth. Desc. 33 ft. over NE. slope to
9.70	Foot of slope, bears NW. and SE. Thence over nearly level land.
29.64	Wash, 100 lks. wide, course NW.
39.74	Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to bedrock, with a stone marked with a cross (X) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \frac{S 7}{S 18}$
	1938.
	No bearing trees available.
	Continue over nearly level land.
41.24	Wash, 15 lks. wide, course NW.
79.74	The cor. of secs. 7, 8, 17 and 18.
	Land, gently rolling and nearly level. Soil, sandy, 2nd rate. Timber, paloverde and ironwood. Undergrowth, greasewood, sagebrush, catclaw and cacti.
	N. 0° 03' W., bet. secs. 7 and 8.
	Over nearly level land, thru scattering timber and undergrowth.
1.10	Wash, 10 lks. wide, course NW.
9.10	Wash, 15 lks. wide, course NW.
31.30	Wash, 15 lks. wide, course S. 70° W.
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4}$
	S7 S8
	1938
	from which
	A paloverde, 4 ins. diam., bears N. 81 $\frac{1}{2}$ ° E., 33 lks. dist., marked $\frac{1}{4}$ S8 BT.

Chains


A paloverde, 7 ins. diam., bears S. 71½° W., 279 lks. dist., marked ¼ S7 BT.

Continue over nearly level land.

54.00 Wash, 15 lks. wide, course S. 70° W.

72.20 Wash, 20 lks. wide, course W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 28 ins. in the ground, for cor. of secs. 5, 6, 7 and 8, with brass cap marked



1938

from which

A mesquite, 12 ins. diam., bears N. 71° E., 578 lks. dist., marked T9S R2W S5 BT.

A paloverde, 6 ins. diam., bears S. 52½° E., 228 lks. dist., marked T9S R2W S8 BT.

A paloverde, 5 ins. diam., bears S. 14½° W., 130 lks. dist., marked T9S R2W S7 BT.

An ironwood, 4 ins. diam., bears N. 48¾° W., 109 lks. dist., marked T9S R2W S6 BT.

Land, nearly level.

Soil, sandy and gravelly, 2nd rate.

Timber, paloverde and ironwood.

Undergrowth, greasewood, sagebrush, catclaw and cacti.

N. 89° 55' E., on random line, bet. secs. 5 and 8.

40.00 Set temp. ¼ sec. cor.


80.04 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 4, 5, 8 and 9.

Thence

S. 89° 56' W., on true line, bet. secs. 5 and 8.

Over nearly level land, thru scattering timber and undergrowth,

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked



1938

from which

A paloverde, 4 ins. diam., bears N. 52½° W., 211 lks. dist., marked ¼ S5 BT.

A paloverde, 6 ins. diam., bears S. 12½° W., 145 lks. dist., marked ¼ S8 BT.

Continue over nearly level land.

80.04 The cor. of secs. 5, 6, 7 and 8.

Chains

Land, nearly level.
Soil, sandy and gravelly, 2nd and 3rd rates.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush and cacti.

S. 89° 52' W., on random line, bet. secs. 6 and 7.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.71 Intersect W. bdy. of Tp., 2 lks. N. of the cor. of secs. 1, 6, 7 and 12, which is an iron post, 2 ins. in diam., projecting 8 ins. above ground, firmly set, marked on brass cap and witnessed as described in the official record.

Thence

N. 89° 51' E., on true line, bet. secs. 6 and 7.

Over level land, thru scattering timber and undergrowth.

16.11 Wash, 30 lks. wide, course NW.

39.71 Set an iron post, $\frac{3}{4}$ ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 6}{S\ 7}$

1938

from which

A paloverde, 6 ins. diam., bears N. 5 $\frac{1}{2}$ ° E., 41 lks. dist., marked $\frac{1}{4}$ S6 BT.

A paloverde, 6 ins. diam., bears S. 70° E., 416 lks. dist., marked $\frac{1}{4}$ S7 BT.

Continue over level land, thru scattering timber and undergrowth.

79.71 The cor. of secs. 5, 6, 7 and 8.

Land, level.
Soil, sandy, 2nd rate.
Timber, paloverde and ironwood.
Undergrowth, greasewood, sagebrush, catclaw and cacti.

N. 0° 03' W., on random line, bet. secs. 5 and 6.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.83 Intersect N. bdy. of Tp., 30 lks. W. of the cor. of secs. 5, 6, 31 and 32, hereinbefore described.

Thence

S. 0° 10' W., on true line, bet. secs. 5 and 6.

Over nearly level land, thru scattering timber and undergrowth.

16.18 Wash, 15 lks. wide, course S. 70° W.

21.90 Wash, 15 lks. wide, course S. 25° W.

36.33 Wash, 10 lks. wide, course NW.

Chains

39.83 Set an iron post, 3 ft. long, 1 in. in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
\$6 | \$5

1938

from which

A paloverde, 6 ins. diam., bears S. $89\frac{1}{4}^{\circ}$ E., 203 lks. dist., marked $\frac{1}{4}$ \$5 BT.

An ironwood, 16 ins. diam., bears N. $84\frac{1}{2}^{\circ}$ W., 443 lks. dist., marked $\frac{1}{4}$ \$6 BT.

Continue over nearly level land, thru scattering timber and undergrowth.

56.16 Wash, 15 lks. wide, course NW.

74.53 Wash, 10 lks. wide, course W.

79.83 The cor. of secs. 5, 6, 7 and 8.

Land, nearly level.

Soil, sandy and gravelly, 2nd and 3rd rates.

Timber, paloverde and ironwood.

Undergrowth, greasewood, sagebrush and cacti.

GENERAL DESCRIPTION.

Township 9 South, Range 2 West is situated in the Gila River drainage basin, on the westerly side of the southeast end of the Sand Tank Mountains, about 30 miles SE. from the southerly extremity of a large horseshoe bend in the Gila River, known as Gila Bend, which is also the name of a town on the Southern Pacific R.R. and U.S. Highway No. 80, about 4 miles south from same point in the river.

The elevation of this township ranges from about 2200 to 3600 feet above sea level, the highest elevation being in the northeastern part, and the lowest in the northwestern part.

The surface, ranging from level to mountainous, includes all of the intermediate classes; nearly level, gently rolling, rolling, hilly, and heavily rolling. The level land is mainly situate in parts of the west range of secs. Nearly all of the northwest quarter of the township is nearly level. Gently rolling and rolling surface is in scattered areas in all parts. A small area in the western part is hilly. The heavily rolling and mountainous surface constitutes a large part of the total area of the township and is situate in parts of the south half and northeast quarter.

The soil in all parts is gravelly and rocky, 3rd and 4th rates, except in the northwestern quarter, where there is considerable sandy, 2nd rate soil.

The timber, occuring mostly in scattering growth, is paloverde, ironwood, and mesquite, of little commercial value except for fence posts or fuel.

Scattering undergrowth of catclaw, sagebrush, greasewood, and cacti is prevalent in all sections, and in many parts there is a fair growth of bunch and gramma grasses.

The land is arid, there being no springs or flowing streams, and no wells have been constructed within the township.

The drainage system consists of washes having general westerly courses from the mountains. Saucedo Wash, course northwesterly thru the SW. part of the township is one of the principal washes of this region.

There are no settlers or residents, and no improvements except a fence in the SW $\frac{1}{4}$ of sec. 33, and a rock tank for water storage constructed in the bottom of a gulch in SE $\frac{1}{4}$ of sec. 3 near the section line between secs. 3 and 10.

There is no evidence of valuable mineral deposits in any part of the township. There is a prospect shaft in the SW $\frac{1}{4}$ of sec. 1 but there is no indication that any ore was ever found there.

The south boundary of this Township (2nd Std. Par. N.) is a part of the North boundary of the Papago Indian Reservation, all of the adjoining township to the south being within said reservation.

An ungraded road bearing NW. and SE. crosses secs. 30, 31 and 32, near the Saucedo Wash, connecting roads within the Papago Indian Reservation with the town of Gila Bend. A road from SW. connects with this road in SW $\frac{1}{4}$ of sec. 30. These two roads and a few trails in the south tier of secs. constitute the only travel facilities within the township.

The township has little agricultural value except for periodical grazing of a limited number of animals.

FINAL FIELD TESTS OF INSTRUMENTS.

Buff and Buff transit No. 16723
Horace M. Muscott, Surveyor.

April 3, 1938; at camp in SE $\frac{1}{4}$ of sec. 36, T. 5 S., R. 4 W., G. & S.R. Meridian, Arizona, in latitude $32^{\circ} 57' N.$, longitude $112^{\circ} 37' W.$, examine the adjustments of Buff and Buff transit No. 16723 and find no errors; then to test the solar apparatus of same by comparing its indications with a true meridian determined at this station by Polaris observations on January 16, 1938 as described in field notes of survey of 1st Standard Parallel South thru Rs. 1 and 2 W., proceed as follows:

At 9h. 00m., a.m., app.t., set off $32^{\circ} 57' N.$ on the latitude arc; $5^{\circ} 15' N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of $5^{\circ} 17\frac{1}{2}' N.$ on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged, set off $5^{\circ} 20\frac{1}{2}' N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1' 30''$ of the true meridian, conclude that this instrument is in satisfactory

adjustment on this date, and that it has remained in such condition throughout the surveys executed with same which are described in the foregoing field notes.

Buff and Buff transit No. 9984
Claude F. Warner, Transitman

April 3, 1938; at same station as above, examine the adjustments of Buff and Buff transit No. 9984 and find no errors, then to test the solar apparatus of same by comparing its indications with the same true meridian, proceed as follows:

At 9h. 00m., a.m., app.t., set off $32^{\circ} 57' N.$ on the latitude arc; $5^{\circ} 15' N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of $5^{\circ} 17\frac{1}{2}' N.$ on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged, set off $5^{\circ} 20\frac{1}{2}' N.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1' 30''$ of the true meridian, conclude that this instrument is in satisfactory adjustment on this date, and that it has remained in such condition throughout the surveys executed with same which are described in the foregoing field notes.

Young and Sons' transit No. 8526
Frank Moteh, Public Land Surveyor.

March 11, 1938; at same station as above, examine the adjustments of Young and Sons' transit No. 8526 and find no errors; then, to test the solar apparatus of same by comparing its indications with the same true meridian, proceed as follows:

At 9h. 00m., a.m., app.t., set off $32^{\circ} 57' N.$ on the latitude arc; $3^{\circ} 46' S.$ on the declination arc; and determine a meridian with the solar, which agrees with the true meridian.

At app. noon, with the latitude arc unchanged, observe the sun on the meridian and obtain a reading of $3^{\circ} 43' S.$ on the declination arc, which agrees with the computed declination of the sun.

At 3h. 00m., p.m., app.t., with the latitude arc unchanged, set off $3^{\circ} 40' S.$ on the declination arc and determine a meridian with the solar, which agrees with the true meridian.

As all of the solar observations made during the usual hours of solar work come within $1' 30''$ of the true meridian, conclude that this instrument is in satisfactory adjustment on this date, and that it has remained in such condition throughout the surveys executed with same which are described in the foregoing field notes.

188
61

BOOK 4231

CERTIFICATE OF SURVEYOR

I, Claude F. Warner, Transitman, HEREBY CERTIFY upon honor that, in
pursuance of special instructions bearing date of the 1st day of December, 1937,
received from the district cadastral engineer for Arizona, with assignment
instructions dated February 3, 1938, I have surveyed _____
Part of the Subdivision Lines
of _____
Township No. 9 South, Range No. 2 West
of the Gila & Salt River Meridian, in the State of Arizona, which are
represented in the foregoing field notes as having been executed by me and under my direction; and that said
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.
Phoenix, Ariz. Claude F. Warner
January 16, 1941. Transitman

~~CERTIFICATE OF APPROVAL~~

~~OFFICE OF SUPERVISOR OF SURVEYS,~~

_____, 19____

~~The foregoing field notes of the survey of _____~~

executed by _____,
under special instructions dated _____, and assignment
instructions dated _____, ~~having been critically examined, and~~
~~the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey~~
~~therein described, are hereby approved.~~

~~Supervisor of Surveys.~~

~~CERTIFICATE OF TRANSCRIPT~~

I ~~certify~~ that the foregoing transcript of the field notes of the above described surveys in _____
_____, is a true copy of the original field notes on file in the public survey office.

~~Supervisor of Surveys.~~

190

63 BOOK 4231

CERTIFICATE OF SURVEYOR

I, Frank Moteh, Public Land Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st day of December, 1937, received from the district cadastral engineer for Arizona, with assignment instructions dated February 3, 1938, I have surveyed

Part of the Subdivision Lines


of

Township No. 9 South, Range No. 2 West

of the Gila & Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Sept. 14, 1940

Phoenix, Arizona



Public Land Surveyor

CERTIFICATE OF APPROVAL

~~Office of Supervisor of Surveys,~~

~~19~~

~~The foregoing field notes of the survey of~~

~~executed by~~
~~under special instructions dated~~, and assignment instructions dated, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey therein described, are hereby approved.

~~Supervisor of Surveys.~~

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~

~~is a true copy of the original field notes on file in the public survey office.~~

~~Supervisor of Surveys.~~

192

65

BOOK 4231

CERTIFICATE OF SURVEYOR

I, Horace M. Muscott, Surveyor, HEREBY CERTIFY upon honor that, in
pursuance of special instructions bearing date of the 1st day of December, 1937
received from the district cadastral engineer for Arizona, with assignment
instructions dated February 3, 1938, I have surveyed
North Boundary and
Part of Subdivision Lines of
Township No. 9 South, Range No. 2 West
of the Gila & Salt River Meridian, in the State of Arizona, which are
represented in the foregoing field notes as having been executed by me and under my direction; and that said
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.
Phoenix, Arizona
January 22, 1940
Horace M. Muscott
Surveyor

CERTIFICATE OF APPROVAL

OFFICE OF SUPERVISOR OF SURVEYS,
Denver, Colorado, Oct. 17, 1941

The foregoing field notes of the survey of North Boundary and
Subdivision Lines of
Township No. 9 South, Range No. 2 West
of the Gila and Salt River Meridian, in the State of Arizona
Horace M. Muscott, Surveyor, Claude F. Warner, Transitman and
executed by Frank Moteh, Public Land Surveyor,
under special instructions dated December 1, 1937, Group 197, Arizona, and assignment
instructions dated February 3, 1938, having been critically examined, and
the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey
therein described, are hereby approved.

James P. Johnson
Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes on file in the public survey office.~~

Supervisor of Surveys.