

① April
Dec 21

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

Book E.

BOOK 4315

FIELD NOTES

of

The Resurvey of the West Boundary of

Township 6 North, Range 9 West

and

Survey of the South Boundary

and

A Portion of the Subdivisional Lines

Completing the Subdivision of

Township 6 North, Range 10 West,

Of the Gila and Salt River Meridian,

In the State of Arizona.

EXECUTED BY

Raymond F. Moss, Assistant Cadastral Engineer,

G. Marvin Litz, Junior Cadastral Engineer, and

Bert E. Wakeman, Senior Engineering Aide,
General Land Office,

Under special instructions dated October 29, 1941, which provided
for the surveys included under Group No. 234, bearing the approval of the

Commissioner of the General Land Office under date of November 7, 1941

and assignment instructions dated December 22, 1941, and
January 16, 1942.

Survey commenced January 9, 1942.

Survey completed March 12, 1942.

4315

BOOK 4315

INDEX DIAGRAM.

Township 6 North, Range 10 West.

6	5	4	3	2	17 1	1	6
				25	17		
7	50 8	41 9	34 10	26 11	18 12	2	7
51	50	42	35	27	19		
18	52 17	43 16	36 15	28 14	20 13	4	18
53	52	43	37	29	20		
19	54 20	44 21	37 22	30 23	21 24	6	19
56	55	45	38	31	22		
30	57 29	47 28	39 27	32 26	23 25	7	30
58	57	48	40	32	23		
31	59 32	49 33	40 34	33 35	24 36	9	31
11	12	13	14	15	16		

T. 6 N., R. 10 W.

Chains

The surveys and resurveys herein described were executed with Gurley solar transits Nos. 371537 and 351535, and Buff solar transit No. 16730.

For description of instruments and equipment, method of survey, and preliminary tests of solar attachments, see the field notes of T. 6 N., R. 11 W., surveyed under this group.

The data furnished with the special instructions give the geographic position of the SE. cor. of T. 6 N., R. 10 W. as : latitude $33^{\circ} 48' 42''$ N., and longitude $113^{\circ} 14' 15''$ W.

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Reestablishment of the survey executed by D. R. Averill, Surveyor, in 1931.

Preliminary to the resurvey, the lines of the original survey are retraced and all corners found. The markings on the corner posts are changed to refer to R. 9 W. only, and new corners are established at intervals of 40.00 and 80.00 chs., counting from the north, for R. 10 W. The retracement data are thoroughly verified and only the true line notes are given herein.

From the cor. of Tps. 6 and 7 N., Rs. 9 and 10 W.; an iron post, 3 ins. diam., set, mkd., and witnessed as described in the official record.

S. $0^{\circ} 09'$ W., on true line along the W. bdy. of sec. 6.

Over rolling land, through scattering timber and undergrowth; desc. 25 ft. along a W. slope.

1.60 Short ravine, course W.; asc. 20 ft. along a W. slope.

4.10 Short spur, slopes NW.; desc. 40 ft. along a W. slope.

7.80 Wash, 20 lks. wide, course NW.; asc. 120 ft. over a N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1 only, of R. 10 W., with brass cap mkd.

$\frac{1}{4}$
S 1 |
1942

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Asc. 15 ft. over a N. slope.

41.61 The $\frac{1}{4}$ sec. cor. of secs. 1 and 6; an iron post, 1 in. diam., in a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, with brass cap mkd.

$\frac{1}{4}$
S 1 | S 6
1931

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains

As this cor. now refers to sec. 6 only, I alter the markings on the brass cap to read as follows:

S	6
1942	1931

S. 0° 09' W., on true line along the W. bdy. of sec. 6.

Enter mountainous land, bears E. and W.; asc. 680 ft. over a N. slope.

38.39 At this point which is 80.00 chs. from the NE. cor. of sec. 1.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 1 and 12 only, of R. 10 W., with brass cap mkd.

T6N	T6N
S 1	R9W
S 12	S 6
R10W	1942

Asc. 40 ft. over a N. slope.

39.90 The cor. of secs. 1, 6, 7, and 12; an iron post, 2 ins. diam., 2 ins. above a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.

T6N	R9W
R10W	S 6
S 1	S 7
S 12	1931

As this cor. now refers to secs. 6 and 7 only, of R. 9 W., I alter the markings on the brass cap to read as follows:

T6N	T6N
R10W	S 6
S 12	S 7
R9W	1942
	1931

Land, N. ½ rolling; S. ½ mountainous.

Soil, sandy and rocky, 2nd and 3d rate.

Timber, ironwood and palo verde; undergrowth, greasewood, sagebrush, cats claw, and cacti.

S. 0° 09' W., on true line along the W. bdy. of sec. 7.

Asc. 280 ft. over a N. slope.

9.10 Spur, slopes N. 70° W.; asc. 90 ft. over a NW. slope.

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains

16.10 Spur, slopes S. 85° W.; desc. 630 ft. over a SE. slope.

38.29 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a stone mkd. with a cross (+), deposited at base, for witness $\frac{1}{4}$ sec. cor. of sec. 12 only, of R. 10 W., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 12 \\ \text{WC} \\ \hline 1942 \end{array}$$

38.49 This point which is 40.00 chs. from the NE. cor. of sec. 12, R. 10 W., falls in edge of ravine, course S. 30° W., in a place unsuitable for a permanent cor.

38.90 Ravine, course S. 20° W.; asc. slightly along a W. slope.

40.21 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12; an iron post, 1 in. diam., in a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 12 \quad | \quad \text{S } 7 \\ \hline 1931 \end{array}$$

As this cor. now refers to sec. 7 only, I alter the markings on the brass cap to read as follows:

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 7 \\ \hline 1942 \\ 1931 \end{array}$$

S. 0° 09' W., on true line along the W. bdy. of sec. 7.

Desc. 20 ft. over a SW. slope.

3.60 Ravine, drains W.; asc. 11 ft. over a NW. slope.

7.80 Low spur, slopes S. 80° W.; desc. 150 ft. over a SW. slope.

18.00 Wash, 20 lks. wide, course W.; desc. slightly along a broken W. slope.

32.70 Wash, 10 lks. wide, course W.; asc. 30 ft. over a N. slope.

37.60 Low spur, slopes W.; desc. 10 ft. over a S. slope.

38.28 At this point which is 80.00 chs. from the NE. cor. of sec. 12.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 12 and 13 only, of R. 10 W., with brass cap mkd.

$$\begin{array}{c} \text{T6N} \quad | \quad \text{T6N} \\ \text{S } 12 \quad | \\ \hline \text{S } 13 \quad | \quad \text{R9W} \\ \text{R10W} \quad | \quad \text{S } 7 \end{array}$$

1942

raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains	Desc. 30 ft. over a S. slope.												
39.80	Ravine, drains SW.; asc. slightly.												
40.09	The cor. of secs. 7, 12, 13, and 18; an iron post, 2 ins. diam., 2 ins. above a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T6N</td></tr> <tr><td>R10W</td><td>R9W</td></tr> <tr><td>S 12</td><td>S 7</td></tr> <tr><td>S 13</td><td>S 18</td></tr> <tr><td colspan="2">1931</td></tr> </table>	T6N		R10W	R9W	S 12	S 7	S 13	S 18	1931			
T6N													
R10W	R9W												
S 12	S 7												
S 13	S 18												
1931													
	As this cor. now refers to secs. 7 and 18 only, of R. 9 W., I alter the markings on the brass cap to read as follows:												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T6N</td><td>T6N</td></tr> <tr><td>R10W</td><td>S 7</td></tr> <tr><td>S 13</td><td>S 18</td></tr> <tr><td></td><td>R9W</td></tr> <tr><td colspan="2">1942</td></tr> <tr><td colspan="2">1931</td></tr> </table>	T6N	T6N	R10W	S 7	S 13	S 18		R9W	1942		1931	
T6N	T6N												
R10W	S 7												
S 13	S 18												
	R9W												
1942													
1931													
	Land, rough mountainous. Soil, sandy and rocky, 2nd and 3d rate. Timber, ironwood and palo verde; undergrowth, greasewood, sagebrush, cats claw, and cacti.												

	S. 0° 09' W., on true line along the W. bdy. of sec. 18.												
	Desc. 30 ft. along a broken W. slope, thru scattering timber and undergrowth.												
15.60	Wash, 10 lks. wide, course W.												
18.50	Old road, bears E., about 8 chs. dist. to an abandoned mine, and W. to Aguila.												
33.90	Wash, 20 lks. wide, course N. 60° W.; asc. 45 ft. over a NE. slope.												
38.19	At this point which is 40.00 chs. from the NE. cor. of sec. 13.												
	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for ¼ sec. cor. of sec. 13 only, of R. 10 W., with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>¼</td><td> </td></tr> <tr><td>S 13</td><td> </td></tr> <tr><td colspan="2">1942</td></tr> </table>	¼		S 13		1942							
¼													
S 13													
1942													
	Asc. 20 ft. over a NE. slope.												
40.04	The ¼ sec. cor. of secs. 13 and 18; an iron post, 1 in. diam., 6 ins. above ground, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>¼</td><td> </td></tr> <tr><td>S 13</td><td> </td></tr> <tr><td>S 18</td><td> </td></tr> <tr><td colspan="2">1931</td></tr> </table>	¼		S 13		S 18		1931					
¼													
S 13													
S 18													
1931													

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains

with a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

As this cor. now refers to sec. 18 only, I alter the markings on the brass cap to read as follows:

1/4	S 18
1942	
1931	

I change the mound of stone from W. to E. of cor.

S. 0° 09' W., on true line along the W. bdy. of sec. 18.

Asc. slightly over a NE. slope.

2.60 Low spur, slopes NW.; asc. 105 ft. over a N. slope.

8.20 Low ridge, bears N. 80° E. and S. 80° W.; desc. 40 ft. over a S. slope.

15.20 Wash, 5 lks. wide, course E.; asc. 50 ft. over a N. slope.

22.70 Spur, slopes S. 20° E. from W.; desc. 120 ft. over a broken SW. slope.

35.40 Head of ravine, course W.; asc. slightly over a NW. slope.

38.15 At this point which is 80.00 chs. from the NE. cor. of sec. 13.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13 and 24 only, of R. 10 W., with brass cap mkd.

T6N	T6N
S 13	R9W
S 24	S 18
R10W	
1942	

raise a mound
of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

39.96 The cor. of secs. 13, 18, 19, and 24; an iron post, 2 ins. diam., in a mound of stone, 4 ft. base, 2 1/2 ft. high, with brass cap mkd.

T6N	
R10W	R9W
S 13	S 18
S 24	S 19
1931	

As this cor. now refers to secs. 18 and 19 only, of R. 9 W., I alter the markings on the brass cap to read as follows:

T6N	T6N
R10W	S 18
S 24	S 19
	R9W
1942	
1931	

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains

Land, rolling to rough mountainous.
Soil, sandy and rocky, 3d and 4th rate.
Timber, ironwood and palo verde; undergrowth, greasewood,
sagebrush, cats claw, and cacti.

S. 0° 09' W., on true line along the W. bdy. of sec. 19.

Asc. slightly over a NW. slope, through scattering timber and undergrowth.

0.50 Short spur, slopes W.; desc. 115 ft. over a SW. slope.

28.50 Browns Canyon, wash 1.50 chs. wide; water 10 lks. wide, course S. 60° E. from W.; asc. 180 ft. over a NE. slope.

38.04 Set an iron post, 3 ft. long, 1 in. diam., 2 ins. in the ground to bedrock, with a stone mkd. with a cross (+), deposited at base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor. of sec. 24 only, of R. 10 W., with brass cap mkd.

$\frac{1}{4}$
S 24
WC
1942

38.19 This point which is 40.00 chs. from the NE. cor. of sec. 24, R. 10 W., falls on sloping ledge, an unsuitable place for a permanent cor.

Asc. 70 ft. over a NE. slope.

40.03 The $\frac{1}{4}$ sec. cor. of secs. 19 and 24; an iron post, 1 in. diam., in a mound of stone, 4 $\frac{1}{2}$ ft. base, 3 ft. high, with brass cap mkd.

$\frac{1}{4}$
S 24 | S 19
1931

As this cor. now refers to sec. 19 only, I alter the markings on the brass cap to read as follows:

$\frac{1}{4}$
S 19
1942
1931

S. 0° 09' W., on true line along the W. bdy. of sec. 19.

Asc. 60 ft. over a NE. slope.

6.40 Ravine, course N. 60° E.; asc. 110 ft. over a NE. slope.

12.80 Spur, slopes E.; desc. 310 ft. over a SE. slope.

17.50 Wash, 10 lks. wide, course N. 75° E.; asc. slightly over a NE. slope.

38.16 At this point which is 80.00 chs. from the NE. cor. of sec. 24.

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., on a cross (+) chiseled in solid rock, and in a mound of stone to top, for cor. of secs. 24 and 25 only, of R. 10 W., with brass cap mkd.

T6N	T6N
S 24	R9W
S 25	S 19
R10W	
1942	

Asc. 50 ft. over a NE. slope.

40.00 The cor. of secs. 19, 24, 25, and 30; an iron post, 2 ins. diam., in a mound of stone, 5 ft. base, 3 ft. high, with brass cap mkd.

T6N	
R10W	R9W
S 24	S 19
S 25	S 30
1931	

As this cor. now refers to secs. 19 and 30 only, of R. 9 W., I alter the markings on the brass cap to read as follows.

T6N	T6N
R10W	S 19
S 25	S 30
	R9W
1942	
1931	

Land, rolling mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, sagebrush, cats claw, cacti, and oak brush.

S. 0° 09' W., on true line along the W. bdy. of sec. 30.

Asc. 185 ft. over a NE. slope, through scattering timber and undergrowth.

- 7.40 Spur, slopes E.; desc. 150 ft. over a SE. slope.
- 11.10 Ravine, course E.; asc. 130 ft. over a NE. slope.
- 21.20 Spur, slopes S. 80° E.; desc. 170 ft. over a SW. slope.
- 27.30 Ravine, course S. 80° E.; asc. 65 ft. over a NE. slope.
- 32.90 Spur, slopes S. 70° E.; desc. 90 ft. over a SW. slope.
- 38.10 Ravine, course S. 70° E.; asc. slightly.
- 38.16 At this point which is 40.00 chs. from the NE. cor. of sec. 25.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 25 only, of R. 10 W., with brass cap mkd.

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains	
	$\begin{array}{c} \frac{1}{4} \\ \\ S 25 \\ \\ 1942 \end{array}$
	Asc. 10 ft. over a NE. slope.
40.10	The $\frac{1}{4}$ sec. cor. of secs. 25 and 30; an iron post, 1 in. diam., in a mound of stone, 5 ft. base, 3 ft. high, with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \\ S 25 S 30 \\ \\ 1931 \end{array}$
	As this cor. now refers to sec. 30 only, I alter the markings on the brass cap to read as follows:
	$\begin{array}{c} \frac{1}{4} \\ \\ S 30 \\ \\ 1942 \\ \\ 1931 \end{array}$
	S. 0° 09' W., on true line along the W. bdy. of sec. 30.
	Asc. 40 ft. over a NE. slope.
2.60	Rocky spur, slopes E.; desc. 190 ft. over a S. slope.
7.40	Ravine, course S. 70° E.; asc. 120 ft. over NE. slope.
14.30	Spur, slopes E.; desc. 20 ft.
17.90	Spur, slopes E.; desc. 130 ft. over a SW. slope.
24.70	Ravine, course S. 70° E.; asc. 50 ft. over a NE. slope.
34.20	Spur, slopes S. 70° E.; desc. 80 ft. over a S. slope.
38.00	Ravine, course E.; asc. slightly.
38.06	At this point which is 80.00 chs. from the NE. cor. of sec. 25.
	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 25 and 36 only, of R. 10 W., with brass cap mkd.
	$\begin{array}{c} T6N T6N \\ S 25 R9W \\ S 36 S 30 \\ R10W \\ 1942 \end{array}$
40.04	The cor. of secs. 25, 30, 31, and 36; an iron post, 2 ins. diam., in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd.
	$\begin{array}{c} T6N \\ R10W R9W \\ S 25 S 30 \\ S 36 S 31 \\ 1931 \end{array}$

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains

As this cor. now refers to secs. 30 and 31 only, of R. 9 W., I alter the markings on the brass cap to read as follows.

T6N	T6N
R10W	S 30
S 36	S 31
	R9W
	1942
	1931

Land, rolling mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde and ironwood; undergrowth, sagebrush, cacti, cats claw, and oak brush.

S. 0° 09' W., on true line along the W. bdy. of sec. 31.

Over rolling land, through scattering timber and undergrowth.

- 1.10 Spur, slopes E.; desc. 120 ft. over a SE. slope.
7.20 Ravine, course E.; asc. 50 ft. over a NE. slope.
11.60 Spur, slopes E.; desc. 110 ft. over a SE. slope.
24.60 Ravine, course E.; asc. 40 ft. along a broken E. slope.
38.02 At this point which is 40.00 chs. from the NE. cor. of sec. 36.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36 only, of R. 10 W., with brass cap mkd.

S $\frac{1}{4}$	36
	1942

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 40.10 The $\frac{1}{4}$ sec. cor. of secs. 31 and 36; an iron post, 1 in. diam., 6 ins. above ground, with brass cap mkd.

S 36	$\frac{1}{4}$	S 31
		1931

with a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

As this cor. now refers to sec. 31 only, I alter the markings on the brass cap to read as follows:

$\frac{1}{4}$	S 31
	1942
	1931

I move the
mound of stone from W. to E. of cor.

Resurvey of the West Boundary of T. 6 N., R. 9 W.

Chains	<p>S. 0° 09' W., on true line along the W. bdy. of sec. 31. Over rolling land.</p> <p>2.20 Wash, 20 lks. wide, course E.; asc. 50 ft. along E. slope.</p> <p>19.60 Spur, slopes S. 60° E.; desc. 90 ft. over a SW. slope.</p> <p>24.90 Ravine, course S. 60° E.; asc. 70 ft. over NE. slope.</p> <p>37.92 At this point which is 80.00 chs. from the NE. cor. of sec. 36.</p> <p>Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for cor. of Ts. 5 and 6 N., R. 10 W., with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T6N</td><td></td></tr> <tr><td>R10W</td><td></td></tr> <tr><td>S 36</td><td>T6N</td></tr> <tr><td>S 1</td><td>R9W</td></tr> <tr><td>T5N</td><td>S31</td></tr> </table> <p>1942</p> </div> <p style="text-align: right;">raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>39.60 Spur, slopes S. 60° E.; desc. slightly.</p> <p>40.09 The cor. of Ts. 5 and 6 N., Rs. 9 and 10 W.; an iron post, 3 ins. diam., 6 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T6N</td><td></td></tr> <tr><td>R10W</td><td>R9W</td></tr> <tr><td>S 36</td><td>S 31</td></tr> <tr><td>S 1</td><td>S 6</td></tr> <tr><td>T5N</td><td></td></tr> </table> <p>1931</p> </div> <p style="text-align: right;">with a mound of stone, 3 ft. base, 2 ft. high, S. of cor.</p> <p>As this cor. now refers to Ts. 5 and 6 N., R. 9 W. only, I alter the markings on the brass cap to read as follows:</p> <div style="text-align: center;"> <table border="1"> <tr><td></td><td>T6N</td></tr> <tr><td></td><td>R9W</td></tr> <tr><td>T5N</td><td>S 31</td></tr> <tr><td>R10W</td><td>S 6</td></tr> <tr><td>S 1</td><td>T5N</td></tr> </table> <p>1942 1931</p> </div> <p style="text-align: right;">I move the mound of stone from S. to E. of cor.</p> <p>Land, rolling and broken. Soil, rocky, 3d rate. Timber, palo verde and mesquite; undergrowth, greasewood, cacti, and cats claw.</p> <hr style="border-top: 1px dashed black;"/>	T6N		R10W		S 36	T6N	S 1	R9W	T5N	S31	T6N		R10W	R9W	S 36	S 31	S 1	S 6	T5N			T6N		R9W	T5N	S 31	R10W	S 6	S 1	T5N
T6N																															
R10W																															
S 36	T6N																														
S 1	R9W																														
T5N	S31																														
T6N																															
R10W	R9W																														
S 36	S 31																														
S 1	S 6																														
T5N																															
	T6N																														
	R9W																														
T5N	S 31																														
R10W	S 6																														
S 1	T5N																														

South Boundary of T. 6 N., R. 10 W. BOOK 4817

Chains	
	From the cor. of Ts. 5 and 6 N., R. 10 W.
	West, on a random line along S. bdy. of Tp., setting temporary corners at 40 chain intervals.
476.46	A point 42 lks. N. of the cor. of Ts. 5 and 6 N., Rs. 10 and 11 W.; described in the field notes of the E. bdy. of T. 6 N., R. 11 W., surveyed under this group.
	Thence
	N. 89° 57' E., on true line bet. secs. 6 and 31.
	Asc. 110 ft. along S. slope, through dense undergrowth.
7.10	Old telephone line, bears NW. and SE.
8.00	Trail, bears N. 75° W. and SE.
9.00	Slope changes to W.; asc. 35 ft.
10.50	Ridge and main divide of Harquahala Mountains, bears NW. and S. 80° E.; across top of mountain.
13.20	Same ridge, bears S. and N. 30° E.; a U.S. Coast and Geodetic Survey Triangulation Station on top of Harquahala Mountain, bears S. 3° 01' E., 3.22 chs. dist.; a brass tablet, 4 ins. diam., set in a concrete base, 10 ins. sq., 8 ins. above ground, mkd. Harquahala 1910 1919; desc. 90 ft. over E. slope.
18.90	Ravine, drains NE.; desc. 250 ft. over NE. slope.
36.46	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S \ 31}{S \ 6}$ 1942
	raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 170 ft. over rocky NE. slope.
43.40	Ravine, drains S. 80° E., 1 ch. dist., thence N. 75° E.; desc. 24 ft. over SE. slope.
45.90	Same ravine, drains N. 75° E.; asc. slightly.
46.90	Point of rocky spur sloping from S.; desc. 70 ft. over rocky NE. slope.
49.50	Same ravine, drains N. 80° E. from N. 75° W.; desc. 44 ft. over rocky NE. slope.
52.20	Same ravine, drains S. 80° E.; desc. 115 ft. over SE. slope.
65.40	Trail, bears N. 80° W. and SE.
66.80	Spur, slopes S. for about 2.50 chs. to toe; desc. 39 ft. along broken S. slope.
75.80	Spur, slopes S. for about 3 chs. to toe, desc. 14 ft. over E. slope.

South Boundary of T. 6 N., R. 10 W.

Chains

76.46 Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 5, 6, 31, and 32, with brass cap mkd.

T6N R10W	
S 31	S 32
S 6	S 5
T5N	
1942	

raise a mound
of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, none; undergrowth, oak brush, mountain mahogany, cats claw, and cacti.

N. 89° 57' E., on true line bet. secs. 5 and 32.

Desc. 64 ft. over E. slope, through scattering timber and undergrowth.

- 0.20 Trail, bears N. and S.
- 3.50 West fork of Sunset Canyon, clear running water, 1 lk. wide, 1 in. deep, course NE.; asc. 215 ft. along N. slope.
- 17.20 Spur, slopes NE., saddle in spur bears NE., about 3 chs. dist.; desc. 175 ft. over a SE. slope.
- 25.60 Head of ravine, drains SE.; asc. slightly along S. slope.
- 33.40 Spur, slopes S.; desc. 271 ft. over precipitous SE. slope.
- 39.95 At a point 3½ lks. N., set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for witness ¼ sec. cor., with brass cap mkd.

¼	S 32
	S 5.
	WC
	1942

from which

a rock outcropping facing east, 20x20 ft., 6 ft. high, bears west, 3 lks. dist., mkd. B0 32.

- 40.00 True point for ¼ sec. cor: falls in bottom of steep ravine, draining N. 50° E., where it is impracticable to monument the cor.; asc. 25 ft. along N. slope.
- 42.90 Spur, slopes N., about 4 chs. dist. to toe; asc. 137 ft. along broken N. slope.
- 59.10 Spur, slopes N.; desc. 74 ft. over NE. slope.
- 64.60 Head of ravine, drains N.; desc. 66 ft. along precipitous N. slope.
- 73.70 Spur, slopes N.; desc. 258 ft. over precipitous NE. slope.

South Boundary of T. 6 N., R. 10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 2 ins. in the ground, over a cross (+) chiseled on bedrock, and in a mound of stone to top, for cor. of secs. 4, 5, 32, and 33, with brass cap mkd.

T6N R10W	
S 32	S 33
S 5	S 4
T5N	
1942	

from which

A granite rock, 14x8 ft., 6 ft. high, bears S. 68° E., 12 lks. dist., mkd. B0 + 4.

A granite rock, 10x6 ft., 6 ft. high, bears N. 23° W., 40 lks. dist., mkd. B0 + 32.

Land, rough mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde and hackberry; undergrowth, oak brush, mountain laurel, cats claw, cacti, and ocotillo.

N. 89° 57' E., on true line bet. secs. 4 and 33.

Over mountainous land, through scattering timber and undergrowth; desc. 102 ft. over precipitous NE. slope.

4.20 Long spur, slopes N. 80° E.; desc. 225 ft. over precipitous E. slope.

9.20 Draw, drains S. 80° E.; desc. 225 ft. over E. slope.

20.00 Spur, slopes S. 25° E.; desc. 174 ft. over rocky SE. slope.

27.00 Spur, slopes S. 20° E.; desc. 250 ft. over SE. slope.

40.00 True point for $\frac{1}{4}$ sec. cor. falls in bottom of ravine, draining S. 20° E., where it is impracticable to monument the cor.

40.30 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, with a stone mkd. with a cross (+), deposited at base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.

W C $\frac{1}{4}$	S 33
	S 4
	1942

Ascend 38 ft. along precipitous S. slope.

51.30 Spur, slopes S. 30° E.; desc. 88 ft. along precipitous S. slope.

55.40 Spur, slopes S. 30° E.; desc. 256 ft. over SE. slope.

67.60 Wash, 15 lks. wide, course NE.; asc. 19 ft. over NE. slope.

73.00 Point of rocky spur sloping from S.; desc. 96 ft. over NE. slope.

South Boundary of T. 6 N., R. 10 W.

Chains											
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3, 4, 33, and 34, with brass cap mkd.										
	<table style="margin: auto;"> <tr><td colspan="2">T6N R10W</td></tr> <tr><td>S 33</td><td>S 34</td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td colspan="2">T5N</td></tr> <tr><td colspan="2">1942</td></tr> </table>	T6N R10W		S 33	S 34	S 4	S 3	T5N		1942	
T6N R10W											
S 33	S 34										
S 4	S 3										
T5N											
1942											
	raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.										
	Land, rough mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, mountain mahogany, sagebrush, cats claw, and ocotillo.										
	----- N. 89° 57' E., on true line bet. secs. 3 and 34.										
	Desc. 13 ft. over NE. slope, through scattering timber and undergrowth.										
1.90	Sunset Canyon, dry wash, 30 lks. wide, course S. 20° E.; asc. 49 ft. over SW. slope.										
7.85	Spur, slopes S.; asc. 159 ft. along broken S. slope.										
23.50	Hillside ravine, drains S.; asc. 186 ft. over SW. slope.										
29.40	Spur, slopes S. 20° W.; desc. 60 ft. along precipitous S. slope.										
35.35	Ravine, drains S. 30° W., small seep spring of clear water in bottom of ravine; asc. 203 ft. over W. slope.										
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, over a cross (+) chiseled on bedrock, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.										
	<table style="margin: auto;"> <tr><td>¼</td><td>S 34</td></tr> <tr><td></td><td>S 3</td></tr> <tr><td></td><td>1942</td></tr> </table>	¼	S 34		S 3		1942				
¼	S 34										
	S 3										
	1942										
	from which										
	A granite boulder, 30x15 ft., 4 ft. high, bears S. 36½° E., 7 lks. dist., mkd. B0 + 3.										
	Asc. 238 ft. over W. slope.										
46.50	Spur, slopes S. 20° W.; desc. 82 ft. along broken S. slope.										
56.00	Ravine, drains S. 30° W.; asc. 692 ft. over rocky SW. slope.										
71.25	High, sharp ridge, bears N. and S.; desc. 268 ft. over broken E. slope.										
76.60	Head of draw, draining S. 80° E.; desc. 136 ft. over precipitous SE. slope.										

South Boundary of T. 6 N., R. 10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, over a cross (+) chiseled on bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 2, 3, 34, and 35, with brass cap mkd.

T6N R10W	
S 34	S 35
S 3	S 2
T5N	
1942	

Land, rough mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde and ironwood; undergrowth, greasewood, ocotillo, cats claw, and cacti.

N. 89° 57' E., on true line bet. secs. 2 and 35.

Desc. 174 ft. over SE. slope, through scattering timber and undergrowth.

3.30 Hillside ravine, drains S. 30° E.; desc. 123 ft. along rocky S. slope.

12.70 Spur, slopes S.; desc. 230 ft. over precipitous SE. slope.

20.60 Head of ravine, drains S., about 5 chs. dist., thence SE.; descend 88 ft. over rocky SE. slope.

30.80 Spur, slopes SE. from N. 80° W.; desc. 77 ft. along broken N. slope.

38.10 Spur, slopes N. 20° E.; desc. 27 ft. over E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., over a cross (+) chiseled on exposed ledge, with a stone marked with a cross (+) deposited at base, and in a mound of stone to to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 35
	S 2
	1942

Descend 330 ft. over E. slope.

54.30 Short spur, slopes N. 10° E.; desc. 137 ft. over SE. slope.

65.60 Ravine, drains S. 75° E.; asc. 34 ft. over SW. slope.

74.00 Spur, slopes S. 75° E.; desc. 113 ft. over E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 2, 35, and 36, with brass cap mkd.

T6N R10W	
S 35	S 36
S 2	S 1
T5N	
1942	

raise a mound

of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

. South Boundary of T. 6 N., R. 10 W.

Chains	Land, mountainous. Soil, rocky; 3d and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and ocotillo.

	N. 89° 57' E., on true line bet. secs. 1 and 36.
	Desc. 82 ft. over E. slope, through scattering timber and undergrowth.
9.00	Enter rolling land, bears N. and S.; descend 111 ft. over SE. slope.
23.70	Ravine, drains NE.; desc. 22 ft.
26.80	Short spur, slopes NE.; desc. 60 ft. over NE. slope.
32.20	Same ravine, wash, 20 lks. wide, course NE. from N.; desc. 21 ft. over E. slope.
36.90	Wash, 25 lks. wide, course SE.; asc. 18 ft.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{r} S 36 \\ S 1 \\ 1942 \end{array}$
	raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 32 ft. along gentle S. slope.
60.10	Wash, 25 lks. wide, course S. 20° E.; asc. 57 ft.
62.45	Top of abrupt bluff on left bank of wash, bears N. and S. 10° E.; desc. 48 ft. over SE. slope.
66.60	Ravine, drains S. 10° W.; asc. 49 ft. over SW. slope.
71.80	Low spur, slopes S.; desc. 46 ft. over SE. slope.
75.80	Head of ravine, drains S.; asc. 34 ft. over SW. slope.
78.00	Spur, slopes SE.; desc. 16 ft. over NE. slope.
80.00	The cor. of Ts. 5 and 6 N., R. 10 W.
	Land, W. 9 chs., mountainous; E. 71 chs., rolling and broken. Soil, rocky and sandy, 3d and 4th rates. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

From the cor. of secs. 1, 2, 35, and 36, on N. bdy. of Tp., which is an iron post, 3 ins. diam., set, mkd., and witnessed as described in the official record.


S. 0° 08' W., bet. secs. 1 and 2.

Asc. 1056 ft. over a broken N. slope, through scattering timber and undergrowth.

38.76 From this point a U.S. Coast and Geodetic Survey Triangulation Station bears S. 65° 34' E., 6.23 chs. dist.; a brass tablet, 4 ins. diam., set in a concrete base, mkd. Pioneer 1923. This triangulation station is located on top of a high, sharp peak, on a long spur, sloping northwesterly.

39.00 Long spur, slopes N. 65° W.; desc. slightly.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.



Desc. 923 ft. over precipitous, rocky SW. slope.

70.00 Enter rolling land, bears NW. and E.; desc. 117 ft. over SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 2, 11, and 12, with brass cap mkd.



of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

Land, N. 70 chs., mountainous; S. 10 chs., rolling. Soil, rocky, 3d and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and ocotillo.

N. 89° 59' E., on a random line bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.

80.20 A point 12 lks. N. of the cor. of secs. 1 and 12, on the E. bdy. of the Tp.

Thence

N. 89° 56' W., on true line bet. secs. 1 and 12.

Desc. 91 ft. over NW. slope, through scattering timber and undergrowth.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

- 4.60 Ravine, drains N.; asc. 157 ft. over NE. slope.
- 12.30 Spur, slopes N. 50° W.; desc. 309 ft. over W. slope.
- 21.80 Ravine, drains S. 80° W.; desc. 279 ft. over SW. slope.
- 35.50 Ravine, drains SW.; desc. 20 ft. over rolling SW. slope.
- 40.10 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S \ 1}{S \ 12}$$

1942
- Desc. 60 ft. over SW. slope.
- 52.80 Ravine, drains S. 30° W., about 3 chs. dist., thence W.; desc. 105 ft. over SW. slope.
- 80.20 The cor. of secs. 1, 2, 11, and 12.

 Land, E. 35 chs., mountainous; W. 45 chs., rolling and broken.
 Soil, rocky, 3d and 4th rate.
 Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, cats claw, and ocotillo.

 S. 0° 08' W., bet. secs. 11 and 12.

 Desc. 20 ft. over SW. slope, through scattering timber and undergrowth.
- 9.30 Wash, 15 lks. wide, course W., about 5 chs. dist. to junction with wash draining northwesterly; along gentle W. slope.
- 21.00 Wash, 40 lks. wide, course N. 20° W.; asc. 18 ft. over NE. slope.
- 30.60 Wash, 20 lks. wide, course E.; asc. 43 ft. over NE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S \ 11 \ | \ S \ 12}{1942}$$
- Asc. 101 ft. over NE. slope.
- 44.60 Bend in road, bears N. 35° W. and S. 70° E.
- 75.20 Ravine, drains NE.; asc. 62 ft. over N. slope:
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam.; 10 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 11, 12, 13, and 14, with brass cap mkd.

Subdivisional Lines of T. 6 N., R. 10 W. BOOK 407

Chains

T6N R10W
 S 11 | S 12
 S 14 | S 13
 1942

Land, rolling and broken.
 Soil, rocky, 3d and 4th rate.
 Timber, palo verde and ironwood; undergrowth, greasewood,
 sagebrush, cacti, and ocotillo.

 S. 89° 56' E., on a random line bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.24 A point 16 lks. S. of the cor. of secs. 12 and 13, on the
 E. bdy. of the Tp.

Thence

S. 89° 57' W., on true line bet. secs. 12 and 13.

Desc. 189 ft. over a broken W. slope, through scattering
 timber and undergrowth.

20.00 Thence over rolling land, bears N. and S.

21.50 Bend in road, bears NW. and S. 70° W.

27.10 Wash, 15 lks. wide, course S. 60° W.; desc. 46 ft. over
 SW. slope.

37.60 Wash, 30 lks. wide, course NW., 1 ch. dist., thence W.,
 4 chs. dist., thence NW.; asc. 9 ft. along N. slope.

40.12 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
 ground to bedrock, and in a mound of stone to top, for
 $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 12}{S\ 13}$
 1942

raise a mound
 of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Desc. 39 ft. along broken N. slope.

51.50 Wash, 20 lks. wide, course N. from SE.; ascend slightly.

52.50 Wash, 20 lks. wide, course N. 10° E. from SW.; asc. 103
 ft. over NE. slope.

66.40 Spur, slopes N. 10° E. from SW.; asc. 11 ft. along N.
 slope.

80.24 The cor. of secs. 11, 12, 13, and 14.

Land, E. 20 chs., mountainous; W. 6 chs., rolling.
 Soil, rocky, 3d and 4th rate.
 Timber, palo verde and ironwood; undergrowth, greasewood,
 sagebrush, cacti, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	S. 0° 08' W., bet. secs. 13 and 14. Asc. 282 ft. over a N. slope, through scattering timber and undergrowth.
14.00	Spur, slopes N. 60° E.; desc. 136 ft. over a SE. slope.
29.90	Ravine, drains N. 60° E.; asc. 260 ft. over NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 14 \mid \text{S } 13 \\ \\ 1942 \end{array}$
	Asc. 124 ft. over NW. slope.
45.60	Spur, slopes N. 70° E.; desc. 110 ft. along broken E. slope.
64.70	Ravine, drains NE.; asc. 307 ft. over NW. slope.
75.80	Ridge and main divide, bears N. 80° E. and S. 80° W.; desc. 87 ft. over S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 5 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 13, 14, 23, and 24, with brass cap mkd.
	$\begin{array}{c} \text{T6N R10W} \\ \text{S } 14 \mid \text{S } 13 \\ \hline \text{S } 23 \mid \text{S } 24 \\ 1942 \end{array}$
	Land, N. 14 chs., rolling; S. 66 chs., mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and ocotillo.

	N. 89° 57' E., on a random line bet. secs. 13 and 24.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.24	A point 9 lks. S. of the cor. of secs. 13 and 24, on the E. bdy. of the Tp.
	Thence
	S. 89° 53' W., on true line bet. secs. 13 and 24.
	Desc. 134 ft. over NW. slope, through scattering timber and undergrowth.
8.10	Ravine, drains S.; asc. slightly along gentle S. slope.
19.60	Ravine, drains S.; asc. 231 ft. over NE. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
30.70	Spur, slopes S. 80° E.; asc. 25 ft. over E. slope.
40.12	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 13 \\ \hline S 24 \\ 1942 \end{array}$
	Asc. 24 ft. over E. slope.
42.90	Spur, slopes SE.; desc. 80 ft. over SW. slope.
50.50	Ravine, drains SE.; asc. 336 ft. over SE. slope.
68.70	Spur, slopes S. 20° E.; desc. 24 ft. along S. slope.
80.24	The cor. of secs. 13, 14, 23, and 24.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, greasewood; sagebrush, cacti, and cats claw.

	S. 0° 08' W., bet. secs. 23 and 24.
	Desc. 161 ft. over S. slope, through scattering timber and undergrowth.
9.00	Ravine, drains E.; asc. 380 ft. over N. slope.
27.60	Spur, slopes E.; desc. 156 ft. over S. slope.
36.60	Ravine, drains S. 70° E.; asc. 53 ft. over NE. slope.
40.00	True point for $\frac{1}{4}$ sec. cor. falls on exposed ledge, where it is impracticable to monument the cor.
40.35	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} W C \\ \frac{1}{4} \\ \uparrow \\ S 23 S 24 \\ 1942 \end{array}$
	raise a mound
	of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
	Asc. 16 ft. along E. slope.
46.55	Spur, slopes E.; desc. 514 ft. over broken S. slope.
67.00	Brown's Canyon Wash, 40 lks. wide, clear running water, 8 lks. wide, 2 ins. deep, course E.; asc. 63 ft. over NW. slope.
75.90	Ravine, drains N. 10° W.; asc. 92 ft. over NE. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 23, 24, 25, and 26, with brass cap mkd.

T6N R10W	
S 23	S 24
S 26	S 25
1942	

Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, greasewood, sagebrush, cacti and cats claw.

N. 89° 53' E., on a random line bet. secs. 24 and 25.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.38 A point 12 lks. N. of cor. of secs. 24 and 25, on the E. bdy. of the Tp.

Thence

S. 89° 58' W., on true line bet. secs. 24 and 25.

Asc. 200 ft. along broken N. slope, through scattering timber and undergrowth.

19.50 Spur, slopes N. 10° W.; desc. 65 ft. over NW. slope.

28.70 Ravine, drains NE.; asc. 167 ft. over E. slope.

40.19 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 24
	S 25
	1942

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Asc. 201 ft. over E. slope.

47.90 Spur, slopes N. 20° E.; desc. 132 ft. over broken NW. slope.

69.55 Spur, slopes N. 30° W.; desc. 242 ft. over SW. slope.

78.70 Ravine, drains N. 10° W.; asc. 20 ft. over NE. slope.

80.38 The cor. of secs. 23, 24, 25, and 26:

Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	S. $0^{\circ} 08'$ W., bet. secs. 25 and 26.
	Asc. 135 ft. over NE. slope, through scattering timber and undergrowth.
5.30	Ravine, drains NE., 2 chs. dist., thence N. 10° W.; asc. 554 ft. over N. slope.
26.40	Long spur, slopes E. from S. 70° W.; desc. 99 ft. over broken SE. slope.
35.60	Wash, in bottom of canyon, 20 lks. wide, course N. 60° E.; asc. 96 ft. over NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	Asc. 94 ft. over NW. slope.
47.00	Long spur, slopes E.; desc. 350 ft. over steep, broken S. slope.
57.90	Bottom of rocky canyon, course E.; asc. 350 ft. over precipitous N. slope.
70.40	Spur, slopes S. 70° E.; desc. 278 ft. over S. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 25 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 25, 26, 35, and 36, with brass cap mkd.
	raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, none; undergrowth, sagebrush, cacti, and cats claw.

	N. $89^{\circ} 58'$ E., on random line bet. secs. 25 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.40	A point 28 lks. S. of cor. of secs. 25 and 36, on E. bdy. of Tp.
	Thence
	S. $89^{\circ} 46'$ W., on true line bet. secs. 25 and 36.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	Asc. 69 ft. over NE. slope, through scattering timber and undergrowth.
5.60	Spur, slopes S. 70° E.; asc. 125 ft. over E. slope.
15.35	Spur, slopes S.; desc. 244 ft. over W. slope.
24.00	Wash, 20 lks. wide, course S. from N. 20° W.; asc. 223 ft. over SE. slope.
40.20	Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{r} S 25 \\ \hline S 36 \\ 1942 \end{array}$
	raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.
	Asc. slightly over NE. slope.
40.80	Ravine, drains S. 70° E.; asc. 321 ft. over NE. slope.
53.60	Spur, slopes SE.; asc. 41 ft. along S. slope.
56.90	Sidehill ravine, drains SE.; asc. 165 ft. over E. slope.
63.20	Spur, slopes SE.; desc. 121 ft. along S. slope.
80.40	The cor. of secs. 25, 26, 35, and 36.
	Land, mountainous. Soil, rocky, 3d and 4th rates. Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.


	S. 0° 08' W., on a random line bet. secs. 35 and 36.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.85	A point 19 lks. W. of the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp.
	Thence
	North, on true line bet. secs. 35 and 36.
	Over mountainous land, through scattering timber and undergrowth; asc. 29 ft. along E. slope.
5.25	Top of ascent, bears E. and W.; desc. 62 ft. over NE. slope.
8.60	Ravine, drains E.; asc. 133 ft. over SE. slope.
14.15	Slope changes, asc. 47 ft. along broken E. slope.
29.70	Top of ascent, bears W. and SE.; desc. 149 ft. over N. slope.
35.20	Ravine, drains E.; asc. 51 ft. over SE. slope.
39.55	Spur, slopes S. 80° E.; descend slightly.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

39.85 True point for $\frac{1}{4}$ sec. cor. falls on a sloping rock ledge, where it is impracticable to monument the cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., over a cross (+) chiseled on solid rock, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.



Descend 66 ft. over rocky NE. slope.

49.80 Ravine, drains S. 70° E.; asc. 235 ft. over SE. slope.

60.15 Spur, slopes E.; desc. 163 ft. over N. slope.

65.85 Wash, 15 lks. wide, course E.; asc. 416 ft. over S. slope.

79.85 The cor. of secs. 25, 26, 35, and 36.

Land, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and ocotillo.

From the cor. of secs. 2, 3, 10, and 11, which is an iron post, 2 ins. diam., set, mkd., and witnessed as described in the official record.

N. 89° 59' E., on a random line bet. secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 A point 2 lks. S. of the cor. of secs. 1, 2, 11, and 12.

Thence


S. 89° 58' W., on true line bet. secs. 2 and 11.

Desc. slightly over a gradual SW. slope, through scattering timber and undergrowth.

21.50 Wash, 100 lks. wide, course NW. from S. 20° E.; asc. slightly along gentle N. slope.

34.90 Good dirt road, bears N. 25° W. and S. 25° E.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. raise a mound

Desc. 36 ft. over gradual NW. slope.

79.90 The cor. of secs. 2, 3, 10, and 11.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

Land, nearly level desert.
Soil, gravelly and sandy, 2nd rate.
Timber, palo verde and ironwood; undergrowth, greasewood,
sagebrush, and native grass.

S. 0° 08' W., bet. secs. 10 and 11.

Descend slightly over nearly level desert land, through
scattering timber and undergrowth.

0.70 Wash, 15 lks. wide, course N. 50° W.; asc. 17 ft. over
gentle NW. slope.

14.60 Ravine, drains N. 60° W.; asc. 115 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 10 | S 11
 1942

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Asc. 14 ft. over N. slope.

44.10 Ravine, drains N. 60° W.; asc. 18 ft. over NE. slope.

45.00 Road, bears NE. and SW.

46.50 Same ravine, drains N. 15° E. to bend, thence N. 60° W.;
asc. 31 ft. over NW. slope.

49.95 Same ravine, drains NW. from S. 10° E.; enter mountainous
land, bears E. and W.; asc. 160 ft. over N. slope.

58.30 Spur, slopes N. 75° W.; asc. 71 ft. over NW. slope.

63.00 Spur, slopes N. 75° W.; asc. 241 ft. over NW. slope.

79.50 Spur, slopes NE.; desc. slightly over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the
ground, for cor. of secs. 10, 11, 14, and 15, with brass
cap mkd.

T6N R10W
 S 10 | S 11
 S 15 | S 14
 1942

raise a mound
of stone, 3 ft. base, 2½ ft. high, W. of cor.

From cor. a mine shaft bears S. 59° 03' E., about 10.60
chs. dist.; and a prospect hole bears SW., about 4 chs.
dist.

Land, nearly level desert, rolling, and mountainous.
Soil, sandy and rocky, 2nd and 3d rate.
Timber, palo verde and ironwood; undergrowth, greasewood,
cats claw, sagebrush, ocotillo, and cacti.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	N. 89° 58' E., on a random line bet. secs. 11 and 14.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.88	A point 2 lks. S. of the cor. of secs. 11, 12, 13, and 14. Thence
	S. 89° 57' W., on true line bet. secs. 11 and 14. Over rolling land, along N. slope, through scattering timber and undergrowth.
8.40	Low spur, slopes N.; desc. 58 ft. over NW. slope.
20.95	The S. side of a rock corral, about 1 ch. in diam., walls 6 ft. high, bears N. 10° W., 4.30 chs. dist.
27.05	Wash, 25 lks. wide, course NE.; asc. 32 ft. over E. slope.
33.00	Road, bears SW. and NE., 50 lks. dist. to junction with another road bearing easterly and westerly.
34.87	The SW. cor. of a cabin, 15x25 ft., bears N. 75 lks. dist.
39.94	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ $\frac{S\ 11}{S\ 14}$ 1942
	raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Cor. falls in old unused road, bears N. 85° E. and S. 85° W.
	Ascend slightly over NE. slope.
46.50	Ravine, drains N., 1.50 chs. dist., thence N. 80° E.; enter mountainous land, bears N. and S. 60° E.; asc. 181 ft. over NE. slope.
52.40	Bend in same road, bears NW. and S. 35° E.
57.20	Long spur, slopes N. 20° E., low saddle in spur bears N. 20° E., about 2.50 chs. dist.; desc. 50 ft. along broken N. slope.
63.20	Same road, bears NE. and SW. to mine.
70.70	Ravine, drains N. 50° E.; asc. 224 ft. over E. slope.
79.88	The cor. of secs. 10, 11, 14, and 15. Land, E. 47 chs., rolling; W. 33 chs., mountainous. Soil, rocky and sandy, 3d and 4th rates. Timber, palo verde; undergrowth, greasewood, cats claw, cacti, sagebrush, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	S. 0° 08' W., bet. secs. 14 and 15.
	Desc. 51 ft. along precipitous E. slope, through scattering timber and undergrowth.
7.70	Ravine, drains N. 75° E.; asc. 300 ft. over NE. slope.
16.20	Spur, slopes N. 10° E.; a mine prospect hole bears W., about 3 chs. dist.; asc. 125 ft. over NE. slope.
19.40	Long spur, slopes N. 60° E.; cabin "A" bears S. 66½° E., located on left bank of long wash draining northeasterly, for second bearing see 59.95 ch. station bet. secs. 14 and 23; desc. 154 ft. along precipitous E. slope.
20.35	Concrete water tank, 12x12 ft. sq. ("B") bears S. 74° E., for second bearing see 59.95 ch. station bet. secs. 14 and 23.
26.60	Ravine, drains N. 75° E.; asc. 4 ft. over NE. slope.
29.10	Spur, slopes E., low saddle in spur bears E., 2 chs. dist.; desc. 169 ft. over SE. slope.
34.10	Ravine, drains S. 80° E.; asc. 44 ft. over NE. slope.
38.50	Low saddle in rocky spur sloping S. 50° E.; desc. 13 ft. over SW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, over a cross (+) chiseled on solid rock, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.
	$\frac{1}{4}$
	Desc. 221 ft. over rocky SW. slope.
40.50	Triangular rock corral "C", bears S. 25½° W., for second bearing see 60.05 ch. station.
47.80	Ravine, drains SE., descend 48 ft. along E. slope.
52.10	Wash, 20 lks. wide, course N. 80° E.; asc. 455 ft. over rocky, N. slope.
52.90	Wire fence, bears NE. and SW.
53.00	Pipe line, bears N. 70° E. and S. 80° W.; mine prospect hole bears N. 70° E., about 3.50 chs. dist.
60.05	Triangular rock corral "C" bears N. 60° W.
71.75	Spur, slopes N. 75° E.; desc. 40 ft. along E. slope.
74.40	Head of ravine, drains N. 50° E.; asc. 79 ft. over NE. slope.
77.70	Short spur, slopes E.; desc. slightly along E. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, over a cross (+) chiseled on solid rock, and in a mound of stone to top, for cor. of secs. 14, 15, 22, and 23, with brass cap mkd.

Subdivisional Lines of T. 6 N., R. 11 W.

Chains

T6N R10W	
S 15	S 14
S 22	S 23
1942	

Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, sagebrush, cats claw,
cacti, and ocotillo.

N. 89° 57' E., on a random line bet. secs. 14 and 23.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 A point 16 lks. S. of the cor. of secs. 13, 14, 23, and 24.

Thence

S. 89° 50' W., on true line bet. secs. 14 and 23.

Asc. 205 ft. over SE. slope, through scattering timber
and undergrowth.

12.50 Ridge and main divide, bears S. 80° W. and N. 80° E.;
desc. 121 ft. over rocky NW. slope.

25.20 Ravine, drains N. 25° E.; asc. 237 ft. over E. slope.

35.35 Spur, slopes NE.; desc. 137 ft. over NW. slope.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the
ground, over a cross (+) chiseled on solid rock, and in
a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap
mkd.

$\frac{1}{4}$	S 14
	S 23
	1942

Ascend slightly.

40.15 Spur, slopes N. 10° W.; desc. 105 ft. over NW. slope.

45.30 Spur, slopes N. 25° W.; desc. 63 ft. over NW. slope.

47.00 Head of ravine, drains N. 20° W.; asc. 12 ft. along
precipitous N. slope.

50.50 Spur, slopes N. 10° W.; desc. 129 ft. over NW. slope.

56.00 Ravine, drains N. 10° W.; asc. 86 ft. over NE. slope.

59.95 Spur, slopes N.; cabin "A" bears N. 13 $\frac{1}{2}$ ° E.; concrete
water tank "B" bears N. 15 $\frac{1}{2}$ ° E.; desc. 108 ft. over
precipitous NW. slope.

60.05 Graded trail, bears N. and S. 15° W.

64.70 Wash, 15 lks. wide, course N. 10° W.; asc. 48 ft. along
rocky N. slope.

67.10 An old steam boiler set in concrete base bears N., 1.25
chs. dist.; the steam boiler and several rock and
concrete foundations of old buildings are the principal
remains of an old mining mill site.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
73.90	Ravine, drains N. 30° E.; asc. 160 ft. over E. slope.
79.90	The cor. of secs. 14, 15, 22, and 23. Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, oak brush, mountain mahogany, cats claw, and ocotillo.

	S. 0° 08' W., bet. secs. 22 and 23.
	Desc. 19 ft. along an E. slope, through scattering timber and undergrowth.
3.50	Ravine, drains N. 50° E.; asc. 395 ft. over NE. slope.
12.50	Spur, slopes N. 75° E.; asc. 400 ft. over NE. slope.
17.50	Mouth of mine tunnel bears W., 1.20 chs. dist.
23.90	Mine shaft bears W., 1.20 chs. dist.
25.30	Mine prospect hole bears W., 1.00 chs. dist.
27.90	Ridge and main divide, bears E. and W.; desc. 262 ft. over broken S. slope.
38.20	Ravine, drains E.; asc. 12 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S 22 S 23 1942
	<p style="text-align: right;">raise a mound</p> of stone, 3 ft. base, 2 ft. high, W. of cor.
	Asc. 15 ft. over NE. slope.
42.50	Short spur, slopes NE.; desc. 68 ft. over SE. slope.
50.00	Ravine, drains N. 80° E.; asc. 144 ft. over NE. slope.
59.90	Spur, slopes N. 75° E.; desc. 285 ft. over S. slope.
70.40	Ravine, drains SE., about 3 chs. dist., thence N. 60° E.; asc. 22 ft.
73.20	Spur, slopes S. 80° E., 3.50 chs. dist. to toe; desc. 32 ft.
76.00	Brown's Canyon, wash, 10 lks. wide, clear running water, 2 lks. wide, 1 in. deep, course N. 60° E.; asc. 33 ft. over NE. slope.
78.20	The SW. side of a rock corral bears N. 61° E., 1.50 chs. dist.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26, and 27, with brass cap mkd.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

T6N R10W	
S 22	S 23
S 27	S 26
1942	

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde; undergrowth, oak brush, mountain mahogany, cacti, cats claw, and ocotillo.

N. 89° 50' E., on a random line bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 A point 23 lks. S. of cor. of secs. 23, 24, 25, and 26.

Thence

S. 89° 40' W., on true line bet. secs. 23 and 26.

Asc. 197 ft. over rocky NE. slope, through scattering timber and undergrowth.

7.90 Spur, slopes NE.; desc. 150 ft. over NW. slope.

15.10 Bottom of canyon, course NE.; a spring of clear running water, 2 lks. wide, 1 in. deep, in canyon, bears SW., 50 lks. dist., drains NE.; asc. 585 ft. over broken, rocky SE. slope.

30.60 Spur, slopes NE.; asc. 29 ft. along N. slope.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 23
	S 26
	1942

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 37 ft. over NE. slope.

43.00 Saddle in spur sloping NE., and another spur slopes S. 75° E.; desc. 50 ft. along N. slope.

59.10 Ravine, drains N. 30° E.; asc. 198 ft. over SE. slope.

71.00 Spur, slopes N. 80° E.; desc. 86 ft. over NW. slope.

78.10 Ravine, near head, drains N., and a trail, bears N. and S.; along gentle N. slope.

79.90 The cor. of secs. 22, 23, 26, and 27.

Land, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde; undergrowth, oak brush, mountain mahogany, cacti, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

S. $0^{\circ} 08'$ W., bet. secs. 26 and 27.

Asc. 28 ft. over NE. slope, through scattering timber and undergrowth.

2.00 Spur, slopes E.; saddle in spur bears E., 2 chs. dist.; asc. 16 ft. along E. slope.

10.65 Spur, slopes E.; desc. 140 ft. over SE. slope.

18.30 Ravine, drains S. 80° E.; asc. 193 ft. over NE. slope.

26.10 Spur, slopes S. 80° E.; descend 275 ft. over SE. slope.

37.50 Ravine, clear running water, 1 lk. wide, 1 in. deep, drains N. 75° E.; asc. 43 ft. over N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \updownarrow \\ \text{S } 27 \mid \text{S } 26 \\ \downarrow \\ 1942 \end{array}$$

of stone, 3 ft. base; 2 ft. high, W. of cor. raise a mound

Asc. 194 ft. over N. slope.

48.40 Spur, slopes N. 75° E.; desc. 93 ft. over SE. slope:

64.80 Ravine, clear running water, 2 lks. wide, 1 in. deep, drains N. 75° E.; asc. 267 ft. over NW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 26, 27, 34, and 35, with brass cap mkd.

$$\begin{array}{c} \text{T6N R10W} \\ \text{S } 27 \mid \text{S } 26 \\ \text{S } 34 \mid \text{S } 35 \\ \downarrow \\ 1942 \end{array}$$

of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound

Land, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde; undergrowth, oak brush, mountain mahogany, mountain laurel, cats claw, cacti, and ocotillo.

N. $89^{\circ} 40'$ E., on a random line bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 A point 21 lks. N. of the cor. of secs. 25, 26, 35, and 36.

Thence

S. $89^{\circ} 49'$ W., on true line bet. secs. 26 and 35.


Desc. 114 ft. along precipitous S. slope, through scattering timber and undergrowth.


Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
7.20	Spur, slopes S.; asc. 39 ft. along rocky S. slope.
17.70	Spur, slopes S. 20° E.; desc. 87 ft. over SW. slope.
22.00	Ravine, drains S. 15° E.; asc. 182 ft. over SE. slope.
35.70	Head of ravine, drains SE.; asc. 111 ft. over SE. slope.
38.20	Spur, slopes SE.; asc. 41 ft.
39.95	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, over a cross (+) chiseled on solid rock, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\text{WC } \frac{1}{4} \begin{array}{l} \text{S } 26 \\ \text{S } 35 \\ 1942 \end{array}$
40.00	True point for $\frac{1}{4}$ sec. cor. falls on exposed ledge, where it is impracticable to monument the cor. Asc. 463 ft. over a precipitous, rocky SE. slope.
51.80	Spur, slopes NE.; desc. 84 ft. over NW. slope.
60.70	Ravine, drains NE.; asc. 262 ft. over E. slope.
76.80	Spur, slopes N. 75° E.; desc. 74 ft. over NW. slope.
80.00	The cor. of secs. 26, 27, 34, and 35. Land, mountainous. Soil, rocky, 3d and 4th rates. Timber, palo verde; undergrowth, sagebrush, oak brush, mountain mahogany, cats claw, cacti, and ocotillo.

	South, on a random line bet. secs. 34 and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.67	Intersect S. bdy. of Tp., 11 lks. E. of cor. of secs. 2, 3, 34, and 35. Thence N. 0° 05' E., on true line bet. secs. 34 and 35.
	Asc. 55 ft. over precipitous SE. slope, through scattering timber and undergrowth.
3.40	Spur, slopes E.; desc. 184 ft. along precipitous E. slope.
20.40	Ravine, drains E.; asc. 163 ft. over SE. slope.
28.30	Spur, slopes S. 60° E.; desc. 142 ft. over NE. slope.
34.40	Ravine, drains S. 80° E.; asc. 133 ft. over SE. slope.
39.67	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	
	raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Ascend 81 ft. over SE. slope.
42.50	Spur, slopes N. 80° E.; desc. 59 ft. over N. slope.
46.20	Ravine, drains N. 15° E.; asc. 55 ft. along E. slope.
58.35	Spur, slopes N. 80° E.; asc. slightly along E. slope.
74.20	Spur, slopes NE.; desc. 81 ft. over NW. slope.
79.67	The cor. of secs. 26, 27, 34, and 35.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, oak brush, mountain mahogany, cats claw, cacti, and ocotillo.

	From the cor. of secs. 3, 4, 9, and 10, which is an iron post, 2 ins. diam., set, mkd., and witnessed as described in the official record.
	S. 0° 07' W., bet. secs. 9 and 10.
	Over nearly level desert land sloping NW., through scattering timber and undergrowth.
9.50	Wash, 10 lks. wide, course NW.; asc. 69 ft. over gradual NW. slope.
36.00	Leave desert, enter mountainous land, bears W. and S. 70° E.; asc. 40 ft. over N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	
	raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
	Asc. 50 ft. over N. slope.
43.00	Slope changes to NE.; asc. 175 ft.
54.00	Spur, slopes NW.; desc. 111 ft. over SW. slope.
66.70	Wash, 15 lks. wide, course NW.; asc. 55 ft. over NW. slope.
78.50	Enter wash, 15 lks. wide, course N. 20° W. from S.; asc. slightly along wash.
79.60	Leave wash, course N. from S. 20° E.; asc. 14 ft. over NW. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 9, 10, 15, and 16, with brass cap mkd.

T6N R10W
S 9 | S 10

S 16 | S 15
1942

raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, N. 36 chs., nearly level; S. 44 chs., mountainous. Soil, sandy, gravelly, and rocky, 2nd, 3d, and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and native grass.

S. 89° 57' E., on a random line bet. secs. 10 and 15.

40.00 Set temp. ¼ sec. cor.

79.86 A point 5 lks. S. of cor. of secs. 10, 11, 14, and 15.

Thence

N. 89° 59' W., on true line bet. secs. 10 and 15.

Asc. 15 ft. over a SE. slope, through scattering timber and undergrowth.

1.00 Spur, slopes NE.; desc. 58 ft. over NW. slope.

5.50 Head of ravine, drains NE.; asc. 35 ft. over NE. slope.

7.40 Spur, slopes N. 10° E.; desc. 79 ft. over NW. slope.

12.00 Ravine, drains N.; asc. 136 ft. over NE. slope.

17.50 Spur, slopes N. 15° E.; desc. 260 ft. over W. slope.

26.30 Ravine, drains N. 30° W.; desc. 37 ft. along N. slope.

33.10 Ravine, drains N.; asc. 36 ft. along N. slope.

39.45 Spur, slopes NW.; desc. slightly.

39.93 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for ¼ sec. cor., with brass cap mkd.

S 10
¼ -----
S 15
1942

Desc. 429 ft. over SW. slope.

64.85 Ravine, drains NW.; desc. 45 ft. over NW. slope.

79.55 Wash, 10 lks. wide, course N. 20° W.; asc. slightly.

79.86 The cor. of secs. 9, 10, 15, and 16.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	<p>Land, mountainous. Soil, rocky; 2nd and 3d rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and cats claw.</p> <p>-----</p> <p>S. 0° 07' W., bet. secs. 15 and 16.</p> <p>Asc. 261 ft. over NE. slope, through scattering timber and undergrowth.</p>
24.70	Low, broad spur; slopes NW.; asc. 225 ft. over NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 16 \mid \text{S } 15 \\ \\ 1942 \end{array}$
	Asc. 107 ft. over NW. slope.
45.80	Ravine, drains N. 20° W.; asc. 274 ft. over N. slope.
52.00	Spur, slopes N. 60° W.; desc. 121 ft. over SW. slope.
58.80	Ravine, drains N. 60° W.; asc. 518 ft. over a precipitous NW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 15, 16, 21, and 22, with brass cap mkd.
	$\begin{array}{c} \text{T6N R10W} \\ \text{S } 16 \mid \text{S } 15 \\ \text{S } 21 \mid \text{S } 22 \\ 1942 \end{array}$
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	<p>Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, cats claw, ocotillo.</p> <p>-----</p> <p>S. 89° 59' E., on a random line bet. secs. 15 and 22.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	A point 26 lks. N. of cor. of secs. 14, 15, 22, and 23.
	Thence
	N. 89° 48' W., on true line bet. secs. 15 and 22.
	Asc. 213 ft. over E. slope, through scattering timber and undergrowth.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
8.10	Spur, slopes N.; desc. 265 ft. over W. slope.
18.60	Ravine, drains N.; asc. 187 ft. over NE. slope.
25.30	Ravine, drains NE.; asc. 338 ft. over E. slope.
36.20	Spur, slopes N.; desc. slightly over W. slope.
38.20	Ravine, drains N.; asc. 37 ft. over E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., over a cross (+) chiseled on solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{c} S 15 \\ S 22 \\ 1942 \end{array}$
	Asc. 169 ft. over E. slope.
48.90	Spur, slopes NW.; desc. 161 ft. over W. slope.
55.30	Ravine, drains N. 60° W.; asc. 55 ft. over NE. slope.
60.70	Short, low spur, slopes N.; asc. 40 ft. along precipitous N. slope.
74.10	Spur, slopes NW.; desc. 279 ft. over precipitous NW. slope.
80.00	The cor. of secs. 15, 16, 21, and 22.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, none; undergrowth, oak brush, mountain mahogany, sagebrush, cacti, and cats claw.

	S. 0° 07' W., bet. secs. 21 and 22.
	Asc. 79 ft. over rocky NW. slope, through scattering timber and undergrowth.
7.90	Steep ravine, drains NW.; asc. 241 ft. over N. slope.
12.80	Rocky spur, slopes NW.; asc. 510 ft. along precipitous W. slope, over a series of broken cliffs.
40.00	True point for $\frac{1}{4}$ sec. cor. falls on precipitous slope where it is impracticable to monument the cor.
40.50	Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} W C \\ \frac{1}{4} \\ S 21 S 22 \\ 1942 \end{array}$
	Asc. 45 ft. over NW. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
47.10	Spur, slopes N. 30° E. from S.; asc. 84 ft. along top of spur.
55.00	Same spur, slopes N. from S. 20° E.; along W. slope.
58.10	Ravine, drains NW.; asc. 208 ft. over NW. slope.
67.60	Head of spur, slopes NW.; asc. 165 ft. over N. slope.
77.00	Ridge and main divide, bears W. and S. 75° E. to rocky butte; desc. 42 ft. over SW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 21, 22, 27, and 28, with brass cap mkd.
	T6N R10W S 21 S 22 S 28 S 27 1942
	Land, rough mountainous. Soil, rocky, 3d and 4th rate. Timber, none; undergrowth, oak brush, mountain mahogany, mountain laurel, cats claw, and cacti.

	S. 89° 48' E., on a random line bet. secs. 22 and 27.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	A point 12 lks. N. of the cor. of secs. 22, 23, 26, and 27.
	Thence
	N. 89° 43' W., on true line bet. secs. 22 and 27.
	Asc. 53 ft. over NE. slope, through scattering timber and undergrowth.
7.50	Short, low spur, slopes N.; asc. 107 ft. along N. slope.
25.80	Ravine, drains NE., about 4 chs. dist. to junction with ravine draining E.; asc. 314 ft. along top of spur, sloping from W.
36.50	Top of steep ascent, bears NE. and SW.; asc. 47 ft. over NE. slope.
39.43	Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.
	WC $\frac{1}{4}$ $\frac{S 22}{S 27}$ 1942
40.03	True point for $\frac{1}{4}$ sec. cor. falls on exposed ledge, where it is impracticable to monument the cor.
57.00	Low spur, slopes NE.; asc. 28 ft. along N. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

- 61.60 Ravine, drains NE.; ascend 380 ft. over E. slope.
- 76.20 Top of rocky butte, on main divide bearing N. 75° W. and NE.; head of spur, slopes SE.; desc. 82 ft. over SW. slope.
- 80.06 The cor. of secs. 21, 22, 27, and 28.
- Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, oak brush, mountain mahogany, sagebrush, and cacti.

S. 0° 07' W., bet. secs. 27 and 28.

Desc. 414 ft. over broken SW. slope, through scattering timber and undergrowth.

- 18.90 Ravine, drains E., about 10 chs. dist., thence SE.; asc. 229 ft. over NE. slope.

- 34.60 Spur, slopes E.; desc. 51 ft. over SE. slope.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 28 | S 27
 1942

Desc. 90 ft. over SE. slope.

- 43.80 Ravine, drains E., 1 ch. dist., thence N. 70° E.; asc. 21 ft.

- 44.90 Ravine, drains N. 70° E.; asc. 450 ft. over N. slope.

- 71.50 Long spur, slopes SE. from N. 30° W.; desc. 173 ft. over rocky SW. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 25 ins. in the ground to bedrock, and in a mound of stone to top, for cor. of secs. 27, 28, 33, and 34, with brass cap mkd.

T6N R10W
 S 28 | S 27
 S 33 | S 34
 1942

raise a mound


of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, oak brush, mountain mahogany, mountain laurel, and cacti.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	S. 89° 43' E., on a random line bet. secs. 27 and 34.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	A point 7 lks. N. of cor. of secs. 26, 27, 34, and 35.
	Thence
	N. 89° 40' W., on true line bet. secs. 27 and 34.
	Desc. 152 ft. over NW. slope, through scattering timber and undergrowth.
9.90	Wash, 15 lks. wide, course N. from SW., water in pools; a seep spring in bottom of wash bears SW., about 7 chs. dist.; asc. 231 ft. over SE. slope.
29.50	Point of spur, sloping from NW.; desc. 16 ft. over SW. slope.
33.60	Ravine, drains SE.; asc. 191 ft. over E. slope.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S \ 27}{S \ 34}$ 1942
	Asc. 594 ft. over NE. slope.
65.40	Spur, slopes SE.; asc. 58 ft. along S. slope.
78.20	Long spur, slopes SE.; desc. 167 ft. over rocky SW. slope.
80.10	The cor. of secs. 27, 28, 33, and 34.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, oak brush, sagebrush, cacti, and cats claw.

	S. 0° 10' W., on a random line bet. secs. 33 and 34, towards flag visible at cor. of secs. 3, 4, 33, and 34, on S. bdy. of Tp.
	Precipitous slopes and cliffs prevent chaining, therefore I make a triangulation as follows:
	Set flag "A" N. 0° 10' E., 2.09 chs. dist. Proceed to point "B", on line bet. secs. 33 and 34, and measure a base N. 84° 25' W., 15.83 chs. dist. to point "C", from which flag "A" bears N. 17° 19' E. Vertical angle from cor. of secs. 27, 28, 33, and 34 to point "B" = -24°.
	Dist. by triangulation = 52.56 chs. $\frac{2.09}{50.47} \text{ chs.}$
50.47	Triangulation point "B", continue measurement by chaining.

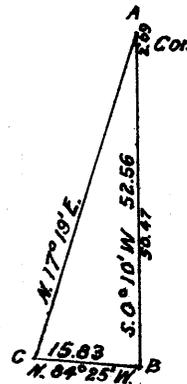

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

- 80.05 The cor. of secs. 3, 4, 33, and 34, on S. bdy. of Tp.
Thence
N. 0° 10' E., on true line bet. secs. 33 and 34.
Desc. 9 ft. over NE. slope, through scattering timber and undergrowth.
- 2.00 Sunset Canyon, dry wash, 20 lks. wide, course S. 30° E.; asc. 280 ft. over SW. slope.
- 31.00 Sidehill ravine, drains SW.; asc. 60 ft. over SW. slope.
- 37.00 Set an iron post, 3 ft. long, 1 in. diam., over a cross (+) chiseled on solid rock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.
- W C

$\frac{1}{4}$

S 33 | S 34

1942
- Asc. 42 ft. over SW. slope.
- 40.05 True point for $\frac{1}{4}$ sec. cor. is in bottom of ravine, draining S. 30° W., where it is impracticable to monument the cor.
Discontinue chaining; asc. about 1300 ft. over a steep, broken SW. slope.
- 80.05 The cor. of secs. 27, 28, 33, and 34.
Land, rough mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.
-
- From the cor. of secs. 4, 5, 8, and 9, which is an iron post, 2 ins. diam., set, mkd., and witnessed as described in the official record.
S. 0° 07' W., bet. secs. 8 and 9.
Asc. 42 ft. over gradual NW. slope, through scattering timber and undergrowth.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $\frac{1}{4}$

S 8 | S 9

1942
- raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.
- Asc. 83 ft. over gradual NW. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

79.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for witness cor. of secs. 8, 9, 16, and 17, with brass cap mkd.

T6N R10W	
S 8	S 9
S 17	S 16
W C	
1942	

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

79.80

Wash, 8 lks. wide, course N. 40° W.

80.00

True point for cor. of secs. 8, 9, 16, and 17, falls in edge of wash, where it is impracticable to monument the cor.

Land, nearly level desert.

Soil, sandy and gravelly, 2nd and 3d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, caçti, cats claw, native grass, and ocotillo.

N. 89° 59' E., on a random line bet. secs. 9 and 16.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.04

A point 12 lks. N. of cor. of secs. 9, 10, 15, and 16.

Thence.

N. 89° 56' W., on true line bet. secs. 9 and 16.

Desc. 58 ft. over NW. slope, through scattering timber and undergrowth.

22.75

Wash, 15 lks. wide, course N. 10° W.; desc. 46 ft. over NW. slope.

37.75

Wash, 10 lks. wide, course N.; asc. 14 ft. along N. slope.

40.02

Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 9
	S 16
	1942

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 19 ft. along N. slope.

45.90

Wash, 15 lks. wide, course N.; desc. slightly over NW. slope.

80.04

True point for cor. of secs. 8, 9, 16, and 17.

Land, rolling desert.

Soil, sandy and gravelly, 2nd and 3d rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, cats claw, native grass, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

S. $0^{\circ} 07' W.$, bet. secs. 16 and 17.

Asc. 62 ft. over NW. slope, through scattering timber and undergrowth.

17.60 Wash, 10 lks. wide, course N. $25^{\circ} W.$ from S. $10^{\circ} E.$; asc. 129 ft. over NW. slope.40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

\uparrow
 S 17 | S 16
 1942

Descend slightly.

40.60 Wash, 8 lks. wide, course NW.; asc. 399 ft. over N. slope.

41.80 Road, bears NW. and S. $30^{\circ} E.$ 60.42 Saddle in spur, slopes NE.; windmill and well bears S. $40^{\circ} 37' E.$; asc. 88 ft. over NE. slope.

68.50 Spur, slopes E.; desc. 112 ft. over SE. slope.

75.00 Ravine, drains N. $50^{\circ} E.$; asc. 129 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, with brass cap mkd.

T6N R10W
 S 17 | S 16
 S 20 | S 21
 1942

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

From cor. windmill and well bear N. $54^{\circ} 52' E.$ Land, N. $\frac{1}{2}$, rolling; S. $\frac{1}{2}$, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, cats claw, and ocotillo.

S. $89^{\circ} 56' E.$, on a random line bet. secs. 16 and 21.40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 A point 2 lks. S. of cor. of secs. 15, 16, 21, and 22.

Thence

N. $89^{\circ} 57' W.$, on true line bet. secs. 16 and 21.

Desc. 309 ft. over precipitous, rocky NW. slope, through scattering timber and undergrowth.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
7.00	Ravine, drains N. 30° W.; asc. slightly along precipitous N. slope.
12.20	Spur, slopes N. 15° W.; desc. 284 ft. over NW. slope.
23.20	Wash, 15 lks. wide, course N. 20° W.; desc. slightly along N. slope.
31.40	Long spur, slopes N. 30° W.; desc. 112 ft. over NW. slope.
38.75	Wash, 20 lks. wide, course N. 10° W.; asc. 24 ft. over NW. slope.
40.05	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ $\frac{S\ 16}{S\ 21}$ 1942
	raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 38 ft. over NW. slope.
42.20	Wash, 30 lks. wide, course NW.; desc. 66 ft. along rocky N. slope.
60.10	Ravine, drains N. 10° W.; desc. 35 ft. along N. slope.
67.70	Foot of steep ascent, bears NW. and SE.; asc. 130 ft. along steep N. slope.
80.10	The cor. of secs. 16, 17, 20, and 21.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, sagebrush, cats claw, cacti, and ocotillo.
	----- S. 0° 07' W., bet. secs. 20 and 21.
	Asc. 135 ft. over N. slope, through scattering timber and undergrowth.
4.00	Spur, slopes NE.; asc. slightly along precipitous E. slope.
17.35	Ravine, drains N. 50° E.; asc. 241 ft. over NE. slope.
24.90	Spur, slopes N. 60° E.; desc. 22 ft. along E. slope.
31.45	Ravine, drains N. 40° E.; asc. 289 ft. over N. slope.
39.90	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$ S 20 S 21 W C 1942
	raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

- 40.00 True point for $\frac{1}{4}$ sec. cor. falls on a granite boulder, where it is impracticable to monument the cor.
Asc. 298 ft. over precipitous N. slope.
- 46.00 Short spur, slopes N. 80° E.; asc. 87 ft. over NE. slope.
- 51.60 Long, rocky spur, slopes NW.; desc. 204 ft. along precipitous W. slope.
- 61.50 Head of ravine, drains W.; asc. 191 ft. over NW. slope.
- 67.60 Spur, slopes N. 75° W.; desc. 134 ft. along rocky W. slope.
- 71.80 Ravine, drains S. 80° W.; desc. 40 ft. along W. slope.
- 75.90 Ravine, drains N. 75° W.; asc. 163 ft. over precipitous NW. slope.
- 79.70 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, over a cross (+) chiseled on solid rock, and in a mound of stone to top, for witness cor. of secs. 20, 21, 28, and 29, with brass cap mkd.

T6N R10W	
S 20	S 21
S 29	S 28
W C	
1942	


from which

A granite boulder, 20x12 ft., 5 ft. high, bears S. 15° E., 13 lks. dist., mkd. B0 + 28.

- 80.00 True point for sec. cor. falls on a granite boulder, where it is impracticable to monument the cor.
- Land, rough mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, oak brush, mountain mahogany, mountain laurel, cacti, and cats claw.

S. $89^\circ 57'$ E., on a random line bet. secs. 21 and 28.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 41.79 Set flag "A"; line beyond this point passes over precipitous slopes and a series of broken cliffs, where it is impracticable to chain; I triangulate as follows:
- Set flag "B" ahead on line, vertical angle, A to B, = $+20^\circ$.
- From flag "A" measure a base, N. $31^\circ 05'$ W., 11.56 chs. dist., to point "C", from which flag "B" bears S. $72^\circ 45'$ E.

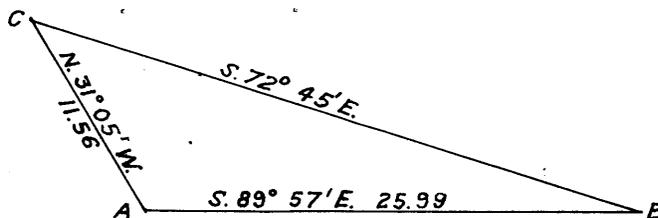

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	Distance by triangulation = 25.99 chs. Distance by chaining = <u>41.79</u> 67.78 chs.
67.78	Triangulation flag "B"; resume chaining.
79.96	A point 7 lks. S. of the cor. of secs. 21, 22, 27, and 28. Thence West, on true line bet. secs. 21 and 28. Desc. 108 ft. over SW. slope, through scattering timber and undergrowth.
7.30	Head of ravine, drains SE.; asc. 40 ft. along S. slope.
9.70	Ridge and main divide, bears S. 60° W. and N. 60° E., about 3 chs. dist., thence E.; asc. 53 ft. over NE. slope.
12.20	Spur, slopes N.; desc. about 1060 ft. over precipitous NW. slope.
31.80	(Approx.) Ravine, drains N.; asc. about 185 ft. over rocky NE. slope.
38.60	Spur, slopes N. 10° W.; desc. 45 ft. over NW. slope.
39.98	True point for $\frac{1}{4}$ sec. cor. is on a sloping rock, facing E., on W. bank of steep ravine, draining N., where it is impracticable to monument the cor.
40.18	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, over a cross (+) chiseled on bedrock, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4} \frac{S 21}{S 28} WC$ 1942 Asc. 135 ft. over NE. slope.
44.20	Spur, slopes N.; desc. 92 ft. over NW. slope.
46.70	Ravine, drains N. 10° W.; asc. 102 ft. over NE. slope.
49.40	Spur, slopes N., about 10 chs. to toe; desc. 48 ft. over NW. slope.
52.50	Ravine, drains N. 10° E.; asc. 401 ft. over precipitous NE. slope.
64.70	Long, rocky spur, slopes NW.; desc. 67 ft. over W. slope.
68.00	Saddle in spur, slopes S. 80° W.; desc. 457 ft. over precipitous NW. slope.
79.96	True point for cor. of secs. 20, 21, 28, and 29. Land, rough mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, mountain mahogany, oak brush, mountain laurel, cats claw, and cacti.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	<p>S. 0° 07' W., bet. secs. 28 and 29.</p> <p>Asc. 140 ft. over precipitous NW. slope, through scattering timber and undergrowth.</p> <p>2.90 Spur, slopes N. 80° W.; desc. 465 ft. over rocky SW. slope.</p> <p>14.60 Ravine, drains S. 80° W., about 6 chs. dist. to junction with ravine, draining westerly; desc. 100 ft. along W. slope.</p> <p>19.70 Ravine, drains W.; asc. 345 ft. over rocky NW. slope.</p> <p>33.60 Spur, slopes S. 75° W.; desc. 288 ft. over SW. slope.</p> <p>40.00 True point for $\frac{1}{4}$ sec. cor. falls in ravine, draining S. 75° W., 2 chs. dist., thence W., where it is impracticable to monument the cor.</p> <p>40.80 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> <p>W C</p> <p>↑</p> <p>S 29 S 28</p> <p>1942</p> </div> <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>This witness cor. is on top of a spur, sloping W., 1.50 chs. to toe; desc. 12 ft. along W. slope.</p> <p>42.10 Ravine, drains S. 80° W., 1.50 chs. dist., thence W.; asc. 163 ft. over NW. slope.</p> <p>48.70 Spur, slopes W.; desc. 190 ft. along W. slope.</p> <p>55.50 Ravine, drains N. 75° W.; asc. slightly over NW. slope.</p> <p>65.60 Wash, 20 lks. wide, course N. 50° W., (drains from Sunset Pass, a deep saddle in main divide); asc. 379 ft. over NE. slope.</p> <p>77.90 Spur, slopes N. 25° W.; desc. 17 ft. along W. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, and in a mound of stone to top, for cor. of secs. 28, 29, 32, and 33, with brass cap mkd.</p> <div style="text-align: center;"> <p>T6N R10W</p> <p>S 29 S 28</p> <p>S 32 S 33</p> <p>1942</p> </div> <p style="text-align: right;">from which</p> <p>A granite boulder, 10x6 ft., 6 ft. high, bears N. 32° W., 18 lks. dist., marked B0 + 29.</p> <p>Land, rough mountainous. Soil, rocky, 3d and 4th rate. Timber, none; undergrowth, oak brush, mountain laurel, cats claw, cacti, and ocotillo.</p> <p>-----</p>
--------	---

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	East, on a random line, bet. secs. 28 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	A point 5 lks. N. of cor. of secs. 27, 28, 33, and 34.
	Thence
	N. $89^{\circ} 58'$ W., on true line bet. secs. 28 and 33.
	Over mountainous land, through scattering undergrowth; desc. 78 ft. over rocky SW. slope.
2.70	Head of steep ravine, drains S. 15° W.; asc. 35 ft. along S. slope.
6.30	Spur, slopes S.; desc. 317 ft. over precipitous W. slope.
14.60	Head of ravine, drains S. 30° W.; asc. 109 ft. over SE. slope.
21.00	Spur, slopes S. 20° W.; desc. 511 ft. over precipitous W. slope.
32.20	Ravine, drains S. 10° W.; asc. 79 ft. over SW. slope.
40.03	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \begin{array}{r} S 28 \\ S 33 \\ 1942 \end{array}$
	raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Desc. 40 ft. over SW. slope.
43.70	Wash, 15 lks. wide, course S. 10° W.; asc. 132 ft. over SE. slope.
56.10	Spur, slopes S. 10° E.; asc. 48 ft. along S. slope.
63.10	Ravine, drains S. 10° E., (heads about 4 chs. N. 10° W.); ascend slightly.
64.00	Sunset Pass, a deep saddle in main divide, bears N., about 6 chs. dist.; asc. 276 ft. over SE. slope.
72.10	Ridge and main divide, bears NE. and SW.; asc. 44 ft. over NE. slope.
78.55	Spur, slopes N. 20° W.; desc. 10 ft. over W. slope.
80.06	The cor. of secs. 28, 29, 32, and 33.
	Land, mountainous.
	Soil, rocky, 3d and 4th rate.
	Timber, none; undergrowth, oak brush, mountain mahogany, mountain laurel, cats claw, cacti, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	S. 0° 10' W., on a random line bet. secs. 32 and 33.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.14	A point 7 lks. E. of the cor. of secs. 4, 5, 32, and 33, on S. bdy. of Tp.
	Thence
	N. 0° 13' E., on true line bet. secs. 32 and 33.
	Desc. 93 ft. over NE. slope, through scattering timber and undergrowth.
2.50	Head of ravine, drains NE.; desc. 38 ft. over NE. slope.
5.45	Spur, slopes N. 40° E.; desc. 202 ft. over N. slope.
8.70	Head of ravine, drains N. 30° E.; desc. 107 ft. over NE. slope.
18.60	Spur, slopes N. 30° E.; desc. 301 ft. over N. slope.
26.20	Rocky ravine, clear running water, 2 lks. wide, 1 in. deep, course NE., about 2 chs. dist., thence E.; asc. 19 ft.
27.90	Spur, slopes E., 1.50 chs. to toe; desc. 29 ft.
29.30	Ravine, drains E.; asc. 174 ft. over rocky S. slope.
34.20	Spur, slopes SE.; desc. 25 ft. along E. slope.
40.14	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S 32 S 33 1942
	raise a mound
	of stone, 3 ft. base, 2 ft. high, W. of cor.
	Ascend slightly along E. slope.
40.70	Hillside ravine, drains S. 80° E., 2 chs. dist., thence SE.; desc. 38 ft. along rocky E. slope.
56.10	Ravine, drains SE.; asc. 441 ft. over SW. slope.
66.00	Spur, slopes S. 30° E.; asc. 17 ft. over SE. slope..
71.00	Ridge and main divide, bears N. 75° E. and S. 80° W.; desc. 132 ft. along W. slope.
80.14	The cor. of secs. 28, 29, 32, and 33.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, hackberry; undergrowth, oak brush, mountain mahogany, mountain laurel, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	From the cor. of secs. 5, 6, 7, and 8, which is an iron post, 2 ins. diam., set, mkd., and witnessed as described in the official record.
	Thence
	S. 0° 06' W., bet. secs. 7 and 8.
	Asc. slightly over gradual NW. slope, through scattering timber and undergrowth.
23.10	Wash, 20 lks. wide, course N. 75° W.; asc. slightly over gradual NW. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \\ S\ 7\ \ S\ 8 \\ \\ 1942 \end{array}$
	dig pits,
	18x18x12 ins., N. and S. of post, 3 ft. dist.
	Asc. slightly over gradual NW. slope.
76.20	Wash, 15 lks. wide, course N. 60° W.; asc. slightly over NW. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 7, 8, 17, and 18, with brass cap mkd.
	$\begin{array}{c} T6N\ R10W \\ S\ 7\ \ S\ 8 \\ \hline S\ 18\ \ S\ 17 \\ 1942 \end{array}$
	Land, nearly level desert.
	Soil, sandy and gravelly, 2nd rate.
	Timber, mesquite and palo verde; undergrowth, greasewood, sagebrush, cacti.

	N. 89° 59' E., on a random line bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.94	Apportion 2 lks. N. of true point for cor. of secs. 8; 9, 16, and 17.
	Thence
	West, on true line bet. secs. 8 and 17.
	Over nearly level desert land, through scattering timber and undergrowth; desc. 62 ft. over gentle NW. slope.
39.97	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

$$\frac{1}{4} \frac{S \ 8}{S \ 17}$$

1942

raise a mound
of stone, 2 ft. base, 1½ ft. high, N. of cor.

Desc. 67 ft. over gentle NW. slope.

73.25 Wash, 10 lks. wide, course NW.; asc. slightly.

79.94 The cor. of secs. 7, 8, 17, and 18.

Land, nearly level desert.
Soil, sandy and gravelly, 2nd and 3d rate.
Timber, palo verde and ironwood; undergrowth, greasewood,
sagebrush, cats claw, cacti, and ocotillo.

S. 89° 59' W., on a random line bet. secs. 7 and 18.

40.00 Set temp. ¼ sec. cor.

77.34 A point 9 lks. S. of cor. of secs. 7, 12, 13, and 18, on
W. bdy. of Tp.; an iron post, 2 ins. diam., set, mkd.,
and witnessed as described in the official record.

Thence

S. 89° 57' E., on true line bet. secs 7 and 18.

Descend slightly along gentle N. slope, through scatter-
ing timber and undergrowth.

20.00 Wash, 8 lks. wide, course N. 10° W., (drains into earth
tank); asc. slightly.

25.00 Earth tank bears N. 24½° W., about 33.00 chs. dist.

37.34 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, for ¼ sec. cor., with brass cap mkd.

$$\frac{1}{4} \frac{S \ 7}{S \ 18}$$

1942

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. slightly along gentle N. slope.

71.50 Road, bears NW. and SE.

74.60 Wash, 15 lks. wide, course N. 30° W.; asc. slightly.

77.34 The cor. of secs. 7, 8, 17, and 18.

Land, nearly level desert.
Soil, sandy and gravelly, 2nd rate.
Timber, mesquite and palo verde; undergrowth, greasewood,
sagebrush, cacti, and cats claw.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	S. 0° 06' W., bet. secs. 17 and 18. Asc. slightly over gentle NW. slope, through scattering timber and undergrowth.
5.60	Dim road, bears NW. and SE.
22.50	Wash, 15 lks. wide, course NW. from E.; asc. slightly over gentle NW. slope.
27.05	Wash, 10 lks. wide, course N. 30° W., from S. 10° E.; asc. slightly over gentle N. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ S 18 S 17 1942
	raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
	Asc. slightly over gentle N. slope.
43.00	Enter mountainous land, bears E. and W.; asc. 212 ft. over N. slope.
50.20	Spur, slopes NE.; asc. 74 ft. along E. slope.
59.90	Slope changes; asc. slightly over NE. slope.
72.90	Sidehill ravine, drains NE.; asc. 202 ft. over N. slope.
79.40	Spur, slopes W. from SE., another short spur slopes N. 10° E.; desc. slightly.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 17, 18, 19, and 20, with brass cap mkd.
	T6N R10W S 18 S 17 S 19 S 20 1942
	Land, N. 43 chs.; nearly level desert; S. 37 chs., mountainous. Soil, sandy and rocky, 2nd, 3d, and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, and ocotillo.

	East, on a random line bet. secs. 17 and 20.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.92	A point $4\frac{1}{2}$ lks. N. of cor. of secs. 16, 17, 20, and 21. Thence

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	N. 89° 58' W., on true line bet. secs. 17 and 20. Desc. 18 ft. along N. slope, through scattering timber and undergrowth.
5.05	Sidehill ravine, drains NE.; asc. 61 ft. over NE. slope.
8.10	Spur, at saddle, slopes N.; desc. 122 ft. over NW. slope.
13.15	Ravine, drains N. 10° W.; asc. 44 ft. along N. slope.
24.40	Ravine, drains N. 10° W.; asc. 31 ft. over NE. slope.
28.10	Short spur, slopes N.; desc. 42 ft. along N. slope.
35.90	Ravine, drains N.; asc. 137 ft. over NE. slope.
39.96	Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a stone mkd. with a cross (+), deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S 17}{S 20}$ 1942
	Asc. 73 ft. over NE. slope.
43.10	Spur, slopes N.; desc. 274 ft. over NW. slope.
65.30	Ravine, drains N.; asc. 89 ft. over NE. slope.
69.20	Spur, slopes N., about 15 chs. to toe; desc. 37 ft. along broken N. slope.
76.50	Ravine, drains N.; asc. 82 ft. over E. slope.
79.10	Spur, slopes NW.; asc. 82 ft. along S. slope.
79.92	The cor. of secs. 17, 18, 19, and 20. Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.

	N. 89° 57' W., on a random line bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.12	A point 7 lks. N. of the cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp.; described in the field notes of the E. bdy. of T. 6 N., R. 11 W., surveyed under this group.
	Thence East, on true line bet. secs. 18 and 19. Over rolling land, through scattering timber and undergrowth; asc. 64 ft. over gradual W. slope.
21.80	Wash, 10 lks. wide, course NW.; asc. 81 ft. over W. slope.
24.50	Dim road, bears NW. and SE.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
30.00	Foot of steep ascent, enter mountainous land, bears NW. and SE.; asc. 95 ft. over SW. slope.
37.12	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4} \begin{array}{l} \text{S 18} \\ \hline \text{S 19} \\ 1942 \end{array}$
	of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. raise a mound
	Asc. 487 ft. over rocky SW. slope.
60.50	Short spur, slopes S. 10° W.; desc. 37 ft. over SE. slope.
67.00	Head of ravine, drains S. 20° W.; asc. 198 ft. over SW. slope.
75.20	Spur, slopes N. 35° W. from N. 70° E.; Maricopa and Yuma County, bdy. monument No. 46 bears N. $34^{\circ} 08'$ W., 2.59 chs. dist., an iron post, 3 ins. diam., 6 ins. above a mound of stone, with brass cap mkd. XLVI YUMA COUNTY 1918 MARICOPA COUNTY.
	Desc. 44 ft. along S. slope.
77.12	The cor. of secs. 17, 18, 19, and 20. Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.
	----- S. $0^{\circ} 06'$ W., bet. secs. 19 and 20.
	Desc. slightly over S. slope, through scattering timber and undergrowth.
2.00	Head of ravine, drains W.; asc. 80 ft. over NW. slope.
7.20	Spur, slopes N. 80° W. from SE.; desc. 460 ft. over SW. slope.
26.90	Ravine, drains W.; desc. 40 ft. along W. slope.
37.40	Ravine, drains N. 80° W.; along W. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\begin{array}{c} \frac{1}{4} \\ \text{S 19} \mid \text{S 20} \\ 1942 \end{array}$
	Desc. 48 ft. along W. slope.
54.70	Wash, 30 lks. wide, course NW.; asc. 296 ft. over NE. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 20, 29, and 30, with brass cap mkd.

T6N R10W	
S 19	S 20
S 30	S 29
1942	

raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.

S, 89° 58' E., on a random line bet. secs. 20 and 29.

40.00 Set temp. ¼ sec. cor..

80.08 A point 5 lks. N. of the true point for the cor. of secs. 20, 21, 28, and 29.

Thence

N. 89° 56' W., on true line bet. secs. 20 and 29.

Over mountainous land, through scattering timber and undergrowth; desc. 768 ft. over rocky, broken NW. slope.

30.10 Spur, slopes NW.; desc. 256 ft. over SW. slope.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

¼	S 20
	S 29
	1942

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 222 ft. over SW. slope.

49.10 SW. cor. of old stone corral.

54.70 Wash, 15 lks. wide, course NW.; asc. 89 ft. over NE. slope.

80.08 The cor. of secs. 19, 20, 29, and 30.

Land, mountainous.
Soil, rocky, 3d and 4th rate.
Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	West, on a random line bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.29	A point 14 lks. N. of cor. of secs. 19, 24, 25, and 30, on W. bdy. of Tp.; described in the field notes of the E. bdy. of T. 6 N., R. 11 W., surveyed under this group.
	Thence
	N. $89^{\circ} 54'$ E., on true line bet. secs. 19 and 30.
	Along broken N. slope, through scattering timber and undergrowth.
0.20	Ravine, drains N. 40° W.; asc. 207 ft. over NW. slope.
9.60	Spur, slopes NW.; asc. 39 ft. along N. slope.
11.50	Spur, slopes N. 10° E., desc. 172 ft. over NE. slope.
20.90	Ravine, drains N. 10° W.; asc. 44 ft. along N. slope.
26.90	Low spur, slopes N.; desc. slightly along N. slope.
30.30	Ravine, drains N. 10° W.; asc. 166 ft. over NW. slope.
36.20	Spur, slopes N. 20° W.; desc. slightly over NE. slope.
36.70	Mouth of Alta Mine tunnel "A" bears N. $51\frac{1}{2}^{\circ}$ E., mouth of Alta Mine tunnel "B" bears N. $34\frac{1}{4}^{\circ}$ E., metal water tank "C" bears N. $31\frac{1}{2}^{\circ}$ E., south end of sheet metal cabin "D" bears N. $27\frac{1}{2}^{\circ}$ E., and south end of frame shed "E" bears N. $27\frac{1}{2}^{\circ}$ E.
37.29	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4} \frac{S 19}{S 30}$ 1942
	Desc. 115 ft. over E. slope.
42.60	Ravine, drains N.; asc. 214 ft. along broken N. slope.
44.40	Mine tunnel "A" bears N. 36° E., mine tunnel "B" bears N. $19\frac{3}{4}^{\circ}$ E., metal water tank "C" bears N. $16\frac{1}{2}^{\circ}$ E., south end of cabin "D" bears N. $13\frac{1}{4}^{\circ}$ E., south end of frame shed "E" bears N. $12\frac{1}{4}^{\circ}$ E.
58.60	Spur, slopes N.; desc. 319 ft. over NE. slope.
73.60	Sidehill ravine, drains N. 20° W.; asc. slightly over NE. slope.
77.29	The cor. of secs. 19, 20, 29, and 30.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde and ironwood; undergrowth, greasewood, sagebrush, cacti, cats claw, and ocotillo.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
	S. 0° 06' W., bet. secs. 29 and 30.
	Asc. 76 ft. over NE. slope, through scattering timber and undergrowth.
7.10	Sidehill ravine, drains E. from S. 10° W.; asc. 254 ft. over N. slope.
22.60	Same ravine, drains N. 10° W.; asc. 582 ft. over NE. slope.
36.10	Steep spur, slopes NE.; asc. 95 ft. along precipitous E. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{c} \frac{1}{4} \\ \\ \text{S } 30 \mid \text{S } 29 \\ \\ 1942 \end{array}$
	Asc. 150 ft. along precipitous E. slope.
45.20	Steep spur, slopes N. 70° E.; desc. 229 ft. over SE. slope.
56.80	Canyon, course NE.; asc. 442 ft. over broken, rocky N. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for cor. of secs. 29, 30, 31, and 32, with brass cap mkd.
	$\begin{array}{c} \text{T6N R10W} \\ \text{S } 30 \mid \text{S } 29 \\ \hline \text{S } 31 \mid \text{S } 32 \\ 1942 \end{array}$
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, oakbrush, sagebrush, cacti, and cats claw.

	S. 89° 56' E., on a random line bet. secs. 29 and 32.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.06	A point 5 lks. S. of cor. of secs. 28, 29, 32, and 33.
	Thence
	N. 89° 58' W., on true line bet. secs. 29 and 32.
	Desc. 151 ft. over W. slope, through scattering timber and undergrowth.
3.30	Ravine, drains N. 15° W.; asc. 39 ft. over NE. slope.
6.80	Spur, slopes N.; desc. 143 ft. over NW. slope.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains	
12.10	Ravine, drains N.; asc. 102 ft. over NE. slope.
17.00	Spur, slopes N. 10° E.; asc. 14 ft. along broken N. slope.
21.80	Ravine; drains N. 40° E.; asc. 220 ft. over precipitous E. slope.
26.70	Saddle in spur, slopes N. 30° E.; asc. 110 ft. along broken N. slope.
40.03	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone marked with a cross (+) deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\frac{1}{4}$ $\frac{S\ 29}{S\ 32}$ 1942
	This cor. is on a spur, which slopes N. 20° E.
	Desc. 68 ft. along precipitous N. slope.
43.50	Ravine, drains N. 10° E.; asc. 347 ft. over E. slope.
53.25	Spur, slopes N. 10° E.; desc. 161 ft. over W. slope.
61.85	Ravine, drains N. 10° W.; desc. 133 ft. along N. slope.
80.06	The cor. of secs. 29, 30, 31, and 32.
	Land, mountainous. Soil, rocky, 3d and 4th rate. Timber, palo verde; undergrowth, greasewood, sagebrush, cacti, and cats claw.

	S. 89° 54' W., on a random line bet. secs. 30 and 31.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.08	A point 5 lks. N. of cor. of secs. 25, 30, 31, and 36, on W. bdy. of Tp.; described in the field notes of the E. bdy. of T. 6 N., R. 11 W., surveyed under this group.
	Thence
	N. 89° 52' E., on true line bet. secs. 30 and 31.
	Asc. 209 ft. over W. slope, through scattering timber and undergrowth.
8.90	Spur, slopes NW.; asc. 49 ft. along N. slope.
15.10	Head of ravine, drains N. 20° W.; asc. 51 ft. over NW. slope.
17.20	Spur, slopes N.; desc. 261 ft. over SE. slope.
27.60	Ravine, drains N. 30° E.; asc. 22 ft. over NW. slope.
30.90	Long spur, slopes NE.; desc. 196 ft. over E. slope.
37.08	True point for $\frac{1}{4}$ sec. cor. falls on a precipitous slope, where it is impracticable to monument the cor.

Subdivisional Lines of T. 6 N., R. 10 W.

Chains

38.78 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a stone mkd. with a cross (+) deposited at base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\frac{1}{4} \begin{array}{r} \text{S } 30 \\ \text{S } 31 \\ 1942 \end{array}$$

Descend slightly.

39.10 Ravine, drains NE.; desc. 89 ft. along N. slope.

48.20 Spur, slopes NE.; desc. 315 ft. over SE. slope.

59.00 Ravine, drains N. 30° E.; asc. 122 ft. over NW. slope.

69.70 Spur, slopes N.; desc. 152 ft. over NE. slope.

77.08 The cor. of secs. 29, 30, 31, and 32.

Land, mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde; undergrowth, oak brush, sagebrush, cacti, and cats claw.

S. 0° 13' W., on a random line bet. secs. 31 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.30 A point 12 lks. E. of cor. of secs. 5, 6, 31, and 32, on S. bdy. of Tp.

Thence

N. 0° 18' E., on true line bet. secs. 31 and 32.

Asc. 51 ft. along E. slope, through scattering timber and undergrowth.

8.00 Spur, slopes E.; desc. 127 ft. over N. slope.

17.70 Ravine, drains S. 80° E.; asc. 513 ft. over broken S. slope.

40.30 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 31 \mid \text{S } 32 \\ 1942 \end{array}$$

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Asc. 43 ft. over S. slope.

41.24 Maricopa and Yuma County bdy. monument No. 45 bears N. 72° 23' W., 3.03 chs. dist.; an iron post, 3 ins. diam., 12 ins. above a mound of stone, with brass cap mkd. XLV YUMA COUNTY 1918 MARICOPA COUNTY.

45.40 Ridge and main divide, bears N. 85° E. and S. 85° W.; desc. 107 ft. over NW. slope.

Subdivisional Lines of T. 6 N., R. 11 W.

Chains

50.70 Spur, slopes N. 20° W.; desc. 953 ft. over broken, rocky N. slope.

80.30 The cor. of secs. 29, 30, 31, and 32.

Land, rough mountainous.

Soil, rocky, 3d and 4th rate.

Timber, palo verde; undergrowth, oak brush, mountain mahogany, mountain laurel, cacti, and cats claw.

Final Test of Solar Attachments.

March 13, 1942, in camp in the NW. $\frac{1}{4}$ of sec. 26, T. 6 N., R. 11 W., at hourly intervals from 7:30 to 10:30 a.m. and 1:30 to 5 p.m., we make the proper settings on the arcs of the solar attachments and ascertain that the resulting orientation of each instrument, when compared with the meridian established by Polaris observation, has a maximum error of less than 1' 30".

The portion of this township, subdivided as described in the foregoing field notes, is situated on the southeasterly side of Mc Mullen Valley, and on the northwestern and southeastern slopes of the Harquahala Mountains. The surface varies from nearly level in the valley to heavily rolling, broken and mountainous in the southern part of the township, and ranges in elevation from 2300 to 5600 ft. above sea level.

The soil is generally gravelly clay and sandy texture, 2nd rate in the northern portion to rocky land, 3d and 4th rate, in the mountains.

There is a scattering growth of palo verde, ironwood and mesquite timber, which has no commercial value, except for fuel. The undergrowth consists of a scattering growth of greasewood, sagebrush, cats claw, and oak brush, and numerous varieties of cacti, throughout the area surveyed at this time. There is a fair growth of native grass, which is suitable for winter grazing.

The main divide of the Harquahala Mountains extends thru the township in a northeasterly-southwesterly direction, from the SW. cor. to about the middle of the E. bdy. of sec. 13. N. and S. from this divide the drainage system consists of dry washes, except Brown's Canyon, S. of the divide, which has a small stream of running water in secs. 22, 23, and 24. All of the water courses of this part of the township drain, directly or indirectly, into Centennial Wash. No permanent springs were found.

U. S. Highway Nos. 60 and 70 crosses secs. 4, 5, and 6, in a northeasterly-southwesterly direction, nearly parallel to, and about $\frac{1}{2}$ mile south of the Santa Fe R.R. There are no other improved roads in the township, but several desert roads extend southerly from the highway into the mountains in the central portion of the township, on the north side of the divide.

T. 6 N., R. 10 W.

There are no settlers in this portion of the township at this time. The only improvements are: a miners cabin in the SE. $\frac{1}{4}$ of sec. 11; a windmill and well in the SW. $\frac{1}{4}$ of sec. 16; and a miners cabin at the Alta Mine, in the SE. $\frac{1}{4}$ of sec. 19, ties to which are herein recorded.

The boundary line between Maricopa and Yuma Counties, bearing N. and S. on the $113^{\circ} 20'$ meridian of longitude, and which has been surveyed and monumented, crosses the W. range of sections near their east boundaries. Monuments Nos. 45 and 46 thereon are located in secs. 31 and 18, and are connected to the lines of the survey of this township as herein described. Two U. S. Coast and Geodetic Survey Triangulation Stations were located: The "Pioneer" in the western part of sec. 1, and the "Harquahala" on top of Harquahala Mountain near the southwest corner of the township.

No evidence of valuable mineral deposits was observed in the township during the progress of the survey.

The nearest postoffice is Aguila, Arizona, about 5 miles to the northeast.

The average of a considerable number of readings over all parts of the township gives a value of $15^{\circ} 18' E.$ for the mean magnetic declination.

62

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

63
BOOK 4315

FIELD ASSISTANTS

NAMES	CAPACITY
Lynn Ferrell	Principal Assistant.
Robert M. Warren	" "
C. Richard Blount	Chainman
Mike Knezevich	"
John Boggs	"
Ralph L. Lee	"
Glen L. Snyder	"
Ralph L. Lee	Flagman
Garland H. Garrett	"
Gladwin Gregory	Axeman

CERTIFICATE OF SURVEYOR

We, Raymond F. Moss, Assistant Cadastral Engineer, G. Marvin Litz, Jr. Cadastral Engineer and Bert E. Wakeman, Sr. Engineering Aide, General Land Office, HEREBY CERTIFY upon honor that, in

pursuance of special instructions bearing date of the 29th day of October 1941, received from the district cadastral engineer for Arizona, with assignment instructions dated December 22, 1941, we have resurveyed the East boundary and surveyed the South boundary and part, (completion) subdivisional lines of Township 6 North, Range 10 West,

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by ~~me~~^{us} and under ~~my~~^{our} direction; and that said resurvey and survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Phoenix, Arizona, January 31, 1942
 Glendale, California, Sept. 21, 1942.
 Phoenix, Arizona, August 29, 1942

Raymond F. Moss
 Assistant Cadastral Engineer.
G. Marvin Litz, Jr.
 Cadastral Engineer.
Bert E. Wakeman
 Sr. Engineering Aide.
 General Land Office.

CERTIFICATE OF APPROVAL

OFFICE OF SUPERVISOR OF SURVEYS,

Denver, Colorado, April 16, 1945.

The foregoing field notes of the ^{re} survey of the East boundary and survey of the South boundary and part (completion) subdivisional lines of Township 6 North, Range 10 West, of the Gila and Salt River Meridian, in the State of Arizona, executed by Raymond F. Moss, Assistant Cadastral Engineer, G. Marvin Litz, Jr. Cadastral Engineer and Bert E. Wakeman, Sr. Engineering Aide, General Land Office, under special instructions dated October 29, 1941, for Grp. No. 234, Ariz., and assignment instructions dated December 22, 1941 and January 16, 1942, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the resurvey and survey therein described, are hereby approved.

[Signature]
 Supervisor of Surveys.

~~CERTIFICATE OF TRANSCRIPT~~

~~I certify that the foregoing transcript of the field notes of the above described surveys in _____, is a true copy of the original field notes on file in the public survey office.~~

~~Supervisor of Surveys.~~