

indexed ✓  
(D)

BOOK 4438

4438

ORIGINAL  
UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF RECLAMATION

FIELD NOTES

Of the Supplemental Survey of the

W1/2 of Section 6; E1/2 of Section 7; W1/2 of Section 17; NE1/4 of Section 20;  
and all of Section 21

Township 8 South, Range 20 West  
Of the G. & S. R. Meridian, In the State of Arizona

EXECUTED BY

Albin H. Wadin, General Engineer  
United States Bureau of Reclamation

Under authority of Departmental Instructions of October 24, 1906.

Survey Commenced February 2 19 54

Survey Completed May 20 19 54

4438

# INDEX DIAGRAM

Township 8 South, Range 20 West



## FIELD ASSISTANTS


NAMES	CAPACITY
E. A. Haley	
W. Barcus	Chief of Party
A. Lorona	Instrumentman
T. Sanchez	Chainman
T. Romero	Chainman
A. Norton	Arman

TOWNSHIP 8 SOUTH, RANGE 20 WEST  
GILA & SALT RIVER MERIDIAN  
ARIZONA

18

PAGE INDEX DIAGRAM

BOOK 4438

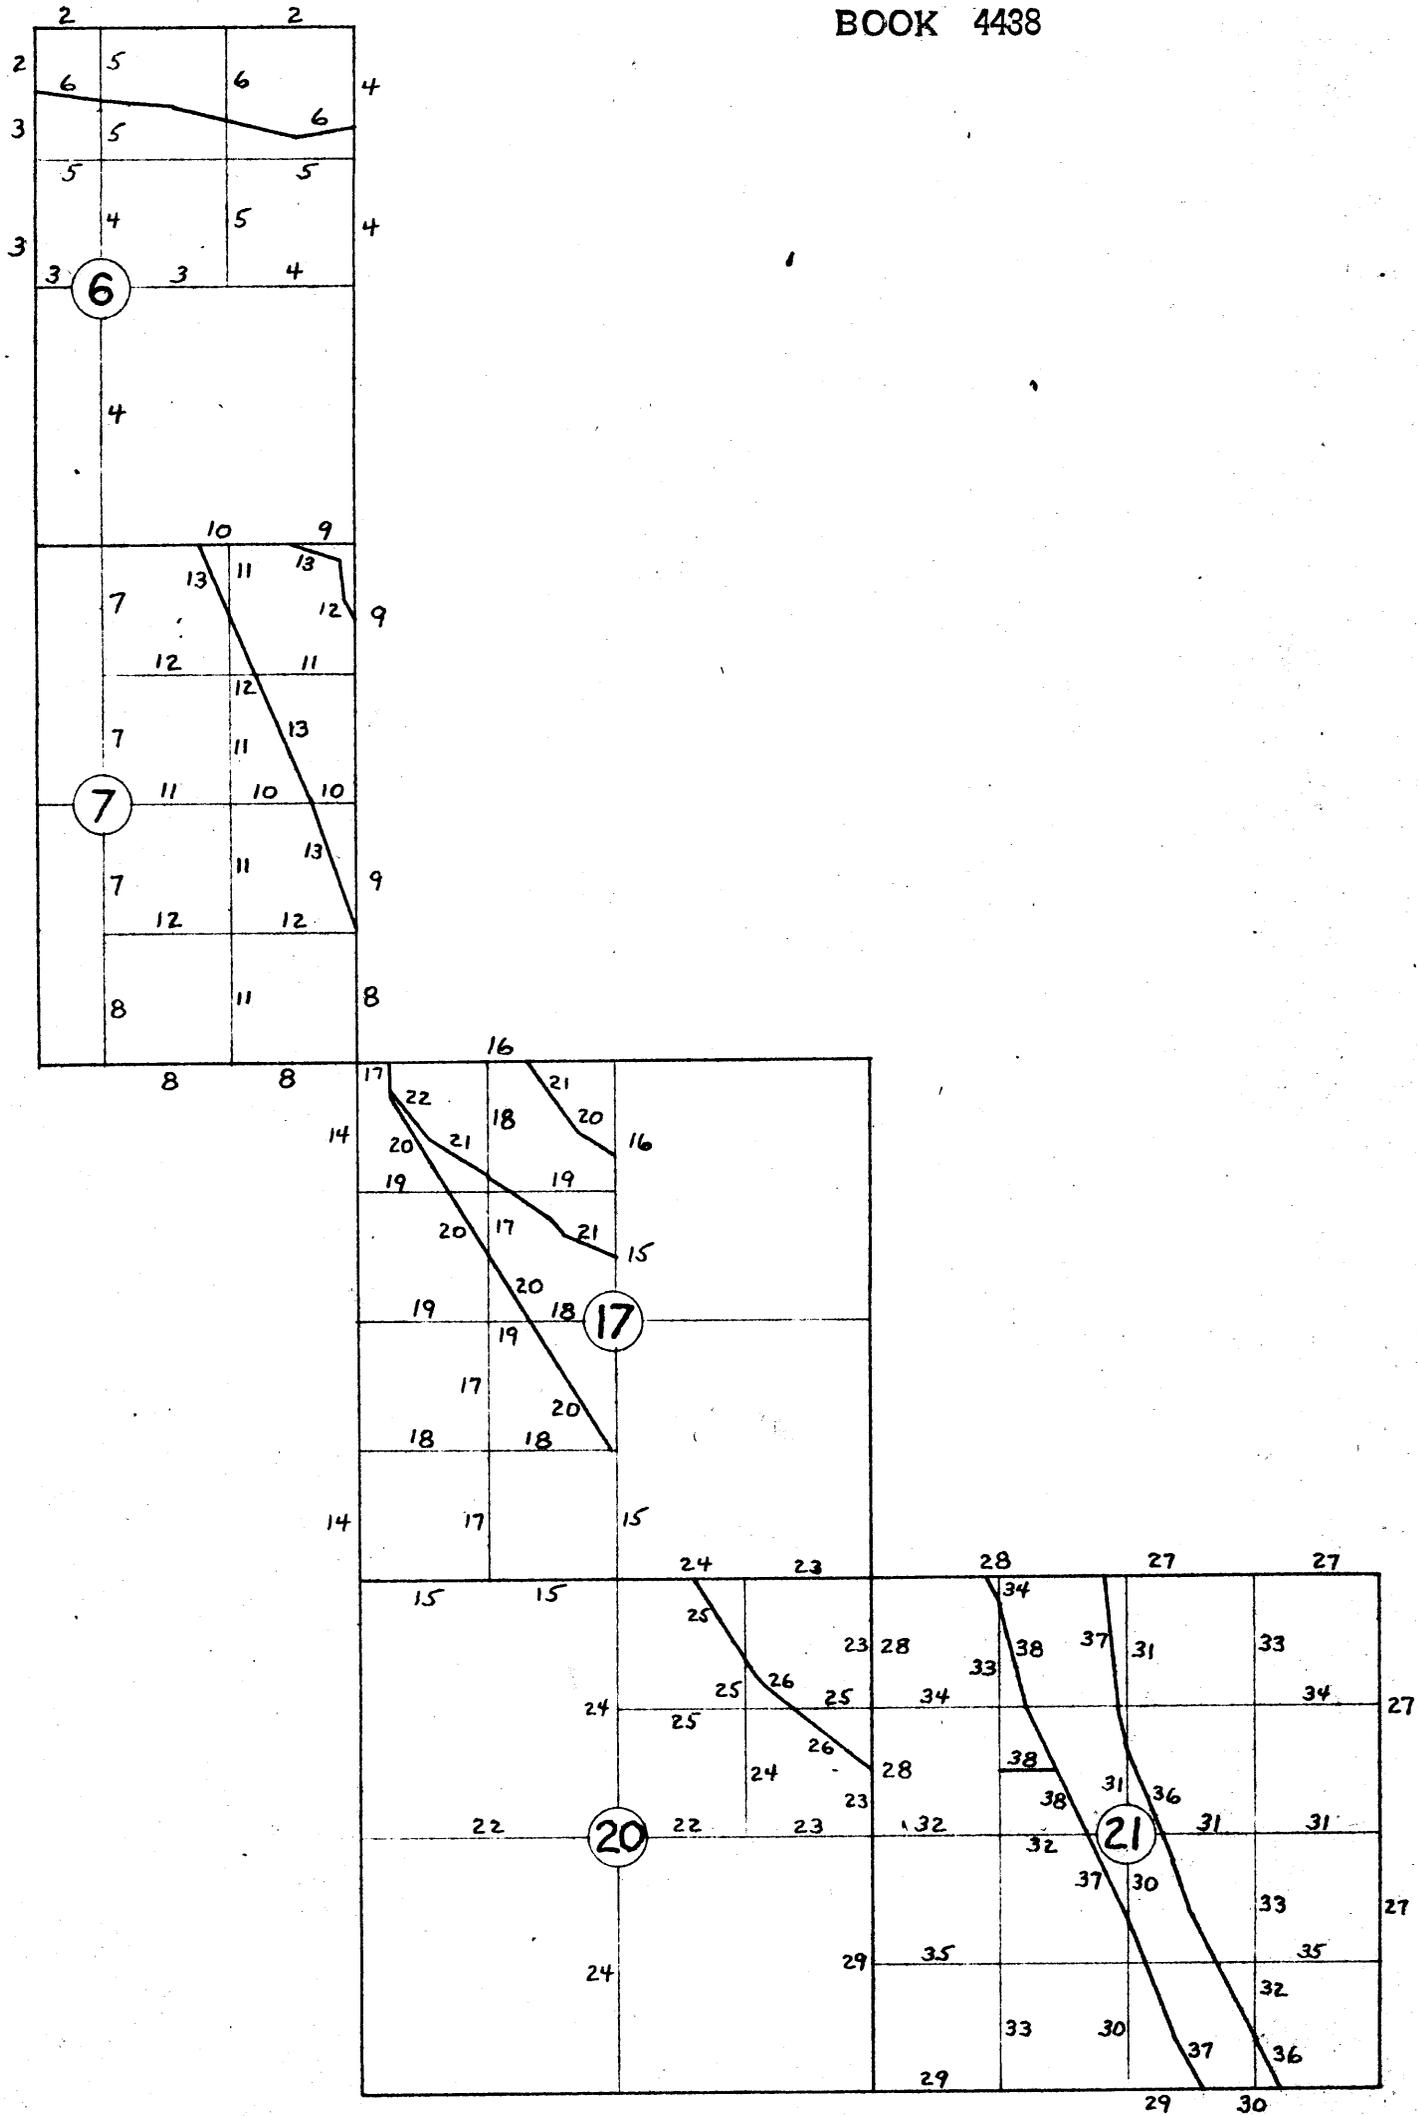

SUPPLEMENTAL SURVEY  
OF PORTIONS OF  
SECTIONS 6, 7, 17, 20 and 21  
TOWNSHIP 8 SOUTH, RANGE 20 West  
GILA AND SALT RIVER MERIDIAN, ARIZONA

BOOK 4438

10

The history of surveys executed in Township 8 South, Range 20 West, Gila and Salt River Meridian, Arizona, is as follows:  
N. and S. bdys. by W. B. Kimmel, Dec. 23, 1915 - Jan. 28, 1916  
Subdivisions by W. B. Kimmel, Dec. 23, 1915 - Jan. 28, 1916  
E. Bdy. Resur. of Sec. 36, by W. B. Kimmel, Dec. 22, 1915  
W. Bdy. Resur. of Sec. 6, by W. B. Kimmel, Dec. 20, 1915  
W. Bdy. of Secs. 7, 18, 19, 30 and 31, by W. B. Kimmel,  
Dec. 28 - 31, 1915.  
E. Bdy., by Sidney E. Blout, 1912.  
The Plat was approved on March 20, 1918.

The Supplemental Surveys contained herein represent subdivisions of these sections into legal subdivisions and fractional lots which will accommodate farm units. The  $N\frac{1}{2}$  of Section 6 is subdivided into Lots 7, 8, 9, 10, 11 and 12; the  $E\frac{1}{2}$  of Section 7 into Lots 5, 6, 7, 8, 9, 10, 11, 12 and 13; the  $W\frac{1}{2}$  of Section 17 into Lots 1 to 13 inclusive; the  $NE\frac{1}{4}$  of Section 20 into Lots 1, 2, 3, 4, 5 and 6; and Section 21 into Lots 1 to 20 inclusive. Lot 6, Sec. 21, has been further subdivided into Lots 21 and 22. The purpose of these surveys is to subdivide the above sections into the legal subdivisions and fractional lots which will accommodate farm units to be established in connection with the development of the Wellton-Mohawk Division of the Gila Project, Arizona, a Federal Reclamation Project. Some of the private lands in this area have been farmed for many years, being irrigated from underground water sources. Private surveyors have relocated and replaced the original survey monuments with 4 in. by 4 in. redwood posts or other suitable markers properly inscribed with the appropriate corner markings. The Bureau of Reclamation in its pre-construction surveys for the canals and laterals of the distribution systems has replaced the wooden posts with iron posts and brass caps of accepted standards to further perpetuate the corner locations and monuments. The brass caps mounted on iron posts of 1 in. or 2 in. diameter bear the legend "Bureau of Reclamation Penalty \$250 For Removal", and are properly stamped with the appropriate corner markings.

The surveys were executed with a Keuffel & Esser transit, serial number 63130, equipped with double verniers reading to 30 seconds of arc. The instrument was examined and tested and found to be in good condition and adjustment.

Bearings established and used by the Bureau of Reclamation in this area are based on the U. S. C. & G. S. Western Arizona Grid System, whose central meridian is  $113^{\circ} 45'$  west longitude. The bearings in this survey have been corrected to the true meridian and are shown as true bearings and true lines.

Survey of Lots 7, 8, 9, 10, 11 and 12 in Section 6, T.8S., R. 20 W., G. & S. R. M., Arizona

The  $N\frac{1}{2}$  of Section 6 is herein subdivided into legal subdivisions and fractional lots numbered from 7 to 12 inclusive. The original Lot 1 is subdivided into Lots 7 and 8. Original Lot 2 is subdivided into Lots 9 and 10. Original Lot 3 is subdivided into Lots 11 and 12. The right bank of the Gila River, as determined by the Bureau of Reclamation, is the boundary between adjacent lots and marks the limit of the irrigable lands adjacent to the river on the north side. Original Lots 4, 5 and 6 are undistributed.

From the cor. of Secs. 5 and 6, T8S R20W, and Secs. 31 and 32, T7S R20W, which is monumented with an iron post 2 in. diam., set 12 in. below the surface of a gravelled county road, with a General Land Office brass cap mkd.

Survey of Lots 7, 8, 9, 10, 11 and 12 in Section 6, T.8S., R.20W., G. & S. R. M., Ariz.

G.L.O.  

T7S	R20W
31	32
6	5

  
T8S  
1916

CHAINS

Cor is also angle point 1 of Lot 7.

S. 89° 48' 40" W.; bet. Sec. 31 in T7S and Sec. 6 in T8S R20W and on the N. bdy. of Lot 7 near center of county road.

19.93

To point for the E 1/16 cor. of Secs. 6 and 31, and angle point 2 of Lot 7 and 1 of Lot 9. At proportionate distance

Set iron post 3 ft. long, 1 in. diam., 6 in. below surface of road, near center, with brass cap mkd.

E 1/16  
S31  
S6  
1954

Leave Lot 7 continuing on N. bdy. of Lot 9 along centerline of road.

39.86

The 1/4 cor. of Secs. 6 and 31 and angle points 2 of Lot 9 and 1 of Lot 11. Monument is an iron post 1 in. diam., set 6 in. below road surface with brass cap mkd.

1/4  
S31  
S6  
1949

Continue measurement on N. bdy. of Lot 11.

50.15

To the closing corner of Secs. 6 and 31 which falls near west edge of a county road running N. and S., also angle point 2 of Lot 11. Monument is an iron post 2 in. diam., set 3 in. below surface of road with brass cap mkd.

S1	T7S
	R20W
	<u>S31</u>
R21W	S6
	T8S

  
1939

Thence, S. 0° 05' E., on range line bet. Sec. 6 in T8S R20W and Sec. 1 in T8S R21W and on the W. bdy. of Lot 11, and along west edge of a graded county road.

Begin new measurement.

2.00

The 1/4 cor. of Sec. 1, T8S R21W. An iron post 1 in. diam., set 6 in. below surface of road with brass cap mkd.

1/4  
S1  
1952

Continue measurement.

10.07

To right bank of the Gila River which bears west. Also angle points 3 of Lot 11 and 2 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 6 in. below surface of road with brass cap mkd.


Survey of Lots 7,8,9,10,11 and 12, Sec. 6, T.8S., R.20W., G. & S. R. M., Arizona

<p>CHAINS</p>	<div style="text-align: center;"> <p>T8S</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">R21W</td> <td style="padding: 0 5px;">R20W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">AP 3</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S1</td> <td style="padding: 0 5px;">L 11</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">AP 2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">L 12</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S6</td> </tr> </table> <p>1954</p> <p>Leave Lot 11 continue on W. bdy. of Lot 12 crossing river bed.</p> <p>20.37 The N 1/16 cor. of Sec. 6 and angle point 3 of Lot 12. An iron post 1 in. diam., set 6 in. below surface of road at west edge, with brass cap mkd.</p> <div style="text-align: center;"> <p>N 1/16</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S6</td> </tr> </table> <p>1952</p> </div> <p>Leave Lot 12 continuing measurement.</p> <p>Road veers slightly to east.</p> <p>22.05 The S 1/16 cor. of Sec. 1, T8S R21W near center of road. Monument is an iron post 1 in. diam., set 6 in. below surface of road, with brass cap mkd.</p> <div style="text-align: center;"> <p>S 1/16</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S1</td> </tr> </table> <p>1952</p> </div> <p>Continue measurement.</p> <p>24.92 Left bank of river.</p> <p>38.85 Road bears to SW.</p> <p>40.37 The 1/4 cor. of Sec. 6 monumented by an iron post 1 in. diam., set 10 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>1/4</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S6</td> </tr> </table> <p>1939</p> </div> <p>Thence, N. 89° 56' 57" E., on the E. and W. centerline of Sec. 6, along farm road through cultivated field.</p> <p>Begin new measurement.</p> <p>10.17 Point for the C 1/4 cor. of Sec. 6. At the intersection with the N. and S. centerline of Sec. 6.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground at edge of road and field, with brass cap mkd.</p> <div style="text-align: center;"> <p>C 1/4</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S6</td> </tr> </table> <p>1954</p> </div> <p>Continue measurement.</p> <p>20.17 End of cultivated field.</p> <p>30.13 The CE 1/16 cor. of Sec. 6. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>E 1/16</p> <table style="margin: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S6</td> <td style="padding: 0 5px;">c</td> </tr> </table> <p>1953</p> </div> </div>	R21W	R20W		AP 3	S1	L 11		AP 2		L 12		S6	S6	S1	S6	S6	S6	c
R21W	R20W																		
	AP 3																		
S1	L 11																		
	AP 2																		
	L 12																		
	S6																		
S6																			
S1																			
S6																			
S6																			
S6	c																		

Survey of Lots 7, 8, 9, 10, 11 and 12, Sec. 6, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS  
50.09

The  $\frac{1}{4}$  cor. of Secs. 5 and 6 monumented with an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Thence, N.  $0^{\circ} 00' 17''$  E.; bet. Secs. 5 and 6.


Begin new measurement.

12.73

The left bank of the Gila River, which is very indistinct, bearing NW.

20.05

The N  $1/16$  cor. of Secs. 5 and 6 and angle point 5 of Lot 8, falling in river bed. Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Continue on E. bdy. of Lot 8

25.14

To the right bank of the river which bears W. Also angle points 5 of Lot 7 and 1 of Lot 8.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.




Leave Lot 8 continue on E. bdy. of Lot 7.

40.50

The cor. of Secs. 5 and 6, T8S R20W, and Secs. 31 and 32, T7S R20W, previously described.

From the  $\frac{1}{4}$  cor. of Secs. 6 and 7, an iron post 1 in. diam., set 10 in. out of ground, with brass cap mkd.



N.  $0^{\circ} 05' 36''$  E., on the N. and S. centerline of Sec. 6.

15.89

The centerline of the Wellton-Mohawk Canal. A large unlined canal carrying 1300 cubic feet per second of irrigation water to the Wellton-Mohawk Division of the Gila Project.

Cross cultivated field.

40.02

The C  $\frac{1}{4}$  cor. of Sec. 6 previously set and described.

58.51

To the left bank of the river bearing W.

60.03

The CN  $1/16$  cor. of Sec. 6, in river bed. Also angle points 4 of Lot 10 and 4 of Lot 12. An iron post 1 in. diam., set 10 in. out of ground with brass cap mkd.

Survey of Lots 7, 8, 9, 10, 11, and 12, Sec. 6, T.8S., R.20W., G. & S. R. M., Arizona

## CHAINS

$$\begin{array}{c} \text{c} \\ \text{N } 1/16 \text{ } | \text{ S6} \\ \text{c} \\ 1953 \end{array}$$

Continue bet. Lots 10 and 12.

69.05

Point on right bank of river. Angle points 3 of Lot 9, 3 of Lot 10, 4 of Lot 11 and 1 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

T8S	R20W
AP 4	AP 3
L 11	L 9
AP 1	AP 3
L 12	L 10
S6	
1954	

Leave Lots 10 and 12 continue bet. Lots 9 and 11.

80.42

The  $\frac{1}{4}$  cor. of Sec. 6, T8S R20W and Sec. 31, T7S R20W, previously described.

From the N  $1/16$  cor. of Secs 5 and 6.

N.  $89^{\circ} 53' 33''$  W., on the E. and W. centerline of the NE  $\frac{1}{4}$  of Sec. 6 and on the S. bdy. of Lot 8.

19.95

To point for the NE  $1/16$  cor. of Sec. 6 and angle points 4 of Lot 8 and 5 of Lot 10. At intersection with the N. and S. centerline of the NE  $\frac{1}{4}$  of Sec. 6.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

$$\begin{array}{c} \text{NE} \\ 1/16 \\ \text{S6} \\ 1954 \end{array}$$

Leave Lot 8 continue on S. bdy. of Lot 10.

39.90

The CN  $1/16$  cor. of Sec. 6 previously described.

Leave Lot 10 continue on S. bdy. of Lot 12.

50.13

The N  $1/16$  cor. of Sec. 6, previously described.

From the CE  $1/16$  cor. of Sec. 6.

N.  $0^{\circ} 02' 57''$  E., on the N. and S. centerline of the NE  $\frac{1}{4}$  of Sec. 6.

17.74

To the left bank of the Gila River bearing W., bank very indistinct.

20.01

The NE  $1/16$  cor. of Sec. 6 previously set and described.

Continue bet. Lots 8 and 10.


26.14

Right bank of river and angle points 3 of Lot 7, 3 of Lot 8, 5 of Lot 9 and 1 of Lot 10.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

Survey of Lots 7, 8, 9, 10, 11 and 12, Sec. 6, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS



Leave Lots 8 and 10 continue bet. Lots 7 and 9

40.43

The E 1/16 cor. of Sec. 6, T8S R20W and Sec. 31, T7S R20W previously set and described.

-----

Following is a traverse of the right bank of the Gila River as determined by the Bureau of Reclamation and designated as the boundary between adjacent Lots.

CHAINS


From the monument set on the right bank of the river on the line between Sec. 5 and 6

S. 80° 12' 30" W., bet. Lots 7 and 8

9.42

To angle point 4 of Lot 7 and angle point 2 of Lot 8.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

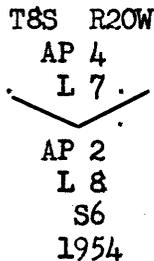

Thence, N. 76° 16' 30" W., beginning new measurement.

10.97

To intersection with the N. and S. centerline of the NE $\frac{1}{4}$  of Sec. 6 and the monument previously set and described.


Thence, N. 76° 19' 30" W., beginning new measurement.

Leave Lots 7 and 8 continue between Lots 9 and 10.

8.74

To angle point 4 of Lot 9 and 2 of Lot 10.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

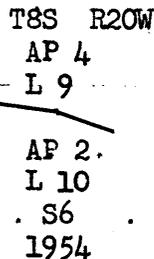

Thence, N. 86° 02' W., beginning new measurement.

11.47

To intersect the N. and S. centerline of Sec. 6 at monument at the monument previously set and described.

Thence, N. 82° 59' W., bet. Lots 11 and 12. Begin new measurement.

10.34

To the line bet. Sec. 6, T8S R20W and Sec. 1, T8S R21W. Monument previously set and described.

End of traverse of right bank of Gila River.

Survey of Lots 7, 8, 9, 10, 11 and 12, Section 6, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

Note: The areas of the Lots  
 Lot 7 31.62 acres      Lot 10 15.95 acres  
 Lot 8 9.12 acres      Lot 11 11.02 acres  
 Lot 9 24.74 acres      Lot 12 9.90 acres

Survey of Lots 5 to 13 inclusive, Section 7, T.8S., R.20W.,  
 G. & S. R. M., Arizona

The E $\frac{1}{2}$  of Section 7, Township 8 South, Range 20 West, Gila and Salt River Meridian, Arizona, is herein subdivided into legal subdivisions and fractional lots numbered from 5 to 13 inclusive to accommodate part of a farm unit to be established by the Bureau of Reclamation. The left bank of the Gila River, as determined by the Bureau of Reclamation, is the boundary between Lots 5 and 6. The east Right-of-Way line of the Wellton-Mohawk Canal is designated as the boundary between Lots 6 and 7, 8 and 9, 10 and 11, 12, and 13. The West boundary of Section 7 was not retraced, being in very rough mountainous terrain. The C  $\frac{1}{4}$  cor. of Sec. 7 was not found but was replaced at proportionate distance between the found  $\frac{1}{4}$  corners of Sections 6 and 7, and 7 and 18, on the N. and S. centerline of Sec. 7.

The Wellton-Mohawk Canal traverses this section from N. to S. roughly paralleling the Southern Pacific Company's railroad tracks. Lands lying west of the canal are not considered irrigable by the Bureau of Reclamation.

From the  $\frac{1}{4}$  cor. of Secs. 6 and 7; which is also angle point 2 of Lot 9. Monument is an iron post 1 in. diam.; set 10 in. out of ground with brass cap mkd.

$\frac{1}{4}$   $\frac{S6}{S7}$   
 1941

S. 0° 01' 56" W., on the N. and S. centerline of Sec. 7 and the W. bdy. of Lot 9.

4.55 Centerline of RR R/W and westbound track. There are 3 tracks, westbound, passing and eastbound track.

Enter rough foothills and mountainous terrain.

19.98 Point for the CN 1/16 cor. of Sec. 7 and angle point 3 of Lot 9. At proportionate distance

Set iron post 2 ft. long, 1 in. diam., 6" out of rock mound 18 in. high with brass cap mkd.

CN  
 1/16  
 S7  
 1954

Leave Lot 9 continuing measurement.

39.96 Point for the C  $\frac{1}{4}$  cor. of Sec. 7. At proportionate distance bet. N. and S.  $\frac{1}{4}$  corners of Sec. 7

Set iron post 2 ft. long, 1 in. diam., in rock mound 2 ft. high with brass cap mkd.

C $\frac{1}{4}$   
 S7  
 1954

59.94 Point for the CS 1/16 cor. of Sec. 7. At proportionate distance

Set iron post 2 ft. long, 1 in. diam., in rock mound with brass cap mkd.


Survey of Lots 5 to 13 inclusive, Section 7, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS	<p style="text-align: center;">CS 1/16 S7 1954</p>
79.92	<p>The <math>\frac{1}{4}</math> cor. of Secs. 7 and 18. An iron post 1 in. diam., set 6 in. out of rock mound with General Land Office brass cap mkd.</p> <p style="text-align: center;">G.L.O. <math>\frac{1}{4}</math> <math>\frac{S7}{S18}</math> 1916</p>
20.00	<p>Thence, S. <math>89^{\circ} 55' 43''</math> E., bet. Secs. 7 and 18.</p> <p>Begin new measurement.</p> <p>Point for the E <math>\frac{1}{16}</math> cor. of Secs. 7 and 18. At proportionate distance</p> <p>Set iron post 2 ft. long, 1 in. diam., in rock mound with brass cap mkd.</p> <p style="text-align: center;">E <math>\frac{1}{16}</math> <math>\frac{S7}{S18}</math> 1954</p>
30.23	<p>Centerline of RR R/W and eastbound track. Double tracked here</p>
31.80	<p>Witness Corner for cor. of Secs. 7, 8, 17 and 18. An iron post 2 in. diam., set 12 in. out of ground with brass cap mkd</p> <p style="text-align: center;">WC T8S R20W <math>\frac{S7}{S18}   \frac{S8}{S17}</math> 45LE 1949</p>
37.62	<p>Centerline of the Wellton-Mohawk Canal</p>
40.00	<p>The cor. of Secs. 7, 8, 17 and 18. An iron post 2 in. diam., set 6 in. out of ground with brass cap mkd.</p> <p style="text-align: center;">T8S R20W <math>\frac{S7}{S18}   \frac{S8}{S17}</math> 1952</p> <p>Thence, N. <math>0^{\circ} 01' 46''</math> E., bet. Secs. 7 and 8.</p> <p>Begin new measurement.</p>
19.98	<p>The S <math>\frac{1}{16}</math> cor. of Secs. 7 and 8. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.</p> <p style="text-align: center;">S <math>\frac{1}{16}</math> S7   S8 1952</p> <p>Corner is also angle point 4 of Lot 13. Continue measurement now on E. bdy. of Lot 13.</p>
20.05	<p>Intersection of the east right-of-way line of the Wellton-Mohawk Canal and the line bet. Secs. 7 and 8. Also angle points 5 of Lot 13 and 3 of Lot 12.</p>

## Survey of Lots 5 to 13 inclusive, Sec. 7, T.8S., R.20W., G. &amp; S. R. M., Arizona

## CHAINS

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

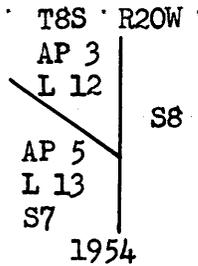


Leave Lot 13 continue on E. bdy. of Lot 12.

29.96

The  $\frac{1}{4}$  cor. of Secs. 7 and 8 and angle points 1 of Lot 12 and 6 of Lot 11.


Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Leave Lot 12 continue on E. bdy. of Lot 11.

59.94

The N  $\frac{1}{16}$  cor. of Secs. 7 and 8 and angle points 1 of Lot 11 and 5 of Lot 6. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Leave Lot 11 continue on E. bdy. of Lot 6.

68.05

Point on left bank of Gila River which bears NW. Also angle point 6 of Lot 6 and 5 of Lot 5.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

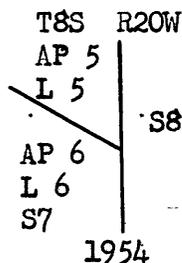


Continue on E. bdy. of Lot 5 crossing river bed.

79.92

The cor. of Secs. 5, 6, 7, and 8 and angle point 1 of Lot 5. Corner falls on slope of right bank of river.

Monument is an iron post 2 in. diam., set 6 in. out of ground with brass cap mkd.



Thence, N:  $89^{\circ} 56' 09''$  W., bet. Secs. 6 and 7 and on the N. bdy. of Lot 5.

Begin new measurement.

9.85


Point on the left bank of the river. Angle point 2 of Lot 5 and

Survey of Lots 5 to 13 inclusive, Sec. 7, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

angle point 1 of Lot 6.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 5 continue on N. bdy. of Lot 6.

19.99 Point for the E 1/16 cor. of Secs. 6 and 7 and angle points 2 of Lot 6 and 1 of Lot 8. At proportionate distance


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Continue on N. bdy. of Lot 8.

24.27 To intersect the East Right-of-Way line of the Wellton-Mohawk Canal at angle point 2 of Lot 8 and 1 of Lot 9.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 8 continue on N. bdy. of Lot 9.

28.41 Centerline of the Wellton-Mohawk Canal.


39.98 The 1/4 cor. of Secs. 6 and 7 previously described.

From the 1/4 cor. of Secs. 7 and 8.

N. 89° 55' 56" W., on the E. and W. centerline of Sec. 7 and bet. Lots 11 and 12.

6.99 To intersect the E. Right-of-Way line of the Wellton-Mohawk Canal, at angle points 5 of Lot 11, 4 of Lot 10, 1 of Lot 13 and 2 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

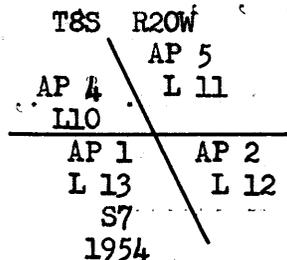

Leave Lots 11 and 12 continue measurement bet. Lots 10 and 13.

11.00 Centerline of the Wellton-Mohawk Canal.

20.00 Point for the CE 1/16 cor. of Sec. 7 and angle point 3 of Lot 10 and 2 of Lot 13. At proportionate distance.


Survey of Lots 5 to 13 inclusive, Sec. 7, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS	<p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <p style="text-align: center;">CE 1/16 S7 1954</p> <p>Continue measurement, leaving Lots 10 and 13.</p>														
22.35	Centerline of RR R/W and eastbound track. Double tracks here														
40.00	The C $\frac{1}{4}$ cor. of Sec. 7 previously set and described. -----														
	From the E 1/16 cor. of Secs. 7 and 18 previously described.														
	N. 0° 01' 52" E., on the N. and S. centerline of the SE $\frac{1}{4}$ of Sec. 7.														
19.98	Point for the SE 1/16 cor. of Sec. 7, also angle point 3 of Lot 13. At the intersection with the E. and W. centerline of the SE $\frac{1}{4}$ of Sec 7														
	Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.														
	SE 1/16 S7 1954														
	Continue measurement on W. bdy. of Lot 13.														
35.51	Centerline of RR R/W and eastbound track. Double track here.														
39.96	The CE 1/16 cor. of Sec. 7 previously set and described.														
	Leave Lot 13 continue on W. bdy. of Lot 10.														
59.94	Point for the NE 1/16 cor. of Sec. 7 which falls in the Wellton-Mohawk Canal. Not monumented. Also angle point 2 of Lot 7, 4 of Lot 9 and 2 of Lot 10. Leave Lot 10 continue bet. Lots 7 and 9.														
60.55	Centerline of the Wellton-Mohawk Canal.														
70.20	To intersect the E R/W line of the Wellton-Mohawk Canal at angle points 3 of Lot 6, 1 of Lot 7, 3 of Lot 8 and 5 of Lot 9.														
	Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.														
	<table border="0"> <tr> <td>T8S</td> <td>R20W</td> </tr> <tr> <td>AP 3</td> <td>AP 3</td> </tr> <tr> <td>L 8</td> <td>L 6</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td>AP 5</td> <td>AP 1</td> </tr> <tr> <td>L 9</td> <td>L 7</td> </tr> <tr> <td colspan="2" style="text-align: center;">S7 1954</td> </tr> </table>	T8S	R20W	AP 3	AP 3	L 8	L 6	-----		AP 5	AP 1	L 9	L 7	S7 1954	
T8S	R20W														
AP 3	AP 3														
L 8	L 6														
-----															
AP 5	AP 1														
L 9	L 7														
S7 1954															
	Leave Lots 7 and 9 continue bet. Lots 6 and 8.														
79.92	The E 1/16 cor. of Secs. 6 and 7 previously described. -----														
	From the N 1/16 cor. of Secs. 7 and 8 previously described.														
	N. 89° 56' 03" W., on the E. and W. centerline of the NE $\frac{1}{4}$ of Sec. 7 and bet. Lots 6 and 11.														
15.48	Intersection with the E. R/W line of the Wellton-Mohawk Canal at angle points 4 of Lot 6, 3 of Lot 7, 1 of Lot 10 and 2 of Lot 11.														

Survey of Lots 5 to 13 inclusive, Section 7, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

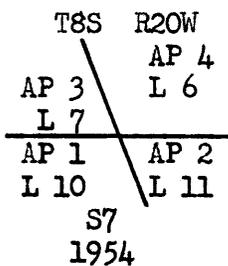

Leave Lots 6 and 11 continue bet. Lots 7 and 10.

19.70 Centerline of the Wellton-Mohawk Canal.

20.00 Point for the NE 1/16 cor. of Sec. 7 previously described.

Leave Lots 7 and 10 continue on S. bdy. of Lot 9.

28.60 Centerline of RR R/W and Westbound track. Three tracks here. Third or passing track ends 5.30 chains to S.

40.00 The CN 1/16 cor. of Sec. 7 previously described.

From the S 1/16 cor. of Secs. 7 and 8 previously described.

N. 89° 55' 49" W., on the E. and W. centerline of the SE 1/4 of Sec. 7 and on the S. bdy. of Lot 13.

4.09 Centerline of the Wellton-Mohawk Canal.

9.47 Centerline of ~~RR~~ R/W and eastbound track. Double track here.

20.00 The SE 1/16 cor. of Sec. 7 previously set and described.

Leave Lot 13 continuing measurement.

40.00 The CS 1/16 cor. of Sec. 7 previously set and described.


The following line is a traverse of the left bank of the Gila River which has been designated as the boundary between Lots 5 and 6 and the limit of the irrigable land adjacent to the river.

From the monument set on the river bank on the line bet. Secs. 7 and 8 at angle point 5 of Lot 5 and angle point 6 of Lot 6.

N. 30° 19' 30" W., along left bank of river and bet. Lots 5 and 6.

3.71 To angle point 4 of Lot 5 and 7 of Lot 6.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.




Thence, N. 7° 06' W., beginning new measurement.

6.58 To angle point 3 of Lot 5 and 8 of Lot 6

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

Survey of Lots 5 to 13 inclusive, Sec. 7, T.8S., R.20W., G. & S. R. M., Arizona

## CHAINS



Thence, N.  $73^{\circ} 11' 30''$  W., beginning new measurement.

7.48 To intersect the line bet. Secs. 6 and 7 at monument set for angle points 2 of Lot 5 and 1 of Lot 6 previously described.

End of traverse of left bank of river.

-----

The East line of the Wellton-Mohawk Canal right-of-way is designated as the western limit of the irrigable lands in this section. Following is a traverse of the R/W line.

From the monument set at the intersection of the line bet. Secs. 6 and 7 and the E. right-of-way line of the canal

S.  $23^{\circ} 43' 02''$  E., along R/W line and bet. Lots 8 and 9.

10.63 To intersect the N. and S. centerline of the NE $\frac{1}{4}$  of Sec. 7 at the monument previously set and described.

Leave Lots 8 and 9 continuing measurement bet. Lots 6 and 7.

21.84 To intersect the E. and W. centerline of the NE $\frac{1}{4}$  of Sec. 7 at the monument previously set and described.

Leave Lots 6 and 7 continuing measurement bet. Lots 10 and 11.

38.13 To the P. C. of a curve in the right-of-way line, which is angle point 6 of Lot 10 and angle point 3 of Lot 11. Not monumented.

Thence, on curve in right-of-way line whose data is

Δ	$4^{\circ} 25' 12''$ Rt.
R	3,250 feet
T	125.42 feet
L	250.72 feet (3.80 chains)
	Bearing of tangent from PC to PI is S. $23^{\circ} 43' 02''$ E.
	Bearing of tangent from PI to PT is S. $19^{\circ} 17' 50''$ E.

Beginning new measurement along curve

3.80 To PT of curve and angle point 5 of Lot 10 and 4 of Lot 11. Monument not set.

Thence, S.  $19^{\circ} 17' 50''$  E., beginning new measurement

1.63 To intersect the E. and W. centerline of Sec. 7 at monument previously set and described.

Leave Lots 10 and 11 continuing measurement bet. Lots 12 and 13.

22.74 To intersect the line bet. Secs. 7 and 8 at monument previously set and described.

End of traverse of Right-of-Way line.

Survey of Lots 5 to 13 inclusive, Section 7, T.8S., R. 20 W., G. & S. R. M., Ariz.

CHAINS


Note: The area of the Lots

Lot 5	3.14 acres	Lot 10	17.76 acres
Lot 6	34.50 acres	Lot 11	22.20 acres
Lot 7	2.32 acres	Lot 12	6.95 acres
Lot 8	2.08 acres	Lot 13	33.01 acres
Lot 9	37.88 acres		

Survey of Lots 1 to 13 inclusive, Section 17, T.8S., R.20W.,  
G. & S. R. M., Arizona

The  $W\frac{1}{2}$  of Section 17 is herein subdivided into legal subdivisions and fractional lots numbered from 1 to 13 inclusive. Lots 1, 3, 5, 8, 10 and 12 will accommodate farm units or portions thereof. The boundary between Lots 1 and 2 is the limit of the irrigable land as determined by the Bureau of Reclamation adjacent to the right bank of the Gila River. The left bank of the river, as determined by the Bureau of Reclamation, is the limit of the irrigable land next to the left bank. The East Right-of-Way line of the Wellton-Mohawk Canal is the limit of the irrigable lands to the west, and is therefore designated as the boundary between adjacent lots.


From the cor. of Secs. 7, 8, 17 and 18, which is angle point 2 of Lot 6 and is monumented with an iron post 2 in. diam., set 6 in. out of ground with brass cap mkd.



S.  $0^{\circ} 00' 28''$  E., bet. Secs. 17 and 18 and on the W. bdy. of Lot 6.


5.53 Centerline of the Wellton-Mohawk Canal.

20.00 The N  $1/16$  cor. of Secs. 17 and 18 and angle point 3 of Lot 6 and 2 of Lot 7. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Leave Lot 6 continue on W. bdy. of Lot 7

40.00 The  $\frac{1}{4}$  cor. of Secs. 17 and 18 and angle point 3 of Lot 7. Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Leave Lot 7 continuing measurement.


60.00 The S  $1/16$  cor. of Secs. 17 and 18. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



80.00 The cor. of Secs. 17, 18, 19 and 20 monumented by an iron post 2 in. diam., set 6 in. out of ground with General Land Office brass cap mkd.

Survey of Lots 1 to 13 inclusive, Sec. 17, T.8S., R. 20W., G. & S. R. M., Arizona


CHAINS




Thence, S. 89° 58' 53" E., bet. Secs. 17 and 20.

Begin new measurement.

20.01 The W 1/16 cor. of Secs. 17 and 20. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



40.02 The 1/4 cor. of Secs. 17 and 20 monumented with an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Thence, N. 0° 01' E., on N. and S. centerline of Sec. 17.

Begin new measurement.

7.04 Centerline of the Wellton-Mohawk Canal.


8.07 R/W line of Wellton-Mohawk Canal.

19.98 The CS 1/16 cor. of Sec. 17 which is also angle point 4 of Lot 12. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Continue measurement now on E. bdy. of Lot 12


39.96 The C 1/4 cor. of Sec. 17 and angle points 1 of Lot 12 and 5 of Lot 10. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Leave Lot 12 continue on E. bdy. of Lot 10.

49.96 Point of the left bank of the river which bears WNW. Also angle point 6 of Lot 10 and 5 of Lot 11.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 10 continue measurement on E. bdy. of Lot 11, crossing river bed.

59.94 Point for the CN 1/16 cor. of Sec. 17 which falls on right bank of river channel. Point is also angle points 1 of Lot 11 and 5 of Lot 2.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with

Survey of Lots 1 to 13 inclusive, Section 17, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

brass cap mkd.


CN  
1/16  
S17  
1954

Continue now on E. bdy. of Lot 2

65.55

To angle point 6 of Lot 2 and 4 of Lot 1 at edge of irrigable land as determined by the Bureau of Reclamation.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

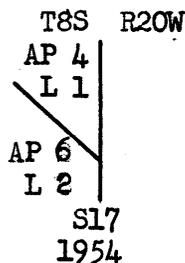

Continue on E. bdy. of Lot 1.

79.92

The  $\frac{1}{4}$  cor. of Secs. 8 and 17 and angle point 1 of Lot 1. An iron post 1 in. diam., set 6 in. out of ground with General Land Office brass cap mkd.




Thence, N. 89° 55' 08" W., bet. Secs. 8 and 17 and on N. bdy. of Lot 1.

Begin new measurement.

13.48

To edge of irrigable land at angle point 2 of Lot 1 and 1 of Lot 2.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 1 continue on N. bdy. of Lot 2.

20.00

The W 1/16 cor. of Secs. 8 and 17. Also angle points 2 of Lot 2 and 1 of Lot 4. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Continue on N. bdy. of Lot 4.


35.00

To intersect the East Right-of-Way line of the Wellton-Mohawk Canal falling on sloping right bank of river. Point is also angle point 2 of Lot 4 and 1 of Lot 6.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with cap mkd.

Survey of Lots 1 to 13 inclusive, Section 17, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS



Continue on N. bdy. of Lot 6 across river bed.

38.48 Left bank of river which runs into the Canal right-of-way and parallels the canal for about  $\frac{1}{2}$  mile to north.

40.00 The cor. of Secs. 7, 8, 17 and 18 previously described.


-----

From the W 1/16 cor. of Secs. 17 and 20, previously described.

N.  $0^{\circ} 00' 44''$  W., on the N. and S. centerline of the SW $\frac{1}{4}$  of Sec. 17


19.99 Point for the SW 1/16 cor. of Sec. 17 and angle point 3 of Lot 13. At intersection with the E. and W. centerline of the SW $\frac{1}{4}$  of Sec. 17

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Continue measurement now on W. bdy. of Lot 13

39.98 The CW 1/16 cor. of Sec. 17. Also angle points 2 of Lot 13, 2 of Lot 9 and 4 of Lot 7. Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Continue measurement now on the N. and S. centerline of the NW $\frac{1}{4}$  of Sec. 17 and bet. Lots 7 and 9.

43.16 Centerline of the Wellton-Mohawk Canal.

50.39 To intersect the East R/W line of the Wellton-Mohawk Canal. Also angle points 5 of Lot 7, 1 of Lot 9, 3 of Lot 8 and 3 of Lot 10.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

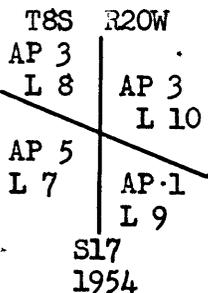

Continue bet. Lots 8 and 10

59.97 To point for the NW 1/16 cor. of Sec. 17. At the intersection with the E. and W. centerline of the NW $\frac{1}{4}$  of Sec. 17.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.




Survey of Lots 1 to 13 inclusive, Sec. 17, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS	<p>This corner is also angle point 2 of Lot 3, AP 6 of Lot 5, AP 1 of Lot 8 and AP 2 of Lot 10.</p> <p>Leave Lots 8 and 10 continuing bet. Lots 3 and 5.</p> <p>62.85 Point on left bank of river, bears NW. Also angle points 3 of Lot 2, 1 of Lot 3, 5 of Lot 4 and 1 of Lot 5.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Continue bet. Lots 2 and 4 crossing river channel.</p> <p>68.91 Low right bank of river.</p> <p>79.96 The W 1/16 cor. of Secs. 8 and 17 and monument previously described.</p> <p style="text-align: center;">-----</p> <p>From the CS 1/16 cor. of Sec. 17 previously described.</p> <p>N. 89° 59' 42" W., on the E. and W. centerline of the SW 1/4 of Sec. 17 and on the S. bdy. of Lot 13.</p> <p>0.61 The East Right-of-Way line of the Wellton-Mohawk Canal which is the boundary between adjacent lots.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Leave Lot 12 continue on S. bdy. of Lot 13.</p> <p>5.10 Centerline of the Wellton-Mohawk Canal.</p> <p>20.01 Monument for the SW 1/16 cor. of Sec. 17 previously set and described.</p> <p>Leave Lot 13 continuing measurement.</p> <p>40.02 The S 1/16 cor. of Secs. 17 and 18 previously described.</p> <p style="text-align: center;">-----</p> <p>From the C 1/4 cor. of Sec. 17 previously described.</p> <p>N. 89° 58' 17" W., on the E. and W. centerline of Sec. 17 and bet. Lots 10 and 12.</p> <p>13.36 To intersect the E. R/W line of the Wellton-Mohawk Canal at angle points 3 of Lot 9, 4 of Lot 10, 2 of Lot 12 and 1 of Lot 13.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p>
--------	---

Survey of Lots 1 to 13 inclusive, Sec. 17, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

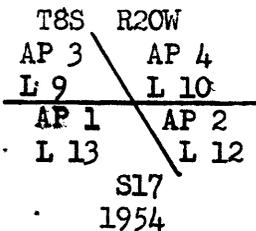

Continue bet. Lots 9 and 13.

17.85 Centerline of the Wellton-Mohawk Canal.

20.01 The CW 1/16 cor. of Sec. 17 previously described.

Leave Lots 9 and 13 continuing on S. bdy. of Lot 7.

40.02 The 1/4 cor. of Secs. 17 and 18 previously described.


-----

From the CN 1/16 cor. of Sec. 17 previously set and described.

N. 89° 56' 42" W., on the E. and W. centerline of the NW 1/4 of Sec. 17 and bet. Lots 2 and 11.

16.14 To point on left bank of river which bears NW and angle points 4 of Lot 2, 3 of Lot 3, 1 of Lot 10 and 2 of Lot 11.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.




Leave Lots 2 and 11 continue bet. Lots 3 and 10.

20.00 The NW 1/16 cor. of Sec. 17 previously set and described.

Continue bet. Lots 5 and 8.

26.12 Intersection with the E. R/W line of the Wellton-Mohawk Canal at angle points 5 of Lot 5, 4 of Lot 6, 1 of Lot 7 and 2 of Lot 8.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lots 5 and 8 continue bet. Lots 6 and 7.

30.62 Centerline of the Wellton-Mohawk Canal.

40.00 The N 1/16 cor. of Secs. 17 and 18 previously described.

-----

Following is a traverse of the East Right-of-Way line of the Wellton-Mohawk Canal which is designated as the boundary between adjacent lots and the western limit of the irrigable lands in this section.

Survey of Lots 1 to 13 inclusive, Section 17, T.8S., R.20W., G. & S. R. M., Arizona


CHAINS

From the intersection of the R/W line and the line bet. Secs. 8 and 17, which lies 5.00 chains distant, S. 89° 55' 08" E., from the corner of Secs. 7, 8, 17 and 18. Monument previously described.

S. 0° 00' 28" E., on R/W line and bet. Lots 4 and 6.

5.15 To point on left bank of Gila River. Also angle points 3 of Lot 4 and 3 of Lot 5.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

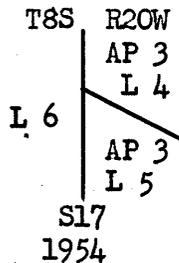

Leave Lot 4 continue bet. Lots 5 and 6.

6.08 To angle point in R/W line. Angle point 4 of Lot 5 and 5 of Lot 6.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Thence, S. 32° 33' 39" E., on R/W line and bet. Lots 5 and 6.

Begin new measurement.

16.51 To intersect the E. and W. centerline of the NW¼ of Sec. 17. Monument previously set and described.

Leave Lots 5 and 6 continue measurement bet. Lots 7 and 8.

27.88 To intersect the N. and S. centerline of the NW¼ of Sec. 17 at monument previously set and described.

Leave Lots 7 and 8 continue bet. Lots 9 and 10.

40.23 Intersection with E. and W. centerline of Sec. 17. Monument previously set and described.

Leave Lots 9 and 10 continue bet. Lots 12 and 13.

63.94 To intersect the E. and W. centerline of the SW¼ of Sec. 17 at monument previously set and described.

/line  
End of R/W traverse.

-----  
The Boundary between Lots 1 and 2 is designated as the limit of the irrigable land as determined by the Bureau of Reclamation.

A traverse of this line follows:

From the monument set on the N. and S. centerline of Sec. 17 a distance of 5.61 chains, N. 0° 01' E., of the CN 1/16 cor. of Sec. 17.

Run N57° 17' W., bet. Lots 1 and 2.

6.56 To angle point 3 of Lot 1 and 7 of Lot 2.

Survey of Lots 1 to 13 inclusive, Sec. 17, T.8S., R.20W., G. & S. R. M., Arizona

<p>CHAINS</p>	<p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R20W AP 3 L 1 S17 1954 L 2 AP 7</p> </div> <p>Thence, N. 36° 17' W., beginning new measurement.</p> <p>13.45 To intersect the line bet. Secs. 8 and 17 at monument previously set and described.</p> <p style="text-align: center;">-----</p> <p>The left bank of the Gila River is designated as the boundary bet. the adjacent lots on the south side of the river.</p> <p>From the monument previously set on the bank of the river and on the N. and S. centerline of Sec. 17, 10.00 chains distant, N. 0° 01' E., from the C <math>\frac{1}{4}</math> cor. of Sec. 17.</p> <p>N. 67° 20' 30" W., along bank of river and bet. Lots 10 and 11.</p> <p>8.56 To angle point 4 of Lot 11 and 7 of Lot 10.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R20W AP 4 L 11 S17 1954 L 10 AP 7</p> </div> <p>Thence, N. 38° 56' 30" W., beginning new measurement.</p> <p>3.43 To angle point 8 of Lot 10 and 3 of Lot 11.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R20W AP 3 L 11 S17 1954 L 10 AP 8</p> </div> <p>Thence, N. 56° 30' 30" W., begin new measurement.</p> <p>7.30 To intersect the E. and W. centerline of the NW<math>\frac{1}{4}</math> of Sec. 17 at monument previously set and described.</p> <p>Thence, N. 53° 17' W., bet. Lots 2 and 3 beginning new measurement.</p> <p>4.82 Intersection with the N. and S. centerline of the NW<math>\frac{1}{4}</math> of Sec. 17 and monument previously set and described.</p> <p>Thence, N. 59° 41' 30" W., beginning new measurement now bet. Lots 4 and 5.</p> <p>11.14 To angle point 4 of Lot 4 and 2 of Lot 5.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p>
---------------	--

Survey of Lots 1 to 13 inclusive, Sec. 17, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS															
8.34	<p>Thence, N. 40° 17' 30" W., new measurement.</p> <p>To intersect the E. R/W line of the Wellton-Mohawk Canal at the monument previously set and described.</p>														
	<p>Note: The area of the Lots</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Lot 1    11.27 acres</td> <td style="width: 50%;">Lot 8    2.93 acres</td> </tr> <tr> <td>Lot 2    28.15 acres</td> <td>Lot 9    3.46 acres</td> </tr> <tr> <td>Lot 3    0.56 acres</td> <td>Lot 10   27.56 acres</td> </tr> <tr> <td>Lot 4    18.24 acres</td> <td>Lot 11   8.96 acres</td> </tr> <tr> <td>Lot 5    5.58 acres</td> <td>Lot 12   13.96 acres</td> </tr> <tr> <td>Lot 6    16.18 acres</td> <td>Lot 13   26.03 acres</td> </tr> <tr> <td>Lot 7    37.07 acres</td> <td></td> </tr> </table>	Lot 1    11.27 acres	Lot 8    2.93 acres	Lot 2    28.15 acres	Lot 9    3.46 acres	Lot 3    0.56 acres	Lot 10   27.56 acres	Lot 4    18.24 acres	Lot 11   8.96 acres	Lot 5    5.58 acres	Lot 12   13.96 acres	Lot 6    16.18 acres	Lot 13   26.03 acres	Lot 7    37.07 acres	
Lot 1    11.27 acres	Lot 8    2.93 acres														
Lot 2    28.15 acres	Lot 9    3.46 acres														
Lot 3    0.56 acres	Lot 10   27.56 acres														
Lot 4    18.24 acres	Lot 11   8.96 acres														
Lot 5    5.58 acres	Lot 12   13.96 acres														
Lot 6    16.18 acres	Lot 13   26.03 acres														
Lot 7    37.07 acres															

	<p>Survey of Lots 1, 2, 3, 4, 5 and 6, Section 20, T.8S., R.20W., G. &amp; S. R. M., Arizona</p> <p>-----</p> <p>The NE<math>\frac{1}{4}</math> of Section 20 is herein subdivided into legal subdivisions and fractional lots numbered from 1 to 6 inclusive, which will accommodate farm units or portions thereof. The East Right-of-Way line of the Wellton-Mohawk Canal is designated as the boundary between the Lots.</p> <p>From the <math>\frac{1}{4}</math> cor. of Secs. 19 and 20 which is on a low flat ridge in the gravelly foothills of the Gila Mountains and is monumented with an iron post 1 in. diam., set 10 in. out of ground with General Land Office Brass cap mkd.</p> <div style="text-align: center;"> <p>G.L.O.</p> <p><math>\frac{1}{4}</math></p> <p>S19   S20</p> <p>1916</p> </div> <p>S. 89° 57' 41" E., on the E. and W. centerline of Sec. 20.</p>
9.70	Toe of ridge falling into wide gravel wash.
40.02	<p>Point for the C <math>\frac{1}{4}</math> cor. of Sec. 20. At intersection with the N. and S. centerline of Sec. 20</p> <p>Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd</p> <div style="text-align: center;"> <p>C<math>\frac{1}{4}</math></p> <p>S20</p> <p>1954</p> </div> <p>Continue measurement</p>
49.72	Centerline of eastbound RR track (Southern Pacific Company) and centerline of RR right-of-way. Double track.
60.03	<p>Point for the CE 1/16 cor. of Sec. 20 and angle point 3 of Lot 5. at proportionate distance.</p> <p>Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>CE</p> <p>1/16</p> <p>S20</p> <p>1954</p> </div>

Survey of Lots 1 to 6 inclusive, Sec. 20, T.8S., R.20W., G. & S. R. M., Arizona


<p>CHAINS</p>	<p>Continue measurement now on S. bdy. of Lot 5</p> <p>80.04 The <math>\frac{1}{4}</math> cor. of Secs. 20 and 21 and angle point 4 of Lot 5. Monument is an iron post 1 in. diam., set 6 in. out of ground with General Land Office brass cap mkd.</p> <div style="text-align: center;"> <p>G.L.O.</p> <p><math>\frac{1}{4}</math></p> <p>S20   S21</p> <p>1916</p> </div> <p>Thence, N. 0° 00' 27" W., bet. Secs. 20 and 21 and on E. bdy. of Lot 5.</p> <p>Begin new measurement.</p> <p>5.91 Centerline of the Wellton-Mohawk Canal.</p> <p>10.70 Intersect the E. right-of-way line of the Wellton-Mohawk Canal. Point is also angle points 5 of Lot 5 and 3 of Lot 6.</p> <p>Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R20W</p> <p>AP 3</p> <p>L 6</p> <p>AP 5</p> <p>L 5</p> <p>S20</p> <p>S21</p> <p>1954</p> </div> <p>Leave Lot 5 continuing measurement on E. bdy. of Lot 6.</p> <p>20.04 The N <math>\frac{1}{16}</math> cor. of Secs. 20 and 21. Also angle points 7 of Lot 1 and 1 of Lot 6. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>N <math>\frac{1}{16}</math></p> <p>S20   S21</p> <p>1952</p> </div> <p>Leave Lot 6 continue on E. bdy. of Lot 1.</p> <p>40.08 The cor. of Secs. 16, 17, 20 and 21 and angle point 1 of Lot 1.</p> <p>Monument is an iron post 2 in. diam., set 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T8S R20W</p> <p>S17   S16</p> <p>S20   S21</p> <p>1941</p> </div> <p>Thence, S. 89° 58' 53" W., bet. Secs. 17 and 20 and on N. bdy. of Lot 1.</p> <p>Begin new measurement.</p> <p>20.01 The E <math>\frac{1}{16}</math> cor. of Secs. 20 and 21. Also angle points 2 of Lot 1 and 1 of Lot 3. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <p>E <math>\frac{1}{16}</math></p> <p>S17</p> <p>S20</p> <p>1952</p> </div> <p>Continue measurement on N. bdy. of Lot 3.</p>
---------------	---

Survey of Lots 1 to 6 inclusive, Section 20, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

27.88 Intersection with the E. R/W line of the Wellton-Mohawk Canal.


Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Leave Lot 3 continue on N. bdy. of Lot 4.

32.37 Centerline of the Wellton-Mohawk Canal.

40.02 The  $\frac{1}{4}$  cor. of Secs. 17 and 20. Also angle point 2 of Lot 4. Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Thence, S.  $0^{\circ} 00' 04''$  W., on the N. and S. centerline of Sec. 20 and on the W. bdy. of Lot 4.

Begin new measurement.

3.94 Top of steep 6 foot high floodbank.

20.01 Point for the CN 1/16 cor. of Sec. 20 and angle point 3 of Lot 4. At proportionate distance

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.




Leave Lot 4 continuing measurement.

35.11 Centerline of eastbound RR track at center of RR R/W. Two tracks.

40.03 The monument previously set for the C  $\frac{1}{4}$  cor. of Sec. 20.

43.51 Toe of foothills of Gila Mountains. At mouth of 550 ft. wide wash.

79.99 The  $\frac{1}{4}$  cor. of Secs. 20 and 29. Monument lies on slope of ridge in foothills about 15 ft. above toe, and is an iron post 1 in. diam., set 6 in. out of ground with General Land Office brass cap mkd.



From the monument previously set for the CE 1/16 cor. of Sec. 20 and angle point 3 of Lot 5.

N.  $0^{\circ} 00' 12''$  W., on the N. and S. centerline of the NE  $\frac{1}{4}$  of Sec. 20 and on the W. bdy. of Lot 5.

17.65 Top of steep 5 ft. high floodbank.

20.03 Point for the NE 1/16 cor. of Sec. 20 which is also angle points 2 of Lot 2, 4 of Lot 4 and 2 of Lot 5. At intersection with the

Survey of Lots 1 to 6 inclusive, Sec. 20, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

E. and W. centerline of the NE $\frac{1}{4}$  of Sec. 20

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.

NE  
1/16  
S20  
1954

Leave Lot 5 continuing bet. Lots 2 and 4.


21.62

Centerline of the Wellton-Mohawk Canal.

27.73

Intersect the E R/W line of the Canal. Also angle points 3 of Lot 1, 1 of Lot 2, 3 of Lot 3 and 5 of Lot 4.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.

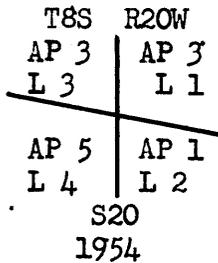

Leave Lots 2 and 4 continue bet. Lots 1 and 3.

40.06


The E 1/16 cor. of Secs. 17 and 20 previously described.

-----  
**From the N 1/16 cor. of Secs. 20 and 21 previously described.**  
 N. 89° 59' 24" W., on the E. and W. centerline of the NE $\frac{1}{4}$  of Sec. 20 and bet. Lots 1 and 6.

12.08

The E. R/W line of the Wellton-Mohawk Canal. Also angle points 6 of Lot 1, 3 of Lot 2, 2 of Lot 6 and 1 of Lot 5.

Set iron post 3 ft. long, 1 in. diam., 6 in. out of ground with brass cap mkd.



Leave Lots 1 and 6 continue bet. Lots 2 and 5.

18.04

Centerline of the Wellton-Mohawk Canal.

20.01

The NE 1/16 cor. of Sec. 20 previously set and described.

Leave Lots 2 and 5 continue on S. bdy. of Lot 4.

40.02

The CN 1/16 cor. monument previously set and described.

-----  
 Following is a traverse of the East Right-of-Way line of the Wellton-Mohawk Canal which is the boundary between adjacent lots.

From the intersection of the R/W line and the line bet. Secs. 17 and 20. Monument previously set and described.

S. 32° 33' 13" E., on R/W line and bet. Lots 3 and 4.

14.62

To intersect the N. and S. centerline of the NE $\frac{1}{4}$  of Sec. 20 at monument previously set and described.

Survey of Lots 1 to 6 inclusive, Section 20, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS	<p>Leave Lots 3 and 4 continue bet. Lots 1 and 2.</p>												
16.31	<p>To PC of curve in R/W line. Angle point 4 of Lot 1 and 5 of Lot 2. Point not monumented.</p> <p>Thence, beginning new measurement on curve in R/W line whose data is</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">Δ</td> <td style="text-align: right;">19° 44' 25" Lt.</td> </tr> <tr> <td style="text-align: center;">R</td> <td style="text-align: right;">750.00 feet</td> </tr> <tr> <td style="text-align: center;">T</td> <td style="text-align: right;">139.49 feet</td> </tr> <tr> <td style="text-align: center;">L</td> <td style="text-align: right;">258.40 feet (3.92 chains)</td> </tr> </table> <p>Tangent PC to PI bearing is S. 32° 33' 13" E. Tangent PI to PT bearing is S. 52° 17' 38" E.</p>	Δ	19° 44' 25" Lt.	R	750.00 feet	T	139.49 feet	L	258.40 feet (3.92 chains)				
Δ	19° 44' 25" Lt.												
R	750.00 feet												
T	139.49 feet												
L	258.40 feet (3.92 chains)												
3.92	<p>To PT of curve and angle points 5 of Lot 1 and 4 of Lot 2. Not monumented.</p> <p>Thence, S. 52° 17' 38" E., beginning new measurement</p>												
5.55	<p>Intersect the E. and W. centerline of the NE<sup>1</sup>/<sub>4</sub> of Sec. 20 at the monument previously set and described.</p> <p>Leave Lots 1 and 2 continuing measurement bet. Lots 5 and 6.</p>												
20.82	<p>The intersection with the line bet. secs. 20 and 21. Monument previously set and described.</p> <p>End of traverse of R/W line.</p>												
<p>Note: The area of the Lots</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">Lot 1</td> <td style="text-align: center;">37.48 acres</td> <td style="text-align: center;">Lot 4</td> <td style="text-align: center;">35.21 acres</td> </tr> <tr> <td style="text-align: center;">Lot 2</td> <td style="text-align: center;">2.61 acres</td> <td style="text-align: center;">Lot 5</td> <td style="text-align: center;">34.45 acres</td> </tr> <tr> <td style="text-align: center;">Lot 3</td> <td style="text-align: center;">4.85 acres</td> <td style="text-align: center;">Lot 6</td> <td style="text-align: center;">5.64 acres</td> </tr> </table>		Lot 1	37.48 acres	Lot 4	35.21 acres	Lot 2	2.61 acres	Lot 5	34.45 acres	Lot 3	4.85 acres	Lot 6	5.64 acres
Lot 1	37.48 acres	Lot 4	35.21 acres										
Lot 2	2.61 acres	Lot 5	34.45 acres										
Lot 3	4.85 acres	Lot 6	5.64 acres										


<p>Survey of Section 21, T.8S., R.20W., G. &amp; S. R. M., Arizona</p> <p>-----</p> <p>All of Section 21 is herein subdivided into legal subdivisions and fractional lots numbered from 1 to 20 inclusive which will accommodate farm units or parts thereof. The right and left banks of the Gila River, as determined by the Bureau of Reclamation are the boundaries between adjacent lots and mark the limits of the irrigable lands adjacent to the river.</p> <p>Lots 21 and 22 were surveyed as Lot 6 during the course of this survey. However subsequent to the completion of the survey, the further subdivision of Lot 6 was deemed necessary. Therefore Lot 6 was subdivided into Lots 21 and 22 with a minimum of changes required on corner markings.</p> <p>From the cor. of Secs. 21, 22, 27 and 28 which is monumented with an iron post 2 in. diam., set 8 in. out of ground with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T8S R20W</td> </tr> <tr> <td style="text-align: center;">S21</td> <td style="text-align: center;">S22</td> </tr> <tr> <td style="text-align: center;">S28</td> <td style="text-align: center;">S27</td> </tr> <tr> <td colspan="2" style="text-align: center;">1952</td> </tr> </table> <p>N. 0° 09' 20" E., bet. Secs. 21 and 22.</p>		T8S R20W		S21	S22	S28	S27	1952	
T8S R20W									
S21	S22								
S28	S27								
1952									
17.87	<p>Top of vertical cut bank of overflow channel of river.</p>								
19.96	<p>To the S 1/16 cor. of Secs. 21 and 22. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">S 1/16</td> </tr> <tr> <td style="text-align: center;">S21</td> <td style="text-align: center;">S22</td> </tr> <tr> <td colspan="2" style="text-align: center;">1952</td> </tr> </table>	S 1/16		S21	S22	1952			
S 1/16									
S21	S22								
1952									

Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS


Continue measurement.

39.92 The  $\frac{1}{4}$  cor. of Secs. 21 and 22. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.




59.92 Point for the N  $\frac{1}{16}$  cor. of Secs. 21 and 22. At proportionate distance

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd



79.92 The cor. of Secs. 15, 16, 21 and 22. An ironpost 2 in. diam., set 6 in. out of ground with brass cap mkd.




Thence, N.  $89^{\circ} 53'$  W., bet. Secs. 16 and 21.

Begin new measurement.

19.99 To point for the E  $\frac{1}{16}$  cor. of Secs. 16 and 21. At proportionate distance


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Continue measurement

36.81 Top of vertical cut bank 7 feet high, floodbank.


39.98 The  $\frac{1}{4}$  cor. of Secs. 16 and 21 and angle point 1 of Lot 1. An iron post 1 in. diam., 6 in. out of ground with brass cap mkd.



Continue on N. bdy. of Lot 1.

43.42 Point near right bank of river. Also angle points 2 of Lot 1 and 1 of Lot 2.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.




Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

Leave Lot 1 continue on N. bdy. of Lot 2 crossing river which bears N.

59.97

The W 1/16 cor. of Secs. 16 and 21 which falls on slope of left bank of river. Corner is also angle points 2 of Lot 2 and 1 of Lot 4. Monument is an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.




Continue on N. bdy. of Lot 4

61.49

Point on left bank of river. Angle point 2 of Lot 4 and 1 of Lot 5.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Continue on N. bdy. of Lot 4.

79.96

The cor. of Secs. 16, 17, 20 and 21 and angle point 2 of Lot 5. Monumented with an iron post 2 in. diam., set 8 in. out of ground with brass cap mkd.




Thence, S. 0° 00' 27" E., bet. Secs. 20 and 21 and on the W. bdy. of Lot 5.

Begin new measurement.

20.04

To the N 1/16 cor. of Secs. 20 and 21, and angle point 3 of Lot 5.


Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Leave Lot 5 continuing measurement.

29.38

Monument set in survey of Section 20 at angle point 5 of Lot 5 and AP 3 of Lot 6 in Section 20. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.

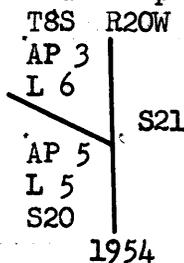

34.17

Centerline of the Wellton-Mohawk Canal.


40.08

The 1/4 cor. of Secs. 20 and 21. An iron post 1 in. diam., set 6 in.

Survey of Section 21, T.8S., R.20 W., G. & S. R. M., Arizona


CHAINS

out of ground with General Land Office brass cap mkd.



60.08

The S 1/16 cor. of Secs. 20 and 21. Monument is an iron post 1 in. diam., set 14 in. out of ground with brass cap mkd.




68.26

Centerline of RR R/W and eastbound track. Double track here.  
Enter foothills of Gila Mountains.

80.08

The cor. of Secs. 20, 21, 28 and 29. Monumented by an iron post 2 in. diam., set 6 in. out of ground, mound of rocks 3 ft. west of post, with General Land Office brass cap mkd.

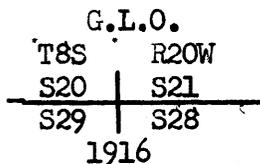


Thence, S. 89° 59' 53" E., bet. Secs. 21 and 28.  
Begin new measurement.

13.64

Centerline of RR R/W and eastbound track of double track line.

19.96

The W 1/16 cor. of Secs. 21 and 28. An iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.



Continue measurement

23.32


Centerline of the Wellton-Mohawk Canal, along toe of foothills.

33.29

Top of floodbank 5 ft. high.

39.92


The 1/4 cor. of Secs. 21 and 28. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



52.03

Also angle point 3 of Lot 16. Continue on S. bdy. of Lot 16. Point on left bank of river which bears NNW. Also angle points 4 of Lot 16 and 4 of Lot 17.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

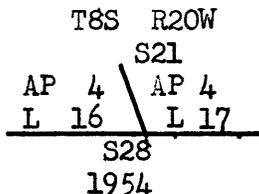


Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

Continue on S. bdy. of Lot 17.

59.88

To the E 1/16 cor. of Secs. 21 and 28 which falls in river bed. Also angle points 5 of Lot 17 and 2 of Lot 19. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.




Continue measurement on S. bdy. of Lot 19 crossing river.

63.66

Point on the right bank of the river at angle points 3 of Lot 19 5 of Lot 20.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lot 19 continuing on S. bdy. of Lot 20.

79.84

The cor. of Secs. 21, 22, 28 and 27 and the monument previously described.


-----

From the 1/4 cor. of Secs. 21 and 28 previously described.

N. 0° 02' 21" E., on the N. and S. centerline of Sec. 21 and on the W. bdy. of Lot 16.

19.98

The CS 1/16 cor. of Sec. 21 and angle points 2 of Lot 16, 2 of Lot 13 and 4 of Lot 15. Monument is an iron post 1 in. diam., set 3 in. below ground with brass cap mkd.




Leave Lot 16 continue bet. Lots 13 and 15.

27.53

Point on left bank of river which bears NNW. Also angle points 3 of Lot 12, 1 of Lot 13, 3 of Lot 14 and 5 of Lot 15.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

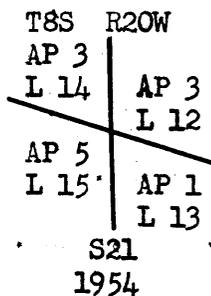

Continue bet. Lots 12 and 14 across river bed.

39.96

The C 1/4 cor. of Sec. 21. Point is also angle points 4 of Lot 7, 2 of Lot 9, 2 of Lot 12 and 1 of Lot 14. Falls in river bed. Monument is an iron post 1 in. diam., set 8 in. out of ground

Survey of Section 21, T.8S.; R.20W.; G. & S. R. M.; Arizona

CHAINS

with brass cap mkd:


C 1/4  
S21  
1952

Continue crossing river bed bet. Lots 7 and 9.

54.16

Point on right bank of river which bears NNW. Also angle points 5 of Lot 7, 3 of Lot 8, 1 of Lot 9 and 3 of Lot 10.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

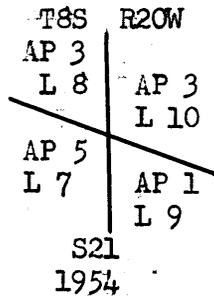

Leave Lots 7 and 9 continue bet. Lots 8 and 10.

59.98

To the CN 1/16 cor. of Sec. 21 and angle points 5 of Lot 1, 1 of Lot 8 and 2 of Lot 10. An iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.



Continue on E. bdy. of Lot 1.

80.00

The 1/4 cor. of Secs. 16 and 21 previously described.


From the 1/4 cor. of Secs. 21 and 22 previously described.

18.33

N. 89° 55' 51" W., on the E. and W. centerline of Sec. 21. Vertical cut flood bank of river 4 feet high.

20.00

To the CE 1/16 cor. of Sec. 21 which is monumented by an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.




Corner is also angle points 6 of Lot 10 and 1 of Lot 11.

Continue measurement bet. Lots 10 and 11.

34.89

The right bank of the Gila River and angle point 3 of Lot 9, 5 of Lot 10, 2 of Lot 11 and 1 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

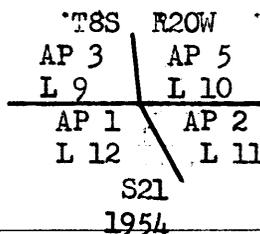

Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS	<p>Leave Lots 10 and 11 continuing bet. Lots 9 and 12. Crossing river.</p>														
40.00	<p>The C <math>\frac{1}{4}</math> cor. of Sec. 21 previously described.</p> <p>Continue bet. Lots 7 and 14.</p>														
46.25	<p>Point on the left bank of the river. Also angle points 3 of Lot 7, 2 of Lot 14, 1 of Lot 15 and 4 of Lot 22.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T8S</td> <td>R20W</td> </tr> <tr> <td>AP 4</td> <td>AP 3</td> </tr> <tr> <td>L 22</td> <td>L 7</td> </tr> <tr> <td>AP 1</td> <td>AP 2</td> </tr> <tr> <td>L 15</td> <td>L 14</td> </tr> <tr> <td colspan="2">S21</td> </tr> <tr> <td colspan="2">1954</td> </tr> </table> </div> <p>Leave Lots 7 and 14 continuing bet. Lots 15 and 22.</p>	T8S	R20W	AP 4	AP 3	L 22	L 7	AP 1	AP 2	L 15	L 14	S21		1954	
T8S	R20W														
AP 4	AP 3														
L 22	L 7														
AP 1	AP 2														
L 15	L 14														
S21															
1954															
59.98	<p>The CW <math>\frac{1}{16}</math> cor. of Sec. 21 and angle points 2 of Lot 15 and 3 of Lot 22. Monument is an iron post 1 in. diam., set 6 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td colspan="2">W <math>\frac{1}{16}</math></td> </tr> <tr> <td>c</td> <td>c</td> </tr> <tr> <td colspan="2">S21</td> </tr> <tr> <td colspan="2">1952</td> </tr> </table> </div> <p>Leave Lots 15 and 22 continuing measurement.</p>	W $\frac{1}{16}$		c	c	S21		1952							
W $\frac{1}{16}$															
c	c														
S21															
1952															
73.60	<p>Centerline of the Wellton-Mohawk Canal.</p>														
79.96	<p>The <math>\frac{1}{4}</math> cor. of Secs. 20 and 21 previously described.</p> <p style="text-align: center;">-----</p> <p>From the E <math>\frac{1}{16}</math> cor. of Secs. 21 and 28, monument previously described.</p> <p>N. <math>0^{\circ} 05' 50''</math> E., on the N. and S. centerline of the SE <math>\frac{1}{4}</math> of Sec. 21 and bet. Lots 17 and 19.</p>														
8.32	<p>To the right bank of the Gila River which bears NNW. Also angle points 6 of Lot 17, 3 of Lot 18, 1 of Lot 19 and 3 of Lot 20.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T8S</td> <td>R20W</td> </tr> <tr> <td>AP 3</td> <td>AP 3</td> </tr> <tr> <td>L 18</td> <td>L 20</td> </tr> <tr> <td>AP 6</td> <td>AP 1</td> </tr> <tr> <td>L 17</td> <td>L 19</td> </tr> <tr> <td colspan="2">S21</td> </tr> <tr> <td colspan="2">1954</td> </tr> </table> </div> <p>Leave Lots 17 and 19 continuing measurement bet. Lots 18 and 20.</p>	T8S	R20W	AP 3	AP 3	L 18	L 20	AP 6	AP 1	L 17	L 19	S21		1954	
T8S	R20W														
AP 3	AP 3														
L 18	L 20														
AP 6	AP 1														
L 17	L 19														
S21															
1954															
19.97	<p>Point for the SE <math>\frac{1}{16}</math> cor. of Sec. 21 which is also angle point 6 of Lot 11, 1 of Lot 18 and 2 of Lot 20. At the intersection with the E. and W. centerline of the SE <math>\frac{1}{4}</math> of Sec. 21.</p> <p>Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>SE</td> </tr> <tr> <td><math>\frac{1}{16}</math></td> </tr> <tr> <td>S21</td> </tr> <tr> <td>1954</td> </tr> </table> </div>	SE	$\frac{1}{16}$	S21	1954										
SE															
$\frac{1}{16}$															
S21															
1954															


## Survey of Section 21, T.8S., R.20W., G. &amp; S. R. M., Arizona

CHAINS	Continue on E. bdy. of Lot 11.
39.94	To the CE 1/16 cor. of Sec. 21 previously described.  Continue measurement now on the N. and S. centerline of the NE $\frac{1}{4}$ of Sec. 21 and on the E. bdy. of Lot 10.
41.46	Top of vertical floodbank 5 ft. high.
59.95	Point for the NE 1/16 cor. of Sec. 21 and angle point 1 of Lot 10. At intersection with the E. and W. centerline of the NE $\frac{1}{4}$ of Sec. 21.  Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.  NE 1/16 S21 1954
	Leave Lot 10 continuing measurement.
79.96	The E 1/16 cor. of Secs. 16 and 21 previously set and described.  -----  From the W 1/16 cor. of Secs. 21 and 28 previously described. N. 0° 00' 57" E., on the N. and S. centerline of the SW $\frac{1}{4}$ of Sec. 21
3.79	Centerline of the Wellton-Mohawk Canal.
17.27	Leave foothills.
19.99	The SW 1/16 cor. of Sec. 21 and angle point 3 of Lot 15. Monument is an iron post 1 in. diam., set 8 in. out of ground with brass cap mkd.  SW 1/16 S21 1952
	Continue now on W. bdy. of Lot 15.
39.98	To the CW 1/16 cor. of Sec. 21 previously described.  Leave Lot 15 continue on W. bdy. of Lot 22 and on the N. and S. centerline of the NW $\frac{1}{4}$ of Sec. 21
49.99	Point, at proportionate distance, for the CSNW 1/64 cor. of Sec. 21 which is also angle points 3 of 21 and 2 of Lot 22. Point not monumented at this time.  Leave Lot 22 continue on W. bdy. of Lot 21.
60.00	Point for the NW 1/16 cor. of Sec. 21 and angle points 2 of Lot 3, 4 of Lot 5 and 2 of Lot 21. At the intersection with the E. and W. centerline of the NW $\frac{1}{4}$ of Sec. 21.  Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.  NW 1/16 S21 1954
	Leave Lot 21 continue bet. Lots 3 and 5.
76.67	To point on indistinct left bank of river. Also angle points 3 of Lot 2, 1 of Lot 3, 3 of Lot 4 and 5 of Lot 5.

Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

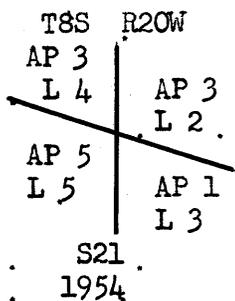

Continue bet. Lots 2 and 4.

80.02 To the W 1/16 cor. of Secs. 16 and 21 and monument previously described.

-----

From the N 1/16 cor. of Secs. 21 and 22 previously set and described.

N. 89° 54' 26" W., on the E. and W. centerline of the NE 1/4 of Sec. 21

20.00 To the NE 1/16 cor. of Sec. 21 previously set and described.

Continue measurement on N. bdy. of Lot 10.


34.62 Vertical floodbank 8 ft. high.

40.00 The CN 1/16 cor. of Sec. 21 previously described.

Continue now bet. Lots 1 and 8 and on the E. and W. centerline of the NW 1/4 of Sec. 21.

41.24 Point on the right bank of the Gila River channel which is angle points 4 of Lot 1, 6 of Lot 2, 1 of Lot 7 and 2 of Lot 8.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

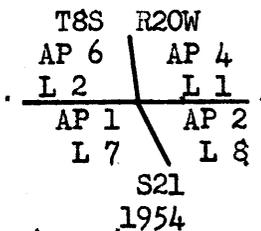

Leave Lots 1 and 8 continuing bet. Lots 2 and 7 crossing river bed.

55.46 Point on left bank of river channel. Also angle points 5 of Lot 2, 3 of Lot 3, 2 of Lot 7 and 1 of Lot 21.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lots 2 and 7 continuing bet. Lots 3 and 21.

59.99 The NW 1/16 cor. of Sec. 21 previously set and described.

Leave Lots 3 and 21 continuing on S. bdy. of Lot 5.

79.98 The N 1/16 cor. of Secs. 20 and 21 previously described.

-----

Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

From the S 1/16 cor. of Secs. 21 and 22 previously described.

N. 89° 57' 52" W., on the E. and W. centerline of the SE 1/4 of Sec. 21 and on the N. bdy. of Lot 20


3.18 Vertical floodbank 5 ft. high

19.98 The SE 1/16 cor. of Sec. 21 previously set and described.

Continue measurement bet. Lots 11 and 18.

25.76 The right bank of the Gila River channel and angle points 5 of Lot 11, 5 of Lot 12, 1 of Lot 17 and 2 of Lot 18:


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Leave Lots 11 and 18 continue bet. Lots 12 and 17. Crossing river bed.

36.97 Point on the left bank of the river channel. Also angle points 4 of Lot 12, 3 of Lot 13, 1 of Lot 16 and 2 of Lot 17.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Continue bet. Lots 13 and 16

39.96 To the CS 1/16 cor. of Sec. 21 previously described.

Continue on the S. bdy. of Lot 15 and on the E. and W. centerline of the SW 1/4 of sec. 21.

59.93 The SW 1/16 cor. of Sec. 21 previously described.

Leave Lot 15 continuing measurement.

67.93 Centerline of the Wellton-Mohawk Canal.

79.90 The S 1/16 cor. of Secs. 20 and 21 previously described.

The right and left banks of the Gila River channel, as determined by the Bureau of Reclamation are designated as the boundaries of adjacent lots marking the limits of the irrigable lands next to the river.

The following line is a traverse of the right bank of the river.

From the monument set on the line bet. Secs. 21 and 28 on the right bank, previously described.


Survey of Section 21, T.8S., R.20W., G. & S. R. M., Arizona

CHAINS

N. 23° 26' 30" W., along right bank of river and bet. Lots 19 and 20.

6.25 To angle point 4 of Lot 19 and 4 of Lot 20.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Thence, N. 26° 18' 30" W., beginning new measurement.

2.88 To intersect the N. and S. centerline of the SE $\frac{1}{4}$  of Sec. 21 at monument previously set and described.

Thence, N. 26° 18' 30" W., leaving Lots 19 and 20.


Begin new measurement bet. Lots 17 and 18.

13.00 Intersection with the E. and W. centerline of the SE $\frac{1}{4}$  of Sec. 21 and monument previously set and described.

Thence, N. 26° 18' 30" W., beginning new measurement bet. Lots 11 and 12.

9.95 To angle point 4 of Lot 11 and 6 of Lot 12.


Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Thence, N. 16° 58' 30" W., beginning new measurement.

7.83 To angle point 3 of Lot 11 and 7 of Lot 12.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.




Thence, N. 33° 36' 30" W., new measurement

4.30 To intersect the E. and W. centerline of Sec. 21 at monument previously set and described.

Thence, N. 22° 57' 30" W., beginning new measurement bet. Lots 9 and 10.

9.17 To angle point 4 of Lot 9 and 4 of Lot 10.

Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.



Thence, N. 14° 50' 30" W., beginning new measurement.

## Survey of Section 21, T.8S., R.20W., G. &amp; S. R. M., Arizona

CHAINS	
5.95	To intersect the N. and S. centerline of Sec. 21. Monument previously set and described. Thence, N. $11^{\circ} 54' 30''$ W., beginning new measurement bet. Lots 7 and 8.
5.95	Intersection with the E. and W. centerline of the NW $\frac{1}{4}$ of Sec. 21 and monument previously set and described. Thence, N. $5^{\circ} 00' 30''$ W., bet. Lots 1 and 2. Begin new measurement.
6.48	To angle point 3 of Lot 1 and 7 of Lot 2. Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd. <div style="text-align: center;">           T8S R20W            AP 7 / AP 3            L 2 / L 1            S21            1954         </div>
	Thence, N. $6^{\circ} 50' 30''$ W., new measurement.
13.66	Intersect the line bet. Secs. 16 and 21 at monument previously set and described. ----- Following is traverse of the left bank of the Gila River channel. From the monument previously set and described on the left bank of the river and on the line bet. Secs. 21 and 28. N. $28^{\circ} 18'$ W., along the left bank, and bet. Lots 16 and 17.
9.55	To angle point 5 of Lot 16 and 3 of Lot 17. Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd. <div style="text-align: center;">           T8S R20W            AP 5 / AP 3            L 16 / L 17            S21            1954         </div>
	Thence, N. $21^{\circ} 36'$ W., beginning new measurement.
12.44	To intersect the E. and W. centerline of the SE $\frac{1}{4}$ of Sec. 21 at monument previously set and described. Thence, N. $21^{\circ} 36'$ W., beginning new measurement bet. Lots 12 and 13.
8.12	To intersection with the N. and S. centerline of Sec. 21. Monument previously set and described. Thence, N. $26^{\circ} 38'$ W., bet. Lots 14 and 15. Begin new measurement.
13.92	To intersection with the E. and W. centerline of Sec. 21. Monument previously set and described. Thence, N. $24^{\circ} 39'$ W., beginning new measurement bet. Lots 7 and 22.
11.02	To angle points 4 of Lot 21 and 1 of Lot 22. Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.

CHAINS	
	T8S R20W AP 4 / L 7 L 21 / AP 1 L 22 / S21 . 1954 .
	Thence, N. 24° 39' W., new measurement bet. Lots 7 and 21.
11.02	To intersect the E. and W. centerline of the NW $\frac{1}{4}$ of Sec. 21 at the monument previously set and described.
	Thence, N. 13° 10' W., beginning new measurement bet. Lots 2 and 3.
8.56	Angle points 4 of Lot 2 and 4 of Lot 3.
	Set iron post 3 ft. long, 1 in. diam., 8 in. out of ground with brass cap mkd.
	T8S R20W AP 4 / AP 4 L 3 / L 2 S21 . 1954 .
	Thence, N. 17° 10' W., new measurement.
8.74	Intersect the N. and S. centerline of the NW $\frac{1}{4}$ of Sec. 21 at monument previously described.
	Thence, N. 24° 21' W., new measurement bet. Lots 4 and 5.
3.68	To intersect the line bet. Secs. 16 and 21 at the monument previously set and described.
	----- From the C&SNW 1/64 cor of Sec. 21 previously set and described.
	S. 89° 55' 09" E., bet. Lots 21 and 22 on the 1/64 line.
9.13	To monument set on left bank for angle points 4 of Lot 21 and 1 of Lot 22. /river

Note: The area of the Lots

Lot 1	4.54 acres	Lot 11	20.52 acres
Lot 2	31.44 acres	Lot 12	18.29 acres
Lot 3	4.04 acres	Lot 13	1.13 acres
Lot 4	0.26 acres	Lot 14	3.88 acres
Lot 5	39.79 acres	Lot 15	36.04 acres
Lot 7	21.36 acres	Lot 16	14.40 acres
Lot 8	0.36 acres	Lot 17	22.14 acres
Lot 9	3.24 acres	Lot 18	3.37 acres
Lot 10	36.79 acres	Lot 19	1.62 acres
		Lot 20	38.25 acres
		Lot 21	6.84 acres
		Lot 22	11.45 acres

-----

CERTIFICATE OF CADASTRAL ENGINEER

I, Albin H. Wadin Bureau of Reclamation, HEREBY CERTIFY upon honor that, under authority of Departmental Instructions of October 24, 1906. I have surveyed the N1/2 of Section 6, E1/2 of Section 7, W1/2 of Section 17, NE1/4 of Section 20 and all of Section 21, Township 8 South, Range 20 West

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with the Manual of Instructions for the Survey of Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Yuma, Arizona  
November 30, 1954

Albin H. Wadin  
General Engineer, U.S.B.R.

CERTIFICATE OF APPROVAL

Bureau of Reclamation  
Washington, D. C. MAR 17 1955, 19

The foregoing field notes of the survey of the N1/2 of Section 6, E1/2 of Section 7, E1/2 of Section 17, NE1/4 of Section 20 and all of Section 21, Township 8 South, Range 20 West, Gila and Salt River Meridian, Arizona

executed by Albin H. Wadin  
having been critically examined and found correct, are hereby approved.

E. Nielsen  
Assistant Commissioner

CERTIFICATE OF TRANSCRIPT

Bureau of Land Management  
Washington, D. C. \_\_\_\_\_ 19

I CERTIFY that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_  
\_\_\_\_\_ is a true copy of the original field notes.