

BOOK 4846
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



FIELD NOTES

DEPENDENT RESURVEY

of a

Portion of the WEST BOUNDARY

and a

Portion of the SUBDIVISIONAL LINES

and

SURVEY

of

SUBDIVISIONS

in Sections 5 and 8

Township 11 North, Range 2 East

and

RETRACEMENT

of a

Portion of the CENTRAL and CENTRAL GEORGE LODES

Mineral Survey No. 1914

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Gary T. Oviatt, Cadastral Surveyor

Louis D. Gilbert, Cadastral Surveyor


Under special instructions dated May 19, 19 67, which provided for the surveys
included under Group Number 454, approved May 19, 1967,
and assignment instructions dated May 19, 19 67.

Survey commenced May 25, 19 67

Survey completed June 12, 19 67

BOOK 4846
INDEX DIAGRAM

Township 11 North, Range 2 East,

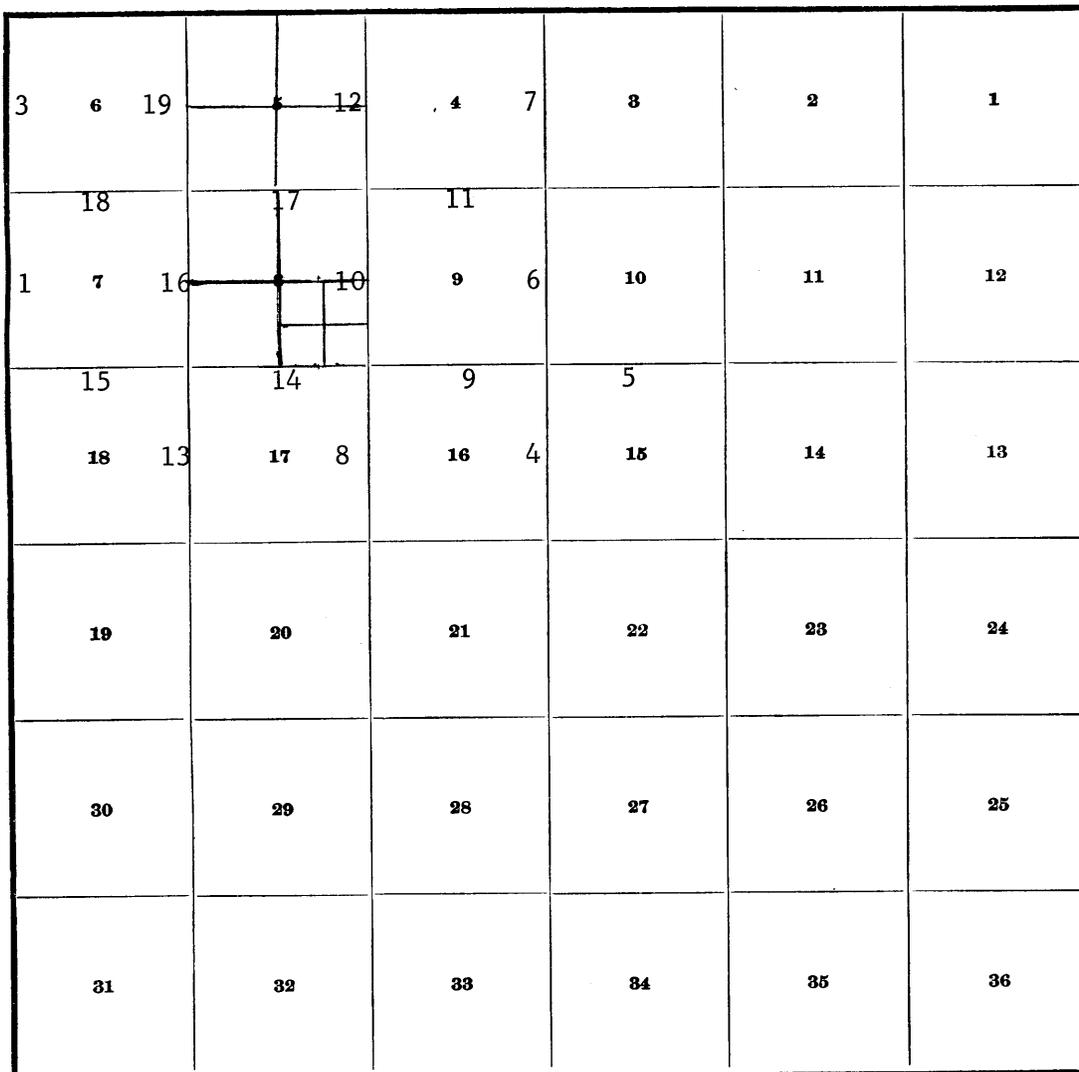

Subdivision of Section 5 - Page 20
 Subdivision of Section 8 - Page 22
 Mineral Survey No. 1914 - Page 25
 General Description - Page 26

Township 11 North, Range 2 East
Gila and Salt River Meridian, Arizona

CHAINS

The north three miles of the east boundary were surveyed in 1873 by C. B. Foster; the south three miles of the east boundary were surveyed by L. Wolfley in 1884 and resurveyed in 1916 by W. H. Richards, Jr.; the north three miles of the east boundary were resurveyed in 1952 by C. E. Bilbray. The north boundary was surveyed in 1873 by C. B. Foster and resurveyed by H. L. Baldwin in 1918; the east three miles of the north boundary were resurveyed in 1952 by C. E. Bilbray. The north three miles of the west boundary were surveyed in 1873 by C. B. Foster; the south three miles of the west boundary were surveyed and the north three miles of the west boundary were resurveyed in 1916 by W. H. Richards, Jr. The south boundary was surveyed in 1916 by W. H. Richards, Jr., and resurveyed in 1923 by W. B. Kimmel. The north half of the township was subdivided in 1873 by C. B. Foster and the south half of the township was subdivided in 1916 by W. H. Richards, Jr. A portion of the subdivisional lines were resurveyed and sections 14 and 23 were subdivided in 1952 by C. E. Bilbray.

The following field notes are those of a dependent resurvey of a portion of the west boundary and a portion of the subdivisional lines, designed to restore the corners in their true original location according to the best available evidence, and a survey of subdivisions in sections 5 and 8, Township 11 North, Range 2 East, Gila and Salt River Meridian, Arizona, and a retracement of a portion of the Central and Central George Lodes, Mineral Survey No. 1914.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated May 19, 1967.

Only the true line bearings and horizontal distances for the surveyed lines are given in these field notes. Unless described, each corner was monumented with a standard iron post, 30 inches long, 2½ inches in diameter, flanged at the base, and with a brass cap riveted to the top.

The geographic position of the southeast corner of section 16, as scaled from U.S.G.S. quadrangle "Mayer, Arizona," dated 1947, is: Latitude 34°19'35" North, and Longitude, 112°08'47" West.

The mean magnetic declination was found to be 15° East.

Dependent Resurvey, Portion of the West Boundary,
T. 11 N., R. 2 E., Arizona

Reestablishment of the Resurvey
Executed by W. H. Richards in 1916

From the cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented by an iron post, 3 ins. in diam., set, mkd. and witnessed as described in the official record of the 1952 resurvey.

N. 0°01' W., along the W. bdy. of sec. 7.

Over rolling land, through scattered timber, along fence line.

Dep. Resurvey, Portion, W. Bdy., T. 11 N., R. 2 E., Arizona

CHAINS

- 7.90 Wash, 10 lks. wide, 2 ft. deep, drains N. 35° E.
- 11.90 Wash, 5 lks. wide, 2 ft. deep, drains S. 60° E.
- 19.50 Top of ridge, bears E. and W.
- 28.00 Track road, bears E. and W.
- 28.30 Wash, 15 lks. wide, 3 ft. deep, drains E.
- 38.90 Cor. of fences, bears South and N. 23°30' W.
- 40.02 The ¼ sec. cor. of sec. 7, monumented by a granite stone, 12 x 8 x 5 ins., firmly set, mkd. ¼ on W. face, with mound of stone E.

At the cor. point

Set the iron post, 18 ins. in the ground, rock collar to top, brass cap mkd.

T11½N	T11N
R1E	R2E
	¼
	S 7

1967

 Deposit the orig. cor. stone alongside the iron post.

 The cor. is located 45 lks. East of a fence bearing S. 23°30' E. and N. 23°30' W.

 N. 0°01' W., beginning new measurement.

 Over rolling land, through scattered timber.
- 17.00 Head of draw, drains E.
- 27.02 Cor. of fences, bears East, 2 lks. dist.; fences bear N., S. 45° W., and W., thence, along west side of fence bearing N.
- 29.40 Power line, bears S. 60° E. and N. 60° W.
- 34.70 Wash, 10 lks. wide, 3 ft. deep, drains NE.
- 40.05 The cor. of secs. 6 and 7, monumented by a malpais stone, 12 x 8 x 5 ins., firmly set with mound of stone E., mkd. with 1 notch on N. and 5 notches on S. faces.

At the cor. point

Set the iron post, 18 ins. in the ground, brass cap mkd.

T11½N	T11N
R1E	R2E
S 25	S 6
	S 7

1967

 Deposit the orig. cor. stone alongside the iron post.

CHAINS													
	<p>Raise a mound of stone E. of the corner.</p> <p>The cor. is located 4 lks. West of a fence bearing N. and S.</p> <p>Land, rolling. Soil, rocky, sandy loam. Timber, scattered scrub cedar. Undergrowth, bunch grass, sagebrush, mesquite and cacti.</p>												
	<p>N. 0°01' W., along the W. bdy. of sec. 6.</p> <p>Over rolling land, along west side of fence line.</p>												
4.30	Wash, 3 lks. wide, 1 ft. deep, drains E.												
32.50	Track road, bears SE. and NW.												
34.00	Power line, bears SE. and NW.												
40.01	<p>The ¼ sec. cor. of sec. 6, monumented by a malpais stone, 12 x 12 x 5 ins., firmly set with mound of stone E., mkd. ¼ on W. face.</p> <p>At the corner point</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T11½N</td> <td> </td> <td>T11N</td> </tr> <tr> <td>R1E</td> <td> </td> <td>R2E</td> </tr> <tr> <td></td> <td> </td> <td>¼</td> </tr> <tr> <td></td> <td> </td> <td>S 6</td> </tr> </table> <p>1967</p> </div> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>The cor. is located 3 lks. West of a fence bearing irregularly N. and S.</p> <hr style="width: 10%; margin: 10px auto;"/> <p>N. 0°01' W., beginning new measurement.</p> <p>Over rolling land, along fence line bearing irreg. N.</p>	T11½N		T11N	R1E		R2E			¼			S 6
T11½N		T11N											
R1E		R2E											
		¼											
		S 6											
6.00	Telephone line, bears N. 70° E. and S. 70° W.												
13.00	Hackberry Creek (dry), drains SE.												
32.20	Cor. of fences, bears West, 6 lks. dist.; fences bear N. 45° E., irreg. S. and W.												
32.30	Fence, bears NE. and SW.												
36.20	Bladed road, bears S. 20° E. and N. 50° W.												
40.06	<p>The cor. of Tps. 11, 11½ and 12 N., Rs. 1 and 2 E., monumented by a malpais stone, 30 x 12 x 8 ins., firmly set in a mound of stone, mkd. with 2 notches on N. face; no other marks visible.</p> <p>At the corner point</p>												

CHAINS

Set the iron post 18 ins. in the ground, rock collar to top, brass cap mkd.

T12N
R1E R2E
S 36 S 31
S 24 S 6
T11½N T11N

1967

from which

Cor. of fences bears N. 56°19' E., 11 lks. dist.; fences bear E., irreg. S. and W.

Deposit the orig. cor. stone alongside the iron post.

Land, rolling.

Soil, rocky, sandy loam.

Timber, widely scattered scrub cedar.

Undergrowth, bunch grass, sagebrush, mesquite and cacti.

Dependent Resurvey, Portion of the Subdivisional Lines, T. 11 N., R. 2 E., Arizona

Reestablishment of the Survey
Executed by C. B. Foster in 1873

The cor. of secs. 15 and 16, monumented by a limestone, 18 x 12 x 8 ins., firmly set, mkd. with 3 notches on E. and N. edges.

At the corner point

Set the iron post 22 ins. in the ground, brass cap mkd.

T11N R2E
S 16 S 15
S 21

1967

from which

The closing cor. of secs. 21 and 22, bears S. 88°44' E., 1.56 chs. dist., monumented by an iron post, 2 ins. in diam., set, mkd. and witnessed as described in the official record of the 1916 survey.

Deposit the orig. cor. stone alongside the iron post.

Raise a mound of stone N. of the cor.

N. 0°01' E., bet. secs. 15 and 16.

Over rolling land, asc. S. slope.

5.40 Top of low ridge, bears N. 65° E. and S. 65° W.; desc. N. slope.

25.00 Wash, 10 lks. wide, 3 ft. deep, drains E.; asc. S. slope.

34.80 Top of spur, slopes W.; desc. gentle N. slope.

40.62 Point for the ¼ sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.

CHAINS	
	<p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p>
	<p style="text-align: center;">T11N R2E</p>
	<p style="text-align: center;">S 16 ¹/₄ S 15</p>
	<p style="text-align: center;">1967</p>
	<p>Asc. gentle SW. slope.</p>
50.50	<p>Top of hill extends irreg. SE. and NW.; desc. gentle NE. slope.</p>
69.00	<p>Power line, bears S. 85° E. and N. 85° W.</p>
79.20	<p>Center of Big Bug Creek (dry), 80 lks. wide, 4 ft. deep, drains E., curving S., asc. steep S. slope.</p>
81.24	<p>Point for the cor. of secs. 9, 10, 15 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T11N R2E</p>
	<p style="text-align: center;">S 9 S 10</p>
	<p style="text-align: center;">S 16 S 15</p>
	<p style="text-align: center;">1967</p>
	<p>Set a squared mesquite post, 4 ins. diam., 4½ ft. long, alongside the iron post.</p>
	<p>Land, rolling.</p>
	<p>Soil, rocky, sandy loam.</p>
	<p>Timber, none.</p>
	<p>Undergrowth, bunch grass, sagebrush, mesquite and cacti.</p>
	<p>From the cor. of secs. 10, 11, 14 and 15, monumented by an iron post, set, mkd. and witnessed as described in the official record of the survey of subdivision in sec. 14, in 1952.</p>
	<p>N. 89°03' W., bet. secs. 10 and 15.</p>
	<p>Asc. over gently rolling land.</p>
25.00	<p>Telephone line, bears S. 47° E. and N. 47° W.</p>
28.10	<p>Right-of-way fence, bears S. 47° E. and N. 47° W.</p>
30.30	<p>Arizona State Highway No. 69, bears S. 47° E. and N. 47° W.</p>
32.00	<p>Track road, bears S. 47° E. and N. 47° W.</p>
32.60	<p>Right-of-way fence, bears S. 47° E. and N. 47° W.; desc. over gently rolling land.</p>
40.06	<p>Point for the ¼ sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

BOOK 4846

6.

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R. 2 E., Arizona

CHAINS		
	<p>Set the iron post 13 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4}$ $\frac{S}{S}$ $\frac{10}{15}$ 1967</p>	
42.40	Track road, bears N. and S.	
58.70	Top of low spur, slopes S.	
63.30	Leave rolling land; enter nearly level land.	
63.80	Wash, 10 lks. wide, 4 ft. deep, drains S.	
67.70	Track road, bears SE. and NW.; enter moderate mesquite.	
77.70	Fence, barbed wire, bears N. 25° E. and S. 25° W.	
80.12	<p>The cor. of secs. 9, 10, 15 and 16.</p> <p>Land, gently rolling to nearly level. Soil, sandy loam. Timber, none. Undergrowth, bunch grass, sagebrush, mesquite, cat claw and cacti.</p>	
	<p>N. 0°08' E., bet. secs. 9 and 10.</p> <p>Over rolling land, through moderate mesquite.</p>	
8.60	Wash, 5 lks. wide, 3 ft. deep, drains S. 60° E.	
8.90	Track road, bears S. 60° E. and N. 60° W.; leave moderate mesquite.	
33.52	Right-of-way fence, bears S. 67° E. and N. 67° W.	
35.17	Arizona State Highway No. 69, bears S. 67° E. and N. 67° W.	
36.82	Right-of-way fence, bears S. 67° E. and N. 67° W.	
39.15	Telephone line, bears S. 76°15' E. and N. 76°15' W.	
40.62	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4}$ S 9 S 10 1967</p>	
51.70	Track road, bears S. 20° E. and N. 20° W., curving N. 45° W.	
63.80	Wash, 5 lks. wide, 6 ft. deep, drains NE.	
69.60	Track road, bears N. 50° E. and S. 50° W.	

Dep. Resurvey, Portion, Subdivisional Lines, T.11N.,R.2E.,Arizona

CHAINS	
77.30	Wash, 20 lks. wide, drains E.
81.24	<p>Point for the cor. of secs. 3, 4, 9 and 10, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\begin{array}{c c} S & 4 \\ \hline S & 9 \end{array} \begin{array}{c c} S & 3 \\ \hline S & 10 \end{array}$ 1967</p> <p>from which</p> <p>The cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., bears S. 89°17' E., 240.56 chs. dist., monumented by an iron post, 2 ins. in diam., set, mkd. and witnessed as described in the official record of the dependent resurvey in 1952.</p> <p>This control line was fully retraced and careful search was made for evidence of intervening corners, none of which were found.</p> <p>Land, rolling. Soil, sandy, gravelly loam. Timber, none. Undergrowth, bunch grass, cat claw and sagebrush.</p>
	N. 0°03' E., bet. secs. 3 and 4.
	Over rolling land, asc. gentle S. slope.
2.99	Cor. of fences, bears West 67 lks. dist., fences bear N. 0°14' E. and E.
7.00	Top of ridge, bears E. and W.
13.20	Wash, 20 lks. wide, 3 ft. deep, drains E.
20.50	Wash, 5 lks. wide, 3 ft. deep, drains SE.
26.40	Top of ridge, bears SE. and NW.
38.20	Wash, 50 lks. wide, 5 ft. deep, drains S. 45° E.
40.62	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4}$ $\begin{array}{c c} S & 4 \\ \hline S & 3 \end{array}$ 1967</p> <p>from which</p> <p>A windmill, bears N. 28°35' E., 8.10 chs. dist.</p> <p>A fence line, bears West, 61 lks. dist., fence bears N. 0°14' E. and S. 0°14' W.</p>

BOOK 4846

8.

Dep. Resurvey, Portion, Subdivisional Lines, T.11N., R.2 E., Arizona

CHAINS	
49.10	Top of ridge, bears S. 75° E. and N. 75° W.
49.30	Track road, bears S. 73° E. and N. 73° W.
57.20	Wash, 10 lks. wide, 4 ft. deep, drains E.
63.30	Cor. of fences, bears West, 40 lks. dist.; fences bear N., S. and W. and top of ridge, bears E. and W.
73.80	Wash, 30 lks. wide, 2 ft. deep, drains E.
80.10	Fence, barbed wire, bears E. and W.
80.70	Bladed road, bears NE. and SW.
81.18	Telephone line, bears E. and W.
81.24	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented by an iron post, 2 ins. in diam., set, mkd. and witnessed as described in the official record of the dependent resurvey in 1918.
	Land, rolling. Soil, sandy, gravelly loam. Timber, none. Undergrowth, bunch grass, cat claw and sagebrush.
	The cor. of secs. 16 and 17, monumented by a granite stone, 18 x 8 x 6 ins., mkd. with 4 notches on E. face and 2 notches on W. face, firmly set with mound of stone N.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	$\begin{array}{c} T11N R2E \\ \hline S 17 S 16 \\ \hline S 20 \end{array}$
	1967
	from which
	The closing cor. of secs. 20 and 21, bears S. 88°44' E., 1.52 chs. dist., monumented by an iron post, 2 ins. in diam., set, mkd. and witnessed as described in the official record of the survey in 1916.
	A fence line, bears South, 4 lks. dist.; fence bears E. and W.
	N. 0°01' W., bet. secs. 16 and 17.
	Over gently rolling land, asc. S. slope.
0.11	Cor. of fences, bears West, 5 lks. dist.; fences bear irreg. E. and N. 20° W.
9.40	Top of ridge, bears E. and W.; continue over gently rolling land.
15.30	Wash, 10 lks. wide, 3 ft. deep, drains NE.
15.40	Underground gas line, bears S. 35° E. and N. 35° W.

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

<p>CHAINS 15.65</p>	<p>Fence, barbed wire, bears E. and W.</p>
<p>31.80</p>	<p>Wash, 10 lks. wide, 4 ft. deep, drains N. 75° E.</p>
<p>40.43</p>	<p>Point for the ¼ sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T11N R2E S 17^¼ S 16 1967</p> <p>Set an iron pipe, 3 ins. in diam., 4 ft. long, alongside the iron post.</p>
<p>42.00</p>	<p>Wash, 15 lks. wide, 9 ft. deep, drains N. 75° E.; asc. gentle S. slope.</p>
<p>44.00</p>	<p>Power line, bears S. 46° E. and N. 46° W.</p>
<p>44.30</p>	<p>Track road, bears S. 46° E. and N. 46° W.</p>
<p>61.00</p>	<p>Top of ridge, bears E. and W.; desc. gentle N. slope.</p>
<p>80.16</p>	<p>Power line, bears E. and W.</p>
<p>80.30</p>	<p>Wash, 5 lks. wide, 5 ft. deep, drains E.</p>
<p>80.86</p>	<p>Point for the cor. of secs. 8, 9, 16 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E S 8 S 9 S17 S16 1967</p> <p>from which</p> <p style="padding-left: 40px;">SW. cor. of house, bears N. 88°28' E., 11.82 chs. dist.; NW. cor. of shed, bears S. 82°58' E., 12.70 chs. dist.</p> <p>Land, rolling. Soil, rocky, sandy loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.</p> <hr/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>N. 88°59' W., bet. secs. 9 and 16.</p> <p>Over nearly level land, through dense undergrowth.</p>
<p>7.80</p>	<p>Fence, bears N. and S., and cor. of fences, bears South, 90 lks. dist.; fences bear N., E., S. and W.</p>
<p>8.30</p>	<p>Wash, 30 lks. wide, 7 ft. deep, drains S. 30° E.</p>
<p>24.10</p>	<p>Leave dense undergrowth; thence over gently rolling land.</p>

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

CHAINS	
38.10	Enter scattered cat claw and mesquite.
40.06	Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor. Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd. T11N R2E $\frac{1}{4} \frac{S 9}{S 16}$ 1967
46.70	Big Bug Creek (dry), 1.90 chs. wide, 5 ft. deep, drains S.
55.80	Fence, bears irreg. SE. and NW.
64.80	Power line, bears S. 75° E. and N. 75° W.
66.70	Fence, bears S. 40° E. and N. 40° W.
67.50	Track road, bears irreg. N. and S.
68.80	Fence, bears S. 40° E. and N. 40° W.
80.12	The cor. of secs. 8, 9, 16 and 17. Land, nearly level to gently rolling. Soil, rocky, sandy loam. Timber, none. Undergrowth, bunch grass, cacti, cat claw and mesquite.
	N. 0°03' E., bet. secs. 8 and 9. Over gently rolling land.
2.75	Track road, bears E. and W.
4.20	Track road, bears S. 70° E. and N. 70° W.
6.10	Power line, bears N. 25° E. and S. 25° W.
8.00	Wash, 5 lks. wide, 2 ft. deep, drains E.
11.60	Fence, bears SE. and NW.
17.50	Ditch, 5 lks. wide, 1 ft. deep, drains S. 45° E.
20.215	Point for the S $\frac{1}{16}$ sec. cor. of secs. 8 and 9. Set the iron post 24 ins. in the ground, brass cap mkd. T11N R2E S $\frac{1}{16}$ S 8 S 9 1967
22.40	Raise a mound of stone W. of the cor. Hackberry Creek (dry), 30 lks. wide, 3 ft. deep, drains S. 45° E.

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

<p>CHAINS 25.90</p>	<p>Irrigation canal, 15 lks. wide, 3 ft. deep, drains S. 30° E.</p>
<p>34.60</p>	<p>Big Bug Creek (dry), 45 lks. wide, 5 ft. deep, drains E., 4.00 chs. dist., thence S. 45° E.</p>
<p>40.43</p>	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T11N R2E 1/4 S 8 S 9 1967</p> <p>Set a wooden post, 3 ins. in diam., 4 ft. long, alongside the iron post.</p>
<p>46.30</p>	<p>Track road, bears S. 45° E. and N. 45° W.</p>
<p>55.00</p>	<p>Wash, 15 lks. wide, 2 ft. deep, drains S. 45° W.</p>
<p>64.36</p>	<p>Highway right-of-way marker, bears East, 35 lks. dist., mkd. ST 3401 + 34.54.</p>
<p>66.94</p>	<p>Right-of-way fence, bears S. 44° E. and N. 44° W.</p>
<p>69.10</p>	<p>Arizona State Highway No. 69, bears S. 44° E. and N. 44° W.</p>
<p>71.26</p>	<p>Right-of-way fence, bears S. 44° E. and N. 44° W.</p>
<p>73.30</p>	<p>Telephone line, bears S. 44° E. and N. 44° W.</p>
<p>78.80</p>	<p>Cor. of fences, bears East, 6 lks. dist., fences bear S. 45° E., N. 3° W.</p>
<p>79.80</p>	<p>Fence, bears S. 3° E. and N. 3° W.</p>
<p>80.86</p>	<p>Point for the cor. of secs. 4, 5, 8 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E S 5 S 4 S 8 S 9 1967</p> <p>from which</p> <p style="padding-left: 40px;">A fence, bearing N. 3° W. and S. 3° E., bears west 6 lks. dist.</p> <p>Set a wooden post, 2 ins. in diam., 3 ft. long, alongside the iron post.</p> <p>Land, rolling and gently rolling. Soil, rocky, sandy loam. Undergrowth, bunch grass, cacti, cat claw and brigham tea</p> <hr/> <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>N. 89°17' W., bet. secs. 4 and 9.</p>

Dep. Resurvey, Portion, Subdivisional Lines, T.11N.,R.2. E.,Arizona

CHAINS	
	Over rolling land.
13.70	Wash, 10 lks. wide, 1 ft. deep, drains S. 85° E.
19.30	Wash, 5 lks. wide, 2 ft. deep, drains NE.
24.20	Top of spur, slopes N. 30° E.
27.40	Wash, 8 lks. wide, 2 ft. deep, drains NE.
34.00	Top of ridge, bears SE. and NW.; desc. gentle SW. slope.
36.40	Bladed road, bears SE. and NW.
40.09	Point for the ¼ sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.
	T11N R2E ¼ $\frac{S}{S}$ $\frac{4}{9}$ 1967
50.80	Wash, 20 lks. wide, 4 ft. deep, drains SE.
61.30	Top of ridge, bears SE. and NW.
73.90	Wash, 20 lks. wide, 5 ft. deep, drains S.
80.18	The cor. of secs. 4, 5, 8 and 9.
	Land, rolling. Soil, sandy, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.
	N. 0°01' W., bet. secs. 4 and 5.
	Over rolling land.
7.10	Top of ridge, bears SE. and NW.
20.215	Point for the S 1/16 sec. cor. of secs. 4 and 5.
	Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.
	T11N R2E S 1/16 S 5 S 4 1967
25.10	Top of ridge, bears SE. and NW.
35.90	Top of ridge and track road, bears S. 80° E. and N. 80° W.
40.43	Point for the ¼ sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the orig. cor.

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

CHAINS

Set the iron post, 16 ins. in the ground, mound of stone to top, brass cap mkd.

T11N R2E

$$\begin{array}{c} \frac{1}{2} \\ S \ 5 \ | \ S \ 4 \\ 1967 \end{array}$$

43.80 Wash, 10 lks. wide, 3 ft. deep, drains E.; asc. S. slope.

48.30 Top of ridge, bears E. and W.; desc. N. slope.

50.10 Fence, bears E. and W., and cor. of fences, bears West, 20 lks. dist.; fences bear E. and S. 45° W.

55.30 Wash, 10 lks. wide, 4 ft. deep, drains N. 80° E.; asc. S. slope.

59.30 Top of ridge, bears E. and W.; desc. N. slope.

64.80 Wash, 10 lks. wide, 4 ft. deep, drains S. 80° E.

70.90 Bladed road, bears E. and W.

76.20 Wash, 10 lks. wide, 2 ft. deep, drains E.; asc. S. slope.

80.86 The cor. of secs. 4 and 5, monumented by an iron post, 2 ins. in diam., set, mkd. and witnessed as described in the official record of the dependent resurvey in 1918. In fence line bearing E. and W.

from which

Cor. of fences, bears West, 3.5 lks. dist.; fences bear N., E. and W.

Land, rolling.

Soil, rocky, clay loam.

Timber, none.

Undergrowth, bunch grass, cacti, cat claw and brigham tea.

The cor. of secs. 17 and 18, monumented by a malpais stone, 16 x 10 x 5 ins., firmly set with mound of stone N., mkd. with 3 notches on N. face and 5 notches on E. face.

At the cor. point

Set the iron post 22 ins. in the ground, brass cap mkd.

$$\begin{array}{c} T11N \ R2E \\ S \ 18 \ | \ S \ 17 \\ S \ 19 \\ 1967 \end{array}$$

from which

The closing cor. of secs. 19 and 20, bears S. 88°44' E., 1.67 chs. dist., monumented by a malpais stone, set, mkd. and witnessed as described in the official record of the survey in 1916.

Bury the orig. cor. stone alongside the iron post.

N. 0°03' W., bet. secs. 17 and 18.

Asc. over gently rolling land.

Dep. Resurvey, Portion, Subdivisional Lines, T.11N., R.2 E., Arizona

<p>CHAINS 5.90</p>	<p>Antelope Creek, 25 lks. wide, 3 ft. deep, drains E.</p>
<p>18.40</p>	<p>Top of spur, slopes SE.</p>
<p>40.19</p>	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 4 ins. in the ground over "X" chiseled on bedrock, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4}$ S 18 S 17 1967</p>
<p>41.50</p>	<p>Wash, 15 lks. wide, 3 ft. deep, drains SE.</p>
<p>60.10</p>	<p>Telephone line, bears S. 17°30' E. and N. 17°30' W.</p>
<p>63.00</p>	<p>Fence, bears S. 45° E. and N. 45° W.</p>
<p>64.50</p>	<p>Gravelled road, bears S. 40° E. and N. 60° W.</p>
<p>74.40</p>	<p>Power line, bears E. and W.</p>
<p>75.30</p>	<p>Track road, bears E. and W.</p>
<p>79.10</p>	<p>Fence, bears S. 70° E. and N. 70° W.</p>
<p>80.38</p>	<p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E <u>S 7 S 8</u> S18 S17 1967</p> <p>Land, rolling. Soil, rocky, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.</p>
<p>From the cor. of secs. 8, 9, 16 and 17.</p>	
<p>N. 89°07' W., bet. secs. 8 and 17.</p>	
<p>Over rolling land.</p>	
<p>1.70</p>	<p>Wash, 5 lks. wide, 3 ft. deep, drains S. 80° E.</p>
<p>20.03</p>	<p>Point for the E 1/16 sec. cor. of secs. 8 and 17.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T11N R2E E $\frac{1}{16}$ <u>S 8</u> S17 1967</p>

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

CHAINS	
	Set a wooden post, 2 ins. in diam., 4 ft. long, alongside the iron post.
24.30	Fence, bears N. and S.
34.30	Bladed road, bears N. 50° E. and S. 50° W.
37.70	Track road, bears S. 46° E. and N. 46° W.
39.00	Power line, bears S. 46° E. and N. 46° W.
40.06	Point for the ¼ sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set the iron post, 20 ins. in the ground, brass cap mkd.
	T11N R2E $\frac{1}{4} \frac{S 8}{S 17}$ 1967
	Raise a mound of stone N. of the cor.
46.10	Underground gas line, bears S. 35° E. and N. 35° W.
50.20	Bladed road, bears S. 70° E. and N. 70° W.
53.90	Wash, 5 lks. wide, 3 ft. deep, drains S. 10° E.
57.70	Wash, 15 lks. wide, 3 ft. deep, drains SE.
64.20	Bladed road, bears NE. and SW.
65.30	Fence, bears NE. and SW.
77.60	Cor. of fences, bears South, 200 lks. dist.; fences bear N., E. and W.
80.12	The cor. of secs. 7, 8, 17 and 18.
	Land, rolling. Soil, rocky, sandy loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.
	N. 89°02' W., bet. secs. 7 and 18.
	Over rolling land, along fence line.
4.19	Telephone line, bears S. 4° E. and N. 4° W.
14.50	Cor. of fences, bears South, 22 lks. dist.; fences bear E., S. 45° W. and W.
16.00	Wash, 10 lks. wide, 1 ft. deep, drains S. 60° W.
20.10	Bladed road, bears S. 56° E. and N. 56° W.
24.50	Wash, 20 lks. wide, 3 ft. deep, drains S.
39.75	Track road, bears N. 10° E. and S. 10° W.
40.06	Point for the ¼ sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

CHAINS	
78.83	<p>Set the iron post, 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4}$ $\frac{S}{S}$ $\frac{7}{18}$ 1967</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. of secs. 7 and 18, on the W. bdy. of the Tp.</p> <p>Land, rolling. Soil, rocky, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.</p>
13.00	<p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0°01' W., bet. secs. 7 and 8.</p> <p>Over rolling land.</p> <p>Wash, 5 lks. wide, 2 ft. deep, drains E.</p> <p>21.00 Top of low ridge, bears E. and W.</p> <p>29.60 Wash, 5 lks. wide, 1 ft. deep, drains E.</p> <p>35.30 Top of low ridge, bears E. and W.; desc. N. slope.</p> <p>39.20 Power line, bears S. 54° E. and N. 54° W.</p> <p>39.60 Track road, bears S. 46° E. and N. 46° W.</p> <p>40.19 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post, 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4}$ $\frac{S}{S}$ $\frac{7}{8}$ 1967</p>
44.70	<p>Hackberry Creek (dry), 50 lks. wide, 3 ft. deep, drains E.</p>
46.90	<p>Track road, bears E. and W.</p>
50.10	<p>Fence, bears E. and W.; cor. of fences bears East, 90 lks. dist.; fences bear N. 45° E. and W.</p>
54.60	<p>Prospect Hole, 8 ft. square, 4 ft. deep.</p>
57.80	<p>Underground gas line, bears S. 29° E. and N. 29° W.</p>
60.285	<p>Point for the N 1/16 sec. cor. of secs. 7 and 8.</p> <p>Set the iron post, 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E N 1/16 $\frac{S}{S}$ $\frac{7}{8}$ 1967</p>

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

CHAINS	
61.90	Wash, 20 lks. wide, 3 ft. deep, drains SE.
63.70	Wash, 20 lks. wide, 3 ft. deep, drains SE. from N.; thence up wash.
70.70	Wash, 10 lks. wide, 2 ft. deep, drains S. from N. 45° W.; leave wash.
72.80	Wash, 10 lks. wide, 2 ft. deep, drains SW., asc. N. slope.
80.38	Point for the cor. of secs. 5, 6, 7 and 8, at propor- tionate dist.; there is no remaining evidence of the orig. cor.
	Set the iron post, 14 ins. in the ground, mound of stone to top, brass cap mkd.
	T11N R2E S 6 S 5 S 7 S 8 1967
	Land, rolling. Soil, rocky, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.
	From the cor. of secs. 4, 5, 8 and 9.
	N. 89°25' W., bet. secs. 5 and 8.
	Desc. over gently rolling land.
.06	Fence, bears N. 3° W., S. 3° E.
6.00	Fence, bears N. 10° E. and S. 10° W.
8.20	Telephone line, bears S. 44° E. and N. 44° W.
9.26	Right-of-way fence, bears S. 44° E. and N. 44° W.
11.40	Arizona State Highway No. 69, bears S. 44° E. and N. 44° W.
13.54	Right-of-way fence, bears S. 44° E. and N. 44° W.
15.10	Wash, 20 lks. wide, 2 ft. deep, drains S. 30° E.
18.70	Track road, bears SE. and NW.
20.045	Point for the E 1/16 sec. cor. of secs. 5 and 8.
	Set the iron post, 16 ins. in the ground, mound of stone to top, brass cap mkd.
	T11N R2E E 1 S 5 16 S 8 1967
21.90	Big Bug Creek (dry), 60 lks. wide, with banks 6 ft. deep, drains SE., asc. over gently rolling land.
29.80	Wash, 10 lks. wide, 2 ft. deep, drains N. 35° E.

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

<p>CHAINS 40.09</p>	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post, 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4} \frac{S \ 5}{S \ 8}$ 1967</p>
<p>47.10</p>	<p>Fence, bears N. and S.</p>
<p>55.40</p>	<p>Top of ridge, bears SE. and NW.; desc. along rolling S. slope.</p>
<p>61.60</p>	<p>Wash, 5 lks. wide, 2 ft. deep, drains S.</p>
<p>68.30</p>	<p>Top of spur, slopes S.</p>
<p>73.60</p>	<p>Wash, 5 lks. wide, 1 ft. deep, drains S.</p>
<p>75.10</p>	<p>Fence, bears N. and S.</p>
<p>76.20</p>	<p>Top of spur, slopes S.</p>
<p>80.18</p>	<p>The cor. of secs. 5, 6, 7 and 8.</p> <p>Land, rolling. Soil, rocky, sandy, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.</p>
	<p>N. 89°15' W., bet. secs. 6 and 7.</p> <p>Over rolling land.</p>
<p>4.80</p>	<p>Wash, 20 lks. wide, 2 ft. deep, drains S.</p>
<p>11.80</p>	<p>Underground gas line, bears S. 35° E. and N. 35° W.</p>
<p>25.10</p>	<p>Top of spur, slopes S. 10° E.</p>
<p>28.50</p>	<p>Telephone line, bears S. 26° E. and N. 26° W.</p>
<p>33.80</p>	<p>Fence, bears N. and S.</p>
<p>34.20</p>	<p>Hackberry Creek (dry), 40 lks. wide, 3 ft. deep, drains southerly.</p>
<p>39.30</p>	<p>Bladed road, bears SE. and NW.</p>
<p>40.09</p>	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set the iron post, 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T11N R2E $\frac{1}{4} \frac{S \ 6}{S \ 7}$ 1967</p>

Dep. Resurvey, Portion, Subdivisional Lines, T.11 N., R.2 E., Arizona

CHAINS	
43.36	Power line, bears S. 46° E. and N. 46° W.
44.00	Track road, bears S. 46° E. and N. 46° W.
63.10	Top of spur, slopes N.
72.40	Wash, 5 lks. wide, 1 ft. deep, drains NE.
78.79	Fence, bears N. and S.
78.83	The cor. of secs. 6 and 7, on the W. bdy. of the Tp. Land, rolling. Soil, rocky, sandy loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.
	From the cor. of secs. 5, 6, 7 and 8. North, bet. secs. 5 and 6. Asc. SW. slope.
2.16	Fence, bears E. and W.
27.10	Top of ridge, bears S. 55° E. and N. 55° W.; desc. N. slope.
40.19	Point for the ¼ sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the orig. cor. Set the iron post, 16 ins. in the ground, mound of stone to top, brass cap mkd. T11N R2E ¼ S 6 S 5 1967
41.10	Wash, 15 lks. wide, 2 ft. deep, drains E.; asc. S. slope.
49.40	Top of spur, slopes E.; desc. NE. slope.
61.30	Wash, 5 lks. wide, 2 ft. deep, drains NE.
69.60	Big Bug Creek (small stream of running water), drains E.
72.73	Right-of-way marker, bears West, 5 lks. dist., mkd. ST 3482 + 19.95.
74.92	Right-of-way fence, bears S. 53°30' E. and N. 53°30' W.
76.80	Arizona State Highway No. 69, bears S. 53°30' E. and N. 53°30' W.
77.30	Graded road, bears NE. and SW.
78.68	Right-of-way fence, bears S. 53°30' E. and N. 53°30' W.
80.58	The cor. of secs. 5 and 6, on the N. bdy. of the Tp., monumented by an iron post, 2 ins. diam., set in a mound of stone to the top, brass cap mkd. T12N S 6 S 5 T11N R2E 1918

Subdivision, Section 5, T. 11 N., R. 2 E., Arizona

CHAINS

from which

The closing cor. of secs. 31 and 32, T. 12 N., R. 2 E., bears N. 89°34' W., 177 lks. dist., monumented by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the dependent resurvey in 1918. (Record dist. 168 lks.)

U.S. Mineral Monument No. 1914, bears S. 75°08' W., 8.845 chs. dist., monumented by a malpais stone, 8 x 5 ins., with 8 ins. showing above the ground, mkd. US MM on the W. face and N 1914 on the E. face, with a mound of stone to the E.

Land, rolling.

Soil, rocky, sandy, clay loam.

Timber, none.

Undergrowth, bunch grass, cacti and cat claw, and mesquite.

Subdivision, Section 5, T. 11 N., R. 2 E., Arizona

From the 1/4 sec. cor. of secs. 5 and 8.

North, on the N. and S. center line of sec. 5.

Over rolling land.


3.95 Wash, 10 lks. wide, 2 ft. deep, drains E.

9.70 Top of spur, slopes S. 40° E.

16.30 Big Bug Creek (dry), 60 lks. wide, 4 ft. deep, drains S. 80° E.

20.17 Point for the C-S 1/16 sec. cor. of sec. 5.

Set the iron post, 16 ins. in the ground, mound of stone to top, brass cap mkd.



27.48 Right-of-way fence, bears S. 42°30' E. and N. 42°30' W.

29.72 Arizona State Highway No. 69, bears S. 42°30' E. and N. 42°30' W.


31.98 Right-of-way fence, bears S. 42°30' E. and N. 42°30' W.

33.10 Wash, 5 lks. wide, 3 ft. deep, drains S. 10° W.

34.40 Telephone line, bears S. 42°30' E. and N. 42°30' W.

40.34 Point for the C 1/4 sec. cor. of sec. 5.

Set the iron post, 14 ins. in the ground, mound of stone to top, brass cap mkd.



Subdivision, Section 5, T. 11 N., R. 2 E., Arizona

CHAINS	
47.30	Wash, 5 lks. wide, 1 ft. deep, drains SW.
54.80	Wash, 10 lks. wide, 2 ft. deep, drains SW.
59.10	Track road, bears N. 35° E. and SW.
66.90	Track road, bears S. 30° E. and NW.
68.70	Wash area, drains SE.
77.40	Bladed road, bears N. 80° E. and S. 80° W.
78.97	Telephone line, bears E. and W.
79.75	Intersect line 3-4 of the Central Lode, M.S. No. 1914. Cor. No. 4, bears S. 11°52' W., 9.18 chs. dist.
80.70	The $\frac{1}{4}$ sec. cor. of sec. 5 only, on the N. bdy. of the Tp., monumented by an iron post, 1 in. diam., set with 12 ins. showing above the ground, brass cap mkd.
	$\frac{1}{4} S 5$ 1918
	<p>from which</p> <p>A fence cor., bears N. 89°34' W., 162 lks. dist., fences bear S. 89°34' E., and S.</p> <p>The $\frac{1}{4}$ sec. cor. of sec. 32 only, T. 12 N., R. 2 E., bears N. 89°34' W., 172 lks. dist., (record dist. 175 lks.), monumented by an iron post, 1 in. diam., set in a mound of stone to the top, brass cap mkd.</p>
	$\frac{1}{4} S 32$ 1918
	<p>Land, rolling. Soil, rocky, sandy, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.</p> <p>N. 89°34' W., on the E. and W. center line of sec. 5.</p> <p>Over rolling land.</p> <p>4.70 Track road, bears SE. and NW.</p> <p>7.06 Fence, bears N. and S.</p> <p>9.40 Head of wash, drains S.</p> <p>14.20 Top of spur, slopes S.</p> <p>20.60 Wash, 5 lks. wide, 2 ft. deep, drains S.</p> <p>25.70 Top of spur, slopes S. 20° W.</p> <p>32.70 Wash, 5 lks. wide, 2 ft. deep, drains SW.</p> <p>40.10 The C $\frac{1}{4}$ sec. cor. of sec. 5.</p> <p>45.30 Telephone line, bears S. 42°30' E. and N. 42°30' W.</p>

Subdivision, Section 8, T. 11 N., R. 2 E., Arizona

<p>CHAINS 47.60</p>	<p>Right-of-way fence, bears S. 42°30' E. and N. 42°30' W.</p>
<p>49.60</p>	<p>Arizona State Highway No. 69, bears S. 42°30' E. and N. 42°30' W.</p>
<p>51.60</p>	<p>Right-of-way fence, bears S. 42°30' E. and N. 42°30' W.</p>
<p>52.40</p>	<p>Big Bug Creek (dry), 40 lks. wide, 4 ft. deep, drains S. 40° E.</p>
<p>80.17</p>	<p>The ¼ sec. cor. of secs. 5 and 6.</p> <p>Land, rolling. Soil, rocky, sandy, clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.</p>
<p>Subdivision, Section 8, T. 11 N., R. 2 E., Arizona</p>	
<p>From the ¼ sec. cor. of secs. 8 and 17.</p> <p>N. 0°01' E., on the N. and S. center line of sec. 8.</p> <p>Over nearly level land.</p>	
<p>1.00</p>	<p>Power line, bears S. 46° E. and N. 46° W.</p>
<p>2.70</p>	<p>Fence, bears E. and W.</p>
<p>14.80</p>	<p>Wash, 20 lks. wide, 3 ft. deep, drains E.</p>
<p>20.13</p>	<p>Point for the C-S 1/16 sec. cor. of sec. 8.</p> <p>Set the iron post, 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T11N R2E C S 1/16 S 8 C 1967</p> </div>
<p>24.10</p>	<p>Hackberry Creek (dry), 40 lks. wide, 3 ft. deep, drains SE.</p>
<p>30.50</p>	<p>Top of spur, slopes W.</p>
<p>40.26</p>	<p>Point for the C ¼ sec. cor. of sec. 8.</p> <p>Set the iron post, 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T11N R2E C ¼ + S 8 1967</p> </div>
<p>48.90</p>	<p>Wash, 5 lks. wide, 2 ft. deep, drains S. 65° E.</p>
<p>60.42</p>	<p>Point for the C-N 1/16 sec. cor. of sec. 8.</p> <p>Set the iron post, 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>C N 1/16 S 8 C 1967</p> </div>

Subdivision, Section 8, T. 11 N., R. 2 E., Arizona

CHAINS	
64.70	Top of ridge, bears E. and W.
65.80	Wash, 10 lks. wide, 2 ft. deep, drains E.
73.70	Fence, bears S. 60° E. and N. 60° W.
77.10	Top of spur, slopes E.
80.58	The ¼ sec. cor. of secs. 5 and 8. Land, rolling. Soil, rocky, sandy loam. Timber, none. Undergrowth, bunch grass, cacti, cat claw and hackberry.
	From the ¼ sec. cor. of secs. 8 and 9. N. 89°16' W., on the E. and W. center line of sec. 8. Over rolling land, through dense undergrowth.
5.70	Big Bug Creek (dry), 1.00 ch. wide, 7 ft. deep, drains S. 20° E.
6.90	Irrigation ditch, 15 lks. wide, 3 ft. deep, drains S. 20° E., and concrete header for irrigation ditch, bears North, 1.00 ch. dist.
8.00	Leave dense undergrowth.
17.80	Fence, bears N. and S.
20.03	Point for the C-E 1/16 sec. cor. of sec. 8. Set the iron post, 24 ins. in the ground, brass cap mkd. <div style="text-align: center;">T11N R2E C E 1/16 C S 8 1967</div>
20.70	Wash, 5 lks. wide, 2 ft. deep, drains SE.
29.30	Wash, 15 lks. wide, 5 ft. deep, drains SE.
40.06	The C ¼ sec. cor. of sec. 8.
54.20	Wash, 25 lks. wide, 4 ft. deep, drains S.
66.10	Wash, 50 lks. wide, 5 ft. deep, drains SE., for 1.00 ch. dist., thence E.
70.50	Underground gas line, bears S. 29° E. and N. 29° W.
74.16	Fence, bears N. and S.
80.11	The ¼ sec. cor. of secs. 7 and 8. Land, rolling. Soil, rocky, sandy clay loam. Timber, none. Undergrowth, bunch grass, cacti and cat claw.
	From the E 1/16 sec. cor. of secs. 8 and 17. N. 0°02' E., on the N. and S. center line of the SE ¼ of sec. 8. Over rolling land.
3.00	Track road, bears N. 80° E. and S. 80° W.
10.40	Fence, bears E. and W.
12.00	Fence, bears N. 10° E. and S. 10° W.
16.00	Wash, 30 lks. wide, 1 ft. deep, drains NE.

Subdivision, Section 8, T. 11 N., R. 2 E., Arizona

CHAINS	
17.00	Top of spur, slopes E., thence, through scattered undergrowth.
19.70	Hackberry Creek (dry), 1.00 ch. wide, with 20 ft. banks, drains S. 45° E. from N. 5° W.
20.13	Point for the SE 1/16 sec. cor. of sec. 8, falls in Hackberry Creek, where a monument cannot be perpetuated. from which The point selected for the witness SE 1/16 sec. cor. of sec. 8, bears S. 89°12' E., 15 lks. dist. Set the iron post, 22 ins. in the ground, brass cap mkd. T11N R2E W SE $\frac{1}{16}$ S 8 C $\frac{1}{16}$ 1967 Raise a mound of stone W. of the cor.
25.50	Left bank of Hackberry Creek, bears S. 5° E. and W.; leave scattered undergrowth.
36.50	Wash, 15 lks. wide, 4 ft. deep, drains E.
39.90	Wash, 5 lks. wide, 2 ft. deep, drains SE.
40.28	The C-E 1/16 sec. cor. of sec. 8.
<hr/>	
	From the S 1/16 sec. cor. of secs. 8 and 9. N. 89°12' W., on the E. and W. center line of the SE $\frac{1}{4}$ of sec. 8. Over rolling land, through scattered undergrowth.
3.30	Hackberry Creek (dry), 50 lks. wide, 3 ft. deep, drains N. 50° E.
4.60	Track road, bears SE. and NW.
19.54	Fence, bears N. and S.
19.88	The witness SE 1/16 sec. cor. of sec. 8.
20.03	True point for the SE 1/16 sec. cor. of sec. 8.
20.50	Hackberry Creek (dry), 1.00 ch. wide, with 20 ft. banks, drains S. 45° E. from N. 5° W.
21.60	Rim above creek, bears irregularly SE. and N. 25° W. Leave scattered undergrowth.
33.30	Hackberry Creek (dry), 50 lks. wide, 3 ft. deep, drains NE. from NW.
40.06	The C-S 1/16 sec. cor. of sec. 8.
<hr/>	

Subdivision, T. 11 N., R. 2 E., Arizona

CHAINS	
	<p>It was found necessary to retrace a portion of the Central and Central George Lodes of Mineral Survey No. 1914 in sec. 5, T. 11 N., R. 2 E., and in sec. 32, T. 12 N., R. 2 E., for the purpose of obtaining a closure within limits.</p>
	<hr/>
	<p>From Cor. No. 1, Central George Lode, M. S. No. 1914, monumented by a malpais stone, 4 x 12 x 26 ins., set in a mound of stone, mkd. with a 1 and 19 and other illegible marks.</p>
	<p>from which</p>
	<p>The cor. of secs. 5 and 6 on the N. bdy. of the Tp., bears N. 43°30' W., 24.98 chs. dist.</p>
	<p>Thence N. 15°15' E., on line 1-2 of the Central George Lode.</p>
18.60	<p>Intersect the N. bdy. of sec. 5. The cor. of secs. 5 and 6 on the N. bdy. of the Tp., bears N. 89°34' W., 22.09 chs. dist.</p>
20.74	<p>Cor. No. 2, Central George Lode, monumented by a schist stone, 6 x 4 ins., with 8 ins. showing above the ground, mkd. 2 CG 1914 on the S. face, with a mound of stone to the E. A pipe, 2 ins. diam., 3 ft. showing above the ground, bears NE., 2 lks. dist.</p>
	<p>Thence N. 63°10' E., on line 2-3 of the Central George Lode.</p>
11.14	<p>Cor. No. 3, Central George Lode, identical with Cor. No. 2 of the Central Lode, monumented by a quartzite rock-in-place, 20 x 12 ins. with 6 ins. showing above the ground, mkd. 3 CG 1914 on the S. face, 2 CG 1914 on the E. face, and with an X on top. A pipe, 2 ins. diam., with 3 ft. showing above the ground, bears NW. 3 lks. dist.</p>
	<p>Thence N. 63°10' E., on line 2-3 of the Central Lode.</p>
11.57	<p>Cor. No. 3, Central Lode, monumented by a malpais stone, 6 x 4 ins., with 12 ins. showing above the ground, mkd. 3 C 1914 on the S. face, with a mound of stone to the E. A pipe, 2 ins. diam., with 30 ins. showing above the ground, bears NE. 1½ lks. dist.</p>
	<p>Thence S. 11°52' W., on line 3-4 of the Central Lode.</p>
12.74	<p>Intersect the N. bdy. of sec. 5. The ¼ sec cor. of sec. 5 only, T. 11 N., R. 2 E., bears N. 89°34' W., 20 lks. dist.</p>
13.71	<p>Intersect the N-S center line of sec. 5.</p>
22.89	<p>Cor. No. 4, Central Lode, monumented by a malpais stone, 24 x 8 x 6 ins., nearly buried in the ground, mkd. 4 C 1914, with a mound of stone to the SW.</p>
	<p>from which</p>
	<p>The ¼ sec. cor. of sec. 5 only, on the N. bdy. of the Tp., bears N. 10°46' E., 10.11 chs. dist.</p>
	<p>Thence S. 63°14' W., on line 4-1 of the Central Lode.</p>

Subdivision, T. 11 N., R. 2 E., Arizona

<p>CHAINS</p>	<p>11.40</p>	<p>Cor. No. 1, Central Lode, identical with Cor. No. 4, Central George Lode, monumented by a malpais stone, 17 x 8 x 5 ins., set in a mound of stone, mkd. 1 C 1914 on the E. face and 4 CG 1914 on the W. face.</p> <p>Thence S. 75°39' W., on line 4-1 of the Central George Lode.</p>
	<p>11.17</p>	<p>Cor. No. 1, Central George Lode.</p>
<p>General Description</p>		
<p>The area surveyed in the township lies approximately 2½ miles southeast of Mayer, Arizona. The land is rolling mesa, covered with native and bunch grass. The soil is rocky, gravelly loam and sandy loam around the creek bottoms. The only timber consists of cottonwood and ash growing around the creek banks. The elevation ranges from 3,900 feet above sea level in section 9 to 4,200 feet at the highest point in section 6.</p> <p>State Highway No. 69, from Cordes Junction to Mayer, Arizona, enters the area surveyed in section 9, traverses northwest, leaves in section 6. There are numerous other unimproved roads throughout the township. Two major creeks meander through the area surveyed. Big Bug Creek enters at the northeast corner of section 6, meanders southeast, leaves in section 16. Hackberry Creek enters at the northwest corner of section 6, meanders southeast, intersects Big Bug Creek at the southern part of section 9.</p> <p>There are power, telephone lines and underground pipe lines in many of the sections surveyed. There is a ranch house close to the corner of sections 8, 9, 16 and 17.</p> <p>The land is used primarily for grazing. There are patented mineral claims in the north portion of section 5, but they are not being mined.</p> <p>The drainage is generally southeast.</p>		

CERTIFICATE OF SURVEY

I, We, Gary T. Oviatt and Louis D. Gilbert, HEREBY CERTIFY upon honor that,
in pursuance of special instructions bearing date of the 19th day of May, 1967,
we
I have dependently resurveyed a portion of the west boundary and a portion of
the subdivisional lines, and surveyed subdivisions in sections 5 and 8,
Township 11 North, Range 2 East,

of the Gila and Salt River Meridian, in the State of Arizona, which
are represented in the foregoing field notes as having been executed by ~~me~~ us and under ~~my~~ our direction;
and that said survey has been made in strict conformity with said special instructions, the Manual
of Instructions for the Survey of the Public Lands of the United States, and in specific manner
described in the foregoing field notes.

March 25, 1969

(Date)

Gary T. Oviatt

(Cadastral Surveyor)

March 25, 1969

(Date)

Louis D. Gilbert

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 28 1969

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the west
boundary and a portion of the subdivisional lines, and survey of
subdivisions in sections 5 and 8, Township 11 North, Range 2 East,
of the Gila and Salt River Meridian, Arizona,

executed by Gary T. Oviatt and Louis D. Gilbert,
having been critically examined and found correct, are hereby approved.

SEP 3 1969

(Date)

Clark I. Gumm

(Chief, Division of Engineering)
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys is
a true copy of the original field notes.

(Date) _____
(Chief, Division of Engineering)~~