

BOOK 4859

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

of

REMONUMENTATION

of

FORT APACHE INDIAN RESERVATION BOUNDARY

in

TOWNSHIP 8 NORTH, RANGE 26 EAST

TOWNSHIP 8 NORTH, RANGE 25 EAST

TOWNSHIP 9 NORTH, RANGE 25 EAST

Of the Gila and Salt River Meridian,

In the State of Arizona.

EXECUTED BY

Howard H. Thomas, Cadastral Surveyor

Under special instructions dated June 17, 1968, which provided for the surveys included under Group Number 501, approved June 17, 1968, and assignment instructions dated June 26, 1968.

Survey commenced July 1, 1968

Survey completed September 12, 1968

BOOK 4859

INDEX DIAGRAM


Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION
CORNER MONUMENTS

Tp. 8 N. R. 26 E. Mer. G&SR

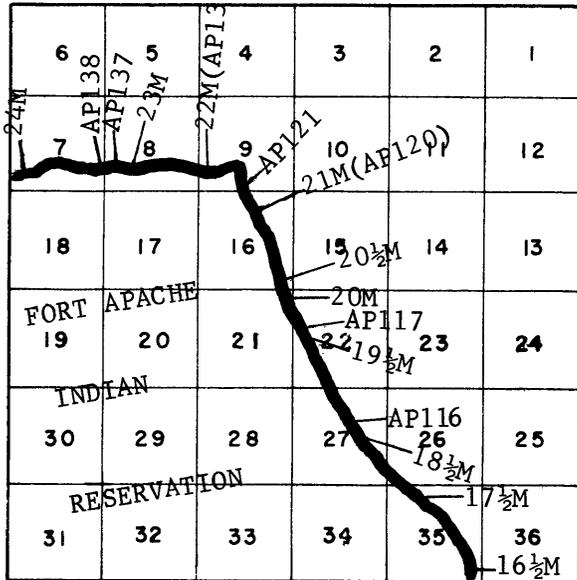


NOTE


ONLY THE BEGINNING
AND ENDING CORNERS
REMONUMENTED IN EACH
SECTION ARE DIAGRAMMED.

SEE PAGE INDEX FOR
COMPLETE LIST OF
CORNERS REMONUMENTED
IN EACH TOWNSHIP.

Tp. 8 N. R. 25 E. Mer. G&SR

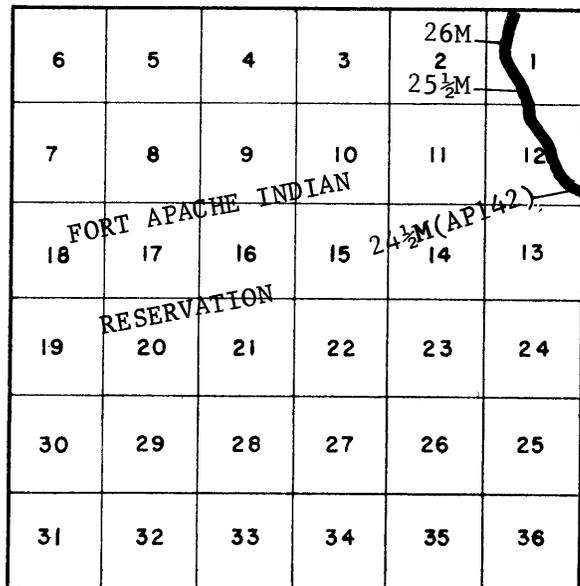

Tp. 9 N. R. 25 E. Mer. G&SR

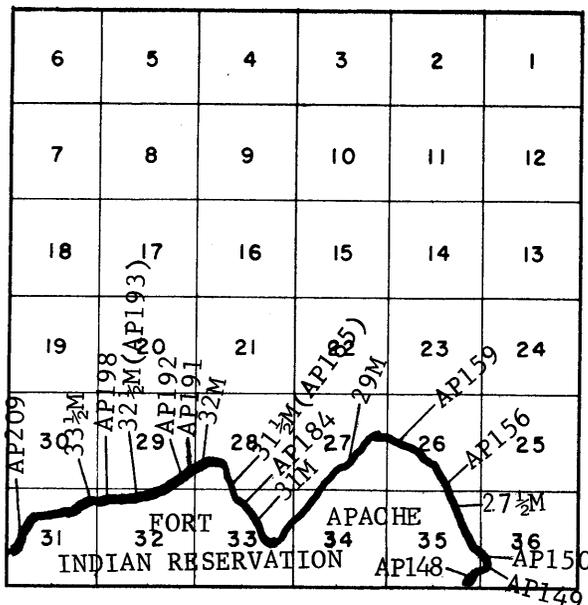

PAGE INDEX TO CORNER MONUMENTS

TOWNSHIP 8 NORTH, RANGE 26 EAST, G&SR M.

<u>Corner</u>	<u>Page</u>	<u>Corner</u>	<u>Page</u>
Mile Corner 16½ -----	1	Angle Point 121 -----	6
" " 17 -----	2	" " 122 -----	7
Angle Point 109 -----	2	Mile Corner 21½ -----	7
" " 110 -----	2	Angle Point 128 -----	8
Mile Corner 17½ -----	2	" " 129 -----	8
" " 18½ -----	3	Mile Corner 22 (AP130)----	8
Angle Point 116 -----	3	" " 23 -----	9
Mile Corner 19½ -----	4	Angle Point 137 -----	9
Angle Point 117 -----	4	" " 138 -----	10
Mile Corner 20 -----	4	Mile Corner 23½ -----	10
" " 20½ -----	5	Angle Point 141 -----	11
Angle Point 119 -----	5	Mile Corner 24 -----	11
Mile Corner 21 (AP120)----	6		

TOWNSHIP 8 NORTH, RANGE 25 EAST, G&SR M.

<u>Corner</u>	<u>Page</u>
Mile Corner 24½ (AP142)----	11
" " 25½ -----	12
" " 26 -----	13

TOWNSHIP 9 NORTH, RANGE 25 EAST, G&SR M.

<u>Corner</u>	<u>Page</u>	<u>Corner</u>	<u>Page</u>
Angle Point 148 -----	13	Mile Corner 31½ (AP185)----	18
" " 149 -----	14	" " 32 -----	19
" " 150 -----	14	Angle Point 191 -----	20
Mile Corner 27½ -----	14	" " 192 -----	20
Angle Point 156 -----	15	Mile Corner 32½ (AP193)----	20
Mile Corner 28 -----	15	" " 33 -----	21
Angle Point 157 -----	16	Angle Point 198 -----	22
" " 159 -----	16	Mile Corner 33½ -----	22
Mile Corner 29 -----	16	Angle Point 201 -----	23
" " 31 -----	17	Mile Corner 34 (AP205)----	23
Angle Point 182 -----	18	" " 34½ (AP207)----	24
" " 183 -----	18	Angle Point 209 -----	24
" " 184 -----	18		

Township 8 North, Range 26 East
 Township 8 North, Range 25 East
 Township 9 North, Range 25 East
 Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of remonumentation of cadastral survey corners by agreement with the U. S. Forest Service. The detailed cooperative agreement was approved by the Director, Bureau of Land Management, by memorandum (5.04b) dated October 16, 1958.

The approval of the Special Instructions on June 17, 1968 gave authority to proceed with the remonumentation in accordance with the Director's Order No. 541, dated April 21, 1961.

Unless described, each corner was monumented with a standard iron post, 30 inches long, 2½ inches in diameter, flanged at the base, with a brass cap riveted to the top.

The assistants furnished by the Forest Service remonumented the original corner positions after verification. An open sight compass was used to obtain the bearings and a standard steel tape was used to measure the distances to corner accessories.

Township 8 North, Range 26 East, G&SR M., Arizona

The Fort Apache Indian Reservation Boundary was resurveyed in 1906 by J. B. Wright and a portion was resurveyed in 1935 by Theo. Vander Meer.

Remonumentation, T. 8 N., R. 26 E., G&SR M., Arizona

The 16½ mile cor., monumented by a malpais stone, 22 x 16 x 10 ins., set 12 ins. in the ground, mkd. NBWMIR 16 M on SW. face and BMFR on NE. face, with mound of stone to the N. From the cor., the orig. bearing trees


An aspen, 14 ins. diam., bears N. 46½° E., 29 lks. dist., mkd. NBWMIR 16½M BT.

An aspen, 16 ins. diam., bears N. 66½° W., 20 lks. dist., mkd. NBWMIR 16½M BT.

An aspen, 22 ins. diam., bears N. 10° W., 66 lks. dist., mkd. NBWMIR 16½M BT.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A spruce, 11 ins. diam., bears S. 47° W., 36 lks. dist., mkd. 16½M FAIR BT.

Rebuild the mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 3 lks. E. of a fence, bearing irregularly SE. and NW.


Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

The 17 mile cor., monumented by a malpais stone, 24 x 15 x 12 ins., set 20 ins. in the ground, in a mound of stone, mkd. BMFR on E. face and NBWMIR 17M on SW. face.

At the cor. point

Set the iron post, 20 ins. in the ground, in a collar of stone, brass cap mkd.



Bury the orig. cor. stone alongside the iron post.

Cor. is 8 lks. E. of a fence, bearing irregularly SE. and NW.

Angle point 109, monumented by a dead pine stump, 30 ins. diam., mkd. with a blaze on N. face and faint scribe marks, with rotted wood on the ground, alongside, mkd. WR, from which new accessories


An iron post, set 22 ins. in the ground, for a reference monument, bears S. 82½° W., 28.8 lks. dist., brass cap mkd. T8N R26E AP109 RM 19 FT FAIR 1968 and an arrow pointing to the true cor.

A spruce, 14 ins. diam., bears S. 41° W., 75 lks. dist., mkd. AP109 FAIR BT.

Angle point 110, monumented by a stump hole, with a dead and fallen pine tree, 16 ins. diam., alongside, mkd. IR V - II..

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 15 ins. diam., bears S. 34° E., 23 lks. dist., mkd. AP110 FAIR BT.

Angle point is 32 lks. N. of a fence bearing E. and W.

The 17½ mile cor., monumented by a malpais stone, 24 x 20 x 8 ins., set 12 ins. in the ground, mkd. NBWMIR on S. face, with mound of stone to the N.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

T8N R26E
S35
17½M
FAIR
1968

Rebuild the mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 2 lks. N. of a fence, bearing E. and W., and 30 lks. W. of a fence cor., from which fences bear E., S. and W.

The 18½ mile cor., monumented by a malpais stone, 18 x 10 x 6 ins., set 10 ins. in the ground, mkd. NBWMIR 18½M BMFR on top, with mound of stone to the N. From the cor., the remaining orig. bearing trees

A fir, 30 ins. diam., bears N. 16½° E., 83 lks. dist., mkd. WMIR.

A pine, 32 ins. diam., bears N. 48½° E., 93 lks. dist., mkd. NBWMIR 18½M BT.

A fir, 40 ins. diam., bears N. 22° W., 95 lks. dist., mkd. BWIR 18½M.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.

T8N R26E
S27
18½M
FAIR
1968

from which

A spruce, 12 ins. diam., bears S. 6° E., 18 lks. dist., mkd. 18½M FAIR BT.

Rebuild the orig. mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 8 lks. S. of a fence, bearing E. and W.

Angle point 116, reestablished by record course and dist. from the remains of the orig. bearing trees

A dead fir snag, 24 ins. diam., bears S. 88° E., 16 lks. dist., mkd. AP116 BT.


A fir stump, 36 ins. diam., bears S. 46° W., 28 lks. dist., no mks.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS




from which

The 18½ mile cor. bears S. 33° E., 140 lks. dist.
Angle point is 15 lks. S. of a fence bearing SE. and NW.

The 19½ mile cor., monumented by a malpais stone, 19 x 12 x 5 ins., set 7 ins. in the ground, in a mound of stone, mkd. NBWMIR 19½M on SE. face and BMFR on NE. face.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



Raise a mound of stone N. of the iron post.


Bury the orig. cor. stone alongside the iron post.

Cor. is in the middle of an open field, about 2 chs. E. of a fence bearing N. and S.

Angle point 117, monumented by a malpais stone, 20 x 10 x 7 ins., set 13 ins. in the ground, in a mound of stone, mkd. APNBWMIR 117 on S. face and BMFR on N. face, with mound of stone to the E.

At the cor. point

Set the iron post, 20 ins. in the ground, in a collar of stone, brass cap mkd.



Rebuild the orig. mound of stone E. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Angle point is 2 lks. S. of a fence cor., from which fences bear E. S. and NW.


The 20 mile cor., monumented by a malpais stone, 18 x 16 x 7 ins., set 6 ins. in the ground, mkd. NBWMIR 20M on SW. face and BMFR on NE. face, with mound of stone to the E.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS




Rebuild the orig. mound of stone E. of the iron pipe.
Bury the orig. cor. stone alongside the iron post.
Cor. is 80 lks. E. of a fence, bearing SE. and NW.

The 20½ mile cor., monumented by a malpais stone, 26 x 17 x 10 ins., set 12 ins. in the ground, mkd. BMFR on N. face and faint scribe marks on S. face, with mound of stone to the E. From the cor., the remains of the orig. bearing trees

- A stump hole bears S. 87°54' W., 62 lks. dist.
- A stump hole bears S. 23° W., 57 lks. dist.
- A stump hole bears S. 9½° W., 52 lks. dist.
- A stump hole bears N. 66¾° W., 23 lks. dist.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A spruce, 10 ins. diam., bears S. 50° W., 60 lks. dist., mkd. 20½M FAIR BT.

Rebuild the orig. mound of stone E. of the iron post.


Bury the orig. cor. stone alongside the iron post.

Cor. is 10 lks. E. of a fence, bearing N. and S.

Angle point 119, monumented by a malpais stone, 14 x 14 x 5 ins., set 6 ins. in the ground, mkd. BMFR on E. face and AP on W. face, with mound of stone to the S.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



Rebuild the orig. mound of stone S. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Anglepoint is 5 lks. E. of a fence, bearing S. and NW.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

The 21 mile cor. and angle point 120, monumented by a malpais stone, 22 x 12 x 5 ins., set 12 ins. in the ground, mkd. MIR 21 on SW. face and BMFR on NE. face, with mound of stone to the E. From the cor., the remains of the orig. bearing trees

An aspen, 20 ins. diam., bears N. 72½° E., 41 lks. dist., mkd. with an overgrown blaze.


A stump hole, with a dead and fallen aspen, 10 ins. diam., alongside, bears S. 76° E., 53 lks. dist., no mks.

A stump hole, with a dead and fallen aspen tree, 16 ins. diam., alongside, bears S. 2½° W., 17 lks. dist., mkd. with an overgrown blaze.

An aspen, 12 ins. diam., bears S. 7° W., 11 lks. dist., mkd. with an overgrown blaze.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A fir, 8 ins. diam., bears S. 49° W., 36 lks. dist., mkd. 21M FAIR BT.

Bury the orig. cor. stone alongside the iron post.

Cor. is 16 lks. E. of a fence, bearing irregularly SE. and NW.


Angle point 121, reestablished by record course and distance from the remains of the orig. bearing trees

An aspen, 11 ins. diam., bears N. 15° E., 73 lks. dist., mkd. with an overgrown blaze.

A pine stump, 30 ins. diam., bears S. 78½° E., 37 lks. dist., mkd. AP121 BT.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A spruce, 8 ins. diam., bears N. 23° E., 88 lks. dist., mkd. AP121 BT.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

From this cor., the closing cor. of secs. 9 and 16, T. 8 N., R. 26 E., at its intersection with the Fort Apache Indian Reservation Bdy., which is an iron post, 2 ins. diam., projecting 10 ins. above ground, brass cap mkd. and witnessed as described in the 1935 survey of T. 8 N., R. 26 E., bears S. 40½° E., 100 lks. dist.

Angle point is 25 lks. S. of a fence, bearing irregularly SE. and NW.


Angle point 122, reestablished by record course and distance from the orig. bearing trees

A pine, 30 ins. diam., bears N. 59° W., 80 lks. dist., mkd. AP122 BT.

A pine, 33 ins. diam., bears N. 42° W., 84 lks. dist., mkd. AP12 BT.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



Angle point is 25 lks. W. of a fence, bearing irregularly SE. and NW.

The 21½ mile cor., monumented by a malpais stone, 19 x 19 x 13 ins., set 10 ins. in the ground, mkd. WMIR on NW. face, with mound of stone to the NE. From the cor., the remaining orig. bearing trees


An aspen, 10 ins. diam., bears S. 40° E., 52 lks. dist., mkd. with faint scribe mks.

An aspen, 10 ins. diam., bears S. 10° E., 60 lks. dist., mkd. with faint scribe mks.

An aspen, 8 ins. diam., bears N. 38° W., 58 lks. dist., mkd. NBWMIR 21½M BT.

At the cor. point

Set the iron post, 15 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A fir, 5 ins. diam., bears S. 65° E., 42 lks. dist., mkd. 21½M BT.

A fir, 10 ins. diam., bears S. 30° W., 14 lks. dist., mkd. 21½M FAIR BT.

Rebuild the orig. mound of stone NE. of the cor.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

Bury the orig. cor. stone alongside the iron post.

Cor. is 18 lks. E. of a fence, bearing N. and S.

Angle point 128, monumented by an aspen tree, 20 ins. diam., mkd. NBWMIR 128 on NE. face and BMFR on SE. face, from which new accessories

A spruce, 8 ins. diam., bears S. 34° W., 24 lks. dist., mkd. AP128 FAIR BT.

An iron post, set 28 ins. in the ground, in a collar of stone, for a reference monument, bears N. 6° W., 27.3 lks. dist., brass cap mkd. T8N R26E AP128 S9 RM 18 FT 1968 and an arrow pointing to the true cor.


Angle point 129, reestablished by record course and distance from the remains of the orig. bearing trees

A dead aspen snag, 20 ins. diam., bears S. 33° W., 37 lks. dist., mkd. AP129 BT.

A stump hole, bears S. 22½° W., 12 lks. dist.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 20 ins. diam., bears S. 9½° W., 40 lks. dist., mkd. AP129 BT.

A pine, 10 ins. diam., bears N. 43° W., 62 lks. dist., mkd. AP129 BT.


The 22 mile cor. and angle point 130, monumented by a malpais stone, 16 x 16 x 9 ins., set 10 ins. in the ground, mkd. with faint scribe marks, with mound of stone to the SE., verified by record course and dist. from the remaining orig. bearing trees

A dead pine snag, 24 ins. diam., bears S. 60° W., 14 lks. dist., mkd. NBWMIR BT 22M.

An aspen, 12 ins. diam., bears N. 27° W., 31 lks. dist., mkd. NBWMIR 22M BT.

At the cor. point

Set the iron post, 19 ins. in the ground, in a collar of stone, brass cap mkd.



Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

from which

A pine, 10 ins. diam., bears S. 30° W., 45 lks. dist., mkd. 22M FAIR BT.

A pine, 10 ins. diam., bears N. 4° W., 57 lks. dist., mkd. 22M BT.

Rebuild the orig. mound of stone SE. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 35 lks. W. of a fence, bearing irregularly NE. and SW.

The 23 mile cor., monumented by a malpais stone, 17 x 12 x 8 ins., set 10 ins. in the ground, mkd. with faint scribe marks, with mound of stone to the N., verified by record course and dist. from the remains of the orig. bearing trees

A pine, 50 ins. diam., bears N. 85½° E., 94 lks. dist., mkd. NBWMI BT.


A stump hole, with a dead and fallen aspen tree, 10 ins. diam., alongside, bears S. 29° E., 54 lks. dist., no mks.

An aspen 12 ins. diam., bears N. 62½° W., 16 lks. dist., mkd. NBWMIR 23M BT.

An aspen, 20 ins. diam., bears N. 26½° W., 55 lks. dist., mkd. NB 23M BT.

At the cor. point

Set the iron post, 24 ins. in the ground, brass cap mkd.



from which

A pine, 8 ins. diam., bears S. 5° E., 21 lks. dist., mkd. 23M FAIR BT.

Rebuild the orig. mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 3 lks. N. of a fence, bearing irregularly E. and W.

Angle point 137, monumented by a dead aspen tree, 15 ins. diam., mkd. R137 on E. face and faint scribe marks on S. face, from which a new accessory

An iron post, set 24 ins. in the ground, in a collar of stone, for a reference monument, bears N. 12° W., 25.8 lks. dist., brass cap mkd. T8N R26E AP137 S8 RM 17 FT 1968 and an arrow pointing to the true cor.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 26 E.

CHAINS

From this cor., the closing corner of secs. 7 and 8, T. 8 N., R. 26 E., at its intersection with the Fort Apache Indian Reservation Boundary, which is an iron post, 2 ins. diam., projecting 10 ins. above ground, brass cap mkd. and witnessed as described in the 1935 survey of T. 8 N., R. 26 E., bears N. 76° W., 100 lks. dist.

Angle point is about 1½ chs: S. of a fence, bearing irregularly E. and W.

Angle point 138, monumented by a dead pine stump, 30 ins. diam., with log alongside, log mkd. with a rotted blaze on one side and scribe marks APNBWMIR 1 8 on the other side, from which new accessories

A pine, 10 ins. diam., bears N. 71° E., 16 lks. dist., mkd. AP138 BT.

An iron post, set 26 ins. in the ground, in a collar of stone, for a reference monument, bears S. 74° W., 33.3 lks. dist., brass cap mkd. T8N R26E AP138 RM 22 FT FAIR 1968 and an arrow pointing to the true cor.

Angle point is 35 lks. N. of a fence, bearing irregularly E. and W.

The 23½ mile cor., monumented by a malpais stone, 20 x 17 x 9 ins., set 8 ins. in the ground, mkd. NBWMIR 23½M on S. face and MR on N. face, from which the remains of the orig. bearing trees

A stump hole, bears S. 45½° E., 285 lks. dist.

A dead aspen, 18 ins. diam., bears S. 5°40' W., 168 lks. dist., mkd. NBWMIR 28½M BT.

A stump hole, bears S. 25° W., 212 lks. dist.

A pine, 40 ins. diam., bears N. 60° W., 134 lks. dist., mkd. NBWMIR 23½M BT.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.

T8N R26E
S7
←→
23½M
FAIR
1968

from which

A pine, 10 ins. diam., bears N. 65° E., 61 lks. dist., mkd. 23½M BT.

Raise a mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 5 lks. S. of a fence, bearing irregularly E. and W.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 25 E.

CHAINS

Angle point 141, monumented by a dead pine stump, 30 ins. diam., mkd. APNB 41 on S. face and BMFR on N. face.

At the cor. point

Set the iron post, 18 ins. in the ground, mound of stone to top, brass cap mkd.



from which

A pine, 10 ins. diam., bears S. 79½° E., 67 lks. dist., mkd. AP141 FAIR BT.

A pine, 10 ins. diam., bears S. 65° W., 56 lks. dist., mkd. AP141 FAIR BT.


Deposit the orig. cor. stump alongside the iron post.

Angle point is on a fence, bearing irregularly E. and W.

The 24 mile cor., monumented by a malpais stone, 21 x 18 x 10 ins., set 10 ins. in the ground, mkd. NBWMIR 24M on SW. face and BMFR on NE. face.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.



Bury the orig. cor. stone alongside the iron post.

Cor. is in an open flat, 36 lks. S. of a fence, bearing irregularly E. and W.

Township 8 North, Range 25 East, G&SR M., Arizona

The Fort Apache Indian Reservation boundary was resurveyed in 1906 by J. B. Wright, a portion was retraced in 1915 by S. E. Blout, and a portion was resurveyed in 1935 by Theo. Vander Meer.

Remonumentation, T. 8 N., R. 25 E., G&SR M., Arizona

The 24½ mile cor. and angle point 142, monumented by a malpais stone, 23 x 15 x 8 ins., set 10 ins. in the ground, mkd. NBWMIR 24½ on S. face and BMFR on N. face, with mound of stone to the N. From the cor., the remains of the orig. bearing trees

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 8 N., R. 25 E.

CHAINS


A dead pine snag, 34 ins. diam., bears N. 57° E., 184 lks. dist., mkd. NBWMIR 24½ BT. (Note: record dist. 148 lks.).

A stump hole, with a dead and fallen pine snag, 30 ins. diam.; alongside, bears S. 10½° W., 76 lks. dist., mkd. with faint scribe marks.

A pine, 30 ins. diam., bears N. 13° W., 111 lks. dist., mkd. NBWMIR.

At the cor. point

Set the iron post, 18 ins. in the ground to bedrock, in a collar of stone, brass cap mkd.



from which

A pine, 10 ins. diam., bears S. 3½° E., 41 lks. dist., mkd. 24½M FAIR BT.

Rebuild the orig. mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is about 320 lks. S. of a fence, bearing irregularly N. and E.

The 25½ mile cor., monumented by a malpais stone, 18 x 12 x 7 ins., set 12 ins. in the ground, mkd. NBWMIR 25½ M on top and BMFR on N. face, from which the remains of the remaining orig. bearing trees


A pine, 42 ins. diam., bears S. 48° W., 158 lks. dist., mkd. NBW 25½M BT. (Note: record dist. 165 lks.).

A pine, 45 ins. diam., bears S. 69° W., 148 lks. dist., mkd. NBWMIR 25½

A pine stump, 24 ins. diam., bears S. 73¼° W., 132 lks. dist., mkd. NBWMIR 25.

At the cor. point

Set the iron post, 26 ins. in the ground, brass cap mkd.



from which

A pine, 9 ins. diam., bears S. 41° E., 20 lks. dist., mkd. 25½M BT.

A pine, 13 ins. diam., bears S. 73° W., 33 lks. dist., mkd. 25½M FAIR BT.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

Raise a mound of stone E. of the iron post.


Bury the orig. cor. stone alongside the iron post.

Cor. is 50 lks. E. of a fence, bearing irregularly N. and S.

The 26 mile cor., monumented by a malpais stone, 15 x 13 x 6 ins., set 9 ins. in the ground, mkd. NBWMIR 26M on NW. face and BMFR on NE. face, with mound of stone to the E.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 8 ins. diam., bears S. $82\frac{1}{2}^{\circ}$ E., 51 lks. dist., mkd. 26M BT.

A fir, 7 ins. diam., bears N. 54° W., 42 lks. dist., mkd. 26M BT.

No evidence of orig. bearing trees.

Rebuild the orig. mound of stone E. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 10 lks. E. of a fence, bearing irregularly N. and S.

Township 9 North, Range 25 East, G&SR M., Arizona

The Fort Apache Indian Reservation Boundary was resurveyed in 1906 by J. B. Wright and retraced in 1915 by S. E. Blout.

Remonumentation, T. 9 N., R. 25 E., G&SR M., Arizona

Angle point 148, monumented by a pine, 24 ins. diam., mkd. BMFR on SE. face and with an overgrown blaze on NW. face, from which new bearing trees

A fir, 7 ins. diam., bears N. 11° E., 26 lks. dist., mkd. AP148 FAIR BT.

A pine, 7 ins. diam., bears South, 51 lks. dist., mkd. AP148 BT.

Angle point is about 145 lks. W. of a fence, bearing irregularly NE. and SW.


Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

Angle point 149, monumented by a stump hole, with a dead and fallen pine tree, 12 ins. diam., alongside, mkd. APNBWMIR 149 on one face and BMFR on another face.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A fir, 15 ins. diam., bears N. $13\frac{1}{2}^{\circ}$ E., 30 lks. dist., mkd. AP149 BT.


A fir, 8 ins. diam., bears S. 46° W., 55 lks. dist., mkd. AP149 FAIR BT.

Angle point is 5 lks. N. of a fence bearing irregularly SW. and NW.

Angle point 150, monumented by a stump hole, with a dead and fallen pine, 18 ins. diam., alongside, mkd. BMFR on one face.

At the cor. point

Set the iron post, 23 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A fir, 12 ins. diam., bears N. 25° E., 14 lks. dist., mkd. AP150 BT.

A pine, 12 ins. diam., bears S. 65° W., 21 lks. dist., mkd. AP150 FAIR BT.

Angle point is 40 lks. N. of a fence, bearing irregularly SE. and NW.

The $27\frac{1}{2}$ mile cor., monumented by a lava stone, 16 x 12 x 10 ins., set 10 ins. in the ground, mkd. NBWMIR $27\frac{1}{2}$ on S. face and BMFR on NE. face, with mound of stone to the SE. From the cor, the remains of the orig. bearing trees

A pine stump, 32 ins. diam., bears N. 83° E., 54 lks. dist., no mks.

A stump hole, with a dead and fallen pine tree, 20 ins. diam., alongside, bears S. 3° E., 57 lks. dist., no mks.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.


CHAINS

A stump hole, with a dead and fallen pine, 8 ins. diam., alongside, bears S. 42° W., 56 lks. dist., mkd. NBWMIR 27½M BT.

A pine, 24 ins. diam., bears S. 77° W., 78 lks. dist., mkd. IR 27½M BT.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 8 ins. diam., bears S. 62° W., 25 lks. dist., mkd. 27½M FAIR BT.

A pine, 10 ins. diam., bears N. 9° W., 25 lks. dist., mkd. 27½M BT.

Bury the orig. cor. stone alongside the iron post.

Cor. is 5 lks. N. of a fence, bearing irregularly SE. and NW.

Angle point 156, monumented by a dead pine tree, 32 ins. diam., mkd. BMFR on N. face and APNBWMIR 156 on S. face, from which new accessories

An iron post, set 23 ins. in the ground, in a collar of stone, for a reference monument, bears S. 65° E., 30.3 lks. dist., brass cap mkd. T9N R25E AP156 S26 RM 20 FT 1968 and an arrow pointing to the true cor.

A pine, 12 ins. diam., bears N. 60° W., 65 lks. dist., mkd. AP156 FAIR BT.

Angle point is 10 lks. N. of a fence, bearing irregularly SE. and NW.

The 28 mile cor., monumented by a malpais stone, 10 x 6 x 8 ins., set 2 ins. in the ground, mkd. BMFR on NE. face and NBWMIR 28M on SW. face, with mound of stone to the N. From the cor., the remains of the orig. bearing trees

A pine stump, 30 ins. diam., bears N. 32° E., 26 lks. dist.

A stump hole, bears S. 75° E., 20 lks. dist.

A stump hole, bears S. 45° W., 50 lks. dist.

A stump hole, bears N. 11° W., 6 lks. dist.

from which new bearing trees

A pine, 10 ins. diam., bears S. 27½° W., 22 lks. dist., mkd. 28M FAIR BT.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

A pine, 8 ins. diam., bears S. $68\frac{1}{2}^{\circ}$ W., 32 lks. dist., mkd. 28M FAIR BT.

From this cor., Angle point 157 bears N. $49\frac{3}{4}^{\circ}$ W., 78 lks. dist.

Cor. is 48 lks. N. of a fence, bearing irregularly SE. and NW.

Angle point 157, monumented by a dead pine snag, 21 ins. diam., mkd. BMFR on NE. face.

At the cor. point

Set the iron post, 24 ins. in the ground, brass cap mkd.

T9N R25E
S26
AP157
← FAIR →
1968

from which

A pine, 10 ins. diam., bears N. 10° W., 23 lks. dist., mkd. AP157 BT.

From this cor., the 28 mile cor., bears S. $49\frac{3}{4}^{\circ}$ E., 78 lks. dist.

Deposit the orig. cor. stump alongside the iron post.

Angle point is 48 lks. NE. of a fence, bearing irregularly SE. and W.

Angle point 159, monumented by a pine stump, 24 ins. diam., with a piece of wood on ground, alongside, piece mkd. 159, from which new accessories

An iron post, set 22 ins. in the ground, in a collar of stone, for a reference monument, bears East, 15.2 lks. dist., brass cap mkd. T9N R25E S26 AP159 RM 10 FT 1968 and an arrow pointing to the true cor.

A pine, 10 ins. diam., bears S. 83° E., 15 lks. dist., mkd. AP159 FAIR BT.

Angle point is 16 lks. SW. of a fence, bearing irregularly SE. and NW.

The 29 mile cor., reestablished by record course and distance from the remains of the remaining orig. bearing trees

A stump hole, with a dead and fallen aspen tree, 21 ins. diam., alongside, bears N. $44\frac{1}{2}^{\circ}$ E., 97 lks. dist., mkd. NBMIR.

A pine snag, 36 ins. diam., bears South, 73 lks. dist., mkd. NBWMIR 29M


A stump hole, with a dead and fallen aspen tree, 10 ins. diam., alongside, bears N. $80\frac{3}{4}^{\circ}$ W., 84 lks. dist., no mks.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 8 ins. diam., bears N. 49° E., 15 lks. dist., mkd. 29M FAIR BT.

A pine, 8 ins. diam., bears N. 84° W., 21 lks. dist., mkd. 29M BT.

Cor. is 40 lks. N. of a fence, bearing irregularly NE. and SW.

The 31 mile cor., monumented by a malpais stone, 20 x 12 x 10, set 6 ins. in the ground, mkd. BMFR on N. face and NBWMIR 31M on S. face, with mound of stone to the NW. From the cor, the remains of the orig. bearing trees

A rotted pine stump, 12 ins. diam., bears S. 51° E., 62 lks. dist., no mks.


A rotted pine stump, 18 ins. diam., bears S. 7° W., 48 lks. dist., mkd. NBWMIR 31M BT.

A rotted pine stump, with a log, 30 ins. diam., alongside, bears N. 54½° W., 32 lks. dist., log mkd. NBWMIR 31M BT.

A pine, 20 ins. diam., bears N. 25½° W., 39 lks. dist., mkd. with an overgrown blaze.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 7 ins. diam., bears S. 89° E., 33 lks. dist., mkd. 31M BT.

A pine, 8 ins. diam., bears S. 18½° W., 41 lks. dist., mkd. 31M FAIR BT.

Rebuild the orig. mound of stone NW. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 15 lks. E. of a fence, bearing irregularly SE. and NW.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

Angle point 182, monumented by an aspen, 22 ins. diam., mkd. BMFR on NE. face and APNBWMIR 182 on NW. face, from which new accessories

A pine, 8 ins. diam., bears N. 55° E., 46 lks. dist., mkd. AP182 BT.

An iron post, set 22 ins. in the ground, for a reference monument, bears S. 2° W., 30.3 lks. dist., brass cap mkd. T9N R25E AP182 RM 20 FT FAIR 1968 and an arrow pointing to the true cor.

Angle point is 25 lks. W. of a fence, bearing irregularly SE. and NW.

Angle point 183, monumented by a dead aspen tree, 14 ins. diam., mkd. APNBWMIR 183 on S. face and BMF on N. face, from which new accessories

An iron post, set 22 ins. in the ground, for a reference monument, bears S. 34° W., 15.2 lks. dist., brass cap mkd. T9N R25E AP183 RM 10 FT FAIR 1968 and an arrow pointing to the true cor.


A pine, 15 ins. diam., bears N. ½° W., 71 lks. dist., mkd. AP183 BT.

Angle point is 120 lks. W. of a fence, bearing irregularly SE. and W.

Angle point 184, monumented by a dead pine stump, with a cut log, 18 ins. diam., alongside, log mkd. I R 184.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 12 ins. diam., bears N. 23° E., 13 lks. dist., mkd. AP184 BT.

A pine, 12 ins. diam., bears S. 16° E., 22 lks. dist., mkd. AP184 FAIR BT.

Angle point is about 3 chs. W. of a fence, bearing irregularly NE. and SE.

The 31½ mile cor. and angle point 185, monumented by a mound of stone, reestablished by record course and distance from the remains of the orig. bearing trees

A stump hole, with a dead and fallen pine tree, 30 ins. diam., alongside, bears N. 21°20' E., 82 lks. dist., mkd. NBWMIR 31½M BT.

A pine, 18 ins. diam., bears N. 60¾° E., 75 lks. dist., mkd. NBWMIR 31½M BT.

Remonumentation, Fort Apache Indian Reservation Bdy.,
T. 9 N., R. 25 E.


CHAINS

A pine, 30 ins. diam., bears S. 85° E., 100 lks.
dist., mkd. NBWMIR 31½M BT.

A pine, 36 ins. diam., bears S. 67° W., 32 lks.
dist., mkd. NBWMIR 31½M BT. (Note: record bearing
S. 53½° W.).

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar
of stone, brass cap mkd.



from which

A pine, 8 ins. diam., bears S. 46° E., 20 lks.
dist., mkd. 31½M BT.

A pine, 8 ins. diam., bears N. 15° W., 58 lks.
dist., mkd. 31½M FAIR BT.

Raise a mound of stone S. of the iron post.

From this cor., the closing cor. of secs. 28 and 33,
T. 9 N., R. 25 E., at its intersection with the Fort
Apache Indian Reservation Bdy., which is an iron post,
2 ins. diam., projecting 10 ins. above ground, brass cap
mkd. and witnessed as described in the official record
of the 1915 resurvey of T. 9 N., R. 25 E., bears S. 15°
W., 23 lks. dist. (Note: record bearing and dist.
S. 4°02' W., 30 lks.).

Cor. is 25 lks. E. of a fence, bearing irregularly NE.
and SW.

The 32 mile cor., monumented by a malpais stone, 18 x 18
x 10 ins., set 6 ins. in the ground, mkd. BMFR on N.
face, 32M on E. face and NBWMIR on S. face, from which
the remains of the orig. bearing trees

A pine, 20 ins. diam., bears N. 26° E., 16 lks.
dist., mkd. NBWMIR 32M BT.


A pine, 20 ins. diam., bears S. 25½° W., 46 lks.
dist., mkd. NBWMIR 32M BT.

A pine, 20 ins. diam., bears S. 56° W., 69 lks.
dist., mkd. 32M BT.

A rotted pine stump, 24 ins. diam., bears N. 19½°
W., 18 lks. dist., mkd. WMIR 32M BT.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of
stone, brass cap mkd.



Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

Raise a mound of stone N. of the cor.

Bury the orig. cor. stone alongside the iron post.

Cor. is 65 lks. S. of a fence, bearing irregularly E. and W.


Angle point 191, monumented by a rotted pine stump, 15 ins. diam., with rotted wood on the ground, alongside, wood mkd. with faint scribe marks, verified by record course and distance from the remains of the orig. bearing trees

A pine, 18 ins. diam., bears N. $43\frac{1}{2}^{\circ}$ E., 33 lks. dist., mkd. with an overgrown blaze.

A pine, 21 ins. diam., bears N. $22\frac{3}{4}^{\circ}$ W., 18 lks. dist., mkd. with an overgrown blaze. I cut open the blaze and find faint scribe marks.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.



Deposit orig. cor. stump alongside the iron post.

Angle point is 50 lks. NW. of a fence, bearing irregularly NE. and SW.

Angle point 192, monumented by a pine stump, with a dead and fallen tree, 36 ins. diam., alongside, stump mkd. MBFR on N. face and APNBWMIR 192 on S. face, from which new accessories

A pine, 10 ins. diam., bears N. 47° E., 43 lks. dist., mkd. AP192 BT.

An iron post, set 24 ins. in the ground, in a collar of stone, for a reference monument, bears S. 33° E., 22.7 lks. dist., brass cap mkd. T9N R25E AP192 RM 15 FT FAIR 1968 and an arrow pointing to the true cor.

Angle point is 25 lks. NE. of a fence, bearing irregularly E. and W.

The $32\frac{1}{2}$ mile cor. and angle point 193, monumented by a malpais stone, 24 x 15 x 16 ins., set 10 ins. in the ground, mkd. BMFR on N. face and NBWMIR $32\frac{1}{2}$ M on the S. face, with mound of stone to the N. From the cor., the remains of the remaining orig. bearing trees

A dead pine stump, 16 ins. diam., bears N. 79° E., 42 lks. dist., mkd. NBWMIR $32\frac{1}{2}$ M BT WEB 1905.

A pine, 18 ins. diam., bears S. 45° E., 47 lks. dist., mkd. NBWMIR $32\frac{1}{2}$ M BT.


Remonumentation, Fort Apache Indian Reservation Bdy.
T 9 N., R. 25 E.

CHAINS

A stump hole, with a dead and fallen aspen tree, 10 ins. diam., alongside, bears S. $8\frac{3}{4}^{\circ}$ W., 20 lks. dist., mkd. with faint scribe marks.

At the cor. point

Set the iron post, 24 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 7 ins. diam., bears N. $64\frac{1}{2}^{\circ}$ E., $31\frac{1}{2}$ lks. dist., mkd. $32\frac{1}{2}$ M FAIR BT.

A fir, 10 ins. diam., bears S. 54° W., 17 lks. dist., mkd. $32\frac{1}{2}$ M BT.

Rebuild the orig. mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 50 lks. S. of a fence, bearing irregularly NE. and SW.

The 33 mile cor., monumented by a malpais stone, 22 x 16 x 8 ins., set 12 ins. in the ground, mkd. NBWMIR 33M on S. face, from which the remains of the orig. bearing trees

A pine, 21 ins. diam., bears N. 25° E., 41 lks. dist., mkd. with an overgrown blaze.


A pine, 20 ins. diam., bears N. 88° E., 30 lks. dist., mkd. with an overgrown blaze.

A pine, 24 ins. diam., bears S. $3\frac{3}{4}^{\circ}$ W., 82 lks. dist., mkd. BWMIR 33M.

A pine, 18 ins. diam., bears S. 50° W., 27 lks. dist., mkd. with faint scribe marks.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.



Raise a mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is on a fence, bearing irregularly SE. and NW.

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS


Angle point 198, monumented by a stump hole, with a dead and fallen pine tree, 21 ins. diam., alongside, mkd. NB on S. face, from which the remains of the orig. bearing trees

A pine, 36 ins. diam., bears S. 35° E., 89 lks. dist., mkd. with an overgrown blaze.

A dead pine stump, 30 ins. diam., bears S. 6° E., 89 lks. dist., mkd. with an overgrown blaze.

At the cor. point

Set the iron post, 26 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 10 ins. diam., bears S. 40½° W., 29½ lks. dist., mkd. AP198 FAIR BT.

A pine, 8 ins. diam., bears N. 6½° W., 22½ lks. dist., mkd. AP198 BT.

From this cor., an orig. mound of stone bears S. 50° E., 23 lks. dist.

Angle point is 30 lks. N. of a fence, bearing irregularly E. and W.

The 33½ mile cor., monumented by a malpais stone, 18 x 16 x 6 ins., set 10 ins. in the ground, in a mound of stone, mkd. BMFR on N. face and NBWMIR 33½M on E. face, from which the remains of the orig. bearing trees

A pine, 16 ins. diam., bears N. 32° E., 32 lks. dist., mkd. with faint scribe mks.


A stump hole, with a dead and fallen pine tree, 18 ins. diam., alongside, bears S. 29° E., 51 lks. dist., mkd. NBWMIR 33½M BT.

A pine, 20 ins. diam., bears West, 50 lks. dist., mkd. with an overgrown blaze.

A pine, 24 ins. diam., bears N. 42° W., 45 lks. dist., mkd. BW.

At the cor. point

Set the iron post, 22 ins. in the ground, in a collar of stone, brass cap mkd.



from which

Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

A pine, 10 ins. diam., bears S. 69½° E., 44 lks. dist., mkd. 33½M FAIR BT.

Bury the orig. cor. stone alongside the iron post.

Cor. is 41 lks. E. of a fence, bearing irregularly N. and S.


Angle point 201, monumented by a malpais stone, 24 x 18 x 12 ins., set 18 ins. in the ground, mkd. BMFR on N. face and APNBWMIR 201 on S. face, from which the remains of the orig. bearing trees

A pine stump, 24 ins. diam., with wood chip on ground, alongside, bears South, 26 lks. dist., chip mkd. BT.

A pine, 24 ins. diam., bears S. 71° W., 19 lks. dist., mkd. with an overgrown blaze.

At the cor. point

Set the iron post, 20 ins. in the ground, in a collar of stone, brass cap mkd.



from which

A pine, 8 ins. diam., bears N. 87° E., 21 lks. dist., mkd. AP201 BT.

Bury the orig. cor. stone alongside the iron post.

Angle point is 20 lks. N. of a fence, bearing irregularly E. and W.

The 34 mile cor. and angle point 205, monumented by a malpais stone, 18 x 12 x 8 ins., set 12 ins. in the ground, mkd. BMFR on NW. face and NBWMIR 34M on S. face, from which the remains of the orig. bearing trees

An aspen, 16 ins. diam., bears S. 53° E., 25 lks. dist., mkd. NBWMIR on bark.


A pine, 15 ins. diam., bears S. 8° W., 40 lks. dist., mkd. NBWMIR 34M BT.

A stump hole, bears S. 41° W., 56 lks. dist.

A stump hole, bears N. 12½° W., 45 lks. dist.

At the cor. point

Set the iron post, 22 ins. in the ground, brass cap mkd.



Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

from which

A pine, 17 ins. diam., bears N. 20° W., 53 lks. dist., mkd. 34M BT.

Raise a mound of stone N. of the iron post.

Bury the orig. cor. stone alongside the iron post.

Cor. is 12 lks. N. of a fence, bearing irregularly NE. and W.

The 34½ mile cor. and angle point 207, monumented by a malpais stone, 24 x 18 x 12 ins., set 3 ins. in the ground, mkd. NBWMIR on E. face, 34½M on NE. face and faint scribe mks. on W. face, with mound of stone to the N. From the cor., the remains of the orig. bearing trees

A stump hole bears S. 74° E., 73 lks. dist.


A pine stump, with a cut tree, 12 ins. diam., alongside, bears S. 37° E., 34 lks. dist., tree mkd. NBWMIR 34½M BT.

A pine, 24 ins. diam., bears S. 12° E., 24 lks. dist., mkd. WMIR 34.

A dead aspen, 7 ins. diam., bears S. 68° W., 26 lks. dist., mkd. 34½M BT.

At the cor. point

Set the iron post, 12 ins. in the ground, in a mound of stone, brass cap mkd.



from which

A pine, 10 ins. diam., bears N. 83° W., 40 lks. dist., mkd. 34½M BT.

Bury the orig. cor. stone alongside the iron post.

Cor. is 3 lks. W. of a fence, bearing irregularly N. and S.

Angle point 209, monumented by a dead pine stump, 12 ins. diam., with a dead and fallen tree alongside, tree mkd. BMFR on N. face and APNBWMIR 209 on S. face.

At the cor. point

Set the iron post, 25 ins. in the ground, in a collar of stone, brass cap mkd.



Remonumentation, Fort Apache Indian Reservation Bdy.
T. 9 N., R. 25 E.

CHAINS

from which

A pine, 18 ins. diam., bears S. $16\frac{1}{2}^{\circ}$ W., 66 lks.
dist., mkd. AP209 FAIR BT.

A pine, 8 ins. diam., bears N. 12° W., 13 lks.
dist., mkd. AP209 BT.

Raise a mound of stone N. of the iron post.

Angle point is 11 lks. N. of a fence, bearing irregularly NE. and W.

General Statement

The official record was found to be in error for some of the bearings and distances given for the bearing trees. A few of the trees were misnamed as to specie. A ring growth count was made on several trees which proved they were marked at the time of the original survey.

Where the original corner monument appeared to be undisturbed, it was accepted as the true point for the corner.

27

BOOK 4859

CERTIFICATE OF SURVEY

(I) (We), Howard H. Thomas, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 17th day of June, 1968, (I) (We) have remonumented a portion of the cadastral survey corners of the Fort Apache Indian Reservation Boundary in Township 8 North, Ranges 25 and 26 East, and Township 9 North, Range 25 East,

of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by (me), (we) and under (my) (we) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 14, 1969 (Date) Howard H. Thomas (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date JUL 30 1969

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the remonumentation of a portion of the cadastral survey corners of the Fort Apache Indian Reservation Boundary in Township 8 North, Ranges 25 and 26 East, and Township 9 North, Range 25 East, all of the Gila and Salt River Meridian, Arizona, executed by Howard H. Thomas, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

JUN 3 1970 (Date) Clark F. Sumner (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey) GPO 849-626