

BOOK 4912

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

DEPENDENT RESURVEY

OF A

PORTION OF THE NORTH AND SOUTH BOUNDARIES

AND

SUBDIVISIONAL LINES

SURVEY

SUBDIVISIONS IN CERTAIN SECTIONS

AND

ACCRETION SURVEY

TOWNSHIP 7 SOUTH, RANGE 31 EAST

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Kenneth D. Herman Cadastral Surveyor

Gary T. Oviatt Cadastral Surveyor

Jerrold E. Knight Cadastral Surveyor

Under special instructions dated December 14, 19 67, which provided for the surveys
Supplemental Special Instructions dated and approved February 19, 1968
included under Group Number 462, approved December 14, 1967,
and assignment instructions dated December 14, 19 67.

Survey commenced January 31, 19 68


Survey completed March 5, 19 68

1A

BOOK 4912

INDEX DIAGRAM

Township 7 South, Range 31 East,

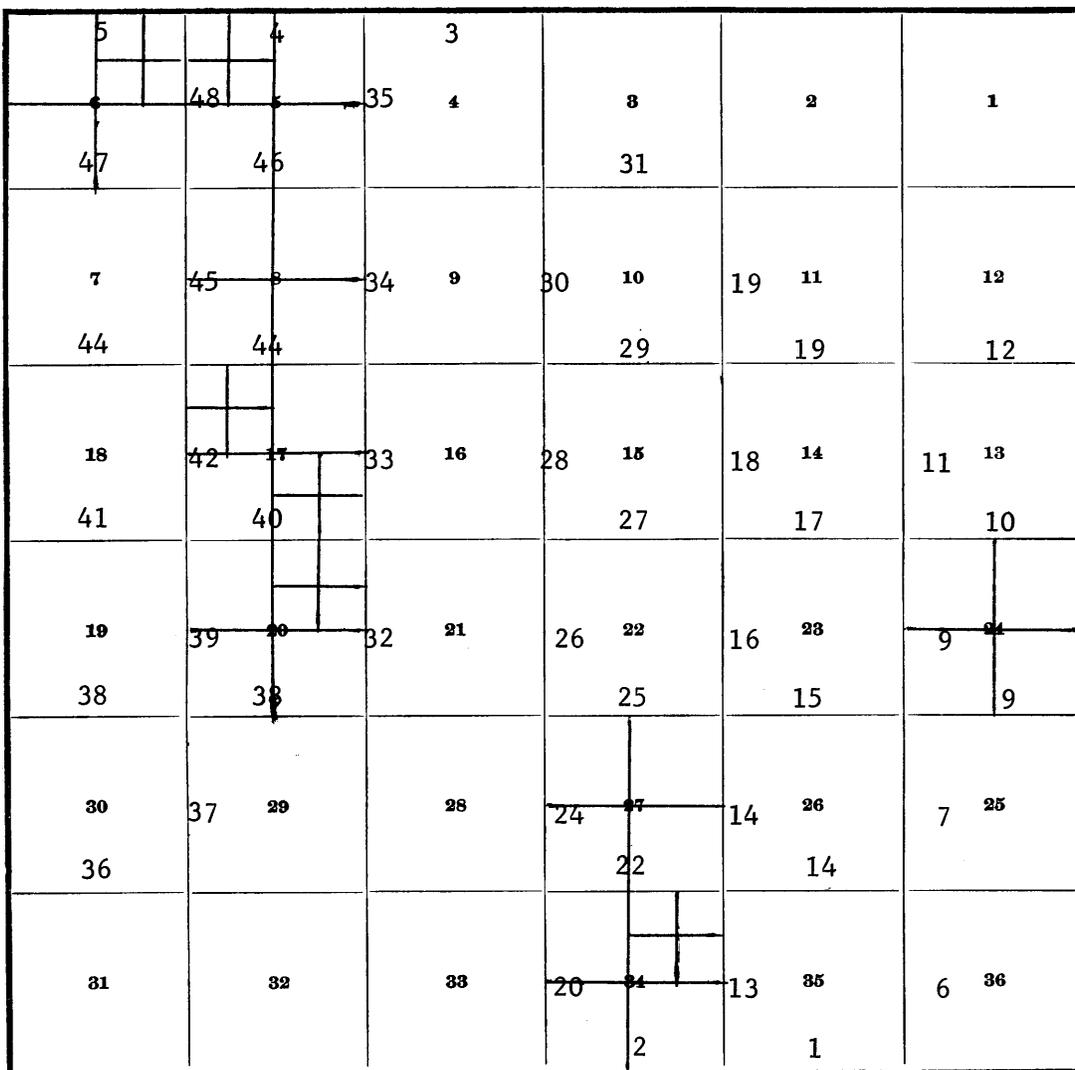

Subdivision of Sec. 24 -- Page 49
 " " " 34 -- Page 50
 " " " 27 -- Page 53
 " " " 20 -- Page 54
 " " " 17 -- Page 57
 " " " 8 -- Page 60
 " " " 5 -- Page 61
 " " " 6 -- Page 63

Accretion Survey
 Sec. 27 -- Page 66

Township 7 South, Range 31 East
Gila and Salt River Meridian, Arizona

CHAINS

The south and east boundaries were surveyed in 1882 by T. F. White. The west and north boundaries, the subdivisional lines and the meanders of the Gila River were surveyed in 1891 by D. Drummond. The east and west boundaries and the west one and one-half miles of the south boundary were resurveyed in 1931 by C. E. Hunter. The west two miles of the south boundary were resurveyed in 1961-62 by Cazier and Murphy.

The following notes are those of a dependent resurvey of the west three miles of the north boundary and the south boundary of sections 34 and 35 and portions of the subdivisional lines, designed to restore the corners in their true original location according to the best available evidence, and the survey of subdivisions in certain sections and accretion survey in Secs. 27 and 34, Township 7 South, Range 31 East, Gila and Salt River Meridian, Arizona.

This survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, the Special Instructions dated December 14, 1967, and Supplemental Special Instructions dated February 19, 1968.

Only the true line bearings and horizontal distances for the surveyed lines are given in these notes. Unless described, each corner is monumented with a standard iron post 30 inches long, 2½ inches diameter, flanged at the base and with a brass cap riveted to the top.

The geographic position of the southeast corner of Sec. 35 is: Latitude, 32°46'25" North, and Longitude, 109°08'01.8" West, as determined by traverse from the southeast corner of Township 8 South, Range 31 East, concurrently being surveyed under this same Group No.

The mean magnetic declination was found to be: 13° East.

Dependent Resurvey, Portion of the South Boundary
Township 7 South, Range 31 East

Reestablishment of the Survey Executed
by T. F. White, in 1882

The corner of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented by a mound of stone at the cor. of fences bearing N. and E. I accept this as the best available evidence of the orig. cor. position.

At the corner point

Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.

T7S R31E
S35|S36
S 2|S 1
T8S
1968

N. 89°55' W., bet. secs. 2 and 35.

Over rolling land, through moderate undergrowth.

Ascend SE. slope.

15.00

E. rim of a low mesa, bears NE. and SW.; thence across top of mesa.

Dep. Res., Portion South Boundary, T. 7 S., R. 31 E.

CHAINS	
28.00	W. rim of same mesa, bears SW. and NE., curving to the NW.; desc. NW. slope.
39.95	The 1/4 sec. cor. of secs. 2 and 35, monumented by a granite stone, 12x12x4 ins., firmly set in a mound of stone, mkd. 1/4 on N. face.
	At the corner point
	Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T7S R31E $\frac{1}{4} \frac{S35}{S 2}$ T8S 1968</p>
	Bury the orig. cor. stone alongside the iron post.
	<p>_____</p>
	N. 89°54' W., beginning new measurement.
	Over gently rolling land, through moderate undergrowth.
20.05	Point for the W 1/16 sec. cor. of secs. 2 and 35, at proportionate dist.; not monumented.
38.40	Little Sand Wash, 60 lks. wide, 4 ft. deep, drains S. 30° E.
40.10	The cor. of secs. 2, 3, 34 and 35, monumented by an old mound of stone. I accept this as best remaining evidence of the original cor.
	At the corner point
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	<p>T7S R31E $\frac{S34}{S 3} \frac{S35}{S 2}$ T8S 1968</p>
	<p>Land, rolling. Soil, rocky clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	N. 89°58' W., bet. secs. 3 and 34.
	Over gently rolling land, through moderate undergrowth.
2.50	Telephone line, bears S. 40° E. and N. 40° W.
14.90	Fence, bears S. 25° E. and N. 25° W.
16.60	State Highway No. 75, bears S. 25° E. and N. 25° W.
18.30	Fence, bears S. 25° E. and N. 25° W.
19.00	Approximate distance to underground pipe line, bears S. 25° E. and N. 25° W.

Dep. Res., Portion South Boundary, T. 7 S., R. 31 E.

CHAINS	
20.07	<p>Point for the E 1/16 sec. cor. of secs. 3 and 34, at proportionate dist.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E E 1/16 $\frac{S34}{S 3}$ T8S 1968</p> <p>Raise a mound of stone N. of the cor.</p> <p>Cor. is located 3 lks. North of a fence cor.; fences bear E. and S.</p>
40.14	<p>The $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented by a lava stone, 14x8x8 ins., loosely set in a mound of stone, mkd. $\frac{1}{4}$ on one face.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°44' W., beginning new measurement.</p> <p>Over gently rolling land, through moderate undergrowth.</p>
15.20	Track road, bears N. and S. 5° E.
17.10	Track road, bears NE. and SW.
17.90	Power line, bears NW. and SE.
20.02	Point for the W 1/16 sec. cor. of secs. 3 and 34, at proportionate dist.; not monumented.
26.20	Track road, bears S. 20° E. and N. 20° W.
32.10	Track road, bears SE. and NW.
37.00	Enter cultivated land, bears S. 50° E. and N. 50° W.
37.30	Fence, bears NE. and SW., continue over cultivated land.
40.04	<p>The cor. of secs. 3, 4, 33 and 34, monumented by an iron bar and a broken wood post 4 ins. diam. I accept this as best remaining evidence of the original cor.</p> <p>from which</p> <p style="padding-left: 40px;">An old Adobe House, bears N. 28°27' W., 10.56 chs. dist.</p> <p>Land, gently rolling. Soil, gravelly and sandy clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
<p>Dependent Resurvey, Portion of the North Boundary Township 7 South, Range 31 East</p>	
<p>Reestablishment of the Survey executed by D. Drummond in 1891</p> <hr style="width: 30%; margin: 10px auto;"/> <p>The cor. of secs. 3, 4, 33 and 34, monumented by a granite stone, 36x18x10 ins., firmly set, mkd. 3 notches on E. and W. faces, mound of stone W.</p>	

Dep. Res., Portion North Boundary, T. 7 S., R. 31 E.

CHAINS	
	<p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;"> T6S R31E S33 S34 S 4 S 3 T7S 1968 </p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located at a fence cor.; fences bear N., E., S. and W.</p> <p>N. 89°47' W., bet. secs. 4 and 33.</p> <p>Over level land, through moderate undergrowth.</p>
3.00	Wash, 20 lks. wide, 1 ft. deep, drains NW.
9.20	Stove Wash, 20 lks. wide, 1 ft. deep, drains S. 30° W.
20.02	Fence, bears S. and N. to cor. of fences bearing N., S. and E.
20.60	Bladed road, bears N. and S.; enter cultivated field.
39.94	Point for the ¼ sec. cor. of secs. 4 and 33, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
41.40	Irrigation ditch, concrete lined, 6 lks. wide, 2 ft. deep, flows S.
78.23	Fence and power line, bears S. 18° E. and N. 18° W.; leave cultivated field.
79.88	Point for the cor. of secs. 4, 5, 32 and 33, at proportionate dist., falls in center of State Highway No. 75, bears S. 18° E. and N. 18° W.; unable to find any remaining evidence of the original cor.; not monumented.
	<p>Land, level. Soil, sandy clay loam. Timber, none. Undergrowth, creosote bush and grass.</p>
	<p>N. 89°47' W., bet. secs. 5 and 32.</p> <p>Over nearly level land.</p>
0.82	Fence and telephone line bears S. 18° E. and N. 18° W.
1.10	Concrete lined irrigation ditch, 10 lks. wide, 2 ft. deep, drains S. 18° E.; enter cultivated field.
27.50	Farm road, on a curve, bears NE. and W.
28.00	Wash, 20 lks. wide, 1 ft. deep, drains S., curving to W.

Dep. Res., Portion North Boundary, T. 7 S., R. 31 E.

CHAINS	
29.30	Fence, bears NE. and SW., on a low spur, sloping S. 60° W.
33.95	Proportionate point for the witness $\frac{1}{4}$ sec. cor. of secs. 5 and 32; there is no remaining evidence of the cor. set in 1891; not monumented.
34.35	Point for the 1891 meander cor. of secs. 5 and 32, on the right bank of the Gila River at proportionate dist.; there is no remaining evidence of the original cor. Not monumented.
39.94	Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, at proportionate dist.; not monumented.
41.20	Fence, bears N and S.; leave cultivated land.
41.60	Present right bank of the Gila River, bears N. and S.
43.60	Present left bank of the Gila River, bears N. and S.; enter dense undergrowth.
46.33	Point for the 1891 meander cor. of secs. 5 and 32, on the left bank of the Gila River at proportionate dist.; there is no remaining evidence of the original cor. Not monumented.
54.30	Southern Pacific Railroad, bears S. 13°40' E. and N. 13°40' W.; leave dense undergrowth, enter rolling land.
54.60	Telegraph line, bears S. 13°40' E. and N. 13°40' W.
59.91	Point for the W $\frac{1}{16}$ sec. cor. of secs. 5 and 32, at proportionate dist. Set the iron post 18 ins. in the ground in a collar of stone, brass cap mkd.
	<p>T6S R31E W $\frac{1}{16}$ $\frac{S32}{S 5}$ T7S 1968</p>
	Raise a mound of stone N. of the cor.
	Ascend E. slope.
79.88	The cor. of secs. 5, 6, 31 and 32, monumented by a granite stone, 18x10x6 ins., loosely set, mkd. 5 notches on E. and 1 notch on W. faces, mound of stone alongside.
	At the corner point
	Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T6S R31E <u>S31</u> <u>S32</u> S 6 S 5 T7S 1968</p>
	Deposit the orig. cor. stone alongside the iron post.
	Land, nearly level to rolling. Soil, sandy loam to rocky. Timber, dense mesquite around Gila River. Undergrowth, creosote bush, cat claw and willow.
	N. 89°44' W., bet. secs. 6 and 31.

Dep. Res., Portion North Boundary, T. 7 S., R. 31 E.

CHAINS	
	Over rolling mountainous land, through moderate undergrowth.
1.80	Fence, bears S. 70° E. and N. 70° W.
1.90	Spur, slopes N.; desc. W. slope.
15.80	Draw, drains NE.; asc. E. slope.
20.19	Point for the E 1/16 sec. cor. of secs. 6 and 31, at proportionate dist. Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd. <div style="text-align: center;"> T6S R31E E 1/16 $\frac{S31}{S 6}$ T7S 1968 </div>
37.90	Wash, 10 lks. wide, 1 ft. deep, drains N. 30° E.
40.38	Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate dist.; unable to find any remaining evidence of the original cor. Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd. <div style="text-align: center;"> T6S R31E 1/4 $\frac{S31}{S 6}$ T7S 1968 </div> <p>The cor. is located on the South side of a draw, draining E.</p>
60.00	Spur, slopes N.; desc. W. slope.
70.10	Wash, 20 lks. wide, 1 ft. deep, drains N.; asc. E. slope.
74.90	Draw, drains N. 80° E.
78.94	The cor. of Tps. 6 and 7 S., Rs. 30 and 31 E., monumented by an iron post 3 ins. diam., firmly set in a mound of stone, brass cap mkd. <div style="text-align: center;"> T6S R30E R31E $\frac{S36}{S 1} \frac{S31}{S 6}$ T7S 1931 </div> <p>Land, rolling to mountainous. Soil, rocky. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
Dependent Resurvey, Portions of the Subdivisional Lines Township 7 South, Range 31 East	
Reestablishment of the Survey executed by D. Drummond in 1891	
From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.	

Dep. Res., Portion Subdivisional Lines, T 7 S., R. 31 E.

CHAINS	
	<p>N. 0°01' W., bet. secs. 35 and 36.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
	<p>Ascend S. slope.</p>
12.00	<p>S. rim of mesa, bears N. 60° E. and S. 60° W.; thence across top of mesa.</p>
20.20	<p>N. rim of mesa, bears N. 80° E. and S. 80° W.; desc. N. slope.</p>
39.43	<p>The ¼ sec. cor. of secs. 35 and 36, monumented by a granite stone, 18x12x8 ins., set 10 ins. in the ground, mkd. ¼ S on W. face, mound of stone W.</p>
	<p>At the corner point</p>
	<p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E ¼ S35 S36 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p>
	<p>Raise a mound of stone W. of the cor.</p>
	<p>The cor. is located 11 lks. East of a N. and S. fence.</p>
	<hr style="width: 20%; margin: auto;"/>
	<p>N. 0°13' W., beginning new measurement.</p>
	<p>Over rolling bad lands, through moderate undergrowth.</p>
40.14	<p>The cor. of secs. 25, 26, 35 and 36, monumented by a granite stone, 18x12x10 ins., set 10 ins. in the ground, mkd. 1 notch on E. and S. faces, mound of stone alongside.</p>
	<p>At the corner point</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E S26 S25 S35 S36 1968</p>
	<p>from which</p>
	<p style="padding-left: 40px;">A fence cor., bears S. 26°34' W., 11 lks. dist.; fences bear N., S. and S. 78° W.</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p>
	<p>Raise a mound of stone W. of the cor.</p>
	<p>Land, rolling to bad lands.</p>
	<p>Soil, rocky and gravelly loam.</p>
	<p>Timber, none.</p>
	<p>Undergrowth, creosote bush, cacti and bunch grass.</p>
	<hr/>
	<p>N. 0°31' W., bet. secs. 25 and 26.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>Over rolling land, through moderate undergrowth.</p> <p>Continue along E. side of a N. and S. fence.</p>
16.40	<p>Little Sand Wash, 30 lks. wide, 2 ft. deep, drains SW.; asc. S. slope. Leave bad lands.</p>
21.50	<p>S. rim of mesa, bears NE. and SW.; thence across top of mesa.</p>
40.43	<p>The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented by a sandstone, 18x10x4 ins., set 10 ins. in the ground, mkd. $\frac{1}{4}$ S. on W. face, mound of stone alongside.</p>
	<p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E $\frac{1}{4}$ S26 S25 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p>
	<p>The cor. is located 3 lks. East of a N. and S. fence.</p>
	<p style="text-align: center;">—————</p>
	<p>N. 0°14' W., beginning new measurement.</p> <p>Continue across top of mesa.</p>
10.00	<p>N. rim of mesa, bears NE. and SW.; desc. NW. slope.</p>
13.30	<p>Wash, 80 lks. wide, 2 ft. deep, drains W.</p>
18.70	<p>Harris Wash, 100 lks. wide, 3 ft. deep, drains W., 50 lks., thence SW.; asc. SE. slope.</p>
30.00	<p>Top of mesa, bears NE. and SW.; thence across top of mesa.</p>
39.96	<p>The cor. of secs. 23, 24, 25 and 26, monumented by a sandstone, 20x18x4 ins., set 12 ins. in the ground, mkd. 2 notches on S and 1 notch on E faces, mound of stone alongside.</p>
	<p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E S23 S24 S26 S25 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p>
	<p>The cor. is located 2 lks. South of a cor. of fences bearing E., S. and W.</p>
	<p>Land, rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>The cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented by an iron post, 2 ins. diam., projecting 12 ins. above the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E R32E S24 S19 S25 S30 1931</p> <p>The cor. is located 5 lks. South of a fence cor.; fences bear N. and irregular W.</p> <p>N. 89°57' W., bet. secs. 24 and 25.</p> <p>Over nearly level land, through moderate undergrowth.</p>
8.00	Fence, bears N. 89° E. and S. 89° W.
40.50	<p>Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate dist.; unable to find any remaining evidence of the original cor.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E ¼ S24 S25 1968</p>
	<p>Raise a mound of stone N. of the cor.</p> <p>The cor. is located 63 lks. N. of an E. and W. fence.</p>
44.60	Leave level land, enter rolling land, bears NE. and SW.
50.50	Spur, slopes N. 10° W.
52.60	Harris Wash, 20 lks. wide, 1 ft. deep, drains S 20° W.
64.00	Enter mesa, bears N. 60° E. and SW.
79.80	Fence, bears S. 89° E. and N. 89° W.
81.00	<p>The cor. of secs. 23, 24, 25 and 26.</p> <p>Land, level to rolling. Soil, rocky clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	N. 0°06' E., bet. secs. 23 and 24.
	Over rolling land, through moderate undergrowth.
3.00	N. rim of mesa, bears E. and W.; desc. N. slope.
17.80	Wash in Goat Camp Canyon, 100 lks. wide, 3 ft. deep, drains N. 75° W.; asc. S. slope.
39.95	<p>The ¼ sec. cor. of secs. 23 and 24, monumented by a porphyry stone, 18x14x7 ins., set 8 ins. in the ground, dimly mkd. ¼ on W. face, mound of stone alongside.</p> <p>At the corner point</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ S23 S24 1968</p> <p>from which</p> <p style="padding-left: 40px;">A windmill, bears N 81°18' W., 38.32 chs. dist.</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located on a low spur, sloping S. 60° W.</p> <p style="text-align: center;">_____</p> <p>N. 0°15' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
19.80	Wash, 30 lks. wide, 2 ft. deep, drains S. 60° W.
26.30	Wash, 50 lks. wide, 3 ft. deep, drains N. 50° W.
39.65	<p>The cor. of secs. 13, 14, 23 and 24, monumented by a sandstone, 20x12x9 ins., set 10 ins. in the ground, mkd. 3 notches on S. and 1 notch on E. faces.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E S14 S13 S23 S24 1968</p> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Land, rolling. Soil, gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>The cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented by an iron post 2 ins. diam., projecting 10 ins. above the ground, mound of stone W., brass cap mkd.</p> <p style="text-align: center;">T7S R31E R32E S13 S18 S24 S19 1931</p> <p>S. 89°36' W., bet. secs. 13 and 24.</p> <p>Over rolling land, through moderate undergrowth.</p>
33.70	Wash, 40 lks. wide, 1 ft. deep, drains S.
40.75	<p>The $\frac{1}{4}$ sec. cor. of secs. 13 and 24, monumented by a granite stone, 18x12x6 ins., set 10 ins. in the ground mkd. $\frac{1}{4}$ on N. face, mound of stone N.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
<p>7.90</p> <p>40.39</p>	<p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ $\frac{S13}{S24}$ 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°50' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Low ridge, bears NE. and SW.</p> <p>The cor. of secs. 13, 14, 23 and 24.</p> <p>Land, rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
<p>3.80</p> <p>39.89</p> <p>40.49</p> <p>74.70</p> <p>79.50</p> <p>80.98</p>	<p>N. 0°07' W., bet. secs. 13 and 14.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 40 lks. wide, 2 ft. deep, drains S. 70° W.</p> <p>Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 13 and 14.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ S14↑S13 W C 1968</p> <p>Set a mesquite post 3½ ins. diam., 4 ft. long, alongside the iron post.</p> <p>The cor. is located on the South bank of China Camp Canyon.</p> <p>The point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14, at proportionate dist.; unable to find any remaining evidence of the original cor. This cor. falls in wash in China Camp Canyon, in an unsafe position. The wash is 60 lks. wide, 3 ft. deep, drains N. 50° W.</p> <p>Wash, 40 lks. wide, 4 ft. deep, drains W.</p> <p>Fence, bears N. 80° E. and S. 80° W.</p> <p>The cor. of secs. 11, 12, 13 and 14, monumented by a granite stone, 20x10x8 ins., set 10 ins. in the ground, mkd. 4 notches on S. and 1 notch on E. faces, mound of stone W.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS

At the corner point

Set the iron post 20 ins. in the ground, brass cap mkd.

T7S R31E
 $\frac{S11}{S14} | \frac{S12}{S13}$
 1968

Bury the orig. cor. stone alongside the iron post.

Raise a mound of stone W. of the cor.

Land, rolling.

Soil, gravelly clay and sandy loam.

Timber, none.

Undergrowth, creosote bush, cacti and bunch grass.

The cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented by an iron post 2 ins. diam., firmly set, mound of stone W., brass cap mkd.

T7S
 R31E R32E
 $\frac{S12}{S13} | \frac{S7}{S18}$
 1931

N. 88°19' W., bet. secs. 12 and 13.

Over rolling land, through moderate undergrowth.

39.33

The $\frac{1}{2}$ sec. cor. of secs. 12 and 13, monumented by a granite stone, 16x14x8 ins., loosely set, mkd. $\frac{1}{2}$ on one face.

At the corner point

Set the iron post 20 ins. in the ground, brass cap mkd.

T7S R31E
 $\frac{1}{2} \frac{S12}{S13}$
 1968

Bury the orig. cor. stone alongside the iron post.

Raise a mound of stone N. of the cor.

The cor. is located 95 lks. South of a fence, bearing N. 85°19' E. and S. 85°19' W.

S. 89°09' W., beginning new measurement.

Over rolling land, through moderate undergrowth.

14.11

Fence, bears N. 85°19' E. and S. 80°19' W.

42.11

The cor. of secs. 11, 12, 13 and 14.

Land, rolling.

Soil, gravelly loam.

Timber, none.

Undergrowth, creosote bush, cacti and bunch grass.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.</p> <p>N. 0°06' E., bet. secs. 34 and 35.</p> <p>Over rolling land, through moderate undergrowth.</p>
40.36	<p>The ¼ sec. cor. of secs. 34 and 35, monumented by a granite stone, 18x10x8 ins., set 12 ins. in the ground, mkd. ¼ S. on W. face, mound of stone alongside.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E ¼ S34 S35 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located on a low spur, sloping S. 60° E.</p>
	<p style="text-align: center;">_____</p> <p>N. 0°09' E., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
15.00	<p>Fence, bears N. 70° E. and S. 70° W.</p>
20.23	<p>Point for the N 1/16 sec. cor. of secs. 34 and 35, at proportionate dist.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E N1/16 S34 S35 1968</p> <p>Raise a mound of stone W. of the cor.</p>
20.40	<p>Wash, 10 lks. wide, 3 ft. deep, drains W.</p>
29.50	<p>Sandia Wash, 40 lks. wide, 2 ft. deep, drains S. 50° W.</p>
40.46	<p>The cor. of secs. 26, 27, 34 and 35, monumented by a granite stone, 36x20x12 ins., set 15 ins. in the ground, mkd. 1 notch on S. and 2 notches on E. faces, set in a collar of stone.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E S27 S26 S34 S35 1968</p> <p>Deposit the orig. cor. stone alongside the iron post.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>Raise a mound of stone W. of the cor.</p> <p>Land, rolling. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>N. 88°28' W., bet.secs. 26 and 35.</p> <p>Over rolling land, through moderate undergrowth.</p>
0.30	Wash, 5 lks. wide, ½ ft. deep, drains S.
7.20	Ridge, bears N. 20° E. and S. 20° W.; desc. W. slope.
25.50	Little Sand Wash, 20 lks. wide, 1 ft. deep, drains SW.; asc. E. slope.
34.20	Ridge, bears N. and S.; desc. W. slope.
39.40	Spur, slopes S. 30° E.
39.70	<p>The ¼ sec. cor. of secs. 26 and 35, monumented by a granite stone, 15x9x5 ins., loosely set, mkd. ¼ S on N. face.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E ¼ S26 S35 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>N. 89°24' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.90	Ridge, bears NE. and SW.
8.80	Spur, slopes S.
16.20	Low ridge, bears SE. and NW.
25.20	Sandia Wash, 50 lks. wide, 1 ft. deep, drains S.
40.01	<p>The cor. of secs. 26, 27, 34 and 35.</p> <p>Land, rolling. Soil, gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 1°04' W., bet. secs. 26 and 27.</p> <p>Over rolling land, through moderate undergrowth.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
0.30	Wash, 10 lks. wide, 1 ft. deep, drains SW.; asc. S. slope.
12.00	Ridge, bears E. and W.; desc. N. slope.
19.70	Ridge, bears SE. and NW.
29.90	Wash, 20 lks. wide, 2 ft. deep, drains W.; asc. S. slope.
37.20	Spur, slopes W.; desc. N. slope.
39.37	Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, at proportionate dist.; unable to find any remaining evidence of the original cor. Set the iron post 22 ins. in the ground, brass cap mkd. T7S R31E $\frac{1}{4}$ S27 S26 1968
46.00	Harris Wash, 40 lks. wide, 2 ft. deep, drains N. 40° W.; asc. S. slope.
60.80	Ridge, bears S. 65° E. and N. 65° W.; desc. N. slope.
72.30	Wash, 30 lks. wide, 2 ft. deep, drains SW.; asc. S. slope.
78.74	The cor. of secs. 22, 23, 26 and 27, monumented by an old mound of stone. This position is harmoniously related to other existing original cors. I accepted this old mound of stone as best remaining evidence of the original cor. position. At the corner point Set the iron post 20 ins. in the ground, brass cap mkd. T7S R31E S22 S23 S27 S26 1968
24.50	Raise a mound of stone W. of the cor. The cor. is located on a W. slope. Land, rolling. Soil, gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
24.50	From the cor. of secs. 23, 24, 25 and 26.
34.50	S. 89°50' W., bet. secs. 23 and 26.
40.07	Over rolling land, through moderate undergrowth.
34.50	Wash, 10 lks. wide, 1 ft. deep, drains S. 80° W.
40.07	Wash, 10 lks. wide, 1 ft. deep, drains N. 60° W.
40.07	The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented by a granite stone, 10x8x6 ins., firmly set in a mound of stone, dimly mkd. $\frac{1}{4}$ on N. face. At the corner point

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
40.48	<p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ $\frac{S23}{S26}$ 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>The cor. is located 280 lks. South of a fence bearing S. 89° E. and N. 89° W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°52' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>The cor. of secs. 22, 23, 26 and 27.</p> <p>Land, rolling.. Soil, gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
5.20 7.70 11.90 17.30 34.80 36.20 39.94 40.30 40.44	<p>N. 0°01' E., bet. secs. 22 and 23.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 20 lks. wide, 2 ft. deep, drains N. 50° W.; asc. S. slope.</p> <p>Fence, on a ridge, bears E. and N. 70° W.; ridge, bears E. and W.; desc. N. slope.</p> <p>Wash, 10 lks. wide, 1 ft. deep, drains W.; asc. S. slope.</p> <p>Ridge, bears E. and W.; desc. N. slope.</p> <p>Enter wash area in Goat Camp Canyon, drains W.</p> <p>Track road in wash, bears E. and W.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, at proportionate dist.; unable to find any remaining evidence of the orig. cor. This cor. falls in wash in Goat Camp Canyon in an unsafe position, impractical to monument.</p> <p>Leave wash area, drains W.; asc. S. slope.</p> <p>Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 22 and 23.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ S22↓S23 W C 1968</p> <p>Raise a mound of stone W. of the cor.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
46.30	Spur, slopes S. 70° E.; desc. N. slope.
61.00	Wash, 20 lks. wide, 1 ft. deep, drains SW.; asc. S. slope.
76.90	Spur, slopes W.; desc. N. slope.
79.88	The cor. of secs. 14, 15, 22 and 23, monumented by a granite stone, 24x12x10 ins., loosely set in a collar of stone, mkd. 3 notches on S. and 2 notches on E. faces.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p>T7S R31E <u>S15 S14</u> <u>S22 S23</u> 1968</p>
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	<p>Land, rolling. Soil, rocky and gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	From the cor. of secs. 13, 14, 23 and 24.
	S. 89°50' W., bet. secs. 14 and 23.
	Over rolling land, through moderate undergrowth.
5.50	Wash, 30 lks. wide, 1 ft. deep, drains S. 50° W.
30.40	Ridge, bears N. 65° E. and S. 65° W.; desc. W. slope.
37.60	Wash, 20 lks. wide, 1 ft. deep, drains S. 30° W.; asc. E. slope.
40.20	The ¼ sec. cor. of secs. 14 and 23, monumented by a sandstone, 20x10x6 ins., set 12 ins. in the ground, mkd. ¼ on N. face, mound of stone N.
	At the corner point
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p>T7S R31E ¼ <u>S14</u> <u>S23</u> 1968</p>
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone N. of the cor.
	The cor. is located at the base of a spur, sloping SE.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>N. 89°41' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
16.00	Ridge, bears N. 60° E. and S. 60° W.
40.24	The cor. of secs. 14, 15, 22 and 23.
	<p>Land, rolling. Soil, rocky and gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 0°07' E., bet. secs. 14 and 15.</p> <p>Over rolling land, through moderate undergrowth.</p>
5.60	Wash, 20 lks. wide, 1 ft. deep, drains SW.
11.50	Spur, slopes SW.
20.90	Enter wash area in China Camp Canyon, drains S. 70° W.
23.30	Leave wash area, drains S. 70° W.; asc. S. slope.
36.70	Ridge, bears N. 30° E. and S. 30° W.; desc. N. slope.
40.39	The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented by a granite stone, 20x8x6 ins., loosely set, mkd. $\frac{1}{4}$ S on W. face, mound of stone W.
	At the corner point
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p>T7S R31E</p> <p>$\frac{1}{4}$</p> <p>S15 S14</p> <p>1968</p>
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	<hr style="width: 20%; margin: 0 auto;"/>
	N. 0°04' E., beginning new measurement.
	Over rolling land, through moderate undergrowth.
17.60	Wash, 30 lks. wide, 2 ft. deep, drains S. 60° W.; asc. S. slope.
18.50	Fence, bears N. 72° E. and S. 72° W.
32.80	Spur, slopes SW.; desc. N. slope.
39.84	The cor. of secs. 10, 11, 14 and 15, monumented by a granite stone, 18x12x5 ins., loosely set, mkd. 4 notches on S. and 2 notches on E. faces, mound of stone alongside.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p style="text-align: center;">T7S R31E $\frac{S10}{S15} \frac{S11}{S14}$ 1968</p> <p>Bury the orig. cor. stone alongside the iron post. Raise a mound of stone W. of the cor. Land, rolling. Soil, rocky and gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 11, 12, 13 and 14. S. 89°32' W., bet. secs. 11 and 14. Over rolling land, through moderate undergrowth.</p> <p>19.50 Wash, 20 lks. wide, 1 ft. deep, drains NW. 23.60 Same wash, drains S. 20° W. 25.60 Same wash, drains NW. 29.80 Spur, slopes NW.; desc. NW. slope. 40.06 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, at proportionate dist.; unable to find any remaining evidence of the original cor. Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4} \frac{S11}{S14}$ 1968</p> <p>Raise a mound of stone N. of the cor. The cor. is located on a NW. slope.</p> <p>45.20 Spur, slopes S. 10° E. 59.30 Spur, slopes N. 80.12 The cor. of secs. 10, 11, 14 and 15. Land, rolling. Soil, gravelly clay and sandy loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 0°02' E., bet. secs. 10 and 11. Over rolling land, through moderate undergrowth.</p> <p>9.80 Sanders Wash, 50 lks. wide, 3 ft. deep, drains N. 80° W. and Daniels Camp Road, bears S. 80° E. and N. 80° W.; asc. S. slope. 17.70 Ridge, bears N. 60° E. and S. 60° W.; desc. N. slope. 27.00 Draw, drains S. 60° W., 75 lks. dist. to a small stock tank; asc. S. slope.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
40.07	<p>The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, monumented by a granite stone, 20x20x3 ins., loosely set, mkd. $\frac{1}{2}$ S. on one face, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ S10 S11 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located on a ridge, 100 lks. South of the North end; ridge bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°27' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>6.90 Wash, 20 lks. wide, 1 ft. deep, drains N. 60° W.</p> <p>9.10 Spur, slopes N. 60° W.</p> <p>11.60 Enter Bitter Creek area, drains W.</p> <p>14.60 Leave Bitter Creek area, asc. S. slope.</p> <p>32.00 Graded road, on a ridge, bears N. 75° E. and S. 75° W.; desc. N. slope.</p> <p>36.80 Wash, 20 lks. wide, 2 ft. deep, drains S. 80° W.; asc. S. slope.</p> <p>40.70 The cor. of secs. 2, 3, 10 and 11, monumented by a granite stone, 20x10x6 ins., set 12 ins. in the ground, mkd. 5 notches on S. and 2 notches on E. faces, mound of stone alongside.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E <u>S 3 S 2</u> S10 S11 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Land, rolling.</p> <p>Soil, gravelly clay and sandy loam.</p> <p>Timber, none.</p> <p>Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	N. 0°10' E., bet. secs. 33 and 34.
	Over nearly level cultivated land.
3.20	Fence, bears S. 55° E. and N. 55° W.; leave cultivated land, thence over nearly level land, through moderate undergrowth.
9.80	Power line, bears S. 85° E. and N. 85° W.
11.50	Graded road, bears SE. and NW., 100 lks. dist.; thence SW.
18.70	Track road, bears S. 15° E. and N. 15° W.
37.20	Track road, bears S. 30° E. and N. 30° W.
38.00	Fence, bears N. 40° E. and S. 40° W.; enter cultivated land.
40.14	Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
42.70	Irrigation Canal, 40 lks. wide, 4 ft. deep, drains NW.
42.90	Fence, bears SE. and NW.
49.90	Fence, bears SE. and NW.
50.98	Point for the 1891 meander cor. of secs. 33 and 34, on the right bank of the Gila River, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
53.60	Present right bank of the Gila River, a cut bank, 4 ft. high, bears N. 67° E. and S. 67° W.; not monumented.
55.19	Point for the 1891 meander cor. of secs. 33 and 34, on the left bank of the Gila River, at proportionate dist., falls on the present left bank of the Gila River, a cut bank 4 ft. high, bears N. 65° E. and S. 65° W.; unable to find any remaining evidence of the original cor.; not monumented.
59.20	Fence, bears NE. and SW., leave cultivated land, enter rolling land.
59.50	Southern Pacific Railroad, bears NE. and SW.
60.70	Telegraph line, bears NE. and SW.
68.20	Track road, bears NE. and SW.
74.10	Track road, bears SE. and NW.
75.90	Telegraph line, bears S. 32° E. and N. 32° W.
77.30	Southern Pacific Railroad, bears S. 32° E. and N. 32° W.
77.70	Fence, bears S. 32° E. and N. 32° W.
80.28	Point for the cor. of secs. 27, 28, 33 and 34, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS

from which

The cor. of secs. 28, 29, 32 and 33, bears N. 89°48' W., 79.92 chs. dist., monumented by a granite stone, 8x10x4 ins. showing above the ground, mkd. 1 notch on S. and 4 notches on E. faces, mound of stone W.; not remonumented.

This line was fully retraced and a diligent search was made for evidence of the intervening corner, which was not recovered.

Land, rolling to level to rolling.
Soil, gravelly and sandy clay loam.
Timber, none.

Undergrowth, creosote bush; cacti and bunch grass.

From the cor. of secs. 26, 27, 34 and 35..

S. 89°32' W., bet. secs. 27 and 34.

Over rolling land, through moderate undergrowth.

0.30 Wash, 100 lks. wide, 1 ft. deep, drains S. 20° W.

10.40 Ridge, bears N. 30° E. and S. 30° W.

19.30 Spur, slopes S. 10° W.

20.025 Point for the E 1/16 sec. cor. of secs. 27 and 34, at proportionate dist.

Set the iron post 22 ins. in the ground, brass cap mkd.

T7S R31E
S27
E 1/16 $\frac{S27}{S34}$
1968

from which

A windmill bears S. 60°58' W., 9.00 chs. dist.

Raise a mound of stone N. of the cor.

26.20 Wash, 20 lks. wide, 3 ft. deep, drains SW.

37.10 Telephone line, bears N. 5° E. and S. 5° W.

38.40 Wash, 10 lks. wide, 3 ft. deep, drains SW.

38.80 Fence, bears S. 2° E. and N. 2° W.

40.05 Point for the 1/4 sec. cor. of secs. 27 and 34 at record and proportionate dist.; unable to find any remaining evidence of the original cor.

Set the iron post 6 ins. below the surface, on the E. edge of Highway No. 75, brass cap mkd.

T7S R31E
S27
1/4 $\frac{S27}{S34}$
1968

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS

from which

A highway marker, bears N. 50°19' E., 153 lks. dist., monumented by a brass tablet 3 ins. diam., set in a cement block, under right of way fence, brass cap mkd. Sta 369 3454 Elev 36 10 35 1965.

A highway marker, bears N. 66°32' W., 202 lks. dist., monumented by a brass tablet, 3 ins. diam., set in a cement block, under right of way fence, brass cap mkd. Sta 369 3454 Elev 36 12 04 1965.

40.34

Center of State Highway No. 75, bears S. 2° E. and N. 2° W.

41.85

Fence, bears S. 2° E. and N. 2° W.

49.60

Underground pipe line, bears S. 25° E. and N. 25° W.

50.40

Ridge, bears N. and S.; desc. W. slope.

54.80

Ridge, bears SE. and NW.

55.60

Fence, bears S. 35° E. and NW.

57.50

Irrigation ditch, 40 lks. wide, 1 ft. deep, drains irregularly NW.


58.10

Leave rolling land; enter cultivated land, bears SE. and NW.

59.00

Point for the 1891 meander cor. of secs. 27 and 34, on the right bank of the Gila River, at record and proportionate dist., a calculated adjusted meander line bears S. 22°30' W. and N. 26°08' W.; unable to find any remaining evidence of the original cor.

Set the iron post 22 ins. in the ground, brass cap mkd.

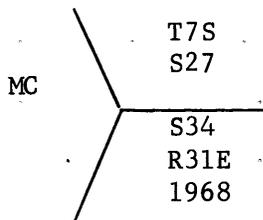

from which

(For informational purposes only)

Point for the 1891 meander cor. of secs. 27 and 34, on the left bank of the Gila River, at record and proportionate dist., bears S. 89°32' W., 9.00 chs. dist.; unable to locate any remaining evidence of the original cor., not monumented.

The point for the cor. of secs. 27, 28, 33 and 34, bears S. 89°32' W., 21.10 chs. dist.

Set a steel pipe 3 ins. diam., 6 ft. long, alongside the iron post.

Land, rolling to nearly level.
Soil, gravelly and sandy clay loam.
Timber, none.
Undergrowth, creosote bush, cacti, bunch grass and willow along the river banks.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	From the point for the cor. of secs. 27, 28, 33 and 34. N. 0°03' W., bet. secs. 27 and 28. Over cultivated land.
3.20	Fence, bears N. 50° E. and S. 50° W.
9.30	Fence, bears N. 50° E. and S. 50° W.
12.40	Power line, bears N. 65° E. and S. 65° W.
13.85	Point for the 1891 meander cor. of secs. 27 and 28, on the left bank of the Gila River, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
15.40	Present left bank of the Gila River, a cut bank, 4 ft. high, bears S. 65° E. and N. 65° W.
17.20	Present right bank of the Gila River, a cut bank, 4 ft. high, bears S. 70°15' E. and N. 65° W.
20.77	Point for the 1891 meander cor. of secs. 27 and 28, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
21.80	Canal, 30 lks. wide, 4 ft. deep, drains S. 60° W.
22.20	Fence, bears N. 60° E. and S. 60° W.
29.70	Leave cultivated land; enter rolling land, through moderate undergrowth.
34.00	Intersect Southeast portion of a circular water tower.
40.14	Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
43.40	Graded road, bears S. 15° E. and N. 15° W.
45.50	Same road, bears NE. and curving S.
49.70	Harris Wash, 50 lks. wide, 1 ft. deep, drains S. 65° W.
53.80	SE. cor. of a Green House, bears West, 43 lks. dist.
56.90	Power line, bears S. 15° E. and N. 15° W.
62.00	Underground pipe line, bears S. 15° E. and N. 15° W.
76.30	Old paved highway, bears S. 28° E. and N. 28° W.
77.50	Fence, bears S. 28° E. and N. 28° W.
80.28	The cor. of secs. 21, 22, 27 and 28, monumented by a volcanic stone, 12x8x5 ins., firmly set in a collar of stone, mkd. 2 notches on S. and 3 notches on E. faces. At the corner point Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p style="text-align: center;">T7S R31E $\frac{S21}{S28} \frac{S22}{S27}$ 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Land, nearly level to rolling. Soil, clay loam to gravelly loam. Timber, none. Undergrowth, creosote bush and bunch grass, willow along river banks.</p>
	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 89°31' W., bet. secs. 22 and 27.</p> <p>Over rolling land, through moderate undergrowth.</p>
14.40	Wash, 30 lks. wide, 1 ft. deep, drains SW.
21.45	Wash, 20 lks. wide, 1 ft. deep, drains irregularly S.
33.60	Spur, slopes SE.
37.80	Draw, drains irregularly S.
39.09	<p>The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented by a lava stone 20x10x5 ins., firmly set in a mound of stone, mkd. $\frac{1}{4}$ on N. face.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E $\frac{1}{4} \frac{S22}{S27}$ 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°07' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
1.50	Low spur, slopes S.
13.00	Ridge, bears N. 50° E. and S. 50° W.
19.83	<p>Point for the W 1/16 sec. cor. of secs. 22 and 27, at proportionate dist.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>T7S R31E W 1/16 $\frac{S22}{S27}$ 1968</p>
	<p>Raise a mound of stone N. of the cor.</p>
34.50	Telephone line, bears S. 35° E. and N. 35° W.
34.60	Fence, bears S. 35° E. and N. 35° W.
35.70	State Highway No. 75, bears S. 35° E. and N. 35° W.
37.70	Fence, bears S. 35° E. and N. 35° W.
39.66	The cor. of secs. 21, 22, 27 and 28.
	<p>Land, rolling. Soil, rocky and gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 0°03' E., bet. secs. 21 and 22.</p> <p>Over rolling land, through moderate undergrowth.</p>
6.00	Telephone line, bears S. 30° E. and N. 30° W.
6.60	Fence, bears S. 10° E. and N. 10° W.
14.60	Track road, bears E. and W.
15.20	Fence, bears NE. and SW.
15.80	Fence, bears SE. and NW.
21.90	Fence, bears NE. and S. 10° W.
25.70	Wash in Goat Camp Canyon, 200 lks. wide, 2 ft. deep, drains W.; fence, bears S. 10° E. and N. 10° W.
38.50	State Highway No. 75, bears S. 10° E. and N. 10° W.
40.01	<p>The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, as determined from reference points set out by the Highway Department. The original corner had been destroyed while making a cut for the new Highway. The department had set out reference points from the orig. cor. which they had found; a malpais stone 8x8x5 ins., firmly set and mkd. $\frac{1}{4}$ on one face. This was accepted as the best remaining evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p>T7S R31E $\frac{1}{4}$ S21 S22 1968</p>
	<p>from which</p> <p style="text-align: center;">Highway RM's, 1 x 2 in. hubs, bear North, 50 and 100 ft. dist.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>Set a wooden post 4 ins. diam., 4 ft. long, alongside the iron post.</p>
	<p>The cor. is located 50 lks. East of Highway No. 75.</p>
	<p>N. 0°11' E., beginning new measurement.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
4.00	<p>Fence cor.; fences bear S. 10° E., W. and N. 10° W.</p>
10.40	<p>Wash, 60 lks. wide, 3 ft. deep, drains W.</p>
19.90	<p>Fence cor., bears W., 25 lks. dist.; fences bear irregularly N., S. and W.</p>
39.79	<p>The cor. of secs. 15, 16, 21 and 22, a fence corner of fences bearing N. 10° E. and S. 10° W. and W. This fence cor. is accepted locally by land owners in the area, and is accepted as the best existing evidence of the original cor. position.</p>
	<p>At the corner point</p>
	<p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E $\frac{S16}{S21} \frac{S15}{S22}$ 1968</p>
	<p>from which</p>
	<p style="padding-left: 40px;">A windmill, bears S. 81° W., 16.00 chs. dist.</p>
	<p>Land, rolling. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 14, 15, 22 and 23.</p>
	<p>S. 89°57' W., bet. secs. 15 and 22.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
11.10	<p>Wash, 20 lks. wide, 1 ft. deep, drains irregularly SW.</p>
40.02	<p>The $\frac{1}{2}$ sec. cor. of secs. 15 and 22, monumented by a granite stone, 15x10x8 ins., set 10 ins. in the ground, mkd. $\frac{1}{2}$ S on N. face, mound of stone N.</p>
	<p>At the corner point</p>
	<p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E $\frac{1}{2} \frac{S15}{S22}$ 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
38.62	<p>The cor. is located on a N. slope.</p> <hr/> <p>N. 88°44' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>The cor. of secs. 15, 16, 21 and 22.</p> <p>Land, rolling. Soil, rocky and gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
<p>3.80</p> <p>27.90</p> <p>28.40</p> <p>31.00</p> <p>39.20</p> <p>39.98</p> <p>4.00</p> <p>6.30</p> <p>15.30</p> <p>22.20</p> <p>24.90</p> <p>26.80</p>	<p>N. 0°20' E., bet. secs. 15 and 16.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 30 lks. wide, 1 ft. deep, drains S. 80° W.</p> <p>Track road, bears S. 81° E. and N. 81° W.</p> <p>Enter China Camp Canyon, drains W.</p> <p>Leave China Camp Canyon.</p> <p>Wash, 20 lks. wide, 1 ft. deep, drains SW.</p> <p>The ¼ sec. cor. of secs. 15 and 16, monumented by a sandstone, 18x18x8 ins., set 10 ins. in the ground, mkd. ¼ S on W. face.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E ¼ S16 S15 1968</p> <p>from which</p> <p style="padding-left: 40px;">A windmill, bears S. 28°08' E., 19.80 chs. dist.</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <hr/> <p>N. 0°19' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Spur, slopes E.</p> <p>Wash, 20 lks. wide, 1 ft. deep, drains S. 80° W.</p> <p>Ridge, bears NE. and SW.; desc. N. slope.</p> <p>Daniels Camp Road, bears N. 70° E. and S. 70° W.</p> <p>Enter Sanders Wash, 2 ft. deep, drains SW.</p> <p>Leave Sanders Wash, drains SW.; asc. S. slope.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
40.25	<p>The cor. of secs. 9, 10, 15 and 16, monumented by a granite stone, 20x10x5 ins., loosely set, mkd. 4 notches on S. and 3 notches on E. faces, mound of stone W.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E S 9 S10 S16 S15 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone W. of the cor.</p> <p>Land, rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 89°26' W., bet. secs. 10 and 15.</p> <p>Over rolling land, through moderate undergrowth.</p>
24.20	Spur, slopes N. 20° W.
38.80	Fence, bears N. and S.
40.52	<p>The ¼ sec. cor. of secs. 10 and 15, monumented by a sandstone, 24x12x5 ins., loosely set, mkd. ¼ S on one face, mound of stone N.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E ¼ <u>S10</u> S15 1968</p> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <p>The cor. is located on a NW. slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°18' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
6.90	Enter Sanders Wash area, drains S. 30° W.
8.20	Daniels Camp Road, bears N. 30° E. and S. 30° W.
9.90	Leave Sanders Wash area, drains S. 30° W.
30.40	Spur, slopes S.
38.15	The cor. of secs. 9, 10, 15 and 16.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	<p>Land, rolling. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 0°12' E., bet. secs. 9 and 10.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
3.30	<p>Spur, slopes N. 80° W.</p>
5.60	<p>Wash, 10 lks. wide, 1 ft. deep, drains S. 80° W.</p>
17.60	<p>Spur, slopes SE.</p>
22.90	<p>Ridge, bears E. and W.; desc. N. slope.</p>
31.30	<p>Spur, slopes S. 85° W.</p>
37.20	<p>Spur, slopes N. 75° W.</p>
40.49	<p>The ¼ sec. cor. of secs. 9 and 10, monumented by a sandstone, 18x9x5 ins., set 10 ins. in the ground, mkd. ¼ S on W. face, mound of stone alongside.</p>
	<p>At the corner point</p>
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E ¼ S 9 S10 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p>
	<p>Raise a mound of stone W. of the cor.</p>
	<hr style="width: 20%; margin: auto;"/> <p>N. 0°04' W., beginning new measurement.</p>
	<p>Over rolling land, through moderate undergrowth.</p>
6.30	<p>Ridge, bears E. and W.; desc. N. slope.</p>
21.00	<p>Enter Bitter Creek, drains S. 85° W.</p>
25.70	<p>Leave Bitter Creek; asc. S. slope.</p>
33.94	<p>Ridge, bears S. 80° E. and N. 80° W.; desc. N. slope.</p>
38.00	<p>Enter nearly level land.</p>
39.10	<p>Junction of graded roads, bears N. 30° E., S. 50° E. and N. 65° W.</p>
39.46	<p>The cor. of secs. 3, 4, 9 and 10, as determined from the remains of the original bearing tree:</p>
	<p style="padding-left: 40px;">A juniper stump 12 ins. diam., bears S. 46°45' E., 478 lks. dist. Dim scribe mks. visible.</p>
	<p>Set the iron post 30 ins. in the ground, brass cap mkd.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>T7S R31E $\frac{S\ 4}{S\ 9} \frac{S\ 3}{S10}$ 1968</p>
	<p>from which</p> <p>A spike in a railroad tie, bears N. 44° E., 48 lks. dist.</p> <p>A spike in a fence corner post, 12 ins. diam., bears N. 2°45' W., 41½ lks. dist.</p> <p>Land, rolling to nearly level. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>S. 89°53' W., bet. secs. 3 and 10.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Ascend SE. slope.</p>
22.80	Ridge, bears N. 75° E. and S. 75° W.; desc. W. slope.
35.40	Ridge, bears NE. and SW.
38.60	Fence, bears N. and S.
38.79	The ¼ sec. cor. of secs. 3 and 10, monumented by a granite stone, 20x8x8 ins., loosely set, mkd. ¼ S on one face, mound of stone alongside.
	<p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>
	<p>T7S R31E $\frac{1}{4} \frac{S\ 3}{S10}$ 1968</p>
	<p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p>
	<p>N. 89°43' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
0.40	Wash, 5 lks. wide, 2 ft. deep, drains irregularly S.
6.30	Spur, slopes S. 10° E.
9.60	Wash, 50 lks. wide, 1 ft. deep, drains N. 80° W.
13.00	Wash, 50 lks. wide, 1 ft. deep, drains S. 65° W.; asc. E. slope.
27.80	Spur, slopes SW.; desc. NW. slope.

Dep. Res. Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
33.50	Spur, slopes N. 50° W.
34.60	Enter nearly level land.
39.30	Graded road, bears N. 30° E. and S. 30° W.
39.52	The cor. of secs. 3, 4, 9 and 10.
	Land, rolling to level. Soil, rocky and gravelly loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	The cor. of secs. 20, 21, 28 and 29, monumented by a granite stone, 18x10x4 ins., firmly set in a mound of stone, mkd. 4 notches on E. and 2 notches on S. faces; not remonumented.
	N. 0°05' W., bet. secs. 20 and 21.
	Over rolling land, through moderate undergrowth.
3.10	Wash, 10 lks. wide, 2 ft. deep, drains irregularly N. 80° E.
34.40	Track road, bears S. 85° E. and N. 85° W.
39.92	The ¼ sec. cor. of secs. 20 and 21, monumented by a broken granite stone, 9x8x5 ins. showing above the ground, mkd. 1 S on W. face. I build a mound of stone W. of the original cor.
	<hr/> N. 0°31' W., beginning new measurement.
	Over rolling land, through moderate undergrowth.
4.20	Enter Wes White Canyon, drains NE.
11.20	Leave same canyon.
19.75	Point for the N 1/16 sec. cor. of secs. 20 and 21, at proportionate dist.; not monumented.
32.80	Fence, bears S. 25° E. and N. 25° W.; enter farm area, under cultivation.
39.50	The cor. of secs. 16, 17, 20 and 21, as determined from local reference points and testimony by Mr. White, an adjacent land owner. The original monument, a granite stone 18x8x4 ins., properly marked, was removed from its original position in a cultivated field by local surveyors and placed under a N. and S. fence line to the west. This cor. was not monumented. From the original corner position, local reference points:
	An iron rod ¾ ins. diam., set in a fence line bearing S. 12° E. and N. 12° W., bears West, 162 lks. dist.
	An iron rod ¾ ins. diam., set alongside a cor. of fences bearing N. 13°30' E. and S. 12° E., bears N. 42° W., 318 lks. dist.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>Land, rolling to level. Soil, gravelly and sandy clay loam. Timber, cottonwoods around farm land. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 0°32' E., bet. secs. 16 and 17. Over cultivated land.</p>
3.40	Fence, bears N. 80° E. and S. 80° W.; leave cultivated land, enter rolling land, through moderate undergrowth.
11.90	Fence, bears N. 13° E. and S. 13° W.; enter wash area, drains NE.
16.70	Leave wash area, drains NE.; asc. SE. slope.
20.00	Point for the S 1/16 sec. cor. of secs. 16 and 17, at proportionate dist. Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T7S R31E S1/16 S17 S16 1968</p>
	<p>Raise a mound of stone W. of the cor. The cor. is located on a SE. slope.</p>
20.40	Low ridge, bears NE. and SW.
40.00	The 1/4 sec. cor. of secs. 16 and 17, monumented by a sandstone, 15x8x5 ins., firmly set in a mound of stone, no legible mks. This was accepted as best remaining evidence of the original cor. At the corner point Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T7S R31E 1/4 S17 S16 1968</p>
	<p>Deposit the orig. cor. stone alongside the iron post. Raise a mound of stone W. of the cor..</p>
	<p>N. 0°02' E., beginning new measurement. Over rolling land, through moderate undergrowth.</p>
5.40	Wash in Sexton Canyon, 40 lks. wide, 2 ft. deep, drains E.
20.60	Fence, bears E. and W.; enter corral.
21.09	Point for the N 1/16 sec. cor. of secs. 16 and 17, at proportionate dist.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T7S R31E N1/16 S17 S16 1968
	from which
	A Soil Conservation marker, bears S. 5°20' E., 10.35 chs. dist., monumented by a brass tablet, 3 ins. diam., mkd. 1965 35 Triangulation.
24.00	Fence, bears E. and W., leave corral.
36.70	Intersect a circular granary.
37.00	SW. cor. of a Farm House, at McKeon Ranch.
42.10	Fence in front of a Farm House at McKeon Ranch, bears E. and W.; enter front yard lawn area.
42.18	The cor. of secs. 8, 9, 16 and 17, monumented by a granite stone, projecting 3 ins. above the ground, mkd. 1 notch on S. face. This stone was not fully uncovered. The stone was pointed out by residents of the McKeon Ranch; not remonumented.
	Land, rolling to level. Soil, gravelly and sandy clay loam. Timber, cottonwoods around the Ranch area. Undergrowth, creosote bush, cacti and bunch grass.
	N. 0°04' W., bet. secs. 8 and 9.
	Across lawn.
2.00	Leave lawn area, bears SE. and NW.
5.10	Telegraph line, bears S. 20° E. and N. 20° W.
5.70	Southern Pacific Railroad, bears S. 20° E. and N. 20° W.
6.90	Graded road, bears S. 20° E. and N. 20° W.
7.70	Fence, bears S. 20° E. and N. 20° W.; enter cultivated field.
30.50	Leave cultivated field, bears S. 60° E. and N. 60° W.
31.00	Present left bank of the Gila River, bears S. 65° E. and N. 65° W.
32.50	SE. bank of a small island, bank bears S. 65° E. and N. 65° W.; thence across SE. end of island.
34.10	NE. bank of island, bears S. 65° E. and N. 65° W.
34.90	Present right bank of the Gila River, bears S. 30° E. and N. 30° W.
36.20	Fence, bears N. 25° E. and S. 25° W.; enter cultivated field.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
36.53	Proportionate point for the witness $\frac{1}{4}$ sec. cor. of secs. 8 and 9 as set in 1891; there is no remaining evidence of the original cor.; not monumented.
36.73	Point for the 1891 meander cor. of secs. 8 and 9, on the left bank of the Gila River at proportionate dist.; there is no remaining evidence of the original cor.; not monumented.
39.49	Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, at proportionate dist.; not monumented.
	Continue across cultivated land.
45.81	Point for the 1891 meander cor. of secs. 8 and 9, on the right bank of the Gila River at proportionate dist.; there is no remaining evidence of the original cor.; not monumented.
63.70	Fence, bears E. and W.
78.00	Fence and Power line, bears E. and W.; leave cultivated field.
78.98	Point for the cor. of secs. 4, 5, 8 and 9, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
	from which
	<p>The $\frac{1}{4}$ sec. cor. of secs. 4 and 9, bears S. $88^{\circ}52'$ E., 40.06 chs. dist., monumented by a lava stone, 10x4x8 ins. showing above the ground, mkd. $\frac{1}{4}$ on W. face, mound of stone S.; not remonumented.</p>
	Land, nearly level.
	Soil, sandy clay loam.
	Timber, none.
	Undergrowth, willow along river banks.
	N. $0^{\circ}20'$ E., bet. secs. 4 and 5.
	Over nearly level land, through moderate undergrowth.
3.40	Fence, bears N. 30° E. and S. 30° W.
4.10	Present right bank of the Gila River, bears N. 30° E. and S. 30° W.
7.40	Present left bank of the Gila River, bears N. 30° E. and S. 30° W.
29.10	Present left bank of the Gila River, bears S. 25° E. and N. 25° W.
37.40	Present right bank of the Gila River, bears S. 25° E. and N. 25° W.
39.41	Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
40.00	Fence, bears S. 20° E. and N. 20° W.; enter cultivated field.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS																	
44.00	Fence, bears E. and W.																
49.80	Fence, bears N. 75° E. and S. 75° W.																
50.20	Graded road, bears N. 75° E. and S. 75° W.																
50.70	Stove Wash, 20 lks. wide, 6 ft. deep, drains S. 75° W.																
76.00	Concrete lined irrigation ditch, 15 lks. wide, 2 ft. deep, drains S. 18° E.; leave cultivated field.																
77.00	Fence and Telephone line, bears S. 18° E. and N. 18° W.																
77.80	W. edge of State Highway No. 75, bears S. 18° E. and N. 18° W.																
78.84	<p>The point for the cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp.</p> <p>Land, level. Soil, sandy clay loam. Timber, none. Undergrowth, willow along river banks.</p>																
	<p>The cor. of secs. 29, 30, 31 and 32, monumented by a lava stone, 18x10x9 ins., loosely set, mkd. 1 notch on S. and 5 notches on E. faces, mound of stone alongside.</p> <p>At the corner point</p> <p>Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R31E</p> <table border="1" style="margin: auto;"> <tr> <td>S30</td> <td>S29</td> </tr> <tr> <td>S31</td> <td>S32</td> </tr> </table> <p>1968</p> </div> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>S. 89°53' W., bet. secs. 30 and 31.</p> <p>Over rolling land, through moderate undergrowth.</p> <tr> <td data-bbox="329 1857 410 1878">11.50</td> <td data-bbox="456 1857 1372 1878">Wash, 150 lks. wide, 2 ft. deep, drains S. 60° E.</td> </tr> <tr> <td data-bbox="329 1919 410 1940">29.70</td> <td data-bbox="456 1919 1372 1940">Fence, bears S. 10° E. and N. 10° W.</td> </tr> <tr> <td data-bbox="329 1981 410 2002">30.00</td> <td data-bbox="456 1981 1372 2002">Same wash, 50 lks. wide, 1 ft. deep, drains N. 50° E.</td> </tr> <tr> <td data-bbox="329 2042 410 2064">40.19</td> <td data-bbox="456 2042 1372 2502"> <p>The ½ sec. cor. of secs. 30 and 31, monumented by a lava stone, 20x10x8 ins., firmly set in a mound of stone, mkd. ½ on N. face.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R31E</p> <table border="1" style="margin: auto;"> <tr> <td>½ S30</td> <td></td> </tr> <tr> <td>½ S31</td> <td></td> </tr> </table> <p>1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> </td> </tr>	S30	S29	S31	S32	11.50	Wash, 150 lks. wide, 2 ft. deep, drains S. 60° E.	29.70	Fence, bears S. 10° E. and N. 10° W.	30.00	Same wash, 50 lks. wide, 1 ft. deep, drains N. 50° E.	40.19	<p>The ½ sec. cor. of secs. 30 and 31, monumented by a lava stone, 20x10x8 ins., firmly set in a mound of stone, mkd. ½ on N. face.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R31E</p> <table border="1" style="margin: auto;"> <tr> <td>½ S30</td> <td></td> </tr> <tr> <td>½ S31</td> <td></td> </tr> </table> <p>1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p>	½ S30		½ S31	
S30	S29																
S31	S32																
11.50	Wash, 150 lks. wide, 2 ft. deep, drains S. 60° E.																
29.70	Fence, bears S. 10° E. and N. 10° W.																
30.00	Same wash, 50 lks. wide, 1 ft. deep, drains N. 50° E.																
40.19	<p>The ½ sec. cor. of secs. 30 and 31, monumented by a lava stone, 20x10x8 ins., firmly set in a mound of stone, mkd. ½ on N. face.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R31E</p> <table border="1" style="margin: auto;"> <tr> <td>½ S30</td> <td></td> </tr> <tr> <td>½ S31</td> <td></td> </tr> </table> <p>1968</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p>	½ S30		½ S31													
½ S30																	
½ S31																	

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°36' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
27.90	Enter wash, 2 ft. deep, drains S. 80° E. from W.
36.40	Leave same wash, drains E. from NW.
38.44	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented by an iron post 2 ins. diam., firmly set in a mound of stone, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T7S R30E R31E S25 S30 S36 S31 1931</p> </div> <p>Land, rolling. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 29, 30, 31 and 32.</p> <p>N. 0°11' E., bet. secs. 29 and 30.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Ascend S. slope.</p>
5.50	Ridge, bears N. 85° E. and S. 85° W.; desc. N. slope.
20.90	Wash, 50 lks. wide, 1 ft. deep, drains N. 80° E.; asc. S. slope.
31.10	Ridge, bears SE. and NW.; desc. N. slope.
39.00	End of descent; thence over nearly level land.
39.96	<p>Point for the 1/2 sec. cor. of secs. 29 and 30, at proportionate dist.; unable to find any remaining evidence of the original cor.</p> <div style="text-align: center; margin: 10px 0;"> <p>T7S R31E 1/2 S30 S29 1968</p> </div> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p>
	<p>from which</p> <p style="text-align: center;">An earthen dam on E. end of a stock pond, bears West, 50 lks. dist.</p>
	<p>Raise a mound of stone W. of the cor.</p>
41.60	Same earthen dam, bears N. 30° E. and S. 30° W.; enter NE. end of stock pond.
43.70	Leave stock pond, bears E. and W.
46.20	Enter wash, 3 ft. deep, drains S. 10° E.
52.30	Leave same wash.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
61.60	Track road, bears NE. and SW.; asc. S. slope.
70.00	Ridge, bears E. and W.; desc. N. slope.
78.00	Low ridge, bears S. 85° E. and N. 85° W.
79.92	The cor. of secs. 19, 20, 29 and 30, monumented by a lava stone, 18x9x8 ins., set 10 ins. in the ground, mkd. 2 notches on S. and 5 notches on E. faces, mound of stone W.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T7S R31E <u>S19</u> <u>S20</u> <u>S30</u> <u>S29</u> 1968
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	Land, rolling to nearly level.
	Soil, gravelly clay loam.
	Timber, none.
	Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 20, 21, 28 and 29.
	S. 89°57' W., bet. secs. 20 and 29.
	Over nearly level land, through moderate undergrowth.
6.30	Wash, 5 lks. wide, ½ ft. deep, drains N. 50° E.
26.60	Track road, bears N. 20° E. and S. 20° W.
32.00	Enter Wes White Canyon, bears NE. and irregularly W.
40.005	Point for the ¼ sec. cor. of secs. 20 and 29, at proportionate dist.; unable to find any remaining evidence of the original cor. This point falls in Wes White Canyon Wash area, draining NE.; not monumented.
46.20	Leave Wes White Canyon, drains E.
50.00	Enter Wes White Canyon, drains S. 60° E.
67.60	Leave Wes White Canyon, drains S. 60° E.
80.01	The cor. of secs. 19, 20, 29 and 30.
	Land, nearly level.
	Soil, gravelly and rocky clay loam.
	Timber, none.
	Undergrowth, creosote bush, cacti and bunch grass.
	S. 89°55' W., bet. secs. 19 and 30.
	Over rolling land, through moderate undergrowth.
3.80	Ridge, bears S. 85° E. and N. 85° W.
23.00	Top of hill, bears SE. and NW.; desc. SW. slope.
36.90	Wash, 10 lks. wide, 1 ft. deep, drains SE.
39.22	The ¼ sec. cor. of secs. 19 and 30, monumented by a lava stone, 20x12x5 ins., set 12 ins. in the ground, mkd. ¼ on N. face, mound of stone N.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E $\frac{1}{4}$ $\frac{S19}{S30}$ 1968</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Raise a mound of stone N. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°45' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>10.40 Enter wash area, 2 ft. deep, drains irregularly SE.</p> <p>18.10 Leave wash area; asc. E. slope.</p> <p>26.00 Enter mesa, bears SE. and NW.</p> <p>34.50 Track road, on a ridge, bears S. 70° E. and N. 70° W.; desc. SW. slope.</p> <p>39.59 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented by an iron post 2 ins. diam., firmly set in a mound of stone, brass cap mkd.</p> <p style="text-align: center;">T7S R30E R31E $\frac{S24}{S25}$ $\frac{S19}{S30}$ 1931</p> <p>Land, rolling. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 0°13' E., bet. secs. 19 and 20.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>2.20 Enter Wes White Canyon, bears S. 80° E. and N. 80° W.</p> <p>3.30 Wash area, 30 lks. wide, 1 ft. deep, drains S. 80° E.</p> <p>9.10 Leave same Canyon, bears E. and W.</p> <p>12.30 Wash, 10 lks. wide, 1 ft. deep, drains irregularly SE.</p> <p>20.065 Point for the S 1/16 sec. cor. of secs. 19 and 20, at proportionate dist.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E S 1/16 $\frac{S19}{S20}$ 1968</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	Raise a mound of stone W. of the cor.
33.90	Draw, drains SE.
40.13	The $\frac{1}{2}$ sec. cor. of secs. 19 and 20, monumented by a lava stone, 18x8x6 ins., loosely set, mkd. $\frac{1}{2}$ S on one face, mound of stone alongside.
	At the corner point
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p style="text-align: center;">T7S R31E $\frac{1}{2}$ S19 S20 1968</p>
	Deposit the orig. cor. stone alongside the iron post.
	The cor. is located on a SW. slope, near top of hill.
	<hr style="width: 20%; margin: auto;"/> <p>N. 0°05' E., beginning new measurement.</p>
	Over rolling land, through moderate undergrowth.
24.80	Wash, 20 lks. wide, 1 ft. deep, drains N. 65° E.
33.60	Draw, drains irregularly NE.
39.47	The cor. of secs. 17, 18, 19 and 20, monumented by a granite stone, 22x12x10 ins., set 12 ins. in the ground, mkd. 3 notches on S. and 5 notches on E. faces, mound of stone W.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T7S R31E S18 S17 S19 S20 1968</p>
	Deposit the orig. cor. stone alongside the iron post.
	Raise a mound of stone W. of the cor.
	The cor. is located on a N. slope.
	Land, rolling.
	Soil, rocky and gravelly loam.
	Timber, none.
	Undergrowth, creosote bush, cacti and bunch grass.
	From the point for the cor. of secs. 16, 17, 20 and 21.
	N. 89°54' W., bet. secs. 17 and 20.
	Over cultivated land.
1.62	Fence, bears S. 12° E. and N. 12° W.; leave cultivated land, thence over rolling land, through moderate undergrowth.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
4.40	Low ridge, bears N. and S.; desc. W. slope.
5.70	Wash, 30 lks. wide, 1 ft. deep, drains N.; asc. E. slope.
14.50	Enter mesa, bears SE. and NW.
19.98	Point for the E 1/16 sec. cor. of secs. 17 and 20, at proportionate dist.
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	<p>T7S R31E E 1/16 $\frac{S17}{S20}$ 1968</p>
24.70	Draw, drains irregularly NE.
39.96	The $\frac{1}{4}$ sec. cor. of secs. 17 and 20, monumented by a lava stone, 17x10x4 ins., set 10 ins. in the ground, mkd. $\frac{1}{4}$ S on N. face, mound of stone N.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p>T7S R31E $\frac{1}{4}$ $\frac{S17}{S20}$ 1968</p>
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone N. of the cor.
	N. 89°59' W., beginning new measurement.
	Continue across top of mesa.
10.00	Leave mesa, bears N. and S.; desc. W. slope.
17.10	Wash, 30 lks. wide, 1 ft. deep, drains S. 60° E.
30.50	Same wash, drains NE.
34.20	Wash, 10 lks. wide, 1 ft. deep, drains S. 30° E.
39.44	The cor. of secs. 17, 18, 19 and 20.
	<p>Land, rolling. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	N. 89°59' W.; bet. secs: 18 and 19.
	Over rolling land, through moderate undergrowth.
5.70	Wash, 5 lks. wide, 1 ft. deep, drains NE.; asc. E. slope.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
35.10	Top of hill, bears NE. and SW.
40.77	The $\frac{1}{4}$ sec. cor. of secs. 18 and 19, monumented by a lava stone, 20x14x6 ins., set 12 ins. in the ground, mkd. $\frac{1}{4}$ S on N. face, mound of stone N.
	At the corner point
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T7S R31E $\frac{1}{4}$ $\frac{S18}{S19}$ 1968</p>
	Bury the orig. cor. stone alongside the iron post.
	Raise a mound of stone N. of the cor.
	<hr style="width: 20%; margin: auto;"/> N. 89°44' W., beginning new measurement.
	Over rolling land, through moderate undergrowth.
26.40	Ridge, bears S. 60° E. and N. 60° W.; desc. W. slope.
33.80	Wash, 15 lks. wide, 1 ft. deep, drains SE.; asc. E. slope.
38.11	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented by an iron post 2 ins. diam., projecting 8 ins. above the ground, mound of stone W., brass cap mkd.
	<p style="text-align: center;">T7S R30E R31E $\frac{S18}{S19} \frac{S13}{S24}$ 1931</p>
	I remark this corner to read
	<p style="text-align: center;">T7S R30E R31E $\frac{S13}{S24} \frac{S18}{S19}$ 1968 1931</p>
	Land, rolling. Soil, rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	From the cor. of secs. 17, 18, 19 and 20.
	N. 0°20' E., bet. secs. 17 and 18.
	Over rolling land, through moderate undergrowth.
2.00	Small wash, drains E.
26.50	Sexton Canyon, 30 lks. wide, 1 ft. deep, drains E.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
36.20	Draw, drains S. 60° E.
39.84	The ¼ sec. cor. of secs. 17 and 18, monumented by a lava stone, 18x9x5 ins., set 10 ins. in the ground, mkd. ¼ S on W. face, mound of stone W.
	At the corner point
	Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.
	T7S R31E ¼ S18 S17 1968
	Deposit the orig. cor. stone alongside the iron post.
	The cor. is located on a SW. slope.
	N. 0°08' E., beginning new measurement.
	Over rolling land, through moderate undergrowth.
4.90	Draw, drains irregularly N. 70° E.
11.20	Graded road, on a ridge, bears N. 63° E. and S. 63° W.; desc. N. slope.
19.40	Wash, 40 lks. wide, 1 ft. deep, drains N. 75° E., from S. 50° W.; asc. S. slope.
20.73	Point for the N 1/16 sec. cor. of secs. 17 and 18, at proportionate dist.
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	T7S R31E N1/16 S18 S17 1968
	Raise a mound of stone W. of the cor.
22.90	Wash, 20 lks. wide, 1 ft. deep, drains S. 70° E., from N. 30° W.
25.60	Fence, bears N. 20° W. and S. 20° E., 250 lks. dist.; thence S. 85° E.
33.50	Ridge, bears S. 25° E. and N. 25° W.; desc. N. slope.
41.46	The cor. of secs. 7, 8, 17 and 18, monumented by a lava stone, 20x12x10 ins., set 12 ins. in the ground, mkd. 4 notches on S. and 5 notches on E. faces, mound of stone W.
	At the corner point
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p style="text-align: center;">T7S R31E $\frac{S\ 7}{S\ 8}$ $\frac{S18}{S17}$ 1968</p> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>Land, rolling. Soil, rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>S. 89°23' W., bet. secs. 8 and 17.</p> <p>Through McKeon Ranch yard.</p>
1.30	Leave yard, thence asc. over rolling land, through moderate undergrowth.
34.00	Wash, 60 lks. wide, 1 ft. deep, drains N. 80° E. from N. 40° W.
39.73	Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 17, at proportionate dist.; unable to find any remaining evidence of the original cor.; not monumented.
57.80	Wash, 25 lks. wide, 1 ft. deep, drains NE.
59.595	Point for the W $\frac{1}{16}$ sec. cor. of secs. 8 and 17, at proportionate dist.
	Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.
	<p style="text-align: center;">T7S R31E W $\frac{1}{16}$ $\frac{S\ 8}{S17}$ 1968</p>
	The cor. is located on an E. slope.
79.46	The cor. of secs. 7, 8, 17 and 18.
	Land, rolling. Soil, rocky loam. Timber, cottonwoods around ranch house. Undergrowth, creosote bush, cacti and bunch grass.
	S. 89°26' W., bet. secs. 7 and 18.
	Over high rolling land, through moderate undergrowth.
3.00	Ridge, bears S. 25° E. and N. 25° W.; desc. W. slope.
5.70	Fence, bears S. 20° E. and N. 20° W.
8.50	Wash, 15 lks. wide, 1 ft. deep, drains S. 30° E., from N. 75° W.; asc. E. slope.
40.85	The $\frac{1}{2}$ sec. cor. of secs. 7 and 18, monumented by a lava stone, 20x10x8 ins., loosely set, mkd. $\frac{1}{2}$ on one face, mound of stone N.
	At the corner point

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS

Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.

T7S R31E
 $\frac{1}{4}$ $\frac{S 7}{S18}$
 1968

Deposit the orig. cor. stone alongside the iron post.

The cor. is located on a NE. slope.

S. 89°26' W., beginning new measurement.

Over rolling land, through moderate undergrowth.

14.20 Graded road, on a ridge, bears S. 55° E. and NW.; desc. SW. slope.

37.60 Draw, drains S.; asc. E. slope.

38.31 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented by an iron post 2 ins. diam., firmly set in a mound of stone, brass cap mkd.

T7S
 R30E R31E
 $\frac{S12}{S13}$ | $\frac{S 7}{S18}$
 1931

Land, high rolling.

Soil, rocky loam.

Timber, none.

Undergrowth, creosote bush, cacti and bunch grass.

From the cor. of secs. 7, 8, 17 and 18.

N. 0°06' E., bet. secs. 7 and 8.

Over rolling land, through moderate undergrowth.

35.50 Wash, 15 lks. wide, 1 ft. deep, drains E.; asc. S. slope.

39.89 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented by a lava stone, 18x8x8 ins., set 10 ins. in the ground, mkd. $\frac{1}{4}$ S on W. face, mound of stone W.

At the corner point

Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.

T7S R31E
 $\frac{1}{4}$
 S 7 | S 8
 1968

Deposit the orig. cor. stone alongside the iron post.

N. 1°08' W., beginning new measurement.

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS					
	Over rolling land, through moderate undergrowth.				
10.40	Wash, 15 lks. wide, 2 ft. deep, drains S. 85° E.				
17.60	Fence, bears E. and W., 80 lks.; thence S. 8° W.				
28.90	Wash in Harris Camp Canyon, 40 lks. wide, 2 ft. deep, drains N. 60° E.; asc. S. slope.				
33.50	Spur, slopes E.; desc. N. slope.				
37.30	Wash, 20 lks. wide, 2 ft. deep, drains irregularly E.; asc. S. slope.				
39.22	Point for the cor. of secs. 5, 6, 7 and 8, at proportionate dist.; unable to find any remaining evidence of the original cor.				
	Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.				
	<p>T7S R31E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 6</td> <td style="padding: 0 5px;">S 5</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 7</td> <td style="padding: 0 5px;">S 8</td> </tr> </table> <p>1968</p>	S 6	S 5	S 7	S 8
S 6	S 5				
S 7	S 8				
	The cor. is located on a steep SE. slope.				
	Land, rolling.				
	Soil, rocky loam.				
	Timber, none.				
	Undergrowth, creosote bush, cacti and bunch grass.				
	From the point for the cor. of secs. 4, 5, 8 and 9.				
	S. 87°47' W., bet. secs. 5 and 8.				
	Over nearly level land, through moderate undergrowth.				
0.40	Fence, bears N. and S.				
0.50	Present right bank of the Gila River, bears N. and S.				
2.30	Point for the 1891 meander cor. of secs. 5 and 8, on the right bank of the Gila River at proportionate dist.; there is no remaining evidence of the original cor.; not monumented.				
3.10	Present left bank of the Gila River, bears N. and S.				
5.80	Fence, bears N. 15° E. and S. 15° W.; enter cultivated land.				
7.01	Point for the 1891 meander cor. of secs. 5 and 8, on the left bank of the Gila River at proportionate dist.; there is no remaining evidence of the original cor.; not monumented.				
15.60	Leave cultivated land, bears N. and S.				
16.50	Southern Pacific Railroad, bears N. 5° E. and S. 5° W.				
16.70	Telegraph line, bears N. 5° E. and S. 5° W.				
21.10	Graded road, bears N. and S.				
21.30	Fence, bears N. and S.; asc. over rolling land.				
40.04	The ¼ sec. cor. of secs. 5 and 8, monumented by a lava stone, 20x9x4 ins., set firmly in a mound of stone, mkd. ¼ S on E. face; not remonumented.				

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p>The cor. is located 20 lks. W. of bottom of a draw, draining SE.</p> <p style="text-align: center;">_____</p> <p>N. 88°57' W., beginning new measurement.</p> <p>Over high rolling land, through moderate undergrowth.</p>
9.50	<p>Spur, slopes SE.; desc. SW. slope.</p>
20.035	<p>Point for the W 1/16 sec. cor. of secs. 5 and 8, at proportionate dist.</p> <p>Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E W 1/16 $\frac{S 5}{S 8}$ 1968</p>
	<p>Raise a mound of stone N. of the cor.</p> <p>Ascend along a S. slope.</p>
35.60	<p>Spur, slopes S.; desc. W. slope.</p>
40.07	<p>The cor. of secs. 5, 6; 7 and 8:</p> <p>Land, nearly level to rolling. Soil, sandy to rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>N. 89°35' W., bet. secs. 6 and 7.</p> <p>Over high rolling land, through moderate undergrowth.</p>
1.00	<p>Deep wash, drains S. 60° E.; asc. NE. slope.</p>
23.00	<p>High spur, slopes E.; asc. E. slope.</p>
40.08	<p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; unable to find any remaining evidence of the original cor.</p> <p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p>
	<p style="text-align: center;">T7S R31E 1/4 $\frac{S 6}{S 7}$ 1968</p>
	<p>from which</p>
	<p style="padding-left: 40px;">A stock pond, bears N. 61°25' E., 17.85 chs. dist.</p>
	<p>The cor. is located on a round spur, sloping E.</p>
50.00	<p>High spur, slopes SW.; desc. W. slope.</p>
68.00	<p>Draw, drains S.; asc. E. slope.</p>
70.20	<p>Low ridge, bears N. and S.; desc. W. slope.</p>
78.46	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented by an iron post 2 ins. diam., projecting 4 ins. above the ground, mound of stone W., brass cap mkd.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
	<p style="text-align: center;">T7S R30E R31E S 1 S 6 S 12 S 7 1931</p> <p>Land, high rolling. Soil, rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 1°53' E., bet. secs. 5 and 6.</p> <p>Over high rolling land, through moderate undergrowth.</p>
5.30	Track road, bears S. 60° E. and N. 60° W.
6.60	Ridge, bears E. and W.; desc. N. slope.
15.80	Spur, slopes W.
39.23	<p>The 1/2 sec. cor. of secs. 5 and 6, monumented by a lava stone, 18x10x6 ins., set 10 ins. in the ground, mkd. 1/2 S on W. face, mound of stone alongside.</p> <p>At the corner point</p> <p>Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T7S R31E 1/2 S 6 S 5 1968</p> <p>Deposit the orig. cor. stone alongside the iron post.</p> <p>The cor. is located on a NW. slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°51' W., beginning new measurement.</p> <p>Over rolling land, through moderate undergrowth.</p>
3.20	Wash, 15 lks. wide, 2 ft. deep, drains irregularly NE.; asc. S. slope.
20.435	<p>Point for the N 1/16 sec. cor. of secs. 5 and 6, at proportionate dist.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T7S R31E N1/16 S 6 S 5 1968</p> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located on a spur, sloping E.; desc. N. slope.</p>

Dep. Res., Portion Subdivisional Lines, T. 7 S., R. 31 E.

CHAINS	
27.20	Wash, 20 lks. wide, 1 ft. deep, drains irregularly E., asc. S. slope.
40.10	Fence, on a spur, bears S. 70° E. and N. 70° W.
40.77	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp.
	Land, high rolling. Soil, rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of Section 24, T. 7 S., R. 31 E.	
	From the ½ sec. cor. of secs. 24 and 25. N. 0°09' W., on the N. and S. center line of sec. 24. Over rolling land, through moderate undergrowth.
0.70	Harris Wash, 10 lks. wide, 1 ft. deep, drains irregularly W.
6.80	Enter mesa, bears NE. and SW.
11.80	Leave mesa, bears NE. and SW.; desc. N. slope.
18.60	Enter Goat Camp Canyon, drains N. 80° E.
21.70	Leave Goat Camp Canyon; asc. S. slope.
38.70	Ridge, bears irregularly NE. and SW.
40.08	Point for the Center ½ sec. cor. of sec. 24, at intersection with the E. and W. centerline of sec. 24.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T7S R31E C ½ + S24 1968
	Raise a mound of stone W. of the cor.
45.20	Wash, 20 lks. wide, 1 ft. deep, drains irregularly W.
54.50	Ridge, bears N. 60° E. and S. 60° W.; desc. N. slope.
74.00	Wash, 40 lks. wide, 1 ft. deep, drains N. 75° W.; asc. S. slope.
79.73	The ½ sec. cor. of secs. 13 and 24.
	Land, rolling. Soil, rocky and gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
	The ½ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., monumented by an iron post 1 in. diam., projecting 10 ins. above the ground, mound of stone W., brass cap mkd.

Subdivision of Section 24, T. 7 S., R. 31 E.

CHAINS	
	$\frac{1}{4}$ S24 S19 1931
	S. 89°50' W., on the E. and W. centerline of sec. 24. Over rolling land, through moderate undergrowth.
0.50	Fence, bears N. and S.
3.30	Wash in Goat Camp Canyon, 120 lks. wide, 2 ft. deep, drains SW., asc. SE. slope.
38.40	Ridge, bears N. 75° E. and S. 75° W.; desc. W. slope.
40.84	The Center $\frac{1}{4}$ sec. cor. of sec. 24.
73.60	Ridge, bears E. and W.
75.40	Leave same ridge, bears SE. and NW.
81.18	The $\frac{1}{4}$ sec. cor. of secs. 23 and 24.
	Land, rolling. Soil, gravelly and sandy clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of Section 34, T. 7 S., R. 31 E.	
	From the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, on the S. bdy. of the Tp. N. 0°10' E., on the N. and S. centerline of sec. 34. Over rolling land, through moderate undergrowth.
3.90	Track road, bears SE. and NW.
10.70	Graded road, bears E. and W.
15.40	Wash, 10 lks. wide, 1 ft. deep, drains W.; asc. S. slope.
20.90	Spur, slopes W.
30.50	Ridge, bears E. and W.; desc. N. slope.
36.00	Wash, 5 lks. wide, 3 ft. deep, drains W.; asc. S. slope.
40.11	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 34, at intersection with the E. and W. centerline of sec. 34; not monumented.
42.40	Fence, bears N. 85° E. and S. 85° W.
42.70	Graded road, bears N. 85° E. and S. 85° W.

Subdivision of Section 34, T. 7 S., R. 31 E.

CHAINS	
49.80	Underground pipe line, bears S. 20° E. and N. 20° W.
54.50	Ridge, bears E. and W.; desc. N. slope.
59.50	Fence, bears S. 5° E. and N. 5° W.
60.26	Point for the C-N 1/16 sec. cor. of sec. 34.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T7S R31E</p> <p style="text-align: center;">C</p> <p style="text-align: center;">N 1/16 S34</p> <p style="text-align: center;">C</p> <p style="text-align: center;">1968</p>
	Raise a mound of stone W. of the cor.
	The cor. is located 17½ lks. East of a fence bearing S. 5° E. and N. 5° W.
67.00	Track road, bears W. and E., 90 lks. to intersect with State Highway No. 75.
72.00	Sandia Wash, 50 lks. wide, 1 ft. deep, drains W.
75.30	Center of State Highway No. 75, bears S. 5° E. and N. 5° W.
80.41	The ¼ sec. cor. of secs. 27 and 34.
	<p>Land, rolling.</p> <p>Soil, gravelly and sandy clay loam.</p> <p>Timber, none.</p> <p>Undergrowth, creosote bush, cacti and bunch grass.</p>
	From the ¼ sec. cor. of secs. 34 and 35.
	S. 89°45' W., on the E. and W. centerline of sec. 34.
	Over rolling land, through moderate undergrowth.
	Ascend E. slope.
1.80	Ridge, bears E. and NW.; desc. W. slope.
20.04	Point for the C-E 1/16 sec. cor. of sec. 34.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">E 1/16</p> <p style="text-align: center;">C ————— C</p> <p style="text-align: center;">S34</p> <p style="text-align: center;">1968</p>
	Raise a mound of stone N. of the cor.
27.30	Telephone line, bears S. 15° E. and N. 15° W.
31.40	Fence, bears S. 5° E. and N. 5° W.
33.00	Center of State Highway No. 75, bears S. 25° E. and N. 25° W.
34.70	Fence, bears S. 25° E. and N. 25° W.

Subdivision of Section 34, T. 7 S., R. 31 E.

CHAINS	
35.40	Underground pipe line, bears S. 25° E. and N. 25° W.
40.08	The point for the Center ¼ sec. cor. of sec. 34.
51.80	Fence, bears NE. and SW.
53.00	Graded road, bears NE. and SW.
57.90	Same road, bears SE. and NW.; asc. E. slope.
59.00	Track road, bears S. 70° E. and N. 70° W.
62.00	Fence, bears S. 80° E. and N. 80° W.
65.30	Track road, bears N. and S.
65.70	Power line, bears N. 9° E. and S. 9° W.
69.90	Fence, bears NE. and SW.
75.70	Begin desc. W. slope.
77.40	Irrigation ditch, drains S. 60° E.; end of descent, enter level land.
78.20	Fence, bears N. 10° E. and S. 10° W.; enter cultivated land.
80.12	The point for the ¼ sec. cor. of secs. 33 and 34.
	Land, rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of the NE¼ of Section 34	
	From the C-E 1/16 sec. cor. of sec. 34.
	N. 0°08' E., on the N. and S. centerline of the NE¼, sec. 34.
	Over gently rolling land, through moderate undergrowth.
8.30	Fence, bears N. 70° E. and S. 70° W.
19.10	Sandia Wash, 30 lks. wide, 2 ft. deep, drains W., from N. 10° E.
20.21	Point for the NE 1/16 sec. cor. of sec. 34, at intersection with the E. and W. centerline of the NE¼ of sec. 34.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	NE 1/16 + S34 1968
	Raise a mound of stone W. of the cor.
40.39	The E 1/16 sec. cor. of secs. 27 and 34.
	From the N 1/16 sec. cor. of secs. 34 and 35.

Subdivision of Section 34, T. 7 S., R. 31 E.

CHAINS	
	S. 89°38' W., on the E. and W. centerline of the NE $\frac{1}{4}$, sec. 34.
	Over gently rolling land, through moderate undergrowth.
1.40	Wash, 10 lks. wide, 2 ft. deep, drains SW.
4.80	Sandia Wash, 30 lks. wide, 1 ft. deep, drains S.
11.80	Same wash, drains NW.
14.70	Same wash, drains N. 60° W., from NE.
19.70	Same wash, drains S. 10° W.
20.04	The NE 1/16 sec. cor. of sec. 34.
24.70	Sandia Wash, 30 lks. wide, 2 ft. deep, drains N.
32.10	Telephone line, bears S. 10° E. and N. 10° W.
37.20	Fence, bears S. 25° E. and N. 5° W.
38.80	State Highway No. 75, bears S. 25° E. and N. 5° W.
40.08	The C-N 1/16 sec. cor. of sec. 34.
Subdivision of Section 27, T. 7 S., R. 31 E.	
	From the $\frac{1}{4}$ sec. cor. of secs. 27 and 34.
	N. 0°19' W., on the N. and S. centerline of sec. 27.
	Over rolling land, through moderate undergrowth.
12.30	Fence, bears S. 5° E. and N. 5° W.
13.00	Telephone line, bears S. 10° E. and N. 10° W.
32.10	Wash, 30 lks. wide, 2 ft. deep, drains S. 85° W.
39.73	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 27, at intersection with the E. and W. centerline at sec. 27.
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	T7S R31E C $\frac{1}{4}$ + S27 1968
59.30	Harris Wash, 90 lks. wide, 2 ft. deep, drains W.; asc. S. slope.
69.80	Spur, slopes SW.; desc. N. slope.
73.80	Draw, drains SW.; asc. S. slope.
79.34	The $\frac{1}{4}$ sec. cor. of secs. 22 and 27.
	Land, rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.

Subdivision of Section 27, T. 7 S., R. 31 E.

CHAINS	
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 26 and 27.</p> <p>N. $89^{\circ}53'$ W., on the E. and W. centerline of sec. 27.</p> <p>Over rolling land, through moderate undergrowth.</p>
4.10	Low ridge, bears S. 30° E. and N. 30° W.; desc. W. slope.
39.58	The Center $\frac{1}{4}$ sec. cor. of sec. 27.
48.90	Telephone line, bears S. 20° E. and N. 20° W.
49.60	Fence, bears S. 25° E. and N. 25° W.
51.30	State Highway No. 75, bears S. 25° E. and N. 25° W.
53.80	Fence, bears S. 25° E. and N. 25° W.
59.50	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 27.
	<p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">W $\frac{1}{16}$</p> <p style="text-align: center;">C ————— C</p> <p style="text-align: center;">S27</p> <p style="text-align: center;">1968</p>
	Raise a mound of stone N. of the cor.
60.60	Ridge, bears NE. and SW.; desc. W. slope.
72.20	Underground pipe line, bears S. 15° E. and N. 15° W.
75.30	Graded road, bears N. and S.
75.50	Fence, bears S. and N., 3 lks. dist.; thence W.
76.80	Power line, bears SE. and NW.
78.50	Fence, bears S. and N., 3 lks. dist.; thence E.
79.30	Graded road, bears N. and S.
79.42	The point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.
	<p>Land, rolling.</p> <p>Soil, gravelly clay loam.</p> <p>Timber, none.</p> <p>Undergrowth, creosote bush, cacti and bunch grass.</p>
Subdivision of Section 20, T. 7 S., R. 31 E.	
	<p>From the point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.</p> <p>N. $0^{\circ}15'$ W., on the N. and S. centerline of sec. 20.</p> <p>Over rolling land, through moderate undergrowth.</p>
.20	Leave Wes White Canyon, bears NE. and W.
5.20	Wash, 30 lks. wide, 2 ft. deep, drains NE.
17.50	Draw, drains N. 60° E.

Subdivision of Section 20, T. 7 S., R. 31 E.

CHAINS	
20.015	<p>Point for the C-S 1/16 sec. cor. of sec. 20.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p>S 1/16 S20</p> <p>C</p> <p>1968</p> </div> <p>Raise a mound of stone W. of the cor.</p>
30.20	<p>Draw, drains NE.; asc. S. slope.</p>
38.10	<p>Ridge, bears E. and W.; desc. N. slope.</p>
40.03	<p>Point for the Center 1/4 sec. cor. of sec. 20, at intersection with the E. and W. centerline of sec. 20.</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R31E</p> <p>C 1/4 + S20</p> <p>1968</p> </div> <p>Raise a mound of stone W. of the cor.</p>
43.90	<p>Draw, drains irregularly E.</p>
57.90	<p>Wash, 30 lks. wide, 1 ft. deep, drains irregularly E.</p>
59.79	<p>Point for the C-N 1/16 sec. cor. of sec. 20.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p>N 1/16 S20</p> <p>C</p> <p>1968</p> </div> <p>Raise a mound of stone W. of the cor.</p>
62.70	<p>Wash, 20 lks. wide, 1 ft. deep, drains NE., from NW.; asc. S. slope.</p>
78.70	<p>Ridge, bears E. and W.; desc. N. slope.</p>
79.55	<p>The 1/4 sec. cor. of secs. 17 and 20.</p> <p>Land, rolling. Soil, gravelly clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the 1/4 sec. cor. of secs. 20 and 21.</p> <p>N. 89°54' W., on the E. and W. centerline of sec. 20.</p> <p>Over rolling land, through moderate undergrowth.</p>
7.70	<p>Wash in Wes White Canyon, 30 lks. wide, 2 ft. deep, drains NE.</p>

Subdivision of Section 20, T. 7 S., R. 31 E.

<p>CHAINS</p> <p>19.60</p> <p>20.06</p> <p>40.12</p> <p>46.60</p> <p>58.80</p> <p>79.80</p>	<p>Wash, 15 lks. wide, 1 ft. deep, drains NE.</p> <p>Point for the C-E 1/16 sec. cor. of sec. 20; not monumented.</p> <p>The Center 1/4 sec. cor. of sec. 20.</p> <p>Draw, drains NE.</p> <p>Draw, drains NE.</p> <p>The 1/4 sec. cor. of secs. 19 and 20.</p> <p>Land, rolling. Soil, gravelly and rocky clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>Subdivision of the NE 1/4 of Section 20</p>
<p>11.20</p> <p>18.10</p> <p>19.76</p> <p>23.60</p> <p>27.20</p> <p>39.52</p>	<p>From the point for the C-E 1/16 sec. cor. of sec. 20.</p> <p>N. 0°21' W., on the N. and S. centerline of the NE 1/4, sec. 20.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Wash, 20 lks. wide, 1 ft. deep, drains SE.; asc. S. slope.</p> <p>Enter mesa, bears E. and W.</p> <p>Point for the NE 1/16 sec. cor. of sec. 20, at intersection with the E. and W. centerline of the NE 1/4 of sec. 20.</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">NE 1/16 + S20 1968</p> <p>Raise a mound of stone W. of the cor.</p> <p>Leave mesa, bears E. and W.; desc. N. slope.</p> <p>Wash, 100 lks. wide, 2 ft. deep, drains N. 60° E.</p> <p>The E 1/16 sec. cor. of secs. 17 and 20.</p>
<p>9.50</p> <p>20.01</p> <p>30.60</p> <p>40.02</p>	<p>From the point for the N 1/16 sec. cor. of secs. 20 and 21.</p> <p>N. 89°54' W., on the E. and W. centerline of the NE 1/4, sec. 20.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>Enter mesa, bears N. and SW.; thence across mesa top.</p> <p>The NE 1/16 sec. cor. of sec. 20.</p> <p>Leave mesa, bears SE. and NW.; desc. W. slope.</p> <p>The C-N 1/16 sec. cor. of sec. 20.</p>

Subdivision of Section 17, T. 7 S., R. 31 E.

CHAINS	Subdivision of Section 17, T. 7 S., R. 31 E.
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.</p> <p>N. $0^{\circ}27'$ E., on the N. and S. centerline of sec. 17.</p> <p>Over rolling land, through moderate undergrowth.</p>
7.60	Wash, 15 lks. wide, 1 ft. deep, drains SE.
19.95	Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 17.
	<p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p>S $\frac{1}{16}$ S17</p> <p>C</p> <p>1968</p> </div>
38.30	Wash in Sexton Canyon, 70 lks. wide, 2 ft. deep, drains N. 85° E., asc. S. slope.
39.90	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 17, at intersection with the E. and W. centerline of sec. 17.
	<p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T7S R31E</p> <p>C $\frac{1}{4}$ + S17</p> <p>1968</p> </div> <p>Raise a mound of stone W. of the cor.</p>
48.30	Graded road, bears N. 85° E. and S. 85° W.
59.50	Graded road, bears N. 60° E. and S. 60° W.; desc. N. slope.
60.79	Point for the C-N $\frac{1}{16}$ sec. cor. of sec. 17.
	<p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>C</p> <p>N $\frac{1}{16}$ S17</p> <p>C</p> <p>1968</p> </div> <p>Raise a mound of stone W. of the cor.</p>
65.60	Fence, bears N. 82° E. and S. 82° W.
81.68	The point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.
	<p>Land, rolling.</p> <p>Soil, rocky and gravelly clay loam.</p> <p>Timber, none.</p> <p>Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 16 and 17.</p> <p>S. $89^{\circ}56'$ W., on the E. and W. centerline of sec. 17.</p>

Subdivision of Section 17, T. 7 S., R. 31 E.

CHAINS	
	Over rolling land, through moderate undergrowth.
20.01	Point for the C-E 1/16 sec. cor. of sec. 17. Set the iron post 20 ins. in the ground, brass cap mkd. E 1/16 C ————— C S17 1968
	Raise a mound of stone N. of the cor.
25.10	Sexton Canyon, 80 lks. wide, 2 ft. deep, drains N. 80° E.
40.02	The Center ¼ sec. cor. of sec. 17.
47.70	Wash, 15 lks. wide, 1 ft. deep, drains S. 30° E. from S. 60° W.
52.50	Same wash, drains SE.
59.77	Point for the C-W 1/16 sec. cor. of sec. 17. Set the iron post 20 ins. in the ground, brass cap mkd. W 1/16 C ————— C S17 1968
	Raise a mound of stone N. of the cor.
79.52	The ¼ sec. cor. of secs. 17 and 18. Land, rolling. Soil, rocky clay loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
Subdivision of the SE¼ of Section 17	
	From the E 1/16 sec. cor. of secs. 17 and 20. N. 0°28' E., on the N. and S. centerline of the SE¼, sec. 17. Over rolling land, through moderate undergrowth.
5.80	Draw, drains N. 75° E.
8.50	Wash, 40 lks. wide, 1 ft. deep, drains N. 60° E.
19.00	Enter mesa, bears NE. and SW.
19.97	Point for the SE 1/16 sec. cor. of sec. 17, at intersection with the E. and W. centerline of the SE¼ of sec. 17. Set the iron post 18 ins. in the ground, in a collar of stone, brass cap mkd. SE 1/16 + S17 1968

Subdivision of Section 17, T. 7 S., R. 31 E.

CHAINS	
	Raise a mound of stone W. of the cor.
34.40	Leave mesa, bears E. and W.
39.92	The C-E 1/16 sec. cor. of sec. 17.
	From the S 1/16 sec. cor. of secs. 16 and 17.
	N. 89°57' W., on the E. and W. centerline of the SE¼, sec. 17.
	Over rolling land, through moderate undergrowth.
0.70	Spur, slopes NE.
14.50	Enter mesa, bears N. and S.; thence across mesa top.
19.99	The SE 1/16 sec. cor. of sec. 17.
39.98	The C-S 1/16 sec. cor. of sec. 17.
Subdivision of the NW¼ of Section 17	
	From the C-W 1/16 sec. cor. of sec. 17.
	N. 0°16' E., on the N. and S. centerline of the NW¼, sec. 17.
	Over rolling land, through moderate undergrowth.
4.40	Draw, drains SE.; asc. S. slope.
12.20	Graded road, on a ridge, bears S. 56° E. and N. 56° W.; desc. N. slope.
18.90	Graded road, bears N. 65° E. and S. 65° W.
20.80	Point for the NW 1/16 sec. cor. of sec. 17.
	Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.
	NW 1/16 + S17 1968
23.70	Fence, bears E. and W.
25.60	Wash, 30 lks. wide, 2 ft. deep, drains NE.; asc. S. slope.
39.40	Draw, drains E.
41.58	The W 1/16 sec. cor. of secs. 8 and 17.
	From the C-N 1/16 sec. cor. of sec. 17.
	S. 89°42' W., on the E. and W. centerline of the NW¼, sec. 17.
	Over rolling land, through moderate undergrowth.
15.50	Spur, slopes NE.; desc. W. slope.

Subdivision of Section 17, T. 7 S., R. 31 E.

CHAINS	
19.83	The NW 1/16 sec. cor. of sec. 17.
35.00	Wash, 40 lks. wide, 1 ft. deep, drains N. 30° E.
37.00	Wash, 20 lks. wide, 1 ft. deep, drains S. 30° E.; asc. E. slope.
39.67	The N 1/16 sec. cor. of secs. 17 and 18.
Subdivision of Section 8, T. 7 S., R. 31 E.	
From the point for the 1/4 sec. cor. of secs. 8 and 17. N. 0°18' W., on the N. and S. centerline of sec. 8. Over rolling land, through moderate undergrowth.	
0.60	Enter wash, 20 lks. wide, 1 ft. deep, drains N., from W.
4.00	Leave wash, drains E.
17.20	Wash, 20 lks. wide, 1 ft. deep, drains irregularly E.
39.68	Point for the Center 1/4 sec. cor. of sec. 8, at intersection with the E. and W. centerline of sec. 8; not monumented.
41.00	Wash, 30 lks. wide, 1 ft. deep, drains S. 60° E.
42.50	Enter mesa, bears SE. and NW.
58.80	Fence, bears E. and W.
64.60	Leave mesa, bears E. and W.
71.00	Wash in Harris Camp Canyon, 80 lks. wide, 2 ft. deep, drains NE., asc. S. slope.
77.88	The 1/4 sec. cor. of secs. 5 and 8. Land, rolling. Soil, rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.
From the point for the 1/4 sec. cor. of secs. 8 and 9: S. 89°39' W., on the E. and W. centerline of sec. 8. Over level cultivated land. By triangulation, topography by chaining.	
2.50	Present right bank of the Gila River, bears S. 60° E. and N. 60° W., leave cultivated land.
12.90	Present left bank of the Gila River, bears S. 60° E. and N. 60° W.
13.60	Southern Pacific Railroad, bears S. 30° E. and N. 30° W.
13.80	Telegraph line, bears S. 30° E. and N. 30° W.

Subdivision of Section 8, T. 7 S., R. 31 E.

CHAINS	
14.00	Graded road, bears S. 30° E. and N. 30° W.; enter rolling land, through moderate undergrowth.
21.50	Spur, slopes SE. End of triangulation.
25.70	Deep draw, drains SE.
38.40	Wash, 30 lks. wide, 1 ft. deep, drains S. 60° E.; asc. E. slope.
39.91	The point for the Center $\frac{1}{4}$ sec. cor. of sec. 8.
59.00	Enter wash, 10 lks. wide, 1 ft. deep, drains NE., from W.
59.63	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 8.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	W $\frac{1}{16}$
	Raise a mound of stone N. of the cor.
69.50	Leave wash, drains E., from S. 60° W.
79.35	The $\frac{1}{4}$ sec. cor. of secs. 7 and 8.
	Land, level to rolling. Soil, sandy clay to rocky. Timber, none. Undergrowth, creosote bush, cacti, bunch grass and willow along the river banks.
Subdivision of Section 5, T. 7 S., R. 31 E.	
	From the $\frac{1}{4}$ sec. cor. of secs. 5 and 8.
	N. 0°22' E., on the N. and S. centerline of sec. 5.
	Over rolling land, through moderate undergrowth.
	Ascend S. slope.
6.80	Track road, on ridge, bears N. 80° E. and S. 80° W.; desc. N. slope.
39.80	Track road, bears S. 70° E. and N. 70° W.; enter level land, bears SE. and NW.
40.44	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 5, at intersection with the E. and W. centerline of sec. 5; not monumented.
41.00	Telegraph line, bears S. 55° E. and N. 55° W.
41.30	Southern Pacific Railroad, bears S. 55° E. and N. 55° W.; enter dense undergrowth.
42.30	Fence, bears SE. and NW.
44.30	Present left bank of the Gila River, bears S. 55° E. and N. 25° W.

Subdivision of Section 5, T. 7 S., R. 31 E.

CHAINS		
48.60	Present right bank of the Gila River, bears S. 55° E. and N. 25° W.; enter cultivated land, leave dense undergrowth.	
60.52	Point for the C-N 1/16 sec. cor. of sec. 5; not monumented.	
64.30	Fence, bears E. and W..	
78.50	Wash, 40 lks. wide, 1 ft. deep, drains W.; leave cultivated land..	
78.90	Fence, bears E. and W.	
80.52	<p>Point for the ¼ sec. cor. of secs. 5 and 32, on the N. bdy. of the Tp.</p> <p>Land, rolling to level. Soil, rocky to clay loam. Timber, none. Undergrowth, creosote bush, cacti, bunch grass and willow, mesquite and cat claw along river banks.</p>	
	<p>From the point for the ¼ sec. cor. of secs. 4 and 5.</p> <p>Thence by triangulation, topography scaled from U.S.C. & G.S. Quadrangle YORK VALLEY, ARIZ.-NEW MEXICO, scale 1:62500.</p> <p>S. 89°17' W., on the E. and W. centerline of sec. 5.</p> <p>Over level land, through moderate undergrowth.</p>	
1.40	Present right bank of the Gila River, bears S. 35° E. and N. 35° W.	
3.90	Mean high water line on present left bank of the Gila River, bears S. 35° E. and N. 35° W. (Note: This bank is alluvious soil and is subject to change in flood stages).	
26.00	Present left bank of the Gila River; bears NE. and SW.	
34.00	Present left bank of the Gila River, bears S. 55° E. and N. 55° W.	
38.00	Southern Pacific Railroad, bears S. 55° E. and N. 55° W.	
38.30	Telegraph line, bears S. 55° E. and N. 55° W.	
39.98	The point for the Center ¼ sec. cor. of sec. 5 and end of triangulation.	
41.00	<p>Track road, bears S: 85° E. and N. 70° W.</p> <p>Enter rolling land, through moderate undergrowth.</p>	
59.50	Point for the C-W 1/16 sec. cor. of sec. 5; not monumented.	
79.03	<p>The ¼ sec. cor. of secs. 5 and 6.</p> <p>Land, level to rolling. Soil, sandy clay to rocky. Timber, none. Undergrowth, creosote bush, cacti, bunch grass and willow, cat claw and mesquite along river area.</p>	

Subdivision of Section 5, T. 7 S., R. 31 E.

CHAINS	Subdivision of the NW $\frac{1}{4}$ of Section 5
	<p>From the point for the C-W 1/16 sec. cor. of sec. 5. N. 0°18' W., on the N. and S. centerline of the NW$\frac{1}{4}$, sec. 5.</p> <p>Over rolling land, through moderate undergrowth.</p> <p>11.70 Wash, 10 lks. wide, 1 ft. deep, drains NE.</p> <p>20.23 Point for the NW 1/16 sec. cor. of sec. 5, at intersection with the E. and W. centerline of NW$\frac{1}{4}$ of sec. 5.</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">NW 1/16 + S 5 1968</p> <p>The cor. is located in a wash area, draining E.</p> <p>21.80 Wash, 30 lks. wide, 1 ft. deep, drains E.</p> <p>24.50 Enter mesa, bears E. and W.</p> <p>33.80 Leave mesa, bears E. and W.; enter dense undergrowth.</p> <p>38.00 Fence, bears E. and W.</p> <p>40.39 The W 1/16 sec. cor. of secs. 5 and 32, on the N. bdy. of the Tp.</p>
	<p>From the point for the C-N 1/16 sec. cor. of sec. 5. S. 89°46' W., on the E. and W. centerline of the NW$\frac{1}{4}$, sec. 5.</p> <p>Over level land; by triangulation, topography as scaled from USC&GS Quadrangle YORK VALLEY, ARIZ.-N. MEX., scale 1:62500.</p> <p>3.70 Present right bank of the Gila River, bears N. and S.</p> <p>5.10 Present left bank of the Gila River, bears N. and S.</p> <p>8.30 Southern Pacific Railroad, bears S. 13° E. and N. 13° W.</p> <p>8.60 Telegraph line, bears S. 13° E. and N. 13° W.; enter rolling land, through moderate undergrowth.</p> <p>15.00 Wash, 30 lks. wide, 1 ft. deep, drains NE.</p> <p>19.75 The NW 1/16 sec. cor. of sec. 5 and end of triangulation.</p> <p>24.10 Wash, 10 lks. wide, 1 ft. deep, drains NE.</p> <p>39.46 The N 1/16 sec. cor. of secs. 5 and 6.</p>
	Subdivision of Section 6, T. 7 S., R. 31 E.
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 6 and 7.</p> <p>N. 0°17' E., on the N. and S. centerline of sec. 6.</p>

Subdivision of Section 6, T. 7 S., R. 31 E.

CHAINS	
	Over high rolling land, through moderate undergrowth.
8.90	Spur, slopes E.; desc. steep N. slope.
15.50	Wash, in deep canyon, drains S. 85° E.; asc. steep S. slope.
26.10	High spur, slopes SE.; desc. NE. slope.
39.54	Point for the Center $\frac{1}{4}$ sec. cor. of sec. 6, at inter-
	section with the E. and W. centerline of sec. 6.
	Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T7S R31E C $\frac{1}{4}$ + S 6 1968</p>
	The cor. is located on a NE. slope.
58.10	Wash, 20 lks. wide, 1 ft. deep, drains S. 80° E.; asc. S. slope.
59.76	Point for the C-N $\frac{1}{16}$ sec. cor. of sec. 6.
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>C N $\frac{1}{16}$ S 6 C 1968</p>
	The cor. is located on a S. slope.
67.00	Ridge, bears E. and W.; desc. N. slope.
76.10	Wash, 10 lks. wide, 1 ft. deep, drains NE.; asc. S. slope.
79.88	The $\frac{1}{4}$ sec. cor. of secs. 6 and 31, on the N. bdy. of the Tp.
	<p>Land, rolling. Soil, rocky loam. Timber, none. Undergrowth, creosote bush, cacti and bunch grass.</p>
	From the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.
	N. 89°05' W., on the E. and W. centerline of sec. 6.
	Over high rolling land, through moderate undergrowth.
	Descend W. slope.
2.60	Wash, 10 lks. wide, 1 ft. deep, drains N.; asc. E. slope.
20.59	Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 6.
	Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.

Subdivision of Section 6, T. 7 S., R. 31 E.

CHAINS	
	<p>E 1/16</p> <p>C ————— C</p> <p>S 6</p> <p>1968</p>
	<p>Continue ascent.</p>
41.18	The Center ¼ sec. cor. of sec. 6.
47.80	High spur, slopes S. 10° E.; desc. W. slope.
76.00	Spur, slopes N. 30° W.; continue desc.
79.64	The ¼ sec. cor. of secs. 1 and 6, on the W. bdy. of the Tp., monumented by an iron post 1 in. diam., firmly set in a mound of stone, brass cap mkd.
	<p>¼</p> <p>S 1 S 6</p> <p>1931</p>
	<p>Land, steep and rolling.</p> <p>Soil, rocky loam.</p> <p>Timber, none.</p> <p>Undergrowth, creosote bush, cacti and bunch grass.</p>
	<p>Subdivision of the NE ¼ of Section 6</p>
	<p>From the C-E 1/16 sec. cor. of sec. 6.</p> <p>N. 0°20' W., on the N. and S. centerline of the NE ¼, sec. 6.</p> <p>Over rolling land, through moderate undergrowth.</p>
7.70	Draw, drains E.; asc. S. slope.
16.00	Spur, slopes E.; desc. N. slope.
20.30	Point for the NE 1/16 sec. cor. of sec. 6, at intersection with the E. and W. centerline of the NE ¼ of sec. 6.
	<p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">NE 1/16 + S 6</p> <p style="text-align: center;">1968</p>
27.90	Wash, 20 lks. wide, 1 ft. deep, drains N. 50° E.; asc. S. slope.
40.50	The E 1/16 sec. cor. of secs. 6 and 31, on the N. bdy. of the Tp.
	<p>From the N 1/16 sec. cor. of secs. 5 and 6.</p> <p>N. 89°23' W., on the E. and W. centerline of the NE ¼, sec. 6.</p> <p>Over rolling land, through moderate undergrowth.</p>


Subdivision of Section 6, T. 7 S., R. 31 E.

CHAINS					
	Ascend NE. slope.				
20.38	The NE 1/16 sec. cor. of sec. 6.				
33.00	Wash, 20 lks. wide, 1 ft. deep, course NE.; asc. SE. slope.				
40.74	The C-N 1/16 sec. cor. of sec. 6.				
<p>Survey of Accretion Lands Section 27</p> <hr/>					
<p>Between the time of the original survey in 1891 and the present, the Gila River has moved westerly by normal processes of erosion and accretion with the resultant effect that a considerable area of lands has been added in sections 27 and 34, which are riparian to the river's right bank as originally surveyed. The division of these particular accreted lands has been accomplished on a ratable basis between the adjusted record meander line of each affected section to respective proportionate segments of the present right bank. The terminal points on the present right bank and adjusted record meander lines, for this proportionate division, are at the respective points in section 34, and where the adjusted record meander lines comes the nearest to the present right bank in section 27.</p> <hr/>					
<p>From the reestablished record meander corner bet. secs. 27 and 34, hereinbefore described.</p>					
<p>S. 79°38' W., bet. secs. 27 and 34, over accretion land.</p>					
<p>Over level bottom land.</p>					
6.97	<p>Point for the meander cor. of secs. 27 and 34 on the present right bank of the Gila River, a cut bank, 4 ft. high, bears N. 2°24' E. and S. 2°24' W.</p>				
<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>					
<p>T7S R31E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">MC</td> <td style="border-left: 1px solid black; padding-left: 5px;">S27</td> </tr> <tr> <td></td> <td style="border-left: 1px solid black; padding-left: 5px;">S34</td> </tr> </table> <p>1968</p>		MC	S27		S34
MC	S27				
	S34				
<p>Set a wooden post, 3 ins. diam., 5 ft. long, alongside the iron post.</p>					
<p>Returning to the reestablished record meander corner of secs. 27 and 34.</p>					
<p>Thence:</p>					
<p>N. 26°08' W., along the adjusted record meander line in sec. 27.</p>					
2.46	<p>Point for the special meander cor. on the calculated N. and S. centerline of the SW¼ of sec. 27.</p>				

Accretion Survey, T. 7 S., R. 31 E.

CHAINS

Set the iron post 22 ins. in the ground, brass cap mkd.

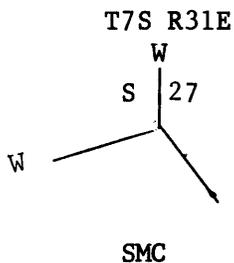

1968

Set a wooden post 4 ins. diam., 4 ft. long, alongside the iron post.


Thence:

S. 76°30' W., on a southerly extension of the N. and S. centerline of the SW¼ of sec. 27, over accretion land.

5.72

Point for the special meander cor., of sec. 27, on the present right bank of the Gila River, a cut bank 4 ft. high, bears N. 9°45' E. and S. 9°45' W.

Set the iron post 22 ins. in the ground, brass cap mkd.



1968

Set a railroad tie, 2 ft. in the ground, alongside the iron post.

Meander and Traverse of the Present
Right Bank of the Gila River
Secs. 27 and 34.

From the point for the meander cor. of secs. 33 and 34, on present right bank of the Gila River, for informational purposes only.

Thence, with traverse of the present bank of the river, downstream in sec. 34, along a cut bank 4 ft. high, through dense undergrowth.

N. 67°00' E., 8.90 chains.

N. 52°00' E., 5.00 chains.

N. 30°45' E., 5.20 chains.

N. 11°45' E., 5.50 chains.

At 0.92 chs. on this course, intersect the adjusted record meander line and terminal point used for prorating the river frontage.

N. 8°15' W., 4.50 chains.

N. 21°30' W., 2.80 chains.

Meanders and Traverse of the Present
Right Bank of the Gila River

CHAINS		
N. 2°24' E.,	2.13 chains	At the end of this course intersect the meander cor. of secs. 27 and 34.
<p>Land, level. Soil, sandy clay loam. Timber, cotton wood. Undergrowth, willow and cat claw.</p>		
<p>Thence, with meanders of the present right bank of the Gila River downstream in sec. 27.</p>		
N. 2°24' E.,	1.20 chains.	
N. 9°45' E.,	0.94 chains.	At the end of this course intersect the special meander cor. of sec. 27.
<p>Thence, with traverse in sec. 27, downstream, for informational purposes only.</p>		
N. 9°45' E.,	1.86 chains.	
N. 1°15' W.,	4.00 chains.	At the end of this course, the terminal point used for prorating the river frontage on the calculated adjusted record right bank meander line, bears N. 66°22' E., 0.93 chs. dist.
N. 46°00' W.,	5.00 chains.	
N. 52°15' W.,	8.80 chains.	
N. 70°15' W.,	4.33 chains.	At the end of this course intersect the point for the meander cor. bet. secs. 27 and 28, on the present right bank of the Gila River.
<p>Land, level. Soil, sandy clay loam. Timber, cotton wood. Undergrowth, willow and cat claw.</p>		
<p>Calculated Adjusted 1891 Right Bank Meanders in Sections 27 and 34</p>		
<p>The following field notes are those of the calculated courses and distances of the adjusted record meanders of the right bank of the Gila River as surveyed in 1891 by D. Drummond. These calculated courses and distances are submitted for informational purposes only.</p>		
<p style="text-align: center;">—————</p> <p>From the proportionate point for the record meander cor. of secs. 33 and 34.</p>		

Calculated Adjusted 1891 Right Bank Meanders
in Sections 27 and 34, T. 7 S., R. 31 E.

CHAINS

Thence in sec. 34 with the calculated adjusted 1891 record right bank meanders, downstream.

N. 54°13' E., 15.675 chains.

N. 22°30' E., 21.98 chains. At 5.84 chs. on this course, intersect the present right bank of the Gila River.

At the end of this course intersect the reestablished record meander cor. bet. secs. 27 and 34.

Thence in sec. 27 with the calculated adjusted 1891 record right bank meanders, downstream.

N. 26°08' W., 4.37 chains. At 2.46 chs. on this course intersect the special meander cor. on the N. and S. center line of the SW $\frac{1}{4}$ of sec. 27.

N. 49°00' W., 25.42 chains. At 4.816 chs. on this course, the terminal point used for prorating the river frontage on the present right bank of the Gila River, bears S. 66°22' W., 0.93 chs. dist.

At the end of this course intersect the proportionate point for the record meander cor. of secs. 27 and 28.

General Description

The area surveyed in Township 7 South, Range 31 East, lies east and west of the Gila River, and lies adjacent with Sheldon, Arizona, which is in the center of the township.

The land in the township is mostly rolling, with level river bottom land. The elevation ranges from 3,600 ft. to 4,216 ft. above sea level. The vegetation consists of creosote bush, cacti and bunch grass with willow and cat claw along the river banks. There are a few scattered cotton woods along the river banks.

State Highway No. 75, enters the township at the south boundary of sections 34, traverses N. 16° W., and leaves at the north boundary at the corner of sections 4, 5, 32 and 33. The Gila River enters at the south boundary of section 33, meanders northwesterly, leaves at the north boundary of section 5. The Southern Pacific Railroad, parallels the river.

Township 7 South, Range 31 East
Gila and Salt River Meridian, Arizona

CHAINS

The river bottom land is under cultivation. There are residences in many of the sections long the river area. There are windmills, earthen stock ponds and underground pipe lines in many sections.

The land is used primarily for grazing and is cultivated along the river.

The general drainage is southwest on the east side of the Gila River and easterly on the west side of the Gila River.

