

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

DEPENDENT RESURVEY

of

A PORTION OF THE SOUTH BOUNDARY

(THE SECOND STANDARD PARALLEL NORTH)

A PORTION OF THE WEST BOUNDARY

A PORTION OF THE SUBDIVISIONAL LINES

and

THE SURVEY OF THE SUBDIVISION

OF CERTAIN SECTIONS

of

TOWNSHIP 9 NORTH, RANGE 10 EAST

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

Louis D. Gilbert Cadastral Surveyor

John H. Witmer Cadastral Surveyor

Under special instructions dated March 24, 19 69, which provided for the surveys included under Group Number 484, approved March 25, 1969, and assignment instructions dated March 26, 19 69.

Survey commenced April 7, 19 69


Survey completed May 20, 19 69

1A

BOOK 4930

INDEX DIAGRAM

Township 9 North, Range 10 East

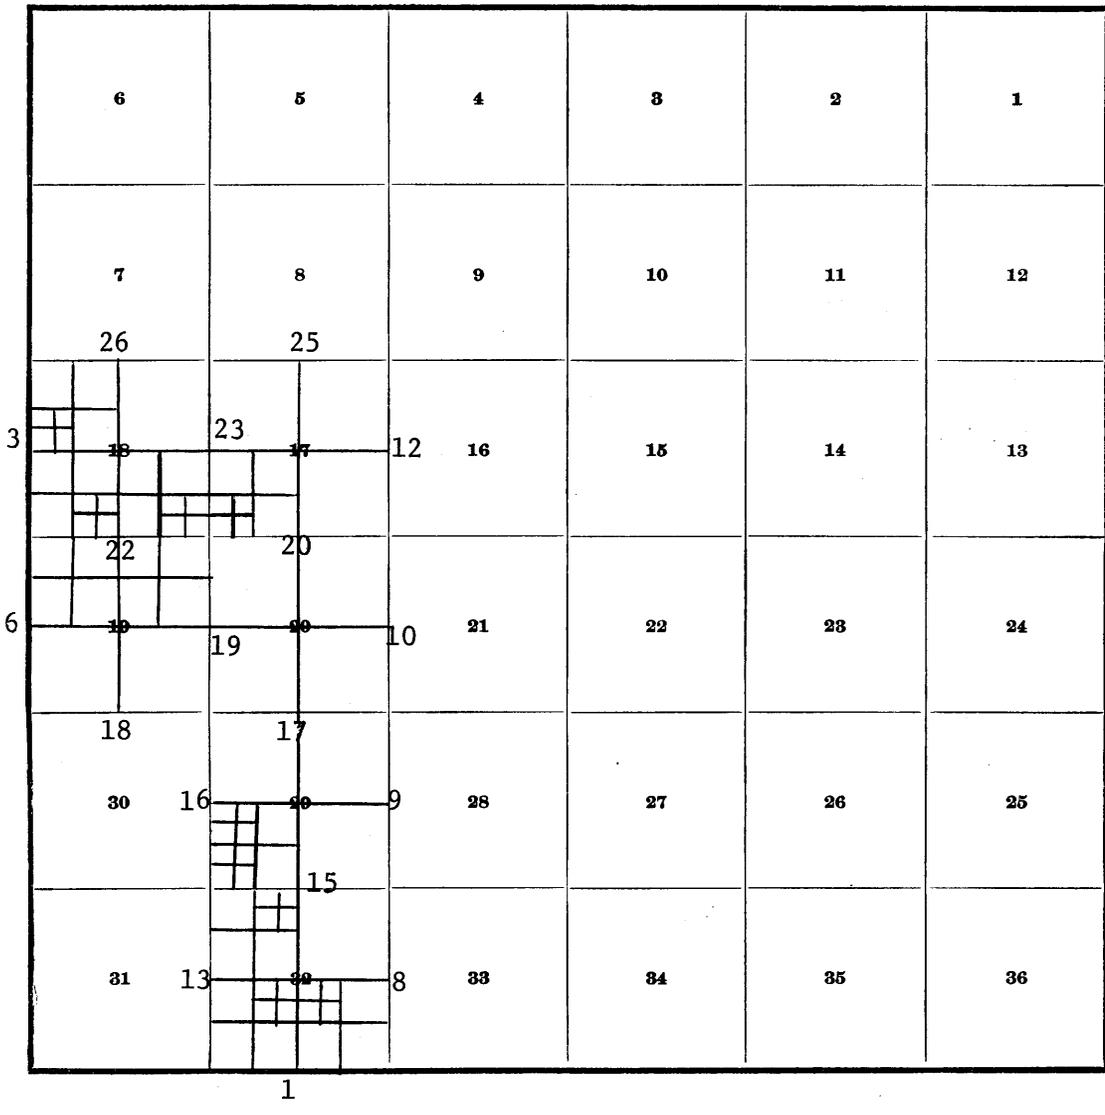

Subdivision of Section 17 - Page 27			
"	"	"	18 - Page 31
"	"	"	19 - Page 41
"	"	"	20 - Page 45
"	"	"	29 - Page 48
"	"	"	32 - Page 53

Township 9 North, Range 10 East
Gila and Salt River Meridian, Arizona

CHAINS

The south boundary (the Second Standard Parallel North), and the west boundary were surveyed in 1904 by J. J. Fisher. The east boundary was surveyed in 1904 by I. E. Oakes. The north boundary was surveyed in 1904 by Campbell and Oakes. The subdivisional lines were surveyed in 1904 by J. J. Fisher. Homestead Entry Survey 428 was surveyed and a portion of the west boundary of the township was retraced in 1916 by Walter G. Turley. Certain corners were remonumented in 1968 by Howard H. Thomas under Group No. 499, Arizona.

The following notes are those of a dependent resurvey of a portion of the south boundary (the Second Standard Parallel North), a portion of the west boundary and a portion of the subdivisional lines, designed to restore the corners in their true original location according to the best available evidence, and a survey of subdivisions in certain sections, Township 9 North, Range 10 East, Gila and Salt River Meridian, Arizona.

This survey was executed in accordance with specifications as set forth in the Manual of Surveying Instructions, 1947 and the Special Instructions dated March 24, 1969.

Only the true line bearings and horizontal distances for the surveyed lines are given in these notes. Unless described, each corner was monumented with a standard iron post, 30 ins. long, 2½ ins. diameter, flanged at the base, with a brass cap riveted to the top.

The geographic position of the southeast cor. of section 32, as scaled from U. S. Geological Survey Quadrangle PAYSON 1942, scale 1/62500 is: Latitude 34°04'21" North and Longitude 111°20'35" West.

The mean magnetic declination was found to be 13°30' E.

Dependent Resurvey of a Portion of the South Boundary
(the Second Standard Parallel North)
T. 9 N., R. 10 E., G&SRM, Arizona

Reestablishment of the Survey
Executed by J. J. Fisher in 1904

Beginning at the standard cor. of secs. 32 and 33, monumented by an iron post 2½" diam., firmly set with 4 ins. projecting above the ground, brass cap mkd.

T9N R10E
S C
S32 | S33
T8N
1968

Mound of stone N. of the cor.

S. 89°56' W., along the S. bdy. of sec. 32.

Dependent Resurvey, Portion S. Bdy., T. 9 N., R. 10 E.

CHAINS	
	Over rolling land through scattered timber.
19.99	Point for the standard E 1/16 sec. cor. of sec. 32, at proportionate dist.
	Set the iron post 21 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">S C T9N R10E E 1/16 S32 ----- 1969</p>
	Raise a mound of stones N. of the cor.
24.90	Track road, bears N. 40° E. and S. 40° W.
28.50	Telephone line, bears N. 31° E. and S. 31° W.
37.60	Fence, bears S. 15° E. and N. 15° W.
38.00	Track road, bears S. 37° E. and N. 37° W.
39.18	The witness standard ¼ sec. cor. of sec. 32, monumented by an iron post, 2½ ins. diam., firmly set 14 ins. in the ground in a mound of stone to top, brass cap mkd.
	<p style="text-align: center;">S C T9N R10E ¼ S32 ←----- W C T8N 1968</p>
	from which an original bearing tree:
	<p style="text-align: center;">A blazed mesquite, 14 ins. diam., bears N. 10° W., 146 lks. dist., mkd. with ¼ S32 BT visible.</p>
39.98	True point for the standard ¼ sec. cor. of sec. 32 at proportionate distance, falls in a insecure place in a wash, 40 lks. wide, 2 ft. deep, draining N. 70° E.
	<p style="text-align: center;">-----</p> <p>S. 89°58' W., beginning new measurement.</p>
19.92	Point selected for the witness standard W 1/16 sec. cor. of sec. 32.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">S C T9N R10E W 1/16 S32 ←----- W C 1969</p>
	Raise a mound of stones N. of the cor.

Dependent Resurvey, Portion S. Bdy., T. 9 N., R. 10 E.

CHAINS	
20.12	True point for the standard W 1/16 sec. cor. of sec. 32, at proportionate dist., falls in an insecure place near the east edge of Clover Wash.
20.40	Clover Wash, 80 lks. wide, 2 ft. deep, drains N. 85° E. from irregularly W.
28.20	Right-of-way fence, bears S. 10° E. and N. 10° W.
29.16	Center of Arizona Highway No. 87, bears S. 10° E. and N. 10° W.
29.75	Right-of-way fence, bears S. 10° E. and N. 10° W.
31.40	Clover Wash, 120 lks. wide, 1 ft. deep, drains irregularly E. from N. 80° W.
40.24	<p>The standard cor. of secs. 31 and 32, monumented by a granite stone 20x12x6 ins., firmly set 8 ins. in the ground, mkd. with SC on the N. face, 5 notches on the E. face, and 1 notch on the W. face, with a mound of stone N. from which the original bearing trees:</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 30½° W., 59 lks. dist., mkd. with a healed blaze.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 21° E., 54 lks. dist., mkd. with a healed blaze.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>S C T9N R10E S31 S32</p> <hr style="width: 50px; margin: 0 auto;"/> <p>T8N 1969</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Land, rolling. Soil, sandy loam. Timber, scattered juniper and mesquite. Undergrowth, oakbrush, catclaw and scattered grasses.</p>
<p>Dependent Resurvey of a Portion of the West Boundary, T. 9 N., R. 10 E., G&SRM, Arizona</p>	
<p>Reestablishment of the Survey Executed by J. J. Fisher in 1904</p> <hr style="width: 30%; margin: 10px auto;"/> <p>Beginning at the cor. of secs. 7, 12, 13 and 18, identical with cor. No. 1 of HES 428, monumented by a granite stone 20x16x8 ins., firmly set in the ground, mkd. with 4 notches on the S. face and 2 notches on the N. face and a mound of stone to W., from which the original bearing trees:</p>	

Dependent Resurvey, Portion W. Bdy., T. 9 N., R. 10 E.

CHAINS

A juniper, 10 ins. diam., bears N. $63\frac{1}{2}^{\circ}$ E.,
50 lks. dist., mkd. with an overgrown blaze.

A juniper, 10 ins. diam., bears S. $54\frac{1}{2}^{\circ}$ E.,
334 lks. dist., mkd. with an overgrown blaze.

A juniper, 18 ins. diam., bears S. $43\frac{3}{4}^{\circ}$ W.,
442 lks. dist., mkd. with illegible scribe mks.

A forked juniper, 24 ins. diam., bears N. $41\frac{1}{2}^{\circ}$ W.,
214 lks. dist., mkd. with illegible scribe mks.
at the base of the tree and mkd. HES 428 BT at
waist height.

At the corner point

Set the iron post 12 ins. in the ground, mound of stone
to top, brass cap mkd.

T9N	
R9E R10E	
COR 1	
HES	
S12	S 7
428	
S13	S18
1969	

Deposit the orig. cor. stone in the mound W. of the cor.
S. $0^{\circ}14'$ W., bet. secs. 13 and 18.

Over rolling land through widely scattered timber.

16.35 Unimproved road, bears SE. and NW.

16.80 Fence, bears SE. and NW.

17.00 Enter open meadow, bears SE. and NW.

20.06 Point for the N 1/16 sec. cor. of secs. 13 and 18, at
proportionate distance.

Set the iron post 24 ins. in the ground, brass cap mkd.

T9N	
R9E R10E	
HES	N 1/16
428	
S13	S18
1969	

Set a mesquite post, 4 ins. diam., 4 ft. long, alongside
the iron post.

30.09 Point for the S-N 1/64 sec. cor. of secs. 13 and 18, at
proportionate distance; not monumented.

35.20 Fence, bears S. 58° E. and N. 58° W., leave open meadow,
enter scattered timber.

Dependent Resurvey, Portion W. Bdy., T. 9 N., R. 10 E.

CHAINS	
38.90	Rye Creek, 1.00 chain wide, 3 ft. banks with a medium flowing stream, course SE.
40.12	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, determined latitudinally by proportionate measurement based on approved surveys and longitudinally by record distance from cor. No. 3 of H.E.S. No. 428. This is in close accord with the record and considered the best method of reestablishing the cor. in its true original location. There is no remaining evidence of the original corner.</p> <p>At the corner point</p> <p>Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R9E R10E HES $\frac{1}{4}$ 428 S13 S18 COR 2 1969</p> <p>from which</p> <p>A willow, 17 ins. diam., bears S. 39° E., 163 lks. dist., mkd. T9N R10E $\frac{1}{4}$ S18 BT.</p> <p>Cor. No. 3, H.E.S. No. 428, bears west 10.00 chs. dist., monumented by a granite stone firmly set with 16x10x8 ins. above the ground, mkd. HES 3 428 on the NE. face and a mound of stone NE. of the cor.</p> <p>Raise a mound of stones W. of the cor.</p> <p>The cor. is located on the S. bank of Rye Creek.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 0°19' W., beginning new measurement.</p>
10.00	<p>Point for the N-S $\frac{1}{64}$ sec. cor. of secs. 13 and 18, at proportionate distance.</p> <p>Set the iron post 18 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R9E R10E N-S $\frac{1}{64}$ S13 S18 1969</p> <p>Set a juniper post, 3 ins. diam., 4 ft. long, alongside the iron post.</p>
20.00	<p>Point for the S $\frac{1}{16}$ sec. cor. of secs. 13 and 18, at proportionate dist.</p>

Dependent Resurvey, Portion W. Bdy., T. 9 N., R. 10 E.

CHAINS		
	<p>Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R9E R10E S 1/16 S13 S18 1969</p> <p>The cor. is located on the N. edge of a wash draining E.</p> <p>20.50 Wash, 15 lks. wide, 1 ft. deep, drains E.</p> <p>27.20 Fence, bears E. and W.</p> <p>31.00 Wash, 10 lks. wide, 2 ft. deep, drains E.; asc. steep N. slope.</p> <p>40.00 The cor. of secs. 13, 18, 19 and 24, monumented by a granite stone, 20x20x8 ins., firmly set 14 ins. in the ground, mkd. with 3 notches on the S. face and 3 notches on the N. face, with a mound of stone to W. from which an original bearing tree:</p> <p style="padding-left: 40px;">A dead juniper, 5 ins. diam., bears N. 89½° E., 479 lks. dist., mkd. with faint scribe mks.</p> <p>At the corner point</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R9E R10E <u>S13 S18</u> <u>S24 S19</u> 1969</p> <p>Deposit the orig. cor. stone in the mound of stones around the iron post.</p> <p>Land, rolling. Soil, rocky and sandy loam. Timber, scattered juniper and mesquite. Undergrowth, oakbrush, catclaw, cacti and scattered grasses.</p>	
<p>20.055</p>	<p>S. 0°03' W., bet. secs. 19 and 24.</p> <p>Over rolling land through scattered undergrowth.</p> <p>Point for the N 1/16 sec. cor. of secs. 19 and 24, at proportionate dist.</p> <p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R9E R10E N 1/16 S24 S19 1969</p>	

Dependent Resurvey, Portion W. Bdy., T. 9 N., R. 10 E.

CHAINS	
	<p>The cor. is located on a rocky S. slope.</p>
25.70	<p>Wash, in Barnhardt Canyon, 1.20 chs. wide, 3 ft. deep, with a small flowing stream, course E.</p>
39.81	<p>Fence, bears N. 75° E. and S. 75° W.</p>
40.11	<p>The ½ sec. cor. of secs. 19 and 24, monumented by a granite stone, 30x10x10 ins., firmly set in a collar of stone, mkd. ½ on the W. face, from which the original bearing trees:</p> <p style="padding-left: 40px;">A blazed crucifixion, 6 ins. diam., bears S. 30½° E., 39 lks. dist., mkd. with 19 BT visible.</p> <p style="padding-left: 40px;">A blazed crucifixion, 6 ins. diam., bears S. 45½° W., 172 lks. dist., mkd. with S24 BT visible.</p> <p>At the corner point</p> <p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> <p>T9N R9E R10E ½ S24 S19 1969</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>S. 0°05' W., beginning new measurement.</p>
7.60	<p>Wash, 10 lks. wide, 1 ft. deep, drains E.</p>
11.50	<p>Track road, bears N. 80° E. and S. 80° W.</p>
15.00	<p>Fence, bears N. 70° E. and S. 70° W.</p>
39.89	<p>The cor. of secs. 19, 24, 25 and 30, monumented by a granite stone, 30x12x12 ins., firmly set 14 ins. in the ground, mkd. with 2 notches on the S. face and 4 notches on the N. face, with a mound of stone to the W.</p> <p>At the corner point</p> <p>Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> <p>T9N R9E R10E S24 S19 S25 S30 1969</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>The cor. is located on a steep rocky S. slope.</p>

Dependent Resurvey, Portion W. Bdy., T. 9 N., R. 10 E.

CHAINS	
	<p>Land, rolling. Soil, rocky and sandy loam. Timber, scattered juniper and mesquite. Undergrowth, oakbrush, catclaw, cacti and scattered grasses.</p>
	<p>Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E., G&SRM, Arizona</p>
	<p style="text-align: center;">Reestablishment of the Survey Executed by J. J. Fisher in 1904</p> <hr/> <p>From the standard cor. of secs. 32 and 33, on the S. bdy. of the township. N. 0°01' E., bet. secs. 32 and 33. Over rolling land through scattered juniper and oakbrush.</p>
14.20	South bank of Rye Creek, bears SE. and NW., thence over wash area.
18.00	South channel of Rye Creek with small flowing stream, 5 lks. wide, 6 ins. deep, course SE.
19.49	Point selected for the witness S 1/16 sec. cor. of secs. 32 and 33. Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>T9N R10E S 1/16 ↑ S32 S33 W C 1969</p>
	<p>from which A windmill, bears N. 17°04' W., 11.29 chs. dist. The cor. is located on a spur between two flowing streams.</p>
19.99	True point for the S 1/16 sec. cor. of secs. 32 and 33, at proportionate dist., falls in an insecure place in the north channel of Rye Creek, 30 lks. wide, 1 ft. deep, with a small flowing stream, course S. 80° E.
22.30	N. bank of Rye Creek, 5 ft. high, bears SE. and NW.
24.80	Fence, bears S. 52° E. and N. 52° W.
27.94	Fence, bears SE. and NW.
28.90	The Old Globe to Payson graded road, bears SE. and NW.

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
31.00	Telephone line, parallels the graded road; thence asc. steep SW. slope.
39.98	The 1/4 sec. cor. of secs. 32 and 33, monumented by an iron post, 2 1/2 ins. diam., firmly set with 4 ins. projecting above the ground, in a collar of stone to top, brass cap mkd.
	<p style="text-align: center;">T9N R10E 1/4 S32 S33 1968</p>
	The cor. is located on a spur sloping W.
	<p style="text-align: center;">_____</p> <p>N. 0°01' E., beginning new measurement.</p>
	Over rolling land.
34.40	Draw, drains irregularly S. 20° W.
39.91	The cor. of secs. 28, 29, 32 and 33, monumented by an iron post, 2 1/2 ins. diam., firmly set 15 ins. in the ground, mound of stone to top, brass cap mkd.
	<p style="text-align: center;">T9N R10E S29 S28 S32 S33 1968</p>
	<p>Land, rolling. Soil, rocky loam. Timber, scattered juniper with a few sycamore along Rye Creek. Undergrowth, oakbrush, catclaw, cacti and grama grass.</p>
	North, bet. secs. 28 and 29.
	Over rolling land through scattered undergrowth.
6.90	Draw, drains SW.
18.60	Improved dirt road, bears N. 75° E. and S. 75° W.
21.70	Black Mountain Wash, 2.70 chs. wide, 2 ft. deep, drains SW.
23.60	Telephone line, bears N. 75° E. and S. 75° W.
40.11	The 1/4 sec. cor. of secs. 28 and 29, monumented by a granite stone 18x10x10 ins., firmly set with 4 ins. projecting above the ground, mkd. 1/4 on the W. face, with a mound of stone to W. There is no remaining evidence of the original bearing trees.
	At the corner point
	Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.
	<p style="text-align: center;">T9N R10E 1/4 S29 S28 1969</p>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS							
	<p>Bury the orig. cor. stone alongside the iron post and rebuild the mound of stone W. of the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°01' W., beginning new measurement.</p> <p>Desc. steep N. slope.</p>						
8.00	Wash, 50 lks. wide, 2 ft. deep, drains SW.						
25.00	Draw, drains SW.						
35.50	Draw, drains W.						
39.40	Wash, 20 lks. wide, 1 ft. deep, drains W.						
39.80	<p>The cor. of secs. 20, 21, 28 and 29, monumented by a granite stone, 30x10x10 ins., firmly set 20 ins. in the ground, mkd. with 4 notches on the E., and 2 notches on the S. edges, with a mound of stone to W., from which the original bearing tree:</p> <p style="padding-left: 40px;">A mesquite, 10 ins. diam., bears S. 0°12' W., 66 lks. dist., mkd. with faint scribe mks., (record dist. 55 lks.).</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T9N R10E</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S20</td> <td style="padding: 0 5px;">S21</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S29</td> <td style="padding: 0 5px;">S28</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 5px;">1969</td> </tr> </table> </div>	S20	S21	S29	S28	1969	
S20	S21						
S29	S28						
1969							
	<p>Bury the orig. cor. stone alongside the iron post.</p> <p>Land, rolling. Soil, rocky loam. Timber, scattered mesquite and juniper. Undergrowth, catclaw, cacti and mesquite.</p>						
	<p>N. 0°02' E., bet. secs. 20 and 21.</p> <p>Over rolling land through scattered undergrowth.</p>						
11.80	Enter scattered juniper timber, bears E. and W.						
15.90	Draw, drains SW.						
20.10	Draw, drains SW.						
24.40	Fence, bears N. 40° E. and S. 40° W.						
33.90	Wash, 20 lks. wide, 2 ft. deep, drains SW.						

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
40.06	<p>The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented by a granite stone, 16x9x8 ins., firmly set 11 ins. in the ground, mkd. $\frac{1}{4}$ on W. face, from which the original bearing trees:</p> <p style="padding-left: 40px;">A dead juniper, 8 ins. diam., bears N. 53° E., 132 lks. dist., mkd, $\frac{1}{4}$ S21 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 61$\frac{1}{2}$° W., 478 lks. dist., mkd. $\frac{1}{4}$ S20 BT.</p> <p>At the corner point</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>$\frac{1}{4}$</p> <p>S20 S21</p> <p>1969</p> </div> <p>Deposit the orig. cor. stone in the mound alongside the iron post.</p>
	<p style="text-align: center;">N. 0°04' E., beginning new measurement.</p>
	<p style="text-align: center;">Over rolling land through scattered timber.</p>
19.50	<p>Hog Canyon, with a small flowing stream, course SW.</p>
24.20	<p>Fence, bears N. 60° E. and S. 60° W.</p>
24.60	<p>Telephone line, bears N. 60° E. and S. 60° W.</p>
40.15	<p>The cor. of secs. 16, 17, 20 and 21, monumented by a granite stone, 24x18x8 ins., firmly set 10 ins. in the ground, mkd. with 4 notches on the E. and 3 notches on the S. face, with a mound of stone to W., from which the orig. bearing trees:</p> <p style="padding-left: 40px;">A crucifixion, 8 ins. diam., bears S. 64$\frac{1}{2}$° E., 150 lks. dist., mkd. R10E S21 BT.</p> <p style="padding-left: 40px;">A blazed juniper, 10 ins. diam., bears N. 85$\frac{1}{2}$° W., 141 lks. dist., mkd. with BT visible.</p> <p>At the corner point</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>S17 S16</p> <p>S20 S21</p> <p>1969</p> </div> <p>Deposit the orig. cor. stone in the mound alongside the iron post.</p>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS		
	<p>Land, rolling. Soil, rocky loam. Timber, scattered juniper. Undergrowth, catclaw, cacti and mesquite.</p> <hr/> <p>N. 0°05' E., bet. secs. 16 and 17.</p> <p>Over rolling land through scattered timber.</p>	
10.10	Ridge and track road, bears N. 82° E. and S. 82° W.	
19.10	Ridge and track road, bears E. and W.	
28.00	Fence, bears E. and W.	
31.80	Right-of-way fence, bears N. 55° E. and S. 45° W.	
34.10	Wash, 15 lks. wide, 1 ft. deep, drains S.	
35.70	Arizona Highway No. 87 (a new two lane N. bound only), bears N. 55° E. and S. 45° W.	
39.50	Right-of-way fence, parallels highway.	
39.95	<p>The ¼ sec. cor. of secs. 16 and 17, monumented by a granite stone, 18 x 10 x 6 ins., firmly set 14 ins. in the ground, mkd. ¼ on the W. face, from which the orig. bearing trees:</p> <p style="padding-left: 40px;">A dead juniper, 12 ins. diam., bears S. 61½° E., 139 lks. dist., mkd. with an overgrown blaze.</p> <p style="padding-left: 40px;">A juniper, 16 ins. diam., bears N. 33° W., 43 lks. dist., mkd. with an overgrown blaze.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E ¼ S17 S16 1969.</p> <p>Bury the orig. cor. stone alongside the iron post and raise a mound of stone W. of the cor.</p> <hr/>	
	<p>N. 0°02' E., beginning new measurement.</p> <p>Over rolling land through widely scattered timber.</p>	
6.60	Wash, 5 lks. wide, 1 ft. deep, drains SW.	
9.70	Fence, bears S. 70° E. and N. 70° W.	
16.70	Wash, 10 lks. wide, 1 ft. deep, drains W.	

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS					
25.00	Wash, with small flowing stream, course SW.				
36.30	Wash, 20 lks. wide, 1 ft. deep, drains SW.				
39.92	<p>The cor. of secs. 8, 9, 16 and 17, monumented by a granite stone, 18x10x6 ins., firmly set 14 ins. in the ground, mkd. with 4 notches on the S. and 4 notches on the E. edges, with a mound of stone to W., from which the orig. bearing trees:</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 49° E., 364 lks. dist., mkd. T9N R10E.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 49° W., 198 lks. dist., mkd. with an overgrown blaze:</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T9N R10E</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S 8</td> <td style="padding: 0 5px;">S 9</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S17</td> <td style="padding: 0 5px;">S16</td> </tr> </table> <p>1969</p> </div> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Land, rolling. Soil, rocky loam. Timber, scattered juniper. Undergrowth, catclaw, cacti, mesquite brush and grama grass.</p>	S 8	S 9	S17	S16
S 8	S 9				
S17	S16				
	<p>From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp.</p> <p>N. 0°03' W., bet. secs. 31 and 32.</p> <p>Over rolling land through widely scattered timber.</p>				
2.00	Clover Wash, 60 lks. wide, 3 ft. deep, drains E.				
20.02	<p>Point for the S 1/16 sec. cor. of secs. 31 and 32, at proportionate dist.</p> <p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T9N R10E</p> <p>S 1/16</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S31</td> <td style="padding: 0 5px;">S32</td> </tr> </table> <p>1969</p> </div> <p>Raise a mound of stone W. of the cor.</p>	S31	S32		
S31	S32				
26.30	Track road, bears S. 85° E. and N. 85° W.				
40.04	The ¼ sec. cor. of secs. 31 and 32, monumented by a granite stone, 16x10x10 ins., firmly set 12 ins. in the ground, mkd. ¼ on W. face.				

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS		
	At the corner point	
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.	
	<p style="text-align: center;">T9N R10E $\frac{1}{4}$ S31 S32 1969</p>	
	Bury the orig. cor. stone alongside the iron post.	
	N. 0°01' E., beginning new measurement.	
	Over rolling land through widely scattered timber.	
4.80	Wash, 40 lks. wide, with 8 ft. banks, drains E.	
20.01	Point for the N 1/16 sec. cor. of secs. 31 and 32, at proportionate dist.	
	Set the iron post 22 ins. in the ground, brass cap mkd.	
	<p style="text-align: center;">T9N R10E N 1/16 S31 S32 1969</p>	
	Raise a mound of stone W. of the cor.	
25.00	Boone Moore Wash, 60 lks. wide, 3 ft. deep, drains SE.	
40.02	The cor. of secs. 29, 30, 31 and 32, monumented by a granite stone, 20x12x8 ins., firmly set 14 ins. in the ground, mkd. with 1 notch on the S. edge and 5 notches on the E. edge, with a mound of stone to W., from which an orig. bearing tree:	
	<p style="text-align: center;">A dead juniper, 10 ins. diam., bears N. 75½° W., 394 lks. dist., mkd. T9N R10E S30 BT.</p>	
	At the corner point	
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.	
	<p style="text-align: center;">T9N R10E S30 S29 S31 S32 1969</p>	
	Bury the orig. cor. stone alongside the iron post.	
	Land, rolling.	
	Soil, rocky loam.	
	Timber, scattered juniper.	
	Undergrowth, catclaw, cacti and grama grass.	

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	From the cor. of secs. 28, 29, 32 and 33.
	N. 89°56' W., bet. secs. 29 and 32.
	Over rolling land through scattered scrub mesquite.
14.00	Draw, drains SW.
30.09	Point for the W-E 1/64 sec. cor. of secs. 29 and 32, at proportionate dist.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T9N R10E W-E 1/64 $\frac{S29}{S32}$ 1969</p>
	from which
	<p style="text-align: center;">A local cor., monumented by a rebar $\frac{3}{4}$ in. diam., bears East 15.5 lks. dist.</p>
	Raise a mound of stone N. of the cor.
31.15	Telephone line, bears S. 25° E. and N. 25° W.
32.30	The old Globe to Payson improved dirt road, bears S. 25° E. and N. 25° W.
32.60	Leave rolling land, enter bottom land, bears S. 25° E. and N. 25° W., thence through dense catclaw and mesquite.
32.65	Fence, bears S. 25° E. and N. 25° W.
40.12	Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, at proportionate dist.; there is no remaining evidence of the original corner.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T9N R10E $\frac{1}{4}$ $\frac{S29}{S32}$ 1969</p>
	from which
	<p style="text-align: center;">A local corner, monumented by a rebar, $\frac{3}{4}$ in. diam., bears East 12 lks. dist.</p>
	Raise a mound of stone N. of the cor.
50.15	Point for the E-W 1/64 sec. cor. of secs. 29 and 32, at proportionate dist.; not monumented.
51.60	Right-of-way fence, bears N. 12° E. and S. 12° W., 114 lks. dist. to the NE: edge of a concrete bridge crossing Rye Creek.
52.40	Arizona Highway No. 87, bears N. 12° E. and S. 12° W.

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
53.15	Right-of-way fence, bears N. 12° E. and S. 12° W.
55.70	Rye Creek, 250 lks. wide, with 5 ft. banks and a flowing stream, 40 lks. wide, 6 ins. deep, course S. 30° E.; thence over rolling land through scattered timber.
59.40	Fence, bears S. 12° E. and N. 12° W.
60.18	Point for the W.1/16 sec. cor. of secs. 29 and 32, at proportionate dist. Set the iron post 20 ins. in the ground, brass cap mkd. <div style="text-align: center;"> T9N R10E W 1/16 $\frac{S29}{S32}$ 1969 </div> from which A local corner, monumented by a rebar, $\frac{3}{4}$ ins. diam., bears East, 3 lks. dist. Raise a mound of stone N. of the cor.
70.21	Point for the W-W 1/64 sec. cor. of secs. 29 and 32, at proportionate dist.; not monumented.
80.24	The cor. of secs. 29, 30, 31 and 32. Land, rolling. Soil, rocky and sandy loam. Timber, scattered juniper and mesquite. Undergrowth, catclaw, cacti, mesquite and grama grass.
	N. 0°07' E., bet. secs. 29 and 30. Over gently rolling land through scattered undergrowth.
10.04	Point for the S-S 1/64 sec. cor. of secs. 29 and 30, at proportionate dist.; not monumented.
20.08	Point for the S 1/16 sec. cor. of secs. 29 and 30, at proportionate dist. Set the iron post 22 ins. in the ground, brass cap mkd. <div style="text-align: center;"> T9N R10E S 1/16 S30 S29 1969 </div> Raise a mound of stone W. of the cor.
29.60	Wash, 35 lks. wide, 2 ft. deep, drains S. 65° E.
30.12	Point for the N-S 1/64 sec. cor. of secs. 29 and 30, at proportionate dist.; not monumented.

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
40.16	<p>The $\frac{1}{2}$ sec. cor. of secs. 29 and 30, monumented by a granite stone, 18x10x6 ins., firmly set 12 ins. in the ground, mkd. $\frac{1}{2}$ on the W. face, with a mound of stone to W.</p> <p>At the corner point</p> <p>Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E $\frac{1}{2}$ S30 S29 1969</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°02' E., beginning new measurement.</p> <p>Over rolling land.</p> <p>1.40 Wash, 25 lks. wide, 2 ft. deep, drains SE.</p> <p>24.10 Wash, 20 lks. wide, 3 ft. deep, drains S. 50° E.</p> <p>40.10 The cor. of secs. 19, 20, 29 and 30, monumented by a granite stone, 20x12x10 ins., firmly set 14 ins. in the ground, mkd. with 2 notches on the S. edge and 5 notches on the E. edge, with a mound of stone to the W.</p> <p>At the corner point</p> <p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S19 S20 S30 S29 1969</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Land, rolling. Soil, rocky loam. Timber, scattered juniper. Undergrowth, catclaw, cacti and mesquite.</p>
	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>N. 89°41' W., bet. secs. 20 and 29.</p> <p>Over rolling land through scattered undergrowth.</p>
19.70	<p>Draw, drains SW.</p>
39.99	<p>The $\frac{1}{2}$ sec. cor. of secs. 20 and 29, monumented by an iron post, 2$\frac{1}{2}$ ins. diam., firmly set 20 ins. in the ground, in a collar of stone to top, brass cap mkd.</p>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	<p>T9N R10E $\frac{1}{4}$ $\frac{S20}{S29}$ 1968</p> <hr/>
	N. 89°41' W., beginning new measurement.
0.86	Telephone line, bears S. and N. about 2.00 chs. dist.; thence N. 25° E. about 4.00 chs. dist.; thence N., enter valley.
5.11	Right-of-way fence, bears N. and S.
5.90	Arizona Highway No. 87, bears North and South.
6.71	Right-of-way fence, bears N. and S.
12.20	Bladed road, bears N. 12° E. and S. 12° W.
13.90	Fence, bears N. 20° E. and S. 20° W.
17.20	Rye Creek, 2.90 chs. wide, with 6. ft. banks, and a stream 10 lks. wide, 6 ins. deep, course S. 12° W.
20.09	Point for the W 1/16 sec. cor. of secs. 20 and 29, at proportionate distance. Set the iron post 24 ins. in the ground, brass cap mkd.
	<p>T9N R10E W 1/16 $\frac{S20}{S29}$ 1969</p>
	Raise a mound of stone N. of the cor.
23.10	Leave valley, enter rolling land, bears N. and S.; asc. steep E. slope.
33.50	Fence, bears N. 70° W. and S. 70° E., 80 lks. dist., to a cor. of fences extending S. 70° E., N. 70° W. and S.
40.18	The cor. of secs. 19, 20, 29 and 30. Land, rolling. Soil, rocky loam. Timber, Sycamore along Rye Creek. Undergrowth, catclaw, cacti, mesquite and grama grass.
	N. 89°59' W., bet. secs. 19 and 30. Over gently rolling land through scattered undergrowth.
26.40	Wash, 30 lks. wide, 1 ft. deep, drains SE.
40.09	The $\frac{1}{4}$ sec. cor. of secs. 19 and 30, monumented by a granite stone, 18x12x5 ins., firmly set 14 ins. in the ground, mkd. $\frac{1}{4}$ on the N. face, with a mound of stone to the N.

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	<p>At the corner point</p> <p>Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E $\frac{1}{4}$ $\frac{S19}{S30}$ 1969</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <hr/> <p>West, beginning new measurement.</p>
24.50	Draw, drains SE.
39.07	<p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the tp.</p> <p>Land, gently rolling and rolling. Soil, rocky loam. Timber, scattered mesquite. Undergrowth, scrub mesquite, cacti and grama grass.</p>
	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 0°02' E., bet. secs. 19 and 20.</p> <p>Over gently rolling land, through scattered undergrowth.</p>
2.05	Fence, bears S. 70° E. and N. 70° W.
11.00	Wash, 10 lks. wide, 1 ft. deep, drains SE.
25.00	Wash, 25 lks. wide, 2 ft. deep, drains SE.
40.08	<p>The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, monumented by an iron post, 2$\frac{1}{2}$ ins. diam., firmly set 18 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E $\frac{1}{4}$ $\frac{S19}{S20}$ 1968</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A rotted mesquite, 4 ins. diam., bears S. 69$\frac{1}{2}$° E., 95 lks. dist., no markings visible.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 1$\frac{1}{2}$° W., 106 lks. dist., mkd. with an overgrown blaze.</p> <hr/> <p>N. 0°03' E., beginning new measurement.</p>
20.00	Point for the N 1/16 sec. cor. of secs. 19 and 20, at proportionate distance.

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	<p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E N 1/16 S19 S20 1969</p>
30.00	Enter dense oak brush and catclaw, bears SE. and W.
38.10	Wash, 10 lks. wide, 1 ft. deep, drains SE.
40.00	<p>The cor. of secs. 17, 18, 19 and 20, monumented by a granite stone, 20x12x5 ins., firmly set 15 ins. in the ground, mkd. with 5 notches on the E. edge and 3 notches on the S. edge, with a mound of stone to the W. There is no remaining evidence of the original bearing trees.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S18 S17 S19 S20 1969</p> <p>Bury the orig. cor. stone alongside the iron post.</p> <p>Land, gently rolling and rolling. Soil, rocky loam. Timber, sycamore, desert willow and oak. Undergrowth, catclaw, cacti, mesquite and grama grass.</p>
	<p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>N. 89°43' W., bet. secs. 17 and 20.</p> <p>Over rolling land through widely scattered mesquite and juniper.</p>
21.70	Draw, drains SW.
25.50	Right-of-way fence, bears NE. and SW.
29.10	Arizona Highway No. 87 (two lane N. bound only), bears N. 45° E. and S. 45° W.
33.00	Right-of-way fence, bears NE. and SW.
35.00	Wash, 20 lks. wide, 1 ft. deep, drains SW.
40.03	<p>The ¼ sec. cor. of secs. 17 and 20, monumented by an iron post, 2½ ins. diam., firmly set 14 ins. in the ground, in a mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E ¼ S17 S20 1968</p>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS

from which.

A juniper, 6 ins. diam., bears N. 72° E.,
50 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

N. 89°44' W., beginning new measurement.

- 1.10 Ridge, bears N. and S.
- 11.10 Wash, 30 lks. wide, 1 ft. deep, drains SW.
- 14.20 Fence, bears S. 35° E. and N. 35° W., 35 lks. dist.,
thence N. 5° W.
- 14.70 Enter wash area, drains SW.
- 16.10 Telephone line, bears S. 25° E. and N. 25° W.
- 17.30 Leave wash area.
- 18.30 Right-of-way fence, bears S. 25° E. and N. 25° W.
- 19.70 Arizona Highway No. 87 (two lane, S. bound only), bears
S. 25° E. and N. 25° W.
- 20.10 Point for the W 1/16 sec. cor. of secs. 17 and 20, at
proportionate dist.
- Set the iron post 22 ins. in the ground, brass cap mkd.
- T9N R10E
W 1/16 $\frac{S17}{S20}$
1969
- Deposited glass in the hole alongside the iron post, and
raised a mound of stone W. of the cor.
- 21.35 Right-of-way fence, bears S. 25° E. and N. 25° W.
- 28.00 Leave rolling land, enter valley, bears N. and S.
- 30.15 Point for the W-W 1/64 sec. cor. of secs. 17 and 20, at
proportionate dist.
- Set the iron post 24 ins. in the ground, brass cap mkd.
- T9N R10E
W-W 1/64 $\frac{S17}{S20}$
1969
- Set a mesquite post, 2 ins. diam., 4 ft. long, alongside
the iron post.
- 30.20 Enter scattered sycamore trees, dense catclaw and mes-
quite, bears N. and S.
- 33.80 Fence, bears S. 57° E. and N. 57° W.

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
34.30	Improved road, bears S. 57° E. and N. 57° W.
38.40	Rye Creek, 130 lks. wide, with 5 ft. banks and stream 50 lks. wide, 6 ins. deep, course SE.
40.20	The cor. of secs. 17, 18, 19 and 20.
	<p>Land, rolling. Soil, rocky, sandy loam. Timber, sycamore and mesquite near Rye Creek. Undergrowth, catclaw, scrub mesquite, cacti and grama grass.</p>
	S. 89°53' W., bet. secs. 18 and 19.
	Over gently rolling land through widely scattered mesquite timber and dense undergrowth.
8.30	Track road, bears SE. and NW.
8.50	Fence, bears SE. and NW.
10.065	Point for the E-E 1/64 sec. cor. of secs. 18 and 19, at proportionate dist.
	Set the iron post 14 ins. in the ground, mound of stone to top, brass cap. mkd.
	<p>T9N R10E E-E 1/64 $\frac{S18}{S19}$ 1969</p>
18.60	Wash, 30 lks. wide, 1 ft. deep, drains SE.
20.13	Point for the E 1/16 sec. cor. of secs. 18 and 19, at proportionate dist.; not monumented.
22.80	Fence, bears S. 65° E. and N. 65° W.
34.65	Fence, bears S. 65° E. and N. 65° W.; asc. over rolling land.
40.26	<p>The ¼ sec. cor. of secs. 18 and 19, monumented by a granite stone, firmly set with 14x8x6 ins. extending above the ground, mkd. ¼ on the N. face, from which the original bearing trees:</p>
	<p>A juniper, 10 ins. diam., bears N. 24½° E., 79 lks. dist., mkd. ¼ S18 BT. (Record a mesquite tree).</p>
	<p>A juniper, 8 ins. diam., bears S. 41° W., 55 lks. dist., mkd. with an overgrown blaze. (Record a mesquite tree).</p>
	<p>This cor. was not remonumented.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	<p>N. 89°58' W., beginning new measurement.</p> <p>Asc. steep NE. slope.</p>
10.025	<p>Point for the E-W 1/64 sec. cor. of secs. 18 and 19, at proportionate dist.</p>
	<p>Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.</p>
	<p style="text-align: center;">T9N R10E E-W 1/64 $\frac{S18}{S19}$ 1969</p>
	<p>The cor. is located on a steep NE. slope.</p>
20.05	<p>Point for the W 1/16 sec. cor. of secs. 18 and 19, at proportionate dist.</p>
	<p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p>
	<p style="text-align: center;">T9N R10E W 1/16 $\frac{S18}{S19}$ 1969</p>
22.80	<p>E. edge of mesa, bears SE. and NW.</p>
38.80	<p>The cor. of secs. 13, 18, 19 and 24 on the W. bdy. of the tp.</p>
	<p>Land, gently rolling and rolling. Soil, rocky loam. Timber, scattered juniper and mesquite. Undergrowth, catclaw, scrub mesquite, cacti and grama grass.</p>
	<p>From the cor. of secs. 17, 18, 19 and 20.</p>
	<p>N. 0°04' E., bet. secs. 17 and 18.</p>
	<p>Over nearly level bottom land.</p>
1.10	<p>Rye Creek, 1.50 chs. wide, with 5 ft. banks, small flowing stream, course SE.</p>
4.50	<p>Improved road, bears S. 50° E. and N. 50° W.</p>
4.90	<p>Fence, bears S. 50° E. and N. 50° W.</p>
10.01	<p>Point for the S-S 1/64 sec. cor. of secs. 17 and 18, at proportionate dist.; not monumented.</p>
11.10	<p>Fence, bears N. 60° W. and S. 60° E., 10 lks. dist., thence N. 60° E.</p>
11.20	<p>Telephone line, bears S. 70° E. and N. 70° W.</p>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS		
13.50	Fence, bears S. 68° E. and N. 68° W.	
14.40	Fence, bears S. 80° E. and N. 80° W.	
20.02	Point for the S 1/16 sec. cor. of secs. 17 and 18, at proportionate dist.	
	Set the iron post 24 ins. in the ground, brass cap mkd.	
	T9N R10E S 1/16 S18 S17 1969	
	Raise a mound of stone W. of the cor.	
24.40	Wash, 20 lks. wide, 1 ft. deep, drains SE.; enter rolling land.	
40.05	The 1/4 sec. cor. of secs. 17 and 18, monumented by a granite stone, 20x12x8 ins., firmly set 14 ins. in the ground, mkd. 1/4 on the W. face, with a mound of stone to the W. from which an original bearing tree:	
	A juniper, 6 ins. diam., bears N. 82 1/2° E., 226 lks. dist.; no visible mks.	
	At the corner point	
	Set the iron post 20 ins. in the ground, in a small collar of stone, brass cap mkd.	
	T9N R10E 1/4 S18 S17 1969	
	Bury the orig. cor. stone alongside the iron post.	
	<hr style="width: 20%; margin: auto;"/> N. 0°06' E., beginning new measurement.	
9.50	Wash, 20 lks. wide, 1 ft. deep, drains irregularly S.	
40.03	The cor. of secs. 7, 8, 17 and 18, monumented by a granite stone, 18x14x8 ins., firmly set 16 ins. in the ground, mkd. with 5 notches on the E. and 4 notches on the S. edges, with a mound of stone E.	
	At the corner point	
	Set the iron post 22 ins. in the ground, brass cap mkd.	
	T9N R10E S 7 S 8 S18 S17 1969	

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	<p>Land, level to rolling. Soil, rocky, sandy loam. Timber, scattered juniper and sycamore. Undergrowth, catclaw, scrub mesquite, cacti and grama grass.</p>
	<p>From the cor. of secs..8, 9, 16 and 17. N. 89°25' W., bet. secs. 8 and 17. Over rolling land through widely scattered juniper timber.</p>
20.45	Wash, 10 lks. wide, 1 ft. deep, drains S.
22.30	Wash, 25 lks. wide, 2 ft. deep, drains S.
28.90	Fence, bears S. 30° E. and N. 30° W.
40.02	<p>The ¼ sec. cor. of secs..8 and 17, monumented by a granite stone, 28x12x10 ins., firmly set 18 ins. in the ground, mkd. ¼ on the N. face, with a mound of stone to the N.</p> <p>At the corner point</p> <p>Set the iron post 20 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E ¼ $\frac{S\ 8}{S17}$ 1969</p>
	<p>N. 89°38' W., beginning new measurement.</p>
4.80	Wash, 10 lks. wide, 1 ft. deep, drains S.
5.45	Telephone line, bears N. 12° E. and S. 12° W.
12.70	Right-of-way fence, bears N. 18° E. and S. 18° W.
14.40	Arizona Highway No. 87, bears N. 18° E. and S. 18° W. (south bound traffic only).
16.10	Right-of-way fence, parallels the highway.
19.50	Wash, 10 lks. wide, 1 ft. deep, drains S.
32.90	Wash, 10 lks. wide, 2 ft. deep, drains S.
40.13	<p>The cor. of secs. 7, 8, 17 and 18.</p> <p>Land, rolling. Soil, rocky loam. Timber, widely scattered juniper and mesquite. Undergrowth, catclaw, cacti and grama grass.</p>

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS		
	N. 89°51' W., bet. secs. 7 and 18. Over rolling land through scattered timber.	
0.10	Wash, 10 lks. wide, with 4 ft. banks, drains S.	
18.10	Wash, 30 lks. wide, 1 ft. deep, drains SW.	
19.80	Wash, 15. lks. wide, 1 ft. deep, drains SW.	
30.60	Wash, 10 lks. wide, 1 ft. deep, drains SW.	
40.10	The ¼ sec. cor. of secs. 7 and 18, monumented by a weathered limestone, 20x14x6 ins., firmly set 8 ins. in the ground, no markings visible, with a mound of stone N., from which the original bearing trees: A juniper, 12 ins. diam., bears S. 64° E., 82 lks. dist., mkd. with illegible scribe mks. A juniper, 20 ins. diam., bears N. 25° W., 144 lks. dist., mkd. S 7 BT. At the corner point Set the iron post 22 ins. in the ground, brass cap mkd. T9N R10E ¼ $\frac{S 7}{S18}$ 1969 Bury the orig. cor. stone alongside the iron post. <hr/> S. 89°47' W., beginning new measurement.	
3.85	Unimproved road, bears NE. and SW.	
10.40	Wash, 25 lks. wide, 2 ft. deep, drains S.	
20.11	Point for the W 1/16 sec. cor. of secs. 7 and 18, at proportionate dist. Set the iron post 15 ins. in the ground, mound of stone to top, brass cap mkd. T9N R10E W 1/16 $\frac{S 7}{S18}$ 1969 The cor. is located on top of a ridge bearing NE. and S.	
31.30	Wash, 10 lks. wide, 2 ft. deep, drains SW.	
38.75	The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the tp.	

Dependent Resurvey, Portion Subdivisional Lines, T. 9 N., R. 10 E.

CHAINS	
	<p>Land, rolling. Soil, rocky loam. Timber, scattered juniper and mesquite. Undergrowth, catclaw, cacti and grama grass.</p>
	<p style="text-align: center;">Subdivision of Section 17, T. 9 N., R. 10 E., G&SRM; Arizona</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 17 and 20. N. $0^{\circ}03'$ E. on the N. and S. centerline of sec. 17. Over rolling land through widely scattered timber.</p>
11.60	<p>Wash, 20 lks. wide, 1 ft. deep, drains SW.</p>
19.99	<p>Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 17.</p>
	<p>Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>C</p> <p>S $\frac{1}{16}$ S17</p> <p>C</p> <p>1969</p> </div>
27.50	<p>Fence, bears N. 40° E. and S. 40° W.</p>
39.98	<p>Point for the C $\frac{1}{4}$ sec. cor. of sec. 17, at intersection with the E. and W. centerline of sec. 17.</p> <p>Set the iron post 20 ins. in the ground, collar of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>S17</p> <p>+</p> <p>C $\frac{1}{4}$</p> <p>1969</p> </div>
41.00	<p>Wash, 25 lks. wide, 2 ft. deep, drains SW.</p>
65.30	<p>Wash, 6 lks. wide, 2 ft. deep, drains SW.</p>
80.05	<p>The $\frac{1}{4}$ sec. cor. of secs. 8 and 17.</p>
	<p>Land, rolling. Soil, rocky loam. Timber, scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, oak brush and grama grass.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 16 and 17. N. $89^{\circ}38'$ W., on the E. and W. centerline of sec. 17.</p>

Subdivision of Section 17, T. 9 N., R. 10 E.

CHAINS	
	Over rolling land through widely scattered timber.
22.20	Wash, 30 lks. wide, 2 ft. deep, drains SW.
30.20	Fence, bears N. 35° E. and S. 35° W.
40.03	The center $\frac{1}{4}$ sec. cor. of sec. 17.
41.90	Wash, 25 lks. wide, 2 ft. deep, drains SW.
47.40	Wash, 15 lks. wide, 1 ft. deep, drains SW.
55.75	Telephone line, bears N. 15° E. and S. 15° W.
60.11	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 17.
	Set the iron post 18 ins. in the ground, brass cap mkd.
	T9N R10E W $\frac{1}{16}$ C ————— C S17 1969
	Set a pine post 5 ins. square, 4 ft. long, alongside the cor.
61.50	Right-of-way fence, bears N. 5° E. and S. 5° W.
62.50	Arizona Highway No. 87 (south bound only), bears N. 5° E. and S. 5° W.
63.40	Right-of-way fence, bears N. 5° E. and S. 5° W.
67.40	Wash, 10 lks. wide, with 5 ft. banks, drains S.
80.20	The $\frac{1}{4}$ sec. cor. of secs. 17 and 18.
	Land, rolling. Soil, rocky loam. Timber, scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, oak brush and grama grass.
	Subdivision of the SW $\frac{1}{4}$ of sec. 17
	—————
	From the W $\frac{1}{16}$ sec. cor. of secs. 17 and 20.
	N. 0°03' E. on the N. and S. centerline of the SW $\frac{1}{4}$ of sec. 17.
	Over rolling land through widely scattered timber.
1.20	Arizona Highway No. 87 (south bound only), bears N. 20° W. and S. 20° E.
5.50	Right-of-way fence, bears S. 20° E. and N. 20° W.

Subdivision of Section 17, T. 9 N., R. 10 E.

CHAINS	
7.95	Telephone line, bears S. 55° E. and N. 55° W.
10.00	Point for the C-S-SW 1/64 sec. cor. of sec. 17; not monumented.
15.00	Telephone line, bears S. 10° E. and N. 10° W.
20.00	Point for the SW 1/16 sec. cor. of sec. 17, at intersection with the E. and W. centerline of the SW 1/4 of sec. 17.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T9N R10E S17 SW 1/16 1969
	Raise a mound of stone W. of the cor.
24.70	Telephone line, bears N. 15° E. and S. 15° W.
40.02	The C-W 1/16 sec. cor. of sec. 17.
	From the C-S 1/16 sec. cor. of sec. 17.
	N. 89°41' W., on the E. and W. centerline of the SW 1/4 of sec. 17.
	Over rolling land, through widely scattered timber.
7.40	Fence, bears S. 40° W. and N. 40° E. about 50 lks. dist., thence NE.
13.70	Wash, 110 lks. wide, 2 ft. deep, drains SW.
20.08	The SW 1/16 sec. cor. of sec. 17.
21.00	Telephone line, bears S. 10° E. and N. 10° W.
21.60	Right-of-way fence, bears N. 3° E. and S. 3° W.
23.25	Arizona Highway No. 87, bears N. 3° E. and S. 3° W. (south bound traffic only).
24.90	Right-of-way fence, bears N. 3° E. and S. 3° W.
27.50	Wash, 10 lks. wide, 1 ft. deep, drains S.
30.12	Point for the C-W-SW 1/64 sec. cor. of sec. 17; not monumented.
35.14	Point for the C-W-W-SW 1/256 sec. cor. of sec. 17.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T9N R10E S17 C-W-W-SW 1/256 1969

Subdivision of Section 17, T. 9 N., R. 10 E.

CHAINS	
	Raise a mound of stone N. of the cor.
37.00	Wash, 10 lks. wide, 3 ft. deep, drains S.
39.20	Wash, 100 lks. wide, 3 ft. deep, drains S.
40.16	The S 1/16 sec. cor. of secs. 17 and 18.
<hr/> Subdivision of the SW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 17 <hr/>	
	From the W-W 1/64 sec. cor. of secs. 17 and 20.
	N. 0°05'30" E., on the N. and S. centerline of the SW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 17.
	Over nearly level land, through dense catclaw.
5.30	Wash, 30 lks. wide, 1 ft. deep, drains SE.
9.70	Telephone line, bears S. 80° E. and N. 80° W.
10.01	Point for the SW-SW 1/64 sec. cor. of sec. 17, at intersection with the E. and W. centerline of the SW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 17.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	T9N R10E S17 SW-SW 1/64 1969
	from which
	SE. cor. of a small graveyard, bears N. 35° W. about 3 chs. dist.
	Raise a mound of stone W. of the cor.
11.45	Fence, bears S. 75° E. and N. 75° W.; enter rolling land.
20.02	Point for the C-W-SW 1/64 sec. cor. of sec. 17.
<hr/> From the point for the C-S-SW 1/64 sec. cor. of sec. 17. N. 89°41' W., on the E. and W. centerline of SW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 17. Over rolling land, through widely scattered timber.	
0.95	Right-of-way fence, bears irregularly N. and S.
2.50	Arizona Highway No. 87, bears irregularly N. and S. (south bound traffic only).
4.10	Right-of-way fence, parallels the highway.

Subdivision of Section 17, T. 9 N., R. 10 E.

CHAINS	
6.70	Fence, bears S. 60° E. and N. 60° W.
10.04	The SW-SW 1/64 sec. cor. of sec. 17.
12.05	Telephone line, bears S. 80° E. and N. 80° W.
15.06	Point for the C-W-SW-SW 1/256 sec. cor. of sec. 17.
	Set the iron post 20 ins. in the ground, brass cap mkd.
	<p>T9N R10E S17 C-W-SW-SW 1/256 1969</p>
	Raise a mound of stone N. of the cor.
15.30	Wash, 30 lks. wide, 1 ft. deep, drains S.
16.30	Fence, bears S. 15° E. and N. 15° W.
18.50	Fence, bears S. 55° E. and N. 55° W.
20.08	Point for the S-S 1/64 sec. cor. of secs. 17 and 18.
<p>Subdivision of Section 18, T. 9 N., R. 10 E., G&SRM, Arizona</p>	
	From the 1/4 sec. cor. of secs. 18 and 19.
	N. 0°15' E., on the N. and S. centerline of sec. 18.
	Desc. steep N. slope.
3.30	Fence, bears S. 65° E. and N. 65° W.; enter bottom land.
9.515	Point selected for the witness C-S-S 1/64 sec. cor. of sec. 18.
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	<p>W C ↑ T9N R10E S18 C-S-S 1/64 1969</p>
	Raise a mound of stone W. of the cor.
10.015	True point for the C-S-S 1/64 sec. cor. of sec. 18 falls in Rye Creek, in unsafe location.
	<p>from which</p> <p>The SW. cor. of a house, 34 ft. square, bears N. 55° E., 400 lks. dist. The east side of the house bears NE. and SW.</p>

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
	<p>A drilled well with an 8 in. diam. casing bears N. 42° E., 370 lks. dist.</p>
10.05	Rye Creek, 100 lks. wide, with 4 ft. banks and a small flowing stream, course E., 40 lks. dist., thence SE.
12.55	Fence, bears N. 30° E. and S. 30° W.
16.20	Unimproved road, bears SE. and NW.; enter rolling land.
19.75	Unimproved road, bears E. and W.
20.03	Point for the C-S 1/16 sec. cor. of sec. 18.
	<p>Set the iron post 16 ins. in the ground, collar of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>C</p> <p>S 1/16 S18</p> <p>C</p> <p>1969</p> </div>
26.60	Wash, 20 lks. wide, 1 ft. deep, drains SW.
30.80	Wash; 20 lks. wide, 1 ft. deep, drains S.
40.06	Point for the C 1/4 sec. cor. of sec. 18, at intersection with the E. and W. centerline of sec. 18.
	<p>Set the iron post 20 ins. in the ground, collar of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>S18</p> <p>+</p> <p>C 1/4</p> <p>1969</p> </div> <p>Raise a mound of stone W. of the cor.</p>
60.15	Point for the CN 1/16 sec. cor. of sec. 18.
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>C</p> <p>N 1/16 S18</p> <p>C</p> <p>1969</p> </div> <p>Raise a mound of stone W. of the cor.</p>
68.20	Wash, 15 lks. wide, 1 ft. deep, drains SW.
80.24	The 1/4 sec. cor. of secs. 7 and 18.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
	<p>Land, rolling. Soil, rocky and loamy. Timber, scattered juniper and mesquite. Undergrowth; scrub mesquite, catclaw, cacti and gramá grass.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 17 and 18. S. $89^{\circ}53'$ W., on the E. and W. centerline of sec. 18. Over rolling land through widely scattered timber.</p>
3.30	Wash, 20 lks. wide, 2 ft. deep, drains S.
19.10	Wash, 10 lks. wide, 1 ft. deep, drains S.
20.09	Point for the C-E $\frac{1}{16}$ sec. cor. of sec. 18. Set the iron post 20 ins. in the ground, brass cap mkd.
	<p>T9N R10E E $\frac{1}{16}$ C ————— C S18 1969</p>
	<p>Raise a mound of stone W. of the cor. The cor. is located on a steep W. slope.</p>
37.80	Wash, 20 lks. wide, 1 ft. deep, drains S.
40.18	The C $\frac{1}{4}$ sec. cor. of sec. 18.
42.70	Unimproved road, bears N. and S.
47.00	Wash, 15 lks. wide, 1 ft. deep, drains S.
59.90	Wash, 25 lks. wide, 1 ft. deep, drains S.
60.25	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 18. Set the iron post 21 ins. in the ground, brass cap mkd.
	<p>T9N R10E W $\frac{1}{16}$ C ————— C S18 1969</p>
	<p>Raise a mound of stone N. of the cor.</p>
60.80	Wash, 20 lks. wide, 1 ft. deep, drains S.
65.40	Unimproved road, bears SE. and NW.
66.30	Fence, bears S. 40° E. and N. 40° W.
70.285	Point for the C-W-W $\frac{1}{64}$ sec. cor. of sec. 18; not monumented.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
73.70	Fence, bears S. 40° E. and N. 40° W.
77.30	Rye Creek, 150 lks. wide, with 3 ft. banks and a small flowing stream, course SE.
78.935	The ¼ sec. cor. of sec. 13 and 18 on the W. bdy. of the tp.
	Land, rolling. Soil, rocky loam. Timber, scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, cacti and grama grass.
<hr/> Subdivision of the NW¼ of Section 18	
	<hr/> From the C-W 1/16 sec. cor. of sec. 18.
	N. 0°10' E., on the N. and S. centerline of the NW¼ of sec. 18.
	Over gently rolling land through dense undergrowth.
10.04	Point for the C-S-NW 1/64 sec. cor. of sec. 18.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	T9N R10E S18 C-S-NW 1/64 1969
	Raise a mound of stone W. of the cor.
20.08	Point for the NW 1/16 sec. cor. of sec. 18, at the intersection with the E. and W. centerline of the NW¼ of sec. 18.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	T9N R10E S18 NW 1/16 1969
	Raise a mound of stone W. of the cor.
40.15	The W 1/16 sec. cor. of secs. 7 and 18.
	<hr/> From the CN 1/16 sec. cor. of sec. 18.
	S. 89°52' W., on the E. and W. centerline of the NW¼ of sec. 18.
	Over gently rolling land through dense undergrowth.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
2.10	Wash, 20 lks. wide, 2 ft. deep, drains S.
4.10	Unimproved road, bears S. 5° E. and N. 5° W.
9.15	Spur, slopes S.
18.10	Wash, 35 lks. wide, 2 ft. deep, drains S. 10° E.
20.10	The NW 1/16 sec. cor. of sec. 18.
30.15	Point for the C-W-NW 1/64 sec. cor. of sec. 18.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	T9N R10E S18 C-W-NW 1/64 1969
	Deposit glass at the base of the iron post.
35.45	Unimproved road, bears S. 20° E. and NW.
36.80	Fence, bears S. 30° E. and N. 30° W.
38.77	The N 1/16 sec. cor. of secs. 13 and 18 on the W. bdy. of the tp.
	Subdivision of the SW $\frac{1}{4}$ NW $\frac{1}{4}$ of Section 18
	<hr/> From the point for the C-W-W 1/64 sec. cor. of sec. 18.
	N. 0°08' E., on the N. and S. centerline of the SW $\frac{1}{4}$ NW $\frac{1}{4}$ of sec. 18.
	Over nearly level land.
4.80	Fence, bears SE. and NW.; enter dense catclaw and scrub mesquite.
5.90	Unimproved road, bears SE. and NW.; thence over rolling land.
10.03	Point for the SW-NW 1/64 sec. cor. of sec. 18 at intersection with the E. and W. centerline of the SW $\frac{1}{4}$ NW $\frac{1}{4}$ of sec. 18.
	Set the iron post 21 ins. in the ground, brass cap mkd.
	T9N R10E S18 SW-NW 1/64 1969
	Raise a mound of stone W. of the cor.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
20.07	The C-W-NW 1/64 sec. cor. of sec. 18.
	From the C-S-NW 1/64 sec. cor. of sec. 18.
	S. 89°52' W., on the E. and W. centerline of the SW $\frac{1}{4}$ NW $\frac{1}{4}$ of sec. 18.
	Over rolling land through dense undergrowth.
10.035	The SW-NW 1/64 sec. cor. of sec. 18.
13.20	Unimproved road, bears SE. and NW.
13.90	Fence, bears S. 20° E. and N. 20° W.; enter open field.
18.675	Point for the S-N 1/64 sec. cor. of secs. 13 and 18, on the W. bdy. of the tp.
	Subdivision of the SW $\frac{1}{4}$ of Section 18
	From the W 1/16 sec. cor. of secs. 18 and 19.
	N. 0°12' E., on the N. and S. centerline of the SW $\frac{1}{4}$ of sec. 18.
	Over rolling land through scattered timber.
7.20	North edge of mesa, bears E. and W., desc. steep N. slope.
9.25	Fence, bears E. and W.
10.005	Point for the C-S-SW 1/64 sec. cor. of sec. 18; not monumented.
11.00	Wash, 30 lks. wide, 3 ft. deep, drains NE.
11.80	Rye Creek, 80 lks. wide, 3 ft. deep, with a small flowing stream, course S. 50° E.
20.01	Point for the SW 1/16 sec. cor. of sec. 18, at intersection with the E. and W. centerline of the SW $\frac{1}{4}$ of sec. 18.
	Set the iron post 24 ins. in the ground, brass cap mkd.
	T9N R10E
	S18
	SW 1/16
	1969
	Set a wooden post 4 ins. square, 4 ft. long, alongside the iron post.
30.02	Point for the C-N-SW 1/64 sec. cor. of sec. 18.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
	Set the iron post 24 ins. in the ground, brass cap mkd. T9N R10E S18 C-N-SW 1/64 1969
	Set a wooden post, 3 ins. square, 4 ft. long, alongside the iron post.
32.15	Fence, bears S. 40° E. and N. 40° W.
34.00	Wash, 20 lks. wide, 1 ft. deep, drains S. 30° E.
35.80	Unimproved road, bears S. 10° E. and N. 25° W.
40.03	The C-W 1/16 sec. cor. of sec. 18.
	From the C-S 1/16 sec. cor. of sec. 18. S. 89°59' W., on the E. and W. centerline of the SW¼ of sec. 18. Over rolling land through dense undergrowth.
3.80	The intersection of an unimproved road bearing SE. and NW., and a wash 20 lks. wide, 1 ft. deep, drains SW.
5.30	Fence, bears S. 60° E. and N. 60° W.
10.025	Point for the C-E-SW 1/64 sec. cor. of sec. 18; not monumented.
13.80	Wash, 15 lks. wide, 3 ft. deep, drains SW.
16.50	Wash, 15 lks. wide, 1 ft. deep, drains SW.
20.05	The SW 1/16 sec. cor. of sec. 18.
24.90	Rye Creek, 100 lks. wide, with 3 ft. banks, and a small flowing stream, course SE.; asc. steep E. slope.
38.75	The S 1/16 sec. cor. of secs. 13 and 18, on the W. bdy. of the tp.
	Subdivision of the SE¼SW¼ of Sec. 18 From the E-W 1/64 sec. cor. of secs. 18 and 19. N. 0°11' E., on the N. and S. centerline of the SE¼SW¼ of sec. 18. Desc. N. slope.
3.55	Draw, drains N. 50° E.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
5.30	Spur, slopes N. 80° E.; enter moderate undergrowth.
8.00	Fence, bears S. 70° E. and N. 70° W., bottom of desc.
9.81	Point selected for the witness SE-SW 1/64 sec. cor. of sec. 18.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p>W C ↑ T 9 N R 10 E S 18 SE-SW 1/64 1969</p>
	Raise a mound of stone W. of the cor.
	The cor. is located on the S. bank of Rye Creek.
10.01	True point for the SE-SW 1/64 sec. cor. of sec. 18, at intersection with the E. and W. centerline of the SE½SW½ of sec. 18, falls in unsafe location in Rye Creek.
10.80	Rye Creek, 150 lks. wide, with 4 ft. banks, and a small flowing stream, course N. 60° E.
15.70	Leave wash area, enter moderate scrub mesquite, bears E. and W.
20.02	The point for the C-E-SW 1/64 sec. cor. of sec. 18.
	<hr/> From the true point for the C-S-S 1/64 sec. cor. of sec. 18.
	N. 89°56' W., on the E. and W. centerline of the SE½SW½ of sec. 18.
	Over nearly level land along Rye Creek, through scattered timber.
.1.50.	Fence, bears N. 30° E. and S. 30° W.
9.80	South bank of Rye Creek, bears N. 60° E. and S. 60° W., enter Rye Creek.
10.025	True point for the SE-SW 1/64 sec. cor. of sec. 18.
12.70	Rye Creek, 150 lks. wide, with 4 ft. banks and a small flowing stream, course N. 60° E.
17.80	Rye Creek, 150 lks. wide, with 4 ft. banks and small flowing stream, course S. 60° E.
20.05	Point for the C-S-SW 1/64 sec. cor. of sec. 18.
	<hr/> Subdivision of the SE½ of Section 18 <hr/>

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS

From the point for the E 1/16 sec. cor. of secs. 18 and 19.
N. 0°08' E., on the N. and S. centerline of the SE $\frac{1}{4}$ of
sec. 18.

Over nearly level land, through widely scattered timber
and dense undergrowth.

4.10 Fence, bears E. and W.

9.50 Unimproved road, bears E. and W.

10.01 Point for the C-S-SE 1/64 sec. cor. of sec. 18.

Set the iron post 16 ins. in the ground, mound of stone
to top, brass cap mkd.

T9N R10E
S18
C-S-SE
1/64
1969

13.10 Rye Creek, 150 lks. wide with 3 ft. banks and small
flowing stream, course E.; asc. over 40 ft. vertical
cliff.

20.02 Point for the SE 1/16 sec. cor. of sec. 18, at inter-
section with the E. and W. centerline of the SE $\frac{1}{4}$ of sec.
18.

Set the iron post 22 ins. in the ground, brass cap mkd.

T9N R10E
S18
SE 1/16
1969

Raise a mound of stone W. of the cor.

21.00 Wash, 10 lks. wide with 7 ft. banks, drains SE.

24.20 Unimproved road, bears SE. and NW.

38.50 Wash, 5 lks. wide, 1 ft. deep, drains S.

40.05 The C-E 1/16 sec. cor. of sec. 18.

From the S 1/16 sec. cor. of secs. 17 and 18.

S. 89°55' W., on the E. and W. centerline of the SE $\frac{1}{4}$ of
sec. 18.

4.70 South edge of an earthen stock tank, 30 ft. diam.

10.06 Point for the C-E-SE 1/64 sec. cor. of sec. 18.

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S18 C-E-SE 1/64 1969</p> <p>Raise a mound of stone N. of the cor.</p> <p>The cor. is located on a steep W. slope.</p>
14.20	Wash; 10 lks. wide, 3 ft. deep, drains S.
14.80	Unimproved road, bears SE. and NW.
18.20	Wash, 10 lks. wide, with 7 ft. banks, drains SE.
20.12	The SE 1/16 sec. cor. of sec. 18.
38.00	Unimproved road, bears NE. and SW.
40.23	The C-S 1/16 sec. cor. of sec. 18.
<p>Subdivision of the SE$\frac{1}{4}$SE$\frac{1}{4}$ of Sec. 18</p> <hr/>	
	<p>From the E-E 1/64 sec. cor. of secs. 18 and 19.</p> <p>N. 0°06' E., on the N. and S. centerline of the SE$\frac{1}{4}$SE$\frac{1}{4}$ of sec. 18.</p> <p>Over nearly level land, through widely scattered timber and dense undergrowth.</p>
2.50	Fence, bears S. 40° E. and N. 40° W.
5.70	Track road, bears E. and W. 3.00 chs. dist. to a corral.
8.30	Rye Creek, 150 lks. wide, with 4 ft. banks and a small flowing stream, course SE.
10.015	<p>Point for the SE-SE 1/64 sec. cor. of sec. 18, at intersection with the E. and W. centerline of the SE$\frac{1}{4}$SE$\frac{1}{4}$ of sec. 18.</p> <p>Set the iron post 18 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S18 SE-SE 1/64 1969</p> <p>Raise a mound of stone W. of the cor.</p>

Subdivision of Section 18, T. 9 N., R. 10 E.

CHAINS	
10.20	Unimproved road, bears SE. and NW.
13.00	Fence, bears E. and W., asc. steep S. slope.
16.60	Fence, bears S. 80° E. and N. 80° W.
16.90	Unimproved road, bears S. 80° E. and N. 80° W.
17.90	Television antenna, bears E., .01 lk. dist.
20.025	The C-E-SE 1/64 sec. cor. of sec. 18.

	From the point for the S-S 1/64 sec. cor. of secs. 17 and 18.
	S. 89°54' W., on the E. and W. centerline of the SE $\frac{1}{4}$ SE $\frac{1}{4}$ of sec. 18.
5.10	Fence, bears N. 15° E. and S. 15° W., 70 lks. dist., thence S. 50° E.
5.60	Bladed road, bears N. and S.
8.50	Fence, bears N. 25° E. and S. 25° W.
9.65	Unimproved road, bears S. 85° E. and N. 85° W.
10.055	The SE-SE 1/64 sec. cor. of sec. 18.
11.80	Unimproved road, bears NE. and SW., 20 lks. dist., thence W.
13.50	Unimproved road, bears S. 80° E. and NW.
14.80	Rye Creek, 150 lks. wide, with 4 ft. banks, and a small flowing stream, course S. 75° E.
18.90	Unimproved road, bears N. 60° E. and S. 60° W.
20.12	The C-S-SE 1/64 sec. cor. of sec. 18.
	Subdivision of Section 19, T. 9 N., R. 10 E., G&SRM, Arizona
	From the $\frac{1}{4}$ sec. cor. of secs. 19 and 30.
	N. 0°06' W., on the N. and S. centerline of sec. 19.
	Over gently rolling land, through widely scattered timber.
11.50	Wash, 10 lks. wide, 1 ft. deep, drains SE.
15.50	Fence, bears S. 75° E. and N. 75° W.
33.00	Wash, 20 lks. wide, 3 ft. deep, drains E.

Subdivision of Section 19, T. 9 N., R. 10 E.

CHAINS	
39.98	<p>Point for the C ¼ sec. cor. of sec. 19, at intersection with the E. and W. centerline of sec. 19.</p> <p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>S19</p> <p>+</p> <p>C ¼</p> <p>1969</p> </div>
40.90	<p>Unimproved road, bears S. 60° E. and N. 60° W.</p>
47.80	<p>Fence, bears E. and W.</p>
57.40	<p>Stream in Barnhart Canyon, 40 lks. wide, 8 ins. deep, course Easterly, thence asc. steep S. slope.</p>
59.99	<p>Point for the CN 1/16 sec. cor. of sec. 19.</p> <p>Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>C</p> <p>N 1/16 S19</p> <p>C</p> <p>1969</p> </div>
80.00	<p>The ¼ sec. cor. of secs. 18 and 19.</p> <p>Land, gently rolling and rolling. Soil, rocky loam. Timber, scattered juniper, mesquite and cottonwood. Undergrowth, scrub mesquite, catclaw, scrub oak, cacti and grama grass.</p>
	<p>From the ¼ sec. cor. of secs. 19 and 20.</p> <p>S. 89°51' W., on the E. and W. centerline of sec. 19.</p> <p>Over gently rolling land, through scattered mesquite and catclaw.</p>
20.08	<p>Point for the C-E 1/16 sec. cor. of sec. 19.</p> <p>Set the iron post 10 ins. in the ground, mound of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>E 1/16</p> <p>C ————— C</p> <p>S19</p> <p>1969</p> </div>

Subdivision of Section 19, T. 9 N., R. 10 E.

CHAINS	
25.70	Unimproved road, bears E. and W.
37.80	Unimproved road, bears irregularly E. and W.
40.16	The C $\frac{1}{4}$ sec. cor. of sec. 19.
56.50	Unimproved road, curves from E. to SW.
60.18	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 19.
	Set the iron post 18 ins. in the ground, brass cap mkd.
	T9N R10E W $\frac{1}{16}$ C ————— C S19 1969
	Raise a mound of stone N. of the cor.
79.09	The $\frac{1}{4}$ sec. cor. of sec's. 19 and 24, on the W. bdy. of the tp.
	Land, gently rolling. Soil, rocky loam. Timber, scattered juniper and mesquite. Undergrowth, catclaw, scrub mesquite, oak brush, cacti and grama grass.
Subdivision of the NE $\frac{1}{4}$ of Section 19	
	From the C-E $\frac{1}{16}$ sec. cor. of sec. 19.
	N. 0°02' W., on the N. and S. centerline of the NE $\frac{1}{4}$ of sec. 19.
	Over rolling land, through widely scattered timber and medium undergrowth.
3.90	Unimproved road, bears NE. and SW.
8.40	Same road, bears SE. and NW.
14.00	Same road, bears NE. and SW.
19.99	Point for the NE $\frac{1}{16}$ sec. cor. of sec. 19, at intersection with the E. and W. centerline of the NE $\frac{1}{4}$ of sec. 19.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	T9N R10E S19 NE $\frac{1}{16}$ 1969
	Raise a mound of stone W. of the cor.

Subdivision of Section 19, T. 9 N., R. 10 E.

CHAINS		
20.60	Fence, bears N. 40° E. and S. 40° W.	
31.05	Stream in Barnhardt Canyon, 40 lks. wide, 8 ins. deep, course easterly; enter medium timber and undergrowth, bears E. and W.	
40.00	Point for the E 1/16 sec. cor. of secs. 18 and 19.	
<hr/> From the N 1/16 sec. cor. of secs. 19 and 20.		
S. 89°50' W., on the E. and W. centerline of the NE¼ of sec. 19.		
Over gently rolling land, through widely scattered timber and undergrowth.		
10.05	Point for the C-E-NE 1/64 sec. cor. of sec. 19.	
Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.		
T9N R10E C-E-NE 1/64 S19 1969		
14.90	Unimproved road, bears NE. and SW.	
20.10	The NE 1/16 sec. cor. of sec. 19.	
20.70	Fence, bears N. 40° E. and S. 40° W.	
32.60	Stream in Barnhardt Canyon, 40 lks. wide, 8 ins. deep, course Easterly.	
40.21	The C-N 1/16 sec. cor. of sec. 19.	
<hr/> Subdivision of the NW¼ of Sec. 19		
<hr/> From the C-W 1/16 sec. cor. of sec. 19.		
N. 0°11' W., on the N. and S. centerline of the NW¼ of sec. 19.		
Over gently rolling land, through widely scattered timber and catclaw.		
5.50	Fence, bears N. 75° E. and S. 75° W.; desc. steep N. slope.	
11.60	Stream in Barnhardt Canyon, 40 lks. wide, 8 ins. deep, course Easterly; asc. steep S. slope.	
20.02	Point for the NW 1/16 sec. cor. of sec. 19 at intersection with the E. and W. centerline of the NW¼ of sec. 19.	

Subdivision of Section 19, T. 9 N., R. 10 E.

CHAINS	
	<p>Set the iron post 8 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S19 NW 1/16 1969</p>
22.00	S. edge of mesa, bears E. and W.
39.00	N. edge of mesa, bears SE. and NW.; desc. steep NE. slope.
40.05	The W 1/16 sec. cor. of secs. 18 and 19.
	<hr/> <p>From the CN 1/16 sec. cor. of sec. 19.</p> <p>S. 89°58' W., on the E. and W. centerline of the NW$\frac{1}{4}$ of sec. 19.</p> <p>Along a steep S. slope.</p>
10.02	Point for the C-E-NW 1/64 sec. cor. of sec. 19.
	<p>Set the iron post 12 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S19 C-E-NW 1/64 1969</p>
20.04	The NW 1/16 sec. cor. of sec. 19.
38.87	The N 1/16 sec. cor. of secs. 19 and 24, on the W. bdy. of the tp.
	<hr/> <p style="text-align: center;">Subdivision of Section 20, T. 9 N., R. 10 E., G&SRM, Arizona</p> <hr/>
	<p>From the $\frac{1}{2}$ sec. cor. of secs. 20 and 29.</p> <p>N. 0°02' E., on the N. and S. centerline of sec. 20.</p> <p>Over gently rolling land, through scattered scrub mesquite and catclaw.</p>
2.70	Telephone line, bears N. 25° E., 3.00 chs. dist., thence North, and bears S. 25° W., 1.00 chs. dist., thence South.
7.37	Fence, bears N. 80° W., and S. 80° E., 4 lks. dist., to a fence cor. with fences extending N. and N. 80° W.
10.04	Fence, bears W. and E., 6 lks. dist., to a fence cor. with fences extending NE., S. and W.

Subdivision of Section 20, T. 9 N., R. 10 E.

CHAINS	
13.10	Wash, in the bottom of Hog Canyon, 120 lks. wide, 1 ft. deep, drains W.
18.94	Fence cor., bears West, 2 lks. dist., with fences extending N. and W.
19.06	Fence, bears E. and W., enter Rye Creek Rodeo Corral area.
26.40	Fence cor. with fences extending SE., NW., and N., leave Rye Creek Corral area.
40.05	Point for the C $\frac{1}{4}$ sec. cor. of sec. 20, at intersection with the E. and W. centerline of sec. 20. Set the iron post 24 ins. in the ground, brass cap mkd.
	<p>T9N R10E C $\frac{1}{4}$</p>  <p>S20 1969</p>
	Raise a mound of stone W. of the cor.
40.30	Intersect fence cor., fences bear S. and W.
41.00	Fence, bears E. and W.
41.25	Telephone line, bears S. 20° E. and N. 20° W.
49.60	Fence, bears S. 35° E. and N. 35° W.
60.60	Right-of-way fence, bears N. 39° E. and S. 39° W.
66.75	Arizona Highway No. 87 (two lane North bound only), bears N. 39° E. and S. 39° W.
71.03	Right-of-way fence, parallels the highway.
77.50	Wash, 15 lks. wide, 1 ft. deep, drains S. 60° W.
80.10	The $\frac{1}{4}$ sec. cor. of secs. 17 and 20. Land, gently rolling. Soil, rocky and sandy loam. Timber, scattered mesquite. Undergrowth, scrub mesquite, catclaw, cacti and grama grass.
	From the $\frac{1}{4}$ sec. cor. of secs. 20 and 21. N. 89°38'30" W., on the E. and W. centerline of sec. 20. Over rolling land, through widely scattered timber.
12.30	Wash, in Hog Canyon, 130 lks. wide, 3 ft. deep, drains SW.

Subdivision of Section 20, T. 9 N., R. 10 E.

CHAINS	
20.50	Fence, bears N. 60° E. and S. 60° W.
35.66	Telephone line, bears N. 52° E. and S. 52° W.; fence bears S. 30° E. and N. 30° W.
39.62	Telephone line, bears S. 18° E. and N. 18° W.
39.96	Fence, bears S. 5° E. and N. 5° W., 30 lks. dist., to fence cor. with fences extending S. and W.
40.01	The C 1/4 sec. cor. of sec. 20.
42.10	Fence, bears S. 40° E. and N. 40° W.
45.90	Arizona Highway No. 87 (2 lane, north bound only), bears N. 4° E. and S. 4° W.
46.65	Arizona Highway No. 87 (2 lane, south bound only), bears S. 10° E. and N. 10° W.
48.00	Right-of-way fence, parallels the highway.
48.10	Fence cor. with fences extending S. 10° E. and N. 85° W.
53.60	Fence cor., bears N., 10 lks. dist., with fences extending S. and S. 85° E.
56.00	E. channel of Rye Creek, 300 lks. wide, 4 ft. banks, drains S.
58.41	Point selected for the witness C-W 1/16 sec. cor. of sec. 20.
	Set the iron post 20 ins. in the ground, collar of stone to top, brass cap mkd.
	<p style="text-align: center;">T9N R10E W 1/16</p> <p style="text-align: center;">C ←———— C W S20 C 1969</p>
	Raise a mound of stone N. of the cor.
	The cor. is located on a small man made island in the center of Rye Creek.
60.11	True point for the C-W 1/16 sec. cor. of sec. 20 falls in Rye Creek, in an insecure location.
61.30	West channel of Rye Creek, 250 lks. wide with 4 ft. banks and a small flowing stream, course S.
62.50	Asc. steep E. slope.
80.21	The 1/4 sec. cor. of secs. 19 and 20.
	<p>Land, rolling and gently rolling. Soil, rocky loam with sandy loam along Rye Creek. Timber, widely scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, oak brush, cacti and grama grass.</p>

Subdivision of Section 29, T. 9 N., R. 10 E.

CHAINS	Subdivision of Section 29, T. 9 N., R. 10 E., G&SRM, Ariz.
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.</p> <p>N. $0^{\circ}08'$ E., on the N. and S. centerline of sec. 29.</p> <p>Over gently rolling land, through dense undergrowth.</p>
12.00	Fence, bears S. 30° E. and N. 30° W.
16.80	Old Globe to Payson road, bears S. 10° E. and N. 10° W.
20.06	Point for the C-S $\frac{1}{16}$ sec. cor. of sec. 29.
	<p>Set the iron post 24 ins. in the ground, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>C</p> <p>S $\frac{1}{16}$ S29</p> <p>C</p> <p>1969</p> </div> <p>Raise a mound of stone W. of the cor.</p> <p>The cor. is located 44 lks. East of the old Globe to Payson road, bearing S. 10° E. and N. 10° W.</p> <p>Enter rolling land, bears S. 10° E. and N. 10° W.</p>
27.70	Telephone line, bears S. 10° E. and N. 10° W.
39.90	Track road, bears N. 50° E. and S. 18° W.
40.12	Point for the C $\frac{1}{4}$ sec. cor. of sec. 29, at intersection with the E. and W. centerline of sec. 29.
	<p>Set the iron post 24 ins. in the ground, in a small collar of stone to top, brass cap mkd.</p> <div style="text-align: center;"> <p>T9N R10E</p> <p>S29</p> <p>+</p> <p>C $\frac{1}{4}$</p> <p>1969</p> </div> <p>Raise a mound of stone W. of the cor.</p>
42.40	Wash, 60 lks. wide, 2 ft. deep, drains SW.
54.90	Wash, 25 lks. wide, 1 ft. deep, drains SW.
57.20	Wash, 45 lks. wide, 1 ft. deep, drains SW.
80.08	The $\frac{1}{4}$ sec. cor. of secs. 20 and 29.

Subdivision of Section 29, T. 9 N., R. 10 E.

CHAINS	
	<p>Land, gently rolling and rolling. Soil, loam and sandy loam. Timber, widely scattered mesquite. Undergrowth, dense scrub mesquite, catclaw, cacti and grama grass.</p>
	<p>From the $\frac{1}{4}$ sec. cor. of secs. 28 and 29. N. $89^{\circ}54'$ W., on the E. and W. centerline of sec. 29. Over rolling land, through widely scattered timber.</p>
39.80	Track road, bears N. 50° E. and S. 50° W.
40.06	The C $\frac{1}{4}$ sec. cor. of sec. 29.
42.05	Telephone line, bears S. 5° E. and N. 5° W.; old Globe-Payson road, bears S. 5° E. and N. 15° W.
42.10	Wash, 40 lks. wide, 1 ft. deep, drains SW.; thence through dense undergrowth.
45.00	Right-of-way fence, bears North and South.
45.75	Arizona Highway No. 87, bears North and South.
46.50	Right-of-way fence, bears North and South.
52.30	Intersection of two bladed roads, one bears N. 50° E. and S. 50° W. and the other bears N. 10° E. and S. 10° W.
60.12	Point for the C-W $\frac{1}{16}$ sec. cor. of sec. 29. Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd. <div style="text-align: center;"> <p>T9N R10E W 1/16 C ——— C S29 1969</p> </div>
61.20	Rye Creek, 150 lks. wide, with 5 ft. banks and a small stream, course S.; asc. steep E. slope.
63.90	Fence, bears S. 20° E. and N. 20° W.
70.15	Point for the C-W-W $\frac{1}{64}$ sec. cor. of sec. 29; not monumented.
79.60	Wash, 25 lks. wide, 2 ft. deep, drains SW.
80.18	<p>The $\frac{1}{4}$ sec. cor. of secs. 29 and 30. Land, gently rolling and rolling. Soil, rocky loam with sandy loam along Rye Creek. Timber, widely scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, scrub oak, cacti and grama grass.</p>

Subdivision of Section 29, T. 9 N., R. 10 E.

CHAINS		
	<p>Subdivision of the SW$\frac{1}{4}$ of Section 29</p> <hr/>	
	<p>From the W 1/16 sec. cor. of secs. 29 and 32.</p>	
	<p>N. 0°07' E., on the N. and S. centerline of the SW$\frac{1}{4}$ of sec. 29.</p>	
	<p>Over gently rolling land, through widely scattered timber.</p>	
3.20	<p>Fence, bears S. 12° E. and N. 12° W.</p>	
5.30	<p>Desc. steep NE. slope.</p>	
10.035	<p>Point for the C-S-SW 1/64 sec. cor. of sec. 29.</p>	
	<p>Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.</p>	
	<p>T9N R10E S29 C-S-SW 1/64 1969</p>	
	<p>The cor. is located on a steep NE. slope.</p>	
12.00	<p>Base of steep slope, enter Rye Creek, bears S. 5° E. and N. 5° W.</p>	
20.07	<p>Point for the SW 1/16 sec. cor. of sec. 29, at intersection with the E. and W. centerline of the SW$\frac{1}{4}$ of sec. 29 falls in the center of Rye Creek; not monumented.</p>	
24.00	<p>East bank of Rye Creek, bears S. 5° E. and N. 5° W.</p>	
30.105	<p>Point for the C-N-SW 1/64 sec. cor. of sec. 29.</p>	
	<p>Set the iron post 18 ins. in the ground, brass cap mkd.</p>	
	<p>T9N R10E S29 C-N-SW 1/64 1969</p>	
	<p>Raise a mound of stone W. of the cor.</p>	
	<p>The cor. is located on an earthen dike bearing N. and S.</p>	
40.14	<p>The C-W 1/16 sec. cor. of sec. 29.</p>	
	<hr/>	
	<p>From the C-S 1/16 sec. cor. of sec. 29.</p>	
	<p>N. 89°54' W., on the E. and W. centerline of the SW$\frac{1}{4}$ of sec. 29.</p>	
	<p>Over gently rolling land, through dense undergrowth.</p>	

Subdivision of Section 29, T. 9 N., R. 10 E.

CHAINS

- 0.44 Old Globe to Payson road, bears S. 10° E. and N. 10° W.
- 7.20 Right-of-way fence, bears N. 12° E. and S. 12° W.
- 8.00 Arizona Highway No. 87, bears N. 12° E. and S. 12° W.
- 8.80 Right-of-way fence, bears N. 12° E. and S. 12° W.
- 12.10 Enter State Highway, gravel pit and storage area, bears N. and S.
- 19.00 Leave gravel pit, bears N. and S.
- 20.06 Point for the SW 1/16 sec. cor. of sec. 29.
- 20.70 Asc. steep E. slope, enter rolling land, bears N. and S.
- 21.00 Spur, slopes S., enter scattered timber.
- 23.30 Wash, 30 lks. wide, 1 ft. deep, drains SE.; asc. steep NE. slope.
- 25.08 Point for the C-E-W-SW 1/256 sec. cor. of sec. 29.
- Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.
- T9N R10E
S29
C-E-W-SW
1/256
1969
- 26.06 Fence, bears S. 12° E. and N. 12° W.
- 30.10 Point for the C-W-SW 1/64 sec. cor. of sec. 29; not monumented.
- 40.14 The S 1/16 sec. cor. of secs. 29 and 30.

Subdivision of the NW $\frac{1}{4}$ SW $\frac{1}{4}$ of Sec. 29

From point for the C-W-SW 1/64 sec. cor. of sec. 29.

N. 0°07' E., on the N. and S. centerline of the NW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 29.

- 3.80 Wash, 20 lks. wide, 2 ft. deep, drains E.
- 10.03 Point for the NW-SW 1/64 sec. cor. of sec. 29, at intersection with the E. and W. centerline of the NW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 29; not monumented.
- 20.06 Point for the C-W-W 1/64 sec. cor. of sec. 29.
-

Subdivision of Section 29, T. 9 N., R. 10 E.

CHAINS	
	From the C-N-SW 1/64 sec. cor. of sec. 29.
	N. 89°54'30" W., on the E. and W. centerline of the NW¼ SW¼ of sec. 29.
1.40	Rye Creek, 150 lks. wide, with 5 ft. banks and a small flowing stream, course S.
3.50	Asc. steep E. slope, enter scattered timber, bears N. and S.
4.40	Fence, bears N. 12° E. and S. 12° W.
5.02	Point for the C-E-NW-SW 1/256 sec. cor. of sec. 29.
	Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.
	T9N R10E S29 C-E-NW-SW 1/256 1969
10.04	Point for the NW-SW 1/64 sec. cor. of sec. 29.
17.70	Wash, 25 lks. wide, 2 ft. deep, drains S.
20.07	Point for the N-S 1/64 sec. cor. of sec. 29.
Subdivision of the SW¼SW¼ of Sec. 29	
	From point for the W-W 1/64 sec. cor. of secs. 29 and 32.
	N. 0°06' E., on the N. and S. centerline of the SW¼SW¼ of sec. 29.
10.04	Point for the SW-SW 1/64 sec. cor. of sec. 29, at intersection with the E. and W. centerline of the SW¼SW¼ of sec. 29; not monumented.
20.08	Point for the C-W-SW 1/64 sec. cor. of sec. 29.
	From the C-S-SW 1/64 sec. cor. of sec. 29.
	N. 89°57' W., on the E. and W. centerline of the SW¼SW¼ of sec. 29.
2.06	Fence, bears S. 10° E. and N. 10° W.
5.015	Point for the C-E-SW-SW 1/256 sec. cor. of sec. 29.
	Set the iron post 18 ins. in the ground, collar of stone to top, brass cap mkd.

Subdivision of Section 29, T. 9 N., R. 10 E.

CHAINS	
	T9N R10E S29 C-E-SW-SW 1/256 1969
10.03	Point for the SW-SW 1/64 sec. cor. of sec. 29.
20.06	Point for the S-S 1/64 sec. cor. of secs. 29 and 30.
<hr/> Subdivision of Section 32, T. 9 N., R. 10 E., G&SRM, Ariz. <hr/>	
	From the true point for the standard 1/4 sec. cor. of sec. 32 on the S. bdy. of the tp. N. 0°07' W., on the N. and S. centerline of sec. 32. Over rolling land, through widely scattered timber.
2.90	Clover Wash, 50 lks. wide with 5 ft. banks, drains E.
9.20	Spur, slopes N. 70° E.
11.80	Fence, bears S. 12° E. and N. 12° W.
20.00	Point for the C-S 1/16 sec. cor. of sec. 32. Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	T9N R10E C S 1/16 S32 C 1969
30.00	Point for the C-N-S 1/64 sec. cor. of sec. 32; not monumented.
35.00	Point for the C-N-N-S 1/256 sec. cor. of sec. 32. Set the iron post 14 ins. in the ground, mound of stone to top, brass cap mkd.
	T9N R10E C-N-N-S 1/256 S32 1969
40.00	Point for the C 1/4 sec. cor. of sec. 32, at intersection with the E. and W. centerline of sec. 32; not monumented.
40.40	Wash, 20 lks. wide, 1 ft. deep, drains E.

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
59.40	Rye Creek, 150 lks. wide, with 6 ft. banks and a small flowing stream, course S. 40° E.
59.98	Point for the CN 1/16 sec. cor. of sec. 32; not monumented.
67.80	Fence, bears S. 40° E. and N. 40° W.
69.97	Point for the C-N-N 1/64 sec. cor. of sec. 32; not monumented.
79.96	<p>The ¼ sec. cor. of secs. 29 and 32.</p> <p>Land, gently rolling and rolling. Soil, rocky loam. Timber, widely scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, oak brush, cacti and grama grass.</p>
	<p>From the ¼ sec. cor. of secs. 32 and 33.</p>
	<p>S. 89°59'30" W., on the E. and W. centerline of sec. 32.</p>
	<p>Over rolling land, through widely scattered timber.</p>
	<p>Desc. steep W. slope.</p>
2.70	<p>Draw, drains SW.</p>
8.25	<p>Telephone line, bears S. 37° E. and N. 37° W.</p>
9.50	<p>Old Globe-Payson road, bears S. 37° E. and N. 37° W., bottom of desc.; thence over bottom land.</p>
10.60	<p>Fence, bears S. 25° E. and N. 25° W.</p>
19.92	<p>Point selected for the witness C-E 1/16 sec. cor. of sec. 32.</p> <p>Set the iron post 21 ins. in the ground, brass cap mkd.</p>
	<p style="text-align: center;">T9N R10E E 1/16 C ←———— C W S32 C 1969</p>
	<p>Raise a mound of stone N. of the cor.</p>
20.02	<p>True point for the C-E 1/16 sec. cor. of sec. 32 falls in an insecure point in Rye Creek.</p>
20.50	<p>Dry channel of Rye Creek, 80 lks. wide, with 4 ft. banks, drains SE.</p>
24.90	<p>Rye Creek, 160 lks. wide with 4 ft. banks and a small flowing stream, course S. 30° E.</p>
30.03	<p>Point for the C-W-E 1/64 sec. cor. of sec. 32.</p>

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
	<p>Set the iron post 22 ins. in the ground, small collar of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S32 C-W-E 1/64 1969</p> <p>from which</p> <p style="padding-left: 40px;">A local corner monumented by a rebar $\frac{3}{4}$ ins. diam., bears E., 10.5 lks. dist.</p>
40.04	Point for the C $\frac{1}{4}$ sec. cor. of sec. 32.
48.00	Fence, bears S. 15° E. and N. 15° W.
50.09	Point for the C-E-W 1/64 sec. cor. of sec. 32.
	<p>Set the iron post 6 ins. in the ground, mound of stone to top, brass cap mkd.</p> <p style="text-align: center;">T9N R10E S32 C-E-W 1/64 1969</p> <p>The corner is located on a steep N. slope of a wash.</p>
59.17	Right-of-way fence, bears N. 12° E. and S. 12° W.
60.14	Point for the C-W 1/16 sec. cor. of sec. 32.
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p> <p style="text-align: center;">T9N R10E W 1/16 C ————— C S32 1969</p>
60.70	Arizona Highway No. 87, bears N. 12° E. and S. 12° W.
62.30	Right-of-way fence, bears N. 12° E. and S. 12° W.
66.60	Diversion dike, bears N. 20° E. and S. 20° W.
80.24	The $\frac{1}{4}$ sec. cor. of secs. 31 and 32.
	<p>Land, rolling. Soil, rocky loam. Timber, widely scattered juniper and mesquite. Undergrowth, scrub mesquite, catclaw, cacti and grama grass.</p>

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS		
	<p>Subdivision of the NW$\frac{1}{4}$ of Section 32</p> <hr/>	
	<p>From the C-W 1/16 sec. cor. of sec. 32.</p>	
	<p>N. 0°03' W., on the N. and S. centerline of the NW$\frac{1}{4}$ of sec. 32.</p>	
	<p>Over rolling land, through widely scattered timber.</p>	
2.40	<p>Arizona Highway No. 87, bears N. 12° E. and S. 12° W.</p>	
10.00	<p>Right-of-way fence, bears N. 12° E. and S. 12° W.</p>	
19.99	<p>Point for the NW 1/16 sec. cor. of sec. 32, at intersection with the E. and W. centerline of the NW$\frac{1}{4}$ of sec. 32.</p>	
	<p>Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.</p>	
	<p>T9N R10E S32 NW 1/16 1969</p>	
	<p>from which</p>	
	<p>A windmill, alongside a corral, bears S. 47° 06' E., 5.43 chs. dist.</p>	
20.34	<p>Boone Moore Wash, 40 lks. wide, 3 ft. deep, drains E.</p>	
29.99	<p>Point for the C-N-NW 1/64 sec. cor. of sec. 32.</p>	
	<p>Set the iron post 22 ins. in the ground, brass cap mkd.</p>	
	<p>T9N R10E S32 C-N-NW 1/64 1969</p>	
	<p>from which</p>	
	<p>A local cor. monumented by a rebar $\frac{3}{4}$ ins. diam., bears E., 4 lks. dist.</p>	
	<p>Raise a mound of stone W. of the cor.</p>	
39.99	<p>The W 1/16 sec. cor. of secs. 29 and 32.</p>	
	<hr/>	
	<p>From the point for the CN 1/16 sec. cor. of sec. 32.</p>	
	<p>N. 89°58' W., on the E. and W. centerline of the NW$\frac{1}{4}$ of sec. 32.</p>	
	<p>Over dry wash area of Rye Creek.</p>	

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS

- 2.70 Leave wash area, enter gently rolling land.
- 7.20 Boone Moore Wash, 70 lks. wide, 3 ft. deep, drains irregularly E., enter widely scattered timber.
- 10.045 Point for the C-E-NW 1/64 sec. cor. of sec. 32.
Set the iron post 22 ins. in the ground, brass cap mkd.
- T9N R10E
S32
C-E-NW
1/64
1969
- The cor. is located 1 link E. of a 4 in. diam. mesquite stump.
- 14.90 Right-of-way fence, bears N. 12° E. and S. 12° W.
- 16.48 Arizona Highway No. 87, bears N. 12° E.
- 17.50 Right-of-way fence, bears N. 12° E. and S. 12° W.
- 19.10 Boone Moore Wash, 40 lks. wide, 1 ft. deep, drains E.
- 20.09 The NW 1/16 sec. cor. of sec. 32.
- 20.50 Boone Moore Wash, 40 lks. wide, 1 ft. deep, drains E.
- 34.60 Boone Moore Wash, 80 lks. wide, 6 ins. deep, drains E.; asc. steep NE. slope.
- 40.16 The N 1/16 sec. cor. of secs. 31 and 32.

Subdivision of the NE $\frac{1}{4}$ NW $\frac{1}{4}$ of Section 32

From the C-E-NW 1/64 sec. cor. of sec. 32.

N. 0°06' W., on the N. and S. centerline of the NE $\frac{1}{4}$ NW $\frac{1}{4}$ of sec. 32.

- 1.20 Track road, bears N. 55° E. and S. 55° W.
- 5.00 Enter dry wash area, bears S. 40° E. and N. 40° W.
- 9.98 Point for the NE-NW 1/64 sec. cor. of sec. 32, at intersection with the E. and W. centerline of the NE $\frac{1}{4}$ NW $\frac{1}{4}$ of sec. 32.

Set the iron post 10 ins. in the ground, large mound of stone to top, brass cap mkd.

T9N R10E
S32
NE-NW
1/64
1969

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
	<p>The corner is located on a ridge between a dry wash and the main channel of Rye Creek.</p>
18.30	Main channel of Rye Creek, 3.00 chs. wide with 5 ft. banks and small flowing stream, course SE.
19.30	Fence, bears SE. and NW.
19.98	Point for the E-W 1/64 sec. cor. of secs. 29 and 32.
	<hr/> <p>From the point for the C-N-N 1/64 sec. cor. of sec. 32.</p> <p>N. 89°58' W., on the E. and W. centerline of the NE$\frac{1}{4}$NW$\frac{1}{4}$ of sec. 32.</p>
2.00	Fence, bears SE. and NW.
7.40	Rye Creek, 3.00 chs. wide with 5 ft. banks, and small flowing stream, course SE.
10.035	The NE-NW 1/64 sec. cor. of sec. 32.
12.70	Right-of-way fence, bears N. 12° E. and S. 12° W.
14.32	Arizona Highway No. 87, bears N. 12° E. and S. 12° W., asc. steep E. slope.
15.90	Right-of-way fence, bears N. 12° E. and S. 12° W.
20.065	The C-N-NW 1/64 sec. cor. of sec. 32.
	<hr/> <p>Subdivision of the SW$\frac{1}{4}$ of Section 32</p> <hr/> <p>From the true point for the standard W 1/16 sec. cor. of sec. 32 on the S. bdy. of the tp.</p> <p>N. 0°05' W., on the N. and S. centerline of the SW$\frac{1}{4}$ of sec. 32.</p>
1.30	Clover Wash, 80 lks. wide, 2 ft. deep, drains E.
20.02	Point for the SW 1/16 sec. cor. of sec. 32, at intersection with the E. and W. centerline of the SW $\frac{1}{4}$ of sec. 32.
	Set the iron post 22 ins. in the ground, brass cap mkd.
	<p style="text-align: center;">T9N R10E S32 SW 1/16 1969</p>
	Raise a mound of stone W. of the cor.
30.03	Point for the C-N-SW 1/64 sec. cor. of sec. 32; not monumented.

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
34.80	Right-of-way fence, bears N. 12° E. and S. 12° W.
40.04	The C-W 1/16 sec. cor. of sec. 32.
<hr/> From the C-S 1/16 sec. cor. of sec. 32.	
S. 89°58'30" W., on the E. and W. centerline of the SW $\frac{1}{4}$ of sec. 32.	
2.30	Fence, bears S. 12° E. and N. 12° W.
10.055	Point for the C-E-SW 1/64 sec. cor. of sec. 32; not monumented.
20.11	The SW 1/16 sec. cor. of sec. 32.
23.30	Right-of-way fence, bears N. 12° E. and S. 12° W.
24.93	Arizona Highway No. 87, bears N. 12° E. and S. 12° W.
26.40	Right-of-way fence, bears N. 12° E. and S. 12° W.
27.90	Track road, bears S. 70° E. and N. 70° W.
40.23	The S 1/16 sec. cor. of secs. 31 and 32.
<hr/> Subdivision of the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of Section 32	
<hr/> From the point for the C-E-SW 1/64 sec. cor. of sec. 32.	
N. 0°07' W., on the N. and S. centerline of the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 32.	
10.00	Point for the NE-SW 1/64 sec. cor. of sec. 32, at intersection with the E. and W. centerline of the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 32; not monumented.
15.00	Point for the C-N-NE-SW 1/256 sec. cor. of sec. 32.
Set the iron post 22 ins. in the ground, brass cap mkd.	
T9N R10E S32 C-N-NE-SW 1/256 1969	
Raise a mound of stone W. of the cor.	
20.00	The C-E-W 1/64 sec. cor. of sec. 32.
<hr/> From the point for the C-N-S 1/64 sec. cor. of sec. 32.	

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
	West, on the E. and W. centerline of the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 32.
	Over gently rolling land, through moderate undergrowth.
5.10	Fence, bears S. 12° E. and N. 12° W.
10.055	The point for the NE-SW 1/64 sec. cor. of sec. 32.
20.105	The point for the C-N-SW 1/64 sec. cor. of sec. 32.
	Subdivision of the SE $\frac{1}{4}$ of Section 32
	From the standard E 1/16 sec. cor. of sec. 32, on the S. bdy. of the tp.
	N. 0°03' W., on the N. and S. centerline of the SE $\frac{1}{4}$ of sec. 32.
	Over rolling land, through moderate undergrowth.
4.40	Track road, bears N. 55° E. and S. 55° W.
10.72	Telephone line, bears N. 31°20' E. and S. 31°20' W.
10.80	Desc. 45 ft. over sheer cliff.
11.10	Clover Wash, 40 lks. wide, with 5 ft. banks, drains E.
20.00	Point for the SE 1/16 sec. cor. of sec. 32, at intersection with the E. and W. centerline of the SE $\frac{1}{4}$ of sec. 32.
	Set the iron post 16 ins. in the ground, mound of stone to top, brass cap mkd.
	T9N R10E S32 SE 1/16 1969
21.00	Rye Creek, dry wash, 150 lks. wide with 4 ft. banks, drains E.
30.00	Point for the C-N-SE 1/64 sec. cor. of sec. 32; not monumented.
34.80	Rye Creek, 200 lks. wide with 4 ft. banks and a small flowing stream, course SE.
40.00	True point for the C-E 1/16 sec. cor. of sec. 32.
	From the true point for the S 1/16 sec. cor. of secs. 32 and 33.
	S. 89°57' W., on the E. and W. centerline of the SE $\frac{1}{4}$ of sec. 32.

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
	Over nearly level land, through scattered timber along Rye Creek.
1.50	Enter Rye Creek dry wash area, bears SE. and NW.; thence along N. edge of wash.
5.70	Left bank of Rye Creek dry wash, bears SE. and NW.
13.00	Telephone line, bears N. 31°20' E. and S. 31°20' W.
16.00	Center of Rye Creek dry wash, drains SE.
18.00	Right bank of Rye Creek dry wash, bears SE. and NW.
20.01	The SE 1/16 sec. cor. of sec. 32.
30.01	Point for the C-W-SE 1/64 sec. cor. of sec. 32; not monumented.
40.01	The C-S 1/16 sec. cor. of sec. 32.
<p>Subdivision of the NW½SE½ of Section 32</p> <hr/>	
	From the point for the C-W-SE 1/64 sec. cor. of sec. 32. N. 0°06' W., on the N. and S. centerline of the NW½SE½ of sec. 32.
	Over gently rolling land, through dense undergrowth.
10.00	Point for the NW-SE 1/64 sec. cor. of sec. 32; at intersection with the E. and W. centerline of the NW½SE½ of sec. 32; not monumented.
15.00	Point for the C-N-NW-SE 1/256 sec. cor. of sec. 32. Set the iron post 22 ins. in the ground, collar of stone to top, brass cap mkd.
	<p>T9N R10E S32 C-N-NW-SE 1/256 1969</p>
20.00	The C-W-E 1/64 sec. cor. of sec. 32.
<hr/>	
	From the point for the C-N-SE 1/64 sec. cor. of sec. 32. S. 89°57'30" W., on the E. and W. centerline of the NW½SE½ of sec. 32.
	Over gently rolling land along Rye Creek.
4.00	Wash, 20 lks. wide, 1 ft. deep, drains S.
6.40	Dry channel of Rye Creek, 150 lks. wide, with 4 ft. banks, drains SE.

Subdivision of Section 32, T. 9 N., R. 10 E.

CHAINS	
10.005	The point for the NW-SE 1/64 sec. cor. of sec. 32.
20.01	The point for the C-N-S 1/64 sec. cor. of sec. 32.
<p data-bbox="716 540 1024 572"><u>General Description</u></p> <p data-bbox="464 599 1365 827">The portion of Township 9 North, Range 10 East, included in this survey, lies in the western portion of Gila County, approximately 10 miles south of Payson, Arizona. Private ranch dwellings, Rye store and a trailer house are located on the private land. Livestock grazing is the principal use of this land. A gravel pit is located in section 29.</p> <p data-bbox="464 854 1382 1311">The land is rolling hills with flat ridge tops and nearly level land along Rye Creek. The elevation varies from approximately 3,000 feet above sea level in the valley to 3,500 feet above sea level at the highest point. The timber consists of widely scattered juniper, mesquite and cottonwood. The undergrowth varies from dense cat-claw and scrub mesquite in the lower areas to scrub oak and cacti in the higher areas. The soil is rocky loam on the hills and sandy loam and gravel in the valley. Rye Creek and a stream in Barnhardt Canyon have small flowing streams and are the major drainage draining southeasterly. There are several privately developed water supplies within the area and two windmills located in section 32.</p> <p data-bbox="464 1338 1341 1473">Arizona Highway No. 87 enters in section 17 and leaves in section 32. There are several improved, unimproved and track roads leading off of the major highway and extending through most of the area.</p> <p data-bbox="464 1499 1373 1540">There was no mining activity noted in the area surveyed.</p>	

