

Form 9180-6
(April 1974)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY OF THE TOWNSHIP

(BETWEEN SECTIONS 3 AND 34)

AND

A PORTION OF THE SUBDIVISIONAL LINES

THE SURVEY OF A PORTION OF THE SUBDIVISION LINES WITHIN SECTION 3

AND

THE METES-AND-BOUNDS SURVEY OF

PARCEL NO. 1 WITHIN SECTION 3

TOWNSHIP 5 SOUTH, RANGE 9 EAST

Of the GILA AND SALT RIVER Meridian,

In the State of ARIZONA

EXECUTED BY

GILBERT V. OLSON

CADASTRAL SURVEYOR

Under special instructions dated MARCH 26, 19 75, approved APRIL 1, 1975,

_____, which provided for the surveys included under U.S. Survey/Group
Number 572, and assignment instructions dated MARCH 26, 19 75.

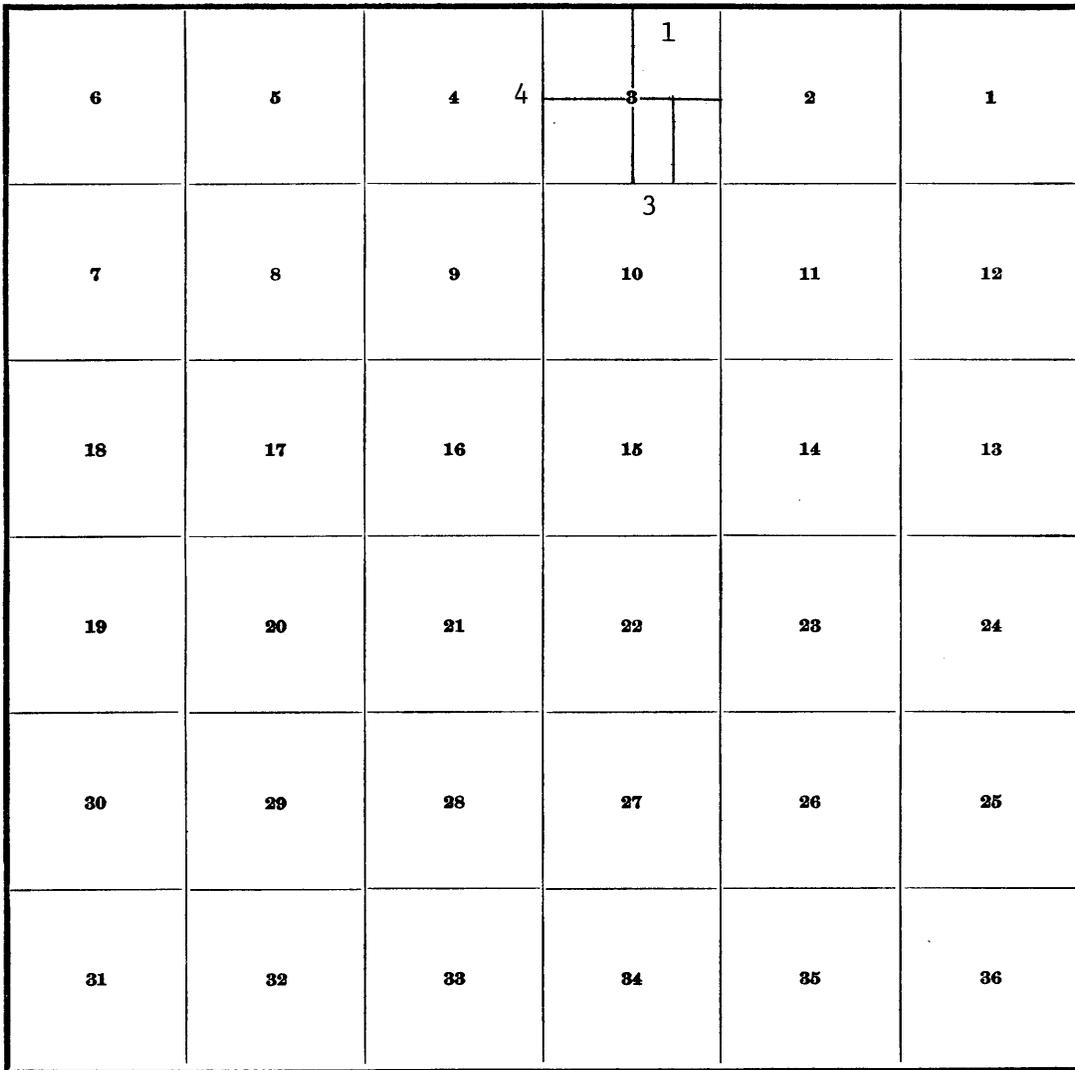
Survey commenced APRIL 1, 19 75

Survey completed APRIL 4, 19 75

BOOK 5026

INDEX DIAGRAM

Township 5 South, Range 9 East



Survey of the subdivision within section 3 pp. 5

Survey of Parcel No. 1 within section 3 pp. 7

Township 5 South, Range 9 East
Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the north boundary of the township (between sections 3 and 34); a portion of the subdivisional lines; the survey of a portion of the subdivision lines within section 3, and the metes-and-bounds survey of Parcel No. 1 within section 3, Township 5 South, Range 9 East, of the Gila and Salt River Meridian, Arizona.

History of Previous Surveys: The exterior boundaries of the township were dependently resurveyed by Dupree R. Averill, U. S. Surveyor, in February 1928. The subdivisional lines were dependently resurveyed by Roger F. Wilson and Otis O. Gould, U. S. Transitemen, in February 1928, as shown upon the official plat approved July 15, 1929, and was accepted September 7, 1929.

This dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973 Edition, and Special Instructions dated March 26, 1975.

The rules of proportionate measurement were applied to ascertain the position of lost corners, but not until every reasonable possibility of finding direct evidence for the control of each particular corner had been exhausted.

The directions of all lines of this dependent resurvey and survey were determined from U. S. Coast and Geodetic Survey Triangulation Station "Dadams" (hereinafter described) horizontal control data, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position of the corner of sections 2, 3, 10, and 11, as: Latitude $33^{\circ} 01' 02''$ N., and Longitude $111^{\circ} 24' 17''$ W. The mean magnetic declination is: 14° East.

Dependent Resurvey of a Portion
of the North Boundary
Township 5 South, Range 9 East
Gila and Salt River Meridian, Arizona

Reestablishment of the Survey Executed by
Dupree R. Averill, U. S. Surveyor,
in February 1928

Beginning at the corner of secs. 2, 3, 34, and 35 on the north boundary of the township, which is monumented with an iron post, 3 ins. in diam., with a regulation (G.L.O.) brass cap flush with the surface of the road, mkd.

Dependent Resurvey of a Portion
of the North Boundary
Township 5 South, Range 9 East
Gila and Salt River Meridian, Arizona

CHAINS		
	<p style="text-align: center;">T4S R9E S 34 S 35 S 3 S 2 T5S</p> <p style="text-align: center;">1975 1928</p> <p>The date of 1975 is added to the above brass cap.</p> <p>from which</p> <p style="padding-left: 40px;">An electric transmission line pole, bears S. 52° 30' E., 99 lks. (65.34 ft.) distant.</p> <p style="padding-left: 40px;">An electric transmission line pole, bears S. 48° 00' W., 62.7 lks. (41.38 ft.) distant.</p> <p>This corner is located at the intersection of roads, bearing north, south, and east.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 89° 47' W., between Tps. 4 and 5 S., through R. 9 E., and between secs. 3 and 34</p> <p>Over nearly level land.</p>	
39.68	<p>The point for the 1/4 sec. cor. of secs. 3 and 34 is determined at proportionate distance; there is no evidence of the original corner. The adjacent landowner refused permission to remonument this corner point or to establish a witness corner thereto.</p>	
79.36	<p>The corner of secs. 3, 4, 33, and 34 is monumented with an iron post, 3 ins. in diam., firmly set, projecting 8 ins. above the surface of the ground, with a regulation (G.L. O.) brass cap mkd.</p> <p style="text-align: center;">T4S R9E S 33 S 34 S 4 S 3 T5S</p> <p style="text-align: center;">1975 1928</p> <p>The date of 1975 is added to the above brass cap.</p> <p>Discontinue the dependent resurvey of the township line at this corner.</p>	
	<p>Dependent Resurvey of a Portion of the Subdivisional Lines Township 5 South, Range 9 East Gila and Salt River Meridian, Arizona</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 5 South, Range 9 East
Gila and Salt River Meridian, Arizona

CHAINS

Reestablishment of the Survey Executed by
Roger F. Wilson and Otis O. Gould,
U. S. Transitmen, in February 1928

The corner of secs. 2, 3, 10, and 11 is monumented with
an iron post, 2 ins. in diam. with a regulation (G.L.O.)
brass cap flush with the surface of the road, mkd.

$$\begin{array}{r} \text{T5S R9E} \\ \text{S } 3 | \text{S } 2 \\ \hline \text{S } 10 | \text{S } 11 \end{array}$$

1928

From this corner, the U. S. Coast and Geodetic Survey
Triangulation Station "Dadams" bears N. 86° 56' E., 35.98
chs. distant, and is marked with a concrete post, 10 ins.
square, firmly set, projecting 3 ins. above the surface
of the ground, with a regulation brass tablet seated on
the top, mkd. DADAMS 1938.

This same corner is located in a road that bears south,
(approximately 10.50 chs. distant) to Arizona State
Highway No. 287 and northwest for a short distance, and
in an east and west fence line.

S. 88° 55' W., between secs. 3 and 10

Over nearly level land, along a chain link fence, 8 ft.
high.

13.38 The point for Angle Point No. 10, Parcel No. 1, within
Section 3, hereinafter described.

20.07 The point for the east 1/16 sec. cor. of secs. 3 and 10

Set an iron post, 28 ins. long, 2½ ins. in diam., with
brass cap flush with the surface of the ground, mkd.

$$\begin{array}{r} \text{T5S R9E} \\ \text{E } 1/16 \quad \text{S } 3 \\ \hline \text{S } 10 \end{array}$$

1975

This corner is designated to function for Angle Point No.
9, Parcel No. 1, within Section 3.

20.20 From this point on line the chain link fence corners and
bears south.

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 5 South, Range 9 East
Gila and Salt River Meridian, Arizona

CHAINS		
40.14	<p>The 1/4 sec. cor. of secs. 3 and 10 is monumented with an iron post, 1 inch in diam., firmly set, projecting 2 ins. above the surface of the ground, with a regulation (G.L.O.) brass cap mkd.</p> <p style="text-align: center;">1/4 $\frac{S\ 3}{S\ 10}$</p> <p style="text-align: center;">1928</p> <p>I amended the marking on the above brass cap, as:</p> <p style="text-align: center;">T5S R9E 1/4 $\frac{S\ 3}{S\ 10}$</p> <p style="text-align: center;">1975 1928</p> <p>Discontinue the dependent resurvey of the fifth latitudinal line at this corner.</p>	
5.00	<p>The corner of secs. 3, 4, 9, and 10 is monumented with a regulation (G.L.O.) iron post, 2 ins. in diam., firmly set, projecting 6 ins. above the surface of the ground. The marking on this brass cap had been destroyed.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T5S R9E $\frac{S\ 4\ \ S\ 3}{S\ 9\ \ S\ 10}$</p> <p style="text-align: center;">1975</p> <p>Deposit the iron post monument and broken glass alongside the iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 11' W., between secs. 3 and 4</p> <p>Descend over broken northwest slope, through mesquite trees and cacti.</p> <p>Adamsville Road, bears S. 80° 00' W., to Adamsville Historic Site and N. 75° 00' E., to Florence, Arizona. This road is located at the base of the above descent; thence, over nearly level land, along a roadway.</p>	

Dependent Resurvey of a Portion
of the Subdivisional Lines
Township 5 South, Range 9 East
Gila and Salt River Meridian, Arizona

CHAINS	
39.97	The point for the 1/4 sec. cor. of secs. 3 and 4 is determined at proportionate distance; there is no evidence of the original corner. The adjacent landowner refused permission to remonument this corner point or to establish a witness corner thereto.
66.00	Leave nearly level land, descend over northwest slope.
80.78	The corner of secs. 3, 4, 33, and 34 on the north boundary of the township.
	Discontinue the dependent resurvey of the township at this corner.
<p>Survey of a Portion of the Subdivision Lines Within Section 3 Township 5 South, Range 9 East Gila and Salt River Meridian, Arizona</p>	
	From the 1/4 sec. cor. of secs. 3 and 10
	N. 0° 29' W., on the north and south center line of section 3
	Descend over broken north to northwest slope, through mesquite trees and cacti.
27.00	Base of descent, bears N. 60° 00' E., and S. 60° 00' W.; thence, over nearly level land.
27.50	Adamsville Road, bears N. 60° 00' E., and S. 60° 00' W.
39.62	Intersect the east and west center line the point for the center 1/4 sec. cor. of sec. 3. The adjacent landowner refused permission to monument this corner point or to establish a witness corner thereto.
79.92	The point for the 1/4 sec. cor. of secs. 3 and 34 on the north boundary of the township, heretofore described.
	<p>The 1/4 sec. cor. of secs. 2 and 3 is monumented with a regulation (G.L.O.) iron post, 1 inch in diam., with brass cap 10 ins. below the surface of the road. The marking on this brass cap had been destroyed. I did not remonument this corner.</p> <p>This corner is located within a road that bears north and south.</p>
	<p style="text-align: center;">_____</p> <p>S. 89° 28' W., on the east and west center line of section 3</p>

Survey of a Portion of the Subdivision Lines
 Within Section 3
 Township 5 South, Range 9 East
 Gila and Salt River Meridian, Arizona

CHAINS	
	Over nearly level land.
15.15	Intersect the eastern boundary of A. O. U. W. Cemetery; the northern corner bears N. 48° 09' W., 3.90 chs. distant; the eastern corner bears S. 48° 09' E., 1.82 chs. distant.
19.95	The point for the center east 1/16 sec. cor. of sec. 3. Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap flush with the surface of the ground, mkd.
	T5S R9E E 1/16 C ————— C S 3 1975
21.11	Intersect the western boundary of the above cemetery; the northwestern corner bears N. 1° 41' W., 1.79 chs. distant; the southwestern corner bears S. 1° 41' E., 1.19 chs. distant.
39.90	Intersect the north and south center line, the center 1/4 sec. cor. of sec. 3.
79.80	The point for the 1/4 sec. cor. of secs. 3 and 4, heretofore described.
	<hr/> From the east 1/16 sec. cor. of secs. 3 and 10, which was designated to function for Angle Point No. 9, Parcel No. 1, Section 3, heretofore described. N. 0° 39' W., on the north and south center line of the southeast quarter of sec. 3
32.10	The point for Angle Point No. 8, Parcel No. 1, Section 3, hereinafter described.
32.60	Adamsville Road, bears N. 74° 10' E., and S. 74° 10' W.
38.24	Intersect the southern boundary of A. O. U. W. Cemetery; the eastern corner bears N. 89° 49' E., 6.16 chs. distant; the southwestern corner bears S. 89° 49' W., 1.21 chs. distant.
39.425	Intersect the east and west center line, the center east 1/16 sec. cor. of sec. 3. Discontinue the survey of the subdivision lines within section 3.

The Metes-and-Bounds
 Survey of Parcel No. 1 within Section 3
 Township 5 South, Range 9 East
 Gila and Salt River Meridian, Arizona

CHAINS

MEMORANDUM

The Metes-and-Bounds survey is of Parcel No. 1. within section 3. The land area as surveyed is lands acquired under provisions of the Act of June 18, 1934, (48 Stat 984). Lands held in trust by the U. S. Department of the Interior, Bureau of Indian Affairs, for the Papago Indian Tribe of Arizona.

The description is of the west one-third of the east half of the southeast quarter of section 3. The northern boundary of Parcel No. 1 is the southern right-of-way of the Adamsville Road. The area north of that line is the area of exception to the deed, which includes the above road, the A. O. U. W. Cemetery and an unincorporated cemetery. An exception of an area of one acre \pm deeded to the Clemens Cattle Company.

Thence, with the Metes-and-Bounds Survey of Parcel No. 1 within Section 3

Beginning at the point for Angle Point No. 1, Parcel No. 1, section 3

Set an iron post, 28 ins. long, 2½ ins. in diam., 25 ins. in the ground, with brass cap mkd.

T5S R9E
 S 3



1975

S. 81° 55' W., on line A P 1 - A P 2, Parcel No. 1, along the southern right-of-way of Adamsville Road

2.443 The point for Angle Point No. 2, Parcel No. 1, section 3.




Set an iron post, 28 ins. long, 2½ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T5S R9E
 S 3



1975

The Metes-and-Bounds
 Survey of Parcel No. 1 within Section 3
 Township 5 South, Range 9 East
 Gila and Salt River Meridian, Arizona

CHAINS		
	<p>S. 20° 35' E., on line A P 2 - A P 3, Parcel No. 1, section 3</p>	
0.800	<p>The point for Angle Point No. 3, Parcel No. 1, section 3.</p> <p>Set a copper-coated steel stake, 30 ins. long, 1/2 inch in diam., 26 ins. in the ground, with brass cap 1½ ins. in diam., mkd.</p>	
		
	<p>S. 66° 31' E., on line A P 3 - A P 4, Parcel No. 1, section 3</p>	
1.434	<p>The point for Angle Point No. 4, Parcel No. 1, section 3</p> <p>Set a copper-coated steel stake, 30 ins. long, 1/2 inch in diam., 27 ins. in the ground, with brass cap 1½ ins. in diam., mkd.</p>	
		
	<p>S. 0° 55' E., on line A P 4 - A P 5, Parcel No. 1, section 3</p>	
3.030	<p>The point for Angle Point No. 5, Parcel No. 1, section 3</p> <p>Set a copper-coated steel stake, 30 ins. long, 1/2 inch in diam., 27 ins. in the ground, with brass cap 1½ ins. in diam., mkd.</p>	
		

The Metes-and-Bounds
 Survey of Parcel No. 1 within Section 3
 Township 5 South, Range 9 East
 Gila and Salt River Meridian, Arizona

CHAINS	
	S. 89° 05' W., on line A P 5 - A P 6, Parcel No. 1, section 3
2.879	The point for Angle Point No. 6, Parcel No. 1, section 3
	Set a copper-coated steel stake, 30 ins. long, 1/2 inch in diam., 27 ins. in the ground, with brass cap 1 1/2 ins. in diam., mkd.
	<pre> B L M S 3 PAR 1 A P 6 _____ </pre>
	1975
	N. 0° 55' W., on line A P 6 - A P 7, Parcel No. 1, section 3
4.212	The point for Angle Point No. 7, Parcel No. 1, section 3
	Set an iron post, 28 ins. long, 2 1/2 ins. in diam., 23 ins. in the ground, with brass cap mkd.
	<pre> T5S R9E S 3 A P 7 PAR 1 </pre>
	1975
	from which
	A water well, bears S. 24° 07' E., 1.98 chs. distant.
	S. 74° 10' W., on line A P 7 - A P 8, Parcel No. 1, section 3
3.036	Intersect the north and south center line of the southeast quarter, the point for Angle Point No. 8, Parcel No. 1, section 3.
	Set an iron post, 28 ins. long, 2 1/2 ins. in diam., 23 ins. in the ground, with brass cap mkd.
	<pre> T5S R9E E S 3 A P 8 PARCEL 1 E </pre>
	1975

The Metes-and-Bounds
 Survey of Parcel No. 1 within Section 3
 Township 5 South, Range 9 East
 Gila and Salt River Meridian, Arizona

CHAINS	
	<p>S. 0° 39' E., on line A P 8 - A P 9, Parcel No. 1, along the north and south center line of the southeast quarter of section 3</p>
32.10	<p>The east 1/16 sec. cor. of secs. 3 and 10, which has been designated to function for Angle Point No. 9, Parcel No. 1, within section 3 (heretofore described).</p>
	<p>N. 88° 55' E., on line A P 9 - A P 10, Parcel No. 1 (within section 3), along the fifth latitudinal line between secs. 3 and 10.</p>
6.69	<p>The point for Angle Point No. 10, Parcel No. 1, within section 3</p>
	<p>Set an iron post, 28 ins. long, 2½ ins. in diam., with brass cap flush with the surface of the ground, mkd.</p>
	<p style="text-align: center;">T5S R9E S 3 PAR 1 A P 10 S 10</p>
	<p style="text-align: center;">1975</p>
	<p>There are no suitable accessories nor locations available for reference monuments.</p>
	<p>This corner is located 1.5 lks. distant south of an east and west fence line.</p>
	<p>N. 0° 42' W., on line A P 10 - A P 1, Parcel No. 1, section 3</p>
33.33	<p>Angle Point No. 1, Parcel No. 1, section 3, and the place of beginning.</p>
<p>GENERAL DESCRIPTION</p>	
<p>The area of these surveys are located approximately one mile west (via Adamsville Road) of the town of Florence, Arizona. The elevation varies from 1445 ft. above sea level near the northwest corner of section 3 to 1500 ft. above sea level near the southeast corner of section 3. The soil is sandy. For the most part, the land is nearly level. Most of section 3 is under cultivation, but there are areas with ground cover of mesquite trees and cacti.</p>	

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Gilbert V. Olson, _____, HEREBY
 CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day
 of March, 1975, (I) ~~(We)~~ have independently resurveyed a portion of
 the north boundary of the township (between sections 3 and 34); a portion
 of the subdivisional lines; the survey of a portion of the subdivision
 lines within section 3, and the metes-and-bounds survey of Parcel No. 1
 within section 3, Township 5 South, Range 9 East,

of the Gila and Salt River Meridian, in the State of Arizona, which
 are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my)
~~(our)~~ direction; and that said survey has been made in strict conformity with said special instruc-
 tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
 specific manner described in the foregoing field notes.

June 20, 1975

 (Date)

Gilbert V. Olson

 (Cadastral Surveyor)
 Gilbert V. Olson

 (Date)

 (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
 Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the north bound-
 ary of the township (between sections 3 and 34); a portion of the subdivisional
 lines; the survey of a portion of the subdivision lines within section 3, and
 the metes-and-bounds survey of Parcel No. 1 within section 3, Township 5 South,
 Range 9 East, Gila and Salt River Meridian, Arizona

executed by Gilbert V. Olson, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

MAY 10 1977

 (Date)

Roger T. Barron

 Acting (Chief, Division of Cadastral Survey)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
 _____, is a true copy of the original field notes.~~

~~_____
 (Date)~~

~~_____
 (Chief, Division of Cadastral Survey) GPO 849-626~~