


INDEX DIAGRAM

TOWNSHIP 15 NORTH , RANGE 11 EAST , SEC. 35 ,

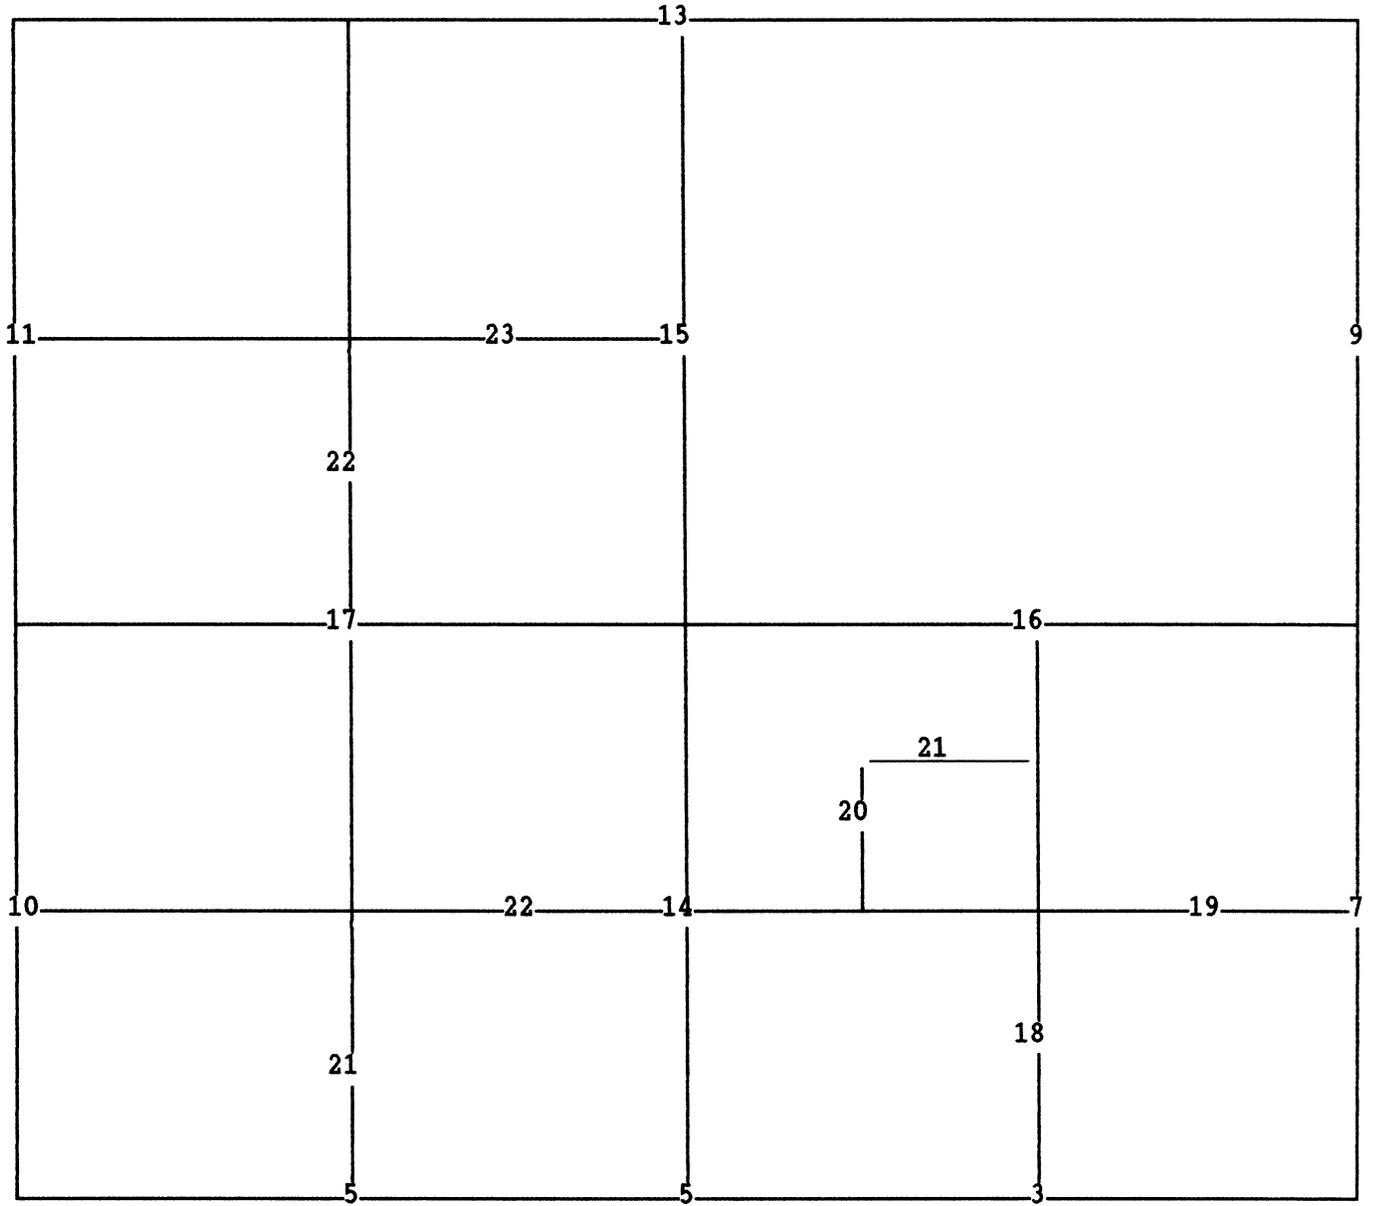

T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS

The following field notes describe the dependent resurvey of a portion of the south boundary and a portion of the subdivisional lines, and the survey of the subdivision of section 35, Township 15 North, Range 11 East, Gila and Salt River Mer., Arizona.

The boundaries of section 35 were surveyed by Theodore F. White, in 1881 and all the original corners on the boundaries of section 35 were remonumented by Wallace R. Ott, in 1966.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated September 20, 1984, for Group No. 658, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and all the corners were recovered. Private survey monuments were found at several of the corner locations. At certain corners more than one monument was found. In this situation the source of the two monuments was evaluated and if the oldest monument was determined to have been set using proper procedures then that monument was accepted rather than the latter monument. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of lines were determined by direct solar observations and carried forward by sustained angulation and refer to the true meridian. Distances and angles were measured electronically with a Zeiss Elta 46 Total Station instrument.

The geographic position of the southeast corner of section 35, as determined from a traverse tie made to U.S. Forest Service triangulation station "BLUE 1949", located in section 21, T 14 N, R 11 E, is as follows:

NAD 27: Latitude: 34°38'11.2" N. Longitude: 111°08'48.9" W

The mean magnetic declination as shown on U.S.G.S. quadrangle map "HAY LAKE, ARIZ.", published in 1970, is 14° E.

Dependent Resurvey, a Portion of the South Boundary,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

Restoring the survey executed by Theodore F. White in 1881,
and Remonumented by Wallace R. Ott, in 1966

Beginning at the cor. of secs. 1, 2, 35, and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey, a Portion of the South Boundary,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<div style="text-align: center; margin-bottom: 20px;"> <p>T15N R11E S35 S36 ----- S2 S1 T14N 1966</p> </div> <p>from which the remaining original bearing trees</p> <p style="margin-left: 40px;">A ponderosa pine, 26 ins. diam., bears N 47 1/2° E, 108 lks. dist., with healed blaze. (1966 Record: N 48 1/2° E, 107 lks.)</p> <p style="margin-left: 40px;">A ponderosa pine, 22 ins. diam., bears N 59 1/2° W, 21 lks. dist., with illegible scribe marks visible on open blaze. (1966 Record: N 57° W, 20 lks.)</p> <p>and the bearing trees mkd. in 1966</p> <p style="margin-left: 40px;">A ponderosa pine, 18 ins. diam., bears S 65 1/4° E, 109 lks. dist., with scribe marks T14N R11E S1 BT visible on blaze. (Record: S 64° E, 108 lks.)</p> <p style="margin-left: 40px;">An oak, 12 ins. diam., bears S 59 1/2° W, 47 lks. dist., with healed blaze. (Record: S 60 1/2° W)</p> <p>Add the marks 1985 on the brass cap.</p> <p style="margin-left: 40px;">S 89°54' W, bet. secs. 2 and 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>19.89 Point for the E 1/16 sec. cor. of secs. 2 and 35.</p> <p style="margin-left: 40px;">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin-bottom: 20px;"> <p>T15N R11E S35 E 1/16 ----- S2 T14N 1985</p> </div> <p>from which</p> <p style="margin-left: 40px;">An oak, 6 ins. diam., bears N 57 1/4° E, 54 lks. dist., mkd. E 1/16 S35 BT.</p> <p style="margin-left: 40px;">A power pole, No. 310, bears S 32 1/2° W, 64 1/2 lks. dist.</p>
--------	--

Dependent Resurvey, a Portion of the South Boundary,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>39.78 The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E S35 1/4 ——— S2 T14N 1966</p> <p>from which the remaining original bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 19 ins. diam., bears S 16° W, 16 lks. dist., with scribe marks 4 S2 BT visible on partially healed blaze.</p> <p>and the bearing tree mkd. in 1966</p> <p style="padding-left: 40px;">A sawed ponderosa pine stump, 4 ft. high, 28 ins. diam., bears N 21 1/2° E, 62 lks. dist., with scribe marks T15N R11E 1/4 S35 BT visible on blaze. (Record: N 23 3/4° E)</p> <p>and a new bearing tree</p> <p style="padding-left: 40px;">A ponderosa pine, 5 ins. diam., bears N 4 3/4° W, 109 lks. dist., mkd. 1/4 S35 BT.</p> <p>Add the marks 1985 on the brass cap.</p> <p style="text-align: center;">—————</p> <p>N 89°51' W, beginning new measurement.</p>
20.07	<p>The W 1/16 sec. cor. of secs. 2 and 35, monumented with a rebar, 30 ins. long, 3/4 in. diam., projecting 11 ins. above ground, and is accepted as a careful and faithful determination of the position of the cor. Wilfred P. Hanson's (LS 2473), map filed in 1963 at the Coconino County Courthouse in Flagstaff, AZ, shows this corner was established but gives no description.</p> <p>At the cor. point</p>

Dependent Resurvey, a portion of the South Boundary
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E S35 W 1/16 _____ S2 T14N 1985</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 7 ins. diam., bears S 53° E, 100 lks. dist., mkd. W 1/16 S2 BT.</p> <p style="padding-left: 40px;">A power pole, No. P-80 SPM 540, bears S 42 1/2° W, 61 1/2 lks. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar alongside the stainless steel post.</p> <p>The cor. is located 45 lks. N of a powerline extending E and W.</p> <p style="text-align: center;">_____</p> <p>N 89°49' W, beginning new measurement.</p> <p>4.10 U.S. Forest Service road 625 (Blue Ridge Drive), graded, bears N and S.</p> <p>20.05 The cor. of secs. 2, 3, 34, and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E S34 S35 _____ _____ S3 S2 T14N 1966</p>
--------	--

Dependent Resurvey, a Portion of the South Boundary
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>from which the original bearing trees</p> <p>An oak, 22 ins. diam., bears N 56° E, 63 lks. dist., with healed blaze. (1966 Record: N 54° E)</p> <p>A ponderosa pine, 24 ins. diam., bears S 64° E, 31 lks. dist., with scribe marks VN RX1E visible on blaze.</p> <p>A ponderosa pine, 21 ins. diam., bears S 60 1/4° W, 68 1/2 lks. dist., with healed blaze. (1966 Record: S 59° W, 67 lks.)</p> <p>A ponderosa pine, 27 ins. diam., bears N 57 1/4° W, 65 lks. dist., no marks visible on open blaze. (1966 Record: N 54° W, 64 lks.)</p> <p>and the bearing tree mkd. in 1966</p> <p>A sawed ponderosa pine stump, 16 ins. diam., bears S 57° W, 71 lks. dist., with lower portion of blaze remaining. (Record: S 56 1/4° W)</p> <p>Add the marks 1985 on the brass cap.</p> <p>From this point, U.S. Forest Service triangulation station "BLUE 1949", bears S 26°07' W, (forward bearing) 294.92 chs. dist., monumented with a stan. brass disc, 3 ins. diam., set in bedrock flush with ground.</p> <hr/> <p style="text-align: center;">Dependent Resurvey, a Portion of the Subdivisional Lines T 15 N, R 11 E, Gila and Salt River Mer., Arizona</p> <hr/> <p style="text-align: center;">Restoring the survey executed by Theodore F. White in 1881, and Remonumented by Wallace R. Ott, in 1966</p> <hr/> <p>From the cor. of secs. 1, 2, 35, and 36, on the S bdy. of the Tp. N 0°12' E, bet. secs. 35 and 36.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>19.20 A trail road, bears N 70° W and S 70° E.</p> <p>20.05 Point for the S 1/16 sec. cor. of secs. 35 and 36.</p>
--------	---

Dependent Resurvey, a Portion of the Subdivisional Lines
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E S 1/16 S35 S36 1985</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 69 1/4° E, 97 lks. dist., mkd. S 1/16 S36 BT.</p> <p style="padding-left: 40px;">An oak, 8 ins. diam., bears N 55 1/4° W, 196 lks. dist., mkd. S 1/16 S35 BT.</p> <p>40.10 The 1/4 sec. cor. of secs. 35 and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 13 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E 1/4 S35 S36 1966</p> <p>from which the remains of an original bearing tree</p> <p style="padding-left: 40px;">A sawed ponderosa pine stump, 30 ins. diam., bears S 52° E, 69 lks. dist.; a portion of the fallen trunk alongside has a blaze with illegible scribing. (1966 Record: 66 lks.)</p> <p>and the bearing trees mkd. in 1966</p> <p style="padding-left: 40px;">An oak, 11 ins. diam., bears S 78° E, 42 lks. dist., with scribe marks T15N R11E 1/4 S36 BT visible on open blaze.</p> <p style="padding-left: 40px;">An oak, 9 ins. diam., bears N 71° W, 48 lks. dist., with healed blaze.</p> <p>From this cor., a fence cor. (an oak tree 14 ins. diam.) bears S 12 3/4° E, 74 lks. dist., from which fences extend S and W. (1966 Record: S 12° E, 75 lks.)</p> <p>Add the marks 1985 on the brass cap.</p> <hr style="width: 20%; margin-left: auto; margin-right: auto;"/>
--------	--

Dependent Resurvey, a Portion of the Subdivisional Lines
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>N 0°06' E, beginning new measurement.</p>								
40.05	<p>The cor. of secs. 25, 26, 35, and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td colspan="2">T15N R11E</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> <tr> <td colspan="2">1966</td> </tr> </table> </div> <p>from which the remains of the original bearing trees</p> <p>A sawed ponderosa pine stump, 20 ins. diam., bears N 33 1/4° E, 159 lks. dist., with scribe marks XV visible on lower portion of blaze; with a down pine nearby, scribe marks TXVN RX1E visible on upper portion of blaze. (1966 Record: N 34° E, 158 lks.)</p> <p>A sawed ponderosa pine stump, 30 ins. diam., bears S 65° E, 46 1/2 lks. dist., with scribe marks XXXVI visible on lower portion of blaze; with a down pine nearby, scribe marks TXVN RXIE visible on upper portion of blaze. (1966 Record: S 67° E, 45 lks.)</p> <p>A down decayed ponderosa pine, bears S 18° W, 98 lks. dist., no marks remaining. (1966 Record: S 21° W, 94 lks.)</p> <p>A decayed sawed ponderosa pine stump, bears N 48 1/4° W, 121 1/2 lks. dist., no marks remaining. (1966 Record: N 47 1/2° W, 118 lks.)</p> <p>and new bearing trees</p> <p>A ponderosa pine, 14 ins. diam., bears N 85° E, 90 1/2 lks. dist., mkd. T15N R11E S25 BT.</p> <p>An oak, 10 ins. diam., bears S 25° E, 110 lks. dist., mkd. T15N R11E S36 BT.</p> <p>A ponderosa pine, 7 ins. diam., bears S 18° W, 16 lks. dist., mkd. T15N R11E S35 BT.</p> <p>A ponderosa pine, 13 ins. diam., bears N 19 1/2° W, 165 lks. dist., mkd. T15N R11E S26 BT.</p> <p>A mound of stone 2 ft. base 1 1/2 ft. high is W of the cor.</p> <p>Add the marks 1985 on the brass cap.</p>	T15N R11E		S26	S25	S35	S36	1966	
T15N R11E									
S26	S25								
S35	S36								
1966									

Dependent Resurvey, a Portion of the Subdivisional Lines,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>From the cor. of secs. 2, 3, 34, and 35, on the S bdy. of the Tp. N 0°31' W, bet. secs. 34 and 35.</p> <p>Over gently rolling land, through ponderosa pine and residential development.</p>
20.055	<p>The S 1/16 sec. cor. of secs. 34 and 35, monumented with a rebar, 5/8 in. diam., tagged "PE 2399" (Percy Ellis Coe, PE 2399), flush with ground, and is accepted as a careful and faithful determination of the position of the cor. Wilfred P. Hanson's (LS 2473) map filed in 1963 at the Coconino County Courthouse in Flagstaff, AZ, shows this corner was established but gives no description and another map filed in 1967 shows a 1/2 in. diam. iron pin was recovered.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T15N R11E S 1/16 S34 S35 1985</p> </div> <p>Insert the rebar in the stainless steel post and deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>From this cor. a pipe, 7/8 in. outside diam., projecting 7 ins. above ground, bears S 31°18' W, 0.167 chs. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°35' W, beginning new measurement.</p>
2.70	<p>Antelope Way, graded, bears N 75° E and S 75° W.</p>
14.50	<p>Verde Road, graded, bears E and W.</p>
20.055	<p>The 1/4 sec. cor. of secs. 34 and 35, monumented with an iron post, 2 1/2 ins. diam., projecting 3 ins. above ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T15N R11E 1/4 S34 S35 1966</p> </div>

Dependent Resurvey, a Portion of the Subdivisional Lines,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>from which the original bearing trees</p> <p style="padding-left: 40px;">A ponderosa pine, 34 ins. diam., bears S 67° E, 52 lks. dist., with scribe marks 1/4 S visible on blaze. (1966 Record: 50 lks.)</p> <p style="padding-left: 40px;">A ponderosa pine stump, 24 ins. diam., bears N 11° W, 36 lks. dist., no marks remaining. (1966 Record: N 7° W, 33 lks.)</p> <p>From this cor. the SE cor. of a house foundation, 36 x 24 ft., bears N 75 1/2° W, 1.407 chs. dist.</p> <p>Add the marks 1985 on the brass cap.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N 0°09' W, beginning new measurement.</p>
20.03	<p>The N 1/16 sec. cor. of secs. 34 and 35, monumented with a rebar, 5/8 in. diam., bent over, projecting 5 ins. above ground, and is accepted as a careful and faithful determination of the position of the cor. Wilfred P. Hanson's (LS 2473) map filed in 1963 at the Coconino County Courthouse in Flagstaff, AZ, shows this corner was established but gives no description.</p> <p>At the cor. point</p> <p>Set an aluminum post, 4 ins. long, 1 in. diam., 14 ins. below the surface of a driveway in drill hole, with cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <p>T15N R11E N 1/16 S34 S35 1985</p> </div> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 22 ins. in the ground, for a reference monument, bears N 45° E, 33.0 ft. dist., with brass cap mkd. RM T15N R11E N1/16 S35 33.0 FT TO COR. 1985, and an arrow pointing to the cor. and deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p style="padding-left: 40px;">A ponderosa pine, 18 ins. diam., bears N 77 1/2° W, 77 lks. dist., mkd. N 1/16 S34 BT.</p> <p>Bury the rebar alongside the aluminum post.</p>

Dependent Resurvey, a Portion of the Subdivisional Lines,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>From this cor. a rebar, 5/8 in. diam., projecting 1 in. above ground, bears N 89°45' E, 0.654 chs. dist.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N 0°08' W, beginning new measurement.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>20.015 The cor. of secs. 26, 27, 34, and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="padding: 2px;">T15N</td> <td style="padding: 2px;">R11E</td> </tr> <tr> <td style="padding: 2px;">S27</td> <td style="padding: 2px;">S26</td> </tr> <tr> <td style="border-left: 1px solid black; border-right: 1px solid black; height: 10px;"></td> <td style="border-left: 1px solid black; border-right: 1px solid black; height: 10px;"></td> </tr> <tr> <td style="padding: 2px;">S34</td> <td style="padding: 2px;">S35</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1966</td> </tr> </table> </div> <p>from which the remaining original bearing trees</p> <ul style="list-style-type: none"> A sawed ponderosa pine stump, 5 ft. high, 30 ins. diam., bears S 58 1/2° E, 84 lks. dist., with illegible scribe marks visible on blaze. (1966 Record: 82 lks.) A ponderosa pine, 21 ins. diam., bears S 81 1/4° W, 71 lks. dist., with healed blaze. (1966 Record: S 80° W, 70 lks.) A sawed ponderosa pine stump, 5 ft. high, 24 ins. diam., bears N 16° W, 126 lks. dist., with illegible scribe marks visible on blaze. (1966 record: 125 lks.) <p>and new bearing trees</p> <ul style="list-style-type: none"> A ponderosa pine, 7 ins. diam., bears N 37 1/2° E, 48 lks. dist., mkd. T15N R11E S26 BT. A ponderosa pine, 16 ins. diam., bears S 39 1/2° E, 47 1/2 lks. dist., mkd. T15N R11E S35 BT. A ponderosa pine, 8 ins. diam., bears N 23 1/2° W, 17 lks. dist., mkd. T15N R11E S27 BT. <p>Add the marks 1985 on the brass cap.</p> <hr style="width: 60%; margin: 10px auto;"/>	T15N	R11E	S27	S26			S34	S35	1966	
T15N	R11E										
S27	S26										
S34	S35										
1966											

Dependent Resurvey, a Portion of the Subdivisional Lines,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	
	From the cor. of secs. 25, 26, 35, and 36.
	N 89°55' W, bet. secs. 26 and 35.
	Over gently rolling land, through ponderosa pine.
29.00	A trail road, bears N 15° E and S 15° W.
40.52	The 1/4 sec. cor. of secs. 26 and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T15N R11E S26 1/4 _____ S35 1966</p>
	from which the original bearing trees
	<p style="padding-left: 40px;">A ponderosa pine snag, 24 ins. diam., bears N 5 1/2° E, 202 lks. dist., with illegible scribe marks visible on open blaze. (1966 Record: N 6° E, 200 lks.)</p>
	<p style="padding-left: 40px;">A sawed ponderosa pine stump, 18 ins. diam., bears S 47 1/2° E, 56 lks. dist., no blaze or marks. (1966 Record: 54 lks.)</p>
	and bearing trees mkd. in 1966
	<p style="padding-left: 40px;">A ponderosa pine, 20 ins. diam., bears N 1 1/4° W, 60 lks. dist., with scribe marks T15N R11E 1/4 S26 BT visible on partially healed blaze. (Record: North)</p>
	<p style="padding-left: 40px;">An oak, 12 ins. diam., bears S 19 3/4° E, 50 lks. dist., with healed blaze.</p>
	Add the marks 1985 on the brass cap.
	S 89°59' W, beginning new measurement.
18.00	U.S. Forest Service road 625, bears N 20° W and S 20° E.
20.02	Point for the W 1/16 sec. cor. of secs. 26 and 35.

Dependent Resurvey, a Portion of the Subdivisional Lines,
T 15 N, R 11 E, Gila and Salt River Mer., Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E S26 W 1/16 _____ S35 1985</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears N 30° W, 10 1/2 lks. dist., mkd. W 1/16 S26 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 8 ins. diam., bears S 23° E, 17 1/2 lks. dist., mkd. W 1/16 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>
40.04	<p>The cor. of secs. 26, 27, 34, and 35.</p> <hr/> <p style="text-align: center;">Subdivision of Section 35, T 15 N, R 11 E, Gila and Salt River Mer., Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 2 and 35, on the S bdy. of the Tp.</p> <p>N 0°24' W, on the N and S center line of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p>
20.11	<p>Point for the center S 1/16 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E C S 1/16 S35 C 1985</p>

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	
	<p>from which</p>
	<p>An oak, 9 ins. diam., bears S 50° E, 14 1/2 lks. dist., mkd. CS 1/16 S35 BT.</p>
	<p>A ponderosa pine, 11 ins. diam., bears N 78 1/4° W, 39 1/2 lks. dist., mkd. CS 1/16 S35 BT.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>
40.22	<p>The center 1/4 sec. cor. of sec. 35, monumented with a rebar, 3/4 in. diam., projecting 11 ins. above ground, and is accepted as a careful and faithful determination of the position of the cor.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T15N R11E</p>
	<p>C 1/4 S35</p>
	<p>1985</p>
	<p>from which</p>
	<p>A ponderosa pine, 9 ins. diam., bears S 69 1/4° E, 55 1/2 lks. dist., mkd. C 1/4 S35 BT.</p>
	<p>An oak, 11 ins. diam., bears S 13 1/4° E, 70 lks. dist., mkd. C 1/4 S35 BT.</p>
	<p>Insert the rebar in the stainless steel post and deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
	<p>N 0°24' W, beginning new measurement.</p>
0.82	<p>Fence, (down), extends E and W.</p>
13.50	<p>A graded road, bears NW and SE.</p>
20.03	<p>Point for the center N 1/16 sec. cor. of sec. 35.</p>
	<p>Set an aluminum post, 20 ins. long, 1 in. diam., 16 ins. in the ground, in drill hole, in bed rock with cap mkd.</p>

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	<div style="text-align: center; margin-bottom: 20px;"> <p>T15N R11E C N 1/16 S35 C 1985</p> </div> <p>from which</p> <p style="margin-left: 40px;">An oak, 7 ins. diam., bears N 53 1/4° E, 33 1/2 lks. dist., mkd. CN 1/16 S35 BT.</p> <p style="margin-left: 40px;">A ponderosa pine, 10 ins. diam., bears N 36° W, 50 1/2 lks. dist., mkd. CN 1/16 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the aluminum post.</p> <p>40.06 The 1/4 sec. cor. of secs. 26 and 35.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 35 and 36.</p> <p>N 89°56' W, on the E and W center line of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>14.00 A graded road, bears N 20° E and S 20° W.</p> <p>20.09 Point for the center E 1/16 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin-bottom: 20px;"> <p>T15NR11E E 1/16 C-----C S35 1985</p> </div> <p>from which</p> <p style="margin-left: 40px;">A ponderosa pine, 8 ins. diam., bears N 69 1/2° E, 30 lks. dist., mkd. X BT.</p> <p style="margin-left: 40px;">A ponderosa pine, 8 ins. diam., bears S 31° W, 27 lks. dist., mkd. CE 1/16 S35 BT.</p>
--------	---

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the stainless steel post.</p> <p>The cor. is located 4 1/2 lks. S of a fence, extending E and W.</p> <p>23.50 A graded road, bears NW and SE.</p> <p>40.18 The center 1/4 sec. cor. of sec. 35.</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N 89°59' W, beginning new measurement.</p> <p>20.125 The center W 1/16 sec. cor. of sec. 35, monumented with a rebar, 5/8 in. diam., projecting 6 ins. above ground, and is accepted as a careful and faithful determination of the position of the cor. Wilfred P. Hanson's (LS 2473) map filed in 1963 at the Coconino County Courthouse in Flagstaff, AZ, shows the corner was established but gives no description and another map filed in 1967 shows a 1/2 in. iron pin was recovered.</p> <p>At the cor. point</p> <p>Set an aluminum post, 20 ins. long, 1 in. diam., 16 ins. in the ground, in drill hole, in bed rock with cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T15NR11E W 1/16 C-----C S35 1985</p> </div> <p>from which</p> <p style="margin-left: 40px;">An oak, 5 ins. diam., bears N 20 1/2° E, 154 lks. dist., mkd. CW 1/16 S35 BT.</p> <p style="margin-left: 40px;">A ponderosa pine, 24 ins. diam., bears N 62 1/4° E, 67 lks. dist., mkd. X BT.</p> <p>Deposit the rebar alongside the aluminum post and deposit a magnet in a 1 x 1 x 2 5/8 in. white plastic case beneath the aluminum post.</p> <p>From this cor. a rebar, 3/4 in. diam., projecting 13 ins. above ground, bears S 63° W, 0.012 chs. dist.</p> <hr style="width: 30%; margin: 10px auto;"/>
--------	---

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	
7.50	<p>West, beginning new measurement.</p> <p>Over gently rolling land, through ponderosa pine and residential development.</p> <p>Blue Ridge Drive, bears N and S.</p>
20.10	<p>The 1/4 sec. cor. of secs. 34 and 35.</p>
	<p style="text-align: center;">SE 1/4 of sec. 35</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 2 and 35, on the S bdy. of the Tp.</p> <p>N 0°06' W, on the N and S center line of the SE 1/4 of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>Point for the SE 1/16 sec. cor. of sec. 35, at intersection with the E and W center line of the SE 1/4 of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E SE 1/16 S35 1985</p>
20.08	<p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 5 ins. diam., bears S 59 3/4° E, 30 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears S 43° W, 140 lks. dist., mkd. SE 1/16 S35 BT.</p> <p>From this cor. a well casing, 8 ins. diam., bears N 64 3/4° E, 2.64 chs. dist.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
30.12	<p>Point for the center N-SE 1/64 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	
	<p>S35 C-N-SE 1/64 1985</p>
	<p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 7 ins. diam., bears N 70 1/2° E, 45 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 11 ins. diam., bears N 32° W, 42 1/2 lks. dist., mkd. CNSE 1/64 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
31.55	A trail road, bears NE and SW.
36.30	A trail road, bears NW and SE.
40.16	The center E 1/16 sec. cor. of sec. 35.
	<hr style="width: 20%; margin: 0 auto;"/>
	<p>From the S 1/16 sec. cor. of secs. 35 and 36.</p> <p>S 89°59' W, on the E and W center line of the SE 1/4 of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p>
3.00	A trail road, bears NW and SE.
19.99	The SE 1/16 sec. cor. of sec. 35.
23.80	A trail road, bears N and S.
29.985	<p>Point for the center W-SE 1/64 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p>

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	
	<p style="text-align: center;">S35 C-W-SE 1/64 1985</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 67 1/2° W, 91 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears S 5° W, 96 lks. dist., mkd. CWSE 1/64 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
39.98	<p>The center S 1/16 sec. cor. of sec. 35.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">NW 1/4 of the SE 1/4 of sec. 35</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center W-SE 1/64 sec. cor. of sec. 35.</p> <p>N 0°15' W, on the N and S center line of the NW 1/4 of the SE 1/4 of sec. 35.</p>
10.05	<p>Point for the NW-SE 1/64 sec. cor. of sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">S35 NW-SE 1/64 1985</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 9 ins. diam., bears N 44° E, 27 1/2 lks. dist., mkd. X BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears N 31 1/2° W, 83 lks. dist., mkd. NWSE 1/64 S35 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

<p>CHAINS</p> <p>10.02</p> <p>20.095</p> <p>13.05</p> <p>20.08</p>	<p>Set a steel fence post near the cor.</p> <hr/> <p>S 89°58.5' E, on the E and W center line of the NW 1/4 of the SE 1/4 of sec. 35.</p> <p>The center N-SE 1/64 sec. cor. of sec. 35.</p> <hr/> <p style="text-align: center;">SW 1/4 of Sec. 35</p> <hr/> <p>From the W 1/16 sec. cor. of secs. 2 and 35, on the S bdy. of the Tp.</p> <p>N 0°25' W, on the N and S center line of the SW 1/4 of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>The SW 1/16 sec. cor. of sec. 35, monumented with a rebar, 32 ins. long, 3/4 in. diam., projecting 18 ins. above ground, and is accepted as a careful and faithful determination of the position of the cor. Wilfred P. Hanson's (LS 2473) map filed in 1963 at the Coconino County Courthouse in Flagstaff, AZ, shows this corner was established but gives no description and another map filed in 1967 shows a 1/2 in. iron pin was recovered.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T15N R11E SW 1/16 S35 1985</p> <p>Insert the rebar inside the stainless steel post and deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N 0°31.5' W, beginning new measurement.</p> <p>A microwave tower, 19 x 19 x 19 ft., bears W, 0.25 chs. dist.</p> <p>The center W 1/16 sec. cor. of sec. 35.</p> <hr/>
--	---

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	<p>From the center S 1/16 sec. cor. of sec. 35.</p> <p>N 89°53' W, on the E and W center line of the SW 1/4 of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>20.08 The SW 1/16 sec. cor. of sec. 35.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 89°55.5' W, beginning new measurement.</p> <p>Over gently rolling land, through ponderosa pine and residential development.</p> <p>5.00 Blue Ridge Drive, graded, bears N 20° E and S 20° W.</p> <p>20.085 The S 1/16 sec. cor. of secs. 34 and 35.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">NW 1/4 of sec. 35</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center W 1/16 sec. cor. of sec. 35.</p> <p>N 0°15' W, on the N and S center line of the NW 1/4 of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>20.02 The NW 1/16 sec. cor. of sec. 35, monumented with a rebar, 3/4 in. diam., projecting 12 ins. above ground, and is accepted as a careful and faithful determination of the position of the cor. Wilfred P. Hanson's (LS 2473) map filed in 1963 at the Coconino County Courthouse in Flagstaff, AZ shows this corner was established but gives no description.</p> <p>At the cor. point</p> <p>Set an aluminum post, 22 ins. long, 1 in. diam., 13 ins. in the ground, 5 ins. in drill hole, in bed rock with cap mkd.</p> <p style="text-align: center;">T15N R11E NW 1/16 S35 1985</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 6 ins. diam., bears N 65 1/4° E, 25 lks. dist., mkd. NW 1/16 S35 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 7 ins. diam., bears S 28 3/4° E, 41 lks. dist., mkd. X BT.</p>
--------	---

Subdivision of Section 35, T 15 N, R 11 E,
Gila and Salt River Mer., Arizona

CHAINS	<p>Deposit the rebar alongside the aluminum post.</p> <p>From this cor. a rebar, 5/8 in. diam., projecting 7 ins. above ground, bears N 47° W, 0.016 chs. dist.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 0°14' W, beginning new measurement.</p> <p>6.00 U.S. Forest Service road 625, bears N 20° E and S 20° W.</p> <p>20.03 The W 1/16 sec. cor. of secs. 26 and 35.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the center N 1/16 sec. cor. of sec. 35.</p> <p>West, on the E and W center line of the NW 1/4 of sec. 35.</p> <p>Over gently rolling land, through ponderosa pine.</p> <p>9.00 A graded road, bears NW and SE.</p> <p>20.075 The NW 1/16 sec. cor. of sec. 35.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N 89°59' W, beginning new measurement.</p> <p>2.50 U.S. Forest Service road 625 (Blue Ridge Drive), bears N 20° E and S 20° W.</p> <p>20.06 The N 1/16 sec. cor. of secs. 34 and 35.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center; margin: 20px 0;">GENERAL DESCRIPTION</p> <p>Section 35, Township 15 North, Range 11 E, is located about 40 miles southwesterly from Winslow, AZ, via State Hwy. 87 on the Mogollon Plateau. The elevation ranges from 6700 feet to about 6800 feet above sea level. The land is gently rolling covered primarily with ponderosa pine. There are private residences in the W 1/2 of the SW 1/4 and the SW 1/4 of the NW 1/4 of the section and no signs of mining activity.</p> <hr style="width: 80%; margin: 10px auto;"/>
--------	---

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Timothy J. Moore	Survey Technician
Delbert L. Bybee	Survey Technician
Grant Lopresti	Survey Aid
Robert Charboneau	Survey Aid

CERTIFICATE OF SURVEY

We, Jack A. Savlan and Duane R. Garoutte, Cadastral Surveyors, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 20th day of September, 1984, We have dependently resurveyed a portion of the south boundary, and a portion of the subdivisional lines, and surveyed the subdivision of section 35, Township 15 North, Range 11 East, of the Gila and Salt River Meridian, in the state of Arizona, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Jack A. Savlan is no longer assigned to this office and is not available for signature.

JUL 28 1988

 (Date)

Paul E. Knight

 (Chief, Survey Examiner)

JUL 27 1988

 (Date)

Duane R. Garoutte

 (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
 Arizona State Office
 Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the south boundary and a portion of the subdivisional lines, and the survey of the subdivision of section 35, Township 15 North, Range 11 East, Gila and Salt River Meridian, Arizona, executed by Jack A. Savlan and Duane R. Garoutte, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

AUG 05 1988

 (Date)

James P. Kelley

 (Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I Certify that the foregoing transcript of the field notes of the above-described surveys in T 15 N, R 11 E, Gila and Salt River Meridian, in the state of Arizona is a true copy of the original field notes.~~

~~_____~~
~~(Date)~~

~~_____~~
~~(Chief Cadastral Surveyor of Arizona)~~