

ORIGINAL

1

BOOK 5426

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY

OF A PORTION OF THE TENTH STANDARD PARALLEL NORTH

THROUGH RANGE 8 EAST,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF CERTAIN SECTIONS,

IN

TOWNSHIP 40 NORTH, RANGE 8 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY

STEPHEN K. HANSEN

Cadastral Surveyor


Under Special Instructions dated May 9, 1994, approved May 9, 1994, and Supplemental Special Instructions dated May 18, 1994, approved May 19, 1994, which provided for the surveys included under Group Number 773, and assignment instructions dated May 9, 1994.

Survey Commenced May 16, 1994

Survey Completed Sept. 15, 1994

INDEX DIAGRAM

TOWNSHIP 40 NORTH, RANGE 8 EAST,

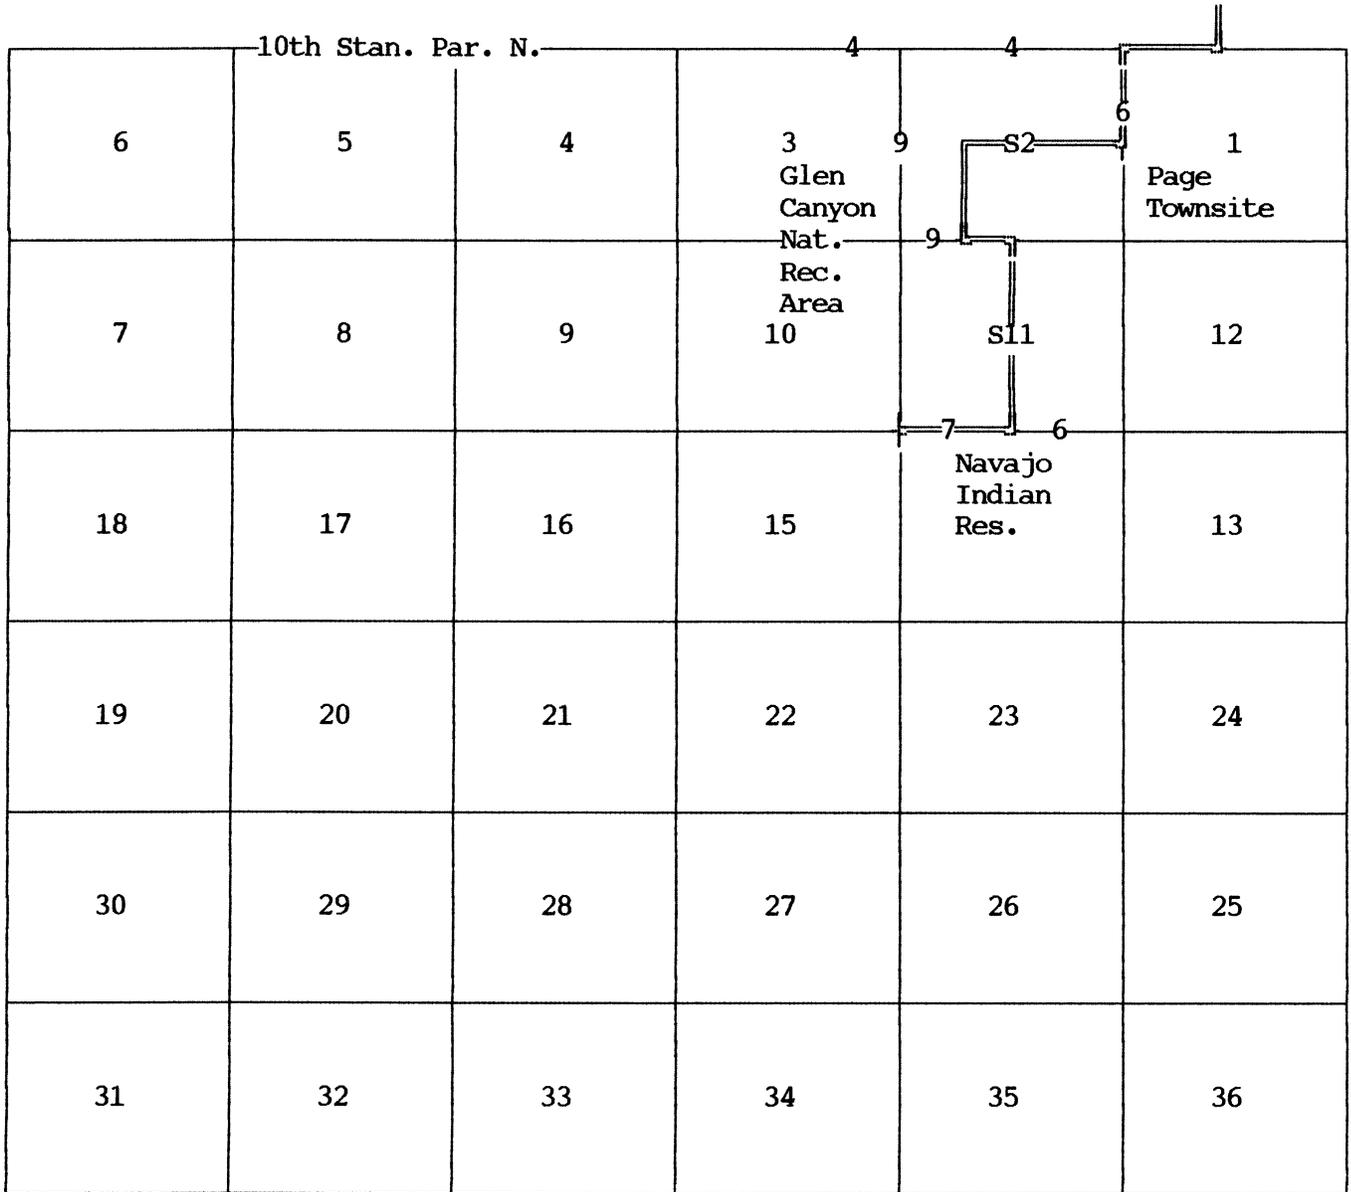

Subdivision of Sec. 2
Subdivision of Sec. 11

pp. 11-13
pp. 13-14

T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of a portion of the Tenth Standard Parallel North through Range 8 East, a portion of the subdivisional lines, and the subdivision of certain sections, in Township 40 North, Range 8 East, Gila and Salt River Meridian, Arizona.

Portions of the Tenth Standard Parallel North, the north boundary of T. 40 N., on the 10th Standard Parallel North, the subdivisional lines, and the traverse of the right rim of the Glen Canyon of the Colorado River were surveyed by Benjamin Kinsey and Bert E. Wakeman, in 1937. A portion of the Tenth Standard Parallel North, portions of the subdivisional lines, the Page Townsite boundary, and the meanders of a portion of the Colorado River were surveyed by Robert C. Yundt and Boyd S. Owens, in 1959.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated May 9, 1994, and the Supplemental Special Instructions, dated May 18, 1994, for Group No. 773, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line notes are given herein.

The survey was performed at the request of the National Park Service, under the authority of 43 U.S.C. 772, 43 U.S.C. 1701 et seq., and 31 U.S.C. 1535. The purpose of the survey was to determine a portion of the Glen Canyon National Recreation boundary.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Lietz Set 4A total station instrument.

The geographic position of the cor. of secs. 11, 12, 13 and 14 was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation station "Antelope" was used as the control station. The geographic position is as follows:

Latitude: 36°52'27.74" N. Longitude: 111°29'45.95" W. NAD27

T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>The mean magnetic declination, as taken from quadrangle map White Dome, ARIZ., published in 1985 by U.S. Geological Survey, is 13 1/2° E.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of a Portion of the Tenth Standard Parallel North Through Range 8 East, Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">Restoring the survey executed by Benjamin Kinsey and Elliot Pearson, in 1937</p> <hr/> <p>Beginning at the witness cor. for the standard 1/4 sec. cor. of sec. 34, T. 41 N., R. 8 E., monumented with a brass tablet, 3 1/2 ins. diam., firmly set, in sandstone, flush with the surface of ground, with a mound of stone, 3 ft. base, 2 ft. high, to the N., with brass cap mkd. SC WC 1/4 S34 1937. Add the marks 1994 to the brass cap.</p> <p>S. 89°46' E., on the Tenth Stan. Par. N., on the line bet. Tps. 40 and 41 N.</p> <p>19.57 The point for the closing cor. of secs. 2 and 3, T. 40 N., R. 8 E., on the Tenth Stan. Par. N., hereinafter described.</p> <p>Along rolling sandstone, desc. steeply into the Glen Canyon of the Colorado River.</p> <p>34.91 The standard cor. of secs. 34 and 35, monumented with an 'X' chiseled in sandstone. The true point was monumented by Robert C. Yundt and Boyd S. Owens, in 1959.</p> <p>From this cor. point, the witness cor. for the standard cor. of secs. 34 and 35, monumented with a brass tablet, 3 1/2 ins. diam., firmly set, in sandstone, with a mound of stone, 2 ft. base, 1 ft. high, to the W., with brass cap mkd. SC T41N R8E S34 S35 WC 1937, bears N. 0°01' W., 20 lks. dist. Add the marks 1994 to the brass cap.</p> <hr/> <p style="text-align: center;">Restoring the survey executed by Robert C. Yundt and Boyd S. Owens, in 1959</p> <hr/> <p>East, on the Tenth Stan. Par. N., on the line bet. Tps. 40 and 41 N, beginning new measurement.</p> <p>24.66 Point for the 1/4 sec. cor. of sec. 2 only, on the Tenth Stan. Par. N., T. 40 N., R. 8 E., hereinafter described.</p>
--------	--

Dependent Resurvey of a Portion of the Tenth Stan. Par. North
Through Range 8 East, Gila and Salt River Meridian, Arizona

CHAINS	
39.98	<p>The standard 1/4 sec. cor. of sec. 35, monumented with an iron post, 1 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap erroneously mkd. SC T41N R8E 1/4 S32 1959. Add the marks 1994 to the brass cap.</p> <hr/> <p>East, beginning new measurement.</p>
0.49	<p>The witness meander cor. of sec. 35, on the right bank of the Colorado River, monumented with an iron post, 1 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap erroneously mkd. SC T41N R8E S32 WMC 1959. Add the marks 1994 to the brass cap.</p> <hr/> <p>East, beginning new measurement.</p>
0.11	<p>True point for the meander cor. of sec. 35, on the right bank of the Colorado River, at proportionate distance. Unsuitable for monumentation. Not monumented.</p>
2.30	<p>Right bank of the 1994 channelized Colorado River, course SW.</p>
9.90	<p>Left bank of the 1994 channelized Colorado River.</p>
10.28	<p>The meander cor. of sec. 35, on the left bank of the Colorado River, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 18 ins. above ground, encircled with a collar of stone, with brass cap erroneously mkd. SC T41N R8E S32 MC 1959. Add the marks 1994 to the brass cap.</p> <hr/> <p>East, beginning new measurement.</p> <p>Asc. over steep sandstone cliffs.</p>
13.91	<p>The closing cor. of secs. 1 and 2, T. 40 N., R. 8 E., and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, hereinafter described.</p> <hr/> <p>East, on the common bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, beginning new measurement.</p>
15.33	<p>The standard cor. of secs. 35 and 36, and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, monumented with an iron post, 1 ins. diam., firmly set, in sandstone, in a drill hole, encircled with a collar of stone, with brass cap mkd. SC T41N R8E S35 S36 PTS 1959. Add the marks 1994 GCNRA to the brass cap.</p> <hr/>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona.

CHAINS	
39.94	<p style="text-align: center;">Restoring the survey executed by Robert C. Yundt and Boyd S. Owens, in 1959</p> <hr/> <p>From the 1/4 sec. cor. of secs. 1 and 2, and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, to the W., with brass cap mkd. T40N R8E 1/4 PTS S2 S1 1959. Add the marks 1994 to the brass cap.</p> <p>N. 0°04' E., on the common bdy. of the Glen Canyon National Recreational Area, and the Page Townsite.</p> <p>The closing cor. of secs. 1 and 2, and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, at intersection with the Tenth Stan. Par. N., monumented with a brass tablet, 3 1/2 ins. diam., firmly set, in sandstone, flush with the surface of ground, with brass cap mkd. T41N R8E S35 S2 S1 PTS T40N R8E CC 1959. Add the marks 1994 GCNRA to the brass cap.</p> <p>From this cor. point, the standard cor. of secs. 35 and 36, and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, bears East, 15.33 chs. dist., hereinbefore described.</p>
21.52	<hr/> <p>From the cor. of secs. 11, 12, 13 and 14, and a cor. on the bdy. of the Navajo Indian Reservation and the Page Townsite, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with a mound of stone, 3 ft. base, to top, to the W., with brass cap mkd. T40N R8E S11 S12 S14 S13 1959. Add the marks 1994 to the brass cap and set a steel fence post alongside the iron post.</p> <p>N. 89° 59' W., between secs. 11 and 14, common with the bdy. of the Navajo Indian Reservation and the Page Townsite.</p> <p>Over rolling, rocky land through sagebrush and native grasses, along the S. side of a 4 strand barbed wire fence</p> <p>Center of U.S. Highway 89A, asphalt pavement, 75 lks. wide, bears NE. and SW.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.00	<p>Point for the 1/4 sec. cor. of secs. 11 and 14, and a cor. on the bdy. of the Glen Canyon National Recreation Area, the Navajo Indian Reservation, and the Page Townsite, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 2 1/2 ins. stem, cemented in place, in a drill hole, over a magnet, 3/4 x 1 in. diam, in sandstone bedrock, with top mkd.</p> <p style="text-align: center;">T40N R8E S11 1/4 — S14 1994</p> <p>Cor. is located 3 lks. S. of a cor. of barbed wire fences, 4 strand, bears E. and WNW.</p> <p>Continuing on the line bet. secs. 11 and 14, common with the bdy. of the Glen Canyon National Recreation Area and the Navajo Indian Reservation.</p>
48.60	<p>Point for a witness point on line bet. secs. 11 and 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T40N R8E S11 GCNRA</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S14 NIR 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the stainless steel post.</p>
58.64	<p>Point for a witness point on line bet. secs. 11 and 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS	
77.40	<p style="text-align: center;">WP T40N R8E S11 GCNRA</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S14 NIR 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Point for a witness point on line bet. secs. 11 and 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. in the ground, to bedrock, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p>
80.00	<p style="text-align: center;">WP T40N R8E S11 GCNRA</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S14 NIR 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located on a sandstone outcropping, 20 ft. high, 100 ft. long, generally bearing N. and S.</p> <p>The cor. of secs. 10, 11, 14 and 15, and a cor. on the bdy. of the Glen Canyon National Recreation, and the Navajo Indian Reservation, monumented with a drill hole in sandstone bedrock. The orig. monument, a brass tablet, 3 1/4 ins. diam., was found lying loosely nearby, mkd. T40N R8E S10 S11 S15 S14 1959. Add the marks 1994 to the brass tablet.</p> <p>At the corner point</p> <p>Set the orig. brass tablet, 3 1/4 ins. diam., 2 1/2 ins. stem, in the orig. drill hole, in concrete, in sandstone, with top now mkd. to read.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines;
T. 40 N., R. 8 E., Gila and Salt River Meridian, Az.

CHAINS	
	<p style="text-align: center;">T40N R8E S10 S11 ----- S15 S14 1959 1994</p> <p>Deposit a 1 ins. x 3/4 ins. diam. magnet beneath the brass tablet.</p>
	<p>From the 1/4 sec. cor. of secs. 2 and 11, and a cor. on the bdy of the Glen Canyon National Recreational Area, and the Page Townsite, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, to the N., with brass cap mkd. T40N R8E 1/4 S2 S11 1959. Add the marks 1994 to the brass cap and set a steel fence post alongside the iron post.</p> <p>West, on the common bdy. of the Glen Canyon National Recreational Area, and the Page Townsite.</p>
<p>19.98</p>	<p>Point for the W. 1/16 sec. cor. of secs. 2 and 11.</p> <p>Set an aluminum post, 28 ins. long, 1 ins. diam., 9 ins. in the ground, in a drill hole, in concrete, in sandstone, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T40N R8E GCNRA S2 W 1/16----- S3 1994</p> <p>Deposit a 1 in. x 3/4 ins. diam. magnet beneath the aluminum post.</p> <p>Into the Glen Canyon National Recreational Area.</p>
<p>39.96</p>	<p>The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 1 ins. diam., firmly set, in a drill hole, in sandstone, projecting 12 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd. T40N R8E S3 S2 S10 S11 1959. Add the marks 1994 to the brass cap.</p> <p>N. 0°01' E., on the line bet. secs. 2 and 3.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines;
T. 40 N., R. 8 E., Gila and Salt River Meridian, Az.

CHAINS	
40.00	<p>The 1/4 sec. cor. of secs. 2 and 3, monumented with an iron post, 1 ins. diam., firmly set, in a drill hole, in sandstone, with a mound of stone, 3 ft. base, 2 ft. high, to the W., with brass cap mkd. 1/4 T40N R8E S3 S2 1959. Add the marks 1994 to the brass cap.</p> <hr/> <p>N. 0°03' E., on the line bet. secs. 2 and 3, beginning new measurement.</p>
16.07	<p>The witness meander cor. on the left bank of the Colorado River, monumented with a drill hole, in sandstone, there is no remaining evidence of the orig. brass tablet.</p> <p>At the cor. point.</p> <p>Set a brass tablet, 3 1/2 ins. diam., 3 1/2 in. stem, in drill hole in concrete, in sandstone, with top mkd.</p> <div data-bbox="857 951 1008 1104" style="text-align: center;"> <p>T40N R8E WMC — S3 S2 1994</p> </div> <p>Deposit a 1 ins. x 3/4 ins. diam. magnet beneath the brass tablet.</p> <p>Cor. is located on the edge of the upper rim of the left bank of the Colorado River.</p> <hr/> <p>N. 0°03' E., on the line bet. secs. 2 and 3, beginning new measurement.</p> <p>Desc. over precipitous cliffs into the Glen Canyon of the Colorado River.</p>
8.30	<p>Left bank of the 1994 channelized Colorado River, course W.</p>
8.68	<p>Point for the meander cor. of secs. 2 and 3, on the left bank of the Colorado River, at proportionate distance, underwater, bears E. and W. Not monumented.</p>
15.88	<p>Point for the meander cor. of secs. 2 and 3, on the right bank of the Colorado River, at proportionate distance, identical with the right bank of the 1994 channelized Colorado River, bears E. and W. Not monumented.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines;
T. 40 N., R. 8 E., Gila and Salt River Meridian, Az.

CHAINS	
23.93	<p>Asc. over steep sandstone cliffs.</p> <p>True point for the closing cor. of secs. 2 and 3, at intersection with the Tenth Stan. Par. N., falls on an inaccessible sandstone ledge, where it is impracticable to establish a permanent monument, not monumented.</p> <p>From this cor. point, the standard 1/4 cor. of sec. 34, bears N. 89°46' W., 19.57 chs. dist., hereinbefore described.</p> <p>From this same cor. point, the witness closing cor. of secs. 2 and 3, monumented with an iron post, 1 ins. diam., firmly set, in a drill hole, in sandstone, projecting 10 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, to the S., with brass cap mkd. T41N R8E S34 S3 S2 T40N R8E WCC 1959, bears N. 0°03' E., 58 lks. dist. Add the marks 1994 to the brass cap.</p>
	<p>The point for the 1/4 sec. cor. of sec. 2, only, on the N. bdy. of the Tp., is at midpoint on the N. bdy. of sec. 2.</p> <p>Point falls on a vertical cliff, where it is impracticable to establish a permanent monument. Not monumented.</p>
	<p style="text-align: center;">Subdivision of Certain Sections, T. 40 N., R. 8 E., Gila and Salt River Mer., Az.</p>
	<p style="text-align: center;">Subdivision of Sec. 2</p>
39.99	<p>From the 1/4 sec. cor. of secs. 2 and 11, and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite.</p> <p>N. 0°04' E., on the N. and S. center line of sec. 2.</p> <p>The center 1/4 sec. cor. of sec. 2, and a cor. on the bdy. of the Glen Canyon National Recreational Area, and the Page Townsite, at intersection with the E. and W. center line of sec. 2.</p> <p>Set an aluminum post, 28 ins. long, 1 ins. diam., 9 ins. in the ground, in a drill hole, in concrete, in sandstone, encircled with a collar of stone, with brass cap mkd.</p>

Subdivision of Certain Sections,
T. 40 N., R. 8 E., Gila and Salt River Meridian, Az.

CHAINS	
	<p style="text-align: center;">T40N R8E GCNRA C 1/4 S2 1994</p>
79.93	<p>Deposit a 1 ins. x 3/4 ins. diam. magnet beneath the aluminum post.</p> <p>The 1/4 sec. cor. of sec. 2 only, at intersection with the Tenth Stan. Par. N.</p>
40.01	<p>From the 1/4 sec. cor. of secs. 1 and 2.</p> <p>West, on the E. and W. center line of sec. 2, on the common bdy. of the Glen Canyon National Recreational Area, and the Page Townsite.</p> <p>The center 1/4 sec. cor. of sec. 2.</p>
60.01	<p>Point for the center W. 1/16 sec. cor. of sec. 2.</p> <p>Set an aluminum post, 28 ins. long, 1 ins. diam., 9 ins. in the ground, in a drill hole, in concrete, in sandstone, encircled with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">G T40N R8E C W 1/16 N C—————C R S2 A 1994</p>
80.01	<p>Deposit a 1 ins. x 3/4 ins. diam. magnet beneath the aluminum post.</p> <p>The 1/4 sec. cor. of secs. 2 and 3.</p> <p style="text-align: center;">SW 1/4 of Sec. 2</p>
39.99	<p>From the W. 1/16 sec. cor. of secs. 2 and 11.</p> <p>N. 0°03' E., on the N. and S. center line of the SW 1/4 of sec. 2.</p> <p>The center W. 1/16 sec. cor. of sec. 2.</p>

Subdivision of Certain Sections,
T. 40 N., R. 8 E., Gila and Salt River Mer., Az.

CHAINS	
	<p>Subdivision of Sec. 11</p> <hr/>
	<p>From the 1/4 sec. cor. of secs. 11 and 14.</p> <p>N. 0° 03' E., on the N. and S. center line of sec. 11, common with the bdy. bet. Glen Canyon National Recreation Area and the Page Townsite.</p>
12.37	<p>Point for a witness point on the N. and S. center line of sec. 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T40N R8E C S 11 GCNRA PTS C 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the stainless steel post.</p>
13.10	<p>Trail road, bears E. and W.</p>
21.63	<p>Point for a witness point on the N. and S. center line of sec. 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T40N R8E C S 11 GCNRA PTS C 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the stainless steel post.</p>

Subdivision of Section 11 on a Portion of the
 Glen Canyon National Recreation Area Boundary,
 T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona

CHAINS	
29.56	<p>Point for a witness point on the N. and S. center line of sec. 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T40N R8E C S 11 GCNRA PTS C 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the stainless steel post.</p>
45.30	<p>Point for a witness point on the N. and S. center line of sec. 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T40N R8E C S 11 GCNRA PTS C 1994</p> </div> <p>Deposit five No. 60d nails beneath the stainless steel post.</p> <p>Set a steel fence post alongside the stainless steel post.</p>
74.08	<p>Point for a witness point on the N. and S. center line of sec. 11.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the surface of sandstone bedrock, over an "X" chiseled in sandstone, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p>

Subdivision of Certain Sections,
T. 40 N., R. 8 E., Gila and Salt River Meridian, Az.

CHAINS	
80.01	<div data-bbox="808 359 992 575" data-label="Text"> <p style="text-align: center;">WP T40N R8E C S 11 GCNRA PTS C 1994</p> </div> <div data-bbox="399 611 1357 674" data-label="Text"> <p>The 1/4 sec. cor. of secs. 2 and 11, on the bdy. of the Glen Canyon National Recreation Area and the Page Townsite.</p> </div> <hr/> <div data-bbox="764 737 1068 766" data-label="Section-Header"> <p style="text-align: center;">GENERAL DESCRIPTION</p> </div> <div data-bbox="399 800 1373 894" data-label="Text"> <p>The land encompassed in this survey is located about 3 miles southwesterly of the town of Page, Arizona. Elevation ranges from about 3100 to 4000 ft. above sea level</p> </div> <div data-bbox="399 926 1019 957" data-label="Text"> <p>Access is provided by U.S. Highway 89A.</p> </div> <div data-bbox="399 989 1438 1150" data-label="Text"> <p>The completion of the Glen Canyon Dam in the 1960's has created a fixed channel below the dam for the Colorado River. Water levels of the river are controlled by the operators of the dam at the present time, and are a factor of hydro-electric power needs. The land is generally vast and open, with very little timber.</p> </div> <div data-bbox="399 1182 857 1213" data-label="Text"> <p>No mining activity was noted.</p> </div> <div data-bbox="399 1245 1438 1308" data-label="Text"> <p>The principal use of the area is recreational with some livestock grazing in evidence.</p> </div>

CERTIFICATE OF SURVEY

I, Stephen K. Hansen, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 9th day of May, 1994, and Supplemental Special Instructions bearing date of the 18th day of May, 1994, I have dependently resurveyed a portion of the Tenth Standard Parallel North through Range 8 East, a portion of the subdivisional lines, and the subdivision of certain sections, in Township 40 North, Range 8 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

2/08/1995

(Date)

Stephen K. Hansen

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the Tenth Standard Parallel North through Range 8 East, a portion of the subdivisional lines, and the subdivision of certain sections, in Township 40 North, Range 8 East, Gila and Salt River Meridian, Arizona, executed by Stephen K. Hansen, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

FEB 08 1995

(Date)

Lenny A. Tallet

(Acting Chief Cadastral Surveyor of Arizona)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 40 N., R. 8 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

(Date)

(Acting Chief Cadastral Surveyor of Arizona)