

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY OF

THE SEVENTH AUXILIARY GUIDE MERIDIAN EAST, (EAST BOUNDARY)

THE SOUTH BOUNDARY, THE WEST BOUNDARY, THE NORTH BOUNDARY,

AND A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTION 2,

A METES-AND-BOUNDS SURVEY,

AND AN INFORMATIVE TRAVERSE

IN

TOWNSHIP 18 NORTH, RANGE 28 EAST,

Of the Gila and Salt River Meridian,

In the State of Arizona

EXECUTED BY

William P. Carpender and Stephen K. Hansen, Cadastral Surveyors

Under Special Instructions dated Jan. 12, 1987, approved Feb. 17, 1987, and Supplemental Special Instructions dated Feb. 29, 1988, approved Feb. 29, 1988, which provided for the surveys included under Group Number 686, and assignment instructions dated July 11, 1988, and April 18, 1990.


Survey Commenced June 18, 1991

Survey Completed Nov. 11, 1993

BOOK 5429

INDEX DIAGRAM

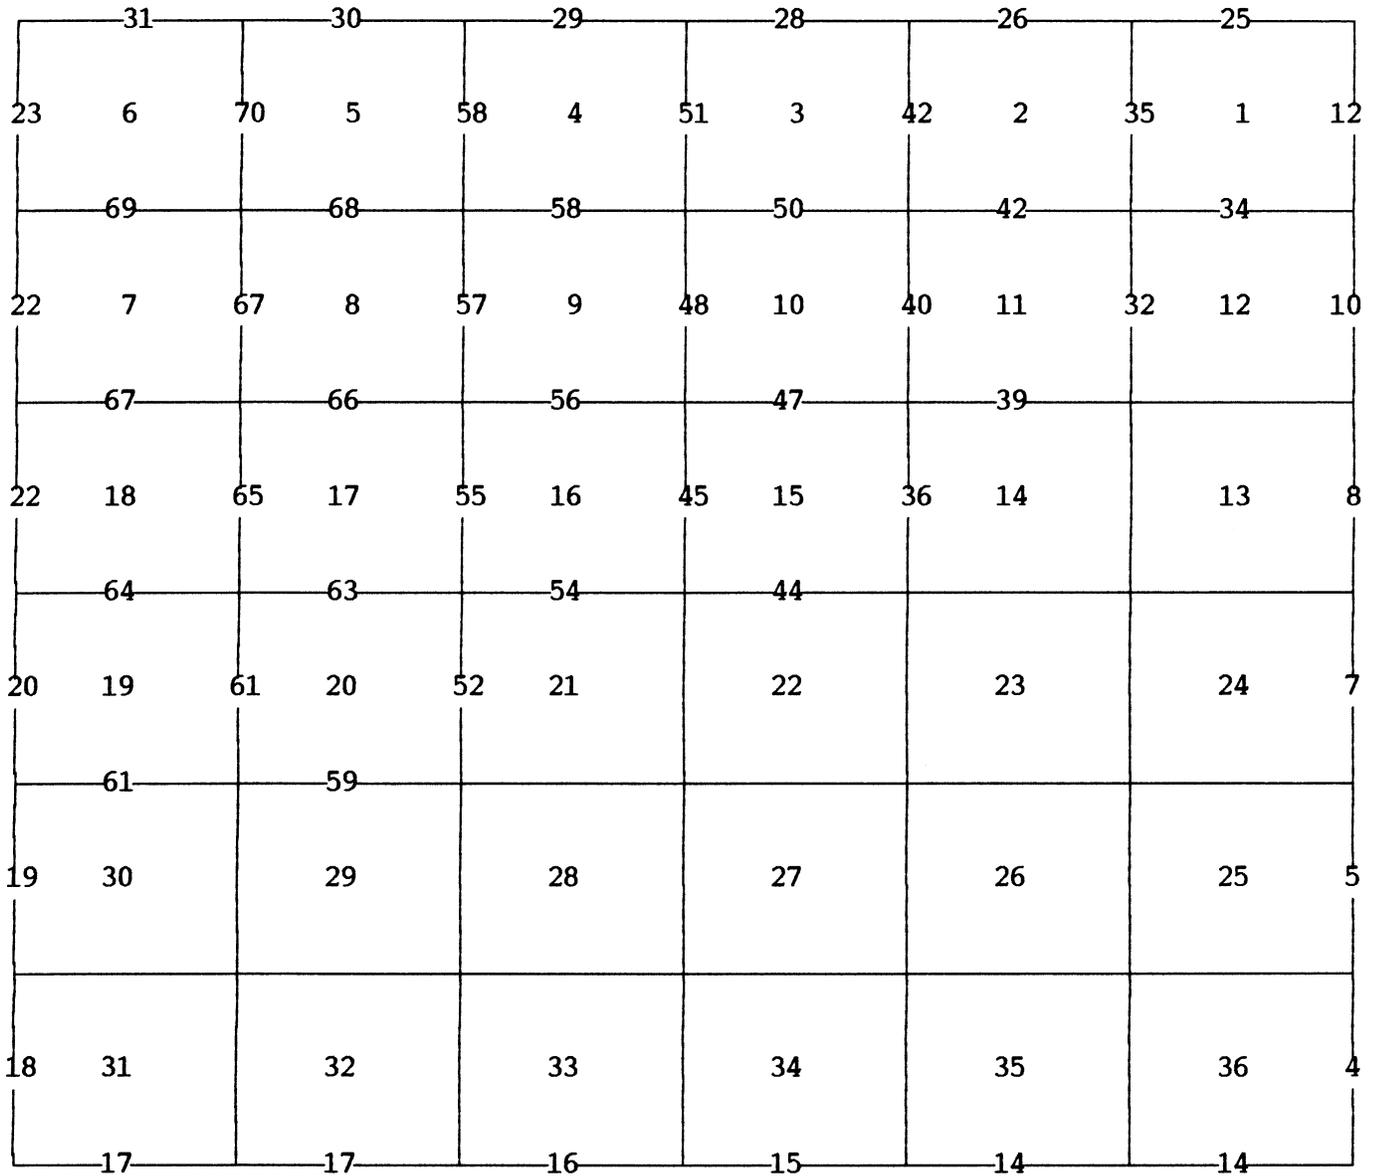TOWNSHIP 18 NORTH, RANGE 28 EAST,



Subdivision Section 2
Metes-and-Bounds Survey
Informative Traverse

pp. 71-74
pp. 74-88; 91-93
pp. 88-91

BOOK 5429

T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of the Seventh Auxiliary Guide Meridian East (east boundary), the south boundary, the west boundary, the north boundary, and a portion of the subdivisional lines, the subdivision of section 2, a metes-and-bounds survey, and an informative traverse, Township 18 North, Range 28 East, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this resurvey is as follows: The township boundaries and subdivisional lines were surveyed by Henry A. Coe in 1882. The south boundary was dependently resurveyed by Boyd S. Owens, Kenneth D. Herman, and Howard H. Thomas in 1966.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated January 12, 1987, and the Supplemental Special Instructions dated February 29, 1988, for Group No. 686, Arizona.

The purpose of the survey was to determine a portion of the Navajo-Hopi Indian Relocation Commission (NHIRC) boundary.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by reference to a network established by the technique of relative positioning using an Ashtech GPS Geodetic System, confirmed by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with Zeiss, Topcon, Lietz, and Sokkia total station instruments.

The geographic position of the southeast corner of the township was determined by the technique of differential positioning using an Ashtech MXII Geodetic Positioning System. U.S.G.S. triangulation stations BEACON 54 B and DEAD were used as the control stations. Coordinates refer to the top of the monument.

Latitude 34°54'28.51" N. Longitude 109°18'50.00" W. NAD 27

The mean magnetic declination as taken from quadrangle map FAIRCHILD WELL, ARIZ., published in 1979 by U.S. Geological Survey, is 13° E.

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by Henry A. Coe, in 1882</p> <hr style="width: 20%; margin: auto;"/>
	<p>Beginning at the cor. of Tps. 17 and 18 N., Rs. 28 and 29 E., monumented with an iron post, 2 1/2 ins. diam, firmly set, projecting 2 ins. above ground, with brass cap mkd. T18N R28E R29E S36 S31 S1 S6 T17N 1966.</p>
	<p>Add the marks 1993 to the brass cap.</p>
	<p>Cor. is located in a fence, bears N. and S., 8 lks. N. of a cor. of fences extending E., S., and W.</p>
	<p>N. 0°45' E., bet. secs. 31 and 36, on the E. bdy. of the Tp.</p>
	<p>Ascend gradually, over rolling land, through dense Juniper.</p>
4.90	<p>Fence, bears SSE and NNW.</p>
6.25	<p>Graded road, 25 lks. wide, bears SSE and NNW.</p>
23.04	<p>Point for a witness point on line bet. secs. 31 and 36.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> WP T18N R28E R29E S36 S31 1993 </div>
	<p>Set a steel fence post alongside the witness point.</p>
39.05	<p>The 1/4 sec. cor. of secs. 31 and 36, monumented with a hewn juniper post, 52 ins. long, 4 ins. diam., laying loose on the ground, mkd. with two axed flat surfaces.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center; margin: 10px 0;"> T18N 1/4 R28E R29E S36 S31 1993 </div>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the E. edge of a graded dirt road, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°13' W., beginning new measurement.</p>
22.08	<p>Point for a witness point on line bet. secs. 31 and 36.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> WP T18N R28E R29E S36 S31 1993 </div> <p>Set a steel fence post alongside the witness point.</p>
40.17	<p>The cor. of secs. 25, 30, 31, and 36, monumented with a juniper post, 50 ins. long, 4 ins. diam., laying loose on the ground, mkd. with illegible scribe marks.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> T18N R28E R29E S25 S30 <hr style="width: 20%; margin: 0 auto;"/> S36 S31 1993 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0°06' E., bet. secs. 25 and 30, on the E. bdy. of the Tp.</p>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
18.31	<p>Ascend gradually, over rolling land, through dense Juniper.</p> <p>Point for a witness point on line bet. secs. 25 and 30.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R28E R29E S25 S30 1993</p> </div>
39.79	<p>Set a steel fence post alongside the witness point.</p> <p>Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R28E R29E S25 S30 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
51.81	<p>Point for a witness point on line bet. secs. 25 and 30.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R28E R29E S25 S30 1993</p> </div> <p>Set a steel fence post alongside the witness point.</p>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

<p>CHAINS 79.58</p>	<p>The cor. of secs. 19, 24, 25, and 30, monumented with a juniper post, 56 ins. long, 4 ins. diam., firmly set, projecting 40 ins. above the ground, mkd. with illegible scribe marks on the S. and W. faces, with an iron pipe, 37 ins. long, 2 1/2 ins. diam., firmly set alongside, projecting 12 ins. above the ground, mkd. USA on the N. side.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T18N</td></tr> <tr><td style="text-align: center;">R28E</td><td style="text-align: center;">R29E</td></tr> <tr><td style="text-align: center;">S24</td><td style="text-align: center;">S19</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S25</td><td style="text-align: center;">S30</td></tr> <tr><td colspan="2" style="text-align: center;">1991</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. post and the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>	T18N		R28E	R29E	S24	S19	-----		S25	S30	1991	
T18N													
R28E	R29E												
S24	S19												

S25	S30												
1991													
<p>30.80</p>	<p>N. 0°11' E., bet. secs. 19 and 24, on the E. bdy. of the Tp.</p> <p>Ascend gradually, over rolling land, through dense Juniper.</p> <p>End ascent; thence over nearly level, rolling land, through dense juniper, with scattered piñon.</p>												
<p>31.37</p>	<p>Point for a witness point on line bet. secs. 19 and 24.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 23 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">WP</td></tr> <tr><td colspan="2" style="text-align: center;">T18N</td></tr> <tr><td style="text-align: center;">R28E</td><td style="text-align: center;">R29E</td></tr> <tr><td style="text-align: center;">S24</td><td style="text-align: center;">S19</td></tr> <tr><td colspan="2" style="text-align: center;">1992</td></tr> </table> <p>Set a steel fence post alongside the witness point.</p>	WP		T18N		R28E	R29E	S24	S19	1992			
WP													
T18N													
R28E	R29E												
S24	S19												
1992													
<p>36.90</p>	<p>Fence, bears NE and SW.</p>												

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

<p>CHAINS 39.91</p>	<p>Point for the 1/4 sec. cor. of secs. 19 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R28E R29E S24 S19 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
<p>79.82</p>	<p>The cor. of secs. 13, 18, 19, and 24, monumented with an iron pipe, 42 ins. long, 2 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, mkd. USA, with a decayed wood post, 26 ins. long, 3 ins. diam., mkd. with axe marks, wired to the iron pipe.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R28E R29E S13 S18 ----- S24 S19 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and the orig. post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
<p>16.84</p>	<p>N. 0°23' E., bet. secs. 13 and 18, on the E. bdy. of the Tp.</p> <p>Over nearly level, rolling land, through dense juniper, with scattered piñon.</p> <p>Point for a witness point on line bet. secs. 13 and 18.</p>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R28E R29E S13 S18 1992</p> <p>Set a steel fence post alongside the witness point.</p>
39.61	<p>The 1/4 sec. cor. of secs. 13 and 18, monumented with a juniper post, 48 ins. long, 3 ins. diam., loosely set, projecting 31 ins. above the ground, mkd. with a squared face, with a juniper post alongside, 48 ins. long, 5 ins. diam., firmly set, projecting 27 ins. above the ground, mkd. 1/4 on the SE face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N 1/4 R28E R29E S13 S18 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. post and the guard post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 220 lks. E. of a graded dirt road, 25 lks. wide, bears N. and S.</p> <p style="text-align: center;">_____</p> <p>N. 0°09' E., beginning new measurement.</p>
11.57	<p>Point for a witness point on line bet. secs. 13 and 18.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 23 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
40.00	<div style="text-align: center;"> <p>WP T18N R28E R29E S13 S18 1992</p> </div> <p>Set a steel fence post alongside the witness point.</p> <p>The cor. of secs. 7, 12, 13, and 18, monumented with an iron pipe, 42 ins. long, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, of unknown origin. This has long been utilized as the cor. by the local land owners, and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R28E R29E S12 S 7 ----- S13 S18 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 50 lks. E. of an intersection of dirt roads bearing N., S., and W.</p> <hr/> <p>N. 0°39' E., bet. secs. 7 and 12, on the E. bdy. of the Tp.</p> <p>Over nearly level, rolling land, through dense juniper, with scattered piñon.</p>
13.17	<p>Point for a witness point on line bet. secs. 7 and 12.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T18N R28E R29E S12 S 7 1992</p> <p>Set a steel fence post alongside the witness point.</p>
39.95	<p>Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N 1/4 R28E R29E S12 S 7 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., a local lot cor., monumented with an iron pipe, 1 in. diam., projecting 3 ins. above the ground, bears N. 84°47' W., 48 lks. dist.</p>
65.63	<p>Point for a witness point on line bet. secs. 7 and 12.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 23 ins. in the ground, with brass cap mkd.</p>
79.90	<p style="text-align: center;">WP T18N R28E R29E S12 S 7 1992</p> <p>Set a steel fence post alongside the witness point.</p> <p>The cor. of secs. 1, 6, 7, and 12, monumented with an iron pipe, 33 ins. long, 1 5/8 ins. diam., firmly set, projecting 7 ins. above the ground, of unknown origin. This has long been utilized as the cor. by the local land owners, and is accepted as the best available evidence of the orig. cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS													
	<div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T18N</td></tr> <tr><td>R28E</td><td>R29E</td></tr> <tr><td>S 1</td><td>S 6</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S12</td><td>S 7</td></tr> <tr><td colspan="2">1991</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 75 lks. E. of a graded road, bears NNE and SSW.</p> <hr/> <p>N. 0°12' E., bet. secs. 1 and 6.</p> <p>Over nearly level, rolling land, through dense juniper, with scattered piñon.</p>	T18N		R28E	R29E	S 1	S 6	<hr/>		S12	S 7	1991	
T18N													
R28E	R29E												
S 1	S 6												
<hr/>													
S12	S 7												
1991													
39.95	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with an iron pipe, 17 ins. long, 1 in. diam., firmly set, 3 ins. below the ground, with a hewn juniper post, 36 ins. long, 3 ins. diam., laying loosely nearby. This has long been utilized as the cor. by the local land owners, and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 40 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T18N</td></tr> <tr><td colspan="2">1/4</td></tr> <tr><td>R28E</td><td>R29E</td></tr> <tr><td>S 1</td><td>S 6</td></tr> <tr><td colspan="2">1991</td></tr> </table> </div> <p>from which</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 23 ins. in the ground, for a reference monument, bears N. 53°58' E., 41.0 ft. dist., with cap mkd. RM T18N R29E 1/4 S6 41.0 FT TO COR 1991, and an arrow pointing to the cor.</p>	T18N		1/4		R28E	R29E	S 1	S 6	1991			
T18N													
1/4													
R28E	R29E												
S 1	S 6												
1991													

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS									
	<p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 23 ins. in the ground, for a reference monument, bears N. 44°05' W., 46.6 ft. dist., with cap mkd. RM T18N R28E 1/4 S1 46.6 FT TO COR 1991, and an arrow pointing to the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside the stainless steel post, and remove the orig. post, impracticable to bury in the road bed.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located below the surface of a graded dirt road, 25 lks. wide, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°19' E., beginning new measurement.</p>								
16.89	<p>Point for a witness point on line bet. secs. 1 and 6.</p> <p>Set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table border="0"> <tr><td>WP</td></tr> <tr><td>T18N</td></tr> <tr><td>R28E R29E</td></tr> <tr><td>S 1 S 6</td></tr> <tr><td>1992</td></tr> </table> </div> <p>Set a steel fence post alongside the witness point.</p>	WP	T18N	R28E R29E	S 1 S 6	1992			
WP									
T18N									
R28E R29E									
S 1 S 6									
1992									
39.94	<p>The cor. of Tps. 18 and 19 N., Rs. 28 and 29 E., monumented with an iron pipe, 42 ins. long, 2 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, of unknown origin. This has long been utilized as the cor. by the local land owners, and is accepted as the best available evidence of the orig. cor. position.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table border="0"> <tr><td>T19N</td></tr> <tr><td>R28E R29E</td></tr> <tr><td>S36 S31</td></tr> <tr><td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>S 1 S 6</td></tr> <tr><td>T18N</td></tr> <tr><td>1991</td></tr> </table> </div>	T19N	R28E R29E	S36 S31	<hr style="width: 50%; margin: 0 auto;"/>		S 1 S 6	T18N	1991
T19N									
R28E R29E									
S36 S31									
<hr style="width: 50%; margin: 0 auto;"/>									
S 1 S 6									
T18N									
1991									

BOOK 5429

Dependent Resurvey of the Seventh Auxiliary Guide Mer. East,
Through Township 18 North, Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 4 ft. base, 2 1/2 ft. high, S. of cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
	<p style="text-align: center;">Dependent Resurvey of the South Boundary, T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona</p>
	<p style="text-align: center;">Restoring the resurvey executed by Boyd S. Owens, et al, in 1966</p>
	<p>From the cor. of Tps. 17 and 18 N., Rs. 28 and 29 E., hereinbefore described.</p>
	<p>S. 89°49' W., bet. secs. 1 and 36, on the S. bdy. of the Tp.</p> <p>Over gently rolling land, along a fence.</p>
39.54	<p>The 1/4 sec. cor. of secs. 1 and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. T18N R28E 1/4 S36 S1 T17N 1966.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located 8 lks. S. of a fence, bears E. and W.</p>
	<p style="text-align: center;">S. 89°50' W., beginning new measurement.</p>
39.60	<p>The cor. of secs. 1, 2, 35, and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T18N R28E S35 S36 S2 S1 T17N 1966.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p>
	<p style="text-align: center;">S. 89°51' W., bet. secs. 2 and 35, on the S. bdy. of the Tp.</p>
	<p>Over gently rolling land, along a fence.</p>

BOOK 5429

Dependent Resurvey of the South Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 39.58</p>	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. T18N R28E 1/4 S35 S2 T17N 1966, with a cedar post, 5 ins. diam., projecting 15 ins. above the ground, set alongside.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <hr/> <p>S. 89°48' W., beginning new measurement.</p>
<p>39.59</p>	<p>The cor. of secs. 2, 3, 34, and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. T18N R28E S34 S35 S3 S2 T17N 1966, with a cedar post, 3 ins. diam., projecting 17 ins. above the ground, set alongside.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <hr/> <p>S. 89°50' W., bet. secs. 3 and 34, on the S. bdy. of the Tp.</p> <p>Over gently rolling land, along a fence.</p>
<p>39.58</p>	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S34 1/4 — S 3 T17N 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 2 lks. N. of a fence, bears E. and W.</p>

BOOK 54 29

Dependent Resurvey of the South Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 79.16</p>	<p>The cor. of secs. 3, 4, 33, and 34, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. T18N R28E S33 S34 S4 S3 T17N 1966, with a cedar post, 3 ins. diam., projecting 22 ins. above the ground, set alongside.</p> <p>from which</p> <p>A local cor. bears S. 25°38' E., 3.56 chs. dist., monumented with a squared cedar post, 40 ins. long, 3 ins. diam., with illegible scribe marks, wired to an iron pipe, 1 1/2 ins. diam., firmly set, projecting 26 ins. above the ground (1966 Record: S. 29°45' E., 3.55 chs. dist.).</p> <p>A local cor. bears N. 72°21' W., 4.99 chs. dist., monumented with an old squared wooden post, 6 ins. diam., projecting 58 ins. above the ground (1966 Record: N. 77°04' W., 4.98 chs. dist.).</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p>
<p>39.59</p>	<p>S. 89°50' W., bet. secs. 4 and 33, on the S. bdy. of the Tp.</p> <p>Over gently rolling land, along a fence.</p> <p>The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. T18N R28E 1/4 S33 S4 T17N 1966, with a cedar post, 4 ins. diam., projecting 36 ins. above the ground, set alongside.</p> <p>from which</p> <p>A juniper, 9 ins. diam., bears N. 9 3/4° E., 69 lks. dist., mkd. BTX (1966 Record: N. 5° E.).</p> <p>The SE bearing tree destroyed by road construction.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <p>S. 89°52' W., beginning new measurement.</p>

BOOK 5429

Dependent Resurvey of the South Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 39.58</p>	<p>The cor. of secs. 4, 5, 32, and 33, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. T18N R28E S32 S33 S5 S4 T17N 1966.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <hr/>														
	<p>S. 89°51' W., bet. secs. 5 and 32, on the S. bdy. of the Tp.</p> <p>Over gently rolling land, along a fence.</p>														
<p>39.59</p>	<p>The 1/4 sec. cor. of secs. 5 and 32, monumented with an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. T18N R28E 1/4 S32 S5 T17N 1966, with a cedar post, 1 1/2 ins. diam., projecting 12 ins. above the ground, set alongside.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <hr/>														
	<p>S. 89°53' W., beginning new measurement.</p>														
<p>39.57</p>	<p>The cor. of secs. 5, 6, 31, and 32, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above the ground, with brass cap erroneously mkd. T17N R28E S31 S32 S6 S5 T17N 1966, with a cedar post, 3 ins. diam., projecting 17 ins. above the ground, set alongside.</p> <p>Remark the brass cap, and add the date to read</p>														
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2">T18N R28E</td> </tr> <tr> <td>S31</td> <td>S32</td> </tr> <tr> <td colspan="2"><hr/></td> </tr> <tr> <td>S 6</td> <td>S 5</td> </tr> <tr> <td colspan="2">T17E</td> </tr> <tr> <td colspan="2">1993</td> </tr> <tr> <td colspan="2">1966</td> </tr> </table>	T18N R28E		S31	S32	<hr/>		S 6	S 5	T17E		1993		1966	
T18N R28E															
S31	S32														
<hr/>															
S 6	S 5														
T17E															
1993															
1966															
	<p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <hr/>														
	<p>S. 89°53' W., bet. secs. 6 and 31, on the S. bdy. of the Tp.</p> <p>Over gently rolling land, along a fence.</p>														

BOOK 5429

Dependent Resurvey of the South Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
0.25	Dirt road, 25 lks. wide, bears SSE and NNW.
39.59	<p>The 1/4 sec. cor. of secs. 6 and 31, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T18N R28E 1/4 S31 S6 T17N 1966, with a cedar post, 4 ins. diam., projecting 24 ins. above the ground, set alongside.</p> <p>Add the marks 1993 to the brass cap.</p> <p>The cor. is located in a fence, bears E. and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and W.</p> <hr/> <p>S. 89°46' W., beginning new measurement.</p>
39.47	<p>The cor. of Tps. 17 and 18 N., Rs. 27 and 28 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. T18N R27E R28E S36 S31 S1 S6 T17N 1966, with a cedar post, 30 ins. long, 4 ins. diam., laying alongside.</p> <p>from which</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 22 ins. in the ground, for a reference monument, bears N. 86°37' E., 33.3 ft. dist., with cap mkd. RM T18N R28E S31 33.3 FT TO COR 1991, and an arrow pointing to the cor.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 22 ins. in the ground, for a reference monument, bears N. 30°23' W., 44.5 ft. dist., with cap mkd. RM T18N R27E S36 44.5 FT TO COR 1991, and an arrow pointing to the cor.</p> <p>Add the marks 1991 to the brass cap.</p> <p>The cor. is located at an intersection of fences bearing NE, E., and W., and on the N. side of a gravel road, 50 lks. wide, bears E. and S.</p> <hr/> <p>Dependent Resurvey of the West Boundary, T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Restoring the survey executed by Henry A. Coe, in 1882</p> <hr/>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.07	<p>From the cor. of Tps. 17 and 18 N., Rs. 27 and 28 E.</p> <p>N. 0°04' E., bet. secs. 31 and 36, on the W. bdy. of the Tp.</p> <p>Over rolling land, through moderate juniper, along a fence and track road.</p> <p>Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R27E R28E S36 S31 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 10 lks. E. of a fence, bears N. and S.</p>
80.14	<p>Point for the cor. of secs. 25, 30, 31, and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E R28E S25 S30 ----- S36 S31 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 8 lks. E. of a fence, bears N. and S.</p> <hr/> <p>N. 0°04' E., bet. secs. 25 and 30, on the W. bdy. of the Tp.</p> <p>Over rolling land, through moderate juniper, along a fence and track road.</p>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 40.07</p>	<p>Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R27E R28E S25 S30 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located 6 lks. E. of a fence, bears N. and S.</p> <p>From this cor., a cor. of fences bearing N., E., and S., bears N. 5 1/2° W., 63 lks. dist.</p>
<p>80.14</p>	<p>The cor. of secs. 19, 24, 25, and 30, monumented with an iron pipe, 41 ins. long, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with a brass cap mkd. 1975 T18N 19 30 R28E LS 9430, perpetuated by Sam Kuder, R.L.S. 9430, in 1975, with the decayed remnants of a squared juniper post, 46 ins. long, 4 ins. diam., laying loose on the ground and buried alongside. This is accepted as a careful and faithful perpetuation of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E R28E S24 S19 ----- S25 S30 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe and the remnants of the orig. post alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located at a cor. of fences bearing N., E., and S., and on the W. edge of a track road, 15 lks. wide, bears N. and S.</p>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 0°31' E., bet. secs. 19 and 24, on the W. bdy. of the Tp.</p> <p>Over rolling land which has been cleared and burned, through scattered juniper, dense sagebrush and bunchgrass, along a fence and track road.</p> <p>39.49 Point for the 1/4 sec. cor. of secs. 19 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R27E R28E S24 S19 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 25 lks. E. of a fence, bears N. and S., and 33 lks. NNE of an intersection of track roads bearing N., E., and S.</p> <p>From this cor. point, a rebar, 1/2 ins. diam., firmly set, flush with the surface of ground, bears S. 69°17' E., 47 lks. dist.</p>
78.98	<p>The cor. of secs. 13, 18, 19, and 24, monumented with an iron pipe, 35 ins. long, 2 1/2 ins. diam., firmly set, projecting 13 ins. above ground, with a brass cap mkd. 1975 T18N 18 19 R28E LS 9430, perpetuated by Sam Kuder, R.L.S. 9430, in 1975, and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E R28E S13 S18 ----- S24 S19 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 1 lk. S. of a fence, bears E. and W.</p> <hr/> <p>N. 0°06' E., bet. secs. 13 and 18, on the W. bdy. of the Tp.</p> <p>Over rolling land which has been cleared and burned, through scattered juniper, dense sagebrush and bunchgrass.</p> <p>39.58 Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R27E R28E S13 S18 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Set a steel fence post alongside the cor.</p>
79.16	<p>Point for the cor. of secs. 7, 12, 13, and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E R28E S12 S 7 ----- S13 S18 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr/>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.58	<p>N. 0°06' E., bet. secs. 7 and 12, on the W. bdy. of the Tp.</p> <p>Over rolling land which has been cleared and burned, through scattered juniper, dense sagebrush and bunchgrass.</p> <p>Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R27E R28E S12 S 7 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in a juniper grove.</p>
79.16	<p>Point for the cor. of secs. 1, 6, 7, and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E R28E S 1 S 6 ----- S12 S 7 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>N. 0°06' E., bet. secs. 1 and 6, on the W. bdy. of the Tp.</p> <p>Over rolling land which has been cleared and burned, through scattered juniper, dense sagebrush and bunchgrass.</p>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 39.58</p>	<p>Point for the 1/4 sec. cor. of secs. 1 and 6, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R27E R28E S 1 S 6 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the S. edge of a juniper grove.</p>
<p>71.00</p>	<p>Puerco Rim, bears E. and W.; thence descend steep, eroded, N. slope.</p>
<p>79.16</p>	<p>The cor. of Tps. 18 and 19 N., Rs. 27 and 28 E., monumented with an old, well imbedded mound of stone, 36 ins. diam., flush with the surface of ground.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, in the center of the orig. mound of stone, over a steel fence post driven into the ground, supported in a mound of stone, 3 ft. diam., to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R27E R28E S36 S31 ----- S 1 S 6 T18N 1992</p> </div> <p>from which</p> <p style="text-align: center;">A juniper, 8 ins. diam., bears N. 57 3/4° E., 26 1/2 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>

BOOK 5429

Dependent Resurvey of the West Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a small spur, slopes WSW, on steep, eroded, N. facing cliff of the Puerco Rim.</p> <p>From this cor. point, U.S. Coast and Geodetic Survey triangulation station, "REESE 1936", with published latitude of 34°59'35.900" N. and longitude of 109°24'44.594" W., NAD27, bears S. 80°28.5' E., 26.30 chs. dist., monumented with a standard brass tablet, set in a concrete cylinder, 12 ins. diam., firmly set, with top mkd. REESE 1936 and a triangle.</p>
	<p>Dependent Resurvey of the North Boundary, T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona</p>
	<p>Restoring the survey executed by Henry A. Coe, in 1882</p>
	<p>From the cor. of Tps. 18 and 19 N., Rs. 28 and 29 E., hereinbefore described.</p> <p>S. 89°56' W., bet. secs. 1 and 36, on the N. bdy. of the Tp.</p> <p>Ascend gradually, over rolling land, through scattered juniper.</p>
20.02	<p>Point for the E. 1/16 sec. cor. of secs. 1 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R28E S36 E 1/16 — S 1 T18N 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
24.76	<p>Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.</p>
40.04	<p>Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R28E S36 1/4 — S 1 T18N 1991</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
43.00	<p>Puerco Rim, bears NE and SW.; thence descend steep, eroded NW slope.</p>
80.08	<p>Point for the cor. of secs. 1, 2, 35, and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. diam., to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R28E S35 S36 — — S 2 S 1 T18N 1991</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post alongside the cor.</p>
	<hr/> <p>S. 89°56' W., bet. secs. 2 and 35, on the N. bdy. of the Tp.</p>
	<p>Continue descent of steep NW slope of Puerco Rim, bears ENE and WSW.</p>
2.30	<p>End steep descent; thence over rolling, broken land, through scattered juniper.</p>
25.50	<p>Wash, 20 lks. wide, course NNE.</p>
30.30	<p>Wash, 30 lks. wide, course NNE.</p>
34.00	<p>Spur, slopes NNE.</p>
40.04	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented with a sandstone, 21 x 21 x 9 ins., laying loose on the ground, mkd. 4 on a face.</p>

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R28E S35 1/4 — S 2 T18N 1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 30 ins. diam., bears N. 74° E., 228 lks. dist., mkd. 1/4S35BT.</p> <p style="padding-left: 40px;">A juniper, 3 ins. diam., bears S. 46 3/4° W., 132 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. stone alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°38' W., beginning new measurement.</p>
39.00	Graded dirt road, 12 lks. wide, bears ENE and WSW.
40.29	<p>The cor. of secs. 2, 3, 34, and 35, monumented with a shattered sandstone, 9 x 9 x 6 ins., laying loose on the ground, with a juniper post, 26 ins. long, 4 ins. diam., laying alongside.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R28E S34 S35 — — S 3 S 2 T18N 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. stone and the juniper post alongside the stainless steel post.</p>

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Set a steel fence post alongside the cor.</p>
	<p>N. 89°45' W., bet. secs. 3 and 34, on the N. bdy. of the Tp. Over rolling land, through scattered juniper.</p>
40.23	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the orig. cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R28E S34 1/4 — S 3 T18N 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Set a steel fence post alongside the cor.</p>
63.20	Track road, 12 lks. wide, bears SSE and NNW.
80.46	<p>The cor. of secs. 3, 4, 33, and 34, monumented with a squared juniper post, 36 ins. long, 4 ins. diam., firmly set, projecting 19 ins. above the ground, with no visible marks. At the cor. point Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19N R28E S33 S34 — — S 4 S 3 T18N 1991</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post. Bury the orig. post alongside the stainless steel post.</p>

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Set a steel fence post alongside the cor.</p> <hr/>
	<p>N. 89°10' W., bet. secs. 4 and 33, on the N. bdy. of the Tp. Over rolling land, through scattered juniper.</p>
37.25	Wash, 150 lks. wide, 15 ft. deep, course NE.
40.05	<p>The 1/4 sec. cor. of secs. 4 and 33, monumented with a weathered sandstone, 13 x 9 x 6 ins., laying loose on the ground, with no marks visible. This is the only stone in the immediate area, is harmoniously related to the topographic calls of the record and other orig. monuments nearby, and is accepted as the best available evidence of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R28E S33 1/4 — S 4 T18N 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. stone alongside the stainless steel post.</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor. Set a steel fence post alongside the cor.</p> <hr/>
	<p>N. 89°44' W., beginning new measurement.</p>
24.00	Spur, slopes N.
32.40	Wash, 15 lks. wide, course NW.
36.90	Ridge, bears N. and S.
39.81	<p>The cor. of secs. 4, 5, 32, and 33, monumented with a weathered sandstone, 18 x 10 x 3, firmly set, projecting 15 ins. above the ground, mkd. with faint notches on sandstone remnants alongside, and in a well-imbedded mound of stone, 2 ft. diam.</p>

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="841 451 990 640"> <tr> <td>T19N</td> <td>R28E</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> <tr> <td>S 5</td> <td>S 4</td> </tr> <tr> <td colspan="2">T18N</td> </tr> <tr> <td colspan="2">1992</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. stone and the remnants alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in moderate juniper, on a W. slope.</p>	T19N	R28E	S32	S33	S 5	S 4	T18N		1992			
T19N	R28E												
S32	S33												
S 5	S 4												
T18N													
1992													
	<p>S. 88°35' W., bet. secs. 5 and 32, on the N. bdy. of the Tp.</p>												
	<p>Over rolling land, through moderate juniper.</p>												
36.00	<p>Wash, 150 lks. wide, course NE.</p>												
39.17	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>												
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>												
	<table border="1" data-bbox="841 1438 990 1627"> <tr> <td>T19N</td> <td>R28E</td> </tr> <tr> <td></td> <td>S32</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S 5</td> </tr> <tr> <td colspan="2">T18N</td> </tr> <tr> <td colspan="2">1992</td> </tr> </table>	T19N	R28E		S32	1/4	—		S 5	T18N		1992	
T19N	R28E												
	S32												
1/4	—												
	S 5												
T18N													
1992													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>												
	<p>Raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.</p>												
	<p>Set a steel fence post alongside the cor.</p>												

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS
78.34

Point for the cor. of secs. 5, 6, 31, and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T19N	R28E
S31	S32
S 6	S 5
T18N	
1993	

from which

A juniper, 8 ins. diam., bears N. 65 1/4° E.,
192 lks. dist., mkd. T19NR28ES32BT.

A piñon, 10 ins. diam., bears S. 15° E.,
79 lks. dist., mkd. T18NR28ES5BT.

A juniper, 8 ins. diam., bears S. 35 3/4° W.,
84 lks. dist., mkd. T18NR28ES6BT.

A piñon, 5 ins. diam., bears N. 46 1/2° W.,
43 lks. dist., mkd. T19NR28ES31BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Set a steel fence post alongside the cor.

S. 88°35' W., bet. secs. 6 and 31, on the N. bdy. of the Tp.

Over rolling land, through moderate juniper.

39.17

Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T19N	R28E
	S31
1/4	—
	S 6
T18N	
1992	

BOOK 5429

Dependent Resurvey of the North Boundary
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>from which</p> <p style="padding-left: 40px;">A piñon, 7 ins. diam., bears N. 70° E., 86 lks. dist., mkd. 1/4S31BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 18 1/4° W., 37 lks. dist., mkd. 1/4S6BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 2 ft. high, N. of cor.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence ascend steep, eroded N. slope of the Puerco Rim.</p>								
76.43	<p>The cor. of Tps 18 and 19 N., Rs. 27 and 28 E., hereinbefore described.</p> <hr/> <p style="text-align: center;">Dependent Resurvey of a Portion of the Subdivisional Lines, T. 18 N., R. 28 E., Gila and Salt River Mer., Arizona</p> <hr/> <p style="text-align: center;">Restoring the survey executed by Henry A. Coe, in 1882</p> <hr/> <p>From the cor. of secs. 11, 12, 13, and 14, monumented with an iron pipe, 38 ins. long, 2 ins. diam., firmly set, projecting 14 ins. above the ground, perpetuated by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, at the position of a 4 ins. cedar post, as per a map filed at the Apache County Recorder's office in St. Johns, Arizona, and is accepted as a careful and faithful perpetuation of the orig. cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td colspan="2">T18N R28E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S11</td> <td style="padding: 2px 5px;">S12</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S14</td> <td style="padding: 2px 5px;">S13</td> </tr> <tr> <td colspan="2" style="padding: 2px 5px;">1991</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T18N R28E		S11	S12	S14	S13	1991	
T18N R28E									
S11	S12								
S14	S13								
1991									

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the N. edge of a graded dirt road, 20 lks. wide, bears E. and W.</p> <p>N. 0°16' W., bet. secs. 11 and 12.</p> <p>Ascend gently, over rolling land, through dense juniper, along a track road.</p>
11.00	Ridge, bears NE and SW.
39.28	<p>Point for the 1/4 sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S11 S12 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 40 lks E. of a graded dirt road, 25 lks. wide, bears NE and SW, and 50 lks. W. of a graded dirt road, 25 lks. wide, bears N. and S.</p>
78.56	<p>Point for the cor. of secs. 1, 2, 11, and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S 2 S 1 ----- S11 S12 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a steel fence post alongside the cor.</p> <p>The cor. is located at the NW cor. of an intersection of track roads, 15 lks. wide, bear N., S., E., and W.</p> <p>From this cor. point, an iron pipe, 7/8 in. diam., firmly set, 1 in. below the surface of the ground, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, as per a map filed at the Apache County Recorder's office in St. Johns, Arizona, bears N. 89°53' E., 13 1/2 lks. dist., restored using incorrect record distances in the procedure for restoration of lost corners by proportionate measurement, and is not utilized in the course of this resurvey.</p> <hr/> <p>From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp., hereinbefore described.</p> <p>N. 89°21' W., bet. secs. 1 and 12.</p> <p>Ascend gradually, over rolling land, through moderate juniper, along a track road.</p> <p>40.15 Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S 1 1/4 — S12 1991</p> <p>from which</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, for a reference monument, bears N. 56°30' E., 32.2 ft. dist., with cap mkd. RM T18N R28E 1/4 S1 32.2 FT TO COR 1991, and an arrow pointing to the cor.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 24 ins. in the ground, for a reference monument, bears S. 41°11' E., 48.6 ft. dist., with cap mkd. RM T18N R28E 1/4 S12 48.6 FT TO COR 1991, and an arrow pointing to the cor.</p>
--------	---

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.29	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located 8 lks. SE of the NW cor. of an intersection of track roads, 15 lks. wide, bear N., S., E., and W.</p> <p>The cor. of secs. 1, 2, 11, and 12, hereinbefore described.</p>
39.28	<p>N. 0°24' E., bet. secs. 1 and 2.</p> <p>Ascend gently, over rolling land, through moderate juniper and piñon, along a track road.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 2, on the NHIRC bdy., at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S 2 S 1 1991</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 19 ins. diam., bears N. 59 3/4° E., 116 1/2 lks. dist., mkd. 1/4S1BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 46 1/4° W., 103 lks. dist., mkd. 1/4S2BT.</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, for a reference monument, bears N. 47°30' W., 35.27 ft. dist., with cap mkd. RM T18N R28E S2 35.27 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located in an intersection of track roads, 25 lks. wide, bearing E. and S.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor., an iron pipe, 17 ins. long, 7/8 in. diam., firmly set, 6 ins. below the surface of the ground, referenced by 2 iron pipes, 1 1/2 ins. diam., in the SE and NW quadrants, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, as per a map filed at the Apache County Recorder's office in St. Johns, Arizona, bears N. 16°22' E., 11 1/2 lks. dist., restored using incorrect record distances in the procedure for restoration of lost corners by proportionate measurement, and is not utilized in the course of this resurvey.</p>
	<p>Thence on the NHIRC bdy.</p>
46.42	<p>Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.</p>
67.80	<p>Top of the Puerco Rim, bears E. and W.; thence descend steep, eroded N. slope.</p>
78.86	<p>The cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., hereinbefore described.</p>
	<p>From the cor. of secs. 14, 15, 22, and 23, monumented with an iron pipe, 38 ins. long, 2 1/2 ins. diam., firmly set, projecting 16 ins. above the ground, with a brass tablet attached to the top of the iron pipe, mkd. 1975 T18N 15 14 22 23 R28E LS 9430, perpetuated by Sam Kuder, R.L.S. 9430, in 1975, remonumenting a position perpetuated by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, at the position of a 4 ins. cedar post, as per a map filed at the Apache County Recorder's office in St. Johns, Arizona, and is accepted as a careful and faithful perpetuation of the orig. cor. position.</p>
	<p>from which local accessories</p>
	<p>An iron pipe, 1 in. diam., firmly set, projecting 3 ins.</p>
	<p>above the ground, for a reference monument, bears</p>
	<p>N. 66°16' E., 95 lks. dist.</p>
	<p>An iron pipe, 1 1/4 in. diam., firmly set, projecting 2 ins.</p>
	<p>above the ground, for a reference monument, bears</p>
	<p>S. 43°07' W., 82 1/2 lks. dist.</p>
	<p>A rebar, 5/8 ins. diam., firmly set, projecting 4 ins. above</p>
	<p>the ground, with a metal tag attached, mkd. LS 9430, a</p>
	<p>local lot cor., bears S. 44°17' W., 54 lks. dist.</p>
	<p>A rebar, 5/8 ins. diam., firmly set, projecting 6 ins. above</p>
	<p>the ground, with a metal tag attached, mkd. LS 9430, a</p>
	<p>local lot cor., bears N. 45°15' W., 53 lks. dist.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>A juniper, 22 ins. diam., bears N. 21 1/2° W., 161 lks. dist., mkd. with a nail in a partially healed blaze, 30 ins. above the ground.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N</td><td>R28E</td></tr> <tr><td>S15</td><td>S14</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S22</td><td>S23</td></tr> <tr><td colspan="2" style="text-align: center;">1991</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located at the SW cor. of an intersection of track roads, 15 lks. wide, bear N., E., S., and W.</p> <p>N. 0°08' W., bet. secs. 14 and 15.</p> <p>Over gently rolling land, through dense juniper and piñon, along a track road.</p>	T18N	R28E	S15	S14			S22	S23	1991	
T18N	R28E										
S15	S14										
S22	S23										
1991											
4.60	Ridge, bears NE and SW.										
39.70	<p>The 1/4 sec. cor. of secs. 14 and 15, monumented with the rotting remains of a wood post, firmly set, 3 ins. below the surface of the ground, with an iron pipe, 17 ins. long, 1 in. diam., laying alongside.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N</td><td>R28E</td></tr> <tr><td colspan="2" style="text-align: center;">1/4</td></tr> <tr><td>S15</td><td>S14</td></tr> <tr><td colspan="2" style="text-align: center;">1991</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the remnants of the orig. post and the iron pipe alongside the stainless steel post.</p>	T18N	R28E	1/4		S15	S14	1991			
T18N	R28E										
1/4											
S15	S14										
1991											

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 15 lks. W. of a track road, 15 lks. wide, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 3°04' E., beginning new measurement.</p>								
40.40	<p>The cor. of secs. 10, 11, 14, and 15, monumented with a nail in a juniper stump, 17 ins. diam., restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, and is accepted as a careful and faithful restoration of the position of the orig. cor.</p> <p>from which local accessories</p> <p style="padding-left: 40px;">An iron pipe, 1 1/2 in. diam., firmly set, projecting 2 ins. above the ground, for a reference monument, bears N. 44°35' E., 76 lks. dist.</p> <p style="padding-left: 40px;">An iron pipe, 1 1/2 in. diam., firmly set, projecting 1 ins. above the ground, for a reference monument, bears S. 44°30' W., 76 lks. dist.</p> <p style="padding-left: 40px;">A rebar, 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, a local lot cor., bears N. 44°56' E., 53 lks. dist.</p> <p style="padding-left: 40px;">An iron pipe, 7/8 ins. diam., firmly set, projecting 2 ins. above the ground, a local lot cor., bears S. 28°39' E., 101 lks. dist.</p> <p style="padding-left: 40px;">A rebar, 3/8 ins. diam., firmly set, projecting 5 ins. above the ground, with a metal tag attached, mkd. IS 9430, a local lot cor., bears N. 45°19' W., 53 1/2 lks. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td colspan="2">T18N R28E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S10</td> <td style="padding: 2px 5px;">S11</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S15</td> <td style="padding: 2px 5px;">S14</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 5px;">1992</td> </tr> </table> </div> <p>from which</p>	T18N R28E		S10	S11	S15	S14	1992	
T18N R28E									
S10	S11								
S15	S14								
1992									

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.72	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, for a reference monument, bears N. 45° W., 50.0 ft. dist., with cap mkd. RM T18N R28E S10 50.0 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the nail and stump alongside the stainless steel post.</p> <p>The cor. is located at the NW cor. of an intersection of track roads, bear N., E., S., and W.</p> <hr/> <p>From the cor. of secs. 11, 12, 13, and 14.</p> <p>S. 89°36' W., bet. secs. 11 and 14.</p> <p>Over rolling land, through moderate juniper, along a track road.</p> <p>The 1/4 sec. cor. of secs. 11 and 14, monumented with an iron pipe, 17 ins. long, 7/8 in. diam., firmly set, 5 ins. below the surface of the ground, painted red, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, and is accepted as a careful and faithful restoration of the position of the orig. cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S11 1/4 — S14 1992</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, for a reference monument, bears N. 45° E., 50.0 ft. dist., with cap mkd. RM T18N R28E 1/4 S11 50.0 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>A juniper, 5 ins. diam., bears N. 57 3/4° E., 178 lks. dist., mkd. 1/4S11BT.</p> <p>A juniper, 4 ins. diam., bears S. 19 1/4° E., 291 lks. dist., mkd. 1/4S14BT</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside the stainless steel post.</p> <p>The cor. is located near the NW cor. of an intersection of track roads, bear N., NE, E., S., SW, and W.</p> <hr/> <p>S. 89°36' W., beginning new measurement.</p> <p>39.73 The cor. of secs. 10, 11, 14, and 15, hereinbefore described.</p> <hr/> <p>N. 0°45' W., bet. secs. 10 and 11.</p> <p>Over rolling land, through dense juniper, along a track road.</p> <p>40.32 The 1/4 sec. cor. of secs. 10 and 11, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, determined from lot cors. established by Greer and Rotter in 1963, as per maps filed at the Apache County Recorder's office in St. Johns, Arizona, and is accepted as a careful and faithful restoration of the position of the orig. cor., from which</p> <p>The NW cor. of lot 112, Arizona Park Estates Unit Four, monumented with a rebar, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with an aluminum cap, 1 1/2 ins. diam., mkd. GREER ENG LS, bears S. 45°17' E., 54.1 lks. dist.</p> <p>The NE cor. of lot 1, Arizona Park Estates Unit Four, monumented with a rebar, 5/8 in. diam., firmly set, projecting 9 ins. above the ground, bears S. 44°06' W., 53.6 lks. dist.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S10 S11 1992</p>
--------	--

BOOK 54 29

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>								
	<p>Set a steel fence post alongside the cor.</p>								
	<p>The cor. is located on the N. edge of an intersection of track roads, bear E., S., and W.</p>								
	<p>N. 0°59' W., beginning new measurement.</p>								
36.20	<p>Point for a witness point, at intersection with the informative traverse line, hereinafter described.</p>								
40.20	<p>The cor. of secs. 2, 3, 10, and 11, monumented with a juniper post, 42 ins. long, 3 ins. diam., firmly set, projecting 30 ins. above the ground, mkd. with axe marks, with an iron pipe, 42 ins. long, 2 1/2 ins. diam., projecting 10 ins. above the ground, firmly set alongside and wired to the post.</p> <p>from which a local bearing tree,</p> <p style="padding-left: 40px;">A juniper, 33 ins. diam., bears N. 12 3/4° W., 22 lks. dist., mkd. with a nail in a blaze, 30 ins. above the ground.</p> <p>At the cor. point,</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 10px;">T18N</td> <td style="padding: 0 10px;">R28E</td> </tr> <tr> <td style="padding: 0 10px;">S 3</td> <td style="padding: 0 10px;">S 2</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 10px;">S10</td> <td style="border-top: 1px solid black; padding: 0 10px;">S11</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 0 10px;">1991</td> </tr> </table> <p>from which new bearing trees,</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 54 3/4° E., 34 lks. dist., mkd. T18NR28ES2BT.</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears S. 56 1/2° E., 18 lks. dist., mkd. T18NR28ES11BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 61 1/2° W., 70 lks. dist., mkd. T18NR28ES10BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears N. 73 1/4° W., 62 lks. dist., mkd. T18NR28ES3BT.</p>	T18N	R28E	S 3	S 2	S10	S11	1991	
T18N	R28E								
S 3	S 2								
S10	S11								
1991									

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the orig. post and the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/>
40.14	<p>From the cor. of secs. 1, 2, 11, and 12.</p> <p>N. 89°00' W., bet. secs. 2 and 11.</p> <p>Over rolling land, through dense juniper, along a track road.</p> <p>Point for the 1/4 sec. cor. of secs. 2 and 11, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S 2 1/4 — S11 1991</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 65 lks. NW of an intersection of track roads, bearing N., E., S., and W.</p>
64.13	<p>Point for a witness point, at intersection with the informative traverse line, hereinafter described.</p>
80.28	<p>The cor. of secs. 2, 3, 10, and 11, on the NHIRC bdy.</p> <hr/>
14.94	<p>N. 0°22' E., bet. secs. 2 and 3, on the NHIRC bdy.</p> <p>Ascend gradually, over rolling land, through dense juniper.</p> <p>Point for a witness point on the Puerco Rim, bears E. and W.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T18N R28E S 3 S 2 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence descend steep, eroded N. slope of the Puerco Rim.</p>
19.37	<p>Point for the S. 1/16 sec. cor. of secs. 2 and 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R28E S 1/16 S 3 S 2 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the steep, eroded N. slope of the Puerco Rim.</p>
30.00	<p>End steep descent; thence descend gradually, over rolling land, through scattered juniper and piñon.</p>
38.74	<p>Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R28E 1/4 S 3 S 2 1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 15 ins. diam., bears S. 88 1/2° E., 60 lks. dist., mkd. 1/4S2BT.</p> <p style="padding-left: 40px;">A juniper, 17 ins. diam., bears S. 14 3/4° W., 73 1/2 lks. dist., mkd. 1/4S3BT.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
77.67	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., hereinbefore described.</p>
39.25	<p>From the cor. of secs. 14, 15, 22, and 23.</p> <p>S. 89°40' W., bet. secs. 15 and 22.</p> <p>Over rolling land, through scattered juniper, along a track road.</p> <p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S15 1/4 — S22 1992</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 45° E., 54.0 ft. dist., with cap mkd. RM T18N R28E 1/4 S15 54.0 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 46° W., 170 lks. dist., mkd. 1/4S15BT.</p>
78.50	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 15, 16, 21, and 22, restored by Sam Kuder, R.L.S. 9430, Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, determined from lot cors. established by Greer and Rotter in 1963, as per maps filed at the Apache County Recorder's office in St. Johns, Arizona, and is accepted as a careful and faithful restoration of the position of the orig. cor., from which</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

The SW cor. of lot 113, Arizona Park Estates Unit Two, monumented with a rebar, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with a metal tag attached, mkd. LS 9430, bears N. 43°16' E., 54.1 lks. dist.

The NW cor. of lot 162, Arizona Park Estates Unit Two, monumented with a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with a metal tag attached, mkd. LS 9430, bears S. 46°29' E., 53.6 lks. dist.

The NE cor. of lot 467, Arizona Park Estates Unit Two, monumented with a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with a metal tag attached, mkd. LS 9430, bears S. 45°18' W., 53.1 lks. dist.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. below the surface of the ground, with brass cap mkd.

T18N R28E	
S16	S15

S21	S22
1992	

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, for a reference monument, bears N. 42°29' E., 41.3 ft. dist., with cap mkd. RM T18N R28E S15 41.3 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears S. 44°32' E., 44.7 ft. dist., with cap mkd. RM T18N R28E S22 44.7 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>The cor. is located in an intersection of track roads, bear N., E., S., and W., and on a ridge, bears NE and SW.</p> <hr/>
	<p>N. 0°50' E., bet. secs. 15 and 16.</p>
	<p>Over rolling land, through scattered juniper, along a track road.</p>
15.70	<p>Ridge, bears E. and W.</p>
27.00	<p>Ridge, bears E. and W.</p>
39.89	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S16 S15 1992</p>
	<p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, for a reference monument, bears S. 69°58' E., 45.9 ft. dist., with cap mkd. RM T18N R28E 1/4 S15 45.9 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 60 1/2° W., 192 lks. dist., mkd. 1/4S16BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
79.78	<p>The cor. of secs. 9, 10, 15, and 16, monumented with a rusty, round hole in hard packed soil, 1 1/2 ins. diam., 12 ins. below the surface of the ground, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, and is accepted as a careful and faithful restoration of the position of the orig. cor.</p> <p>from which local reference monuments,</p> <p style="padding-left: 40px;">An iron pipe, 1 1/2 in. diam., firmly set, projecting 4 ins. above the ground, for a reference monument, bears N. 44°28' E., 75.4 lks. dist.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

An iron pipe, 1 1/2 in. diam., firmly set, projecting 5 ins. above the ground, for a reference monument, bears S. 44°58' W., 76.2 lks. dist.

A rebar, 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, a local lot cor., bears S. 44°28' E., 52.9 lks. dist.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.

T18N	R28E
S 9	S10
S16	S15
1992	

from which

A juniper, 9 ins. diam., bears N. 27 1/2° E., 246 lks. dist., mkd. T18NR28ES10BT.

A juniper, 10 ins. diam., bears S. 53 3/4° E., 163 lks. dist., mkd. T18NR28ES15BT.

A juniper, 7 ins. diam., bears S. 41 1/2° W., 159 1/2 lks. dist., mkd. T18NR28ES16BT.

A juniper, 15 ins. diam., bears N. 24 1/2° W., 101 lks. dist., mkd. T18NR28ES9BT.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, for a reference monument, bears S. 45° E., 50.0 ft. dist., with cap mkd. RM T18N R28E S15 50.0 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

The cor. is located at the NW cor. of an intersection of track roads, bearing N., E., S., and W.

From the cor. of secs. 10, 11, 14, and 15.

S. 89°28' W., bet. secs. 10 and 15.

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.71	<p>Over rolling land, through scattered juniper, along a track road.</p> <p>Point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S10 1/4 — S15 1992</p> <p>from which</p> <p style="padding-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 26 ins. in the ground, for a reference monument, bears N. 32°55' E., 50.8 ft. dist., with cap mkd. RM T18N R28E 1/4 S10 50.8 FT TO COR 1992, and an arrow pointing to the cor. Set a steel fence post alongside the reference monument.</p> <p style="padding-left: 40px;">A piñon, 10 ins. diam., bears S. 21° E., 195 lks. dist., mkd. 1/4S15BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
79.41	<p>The cor. of secs. 9, 10, 15, and 16.</p> <hr/> <p>N. 0°36' W., bet. secs. 9 and 10.</p>
39.84	<p>Over rolling land, through moderate juniper, along a track road.</p> <p>The 1/4 sec. cor. of secs. 9 and 10, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, determined from lot cors. established by Greer and Rotter in 1963, as per maps filed at the Apache County Recorder's office in St. Johns, Arizona, and is accepted as a careful and faithful restoration of the position of the orig. cor., from which</p> <p style="padding-left: 40px;">The NE cor. of lot 16, Arizona Park Estates Unit Four, monumented with a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, bears S. 86°36' E., 5.110 chs. dist.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	T18N R28E S 4 S 3 ———— S 9 S10 1993
	<p>from which</p> <p>A juniper, 9 ins. diam., bears N. 76 1/2° E., 123 lks. dist., mkd. T18NR28ES3BT.</p> <p>A juniper, 4 ins. diam., bears S. 65° E., 62 lks. dist., mkd. X BT.</p> <p>A juniper, 8 ins. diam., bears S. 21 1/2° W., 72 lks. dist., mkd. T18NR28ES9BT.</p> <p>A juniper, 18 ins. diam., bears N. 37 1/2° W., 44 lks. dist., mkd. T18NR28ES4BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>From the cor. of secs. 2, 3, 10, and 11.</p> <p>S. 88°47' W., bet. secs. 3 and 10.</p> <p>Ascend, over rolling land, through dense juniper.</p>
10.85	<p>Point for a witness point on line bet. secs. 3 and 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;"> WP T18N R28E S 3 ———— S10 1993 </p> <p>The witness point is located on a broad ridge, bears N. and S.; thence descend.</p>
39.41	<p>Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T18N R28E S 3 1/4 — S10 1993</p>
	<p>from which</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 76 1/2° E., 256 lks. dist., mkd. 1/4S3BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 19° E., 81 lks. dist., mkd. 1/4S10BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in an open meadow, approximately 3 acres in area, surrounded by dense juniper.</p>
46.71	Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.
78.81	The cor. of secs. 3, 4, 9, and 10, hereinbefore described.
	<hr/> <p>N. 0°51' W., bet. secs. 3 and 4.</p> <p>Ascend gradually, over rolling land, through dense juniper.</p>
33.41	<p>Point for a witness point on the edge of the Puerco Rim, bears SE and NNW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WP T18N R28E S 4 S 3 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence descend very steep, eroded NE slope of the Puerco Rim.</p>
35.93	Intersect the metes-and-bounds line, at a point where it is impracticable to establish a permanent monument.

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.74	<p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the orig. cor. The cor. falls on the very steep, NE slope of the Puerco Rim, where it is impracticable to establish a permanent monument.</p> <p>From this cor. point, the point selected for a witness cor. bears N. 0°35' E., 3.63 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T18N R28E 1/4 S 4 S 3 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The witness cor. is located on a ridge, bears NNE and SSW.</p> <p>Thence descend into gently rolling land, through scattered juniper.</p>
79.69	<p>The cor. of secs. 3, 4, 33, and 34, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 20, 21, 28, and 29, perpetuated by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, determined from local reference monuments established by Greer and Rotter, and is accepted as a careful and faithful perpetuation of the position of the orig. cor., from which</p> <p>An iron pipe, 1 1/4 in. diam., firmly set, projecting 10 ins. above the ground, for a reference monument, bears N. 43°42' E., 75.8 lks. dist.</p> <p>An iron pipe, 1 1/4 in. diam., firmly set, projecting 8 ins. above the ground, for a reference monument, bears S. 43°42' W., 75.8 lks. dist.</p> <p>The local monument, an iron pipe, 42 ins. long, 2 ins. diam., laying loose on the ground alongside a road intersection, bears SSW, 30 lks. dist.</p> <p>At the cor. point</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T18N</td> <td style="padding: 2px 5px;">R28E</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S20</td> <td style="padding: 2px 5px;">S21</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S29</td> <td style="padding: 2px 5px;">S28</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 5px;">1991</td> </tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 20 ins. in the ground, for a reference monument, bears N. 42°47' E., 33.7 ft. dist., with cap mkd. RM T18N R28E S21 33.7 FT TO COR 1991, and an arrow pointing to the cor.</p> <p style="margin-left: 40px;">A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 22 ins. in the ground, for a reference monument, bears N. 44°14' W., 33.4 ft. dist., with cap mkd. RM T18N R28E S20 33.4 FT TO COR 1991, and an arrow pointing to the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the local iron pipe alongside the stainless steel post.</p> <p>The cor. is located in an intersection of track roads, bearing N., E., and W.</p> <p>N. 0°21' E., bet. secs. 20 and 21.</p> <p>Descend gradually, over rolling land, through scattered juniper, along a track road.</p> <p>40.10 Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 2px 5px;">T18N</td> <td style="padding: 2px 5px;">R28E</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 5px;">1/4</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px 5px;">S20</td> <td style="padding: 2px 5px;">S21</td> </tr> <tr> <td colspan="2" style="text-align: center; padding: 2px 5px;">1992</td> </tr> </table> </div> <p>from which</p>	T18N	R28E	S20	S21	S29	S28	1991		T18N	R28E	1/4		S20	S21	1992	
T18N	R28E																
S20	S21																
S29	S28																
1991																	
T18N	R28E																
1/4																	
S20	S21																
1992																	

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS											
80.20	<p>A juniper, 8 ins. diam., bears N. 74 1/4° E., 107 lks. dist., mkd. 1/4S21BT.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, for a reference monument, bears N. 70°15' W., 28.2 ft. dist., with cap mkd. RM T18N R28E 1/4 S20 28.2 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 16, 17, 20, and 21, monumented with an iron pipe, 36 ins. long, 1 3/4 ins. diam., firmly set, projecting 24 ins. above the ground, restored by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, and is accepted as a careful and faithful restoration of the position of the orig. cor.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2">T18N R28E</td></tr> <tr><td>S17</td><td>S16</td></tr> <tr><td colspan="2">-----</td></tr> <tr><td>S20</td><td>S21</td></tr> <tr><td colspan="2">1992</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>	T18N R28E		S17	S16	-----		S20	S21	1992	
T18N R28E											
S17	S16										

S20	S21										
1992											
39.40	<p>From the cor. of secs. 15, 16, 21, and 22.</p> <p>S. 89°19' W., bet. secs. 16 and 21.</p> <p>Over rolling land, through dense juniper, along a track road.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd.</p>										

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T18N R28E S16 1/4 — S21 1992</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 56°27' E., 36.9 ft. dist., with cap mkd. RM T18N R28E 1/4 S16 36.9 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>A juniper, 7 ins. diam., bears S. 41 3/4° E., 102 lks. dist., mkd. 1/4S21BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
78.80	The cor. of secs. 16, 17, 20, and 21.
	<hr/> <p>N. 0°36' E., bet. secs. 16 and 17.</p> <p>Ascend gradually, over rolling land, through dense juniper.</p>
40.11	<p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R28E 1/4 S17 S16 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
80.22	<p>Point for the cor. of secs. 8, 9, 16, and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N R28E</td></tr> <tr><td>S 8 S 9</td></tr> <tr><td>— —</td></tr> <tr><td>S17 S16</td></tr> <tr><td>1993</td></tr> </table> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, for a reference monument, bears N. 45°23' E., 74.4 ft. dist., with cap mkd. RM T18N R28E S9 74.4 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears S. 36°20' E., 58.5 ft. dist., with cap mkd. RM T18N R28E S16 58.5 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 20 lks. S. of a track road, bears E. and W.</p> <hr/> <p>From the cor. of secs. 9, 10, 15, and 16.</p> <p>S. 89°39' W., bet. secs. 9 and 16.</p> <p>Over rolling land, through dense juniper, along a track road.</p> <p>39.55 Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N R28E</td></tr> <tr><td>S 9</td></tr> <tr><td>1/4 —</td></tr> <tr><td>S16</td></tr> <tr><td>1993</td></tr> </table> <p>from which</p>	T18N R28E	S 8 S 9	— —	S17 S16	1993	T18N R28E	S 9	1/4 —	S16	1993
T18N R28E											
S 8 S 9											
— —											
S17 S16											
1993											
T18N R28E											
S 9											
1/4 —											
S16											
1993											

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.09	<p>A piñon, 10 ins. diam., bears N. 22 1/2° E., 59 lks. dist., mkd. 1/4S9BT.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears S. 13°52' E., 14.3 ft. dist., with cap mkd. RM T18N R28E 1/4 S16 14.3 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>A piñon, 10 ins. diam., bears S. 40° W., 91 lks. dist., mkd. 1/4S16BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located in a track road, bears E. and W.</p> <p>The cor. of secs. 8, 9, 16, and 17.</p>
36.00	<p>N. 0°24' W., bet. secs. 8 and 9.</p> <p>Ascend gradually, over rolling land, through moderate juniper. Ridge, bears NE and SW.</p>
40.11	<p>Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S 8 S 9 1993</p> <p>from which</p> <p>A juniper, 14 ins. diam., bears N. 82 3/4° W., 36 lks. dist., mkd. 1/4S8BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
80.22	<p>Point for the cor. of secs. 4, 5, 8, and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS																					
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T18N</td><td>R28E</td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 8</td><td>S 9</td></tr> <tr><td colspan="2">1993</td></tr> </table> </div> <p>from which</p> <p style="padding-left: 40px;">A juniper, 16 ins. diam., bears S. 28 1/2° E., 279 lks. dist., mkd. T18NR28ES9BT.</p> <p style="padding-left: 40px;">A juniper, 18 ins. diam., bears S. 72° W., 22 lks. dist., mkd. T18NR28ES8BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 130 lks. N. of an intersection of track roads, bearing NNE, S., and NNW.</p> <hr/> <p>From the cor. of secs. 3, 4, 9, and 10.</p> <p>N. 89°53' W., bet. secs. 4 and 9.</p> <p>Over rolling land, through dense juniper.</p> <p>39.51 Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T18N</td><td>R28E</td></tr> <tr><td>S 4</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 9</td><td></td></tr> <tr><td colspan="2">1993</td></tr> </table> </div> <p>from which</p> <p style="padding-left: 40px;">A piñon, 11 ins. diam., bears N. 25 3/4° E., 131 lks. dist., mkd. 1/4S4BT.</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 25 1/4° E., 161 lks. dist., mkd. 1/4S9BT.</p>	T18N	R28E	S 5	S 4	<hr/>		S 8	S 9	1993		T18N	R28E	S 4		1/4	—	S 9		1993	
T18N	R28E																				
S 5	S 4																				
<hr/>																					
S 8	S 9																				
1993																					
T18N	R28E																				
S 4																					
1/4	—																				
S 9																					
1993																					

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.02	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. of secs. 4, 5, 8, and 9.</p> <hr/>
35.74	<p>N. 1°26' W., bet. secs. 4 and 5.</p> <p>Ascend gradually, over rolling land, through dense juniper.</p> <p>Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.</p>
37.12	<p>Point selected for the witness cor. to the 1/4 sec. cor. of secs. 4 and 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T18N R28E 1/4 S 5 S 4 1993</p> </div> <p>from which</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 34 1/2° E., 381 lks. dist., mkd. XBT.</p>
38.00	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the witness cor.</p> <p>Edge of the Puerco Rim, bears SSE. and NNW; thence descend very steep, eroded NE slope of the Puerco Rim.</p>
40.12	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the orig. cor. The cor. falls on the very steep, NE slope of the Puerco Rim, where it is impracticable to establish a permanent monument.</p>
80.33	<p>The cor. of secs. 4, 5, 32, and 33, on the N. bdy. of the Tp., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 20, 21, 28, and 29.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>S. 88°50' W., bet. secs. 20 and 29.</p> <p>Over gently rolling land, through scattered juniper, along a track road.</p> <p>40.16 Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S20 1/4 — S29 1991</p> <p>from which</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 21 ins. in the ground, for a reference monument, bears N. 63°30' E., 52.5 ft. dist., with cap mkd. RM T18N R28E 1/4 S20 52.5 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post alongside the cor.</p> <p>A monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 21 ins. in the ground, for a reference monument, bears N. 34°42' W., 28.1 ft. dist., with cap mkd. RM T18N R28E 1/4 S20 28.1 FT TO COR 1991, and an arrow pointing to the cor. Set a steel fence post alongside the cor.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located in an intersection of track roads, bearing N., E., and W.</p>
80.31	<p>The cor. of secs. 19, 20, 29, and 30, perpetuated by Lacy Greer, R.L.S. 5704, and Leonard Rotter, P.E. 4932, in 1963, determined from local reference monuments, and is accepted as a careful and faithful perpetuation of the position of the orig. cor.</p> <p>An iron pipe, 18 ins. long, 1 1/2 in. diam., firmly set, projecting 6 ins. above the ground, for a reference monument, bears N. 46°25' E., 72 lks. dist.</p> <p>An iron pipe, 1 1/2 in. diam., firmly set, projecting 6 ins. above the ground, for a reference monument, bears S. 46°25' W., 72 lks. dist.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 7 ins. below the surface of the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N</td><td>R28E</td></tr> <tr><td>S19</td><td>S20</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S30</td><td>S29</td></tr> <tr><td colspan="2" style="text-align: center;">1992</td></tr> </table> <p>from which</p> <p>Removed the local NE iron pipe and set a monument, 30 ins. long, 2 1/2 ins. diam., composed of an iron post, 25 ins. long, and a magnetic poly breakaway base, 25 ins. in the ground, for a reference monument, bears N. 46°25' E., 42.5 ft. dist., with cap mkd. RM T18N R28E S20 42.5 FT TO COR 1992, and an arrow pointing to the cor. Buried the iron pipe alongside the iron post. Set a steel fence post alongside the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located in an intersection of track roads, bearing N., E., S., and W.</p> <hr/> <p>N. 88°19' W., bet. secs. 19 and 30.</p> <p>Descend gradually, over gently rolling land, through moderate juniper, along a track road.</p> <p>38.82 Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N</td><td>R28E</td></tr> <tr><td colspan="2" style="text-align: center;">S19</td></tr> <tr><td colspan="2" style="text-align: center;">1/4 —</td></tr> <tr><td colspan="2" style="text-align: center;">S30</td></tr> <tr><td colspan="2" style="text-align: center;">1991</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>	T18N	R28E	S19	S20			S30	S29	1992		T18N	R28E	S19		1/4 —		S30		1991	
T18N	R28E																				
S19	S20																				
S30	S29																				
1992																					
T18N	R28E																				
S19																					
1/4 —																					
S30																					
1991																					

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 76.96</p>	<p>The cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., hereinbefore described.</p>
	<p>From the cor. of secs. 19, 20, 29, and 30. N. 1°16' E., bet. secs. 19 and 20. Over gently rolling land, through dense juniper, along a track road.</p>
<p>40.07</p>	<p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate dist.; there is no remaining evidence of the orig. cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S19 S20 1993</p>
	<p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 48°57' E., 47.8 ft. dist., with cap mkd. RM T18N R28E 1/4 S20 47.8 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>A juniper, 4 ins. diam., bears N. 66 1/2° W., 104 lks. dist., mkd. XBT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located in a track road, bears N. and S., and 23 lks. N. of an intersection of track roads, bearing N., E., S., and W.</p>
<p>64.70</p>	<p>Ridge, bears NE and SW.</p>
<p>80.14</p>	<p>Point for the cor. of secs. 17, 18, 19, and 20, at proportionate dist.; there is no remaining evidence of the orig. cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS																					
	<table border="1" data-bbox="846 268 997 422"> <tr> <td>T18N R28E</td> <td></td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p data-bbox="407 457 570 485">from which</p> <p data-bbox="483 520 1442 737">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 47°34' E., 58.4 ft. dist., with cap mkd. RM T18N R28E S17 58.4 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet wrapped in duct tape beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p data-bbox="483 772 1442 989">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 30°08' W., 41.8 ft. dist., with cap mkd. RM T18N R28E S18 41.8 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet wrapped in duct tape beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p data-bbox="402 1031 1382 1094">Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p data-bbox="402 1125 1430 1188">The cor. is located near the SW cor. of an intersection of track roads, bearing N., E., S., and W.</p> <hr data-bbox="402 1213 1430 1220"/> <p data-bbox="402 1251 1073 1283">From the cor. of secs. 16, 17, 20, and 21.</p> <p data-bbox="402 1314 959 1346">S. 88°45' W., bet. secs. 17 and 20.</p> <p data-bbox="402 1377 1219 1409">Over gently rolling, open land, along a track road.</p> <p data-bbox="240 1440 1430 1503">39.52 Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p data-bbox="402 1535 1360 1598">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below the surface of the ground, with brass cap mkd.</p> <table border="1" data-bbox="846 1629 997 1787"> <tr> <td>T18N R28E</td> <td></td> </tr> <tr> <td>S17</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S20</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">1993</td> </tr> </table> <p data-bbox="402 1818 565 1850">from which</p>	T18N R28E		S18	S17			S19	S20	1993		T18N R28E		S17		1/4	—	S20		1993	
T18N R28E																					
S18	S17																				
S19	S20																				
1993																					
T18N R28E																					
S17																					
1/4	—																				
S20																					
1993																					

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, for a reference monument, bears N. 42°30' E., 50.2 ft. dist., with cap mkd. RM T18N R28E 1/4 S17 50.2 FT TO COR 1992, and an arrow pointing to the cor. Deposit a magnet wrapped in duct tape beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>Deposit a magnet wrapped in duct tape beneath the stainless steel post.</p> <p>The cor. is located in an intersection of track roads, bearing E., S., and W.</p>
79.04	<p>The cor. of secs. 17, 18, 19, and 20.</p> <hr/> <p>N. 89°10' W., bet. secs. 18 and 19.</p> <p>Over gently rolling land, through moderate juniper, along a track road.</p>
39.38	<p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S18 1/4 — S19 1993</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears S. 52°40' W., 35.4 ft. dist., with cap mkd. RM T18N R28E 1/4 S19 35.4 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet wrapped in duct tape beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>A juniper, 5 ins. diam., bears N. 29 3/4° W., 97 lks. dist., mkd. 1/4S18BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located in a track road, bears E. and W.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
73.995	Angle point No. 1 of the metes-and-bounds line, hereinafter described.
77.98	The cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., hereinbefore described.
	<hr/> <p>From the cor. of secs. 17, 18, 19, and 20.</p> <p>N. 0°25' E., bet. secs. 17 and 18.</p> <p>Over gently rolling land, through moderate juniper, along a track road.</p>
40.06	<p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S18 S17 1993</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears S. 89°32' E., 43.5 ft. dist., with cap mkd. RM T18N R28E 1/4 S17 43.5 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 46 3/4° W., 113 lks. dist., mkd. 1/4S18BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located at the SW cor. of an intersection of track roads, bearing N., E., and S.</p>
80.12	<p>Point for the cor. of secs. 7, 8, 17, and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 9 ins. below the surface of the ground, with brass cap mkd.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr><td>T18N R28E</td></tr> <tr><td>S 7 S 8</td></tr> <tr><td>-----</td></tr> <tr><td>S18 S17</td></tr> <tr><td>1993</td></tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A juniper, 15 ins. diam., bears N. 42 1/2° E., 180 lks. dist., mkd. T18NR28ES8BT.</p> <p style="margin-left: 40px;">A juniper, 18 ins. diam., bears S. 34 1/2° E., 148 lks. dist., mkd. T18NR28ES17BT.</p> <p style="margin-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears S. 63°56' W., 42.6 ft. dist., with cap mkd. RM T18N R28E S18 42.6 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post alongside the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located on the N. edge of a track road, bears E. and W.</p> <hr/> <p>From the cor. of secs. 8, 9, 16, and 17.</p> <p>S. 88°41' W., bet. secs. 8 and 17.</p> <p>Over rolling land, through scattered juniper and piñon, along a track road.</p> <p>39.65 Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1" style="margin: auto;"> <tr><td>T18N R28E</td></tr> <tr><td>S 8</td></tr> <tr><td>1/4 —</td></tr> <tr><td>S17</td></tr> <tr><td>1993</td></tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A piñon, 8 ins. diam., bears N. 6° E., 142 lks. dist., mkd. 1/4S8BT.</p>	T18N R28E	S 7 S 8	-----	S18 S17	1993	T18N R28E	S 8	1/4 —	S17	1993
T18N R28E											
S 7 S 8											

S18 S17											
1993											
T18N R28E											
S 8											
1/4 —											
S17											
1993											

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A piñon, 5 ins. diam., bears S. 52° W., 145 lks. dist., mkd. 1/4S17BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>The cor. is located on the S. edge of a track road, bears E. and W.</p>
79.29	<p>The cor. of secs. 7, 8, 17, and 18.</p> <hr/>
	<p>N. 89°52' W., bet. secs. 7 and 18.</p> <p>Over rolling land, through dense juniper.</p>
39.66	<p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R28E S 7 1/4 — S18 1993</p>
	<p>from which</p> <p style="text-align: center;">A juniper, 12 ins. diam., bears N. 14 3/4° E., 84 lks. dist., mkd. 1/4S7BT.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
41.88	<p>Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.</p>
42.60	<p>Fence, bears NNE and SSW; thence enter cleared and burned area.</p>
78.39	<p>The cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>
	<p>From the cor. of secs. 7, 8, 17, and 18.</p> <p>N. 0°26' W., bet. secs. 7 and 8.</p> <p>Ascend gradually, over rolling land, through dense juniper.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 40.06</p>	<p>Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E 1/4 S 7 S 8 1993</p> <p>from which</p> <p style="text-align: center;">A juniper, 12 ins. diam., bears N. 66 1/2° E., 141 lks. dist., mkd. 1/4S8BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>
<p>80.12</p>	<p>Point for the cor. of secs. 5, 6, 7, and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S 6 S 5 ----- S 7 S 8 1993</p> <p>from which</p> <p style="text-align: center;">A juniper, 10 ins. diam., bears N. 63 3/4° E., 114 lks. dist., mkd. T18NR28ES5BT.</p> <p style="text-align: center;">A juniper, 15 ins. diam., bears S. 32 1/2° E., 31 lks. dist., mkd. T18NR28ES8BT.</p> <p style="text-align: center;">A juniper, 8 ins. diam., bears S. 33 1/4° W., 92 lks. dist., mkd. T18NR28ES7BT.</p> <p style="text-align: center;">A juniper, 7 ins. diam., bears N. 70 3/4° W., 57 lks. dist., mkd. T18NR28ES6BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

<p>CHAINS</p> <p>39.66</p> <p>79.32</p> <p>5.91</p> <p>6.35</p> <p>17.00</p> <p>39.54</p>	<p>From the cor. of secs. 4, 5, 8, and 9.</p> <p>S. 88°37' W., bet. secs. 5 and 8.</p> <p>Over gently rolling land, through dense juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E S 5 1/4 — S 8 1993</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears N. 15 3/4° E., 41 lks. dist., mkd. 1/4S5BT.</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 28 1/4° W., 211 lks. dist., mkd. 1/4S8BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>The cor. of secs. 5, 6, 7, and 8.</p> <p>S. 89°26' W., bet. secs. 6 and 7.</p> <p>Over gently rolling land, through dense juniper.</p> <p>Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.</p> <p>Puerco Rim, bears N. and S.; thence across the very steep, severely eroded, northerly slope of the Puerco Rim.</p> <p>Puerco Rim, bears N. and S.; thence over nearly level, rolling land, which has been cleared and burned.</p> <p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
---	--

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
77.62	<p style="text-align: center;">T18N R28E S 6 1/4 — S 7 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. of secs. 1, 6, 7, and 12, on the W. bdy. of the Tp., hereinbefore described.</p> <hr/>
5.41	<p>From the cor. of secs. 5, 6, 7, and 8.</p> <p>N. 0°45' W., bet. secs. 5 and 6.</p> <p>Over rolling land, through dense juniper.</p> <p>Point for a witness point at intersection with the metes-and-bounds line, hereinafter described.</p>
8.00	<p>Puerco Rim, bears NE and SW; thence across the very steep, severely eroded, northeasterly slope of the Puerco Rim.</p>
40.06	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, over a steel fence post driven into the ground, supported in a mound of stone, 8 ft. diam., to top, with brass cap mkd.</p>
50.00	<p style="text-align: center;">T18N R28E 1/4 S 6 S 5 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located in a severely eroded area, 20 lks. N. of a junction of three small spurs, bearing E., SSE, and NW.</p> <p>Puerco Rim, bears NNE and SW; thence across a nearly level spur.</p>
62.50	<p>Puerco Rim, bears E. and W.; thence descend the very steep, severely eroded, northerly slope of the Puerco Rim.</p>

BOOK 5429

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS 67.00	End steep descent; thence descend gradually, over gently rolling land, through scattered juniper.
80.28	The cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., hereinbefore described.
<hr/> Subdivision of Section 2, T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona <hr/>	
	From the 1/4 sec. cor. of secs. 2 and 11.
	N. 0°29' E., on the N. and S. center line of sec. 2.
	Over rolling land, through dense juniper.
10.27	Intersect the informative traverse line, not monumented.
19.51	Point for the center S. 1/16 sec. cor. of sec. 2., on the NHIRC bdy.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.
	T18N R28E C S1/16 S 2 C 1992
	from which
	A juniper, 9 ins. diam., bears S. 52° E., 55 lks. dist., mkd. X BT.
	A juniper, 9 ins. diam., bears N. 45 1/2° W., 48 1/2 lks. dist., mkd. CS1/16S2BT.
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post alongside the cor.
	Thence on the NHIRC bdy.
37.08	Point for a witness point on the NHIRC bdy., and on the edge of the Puerco Rim, bears ENE and WSW.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

BOOK 5429

Subdivision of Section 2

T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T18N R28E C S 2 C 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence begin very steep descent of the severely eroded, northerly slope of the Puerco Rim.</p>
39.02	<p>Point for the center 1/4 sec. cor. of sec. 2, on the NHIRC bdy., at intersection with the E. and W. center line of sec. 2.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R28E C1/4 S 2 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Leave the NHIRC bdy.</p>
50.00	<p>End steep descent; thence descend gradually, over rolling land, through scattered juniper.</p>
78.12	<p>The 1/4 sec. cor. of secs. 2 and 35, on the N. bdy. of the Tp.</p>
	<hr/> <p>From the 1/4 sec. cor. of secs. 1 and 2.</p> <p>N. 89°23' W., on the E. and W. center line of sec. 2, and on the NHIRC bdy.</p> <p>Over rolling land, through scattered juniper.</p>
9.03	<p>Intersect the informative traverse line, not monumented.</p>
26.18	<p>Point for a witness point.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Subdivision of Section 2

T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
36.62	<p style="text-align: center;">WP T18N R28E S 2 C—C 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Point for a witness point on the NHIRC bdy., and on the edge of the Puerco Rim, bears ENE and WSW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
40.09	<p style="text-align: center;">WP T18N R28E S 2 C—C 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence begin very steep descent of the severely eroded, northerly slope of the Puerco Rim.</p> <p>The center 1/4 sec. cor. of sec. 2, on the NHIRC bdy.</p> <p>Leave the NHIRC bdy.</p>
60.00	<p>End steep descent; thence descend gradually, over rolling land, through scattered juniper.</p>
80.30	<p>The 1/4 sec. cor. of secs. 2 and 3.</p>
27.36	<hr/> <p style="text-align: center;">SW 1/4 of Section 2</p> <hr/> <p>From the center S. 1/16 sec. cor. of sec. 2, on the NHIRC bdy.</p> <p>N. 89°12' W., on the E. and W. center line of the SW 1/4 of sec. 2, on the NHIRC bdy.</p> <p>Point for a witness point on the NHIRC bdy., and on the edge of the Puerco Rim, bears ENE and SW.</p>

BOOK 5429

Subdivision of Section 2

T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
24 ins. in the ground, with brass cap mkd.

WP
T18N R28E
S 2
S—S
1992

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Thence begin very steep descent of the severely eroded, northerly
slope of the Puerco Rim.

36.20 Ridge, bears N. and S.

40.18 The S. 1/16 sec. cor. of secs. 2 and 3, on the NHIRC bdy.

Metes-and-Bounds Survey
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

The following metes-and-bounds survey, and informative traverse,
is based on a warranty deed filed at the request of Apache
Abstract Company on August 4, 1952, in Book 32 of Deeds, pages
218-219, and located in the Apache County Recorders Office, St.
Johns, Arizona.

From the point for AP 1, on the line bet. secs. 18 and 19.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
24 ins. in the ground, with brass cap mkd.

T18N R28E
S / 18
AP1 /
S19
1992

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 47 lks. E. of a cor. of fences, bearing NNE
and W., and on the N. edge of a track road, bears E. and W.

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS

From this cor. point, the cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., bears N. 89°10' W., 3.985 chs. dist., hereinbefore described.

Thence N. 22°35' E., on line bet. AP 1 and AP 2, on the Navajo-Hopi Indian Relocation Commission (NHIRC) bdy., on the courses of the 1952 warranty deed.

11.364 Point for AP 2.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T18N R28E
S / 18
AP2
1992

from which

A juniper, 6 ins. diam., bears N. 77 1/4° E.,
85 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 55 lks. E. of a fence, bears NNE and SSW.

Thence N. 22°25' E., on line bet. AP 2 and AP 3, on a NHIRC bdy.

43.411 Point for a witness point on line bet. AP 2 and AP 3.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

WP
T18N R28E
S / 18
1992

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
70.362	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 66 lks. E. of a fence, bears NNE and SSW.</p> <p>Point for a witness point on line bet. AP 2 and AP 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R28E S 18 1992</p> </div>
74.250	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 73 lks. E. of a fence, bears NNE and SSW.</p> <p>Point for a witness point on line bet. AP 2 and AP 3, at intersection with the line bet. secs. 7 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R28E S 7 ----- S 18 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 70 lks. E. of a fence, bears NNE and SSW.</p> <p>From this witness point, the 1/4 sec. cor. of secs. 7 and 18, hereinbefore described, bears S. 89°52' E., 2.22 chs. dist.</p>

BOOK 5429



Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
100.332	<p>From this same witness point, the cor. of secs. 7, 12, 13, and 18, on the W. bdy. of the Tp., hereinbefore described, bears N. 89°52' W., 36.51 chs. dist.</p> <p>Point for a witness point on line bet. AP 2 and AP 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R28E S 7 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 76 lks. E. of a fence, bears NNE and SSW.</p>
152.459	<p>Point for a witness point on line bet. AP 2 and AP 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R28E S 7 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 84 lks. E. of a fence, bears NNE and SSW.</p>
155.379	<p>Point for AP 3.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p>

BOOK 5429

Metes-and-Bounds Survey,

T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  <p>T18N R28E S 7 AP3 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the Puerco Rim, bears ENE and WSW.</p> <hr style="width: 20%; margin: auto;"/> <p>Thence N. 41°40' E., on line bet. AP 3 and AP 4, on a NHIRC bdy.</p> <p>Across the very steep, severely eroded NW slope of the Puerco Rim.</p>
6.00	<p>Puerco Rim, bears N. and S.; thence over rolling land, through dense juniper.</p>
6.643	<p>Point for a witness point on line bet. AP 3 and AP 4, at intersection with the line bet. secs. 6 and 7.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  <p>WP T18N R28E S / 6 ----- S / 7 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., the cor. of secs. 5, 6, 7, and 8, hereinbefore described, bears N. 89°26' E., 5.91 chs. dist.</p> <p>From this same cor., the 1/4 secs. cor. of secs. 6 and 7, hereinbefore described, bears S. 89°26' W., 33.63 chs. dist.</p>
13.410	<p>Point for AP 4.</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
24 ins. in the ground, with brass cap mkd.

T18N R28E

AP4

S / 6
1992

from which

A juniper, 11 ins. diam., bears S. 49 1/4° W.,
100 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

The cor. is located 2 chs. S. of the Puerco Rim, bears NE and SW.

Thence N. 72°50' E., on line bet. AP 4 and AP 5, on a NHIRC bdy.

1.401

Point for a witness point on line bet. AP 4 and AP 5, at
intersection with the line bet. secs. 5 and 6.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
24 ins. in the ground, with brass cap mkd.

WP

T18N R28E

S6 | S5
S6 | S5

1993

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

From this cor., the cor. of secs. 5, 6, 7, and 8, hereinbefore
described, bears S. 0°45' E., 5.41 chs. dist.

From this same cor., the 1/4 sec. cor. of secs. 5 and 6,
hereinbefore described, bears N. 0°45' W., 34.65 chs. dist.

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
10.379	<p>Point for AP 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="797 516 997 674" style="text-align: center;"> <p>T18N R28E AP5</p> <p>1992</p> </div> <p>from which</p> <p style="text-align: center;">A juniper, 8 ins. diam., bears N. 30 3/4° W., 63 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
16.363	<p>Thence S. 65°35' E., on line bet. AP 5 and AP 6, on a NHIRC bdy.</p> <p>Point for AP 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="841 1276 1024 1434" style="text-align: center;"> <p>T18N R28E</p> <p>1992</p> </div> <p>from which</p> <p style="text-align: center;">A juniper, 12 ins. diam., bears S. 28 1/4° W., 29 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
26.818	<p>Point for AP 7.</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
22 ins. in the ground, with brass cap mkd.

T18N R28E
S
AP7
5
1992

from which

A juniper, 18 ins. diam., bears N. 67 1/4° W.,
174 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Thence N. 42°30' E., on line bet. AP 7 and AP 8, on a NHIRC bdy.

35.985

Point for AP 8.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
22 ins. in the ground, with brass cap mkd.

T18N R28E
AP8
S
5
1992

from which

A piñon, 9 ins. diam., bears N. 82 1/4° E.,
119 lks. dist., mkd. X BT.

A juniper, 8 ins. diam., bears N. 30 1/4° W.,
33 lks. dist., mkd. X BT.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Thence S. 89°15' E., on line bet. AP 8 and AP 9, on a NHIRC bdy.

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona


CHAINS	
5.606	<p>Point for AP 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E AP9</p>  <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr style="width: 20%; margin: 10px auto;"/>
0.670	<p>Point for a witness point on line bet. AP 9 and AP 10, at intersection with the line bet. secs. 4 and 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R28E</p>  <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>From this cor., the cor. of secs. 4, 5, 8, and 9, hereinbefore described, bears S. 1°26' E., 35.74 chs. dist.</p> <p>From this same cor., the witness cor. for the 1/4 sec. cor. of secs. 4 and 5, hereinbefore described, bears N. 1°26' W., 1.38 chs. dist.</p> <p>From this same cor., the true point for the 1/4 sec. cor. of secs. 4 and 5, not monumented, bears N. 1°26' W., 4.38 chs. dist.</p>
12.575	<p>Point for AP 10.</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
24 ins. in the ground, with brass cap mkd.




Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Thence S. 71°30' E., on line bet. AP 10 and AP 11, on a NHIRC
bdy.

15.985 Point for AP 11.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
23 ins. in the ground, with brass cap mkd.



from which

A juniper, 10 ins. diam., bears N. 18 1/4° W.,
143 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Thence S. 89°59' E., on line bet. AP 11 and AP 12, on a NHIRC
bdy.


12.802 Point for AP 12.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
23 ins. in the ground, with brass cap mkd.

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS



from which

A juniper, 10 ins. diam., bears N. 29° W.,
136 lks. dist., mkd. X BT.


Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.

Set a steel fence post alongside the cor.

Thence N. 63°00' E., on line bet. AP 12 and AP 13, on a NHIRC
bdy.

27.804 Point for AP 13.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
24 ins. in the ground, with brass cap mkd.



from which

A juniper, 11 ins. diam., bears N. 46 1/2° E.,
81 lks. dist., mkd. X BT.

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic
case beneath the stainless steel post.



Set a steel fence post alongside the cor.

Thence N. 83°00' E., on line bet. AP 13 and AP 14, on a NHIRC
bdy.

18.723 Point for a witness point on line bet. AP 13 and AP 14, on the
edge of the Puerco Rim, bears SE and NNW.



BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence across the very steep, severely eroded, northeasterly slope of the Puerco Rim.</p>
20.000	<p>Point for AP 14.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, and encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the very steep, severely eroded, northeasterly slope of the Puerco Rim.</p>
0.156	<hr style="width: 20%; margin: 0 auto;"/> <p>Thence S. 66°55' E., on line bet. AP 14 and AP 15, on a NHIRC bdy.</p> <p>Intersect the line bet. secs. 3 and 4, where it is impracticable to establish a permanent monument.</p> <p>From this point, the cor. of secs. 3, 4, 9, and 10, hereinbefore described, bears S. 0°51' E., 35.93 chs. dist.</p> <p>From this same point, the true point for the 1/4 sec. cor. of secs. 3 and 4, not monumented, bears N. 0°51' W., 3.81 chs. dist.</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
9.622	<p>Point for AP 15.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R28E</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on the very steep, severely eroded, northeasterly slope of the Puerco Rim.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>Thence S. 42°35' E., on line bet. AP 15 and AP 16, on a NHIRC bdy.</p>
17.398	<p>Point for a witness point on line bet. AP 15 and AP 16, on the edge of the Puerco Rim, bears E. and WNW.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Thence descend gradually, over rolling land, through dense juniper.</p>
20.076	<p>Point for AP 16.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429


Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS	
	<div data-bbox="841 352 993 508" data-label="Diagram"> <p>T18N R28E S 3 AP16 1992</p> </div> <p>from which</p> <p>A piñon, 6 ins. diam., bears N. 39 1/4° W., 59 lks. dist., mkd. X BT.</p> <p>A juniper, 6 ins. diam., bears N. 15 3/4° W., 33 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 50 lks. S. of the Puerco Rim, bears SE and NW.</p> <hr/> <p>Thence S. 29°00' E., on line bet. AP 16 and AP 17, on a NHIRC bdy.</p>
11.962	<p>Point for a witness point on line bet. AP 16 and AP 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="841 1344 993 1528" data-label="Diagram"> <p>WP T18N R28E S 3 1992</p> </div>
18.788	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>Point for AP 17.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.


Set a steel fence post alongside the cor.

Thence S. 75°00' E., on line bet. AP 17 and AP 18, on a NHIRC bdy.

1.266

Point for a witness point on line bet. AP 17 and AP 18, at intersection with the line bet. secs. 3 and 10.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

From this cor., the 1/4 sec. cor. of secs. 3 and 10, hereinbefore described, bears N. 88°47' E., 7.30 chs. dist.

From this same cor., the cor. of secs. 3, 4, 9, and 10, hereinbefore described, bears S. 88°47' W., 32.10 chs. dist.

The NHIRC bdy. on the metes-and-bounds line ends at this witness point, thence begin new measurement on the informative traverse.

Informative Traverse, T. 18 N., R. 28 E., G. & SR. Mer., Az.

From the witness point on the line bet. AP 17 and AP 18, at intersection with the line bet. secs. 3 and 10, hereinbefore described.


BOOK 5429

Informative Traverse, T. 18 N., R. 28 E., G. & SR. Mer., Az.

CHAINS	
	Thence S. 75°00' E., on line bet. AP 17 and AP 18, on an informative traverse, continuing on record courses of the 1952 warranty deed.
18.356	Point for AP 18, not monumented. <hr/>
	Thence N. 88°15' E., on line bet. AP 18 and AP 19, on an informative traverse.
24.773	Point for AP 19, not monumented. <hr/>
	Thence N. 77°00' E., on line bet. AP 19 and AP 20, on an informative traverse.
4.387	Intersect the line bet. secs. 10 and 11, not monumented.
	From this point, the 1/4 sec. cor. of secs. 10 and 11, hereinbefore described, bears S. 0°59' E., 36.20 chs. dist.
	From this same point, the cor. of secs. 2, 3, 10, and 11, hereinbefore described, bears N. 0°59' W., 4.00 chs. dist.
20.898	Intersect the line bet. secs. 2 and 11, not monumented.
	From this point, the 1/4 sec. cor. of secs. 2 and 11, hereinbefore described, bears S. 89°00' E., 23.99 chs. dist.
	From this same point, the cor. of secs. 2, 3, 10, and 11, hereinbefore described, bears N. 89°00' W., 16.15 chs. dist.
22.424	Point for AP 20, not monumented. <hr/>
	Thence N. 67°10' E., on line bet. AP 20 and AP 21, on an informative traverse.
24.501	Intersect the N. and S. center line of sec. 2, not monumented.
	From this point, the center S. 1/16 sec. cor. of sec. 2, hereinbefore described, bears N. 0°29' E., 9.24 chs. dist.
	From this same point, the 1/4 sec. cor. of secs. 2 and 11, hereinbefore described, bears S. 0°29' W., 10.27 chs. dist.
31.969	Point for AP 21, not monumented. <hr/>



BOOK 5429

Informative Traverse, T. 18 N., R. 28 E., G. & SR. Mer., Az.

CHAINS	
	Thence N. 45°50' E., on line bet. AP 21 and AP 22, on an informative traverse.
12.424	Point for AP 22, not monumented.
	Thence N. 49°20' E., on line bet. AP 22 and AP 23, on an informative traverse.
11.061	Point for AP 23, not monumented.
	Thence N. 36°25' E., on line bet. AP 23 and AP 24, on an informative traverse.
11.991	Intersect the E. and W. center line of sec. 2, not monumented. From this point, the 1/4 sec. cor. of secs. 1 and 2, hereinbefore described, bears S. 89°23' E., 9.03 chs. dist. From this same point, the center 1/4 sec. cor. of sec. 2, hereinbefore described, bears N. 89°23' W., 31.06 chs. dist.
17.880	Point for AP 24, not monumented.
	Thence N. 67°35' E., on line bet. AP 24 and AP 25, on an informative traverse.
6.039	Point for a witness point on line bet. AP 24 and AP 25, at intersection with the line bet. secs. 1 and 2, and on the NHIRC bdy. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;">  <p>WP T18N R28E S2 S1 S2 S1 1993</p> </div>
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	Set a steel fence post alongside the cor.

BOOK 5429

Informative Traverse, T. 18 N., R. 28 E., G. & SR. Mer., Az.

CHAINS	
	<p>From this cor., the cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., hereinbefore described, bears N. 0°24' E., 32.44 chs. dist.</p> <p>From this same cor., the 1/4 sec. cor. of secs. 1 and 2, hereinbefore described, bears S. 0°24' W., 7.14 chs. dist.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey T. 18 N., R. 28 E., Gila and Salt River Meridian, Az.</p> <hr/> <p>From the witness point on line bet. AP 24 and AP 25, and on the line bet. secs. 1 and 2, hereinbefore described.</p> <p>N. 67°35' E., on line bet. AP 24 and AP 25, on a NHIRC bdy., beginning new measurement, continuing on courses of the 1952 warranty deed.</p>
22.781	<p>Point for a witness point on line bet. AP 24 and AP 25.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located on a broad ridge, bears N. and S.</p>
26.991	<p>Point for AP 25.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;">  </div> <p>from which</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A juniper, 9 ins. diam., bears S. 46° E., 229 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>Thence N. 60°45' E., on line bet. AP 25 and AP 26, on a NHIRC bdy.</p>
20.302	<p>Point for AP 26.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="841 898 1003 1056" style="text-align: center;"> <p>T18N R28E S AP26 1 1992</p> </div> <p>from which</p> <p>A piñon, 6 ins. diam., bears N. 56 1/2° W., 99 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <hr/> <p>Thence N. 46°20' E., on line bet. AP 26 and AP 27, on a NHIRC bdy.</p>
17.817	<p>Point for a witness point, on line bet. AP 26 and AP 27, at intersection with the line bet. secs. 1 and 36, on the N. bdy. of the Tp., and the end of the NHIRC bdy. on the metes-and-bounds line.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

BOOK 5429

Metes-and-Bounds Survey,
T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

WP
T19N R28E
S36

S 1 / S 1

T18N
1992

Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.

Set a steel fence post alongside the cor.

From this cor., the point for AP 27, not monumented, bears N. 46°20' E., 17.335 chs. dist.

From this same cor., the E. 1/16 sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., hereinbefore described, bears N. 89°56' E., 4.74 chs. dist.

From this same cor., the 1/4 sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., hereinbefore described, bears S. 89°56' W., 15.28 chs. dist.

BOOK 5429

GENERAL DESCRIPTION

CHAINS

The land encompassed in this survey 15 to 20 air miles south of the town of Sanders, Arizona. The elevations range from 6300 to 6700 feet above sea level.

The terrain consists of rolling land with dense juniper and piñon forest, some of which has been cleared to improve pasture. The Puerco Rim, a prominent bluff, approximately 500 feet high, traverses across the northern part of the township. North of the Puerco Rim the land drains northerly into the Puerco river; south of the rim the drainage is southerly toward the Zuni river.

Access can be gained from Navajo, Arizona, on U.S. Interstate 40, about 40 miles east of Holbrook, Arizona, then south about 18 miles on a paved county road, then southeasterly through a network of dirt roads accessing several wells and water tanks. Alternately, the township can be accessed by Hardscrabble road, which extends west from U.S. Route 666 between Sanders and St. Johns, Arizona. The south boundary can be reached via a graded dirt road extending west from Witch Well, a tavern located at the intersection of U.S. Route 666 and Arizona Highway 61. Numerous subdivision track roads crisscross the township.

Portions of the central part of the township have been subdivided, with scattered occupancy in the form of residences and small ranches. The remainder of the township is used for grazing and woodcutting.

The mean magnetic declination as taken from quadrangle map FAIRCHILD WELL, ARIZ., published in 1979 by U.S. Geological Survey, is 13° E.

The following information is provided for informational purposes only, and not to be utilized for the restoration of lost corners.

The geographic positions of the following points were determined by the technique of differential positioning using an Ashtech MXII Geodetic Positioning System. U.S.G.S. triangulation stations BEACON 54 B and DEAD were used as the control stations. Coordinates refer to the top of the monuments.

Station	Latitude	Longitude	Datum
Cor. of Tps. 17 and 18 N., Rs. 27 and 28 E.	34°54'27.61" N.	109°25'06.17" W.	NAD 27
Cor. of Tps. 18 and 19 N., Rs. 28 and 29 E.	34°59'40.46" N.	109°18'48.10" W.	NAD 27

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTBOOK 5429
FIELD ASSISTANTS

NAMES	CAPACITY
Daniel R. Muth	Land Surveyor (Trainee)
Cheryl A. Baier	Surveying Technician
Steven J. Buchanan	Surveying Technician
Gordon R. Bubel	Surveying Technician
William F. Foster	Surveying Technician
Geoffrey A. Graham	Surveying Technician
Robert J. Lyle	Surveying Technician
Jack E. Arend	Surveying Aid
Jimmie James Jr.	Surveying Aid
Thomas J. Olson	Surveying Aid
Wallace R. Ott Jr.	Surveying Aid
Johnny R. Ramirez	Surveying Aid
Mark R. Searles	Surveying Aid
Michael A. Searles	Surveying Aid

CERTIFICATE OF SURVEY

BOOK 5429

We, William P. Carpender and Stephen K. Hansen, Cadastral Surveyors, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12th day of January, 1987, and Supplemental Special instructions bearing date of the 29th day of February, 1988, we have dependently resurveyed the Seventh Auxiliary Guide Meridian East (east boundary), the south boundary, the west boundary, the north boundary, and a portion of the subdivisional lines, the subdivision of section 2, a metes-and-bounds survey, and an informative traverse, in Township 18 North, Range 28 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

FEBRUARY 15, 1995
(Date)

William P Carpender
(Cadastral Surveyor)

February 15, 1995
(Date)

Stephen K Hansen
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the Seventh Auxiliary Guide Meridian East (east boundary), the south boundary, the west boundary, the north boundary, and a portion of the subdivisional lines, the subdivision of section 2, a metes-and-bounds survey, and an informative traverse, in Township 18 North, Range 28 East, Gila and Salt River Meridian, Arizona, executed by William P. Carpender and Stephen K. Hansen, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

FEB 27 1995

(Date)

Jerry H. Talbot
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 18 N., R. 28 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~(Date)~~

~~(Acting Chief Cadastral Surveyor of Arizona)~~