

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF A PORTION OF THE SOUTH BOUNDARY,

THE WEST BOUNDARY,

THE NORTH BOUNDARY,

AND A PORTION OF THE SUBDIVISIONAL LINES,

AND THE SUBDIVISION OF SECTIONS 20 AND 29,

TOWNSHIP 18 NORTH, RANGE 27 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY

STEPHEN J. MALLOY, Cadastral Surveyor

Under Special Instructions dated January 12, 1987, approved February 17, 1987, and Supplemental Special Instructions dated and approved February 29, 1988, which provided for the surveys included under Group Number 686 and assignment instructions dated February 17, 1987.


Survey commenced April 26, 1990

Survey completed February 1, 1993

BOOK 5430

INDEX DIAGRAM

TOWNSHIP 18 NORTH, RANGE 27 EAST,

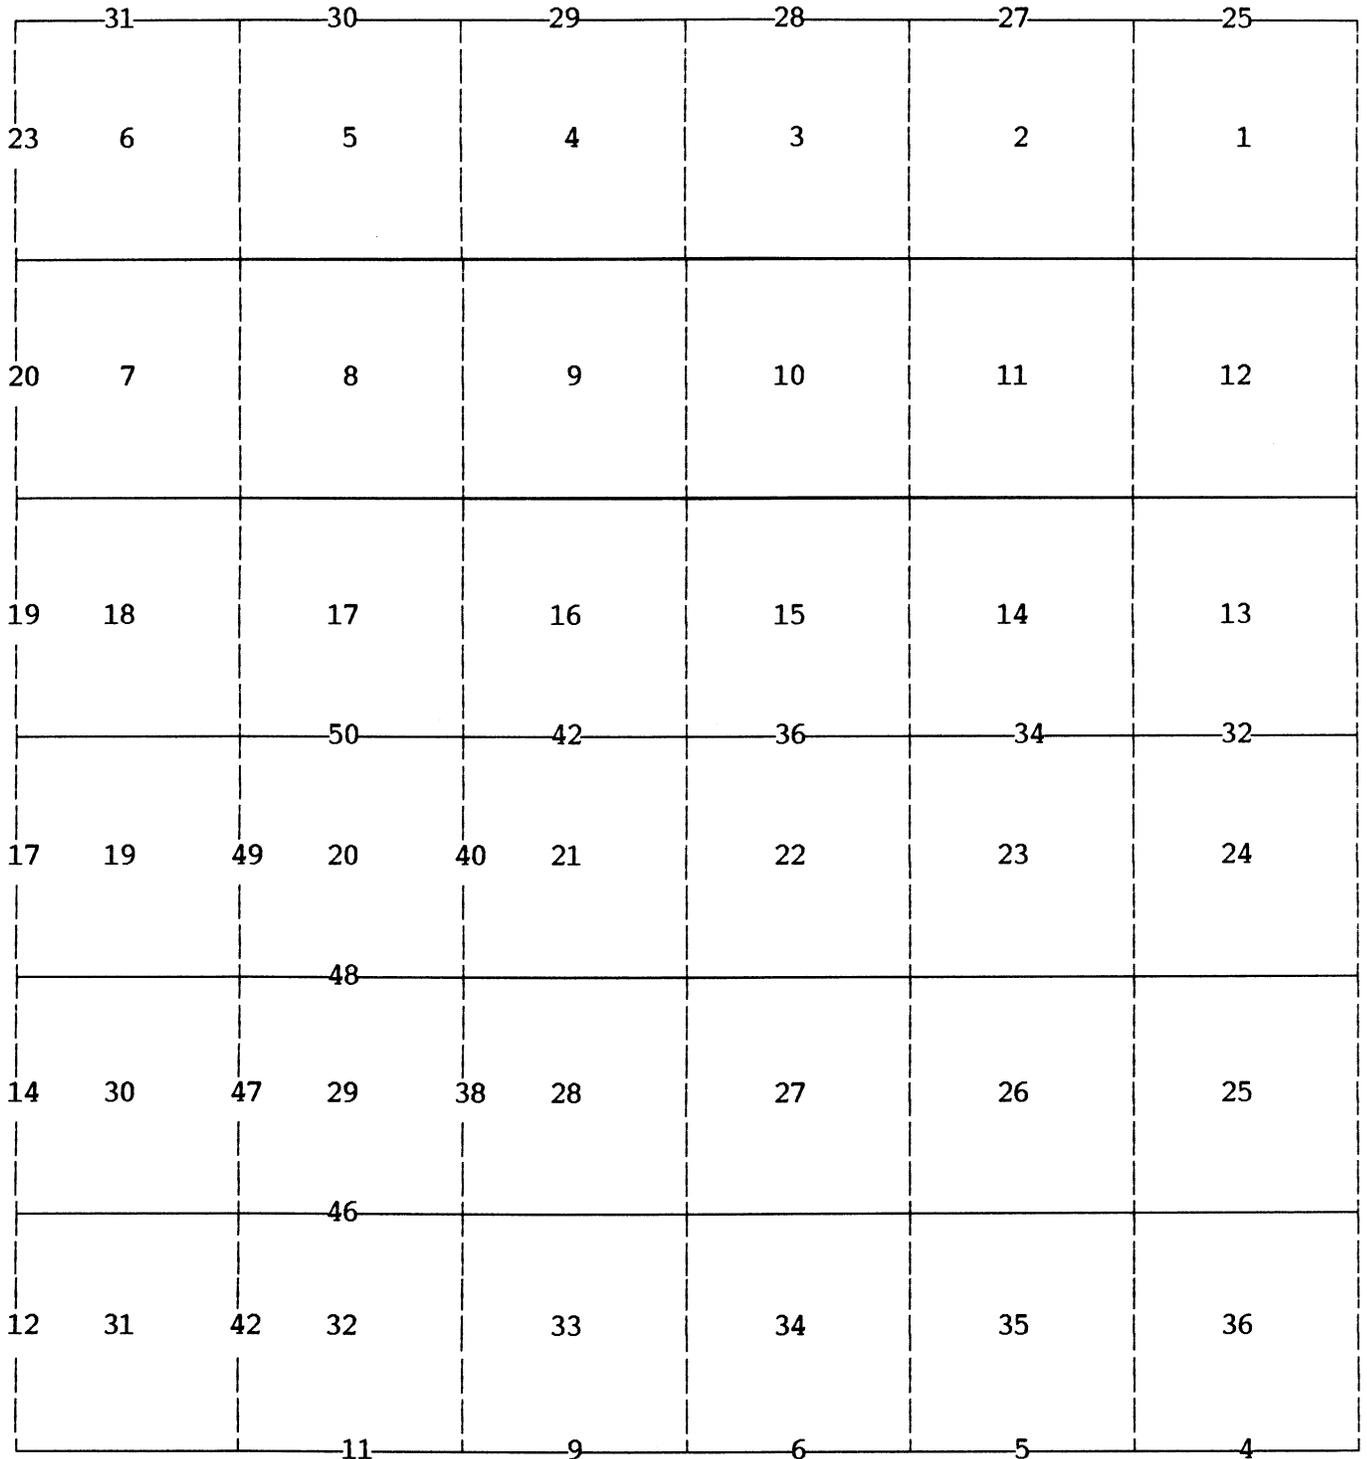

Subdivision Section 20 pp. 51-53

Subdivision Section 29 pg. 53-56

BOOK 5430

T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes are those of the dependent resurvey of a portion of the south boundary, the west boundary, the north boundary, a portion of the subdivisional lines, and the subdivision of sections 20 and 29, Township 18 North, Range 27 East, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this dependent resurvey is as follows: The south boundary was surveyed by Henry A. Coe in 1882. The west boundary was surveyed by Henry Meyrick Jr. in 1882. The north boundary and subdivisional lines were surveyed by Milton Santee in 1882. The southeast township corner was remonumented by Boyd Owens in 1966. The south boundary of section 31 was dependently resurveyed by Duane R. Garoutte in 1987. The east boundary was dependently surveyed by William P. Carpender and Stephen K. Hansen, in 1991-93.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated January 12, 1987, and the Supplemental Special Instructions dated February 29, 1988, for Group No. 686, Arizona.

The purpose of the survey was to determine a portion of the Navajo-Hopi Indian Relocation Commission (NHIRC) boundary.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Topcon or Lietz total station instrument.

The geographic position of the southeast township corner was determined by the technique of relative positioning using the Ashtech GPS Geodetic System. U. S. Coast & Geodetic Survey triangulation stations "Beacon 1936" and "Dead 1936" were used as the control stations. Elevation and coordinate refer to the top of the monument.

Elevation	Latitude	Longitude	
6,565 ft.	34°54'27.72" N.	109°25'08.55" W.	NAD27

The mean magnetic declination as taken from quadrangle map HOGAN WELL, ARIZ., published in 1979 by U.S. Geological Survey, is 12 1/2° E.

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by Henry A. Coe, in 1882</p> <hr/> <p>Beginning at the cor. of Tps. 17 and 18 N., Rs. 27 and 28 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 4 ins. above ground, with a juniper post, 30 ins. long, 4 ins. square, lying loosely alongside, with brass cap mkd. T18N R27E R28E S36 S31 S1 S6 T17N 1966 1991, from which reference monuments set in 1991</p> <p style="padding-left: 40px;">An iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, for a reference monument, bears N. 86°37' E., 33.3 ft. dist., with brass cap mkd. RM T18N R28E S31 33.3 FT TO COR 1991, and an arrow pointing to the cor.</p> <p style="padding-left: 40px;">An iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, for a reference monument, bears N. 30°23' W., 44.5 ft. dist., with brass cap mkd. RM T18N R27E S36 44.5 FT TO COR 1991, and an arrow pointing to the cor.</p> <p>Cor. is located in a cor. of fences bearing NNE, E., and W., and 10 lks. N. of a bladed dirt road, 50 lks. wide, bears E. and S. N. 89°55' W., bet. secs. 1 and 36.</p> <p>Over gently rolling land with sparse juniper.</p> <p>39.45 Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S36 1/4 — S1 T17N 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 24 lks. N. of a fence, bears E. and W.</p> <p>78.90 Point for the cor. of secs. 1, 2, 35, and 36, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T18N R27E</td><td></td></tr> <tr><td>S35</td><td>S36</td></tr> <tr><td>S2</td><td>S1</td></tr> <tr><td colspan="2">T17N</td></tr> <tr><td colspan="2">1992</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, a juniper post, 3 1/2 ins. diam., 40 ins. long, lying loosely, mkd. with 5 grooves on a face and 1 groove on the opposite face, bears S. 58°40' W., 92 lks. dist. This position was established by B.E. Coffman, R.L.S. 4307, circa 1960, using improper control and is not utilized in the course of this resurvey.</p>	T18N R27E		S35	S36	S2	S1	T17N		1992			
T18N R27E													
S35	S36												
S2	S1												
T17N													
1992													
	<p>N. 89°55' W., bet. secs. 2 and 35.</p> <p>Over gently rolling land with sparse to moderate juniper.</p>												
39.45	<p>Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T18N R27E</td><td></td></tr> <tr><td>S35</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S2</td><td></td></tr> <tr><td colspan="2">T17N</td></tr> <tr><td colspan="2">1992</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, a juniper post, 3 ins. diam., firmly set, projecting 34 ins. above ground, no marks visible, bears N. 88°52' W., 94 lks. dist.. This position was established by B.E. Coffman, R.L.S. 4307, circa 1960, using improper control and is not utilized in the course of this resurvey.</p>	T18N R27E		S35		1/4	—	S2		T17N		1992	
T18N R27E													
S35													
1/4	—												
S2													
T17N													
1992													
41.33	<p>Fence, bears N. and S.</p>												

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 78.90</p>	<p>Point for the cor. of secs. 2, 3, 34, and 35, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N</td><td>R27E</td></tr> <tr><td>S34</td><td>S35</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S3</td><td>S2</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td colspan="2" style="text-align: center;">T17N</td></tr> <tr><td colspan="2" style="text-align: center;">1992</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, a juniper post, 3 ins. diam., firmly set, projecting 30 ins. above ground, mkd. with 2 grooves on the E. face and 4 grooves on the W. face, bears N. 89°14' W., 119 lks. dist. This position was established by B.E. Coffman, R.L.S. 4307, circa 1960, using improper control and is not utilized in the course of this resurvey.</p> <hr/> <p>N. 89°55' W., bet. secs. 3 and 34.</p> <p>Over gently rolling land.</p>	T18N	R27E	S34	S35			S3	S2			T17N		1992	
T18N	R27E														
S34	S35														
S3	S2														
T17N															
1992															
<p>18.30</p>	<p>Leave gently rolling land. Enter severely broken land with dense juniper and piñon pine. Descend.</p>														
<p>39.30</p>	<p>Wash, 2 lks. wide, drains SSW. Ascend.</p>														
<p>39.45</p>	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T18N</td><td>R27E</td></tr> <tr><td colspan="2" style="text-align: center;">S34</td></tr> <tr><td colspan="2" style="text-align: center;">1/4 —</td></tr> <tr><td colspan="2" style="text-align: center;">S3</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td colspan="2" style="text-align: center;">T17N</td></tr> <tr><td colspan="2" style="text-align: center;">1992</td></tr> </table> <p>from which</p>	T18N	R27E	S34		1/4 —		S3				T17N		1992	
T18N	R27E														
S34															
1/4 —															
S3															
T17N															
1992															

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 17°48' E., 49.0 ft. dist., with brass cap mkd. RM T18N R27E 1/4 S34 49.0 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Reference monument is located on top of a spur, bears NNE and SE. Set a steel fence post near the reference monument.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 70°27' W., 63.6 ft. dist., with brass cap mkd. RM T17N R27E 1/4 S3 63.6 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Reference monument is located on top of a spur, bears N and SSW. Set a steel fence post near the reference monument.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Set a steel fence post near the cor.

From this cor. point, a juniper post, 46 ins. long, 3 ins. diam., lying loosely, no marks visible, bears S. 71°20' W., 154 lks. dist. This position was established by B.E. Coffman, R.L.S. 4307, circa 1960, using improper control and is not utilized in the course of this resurvey.

62.50 Top of ridge, bears NE and SW.

78.80 Top of ridge, bears NE and SW. Descend.

78.90 Point for the cor. of secs. 3, 4, 33, and 34, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T18N	R27E
S33	S34
S4	S3
T17N	
1992	

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Raise a mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, N. of cor.
	Set a steel fence post near the cor.
	N. 89°55' W., bet. secs. 4 and 33.
	Over severely broken land with moderate juniper and piñon pine.
9.20	Wash, 110 lks. wide, drains southerly. Ascend.
39.45	Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and over a steel fence post, with brass cap mkd.
	<p style="text-align: center;">T18N R27E S33 1/4 — S4 T17N 1992</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
	Set a steel fence post near the cor.
	Cor. is located in a flood plain, drains WSW. Ascend.
60.30	Top of ridge, bears NNE and SSW. Descend.
78.90	Point for the cor. of secs. 4, 5, 32, and 33, at proportionate dist.; there is no remaining evidence of the orig. cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T18N R27E S32 S33 — — S5 S4 T17N 1992</p>
	from which

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, for a reference monument, bears N. 58°02' E., 54.9 ft. dist., with brass cap mkd. RM T18N R27E S33 54.9 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Reference monument is located on top of a ridge, bears E. and W. Set a steel fence post near the reference monument.</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, for a reference monument, bears N. 29°00' W., 33.3 ft. dist., with brass cap mkd. RM T18N R27E S32 33.3 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Reference monument is located on top of a ridge, bears E. and W. Set a steel fence post near the reference monument.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located at the head of a wash, 2 lks. wide, drains southerly.</p>
	<p>From this cor. point, a sandstone, 21 x 6 x 6 ins., lying loosely on the ground, mkd. with 4 grooves on a face and 2 grooves on opposite face, bears S. 13°19' W., 206 1/2 lks. dist. This position was established by B.E. Coffman, R.L.S. 4307, circa 1960, using improper control, perpetuated by persons unknown, and is not utilized in the course of this resurvey.</p>
	<hr/> <p>N. 89°55' W., bet. secs. 5 and 32.</p>
	<p>Over severely broken land with moderate juniper and piñon pine.</p>
3.60	<p>Top of ridge, bears E. and W. Descend.</p>
28.30	<p>Left Bank, Milky Wash, bears NE and SW.</p>
33.30	<p>Right Bank, Milky Wash, bears NE and SW.</p>
39.45	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T18N R27E S32 1/4 — S5 T17N 1992</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 29°39' W., 196.0 ft. dist., with brass cap mkd. RM T17N R27E 1/4 S5 196.0 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Reference monument is located on an accretion peninsula of Milky Wash. Set a steel fence post near the reference monument.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 75°07' W., 290.6 ft. dist., with brass cap mkd. RM T18N R27E 1/4 S32 290.6 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post near the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of cor.</p> <p>Set a steel fence post near the cor.</p>
40.62	Right bank, Milky Wash, bears SE curving southerly, and NW curving westerly.
43.50	Right bank, Milky Wash, bears NNE curving easterly, and SSW curving southerly. Ascend.
52.54	From this point, a rebar, 1/2 ins. diam., firmly set, projecting 3 ins. above ground, bears N., 117 lks. dist.
63.00	Top of ridge, bears NE and SW Descend.
78.90	The cor. of secs. 5, 6, 31, and 32, monumented with a magnet in a 1 x 1 x 2 5/8 ins. white plastic case, firmly set, 24 ins. below the ground, under a rebar, 5/8 ins. diam., 21 ins. long, firmly set, 23 ins. in the ground.

BOOK 5430

Dependent Resurvey of a Portion of the South Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

The 1987 Bureau of Land Management stainless steel post, and orig. post, moved and reset by persons unknown, bears S. $89^{\circ}59'$ W., 487 lks. dist. Remove the 1987 stainless steel post from the erroneous position.

At the cor. point

Reset the stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap now mkd.

T18N	R27E
S31	S32
S6	S5
	T17N
	1987
	1992

from which

A juniper, 7 ins. diam., bears N. $49\ 1/4^{\circ}$ E.,
145 lks. dist., mkd. T18N R27E S32 BT.

A juniper, 7 ins. diam., bears S. $20\ 1/2^{\circ}$ E.,
101 lks. dist., mkd. T17N R27E S5 BT.

A juniper, 11 ins. diam., bears S. $68\ 3/4^{\circ}$ W.,
109 lks. dist., mkd. T17N R27E S6 BT.

Rebury the orig. post alongside the stainless steel post.

Deposit the rebar inside the stainless steel post.

Set a steel fence post near the cor.

From this cor. point, the 1/4 sec. cor. of secs. 6 and 31, bears N. $89^{\circ}45'$ W., 41.11 chs. dist., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. T18N R27E S31 1/4 S6 T17N 1987. Cor. is located in a fence, bears E. and W. Add the marks 1992 to the brass cap.

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by Henry Meyrick Jr., in 1882</p> <hr/> <p>From the cor. of Tps. 17 and 18 N., Rs. 26 and 27 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with a mound of stone, 3 ft. base, 1 1/2 ft. high, to the S., and a steel fence post, firmly set, near the cor., with brass cap mkd. T18N R26E R27E S36 S31 S1 S6 T17N 1987. Add the marks 1992 to the brass cap.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p> <p>N. 0°20' W., bet. secs. 31 and 36.</p> <p>Over gently rolling land with sparse juniper, along the westerly Salt River Project railroad right-of-way fence, bears, N. and S.</p> <p>7.47 Point for a witness point on line bet. secs. 31 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R26E R27E S36 S31 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p> <p>40.13 The 1/4 sec. cor. of secs. 31 and 36, monumented with an iron pipe, 37 ins. long, 1 1/2 ins. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 3 ft. base, 1/2 ft. high, with a brass cap mkd. LS 5704 R26E R27E S36 S31 1/4 T18N 1971. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the orig. corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T18N 1/4 R26E R27E S36 S31 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p> <p>From this cor. point, an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, set in concrete, with a brass cap mkd. SALT RIVER PROJECT POINT POT 810+00 OFFSET 103.50 ELEV MSL 6096.52 LS 8906 REFERENCE MONUMENT, bears N. 1°29' W., 123 1/2 lks. dist. Reference monument is located 2 lks. west of the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°19' W., beginning new measurement.</p>
4.64	<p>Point for a witness point on line bet. secs. 31 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WP T18N R26E R27E S36 S31 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
37.58	<p>Point for a witness point on line bet. secs. 31 and 36.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
 T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T18N R26E R27E S36 S31 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
<p>40.22</p>	<p>The cor. of secs. 25, 30, 31, and 36, monumented with an iron pipe, 36 ins. long, 1 1/2 ins. diam., firmly set, projecting 15 ins. above ground, with a brass cap mkd. LS 5704 R26E R27E S25 S30 S36 S31 T18N 1971. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the orig. corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R26E R27E S25 S30 <hr style="width: 100%;"/> S36 S31 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
<p>7.57</p>	<p>N. 0°21' W., bet. secs. 25 and 30.</p> <p>Over gently rolling land with sparse juniper, along the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p> <p>Point for a witness point on line bet. secs. 25 and 30.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R26E R27E S25 S30 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
40.13	<p>The 1/4 sec. cor. of secs. 25 and 30, monumented with an iron pipe, 37 ins. long, 1 1/2 ins. diam., firmly set, projecting 12 ins. above ground, in a mound of stone, 2 ft. base, 1/2 ft. high, with brass cap mkd. LS 5704 R26E R27E S25 S30 1/4 T18N 1971. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the orig. corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N 1/4 R26E R27E S25 S30 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
19.45	<p style="text-align: center;">_____</p> <p>N. 0°20' W., beginning new measurement.</p> <p>From this point, a rebar, 1/2 ins. diam., firmly set, projecting 4 ins. above ground, bears W., 7.5 lks. dist.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
 T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS 26.69	<p>Point for a witness point on line bet. secs. 25 and 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> WP T18N R26E R27E S25 S30 1992 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
40.13	<p>The cor. of secs. 19, 24, 25, and 30, monumented with an iron pipe, 30 ins. long, 1 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. LS 5704 R26E R27E S24 S19 S25 S30 T18N 1971, with a weathered sandstone, 25 x 14 X 7 ins., loosely set, projecting 13 ins. above the ground, alongside. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, perpetuated by persons unknown, and is accepted as a careful and faithful reestablishment of the orig. corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T18N R26E R27E S24 S19 ———— S25 S30 1992 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside the stainless steel post and bury the sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
 T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>N. 0°20' W., bet. secs. 19 and 24.</p> <p>Over gently rolling land, along the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
40.11	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented with an iron pipe, 37 ins. long, 1 1/2 ins. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd. 1971 LS 5704 R26E R27E S24 S19 1/4 T18N. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971 and is accepted as a careful and faithful reestablishment of the corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T18N 1/4 R26E R27E S24 S19 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the iron pipe alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/>
12.29	<p>N. 0°20' W., beginning new measurement.</p> <p>Point for a witness point on line bet. secs. 19 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>WP T18N R26E R27E S24 S19 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S., and on top of a ridge, bears, NE and SW.</p>												
40.13	<p>The cor. of secs. 13, 18, 19, and 24, monumented with an iron pipe, 1 1/2 ins. diam., 36 ins. long, firmly set, 6 ins. below the surface of ground, with brass cap mkd. LS 5704 S13 S18 S24 S19 T18N 1971. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the corner position.</p>												
	<p>At the cor. point</p>												
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>												
	<table border="1"> <tr> <td colspan="2" style="text-align: center;">T18N</td> </tr> <tr> <td style="text-align: center;">R26E</td> <td style="text-align: center;">R27E</td> </tr> <tr> <td style="text-align: center;">S13</td> <td style="text-align: center;">S18</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S24</td> <td style="text-align: center;">S19</td> </tr> <tr> <td colspan="2" style="text-align: center;">1992</td> </tr> </table>	T18N		R26E	R27E	S13	S18	-----		S24	S19	1992	
T18N													
R26E	R27E												
S13	S18												

S24	S19												
1992													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>												
	<p>Deposit the iron pipe inside the stainless steel post.</p>												
	<p>Set a steel fence post near the cor.</p>												
	<p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>												
	<p>From this cor. point, an aluminum disk, 3 3/4 ins. diam., firmly set flush in a concrete encasement, 7 ins. square, projecting 8 ins. above ground, with disk mkd. U. S. DEPARTMENT OF INTERIOR ELEV. 6110 FT ABOVE SEA 91 DOR 1972 GEOLOGICAL SURVEY and with a + inside a triangle at the center of the disk, bears S. 8°33' E., 15 lks. dist. Bench mark is located 2 lks. E. of the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>												
	<hr/> <p>N. 0°20' W., bet. secs. 13 and 18.</p>												
	<p>Over gently rolling land, along the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>												

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
12.71	<p>From this point, an iron post, 2 ins. diam., firmly set, projecting 2 ins. above ground, set in concrete, with a brass cap mkd. SALT RIVER PROJECT POINT POT 670+00 OFFSET -109.47 ELEV MSL 6122.70 LS 8906 REFERENCE MONUMENT, bears W., 3 lks. dist. Reference monument is located 2 lks. west of the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
18.03	<p>Point for a witness point on line bet. secs. 13 and 18.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R26E R27E S13 S18 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S., and on top of a ridge, bears NE and SW.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N 1/4 R26E R27E S13 S18 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in the westerly Salt River Project railroad right-of-way fence, bears N. and S.</p>
42.25	<p>Bladed dirt road, 35 lks. wide, bears NE and SSW.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS													
57.63	From this point, an aluminum disk, 3 3/4 ins. diam., firmly set flush in a concrete base of a windmill, projecting 1 ins. above ground, with disk mkd. U. S. DEPARTMENT OF INTERIOR ELEV. 6123FT ABOVE SEA 90 DOR 1972 GEOLOGICAL SURVEY and with a + inside a triangle at the center of the disk, bears W., 92 1/2 lks. dist.												
80.26	<p>The cor. of secs. 7, 12, 13, and 18, monumented with a galvanized steel pipe, 30 ins. long, 2 1/4 ins. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd. LACY C GREER 12 7 13 18 T18N 1963 ENGR CO. A partially decomposed hewn juniper post, 22 ins. long, 3 ins. square, no marks visible and a weathered sandstone, 18 x 14 x 8 ins., mkd. with 4 grooves on a face and 2 grooves on the opposite face, were both found lying loosely alongside the steel pipe. This corner was reestablished by persons unknown, perpetuated by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table border="1" data-bbox="846 995 1029 1178"> <tr> <td colspan="2" data-bbox="894 995 964 1022">T18N</td> </tr> <tr> <td data-bbox="846 1026 932 1054">R26E</td> <td data-bbox="956 1026 1029 1054">R27E</td> </tr> <tr> <td data-bbox="862 1058 915 1085">S12</td> <td data-bbox="956 1058 993 1085">S7</td> </tr> <tr> <td colspan="2" data-bbox="862 1100 1013 1127"><hr/></td> </tr> <tr> <td data-bbox="862 1121 915 1148">S13</td> <td data-bbox="956 1121 1013 1148">S18</td> </tr> <tr> <td colspan="2" data-bbox="894 1152 964 1180">1992</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the galvanized steel pipe inside the stainless steel post.</p> <p>Bury the juniper post and marked sandstone alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N. 0°13' W., bet. secs. 7 and 12.</p> <p>Asc. over rolling land.</p>	T18N		R26E	R27E	S12	S7	<hr/>		S13	S18	1992	
T18N													
R26E	R27E												
S12	S7												
<hr/>													
S13	S18												
1992													
7.80	<p>Point for a witness point on line bet. secs. 7 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>												

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">WP T18N R26E R27E S12 S7 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a ridge, bears NE and SW.</p>
28.54	<p>Point for a witness point on line bet. secs. 7 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WP T18N R26E R27E S12 S7 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 13 lks. W. of a bladed dirt road, 22 lks. wide, bears N. and S.</p>
29.30	<p>Top of a ridge, bears SE and SW. Descend.</p>
40.12	<p>Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a mound of stone, 4 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T18N 1/4 R26E R27E S12 S7 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
50.78	<p>Cor. is located 5 lks. W. of a bladed dirt road, 20 lks. wide, bears N. and S.</p> <p>Point for a witness point on line bet. secs. 7 and 12.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WP T18N R26E R27E S12 S7 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
80.24	<p>Cor. is located 12 lks. W. of a bladed dirt road, 22 lks. wide, bears N. and S.</p> <p>The cor. of secs. 1, 6, 7, and 12, monumented with an iron pipe, 30 ins. long, 1 7/8 ins. diam., firmly set, projecting 7 ins. above ground, with a brass cap mkd. LS 5704 R26E R27E S1 S6 S12 S7 T18N 1971. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled with a mound of stone, 2 ft. base, 1/2 ft. high, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R26E R27E S1 S6 ----- S12 S7 1992</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the iron pipe inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr/> <p>N. 0°02' W., bet. secs. 1 and 6.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over near level land with moderate juniper.
0.20	Bladed dirt road, 25 lks. wide, bears SSE curving southerly, and NNW curving westerly.
4.50	Salt River Project railroad track, bears SSE curving southerly, and NNW curving westerly.
5.10	<p>Point for a witness point on line bet. secs. 1 and 6.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> WP T18N R26E R27E S1 S6 1992 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on top of the Salt River Project railroad track embankment, bears SSE curving southerly, and NNW curving westerly.</p>
8.26	<p>Northerly Salt River Project railroad right-of-way fence, bears SSE curving southerly, and NNW curving westerly.</p>
39.88	<p>The 1/4 sec. cor. of secs. 1 and 6, monumented with a bent iron pipe, 30 ins. long, 1 5/8 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. LS 5704 R26E R27E S1 S6 1/4 T18N 1972. This corner was reestablished by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T18N 1/4 R26E R27E S1 S6 1992 </div> <p>from which</p> <p style="text-align: center;">A juniper, 11 ins. diam., bears S. 30° E., 451 lks. dist., mkd. 1/4 S6 BT.</p>

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Straighten and deposit iron pipe inside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°13' W., beginning new measurement.</p> <p>4.40 Westerly edge of bladed dirt road, 45 lks. wide, bears SSE curving easterly, and NNW curving northerly. Continue northerly along west edge of bladed dirt road.</p> <p>41.00 The cor. of Tps. 18 and 19 N., Rs. 26 and 27 E., monumented with a rebar, 18 ins. long, 1/2 ins. diam., firmly set in a concrete encasement, 5 ins. diam., 10 ins. long, set flush with the ground, with broken brass cap mkd. LS 57 T19 36. A decayed wood post, 11 ins. long, 5 ins. diam., was found lying loosely alongside, no marks visible. This corner was reestablished by persons unknown, and perpetuated by Lacy Camp Greer, R.L.S. 5704, in 1971, and is accepted as a careful and faithful reestablishment of the corner position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 35 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="border-collapse: collapse; margin: 0 auto;"> <tr> <td colspan="2" style="padding: 2px 10px;">T19N</td> </tr> <tr> <td style="padding: 2px 5px;">R26E</td> <td style="padding: 2px 5px;">R27E</td> </tr> <tr> <td style="padding: 2px 5px;">S36</td> <td style="padding: 2px 5px;">S31</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black; padding: 2px 0 2px 10px;"></td> </tr> <tr> <td style="padding: 2px 5px;">S1</td> <td style="padding: 2px 5px;">S6</td> </tr> <tr> <td colspan="2" style="padding: 2px 10px;">T18N</td> </tr> <tr> <td colspan="2" style="padding: 2px 10px;">1992</td> </tr> </table> </div> <p>from which</p> <p style="margin-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 40°28' E., 144.3 ft. dist., with brass cap mkd. RM T19N R27E S31 144.3 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post near the reference monument.</p>	T19N		R26E	R27E	S36	S31			S1	S6	T18N		1992	
T19N															
R26E	R27E														
S36	S31														
S1	S6														
T18N															
1992															

BOOK 5430

Dependent Resurvey of the West Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears S. 37°57' W., 137.8 ft. dist., with brass cap mkd. RM T18N R27E S6 137.8 FT. TO COR. 1992, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post near the reference monument.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post and bury the wood post alongside the stainless steel post.</p> <p>Cor. is located in the southerly edge of a dirt and gravel road, 35 lks. wide, bears E. and W.</p> <p>From this cor. point, an aluminum disk, 3 3/4 ins. diam., firmly set flush in a concrete encasement, 7 ins. square, projecting 6 ins. above the ground, with disk mkd. U. S. DEPARTMENT OF INTERIOR ELEV. 6061FT ABOVE SEA 88 DOR 1972 GEOLOGICAL SURVEY and with a + inside a triangle at the center of the disk, bears S. 1°28' E., 38 1/2 lks. dist. Benchmark is located 4 lks. E. of a fence, bears N. and S.</p> <hr/> <p>Dependent Resurvey of the North Boundary T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Restoring the survey executed by Milton Santee, in 1882</p> <hr/> <p>From the cor. of Tps. 18 and 19 N., Rs. 27 and 28 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above ground, in a mound of stone, 3 ft. base, 1/2 ft. high, with a steel fence post, firmly set, near the cor., with brass cap mkd. T19N R27E R28E S36 S31 S1 S6 T18N 1992, from which an accessory established by Carpender and Hansen in 1992</p> <p>A piñon pine, 8 ins. diam., bears N. 57 3/4° E., 26 1/2 lks. dist., mkd. X BT.</p> <p>N. 89°40' W., bet. secs. 1 and 36.</p> <p>Asc. over severely broken land with moderate juniper and piñon pine, along the Rio Puerco Divide.</p> <p>12.00 Top of Rio Puerco Divide, bears NNE, and SSW. Over gently rolling land.</p>
--------	--

BOOK 5430

Dependent Resurvey of the North Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS
38.63

Point for the 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; falls on the steep face of Puerco River Divide where it is impracticable to reestablish a permanent monument, there is no remaining evidence of the orig. cor.

From this point, the point selected for the witness cor., bears S. 44°53' E., 0.84 chs. dist.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

WC
T19N R27E
S36
1/4 —
S1
T18N
1993

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

The witness cor. is located 1 ch. S. of the Rio Puerco Divide, bears NE and SW.

77.26

The cor. of secs. 1, 2, 35, and 36, monumented with a weathered hewn juniper post, 54 ins. long, 4 ins. square, firmly set, projecting 48 ins. above ground, mkd. S35 with other illegible scribe markings on NW face, and illegible scribe markings on SW face.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

T19N R27E
S35 | S36
— | —
S2 | S1
T18N
1993

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Bury the juniper post alongside the stainless steel post.

Set a steel fence post near the cor.

BOOK 5430

Dependent Resurvey of the North Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor. point, a rebar, 1/2 ins. diam., firmly set, projecting 2 ins. above ground, bears S. 58° W., 3 1/4 lks. dist.</p> <hr/>
	<p>N. 89°58' W., bet. secs. 2 and 35.</p>
3.46	<p>Fence, bears ENE and WSW.</p>
11.10	<p>Over broken rolling land with dense juniper and piñon pine. Descend.</p>
39.15	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented with a weathered sandstone, 28 x 20 x 6 ins., firmly set, projecting 12 ins. above ground, with illegible markings on a face.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S35 1/4 — S2 T18N 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>
	<p>Bury the sandstone alongside the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p> <hr/>
	<p>N. 89°03' W., beginning new measurement.</p>
40.28	<p>Point for the cor. of. secs. 2, 3, 34, and 35, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S34 S35 — — S3 S2 T18N 1993</p>

BOOK 5430

Dependent Resurvey of the North Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p> <hr/>
	<p>N. 89°03' W., bet. secs. 3 and 34.</p>
	<p>Over broken rolling land with dense juniper and scattering piñon pine. Descend.</p>
39.70	<p>Wash, 8 lks. wide, drains WNW. Ascend.</p>
40.28	<p>Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S34 1/4 —</p>
	<p style="text-align: center;">S3 T18N 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p>
80.56	<p>Point for the cor. of secs. 3, 4, 33, and 34, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R27E S33 S34</p>
	<p style="text-align: center;">S4 S3 T18N 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Set a steel fence post near the cor.</p> <hr/>
	<p>N. 89°03' W., bet. secs. 4 and 33.</p>

BOOK 5430

Dependent Resurvey of the North Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.28	<p>Desc. over broken rolling land with dense juniper and piñon pine.</p> <p>Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S33 1/4 — S4 T18N 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
80.56	<p>Point for the cor. of secs. 4, 5, 32, and 33, at proportionate dist.; falls in a wash were it is impracticable to reestablish a permanent monument; there is no remaining evidence of the orig. cor.</p> <p style="text-align: center;">From this point, the point selected for the witness cor., bears N. 42°59' E., 1.50 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WC T19N R27E S32 S33 —+— S5 S4 T18N 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
40.28	<p>N. 89°03' W., bet. secs. 5 and 32.</p> <p>Over gently rolling land with sparse juniper.</p> <p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>

BOOK 5430

Dependent Resurvey of the North Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S32 1/4 — S5 T18N 1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears S. 26 1/4° W., 128 1/2 lks. dist., mkd. 1/4 S5 BT.</p> <p style="padding-left: 40px;">A juniper, 24 ins. diam., bears N. 60° W., 160 lks. dist., mkd. 1/4 S32 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located in a railed area.</p> <p>80.56 Point for the cor. of secs. 5, 6, 31, and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R27E S31 S32 — — S6 S5 T18N 1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 40 1/4° E., 180 1/2 lks. dist., mkd. T19N R27E S32 BT.</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 80 3/4° E., 40 lks. dist., mkd. T18N R27E S5 BT.</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 10 1/4° W., 360 1/2 lks. dist., mkd. T18N R27E S6 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
--------	---

BOOK 5430

Dependent Resurvey of the North Boundary
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a steel fence post near the cor.
	<hr/>
	N. 89°03' W., bet. secs. 6 and 31.
	Over gently rolling land with sparse juniper.
40.28	Point for the 1/4 sec. cor. of secs. 6 and 31, at proportionate dist.; there is no remaining evidence of the orig. cor.
	At the cor. point
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
	25 ins. in the ground, encircled with a mound of stone, 3 ft.
	base, to top, with brass cap mkd.
	T19N R27E
	S31
	1/4 —
	S6
	T18N
	1992
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
	beneath the stainless steel post.
	Set a steel fence post near the cor.
79.80	Center of a bladed dirt road, 46 lks. wide, bears N. and S.
80.15	The cor. of Tps. 18 and 19 N., Rs. 26 and 27 E., hereinbefore
	described.
	<hr/>
	Dependent Resurvey of a Portion of the Subdivisional Lines
	T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona
	<hr/>
	Restoring the survey executed by
	Milton Santee, in 1882
	<hr/>
	From the cor. of secs. 13, 18, 19, and 24, on the E. bdy. of the
	Tp., monumented with a stainless steel post, 2 1/2 ins. diam.,
	firmly set, projecting 4 ins. above the ground, with a mound of
	stone, 3 ft. base, 1 ft. high, N. of cor., and a steel fence
	post, firmly set, near the cor., with brass cap mkd. T18N R27E
	R28E S13 S18 S24 S19 1992.
	Cor. is located in a fence, bears E. and W.
	S 89°37' W., bet. secs. 13 and 24.

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
6.37	<p>Over gently rolling land in railed area with sparse juniper.</p> <p>Point for a witness point on line bet. secs. 13 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S13 ----- S24 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 3 lks. S. of a fence, bears E. and W.</p>
22.58	<p>Point for a witness point on line bet. secs. 13 and 24.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S13 ----- S24 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 10 lks. S. of a fence, bears E. and W.</p>
39.81	<p>Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S13 1/4 — S24 1992</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 9 ins. diam., bears N. 84 1/4° W., 415 lks. dist., mkd. 1/4 S13 BT.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 34 lks. S. of a fence, bears E. and W.</p>								
79.62	<p>Point for the cor. of secs. 13, 14, 23 and 24, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 20px 0;"> <table style="border-collapse: collapse; margin: auto;"> <tr> <td style="padding: 0 10px;">T18N</td> <td style="padding: 0 10px;">R27E</td> </tr> <tr> <td style="padding: 0 10px;">S14</td> <td style="padding: 0 10px;">S13</td> </tr> <tr> <td style="border-top: 1px solid black; padding: 0 10px;">S23</td> <td style="border-top: 1px solid black; padding: 0 10px;">S24</td> </tr> <tr> <td colspan="2" style="padding: 0 10px;">1992</td> </tr> </table> </div> <p>from which</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 64 1/2° E., 200 lks. dist., mkd. T18N R27E S13 BT.</p> <p style="padding-left: 40px;">A juniper, 18 ins. diam., bears N. 51 1/2° W., 142 lks. dist., mkd. T18N R27E S14 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 92 lks. S. of a fence, bears E. and W.</p> <p>From this cor. point, the cor. of secs. 1, 2, 35, and 36, on the N. bdy. of the Tp., bears N. 0°39' E., 238.48 chs. dist., hereinbefore described</p> <p>From this same cor. point, the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., bears S. 0°02' W., 238.62 chs. dist., hereinbefore described</p> <hr style="border: 0.5px solid black; margin: 20px 0;"/> <p>N. 89°45' W., bet. secs. 14 and 23.</p> <p>Over gently rolling land with sparse juniper and piñon pine.</p>	T18N	R27E	S14	S13	S23	S24	1992	
T18N	R27E								
S14	S13								
S23	S24								
1992									

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 33.41</p>	<p>Point for a witness point on line bet. secs. 14 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S14 ----- S23 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 107 lks. S. of a fence, bears E. and W.</p>
<p>39.99</p>	<p>Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S14 1/4 — S23 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 108 lks. S. of a fence, bears E. and W.</p>
<p>40.11</p>	<p>Fence, bears N. and S.</p>
<p>69.58</p>	<p>Point for a witness point on line bet. secs. 14 and 23.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S14 ----- S23 1992</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>										
	<p>Set a steel fence post near the cor.</p>										
	<p>Cor. is located 121 lks. S. of a fence, bears E. and W.</p>										
32.90	<p>Track road, 12 lks. wide, bears NE and SW curving southerly.</p>										
34.66	<p>Enter broken rolling land with dense juniper and piñon pine. Descend.</p>										
76.70	<p>Wash, 5 lks. wide, drains SSW.</p>										
78.35	<p>Wash, 3 lks. wide, drains southerly.</p>										
79.94	<p>Wash, 2 lks. wide, drains SSE.</p>										
79.98	<p>Point for the cor. of secs. 14, 15, 22 and 23, at proportionate dist.; there is no remaining evidence of the orig. cor.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground and over a steel fence post, with brass cap mkd.</p>										
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td colspan="2" style="text-align: center;">T18N R27E</td> </tr> <tr> <td style="text-align: center;">S15</td> <td style="text-align: center;">S14</td> </tr> <tr> <td colspan="2" style="text-align: center;">-----</td> </tr> <tr> <td style="text-align: center;">S22</td> <td style="text-align: center;">S23</td> </tr> <tr> <td colspan="2" style="text-align: center;">1992</td> </tr> </table>	T18N R27E		S15	S14	-----		S22	S23	1992	
T18N R27E											
S15	S14										

S22	S23										
1992											
	<p>from which</p>										
	<p style="padding-left: 40px;">A juniper, 16 ins. diam., bears N. 39 1/2° E., 172 1/2 lks. dist., mkd. T18N R27E S14 BT.</p>										
	<p style="padding-left: 40px;">A piñon pine, 14 ins. diam., bears N. 49° W., 182 1/2 lks. dist., mkd. T18N R27E S15 BT.</p>										
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>										
	<p>Set a steel fence post near the cor.</p>										
	<p>Cor. is located 92 lks. S. of a fence, bears E. and W.</p>										
	<p>From this cor. point, the cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., bears N. 0°47' E., 238.82 chs. dist., hereinbefore described.</p>										

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor. point, the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., bears S. 0°14' E., 238.85 chs. dist., hereinbefore described.</p> <hr/> <p>N. 89°35' W., bet. secs. 15 and 22.</p> <p>Over broken rolling land with dense juniper and piñon pine.</p> <p>1.97 Point for a witness point on line bet. secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S15</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S22 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a spur, bears N. and S., and 124 lks. S. of a fence, bears E. and W.</p>
	<p>10.47 Point for a witness point on line bet. secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S15</p> <hr style="width: 20%; margin: auto;"/> <p style="text-align: center;">S22 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a spur, bears N. and S., and 125 lks. S. of a fence, bears E. and W. Descend.</p>
39.66	<p>Wash, 8 lks. wide, drains NE. Ascend.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 39.81</p>	<p>Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground and over a steel fence post, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S15 1/4 — S22 1992</p> <p>from which</p> <p style="text-align: center;">A piñon pine, 9 ins. diam., bears N. 50 1/2° W., 178 1/2 lks. dist., mkd. 1/4 S15 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 108 lks. S. of a fence, bears E. and W.</p>
<p>41.13</p>	<p>Point for a witness point on line bet. secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S15 —— S22 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a ridge, bears N. and S. and 106 lks. S. of a fence, bears E. and W. Descend.</p>
<p>79.61</p>	<p>Point for the cor. of secs. 15, 16, 21 and 22, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

T18N R27E	
S16	S15

S21	S22
1992	

from which

A juniper, 10 ins. diam., bears N. 5 1/2° E.,
110 lks. dist., mkd. T18N R27E S15 BT.

A piñon pine, 7 ins. diam., bears N. 47 1/2° W.,
186 1/2 lks. dist., mkd. T18N R27E S16 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
beneath the stainless steel post.

Set a steel fence post near the cor.

Cor. is located 81 lks. S. of a fence, bears E. and W.

From this cor. point, the cor. of secs. 3, 4, 33, and 34, on the
N. bdy. of the Tp., bears N. 0°32' E., 239.56 chs. dist.,
hereinbefore described.

From this same cor. point, the cor. of secs. 3, 4, 33, and 34, on
the S. bdy. of the Tp., bears S. 0°24' E., 239.31 chs. dist.,
hereinbefore described.

From this same cor. point, a juniper post, 4 ins. diam., 30 ins.
long, lying loosely on the ground, mkd. with 4 grooves, on a
face, and with 3 grooves an adjoining face, bears N. 45°53' E.,
82 lks. dist. This position was established by B.E. Coffman,
R.L.S. 4307, recorded at the Apache County Courthouse in 1960,
using improper control and is not utilized in the course of this
resurvey.

From the point for the cor. of secs. 28, 29, 32, and 33; at
proportionate dist., there is no remaining evidence of the orig.
cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
26 ins. in the ground, with brass cap mkd.

T18N R27E	
S29	S28

S32	S33
1993	

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 180 lks. W. of the SE edge of the top of a mesa, bears NE and SW, and 210 lks. N. of the SE edge of the top of the same mesa, bears NNE and SSW.</p> <p>From this cor. point, the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the Tp., bears S. 89°57' E., 318.28 chs. dist., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. T18N R27E R28E S25 S30 S36 S31 1991. Cor. is located 8 lks. E. of a fence, bears N. and S.</p> <p>From this same cor. point, the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the Tp., bears S. 1°53' E., 80.00 chs. dist., hereinbefore described.</p> <p>From this same cor. point, a juniper post, 43 ins. long, 3 ins. diam., lying loosely, no marks visible, bears N. 83°27' E., 195 lks. dist. This position was established by B.E. Coffman, R.L.S. 4307, recorded at the Apache County Courthouse, in 1960, using improper control and is not utilized in the course of this resurvey.</p> <p>N. 0°04' E., bet. secs. 28 and 29.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p>
39.98	<p>Point for 1/4 sec. cor. of secs. 28 and 29, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E 1/4 S29 S28 1993</p>
79.96	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for the cor. of secs. 20, 21, 28, and 29, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;"> T18N R27E S20 S21 ———— S29 S28 1993 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., bears S. 89°59' E., 318.25 chs. dist., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T18N R27E R28E S24 S19 S25 S30 1991. Cor. is located in a fence cor. with fences extending N., E., and S.</p> <p>From this same cor. point, a juniper post, 38 ins. long, 3 ins. diam., firmly set, projecting 14 ins. above ground, mkd. with 2 grooves on E. face, and 2 grooves on S. face, bears N. 36°42' W., 25 lks. dist. This position was established by B.E. Coffman, R.L.S. 4307, recorded at the Apache County Courthouse, in 1960, using an improper control cor. and is not utilized in the course of this resurvey.</p>
39.98	<p>N. 0°02' E., bet. secs. 20 and 21.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for 1/4 sec. cor. of secs. 28 and 29, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
79.96	<div style="text-align: center;"> T18N R27E 1/4 S20 S21 1993 </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for the cor. of secs. 16, 17, 20, and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS

T18N R27E

S17 | S16

S20 | S21

1992

from which

A juniper, 6 ins. diam., bears N. 39 1/2° E.,
103 lks. dist., mkd. T18N R27E S16 BT.

A juniper, 11 ins. diam., bears N. 16 3/4° W.,
62 lks. dist., mkd. T18N R27E S17 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
beneath the stainless steel post.

Set a steel fence post near the cor.

Cor. is located 25 lks. S. of a fence, bears E. and W.

From this cor. point, the cor. of secs. 4, 5, 32, and 33, on the
N. bdy. of the Tp., bears N. 0°19' E., 240.20 chs. dist.,
hereinbefore described.

From this same cor. point, an open end iron pipe, 1 1/2 ins.
diam., firmly set, projecting 18 ins. above ground, of unknown
origin, bears S. 65°23' E., 46 1/2 lks. dist.

From this same cor. point, a juniper post, 23 ins. long, 3 ins.
diam., lying loosely, mkd. with 4 grooves on a face, and with 3
grooves on an adjoining face, bears S. 89°25' E., 90 1/2 lks.
dist. This position was established by B.E. Coffman, R.L.S.
4307, recorded at the Apache County Courthouse in 1960, using an
improper control cor. and is not utilized in the course of this
resurvey.

From the cor. of secs. 15, 16, 21, and 22.

N. 89°31' W., bet. secs. 16 and 21.

Over gently rolling land with dense juniper and some piñon pine.

6.29

Point for a witness point on line bet. secs. 16 and 21.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
25 ins. in the ground, with brass cap mkd.

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.84	<p style="text-align: center;">WP T18N R27E S16 — S21 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 78 lks. S. of a fence, bears E. and W.</p> <p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
46.19	<p style="text-align: center;">T18N R27E S16 1/4 — S21 1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 7 ins. diam., bears N. 26° W., 307 1/2 lks. dist., mkd. 1/4 S16 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 52 lks. S. of a fence, bears E. and W.</p> <p>Point for a witness point on line bet. secs. 16 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">WP T18N R27E S16 — S21 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
60.49	<p>Set a steel fence post near the cor.</p> <p>Cor. is located 45 lks. S. of a fence, bears E. and W.</p> <p>Point for a witness point on line bet. secs. 16 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
79.68	<p style="text-align: center;">WP T18N R27E S16 ----- S21 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 37 lks. S. of a fence, bears E. and W.</p> <p>The cor. of secs. 16, 17, 20, and 21.</p>
4.12	<p>From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 2°25' W., bet. secs. 31 and 32.</p> <p>Over broken rolling land with moderate juniper and some piñon pine. Ascend.</p> <p>Point for a witness point on line bet. secs. 31 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
6.00	<p style="text-align: center;">WP T18N R27E S31 S32 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a ridge, bears NE and SW.</p> <p>Wash, 9 lks. wide, drains WSW.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
8.80	Wash, 18 lks. wide, drains SW.
18.30	Leave broken rolling land. Enter gently rolling land with dense juniper and piñon pine.
18.39	<p>Point for a witness point on line bet. secs. 31 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S31 S32 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E 1/4 S31 S32 1992</p> <p>from which</p> <p style="text-align: center;">A juniper, 7 ins. diam., bears N. 53 3/4° W., 167 1/2 lks. dist., mkd. 1/4 S31 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
41.62	<p>Point for a witness point on line bet. secs. 31 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S31 S32 1992</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
77.49	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a ridge, bears NE and SW.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for a witness point on line bet. secs. 31 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
80.26	<p style="text-align: center;">WP T18N R27E S31 S32 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located on top of a ridge, bears NE and SW.</p> <p>Point for the cor. of secs. 29, 30, 31, and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R27E S30 S29 ----- S31 S32 1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 7 ins. diam., bears N. 15 1/4° E., 52 lks. dist., mkd. T18N R27E S29 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears S. 19 1/2° W., 77 lks. dist., mkd. T18N R27E S31 BT.</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears N. 25° W., 57 lks. dist., mkd. T18N R27E S30 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.83	<p>Set a steel fence post near the cor.</p> <p>From this cor. point, the cor. of secs. 25, 30, 31, and 36, on the W. bdy. of the Tp., bears N. 89°37' W., 77.82 chs. dist., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 28, 29, 32, and 33.</p> <p>N. 89°45' W., bet. secs. 29 and 32.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S29 1/4 — S32 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
59.74	<p>Point for the W. 1/16 sec. cor. of secs. 29 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S29 W 1/16— S32 1992</p> <p>from which</p> <p style="text-align: center;">A juniper, 8 ins. diam., bears N. 60 3/4° W., 112 1/2 lks. dist., mkd. W 1/16 S29 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

<p>CHAINS 73.67</p>	<p>Point for a witness point on line bet. secs. 29 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S29</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">S32 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
<p>79.65</p>	<p>The cor. of secs. 29, 30, 31, and 32.</p> <hr/> <p>N. 0°06' E., bet. secs. 29 and 30.</p>
<p>40.09</p>	<p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for 1/4 sec. cor. of secs. 29 and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E 1/4 S30 S29 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
<p>80.18</p>	<p>Point for the cor. of secs. 19, 20, 29, and 30, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S19 S20 ----- S30 S29 1993</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, the cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., bears N. 89°34' W., 78.43 chs. dist., hereinbefore described.</p>
39.79	<p>From the cor. of secs. 20, 21, 28, and 29.</p> <p>N. 89°35' W., bet. secs. 20 and 29.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S20 1/4 — S29 1993</p>
59.68	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for the W. 1/16 sec. cor. of secs. 20 and 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S20 W 1/16 — S29 1992</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 5 ins. diam., bears S. 61° W., 108 lks. dist., mkd. W1/16 S29 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 67° W., 241 lks. dist., mkd. W1/16 S20 BT.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.57	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. of secs. 19, 20, 29, and 30.</p> <hr/>
40.09	<p>N. 0°03' E., bet. secs. 19 and 20.</p> <p>Over gently rolling land with moderate juniper and piñon pine.</p> <p>Point for 1/4 sec. cor. of secs. 19 and 20, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E 1/4 S19 S20 1993</p> </div>
80.18	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for the cor. of secs. 17, 18, 19, and 20, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T18N R27E S18 S17 ----- S19 S20 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located; 42 lks. E. of a track road, bears N. and S., 55 lks. S. of a track road, bears ESE, and 79 lks., NNW of a fence cor., with fences extending ESE and W.</p> <p>From this cor. point, the cor. of secs. 5, 6, 31, and 32, on the N. bdy. of the Tp., bears N. 0°04' E., 240.71 chs. dist., hereinbefore described.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this same cor. point, the cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., bears N. 89°31' W., 78.96 chs. dist., hereinbefore described.</p> <hr/> <p>From the cor. of secs. 16, 17, 20, and 21. N. 89°25' W., bet. secs. 17 and 20. Over gently rolling land with sparse juniper.</p> <p>30.06 Point for a witness point on line bet. secs. 17 and 20. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S17 ----- S20 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post near the cor. Cor. is located 2 lks. N. of a fence, bears E. and W.</p>
39.76	<p>Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the orig. cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S17 1/4 — S20 1992</p> <p>from which A juniper, 5 ins. diam., bears N. 19° E., 171 1/2 lks. dist., mkd. 1/4 S17 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post. Set a steel fence post near the cor.</p>

BOOK 5430

Dependent Resurvey of a Portion of the Subdivisional Lines
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
56.00	<p>Cor. is located 11 lks. N. of a fence, bears E. and W.</p> <p>Point for a witness point on line bet. secs. 17 and 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E S17 ----- S20 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 25 lks. N. of a fence, bears E. and W.</p>
59.64	<p>Point for the W. 1/16 sec. cor. of secs. 17 and 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E S17 W 1/16— S20 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Cor. is located 27 lks. N. of a fence, bears E. and W.</p>
79.52	<p>The cor. of secs. 17, 18, 19, and 20.</p> <hr/> <p style="text-align: center;">Subdivision of Section 20 T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 20 and 29.</p> <p>N. 0°03' E., on the N. and S. center line of sec. 20.</p>

BOOK 5430

Subdivision of Section 20

T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.04	<p>Over gently rolling land with moderate juniper.</p> <p>Point for the center 1/4 sec. cor. of sec. 20, at intersection with the E. and W. center line of sec. 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R27E C1/4 S20 1993</p>
80.07	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The 1/4 sec. cor. of secs. 17 and 20.</p>
39.77	<hr/> <p>From the 1/4 sec. cor. of secs. 20 and 21.</p> <p>N. 89°30' W., on the E. and W. center line of sec. 20.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>The center 1/4 sec. cor. of sec. 20.</p>
59.655	<p>Point for the center W. 1/16 sec. cor. of sec. 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R27E W1/16 C——C S20 1992</p>
	<p>from which</p> <p style="text-align: center;">A juniper, 11 ins. diam., bears S. 36 3/4° W., 142 1/2 lks. dist., mkd. CW 1/16 S20 BT.</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>

BOOK 5430

Subdivision of Section 20

T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.54	<p>The 1/4 sec. cor. of secs. 19 and 20.</p> <hr/> <p style="text-align: center;">SW 1/4 Section 20</p> <hr/> <p>From the W. 1/16 sec. cor. of secs. 20 and 29.</p> <p>N. 0°03' E., on the N. and S. center line of the SW 1/4 of the sec. 20.</p> <p>Over gently rolling land with sparse juniper.</p>
40.06	<p>The center W. 1/16 sec. cor. of sec. 20.</p> <hr/> <p style="text-align: center;">NW 1/4 Section 20</p> <hr/> <p>From the center W. 1/16 sec. cor. of sec. 20.</p> <p>N. 0°03' E., on the N. and S. center line of the NW 1/4 of the sec. 20.</p> <p>Over gently rolling land with sparse juniper.</p>
40.06	<p>The W. 1/16 sec. cor. of secs. 17 and 20.</p> <hr/> <p style="text-align: center;">Subdivision of Section 29, T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 29 and 32.</p> <p>N. 0°05' E., on the N. and S. center line of sec. 29.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p>
40.04	<p>Point for the center 1/4 sec. cor. of sec. 29, at intersection with the E. and W. center lines of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T18N R27E C1/4 S29 1993</p>

BOOK 5430

Subdivision of Section 29
T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.07	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The 1/4 sec. cor. of secs. 20 and 29.</p>
39.81	<p>From the 1/4 sec. cor. of secs. 28 and 29.</p> <p>N. 89°40' W., on the E. and W. center line of sec. 29.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>The center 1/4 sec. cor. of sec. 29.</p>
59.65	<p>Wash, 12 lks. wide, drains SSW.</p>
59.71	<p>Point for the center W. 1/16 sec. cor. of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground and over a steel fence post, with brass cap mkd.</p>
	<p style="text-align: center;">T18N R27E W1/16 C———C S29 1992</p>
	<p>from which</p> <p style="padding-left: 40px;">A juniper, 11 ins. diam., bears S. 75° W., 65 1/2 lks. dist., mkd. CW 1/16 S29 BT.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears N. 49 3/4° W., 37 1/2 lks. dist., mkd. X at breast height and BT at its' base.</p>
79.61	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The 1/4 sec. cor. of secs. 29 and 30.</p>
	<p style="text-align: center;">SW 1/4 Section 29</p> <hr style="width: 20%; margin: auto;"/> <p>From the W. 1/16 sec. cor. of secs. 29 and 32.</p>

BOOK 5430

Subdivision of Section 29

T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
<p>27.92</p>	<p>N. 0°06' E., on the N. and S. center line of the SW 1/4 of sec. 29.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for a witness point on the N. and S. center line of the SW 1/4 of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E W S 29 W 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>
38.97	Wash, 21 lks. wide, drains WSW.
40.06	The center W. 1/16 sec. cor. of sec. 29.
<hr/> <p>NW 1/4 Section 29</p> <hr/>	
3.78	<p>From the center W. 1/16 sec. cor. of secs. 29 and 32.</p> <p>N. 0°06' E., on the N. and S. center line of the NW 1/4 of sec. 29.</p> <p>Over gently rolling land with dense juniper and piñon pine.</p> <p>Point for a witness point on the N. and S. center line of the NW 1/4 of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E W S 29 W 1992</p>

BOOK 5430

Subdivision of Section 29

T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	
14.67	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for a witness point on the N. and S. center line of the NW 1/4 of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E W S 29 W 1992</p>
33.22	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for a witness point on the N. and S. center line of the NW 1/4 of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WP T18N R27E W S 29 W 1992</p>
37.87	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>Point for a witness point on the N. and S. center line of the NW 1/4 of sec. 29.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

BOOK 5430

Subdivision of Section 29

T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona

CHAINS	<p style="text-align: center;">WP T18N R27E W S 29 W 1992</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>40.06 The W. 1/16 sec. cor. of secs. 20 and 29.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <hr/> <p>Township 18 North, Range 27 East is located approximately 40 miles east of Holbrook, Arizona, and approximately 14 miles south-southeast of Navajo, Arizona.</p> <p>The township is situated atop of the Rio Puerco and Zuni River Divide. Rolling land dominates, with juniper and piñon pine at the higher elevations, thinning to sagebrush and bunch grass at the lower elevations. The northeast portion of the township averages 6600 feet above sea level, dropping to 6100 feet above sea level at the southwest corner. The extreme northeast, and the south central region is encompassed by severely broken land. Milky Wash drains the township southwesterly, creating massive erosive capabilities, and providing poor water containment.</p> <p>Access is provided by a county road along the western portion of the township from Navajo, Arizona, and, by a county road to the southeast corner of the township from Witch Well, Arizona. There are limited track roads within the township itself. The Salt River Project railroad track servicing their power plants to the south follows a portion of the west boundary.</p> <p>There are no inhabitants within the township. There are several water tanks scattered about the township, which is utilized mainly for grazing of cattle and sheep. The only other apparent activity is that of wood cutting.</p> <p>The mean magnetic declination as taken from quadrangle map HOGAN WELL, ARIZ., published in 1979 by U. S. Geological Survey is 12 1/2° E.</p>
--------	---

BOOK 5430

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
William P. Carpender	Land Surveyor
Stephen K. Hansen	Land Surveyor
Jeffrey P. Johnson	Land Surveyor (Trainee)
Cheryl A. Baier	Surveying Technician
Gordon R. Bubel Jr.	Surveying Technician
Geoffrey A. Graham	Surveying Technician
Luke B. Granger	Surveying Technician
Robert J. Lyle	Surveying Technician
Joel D. Ayers	Survey Aid
Ted E. Cazier	Survey Aid
Jeffrey A. Hill	Survey Aid
Brian T. McCollum	Survey Aid
Craig L. McFarland	Survey Aid
Tom J. Olson	Survey Aid
Wallace R. Ott Jr.	Survey Aid
Johnny R. Ramirez	Survey Aid
Rebecca Ramirez	Survey Aid
Mark R. Searles	Survey Aid
Michael A. Searles	Survey Aid
Gerald A. Van Wagenen	Survey Aid

BOOK 5430

CERTIFICATE OF SURVEY

I, Stephen J. Malloy, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12th day of January, 1987, and supplemental special instructions dated February 29, 1988, I have dependently resurveyed a portion of the south boundary, the west boundary, the north boundary, and a portion of the subdivisional lines, and the subdivision of sections 20 and 29 of Township 18 North, Range 27 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

2-15-95

(Date)

Stephen J. Malloy
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of south boundary, the west boundary, the north boundary, and a portion of subdivisional lines, and the subdivision of sections 20 and 29 of Township 18 north, Range 27 East, Gila and Salt River Meridian, Arizona, executed by Stephen J. Malloy, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

FEB 27 1995

(Date)

Louise A. Talbot
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 18 N., R. 27 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~(Date)~~

~~(Acting Chief Cadastral Surveyor of Arizona)~~