

# ORIGINAL

1

BOOK 5484

UNITED STATES  
DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

FIELD NOTES  
OF THE

---

DEPENDENT RESURVEY

---

OF THE

---

EAST AND NORTH BOUNDARIES AND THE

---

SUBDIVISIONAL LINES OF

---

TOWNSHIP 19 NORTH, RANGE 29 EAST,

---

Of the Gila and Salt River Meridian,  
In the State of Arizona

---

EXECUTED BY

---

Joe R. Salazar

Cadastral Surveyor

---

William P. Carpender

Cadastral Surveyor

---

Under Special Instructions dated January 12, 1987, approved February 23, 1987, and Supplemental Special Instructions dated February 29, 1988, approved February 29, 1988, which provided for the surveys included under Group Number 687 and assignment instructions dated July 11, 1988 and February 16, 1993.


Survey commenced July 11, 1988

Survey completed September 4, 1994

BOOK 5484

INDEX DIAGRAM

TOWNSHIP 19 NORTH, RANGE 29 EAST,

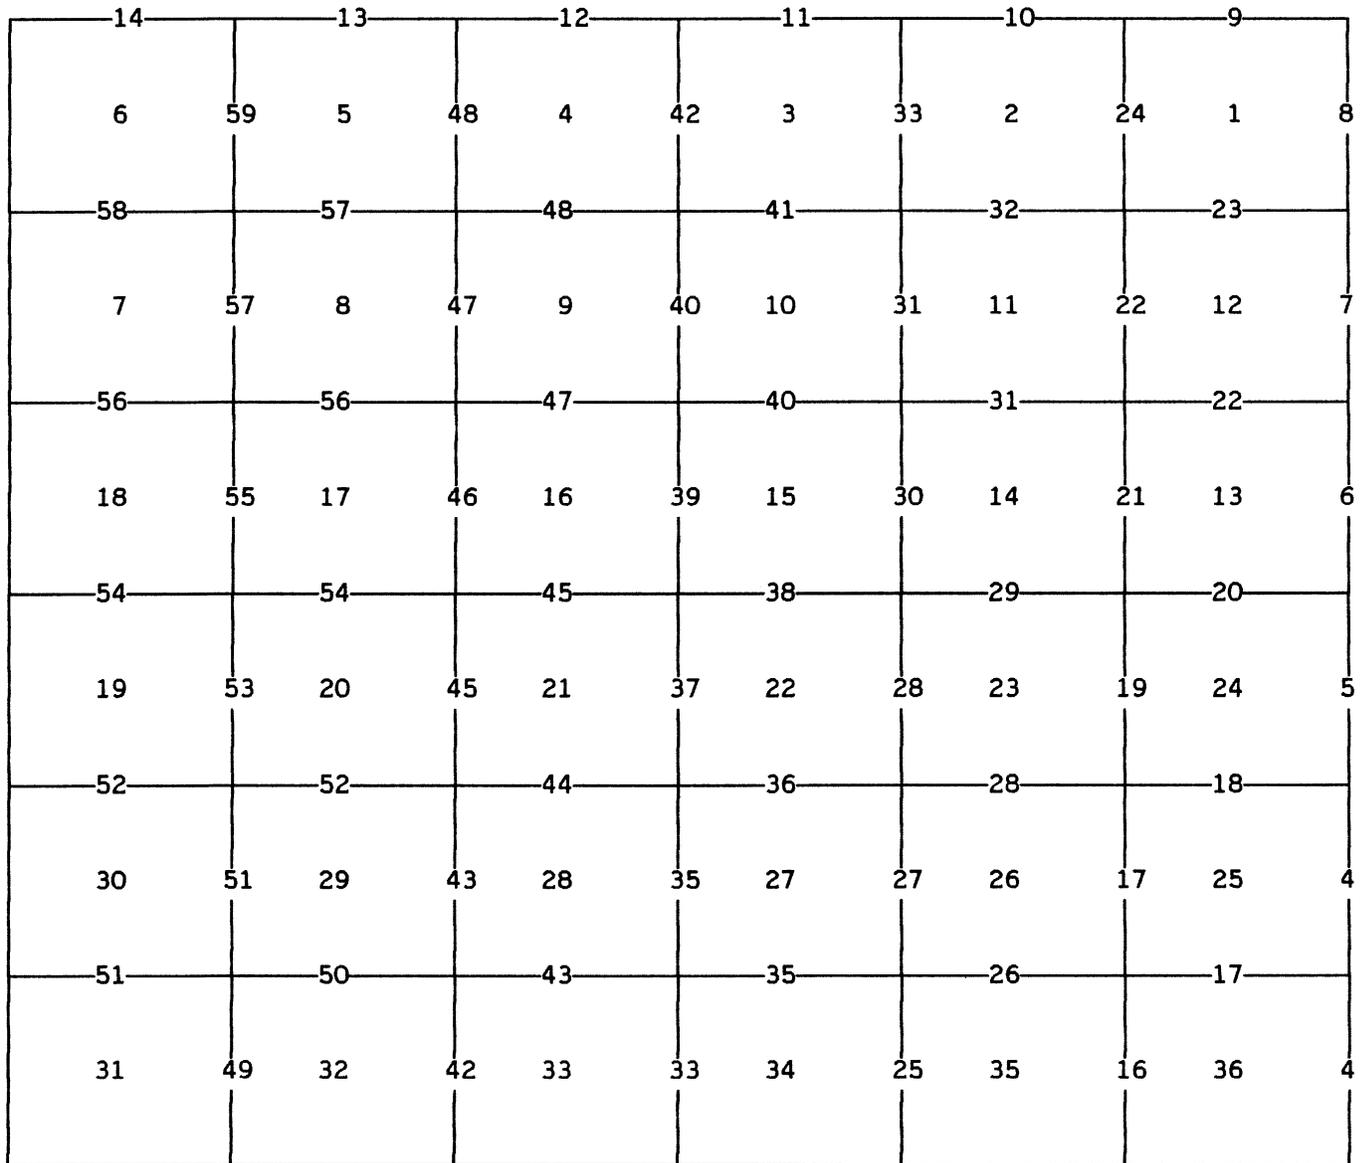

## BOOK 5484

T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes describe the dependent resurvey of the east and north boundaries and the subdivisional lines, Township 19 North, Range 29 East, Gila and Salt River Meridian, Arizona.

W. R. Fitzgerald surveyed the north, south, east and west boundaries and subdivisional lines in 1882. Joe R. Salazar and Stephen J. Malloy dependently resurveyed the west boundary in 1988-93. Stephen J. Malloy dependently resurveyed the south boundary in 1993.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated January 12, 1987, and Supplemental Special Instructions dated February 29, 1988, for Group No. 687, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Pentax PTS 3, total station instrument.

The geographic position of the cor. of Tps. 19 and 20 N., Rs. 28 and 29 E. as determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation station "BEACON 54B ECC 1936" and "DEAD 1936" were used as the control stations.

Latitude: 35°04'53.065" N. Longitude: 109°18'38.217" W. NAD27

The mean magnetic declination, as taken from quadrangle map BEACON WELL, ARIZ., published in 1972 by U.S. Geological Survey, is  
13 1/2° E.

---

## BOOK 5484

Dependent Resurvey of the East Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">Restoring the survey executed by W. R. Fitzgerald, in 1882</p> <hr style="width: 20%; margin: auto;"/>
	<p>Beginning at the cor. of Tps. 18 and 19 N., Rs. 29 and 30 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set projecting 3 ins. above the ground, with brass cap mkd. T19N R29E R30E S1 S6 S31 S36 T18N 1993, as described in the field notes of the dependent resurvey of the E. bdy., T. 18 N., R. 29 E., executed concurrently under this same group.</p>
	<p>N. 1°46' W., bet. secs. 31 and 36.</p>
	<p>Over rolling land.</p>
43.88	<p>Point for the 1/4 sec. cor. of secs. 31 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N R29E R30E 1/4 S36   S31 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
72.80	<p>Ridge, bears E. and W.</p>
87.76	<p>Point for the cor. of secs. 25, 30, 31 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainlesssteel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T20N T29N R30E S25   S30 S36   S31 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>N. 1°46' W., bet. secs. 25 and 30.</p>

## BOOK 5484

Dependent Resurvey of the East Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
43.88	<p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 25 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
87.76	<p style="text-align: center;">T20N R29E R30E 1/4 S25   S30 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 1 ch. E. of an abandoned fence line, bears N. and S.</p> <p>The cor. of secs. 19, 24, 25 and 30, monumented by person(s) unknown with a juniper post, 4 ins. square, 38 ins. long, firmly set, 29 ins. in the ground, mkd. 1/4 on W. face. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
39.10	<p style="text-align: center;">T20N T29N R30E S24   S19 ----- S25   S30 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside stainless steel post.</p> <hr/> <p>N. 0°03' E., bet. secs. 19 and 24.</p> <p>Over rolling land.</p> <p>Water line, bears E. and W.</p>

## BOOK 5484

Dependent Resurvey of the East Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.03	<p>The 1/4 sec. cor. of secs. 19 and 24, monumented by person(s) unknown with a juniper post, 2 ins. square, 42 ins. long, loosely set, 5 ins. in the ground, faintly mkd. on W. face. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N R29E R30E 1/4 S24   S19 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside stainless steel post.</p> <p>Cor. is located 38 lks., E. of 2 track road, bears N. and S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°15' E., beginning new measurement.</p> <p>Over rolling land.</p>
40.14	<p>Point for the cor. of secs. 13, 18, 19 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N T29N R30E S13   S18 ----- S24   S19 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>N. 0°15' E., bet. secs. 13 and 18.</p> <p>Over rolling land.</p>

## BOOK 5484

Dependent Resurvey of the East Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.14	<p>Point for the 1/4 sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N R29E R30E 1/4 S13   S18 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
75.50	Fence, bears NE and SW.
77.40	Paved road, bears NE and SW.
78.50	Fence, bears NE and SW.
80.28	<p>The cor. of secs. 7, 12, 13 and 18, established at the corner of abandoned fences, extending N. and W. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T20N T29N R30E S12   S 7 S13   S18 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	N. 0°01' E., bet. secs. 7 and 12.
	Over rolling land.
40.40	<p>Point for the 1/4 sec. cor. of secs. 7 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

## BOOK 54 84

Dependent Resurvey of the East Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
80.80	<p style="text-align: center;">T20N R29E R30E 1/4 S12   S 7 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 1, 6, 7 and 12, established at the corner of abandon fences, extending S. and W. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N T29N R30E S 1   S 6 ----- S12   S 7 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Cor. is located 3 chs., E. of power line, bears NE and SW.</p> <hr/> <p>N. 0°06' W., bet. secs 1 and 6.</p> <p>Over rolling land.</p>
39.96	<p>Point for the 1/4 sec. cor. of secs. 1 and 6, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R29E R30E 1/4 S 1   S 6 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

## BOOK 5484

Dependent Resurvey of the East Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.92	<p>The cor. of Tps. 19 and 20 N., Rs. 29 and 30 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T20N R29E R30E S1 S6 S31 S36 T19N 1994, as described in the field notes of the dependent resurvey of the S. bdy., T. 20 N., R. 30 E., executed concurrently under this same group.</p>
	<hr/> <p style="text-align: center;">Dependent resurvey of the North Boundary, T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona</p> <hr/>
	<p style="text-align: center;">Restoring the survey executed by W. R. Fitzgerald, in 1882</p> <hr/>
	<p>From the cor. of Tps. 19 and 20 N., Rs. 29 and 30 E., hereinbefore described.</p> <p>S. 89°26' W., bet. secs. 1 and 36.</p> <p>Over rolling land, along a fence.</p>
39.95	<p>The 1/4 sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R29E S36 1/4 — S 1 T19N 1989</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.90	<p>The cor. of secs. 1, 2, 35 and 36, monumented by person(s) unknown with a wood post, 5 ins. diam., 38 ins. long, firmly set, projecting 18 ins. above ground, with faint scribe marks on one side. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS													
	<table border="1"> <tr> <td>T20N R29E</td> <td></td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> <tr> <td>S 2</td> <td>S 1</td> </tr> <tr> <td colspan="2" style="text-align: center;">T19N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1989</td> </tr> </table>	T20N R29E		S35	S36	S 2	S 1	T19N		1989			
T20N R29E													
S35	S36												
S 2	S 1												
T19N													
1989													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the wood post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 1 lk. S. of a fence, bears E. and W.</p> <hr/> <p>N. 89°59' W., bet. secs. 2 and 35.</p> <p>Over rolling land, along a fence.</p>												
35.90	Gulch, course S.												
40.08	<p>The 1/4 sec. cor. of secs. 2 and 35, monumented by person(s) unknown with a juniper post, 5 ins. diam., 38 ins. long, firmly set, projecting 14 ins. above ground, mkd. 1/4 on the N. face and IA on the E. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>												
	<table border="1"> <tr> <td>T20N R29E</td> <td></td> </tr> <tr> <td>S35</td> <td></td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td>S 2</td> <td></td> </tr> <tr> <td colspan="2" style="text-align: center;">T19N</td> </tr> <tr> <td colspan="2" style="text-align: center;">1989</td> </tr> </table>	T20N R29E		S35		1/4	—	S 2		T19N		1989	
T20N R29E													
S35													
1/4	—												
S 2													
T19N													
1989													
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>The cor. is located 1.45 chs. N. of a fence, bears E. and W.</p> <hr/>												

## BOOK 5484

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS																					
	S. 87°17' W., beginning new measurement.																				
32.00	Edge of mesa, bears NE and SW; descend steep, NW facing bluff.																				
39.645	Point for the cor. of secs. 2, 3, 34 and 35, at proportionate dist.; there is no remaining evidence of the original corner.																				
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over a steel fence post driven into the ground, with brass cap mkd.																				
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R29E</td></tr> <tr><td>S34</td><td> </td><td>S35</td></tr> <tr><td colspan="3" style="border-top: 1px solid black;"></td></tr> <tr><td>S 3</td><td> </td><td>S 2</td></tr> <tr><td colspan="3" style="border-top: 1px solid black;"></td></tr> <tr><td colspan="3" style="text-align: center;">T19N</td></tr> <tr><td colspan="3" style="text-align: center;">1989</td></tr> </table>	T20N	R29E	S34		S35				S 3		S 2				T19N			1989		
T20N	R29E																				
S34		S35																			
S 3		S 2																			
T19N																					
1989																					
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.																				
	Set a steel fence post alongside the cor.																				
	The cor. is located on the spine of a steep, NW. sloping spur of same bluff.																				
	S. 87°17' W., bet. secs. 3 and 34.																				
	Continue steep descent.																				
4.50	Bottom of bluff, bears NE and SW; thence over rolling land, through dense juniper.																				
39.645	Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the original corner.																				
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.																				
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R29E</td></tr> <tr><td colspan="2" style="text-align: center;">S34</td></tr> <tr><td colspan="2" style="text-align: center;">1/4 —</td></tr> <tr><td colspan="2" style="text-align: center;">S 3</td></tr> <tr><td colspan="2" style="text-align: center;">T19N</td></tr> <tr><td colspan="2" style="text-align: center;">1989</td></tr> </table>	T20N	R29E	S34		1/4 —		S 3		T19N		1989									
T20N	R29E																				
S34																					
1/4 —																					
S 3																					
T19N																					
1989																					
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.																				
	Set a steel fence post near the cor.																				

## BOOK 5484

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS													
76.10	Barbed wire fence, bears N. and S.												
79.29	Point for the cor. of secs. 3, 4, 33 and 34, at proportionate dist.; there is no remaining evidence of the original corner.												
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R29E</td></tr> <tr><td>S33</td><td>  S34</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S 4</td><td>  S 3</td></tr> <tr><td colspan="2" style="text-align: center;">T19N</td></tr> <tr><td colspan="2" style="text-align: center;">1989</td></tr> </table>	T20N	R29E	S33	S34			S 4	S 3	T19N		1989	
T20N	R29E												
S33	S34												
S 4	S 3												
T19N													
1989													
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.												
	Set a steel fence post near the cor.												
	The cor. is located 3.90 chs. N. of a barbed wire fence, bears E. and W.												
	<hr/>												
	S. 87°17' W., bet. secs. 4 and 33.												
	Over rolling land, through dense juniper with scattered piñon pine.												
39.645	Point for the 1/4 sec. cor. of secs. 4 and 33, at proportionate dist.; there is no remaining evidence of the original corner.												
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.												
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T20N</td><td>R29E</td></tr> <tr><td colspan="2" style="text-align: center;">S33</td></tr> <tr><td colspan="2" style="text-align: center;">1/4 —</td></tr> <tr><td colspan="2" style="text-align: center;">S 4</td></tr> <tr><td colspan="2" style="text-align: center;">T19N</td></tr> <tr><td colspan="2" style="text-align: center;">1989</td></tr> </table>	T20N	R29E	S33		1/4 —		S 4		T19N		1989	
T20N	R29E												
S33													
1/4 —													
S 4													
T19N													
1989													
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.												
	Set a steel fence post near the cor.												
41.60	Begin ascent of NE facing slope of bluff.												
47.80	Top of bluff, bears SE and NW.												

## BOOK 5484

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS													
52.10	Ridge, bears SE and NW.												
63.20	Ridge, bears SE and NW.												
79.29	<p>Point for the cor. of secs. 4, 5, 32 and 33, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T20N</td> <td>R29E</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> <tr> <td>S 5</td> <td>S 4</td> </tr> <tr> <td colspan="2">T19N</td> </tr> <tr> <td colspan="2">1989</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post alongside the cor.</p> <p>The cor. is located 18 lks. S. of a fence, bears E. and W.</p> <hr/> <p>S. 87°17' W., bet. secs. 5 and 32.</p> <p>Over rolling land, through dense juniper with scattered piñon pine.</p>	T20N	R29E	S32	S33	S 5	S 4	T19N		1989			
T20N	R29E												
S32	S33												
S 5	S 4												
T19N													
1989													
39.645	<p>Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate dist.; there is no remaining evidence of the original corner.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T20N</td> <td>R29E</td> </tr> <tr> <td colspan="2">S32</td> </tr> <tr> <td colspan="2">1/4 —</td> </tr> <tr> <td colspan="2">S 5</td> </tr> <tr> <td colspan="2">T19N</td> </tr> <tr> <td colspan="2">1989</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	T20N	R29E	S32		1/4 —		S 5		T19N		1989	
T20N	R29E												
S32													
1/4 —													
S 5													
T19N													
1989													
60.00	Ridge, bears SSE and NNW.												

## BOOK 5484

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
79.29	<p>The cor. of secs. 5, 6, 31 and 32, monumented by person(s) unknown with a wood post, 4 x 3 ins. square, 36 ins. long, lying loose on the ground, mkd. with faint scribe marks on one side. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T20N</td> <td>R29E</td> </tr> <tr> <td>S31</td> <td>S32</td> </tr> <tr> <td>S 6</td> <td>S 5</td> </tr> <tr> <td colspan="2">T19N</td> </tr> <tr> <td colspan="2">1989</td> </tr> </table> </div> <p>Bury the wood post alongside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p>	T20N	R29E	S31	S32	S 6	S 5	T19N		1989	
T20N	R29E										
S31	S32										
S 6	S 5										
T19N											
1989											
	<p>N. 88°08' W., bet. secs. 6 and 31.</p>										
	<p>Over gently rolling land, through scattered juniper and sage.</p>										
19.30	<p>Low ridge, bears NE and SW.</p>										
36.75	<p>Dirt water line road, 25 lks. wide, bears SE and NW.</p>										
37.70	<p>Easterly right-of-way line of U.S. Route 666, fenced, bears SE and NW.</p>										
39.60	<p>Center of U.S. Route 666, 2 lanes wide, asphalt surfaced, bears SE and NW.</p>										
40.81	<p>The 1/4 sec. cor. of secs. 6 and 31, as represented on an Arizona Highway Department map entitled " RIGHT OF WAY MAP ST. JOHNS - SANDERS HWY.", dated Jan. 23, 1948, monumented by person(s) unknown with a rebar, 5/8 in. diam., 24 ins. long, firmly set in concrete, 1 in. below the ground. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p>										

## BOOK 5484

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	T20N R29E S31 1/4 — S 6 T19N 1989
	<p>Insert the rebar inside the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a steel fence post near the cor.</p> <p>From this cor. point, a narrow gauge railroad rail, firmly set, vertically 24 ins. above the ground, in the easterly right-of-way fence bears S. 54°28' E., 31.32 chs. dist.</p> <p>From this same cor. point, a narrow gauge railroad rail, firmly set, vertically 24 ins. above the ground, in the westerly right-of-way fence bears S. 50°19' E., 31.27 chs. dist.</p> <p>From this same cor. point, a narrow gauge railroad rail, firmly set, vertically 24 ins. above the ground, in the westerly right-of-way fence bears N. 52°26' W., 16.43 chs. dist.</p> <p>From this same cor. point, a narrow gauge railroad rail, firmly set, vertically 24 ins. above the ground, in the easterly right-of-way fence bears N. 44°32' W., 16.54 chs. dist.</p> <p>From this same cor. point, Arizona Department of Transportation triangulation station "PARKER" bears N. 54°12' W., 6.515 chs. dist., monumented with an aluminum tablet, 4 ins. diam., firmly cemented into a concrete post, 10 ins. diam., projecting 3 ins. above the ground, with top marked ARIZONA D.O.T. HWY. DIV. P. &amp; M. GEODETIC SURVEY PARKER 1982 and a triangle.</p> <p>From this same cor. point, U.S. Geological Survey benchmark "58 DOR" bears N. 52°38' W., 13.965 chs. dist., monumented with a standard bronze tablet, 4 ins. diam., attached to an iron pipe, 1 in. diam., projecting 2 ins. above the ground, inside an asbestos pipe, 6 ins. diam., projecting 4 ins. above the ground, with top marked, ELEV. 6191 FT. ABOVE SEA 58 DOR 1970 and a triangle.</p> <p>The cor. is located in the westerly shoulder of U.S. Route 666.</p> <p style="text-align: center;">_____</p> <p>N. 86°07' W., beginning new measurement.</p>
0.69	<p>Westerly right-of-way line of U.S. Route 666, fenced, bears SE and NW.</p>

## BOOK 5484

Dependent Resurvey of the North Boundary,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
33.66	<p>The cor. of Tps. 19 and 20 N., Rs. 28 and 29 E., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T20N R28E R29E S1 S6 S31 S36 T19N 1988, as described in the field notes of the dependent resurvey of the E. bdy., T. 20 N., R. 28 E., executed concurrently under this same group.</p> <hr/> <p>Dependent resurvey of the Subdivisional Lines, T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Restoring the survey executed by W. R. Fitzgerald in 1882</p> <hr/> <p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with a stainless steel post, firmly set, projecting 3 ins. above the ground, with brass cap mkd. T19N R29E S1 S2 S35 S36 T18N 1993, as described in the field notes of the dependent resurvey of the N. bdy., T. 18 N., R. 29 E., executed concurrently under this same group.</p> <p>N. 2°13' W., bet. secs. 35 and 36.</p> <p>Over rolling land.</p>
47.31	<p>Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T20N R29E 1/4 S35   S36 1993</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
94.62	<p>The cor. of secs. 25, 26, 35 and 36, monumented by person(s) unknown with a juniper post, 3 ins. diam., 63 ins. long, loosely set, 12 ins. in the ground, with no visible marks. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N	R29E	S26	S25			S35	S36	1994	
T19N	R29E										
S26	S25										
S35	S36										
1994											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>										
	<p>Bury the juniper post alongside the stainless steel post.</p>										
	<p>From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of Tp., hereinbefore described.</p>										
	<p>N. 84°48' W., bet. secs. 25 and 36.</p>										
	<p>Over rolling land.</p>										
40.10	<p>Ridge, bears NE and SW.</p>										
41.64	<p>Point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p>										
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										
	<table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td></td> <td>S25</td> </tr> <tr> <td>1/4</td> <td>—</td> </tr> <tr> <td></td> <td>S36</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N	R29E		S25	1/4	—		S36	1994	
T19N	R29E										
	S25										
1/4	—										
	S36										
1994											
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>										
78.30	<p>Fence, bears NNE and SSW.</p>										
83.28	<p>The cor. of secs. 25, 26, 35 and 36.</p>										
	<p>N. 0°16' W., bet. secs. 25 and 26.</p>										
	<p>Over rolling land.</p>										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
38.83	<p>The 1/4 sec. cor. of secs. 25 and 26, monumented by person(s) unknown with a juniper post, 3 ins. diam., 48 ins. long, loosely set, 10 ins. in the ground, faintly mkd. on W. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>1/4</td><td></td></tr> <tr><td>S26</td><td>  S25</td></tr> <tr><td>1994</td><td></td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°16' E., beginning new measurement.</p> <p>Over rolling land.</p>	T19N	R29E	1/4		S26	S25	1994			
T19N	R29E										
1/4											
S26	S25										
1994											
40.51	<p>Point for the cor. of secs. 23, 24, 25 and 26, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S23</td><td>  S24</td></tr> <tr><td colspan="2"><hr style="width: 50%; margin: 0 auto;"/></td></tr> <tr><td>S26</td><td>  S25</td></tr> <tr><td>1994</td><td></td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of Tp., hereinbefore described.</p> <p>S. 89°53' W., bet. secs. 24 and 25.</p> <p>Over rolling land.</p>	T19N	R29E	S23	S24	<hr style="width: 50%; margin: 0 auto;"/>		S26	S25	1994	
T19N	R29E										
S23	S24										
<hr style="width: 50%; margin: 0 auto;"/>											
S26	S25										
1994											

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.01	<p>The 1/4 sec. cor. of secs. 24 and 25, monumented by person(s) unknown with a juniper post, 3 x 2 ins. on top, 37 ins. long, firmly set, 17 ins. in the ground, mkd. IA 1/4 on N. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S24 1/4 — S25 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in an abandon fence, bears E. and W.</p> <p style="text-align: center;">_____</p> <p>S. 88°56' W., beginning new measurement.</p> <p>Over rolling land.</p>
1.50	Ridge, bears NE and SW.
40.21	The cor. of secs. 23, 24, 25 and 26.
	<p>N. 0°09' E., bet. secs. 23 and 24.</p> <p>Over rolling land.</p>
40.51	<p>Point for the 1/4 sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S23   S24 1994</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
81.02	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 13, 14, 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron railroad spike, flush with surface of pavement.</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears S. 0°01' E., 46.3 ft. dist., with brass cap mkd. RM T19N R29E 46.3 FT TO COR S24 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. is located in a paved road.</p> <hr/>
40.18	<p>From the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of Tp., hereinbefore described.</p> <p>N. 89°59' W., bet. secs. 13 and 24.</p> <p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 13 and 24, monumented by person(s) unknown with a juniper post, 4 x 2 ins. on top, 36 ins. long, loosely set, 7 ins. in the ground, with illegible marks on one face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; padding-left: 100px;">       T19N R29E        S13        1/4 —        S24        1994     </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in an abandon fence, bears E. and W.</p> <hr/>

## BOOK 54 84

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 89°59' W., beginning new measurement.</p> <p>Over rolling land.</p>
8.50	Abandoned fence, bears NE and SW.
40.02	The cor. of secs. 13, 14, 23 and 24.
	<hr/> <p>N. 0°35' W., bet. secs. 13 and 14.</p> <p>Over rolling land.</p>
40.51	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented by person(s) unknown with a sandstone, 9 x 6 x 2 ins., loosely set, 2 ins. in the ground, with illegible marks on E. and W. faces. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S13   S14 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Bury stone alongside the stainless steel post.</p> <hr/>
	<p>N. 0°25' E., beginning new measurement.</p> <p>Over rolling land.</p>
1.70	Fence, bears ENE and WSW.
39.34	<p>The cor. of secs. 11, 12, 13 and 14, monumented by person(s) unknown, monumented with a juniper post, 6 x 4 ins. on top, 64 ins. long, loosely set, 10 ins. in the ground, with illegible marks on 2 faces. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T19N R29E</td></tr> <tr><td>S11</td><td>S12</td></tr> <tr><td colspan="2">—</td></tr> <tr><td>S14</td><td>S13</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr/>	T19N R29E		S11	S12	—		S14	S13	1994	
T19N R29E											
S11	S12										
—											
S14	S13										
1994											
40.34	<p>From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of Tp., hereinbefore described.</p> <p>S. 89°43' W., bet. secs. 12 and 13.</p> <p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 12 and 13, proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td colspan="2">T19N R29E</td></tr> <tr><td colspan="2">S12</td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td colspan="2">S13</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div>	T19N R29E		S12		1/4	—	S13		1994	
T19N R29E											
S12											
1/4	—										
S13											
1994											
73.30	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Wash, drains SSW.</p>										
80.68	<p>The cor. of secs. 11, 12, 13 and 14.</p> <hr/>										
41.12	<p>N. 0°50' E., bet. secs. 11 and 12.</p> <p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 11 and 12, monumented by person(s) unknown with a sandstone, 18 x 12 x 3 ins., firmly set, 7 ins. in the ground, mkd. IA on the W. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p>										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S11   S12 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Bury sandstone alongside the stainless steel post.</p>
	<p style="text-align: center;">_____</p> <p>N. 0°02' E., beginning new measurement.</p>
	<p>Over broken terrain.</p>
35.80	<p>Dirt road, bears ENE and WSW.</p>
39.08	<p>The cor. of secs. 1, 2, 11 and 12, monumented by person(s) unknown with a juniper post, 3 ins. square, 38 ins. long, firmly set, 18 ins. in the ground, mkd. with 1 notch on E. face, 5 notches on S. face, IA on W. face and 1 notch on N. face. This position is accepted as the best available evidence of the original cor. position.</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E S 1   S 2 ----- S11   S12 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>Bury the juniper post alongside the stainless steel post.</p>
	<p>Cor. is located in corner of abandon fences, extending N. and W.</p>
	<p style="text-align: center;">_____</p> <p>From the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of Tp., hereinbefore described.</p>
	<p>S. 89°57' W., bet. secs. 1 and 12.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over rolling land.
39.94	<p>The 1/4 sec. cor. of secs. 1 and 12, monumented by person(s) unknown with a juniper post, 4 ins. square, 42 ins. long, firmly set, 32 ins. in the ground, with illegible marks on one face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 1 1/4 — S12 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in abandoned fence, bears E. and W.</p> <p style="text-align: center;">_____</p> <p>S. 88°36' W., beginning new measurement.</p>
40.12	<p>Over rolling land.</p> <p>The cor. of secs. 1, 2, 11 and 12.</p> <hr/> <p>N. 0°01' E., bet. secs. 1 and 2.</p>
40.07	<p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 1 and 2, monumented by person(s) unknown with a juniper post, 3 ins. in diam., 32 ins long, loosely set, 4 ins. in the ground, mkd. IA on one face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E 1/4 S 2   S 1 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>North, beginning new measurement.</p> <p>Over rolling land.</p>
40.09	<p>The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of Tp., hereinbefore described.</p> <hr/>
	<p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. T19N R29E S2 S3 S34 S35 T18N 1993, as described in the field notes of the dependent resurvey of the N. bdy., T 18 N., R. 29 E., executed concurrently under this same group.</p> <p>N. 1°29' W., bet. secs. 34 and 35.</p> <p>Over rolling land.</p>
46.60	<p>Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S34   S35 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
81.20	<p>Ridge, bears ENE and WSW.</p>
93.20	<p>The cor. of secs. 27, 28, 33 and 34, monumented by person(s) unknown with a juniper post, 6 ins. diam., 44 ins. long, firmly set, 25 ins. in the ground, mkd. with IA and 2 notches on E. face and 1 notch on S. faces. This position is accepted as the best available evidence of the original cor. position.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	At the cor. point										
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.										
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">T19N</td> <td>R29E</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">S27</td> <td>S26</td> </tr> <tr> <td style="border-right: 1px solid black; padding-right: 5px;">S34</td> <td>S35</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N	R29E	S27	S26	S34	S35	1994			
T19N	R29E										
S27	S26										
S34	S35										
1994											
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.										
	Bury the juniper post alongside the stainless steel post.										
	From the cor. of secs. 25, 26, 35 and 36.										
	S. 89°53' W., bet. secs. 26 and 35.										
	Over rolling land.										
36.50	Fence, bears SE and NW.										
35.00	Center of State Road 666, bears SE and NW.										
40.21	The 1/4 sec. cor. of secs. 26 and 35, monumented by person(s) unknown with a juniper post, 3 ins. square, 43 ins. long, firmly set, 7 ins. in the ground, with illegible marks on S. face. This position is accepted as the best available evidence of the original cor. position.										
	At the cor. point										
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.										
	<table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding-right: 10px;">T19N</td> <td>R29E</td> </tr> <tr> <td></td> <td>S26</td> </tr> <tr> <td></td> <td>1/4 —</td> </tr> <tr> <td></td> <td>S35</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table>	T19N	R29E		S26		1/4 —		S35	1994	
T19N	R29E										
	S26										
	1/4 —										
	S35										
1994											
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.										
	Bury the juniper post alongside the stainless steel post.										
	N. 89°59' W., beginning new measurement.										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over rolling land.
40.05	The cor. of secs. 26, 27, 34 and 35.
	North, bet. secs. 26 and 27
	Over rolling land.
1.00	Wash, drains NE.
39.99	<p>The 1/4 sec. cor. of secs. 26 and 27, monumented by person(s) unknown with a juniper post, 4 x 2 ins. on top, 28 ins long, firmly set, 10 ins. in the ground, mkd. IA on N face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S27   S26 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°04' E., beginning new measurement.</p> <p>Over rolling land.</p>
35.80	Dirt road, bears ENE and WSW.
40.13	<p>The cor. of secs. 22, 23, 26 and 27, monumented by person(s) unknown with a juniper post, 4 ins. square, 38 ins. long, loosely set, 14 ins. in the ground, mkd. with 2 notches on one face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N R29E</td><td></td></tr> <tr><td>S22</td><td>S23</td></tr> <tr><td colspan="2" style="text-align: center;"> </td></tr> <tr><td>S27</td><td>S26</td></tr> <tr><td colspan="2" style="text-align: center;">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in corner of abandon fences, bears, N. and W.</p> <hr/>	T19N R29E		S22	S23			S27	S26	1994	
T19N R29E											
S22	S23										
S27	S26										
1994											
40.09	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 88°55' W., bet. secs. 23 and 26.</p> <p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 23 and 26, monumented by person(s) unknown with a juniper post, 3 ins. square, 31 ins. long, firmly set, 12 ins. in the ground, mkd. 1/4 on S. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T19N R29E</td><td></td></tr> <tr><td>S23</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S26</td><td></td></tr> <tr><td colspan="2" style="text-align: center;">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr/> <p>S. 89°56' W., beginning new measurement.</p> <p>Over rolling land.</p>	T19N R29E		S23		1/4	—	S26		1994	
T19N R29E											
S23											
1/4	—										
S26											
1994											
40.12	<p>The cor. of secs. 22, 23, 26 and 27.</p> <hr/> <p>N. 0°04' E., bet. secs. 22 and 23.</p>										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS																			
40.10	<p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>																		
80.20	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td></td><td>1/4</td></tr> <tr><td>S22</td><td>  S23</td></tr> <tr><td></td><td>1994</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in wash, 18 ft. wide, 6 ft. deep, drains S.</p> <p>The cor. of secs. 14, 15, 22 and 23, monumented by person(s) unknown with juniper post, 3 ins. diam., 30 ins. long, loosely set, 1 in. in the ground, mkd. with 3 notches on a face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S15</td><td>  S14</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S22</td><td>  S23</td></tr> <tr><td></td><td>1994</td></tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury juniper post alongside the stainless steel post.</p>	T19N	R29E		1/4	S22	S23		1994	T19N	R29E	S15	S14			S22	S23		1994
T19N	R29E																		
	1/4																		
S22	S23																		
	1994																		
T19N	R29E																		
S15	S14																		
S22	S23																		
	1994																		
40.16	<p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>S. 89°56' W., bet. secs. 14 and 23.</p> <p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate dist.; there is no remaining evidence of the original cor.</p>																		

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R29E S14 1/4 — S23 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
0.23	Dirt road, bears N. and S.
80.32	The cor. of secs. 14, 15, 22 and 23.
	N. 0°28' E., bet. secs. 14 and 15.
	Over rolling land.
39.20	Edge of Mesa, bears E and W.
39.69	Point for the 1/4 sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T19N R29E 1/4 S15   S14 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
79.38	Point for the cor. of secs. 10, 11, 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R29E S10   S11 —   — S15   S14 1994</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.
	From the cor. of secs. 11, 12, 13 and 14.
	S. 89°36' W., bet. secs. 11 and 14.
	Over rolling land.
39.77	Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R29E S11 1/4 — S14 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
42.10	Dirt road, bears NNE and SSW.
79.54	The cor. of secs. 10, 11, 14 and 15.
	N. 0°25' E., bet. secs. 10 and 11.
	Over rolling land.
17.70	Southerly rim of Morgan Canyon.
39.69	True point for the 1/4 sec. cor. of secs. 10 and 11, at proportionate dist.; there is no remaining evidence of the original cor. Falls on vertical slope of gulch, drains SW, impractical to monument.
	From this point, the point selected for a witness cor. bears N. 43°27' W., 1.69 chs. dist.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.38	<p style="text-align: center;">WC T19N R29E 1/4 S10   S11 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 2, 3, 10 and 11, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 3   S 2 ----- S10   S11 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
40.13	<p>From the cor. of secs. 1, 2, 11 and 12.</p> <p>N. 89°58' W., bet. secs. 2 and 11.</p> <p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 2 and 11, monumented by person(s) unknown with a juniper post, 3 ins. square, 34 ins. long, firmly set, 20 ins. in the ground, mkd. 1/4 on the S. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 2 1/4 — S11 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Bury the juniper post alongside the stainless steel post.
	Cor. is located in an abandoned fence, bears E. and W.
	S. 87°58' W., beginning new measurement.
	Over rolling land.
24.60	Easterly rim of Morgan Canyon.
39.47	The cor. of secs. 2, 3, 10 and 11.
	N. 0°05' W., bet. secs. 2 and 3.
	Over rolling land.
39.69	True point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the original cor. Falls on sandy NE vertical slope of gulch, impractical to monument.
	From this point, the point selected for a witness cor. bears N. 15°02' W., 2.40 chs. dist.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">WC T19N R29E 1/4 S 3   S 2 1994 ↘</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
53.70	Northerly rim of Morgan Canyon.
79.72	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of Tp., hereinbefore described.
	From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of Tp., monumented with a stainless steel post 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. T19N R29E S3 S4 S33 S34 T18N 1993, as described in the field notes of the dependent resurvey of the N. bdy., T. 18 N., R. 29 E., executed concurrently under this same group.

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	N. $0^{\circ}21'$ W., bet. secs. 33 and 34.										
	Over rolling land, through dense juniper trees.										
44.21	Point for the $1/4$ sec. cor. of secs. 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor.										
	Set a stainless steel post, 28 ins. long, $2\ 1/2$ ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td></td><td>1/4</td></tr> <tr><td>S33</td><td>  S34</td></tr> <tr><td></td><td>1994</td></tr> </table>	T19N	R29E		1/4	S33	S34		1994		
T19N	R29E										
	1/4										
S33	S34										
	1994										
	Deposit a magnet in a $1 \times 1 \times 2\ 5/8$ ins. white plastic case beneath the stainless steel post.										
	Cor. is located in wash, 18 ft. wide, 6 ft. deep, drains S.										
86.70	Ridge, bears NE and SW.										
88.42	The cor. of secs. 27, 28, 33 and 34, determined from the remaining undisturbed original bearing tree.										
	<p style="margin-left: 40px;">A standing decayed piñon, 16 ins. diam., bears S. <math>28^{\circ}</math> E., 92 lks. dist., mkd. S34 on a partially healed blaze.</p>										
	and the remaining original bearing trees										
	<p style="margin-left: 40px;">A dead and down piñon, 8 ins. diam., bears S. <math>20^{\circ}</math> W., 83 lks. dist., mkd. R29 on a partially healed blaze (Record S. <math>6^{\circ}</math> W., 13 lks.).</p>										
	<p style="margin-left: 40px;">A dead and down piñon, 10 ins. diam., bears S. <math>53^{\circ}</math> W., 74 lks. dist., mkd. S28 on a partially healed blaze. (Record N. <math>21^{\circ}</math> W., 52 lks.).</p>										
	At the cor. point										
	Set a stainless steel post, 28 ins. long, $2\ 1/2$ ins. diam., 24 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S28</td><td>  S27</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;"></td></tr> <tr><td>S33</td><td>  S34</td></tr> <tr><td></td><td>1994</td></tr> </table>	T19N	R29E	S28	S27			S33	S34		1994
T19N	R29E										
S28	S27										
S33	S34										
	1994										

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 26, 27, 34 and 35.</p> <p>S. 87°31' W., bet. secs. 27 and 34.</p> <p>Over rolling land.</p>
39.85	<p>Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S27 1/4 — S34 1994</p>
79.70	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 27, 28, 33 and 34.</p> <hr/>
	<p>N. 0°52' W., bet. secs. 27 and 28</p> <p>Over rolling land.</p>
2.00	<p>Wash, drains SSE.</p>
39.55	<p>The 1/4 sec. cor. of secs. 27 and 28, monumented by person(s) unknown with a juniper post, 7 x 5 ins. on top, 96 ins long, firmly set, 28 ins. in the ground, with no visible marks. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S28   S27 1994</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
44.21	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr/> <p>N. 0°03' E., beginning new measurement.</p> <p>Over rolling land.</p> <p>The cor. of secs. 21, 22, 27 and 28, monumented by person(s) unknown with a juniper post, 3 ins. diam., 42 ins. long, loosely set, 4 ins. in the ground, plainly mkd. with 3 notches and IA on E. face and 2 notches on S. face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td>S21</td> <td>S22</td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> </tr> <tr> <td>S28</td> <td>S27</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <hr/>	T19N	R29E	S21	S22			S28	S27	1994	
T19N	R29E										
S21	S22										
S28	S27										
1994											
40.12	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>N. 89°53' W., bet. secs. 22 and 27.</p> <p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 22 and 27, monumented by person(s) unknown with a juniper post, 4 ins. square, 42 ins. long, loosely set, 6 ins. in the ground, with no visible marks. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E S22 1/4 — S27 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in abandoned fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°51' W., beginning new measurement.</p> <p>Over rolling land.</p> <p>40.11 The cor. of secs. 21, 22, 27 and 28.</p> <hr/>
	<p>N. 0°02' E., bet. secs. 21 and 22</p> <p>Over rolling land.</p> <p>0.40 Fence, bears SE and NW.</p> <p>2.30 Center of Paved road, bears SE and NW.</p> <p>3.30 Fence, bears SE and NW.</p> <p>36.70 Ridge, bears SE and NW.</p> <p>40.21 The 1/4 sec. cor. of secs. 21 and 22, monumented by person(s) unknown with a juniper post, 6 ins. square, 41 ins. long, firmly set, 31 ins. in the ground, with no visible marks. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S21   S22 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of the Subdivisional Lines,  
 T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in abandoned fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°06' E., beginning new measurement.</p> <p>Over rolling land.</p>								
19.00	Rio Puerco Rim, bears E. and W.								
39.94	<p>The cor. of secs. 15, 16, 21 and 22, monumented with a juniper post, 4 ins. square, 53 ins. long, loosely set, 20 ins. in the ground, plainly mkd. with 3 notches on E. face and 3 notches on S. face.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table border="1" style="border-collapse: collapse; margin: 0 auto;"> <tr> <td style="padding: 2px;">T19N</td> <td style="padding: 2px;">R29E</td> </tr> <tr> <td style="padding: 2px;">S16</td> <td style="padding: 2px;">S15</td> </tr> <tr> <td style="padding: 2px;">S21</td> <td style="padding: 2px;">S22</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <p>Bury the original juniper post alongside the stainless steel post.</p> <hr style="width: 80%; margin: 10px auto;"/>	T19N	R29E	S16	S15	S21	S22	1994	
T19N	R29E								
S16	S15								
S21	S22								
1994									
40.14	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 89°57' W., bet. secs. 15 and 22.</p> <p>Over rolling land.</p> <p>The 1/4 sec. cor. of secs. 15 and 22, monumented by person(s) unknown with a juniper post, 3 ins. square, 35 ins. long, loosely set, 8 ins. in the ground, faintly mkd. IA on one face. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>								

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E S15 1/4 — S22 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the juniper post alongside the stainless steel post.</p> <p>Cor. is located in abandon fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/>
1.50	<p>N. 89°52' W., beginning new measurement.</p> <p>Ridge, bears SE and NW.</p> <p>Over rolling land.</p>
40.06	<p>The cor. of secs. 15, 16, 21 and 22.</p> <hr/>
	<p>N. 0°44' E., bet. secs. 15 and 16.</p> <p>Over rolling land.</p>
39.07	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S16   S15 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.60	<p>Wash, 4 ft. wide, drains W.</p>
78.14	<p>Point for the cor. of secs. 9, 10, 15 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S 9</td><td>S10</td></tr> <tr><td>S16</td><td>S15</td></tr> <tr><td colspan="2">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T19N	R29E	S 9	S10	S16	S15	1994	
T19N	R29E								
S 9	S10								
S16	S15								
1994									
9.90	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 89°12' W., bet. secs. 10 and 15.</p> <p>Over rolling land.</p> <p>Easterly rim of Morgan Canyon.</p>								
39.92	<p>True point for the 1/4 sec. cor. of secs. 10 and 15, at proportionate dist.; there is no remaining evidence of the original cor. Falls in wash, 3 lks. wide, drains SSW, impractical to monument.</p> <p>From this point, the point selected for a witness cor., bears S. 59° 26' E., 0.55 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>WC</td></tr> <tr><td>T19N R29E</td></tr> <tr><td>S10</td></tr> <tr><td>1/4</td></tr> <tr><td>S15</td></tr> <tr><td>1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	WC	T19N R29E	S10	1/4	S15	1994		
WC									
T19N R29E									
S10									
1/4									
S15									
1994									
73.80	<p>Westerly rim of Morgan Canyon.</p>								
79.84	<p>The cor. of secs. 9, 10, 15 and 16.</p>								
39.07	<p>N. 0°54' E., bet. secs. 9 and 10.</p> <p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p>								

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S 9   S10 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>78.14 Point for the cor. of secs. 3, 4, 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 4   S 3 ----- S 9   S10 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>
	<p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>S. 88°18' W., bet. secs. 3 and 10.</p> <p>Over rolling land.</p> <p>39.60 Point for the 1/4 sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 3 1/4 — S10 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>79.21 The cor. of secs. 3, 4, 9 and 10.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 0°06' W., bet. secs. 3 and 4.</p>
	<p>Over rolling land.</p>
39.07	<p>Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S 4   S 3 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
78.30	<p>The cor. of secs. 3, 4, 33 and 34 on the N. bdy. of Tp., hereinbefore described</p>
	<p>From the cor. of secs. 4, 5, 32 and 33 on the S. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. T19N R29E S4 S5 S32 S33 T18N 1993, as described in the field notes of the dependent resurvey of the N. bdy., T. 18 N., R. 29 E., executed concurrently under this same group.</p>
	<p>N. 0°03' W., bet. secs. 32 and 33.</p>
	<p>Over rolling land.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S32   S33 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.26	<p>Point for the cor. of secs. 28, 29, 32 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td>S29</td> <td>  S28</td> </tr> <tr> <td colspan="2" style="border-top: 1px solid black;"></td> </tr> <tr> <td>S32</td> <td>  S33</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T19N	R29E	S29	S28			S32	S33	1994	
T19N	R29E										
S29	S28										
S32	S33										
1994											
	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 85°10' W., bet. secs. 28 and 33.</p> <p>Over rolling land.</p>										
40.67	<p>Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td></td> <td>S28</td> </tr> <tr> <td></td> <td>1/4 —</td> </tr> <tr> <td></td> <td>S33</td> </tr> <tr> <td colspan="2" style="text-align: center;">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T19N	R29E		S28		1/4 —		S33	1994	
T19N	R29E										
	S28										
	1/4 —										
	S33										
1994											
81.34	<p>The cor. of secs. 28, 29, 32 and 33.</p> <hr/> <p>N. 0°01' E., bet. secs. 28 and 29.</p> <p>Over rolling land.</p>										
39.10	<p>Fence, bears ESE and WNW.</p>										
40.13	<p>Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E 1/4 S29   S28 1994</p> <p>from which</p> <p style="text-align: center;">The SW. corner of a house, bears, N. 52 1/4° E., 1.45 chs. dist., long side bears N. 10° E.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>40.30 Power line, bears ESE and WNW.</p> <p>78.30 Rio Puerco Rim, bears NNE and SSW.</p> <p>80.26 True point for the cor. of secs. 20, 21, 28 and 29, at proportionate dist.; there is no remaining evidence of the original cor. Falls on very steep N. slope of Rio Puerco Rim, impractical to monument.</p> <p>From this point, the point selected for a witness cor. bears N. 56°49' E., 3.25 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p style="margin: 0;">WC T19N R29E S20   S21 S29   S28 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>S. 82°40' W., bet. secs. 21 and 28.</p> <p>Over rolling land.</p> <p>40.57 Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E S21 1/4 — S28 1994</p>
77.60	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Rio Puerco Rim, bears NNE. and SSW.</p>
81.14	<p>True point for the cor. of secs. 20, 21, 28 and 29.</p> <hr/> <p>N. 0° 27' E., bet. secs. 20 and 21.</p> <p>Over rolling land.</p>
37.00	<p>Rio Puerco Rim, bears NNE and SSW.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S20   S21 1994</p>
80.26	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 16, 17, 20 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S17   S16 —   — S21   S20 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>S. 82°41' W., bet. secs. 16 and 21. Over rolling land.</p>
31.70	Fence, bears SSE and NNW.
32.90	Center of State Highway No. 666, bears SSE and NNW.
34.10	Fence, bears SSE and NNW.
40.28	<p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E S16 1/4 — S21 1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
77.60	Rio Puerco Rim, bears NNE and SSW.
80.56	The cor. of secs. 16, 17, 20 and 21.
	<p>N. 1°05' E., bet. secs. 16 and 17. Over rolling land.</p>
40.13	<p>Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set an iron railroad spike, flush with surface of pavement, mkd. T19N R29E 1/4 S16 S17 1994.</p>
	<p>from which</p>
	<p style="text-align: center;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears N. 1°10' E., 59.2 ft. dist., with brass cap mkd. RM T19N R29E 59.2 FT. TO COR. S16 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
80.26	<p>Point for the cor. of secs. 8, 9, 16 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS																			
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T19N</td> <td style="padding: 0 5px;">R29E</td> </tr> <tr> <td style="padding: 0 5px;">S 8</td> <td style="padding: 0 5px;">S 9</td> </tr> <tr> <td style="border-right: 1px solid black; border-bottom: 1px solid black; padding: 0 5px;">S17</td> <td style="border-bottom: 1px solid black; padding: 0 5px;">S16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>S. 84°09' W., bet. secs. 9 and 16.</p> <p>Over rolling land.</p> <p>39.89 Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 0 5px;">T19N</td> <td style="padding: 0 5px;">R29E</td> </tr> <tr> <td style="padding: 0 5px;">S 9</td> <td style="padding: 0 5px;">—</td> </tr> <tr> <td style="padding: 0 5px;">1/4</td> <td style="padding: 0 5px;">—</td> </tr> <tr> <td style="padding: 0 5px;">S16</td> <td style="padding: 0 5px;">—</td> </tr> <tr> <td style="padding: 0 5px;">1994</td> <td style="padding: 0 5px;">—</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>79.78 The cor. of secs. 8, 9, 16 and 17.</p> <hr style="border: 0.5px solid black; margin: 10px 0;"/> <p>N. 1°19' E., bet. secs. 8 and 9.</p> <p>Over rolling land.</p> <p>40.14 Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd</p>	T19N	R29E	S 8	S 9	S17	S16		1994	T19N	R29E	S 9	—	1/4	—	S16	—	1994	—
T19N	R29E																		
S 8	S 9																		
S17	S16																		
	1994																		
T19N	R29E																		
S 9	—																		
1/4	—																		
S16	—																		
1994	—																		

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E 1/4 S 8   S 9 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
45.20	Ridge, bears NE and SW.
80.28	<p>Point for the cor. of secs. 4, 5, 8 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 5   S 4 ----- S 8   S 9 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/> <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 85°38' W., bet. secs. 4 and 9.</p> <p>Over rolling land.</p>
39.48	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E S 4 1/4 — S 9 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
78.96	<p>The cor. of secs. 4, 5, 8 and 9.</p> <hr/> <p>N. 0°26' W., bet. secs. 4 and 5.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Over rolling land.
40.13	<p>Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
	<p>T19N R29E 1/4 S 5   S 4 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
80.55	The cor. of secs. 4, 5, 32 and 33 on the N. bdy. of Tp., hereinbefore described.
	<p>From the cor. of secs. 5, 6, 31 and 32 on the S. bdy. of Tp., monumented with a stainless steel post 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. T19N R29E S5 S6 S31 S32 T18N 1993, as described in the field notes of the dependent resurvey of a the N. bdy., T. 18 N., R. 29 E., executed concurrently under this same group.</p>
	N. 0°08' W., bet. secs. 31 and 32
	Over rolling land.
39.73	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p>T19N R29E 1/4 S31   S32 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
40.50	Graded road, 23 lks wide, bears ENE and WSW.
76.50	Fence, bears E. and W.

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
77.00	Rio Puerco Rim, bears E. and W.
79.46	<p>True point for the cor. of secs. 29, 30, 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor. Falls on very steep N. slope of Rio Puerco Rim, impractical to monument.</p> <p>From this point, the point selected for a witness cor. bears S. 58°31' E., 2.45 chs. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 714 1015 903" style="text-align: center;"> <p>WC T19N R29E S30   S29 ←——— S31   S32 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.82	<p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>N. 89°38' W., bet. secs. 29 and 32.</p> <p>Over rolling land.</p> <p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="860 1438 1015 1606" style="text-align: center;"> <p>T19N R29E S29 1/4 ——— S32 1994</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
40.10	Dirt road, bears N. and S.
66.10	Rio Puerco Rim, bears E. and W.
81.64	True point for the cor. of secs. 29, 30, 31 and 32.

Dependent Resurvey of the Subdivisional Lines,  
 T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>N. 87°59' W., bet. secs. 30 and 31.</p>
	<p>Over rolling land.</p>
40.62	<p>Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E</p>
	<p style="text-align: center;">S30</p>
	<p style="text-align: center;">1/4 —</p>
	<p style="text-align: center;">S31</p>
	<p style="text-align: center;">1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
81.07	<p>The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam, firmly set, projecting 4 ins. above ground with brass cap mkd. T19N R28E R29E S25 S30 S31 S36 1988, as described in the field notes of the dependent resurvey of the E. bdy., T. 19 N., R. 28 E., executed concurrently under this same group.</p>
	<hr/> <p>From the true point for the cor. of secs. 29, 30, 31 and 32.</p>
	<p>N. 0°53' E., bet. secs. 29 and 30</p>
	<p>Over nearly level land.</p>
39.73	<p>Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E</p>
	<p style="text-align: center;">1/4</p>
	<p style="text-align: center;">S30   S29</p>
	<p style="text-align: center;">1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.46	<p>Point for the cor. of secs. 19, 20, 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td>S30</td> <td>S29</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T19N	R29E	S19	S20	S30	S29	1994			
T19N	R29E										
S19	S20										
S30	S29										
1994											
	<p>From the true point for the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 89°49' W., bet. secs. 20 and 29.</p> <p>Over nearly level land.</p>										
40.21	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T19N</td> <td>R29E</td> </tr> <tr> <td></td> <td>S20</td> </tr> <tr> <td></td> <td>1/4 —</td> </tr> <tr> <td></td> <td>S29</td> </tr> <tr> <td colspan="2">1994</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>	T19N	R29E		S20		1/4 —		S29	1994	
T19N	R29E										
	S20										
	1/4 —										
	S29										
1994											
80.43	<p>The cor. of secs. 19, 20, 29 and 30.</p> <p>N. 87°51' W., bet. secs. 19 and 30.</p> <p>Over nearly level land.</p>										
40.09	<p>Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T19N R29E S19 1/4 — S30 1994</p>
79.81	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground with brass cap mkd. T19N R28E R29E S19 S24 S25 S30 1989, as described in the field notes of the dependent resurvey of the E. bdy., T. 19 N., R. 28 E., executed concurrently under this same group.</p>
39.74	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 1°04' E., bet. secs. 19 and 20</p> <p>Over nearly level land.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
79.48	<p style="text-align: center;">T19N R29E 1/4 S19   S20 1994</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point for the cor. of secs. 17, 18, 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E S18   S17 —+— S19   S20 1994</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p> <hr/>
	<p>From the cor. of secs. 16, 17, 20 and 21.</p>
	<p>S. 89°14' W., bet. secs. 17 and 20.</p>
	<p>Over nearly level land.</p>
39.78	<p>Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E</p>
	<p style="text-align: center;">S17</p>
	<p style="text-align: center;">1/4 —</p>
	<p style="text-align: center;">S20</p>
	<p style="text-align: center;">1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
79.56	<p>The cor. of secs. 17, 18, 19 and 20.</p> <hr/>
	<p>N. 87°43' W., bet. secs. 18 and 19.</p>
	<p>Over nearly level land.</p>
39.85	<p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor.</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E</p>
	<p style="text-align: center;">S18</p>
	<p style="text-align: center;">1/4 —</p>
	<p style="text-align: center;">S19</p>
	<p style="text-align: center;">1994</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
78.84	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground with brass cap mkd. T19N R28E R29E S13 S18 S19 S24 1989, as described in the field notes of the dependent resurvey of the E. bdy., T. 19 N., R. 28 E., executed concurrently under this same group.</p>
	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 1°18' E., bet. secs. 17 and 18.</p> <p>Over nearly level land.</p>
39.74	<p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T19N R29E 1/4 S18   S17 1994</p>
	<p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears N. 18°38' W., 36.1 ft. dist., with brass cap mkd. RM T19N R29E 36.1 FT TO COR 1/4 S18 1994, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 58 lks., N. of an asphalt road.</p>
78.70	<p>Ridge, bears ESE and WSW.</p>
79.48	<p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S 7</td><td>S 8</td></tr> <tr><td colspan="2" style="text-align: center;">— —</td></tr> <tr><td>S18</td><td>S17</td></tr> <tr><td colspan="2" style="text-align: center;">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.</p>	T19N	R29E	S 7	S 8	— —		S18	S17	1994	
T19N	R29E										
S 7	S 8										
— —											
S18	S17										
1994											
39.64	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>S. 88°40' W., bet. secs. 8 and 17.</p> <p>Over nearly level land.</p> <p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>										
79.29	<div style="text-align: center;"> <table border="1"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S 8</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S17</td><td></td></tr> <tr><td colspan="2" style="text-align: center;">1994</td></tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>The cor. of secs. 7, 8, 17 and 18.</p>	T19N	R29E	S 8		1/4	—	S17		1994	
T19N	R29E										
S 8											
1/4	—										
S17											
1994											
39.74	<p>N. 87°35' W., bet. secs. 7 and 18.</p> <p>Over nearly level land.</p> <p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS											
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.										
77.10	Dirt road, bears ESE and WNW.										
78.16	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T19N R28E R29E S7 S12 S13 S18 1989, as described in the field notes of the dependent resurvey of the E. bdy., T. 19 N., R. 28 E., executed concurrently under this same group.										
	From the cor. of secs. 7, 8, 18 and 17.										
	N. 1° 25' E., bet. secs. 7 and 8										
	Over nearly level land.										
39.74	Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td></td><td>1/4</td></tr> <tr><td>S 7</td><td>  S 8</td></tr> <tr><td></td><td>1994</td></tr> </table>	T19N	R29E		1/4	S 7	S 8		1994		
T19N	R29E										
	1/4										
S 7	S 8										
	1994										
79.00	Ridge, bears ESE and WSW.										
79.48	Point for the cor. of secs. 5, 6, 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.  Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.										
	<table style="margin-left: auto; margin-right: auto;"> <tr><td>T19N</td><td>R29E</td></tr> <tr><td>S 6</td><td>  S 5</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 7</td><td>  S 8</td></tr> <tr><td></td><td>1994</td></tr> </table>	T19N	R29E	S 6	S 5	<hr/>		S 7	S 8		1994
T19N	R29E										
S 6	S 5										
<hr/>											
S 7	S 8										
	1994										
	Deposit a magnet in a 1 x 1 x 2 5/8 in. white colored plastic case beneath the stainless steel post.										
	From the cor. of secs. 4, 5, 8 and 9.										

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
	S. 88°05' W., bet. secs. 5 and 8.
	Over nearly level land.
31.10	Fence, bears SSE and NNW.
32.40	Center of State Highway No. 666, bears SSE and NNW.
33.70	Fence, bears SSE and NNW.
39.59	Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R29E S 5 1/4 — S 8 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.
79.18	The cor. of secs. 5, 6, 7 and 8.
	N. 87°28' W., bet. secs. 6 and 7.
	Over nearly level land.
39.49	Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T19N R29E S 6 1/4 — S 7 1994</p>
	Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

## BOOK 5484

Dependent Resurvey of the Subdivisional Lines,  
T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona

CHAINS	
77.63	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of Tp., monumented with a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. T19N R28E R29E S1 S6 S7 S12 1989.</p> <hr/>
	<p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0°30' W., bet. secs. 5 and 6</p> <p>Over nearly level land.</p>
39.73	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T19N R29E 1/4 S 6   S 5 1994</p>
79.43	<p>The cor. of secs. 5, 6, 31 and 32 on the N. bdy. of Tp., hereinbefore described.</p> <hr/>
	<p style="text-align: center;">GENERAL DESCRIPTION</p> <p>This survey is located approximately 10 air miles SE. of the town of Sanders, Arizona.</p> <p>The terrain consists of rolling land with scattered to dense juniper and piñon pine forests. The average elevation is 6,500 feet above sea level.</p> <p>Access to the area is provided by State Road 666 which traverses the township.</p> <p>There is limited occupancy throughout this region and is used primarily for grazing and wood cutting.</p> <hr/>

BOOK 5484

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

## FIELD ASSISTANTS

NAMES	CAPACITY
Donald A Brewer	Surveying Technician
Gordon R. Bube1	Surveying Technician
W. William Foster	Surveying Technician
Geoffrey A. Graham	Surveying Technician
Luke B. Granger	Surveying Technician
Robert J. Lyle	Surveying Technician
Joel D. Ayers	Surveying Aide
Jimmy James Jr.	Surveying Aide
Michael Searles	Surveying Aide

61  
BOOK 5484  
CERTIFICATE OF SURVEY

We, Joe R. Salazar and William P. Carpender, Cadastral Surveyors, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 12th day of January, 1987, and Supplemental Special Instructions bearing date of the 29th day of February, 1988, We have dependently resurveyed the east and north boundaries and subdivisional lines, of Township 19 North, Range 29 East, Gila and Salt River Meridian, Arizona, in the State of Arizona, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Feb. 27/1997  
(Date)

Joe R. Salazar  
(Cadastral Surveyor)

FEBRUARY 27, 1997  
(Date)

William P. Carpender  
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Arizona State Office  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the east and north boundaries and the subdivisional lines, of Township 19 North, Range 29 East, Gila and Salt River Meridian, Arizona, executed by Joe R. Salazar and William P. Carpender, Cadastral Surveyors, having been critically examined and found correct, are hereby approved.

MAR 13 1997  
(Date)

Dale C. Wilson  
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 19 N., R. 29 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~\_\_\_\_\_~~  
~~(Date)~~

~~\_\_\_\_\_~~  
~~(Acting Chief Cadastral Surveyor of Arizona)~~