

ORIGINAL

1

BOOK 5487

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD NOTES  
OF THE  
DEPENDENT RESURVEY OF

---

THE ARIZONA AND UTAH STATE BOUNDARY (NORTH BOUNDARY)

---

FROM MILE CORNER 59 TO MILE CORNER 64,

---

A PORTION OF THE SOUTH BOUNDARY,

---

AND A PORTION OF THE SUBDIVISIONAL LINES,

---

AND THE SUBDIVISION OF SECTION 32

---

AND THE METES-AND-BOUNDS SURVEY OF THE

---

COTTONWOOD POINT WILDERNESS AREA BOUNDARY

---

IN FRACTIONAL TOWNSHIP 42 NORTH, RANGE 6 WEST

---

Of the Gila and Salt River Meridian,  
In the State of Arizona

---

EXECUTED BY  
Belle A. Craig, Cadastral Surveyor

---


Under Special Instructions dated July 15, 1993, approved July 15, 1993, which provided for the surveys included under Group Number 760, and assignment instructions dated July 26, 1993.

Survey Commenced August 16, 1993  
Survey Completed October 5, 1993

BOOK 5487

INDEX DIAGRAM

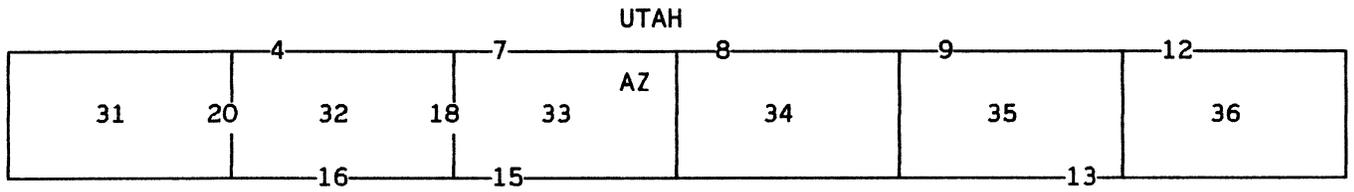FRACTIONAL TOWNSHIP 42 NORTH, RANGE 6 WEST.



Subdivision of Section 32  
Metes-and-Bounds Survey

pp. 22-28  
pp. 28-53

## BOOK 5487

T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

## CHAINS

The following field notes describe the dependent resurvey of the Arizona and Utah State Boundary (north boundary) from the 59 mile corner to the 64 mile corner, a portion of the south boundary and a portion of the subdivisional lines, and the subdivision of section 32 and the metes-and-bounds survey of the Cottonwood Point Wilderness Area Boundary in Fractional Township 42 North, Range 6 West, Gila and Salt River Meridian, Arizona.

The history of surveys pertaining to this resurvey is as follows: The north boundary (Arizona-Utah State Boundary) was surveyed by Howard B. Carpenter in 1901. A portion of the north boundary was retraced by Robert E. L. Collier in 1909 and by S. P. Stewart and F. C. French in 1909. Jos. C. Thoma surveyed the east boundary in 1914. Thomas B. Matthews and William L. Nash surveyed the west boundary, a portion of the south boundary and a portion of the subdivisional lines in 1916. B. D. Procter and J. P. Hester resurveyed the east one-half mile of the south boundary of section 35 and surveyed a portion of the south boundary in 1933-34. Paul G. Bauer retraced a portion of the north boundary, resurveyed a portion of the east boundary and surveyed a portion of the subdivisional lines in 1971.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated July 15, 1993, for Group No. 760, Arizona.

Preliminary to the resurvey, the lines of the original survey were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Pentax PTS-III05 total station instrument.

The geographic position of the corner of sections 4, 5, 32 and 33, on the S. bdy. of the Tp., was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation station "Cane Beds 1952" was used as the control station.

Latitude: 36°59'25.79" N. Longitude: 112°57'18.69" W. NAD27

## BOOK 5487

T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS

The mean magnetic declination, as taken from quadrangle map COLORADO CITY, ARIZ., published in 1988 by U.S. Geological Survey, is 13 1/2° E.

Dependent Resurvey of the Arizona and Utah State Bdy. (N. Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

Restoring the retracement executed by  
Robert E. L. Collier in 1909

Beginning at the point for the 59 Mile cor., on the Az.-Ut. State Boundary, at a proportionate dist.; there is no remaining evidence of the original cor.

Set an aluminum rod, 36 ins. long, 5/8 in. diam., 2 ft. below the surface of Uzona Ave., with aluminum cap mkd.

59M  
T43S R10W  
S 33  
UTAH

ARIZ  
S31  
T42N R6W  
1993

from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears N. 55°55' E., 60.1 ft. dist., with cap mkd. RM 59M T43S R10W UTAH 60.1 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 3 lks. S. of wood rail fence, 2 ft. high, bears E. and W.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears S. 45°20' E., 45.4 ft. dist., with cap mkd. RM 59M T42N R6W ARIZ. 45.4 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 4 lks. N. of chain link fence, 4 ft. high, bears E. and W.

## BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the aluminum rod.</p>
	<p>Cor. is located 20 lks. N. of S. edge of a Uzona Ave, a graded road, 45 lks. wide, bears E. and W.</p>
	<p>From this cor. point, the 58 Mile cor., on the Ut.-Az. State Boundary, bears S. 89°53' W., 80.56 chs. dist., monumented with a iron post, 2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd., with raised letters, UTAH on N. and ARIZ. on S. and 58M stamped in center.</p>
	<p>from which</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears S. 87°53' E., 36.6 ft. dist., with cap mkd. RM 58M T42N R7W ARIZ 36.6 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 2 lks. SW of fence cor., 4 strand barbed wire, bears W. and SE.</p>
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears N. 8°20' W., 66.8 ft. dist., with cap mkd. RM 58M T43S R10W UTAH 66.8 FT. TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 1 lk. W of power pole, lines extend SE and NW.</p>
	<p>Add the marks 1993 to the brass cap.</p>
	<p>Cor. is located in a barbed wire fence, 4 strand, bears E and W. 45 lks. S. of the center of Uzona Ave. 60 lks. wide, bears E. and W.</p>
	<p>N. 89°53' E., on the 60th mile.</p>
	<p>Along a graded road, Uzona Avenue, 60 lks. wide, bears E. and W.</p>
<p>1.57</p>	<p>From this point a bearing tree for the closing cor. of secs. 33 and 34, T. 43 S., R. 10 W., Salt Lake Meridian, Utah, a juniper, 28 ins. diam., mkd. CC T43S R10W S33 BT, on partially healed blaze, bears N., 73 lks. dist. The tree is in the front yard of a residence with a tree house built in it.</p>
<p>5.55</p>	<p>Intersection of Lauritzen St., 40 lks. wide, bears N. and S. and Uzona Ave., 60 lks wide, bears W.</p>

6  
BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
31.38	Point for the closing cor. of secs. 31 and 32, T. 42 N., R. 6 W., hereinafter described.
71.44	Point for the 1/4 sec. cor. of sec. 32 only, T. 42 N., R. 6 W., hereinafter described.
93.80	Trail road, bears NE and SW.
94.05	Canal, 25 lks. wide, 3 ft. deep, drains SW.
95.28	<p>The 60.19 mile cor. on the Az.-Ut. State Boundary., identical with AP 1, sec. 32, on the Cottonwood Point Wilderness Area Bdy., monumented with a sandstone, 30 x 22 x 6 ins. firmly set, projecting 14 ins. above ground, mkd. UTAH on the N. face, illegible marks on the E. face, and 60.19M on W. face, from which original bearing trees</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 74° E., 28 lks. dist., mkd. UTAH 60.19M BT, on partially healed blaze..</p> <p style="padding-left: 40px;">A pinon pine, 14 ins. diam., bears S. 64 1/2° W., 23 lks. dist., mkd. UTAH 60.19M BT, on partially healed blaze. (Record: 21 lks.).</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, with a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"><p>60.19M T43S R10W S 35 UTAH</p><hr/><p>ARIZ T42N R6W S32 CPWA 1993</p></div> <p>from which a new accessory</p> <p style="padding-left: 40px;">A pinon, 10 ins. diam., bears S. 27° E., 77 lks. dist., mkd. ARIZ 60.19M BT.</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p>

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located in a 5-strand barbed wire fence, bears E. and W.
	<hr/> <p style="text-align: center;">Restoring the resurvey executed by Paul G. Bauer in 1971</p> <hr/>
	N. 89°53' E., on the 61st mile, along the Cottonwood Point Wilderness Area Bdy.
	Asc. over rugged mountainous terrain.
8.00	Spur, slopes NW.
16.22	Point for the closing cor. of secs. 32 and 33, T. 42 N., R. 6 W., hereinafter described.
31.60	Top of Vermillion Cliffs, 1100 ft. above valley floor, and W. rim of Skunk Canyon, drains NW.
68.50	From this point a bearing tree for the closing cor. of secs. 35 and 36, T. 43 S., R. 10 W., Salt Lake Meridian, Utah, a pinon pine, 22 ins. in diam., mkd. CC T43 R10W S35, on partially healed blaze, bears N., 32 lks. dist. The tree is located on very steep W. slope, overlooking Skunk Canyon to the W.
76.70	E. rim of Skunk Canyon.
80.31	Point for the 61 mile cor., on the Az.-Ut. State Boundary, at proportionate dist.; there is no remaining evidence of the original cor..
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. in the ground, to bedrock, in a supporting mound of stone, 3 1/2 ft., to top, with brass cap marked.
	61M T43S R10W S 36 UTAH
	ARIZ T42N R6W S33 CPWA 1993
	from which
	A sandstone ledge, 10 x 8 x 5 ft. high, bears N. 11 1/4°W., 59 lks. dist., with X B0 chiseled on the face.

## BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on moderate W. slope on sandy bench, between sandstone ledges to the E. and W.</p> <hr/> <p>N. 89°53' E., on the 62nd mile, along the Cottonwood Point Wilderness Area Bdy.</p> <p>Asc. over broken mountainous terrain.</p>
16.26	<p>The closing cor. of secs. 33 and 34, monumented with an iron post, 2 1/2 ins. diam., loosely set, over an 'X' chiselled on a sandstone outcrop, projecting 30 ins. above ground, with brass cap mkd. UTAH S33 S34 T42N R6W CC 1971.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located on a very steep S. slope, of sandstone peak.</p> <p>Asc. to top of ridge.</p>
41.40	<p>Ridge bears S. 15° E. and N. 15° W., Desc. steep E. slope.</p>
56.19	<p>The 1/4 sec. cor. of sec. 34, only, T. 42 N., R. 6 W., on the N. bdy. of sec. 34, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, collar of stone, 2 ft. base. to top, with brass cap mkd. UTAH 1/4 S34 T42N R6W 1971.</p> <p>from which new accessories</p> <p style="padding-left: 40px;">A sandstone outcrop 90 x 70 ft. even with general surface, bears S. 80 1/2° E., 90.5 lks. dist. with X B0 chiseled on E. slope.</p> <p style="padding-left: 40px;">A sandstone cliff 15 ft. high, bears S. 58 1/2° W., 99.0 lks. dist. with X B0 chiseled on the NE. face, 9 1/2 ft. above the ground.</p> <p>Add the marks 1993 to the brass cap.</p>
67.67	<p>The closing cor. of Tps. 43 S., Rs. 9 1/2 and 10 W., Salt Lake Meridian, Utah, monumented with an iron post, 3 ins. diam., firmly set, projecting 30 ins. above ground, in a supporting mound of stone 3 1/2 ft. base, to top, with brass cap mkd. T43S UTAH R10W R 9 1/2 W S36 S31 CC ARIZONA 1909, from which</p>

## BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A ponderosa pine, 16 ins. diam., bears N. 80° E., 94 lks. dist., mkd. CC T43S R91/2W S31 BT, on partially healed blaze. (Record: N. 78° E.)</p>
	<p>Cor. is located on sandstone outcrop on SE slope.</p>
71.50	<p>Small canyon, 60 ft. deep, drains SSE, asc. broken W. slope.</p>
80.33	<p>The 62 mile cor., on the Az.-Ut. State Boundary, determined from the original bearing trees</p>
	<p>A cedar, 11 ins. diam., bears N. 9° E., 133 lks. dist., mkd. UTAH 62 M BT, on partially healed blaze.</p>
	<p>A pinon pine, 12 ins. diam., bears S. 80° E., 43 lks. dist., mkd. ARIZ 62 M BT, on partially healed blaze.</p>
	<p>A pinon pine, 11 ins. diam., bears N. 45° E., 123 lks. dist., mkd. ARIZ 62 M BT, on partially healed blaze.</p>
	<p>A cedar, 26 ins. diam., bears N. 72 1/2° W., 164 lks. dist., mkd. UTAH 62 M BT, on partially healed blaze. (Record: 160 lks.)</p>
	<p>At the cor. point</p>
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over an "X" chiseled in a sandstone outcrop, in original scattered mound of stone, rebuild supporting mound of stone, 3 ft. base, to top,, with brass cap mkd.</p>
	<p style="text-align: center;">62M T43S R91/2W S31 UTAH</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">ARIZ T42N R6W S34 CPWA 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located on sandstone outcrop on SW slope.</p>
	<hr style="width: 80%; margin-left: 0;"/> <p>N. 89°47' E., on the 63rd mile, along the Cottonwood Point Wilderness Area Bdy.</p>

## BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Asc. over broken mountainous terrain.
9.00	Ridge, bears SSE and NNW, desc.
15.79	<p>The closing cor. of secs. 34 and 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. UTAH S34 S35 T42N R6W CC 1971, from which original bearing trees</p> <p style="padding-left: 40px;">A pine, 10 ins. diam., bears S. 54 1/2° E., 86 lks. dist., mkd. T42N R6W S35 CC BT, on partially healed blaze.</p> <p style="padding-left: 40px;">A cedar, 6 ins. diam., bears S. 46° W., 78 lks. dist., mkd. T42NR6W S34 CC BT, on partially healed blaze.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located on E. slope.</p>
55.82	<p>The 1/4 sec. cor. of sec. 35 only, T. 42 N., R. 6 W., on the N. bdy. of sec. 35, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 30 ins. above ground, in a supporting mound of stone, 4 ft. base, to top, with brass cap mkd. UTAH 1/4 S35 T42N R6W 1971.</p> <p>from which new accessories</p> <p style="padding-left: 40px;">A sandstone outcrop, 20 x 20 x 10 ft. high, bears S. 29° E., 48 lks. dist., with X B0 chiseled on the N. face.</p> <p style="padding-left: 40px;">A sandstone bedrock outcrop, even with the general surface, bears S. 28° W., 39 lks. dist., mkd. X B0.</p> <p>Add the marks 1993 to the brass cap.</p> <p>Cor. is located on a spur, 2 1/2 chs. wide, slopes SE, 75 lks. N. of top of cliff, 200 ft. high.</p>
56.00	Begin descent over cliffs.
58.11	<p>Point for AP 15, sec. 35, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Cottonwood Point Wilderness Area Bdy.</p>
58.72	<p>Point for AP 16, sec. 35, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.</p> <p>Thence, along the Cottonwood Point Wilderness Area Bdy.</p>
59.00	Begin ascent over steep rocky W. slope and cliffs.

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
67.49	<p>The closing cor. of secs. 31 and 32, T. 43 S., R. 9 1/2 W., Salt Lake Meridian, Utah, monumented with an iron post, 2 ins. diam., firmly set, projecting 28 ins. above ground, in a supporting mound of stone 3 ft. base, to top,, with brass cap mkd. U T43S R91/2W S31 S32 CC A 1910 from which original bearing trees</p> <p>A branch on pinon pine, 10 ins. diam., bears N. 22 1/4° E., 35 lks. dist., mkd. T43S R91/2W S32 BT, on partially healed blaze.</p> <p>A pinon pine, 9 ins. diam., bears N. 10 1/2 ° W., 45 lks. dist., mkd. T43S R91/2W S31 BT, on partially healed blaze.</p> <p>Cor. is located 3 ft. W. of cliff, 45 ft. high, bears NE and SW.</p>
70.40	<p>Top of ridge overlooking Cottonwood Canyon to E., desc.</p>
79.61	<p>The 63 mile cor. on the Az.-Ut. State Boundary, monumented with a sandstone, 33 x 24 x 8 ins. firmly set, projecting 28 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, mkd. UTAH on the N. face, ARIZ on the S. face, no other markings legible from which bearing trees not of record</p> <p>A pinon pine, 12 ins. diam., bears N. 6 1/2° E., 44 lks. dist., mkd. T43 with healed blaze.</p> <p>A pinon pine, 10 ins. diam., bears S. 21° E., 41 lks. dist., mkd. UTAH 63M BT, on partially healed blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, in a mound of stone 3 1/2 base, to top, with brass cap mkd.</p> <p style="text-align: center;">63M T43S R91/2W S 32 UTAH</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">ARIZ T42N R6W S35 CPWA 1993</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Bury the original stone alongside the stainless steel post.</p>

## BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located in a on E. slope, 10 lks. of cliff face, 20 ft. high bears N. and S.
	S. 89°41' E., on the 64th mile, along the Cottonwood Point Wilderness Area Bdy.
	Desc. over steep broken E. slope.
8.30	Bottom of slope, the W. side of Cottonwood Canyon, bears NE and SW.
11.90	Trail road, bears NE. and SW.
16.22	The closing cor. of secs. 35 and 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. UTAH S35 S36 T42N R6W 1971.
	Add the marks 1993 to the brass cap.
	Cor. is located in sagebrush flat.
27.05	From this point, the closing cor. of secs. 7 and 12, Tp. 44 S., Rs. 9 and 9 1/2 W.. Salt Lake Base and Meridian, Utah, bears N., 38 lks. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, in a mound of stone 2 1/2 ft. base, to top, brass cap is missing, from which an original bearing tree
	A dead pinon pine,, 6 ins. diam., bears N. 5° E., 251 lks. dist., mkd. T44S R9W S7 BT, on opened blaze.
	Cor. is located at bottom of slope, the E. side of Cottonwood Canyon, bears NE and SW.
	Asc. over steep, W. slope.
56.49	The 1/4 sec. cor. of sec. 36 only, T. 42 N., R. 6 W., on the N. bdy. of sec. 36, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 36 ins. above ground, in a supporting mound of stone, 3 ft. base, to top,, with brass cap mkd. UTAH 1/4 S36 T42N R6W 1971.
	from which a new accessory
	A rock ledge, 4 ft. high, bears S. 15° E., 73 lks. dist., mkd. X BO.
	Add the marks 1993 to the brass cap.
	Cor. is located on SW slope, 1 ch. N. of ravine, drains NW.

## BOOK 5487

Dependent Resurvey of the Arizona and Utah State Boundary (North Bdy.)  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
70.50	Spur, slopes S.
75.60	Spur, slope SSE.
81.23	<p>The 64 mile cor. on the Az.-Ut. State Boundary, monumented with a sandstone, 28 x 14 x 7 ins. firmly set, projecting 28 ins. above ground, in a mound of stone, 5 ft. base, to top, mkd. UTAH on the N. face, no other markings legible, from which</p> <p style="padding-left: 40px;">A cedar, 12 ins. diam., bears N. 50 1/2° E., 40 lks. dist., mkd. UTAH 64M BT, on partially healed blaze.</p> <p style="padding-left: 40px;">A ponderosa pine, 13 ins. diam., bears S. 78° E., 120 lks. dist., mkd. ARIZ 64M BT, on partially healed blaze.</p> <p style="padding-left: 40px;">A ponderosa pine, 14 ins. diam., bears S. 63° E., 35 lks. dist., mkd. ARIZ 64M BT, on partially healed blaze.</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., over an "X" chiseled in sandstone, in a supporting mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">         64M          T44S R9W          S 7          UTAH  <hr style="width: 20%; margin: 0 auto;"/>         ARIZ          T42N R6W          S36          CPWA          1993       </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the original stone alongside the stainless steel post, supporting mound.</p> <p>Cor. is located on SE slope.</p> <hr style="width: 80%; margin: 20px auto;"/> <div style="text-align: center; margin: 10px auto;">         Dependent Resurvey of a Portion of the South Boundary,          T. 42 N., R. 6 W., Gila and Salt River Mer., Arizona       </div> <hr style="width: 80%; margin: 20px auto;"/> <div style="text-align: center; margin: 10px auto;">         Restoring the resurvey executed by          B.D. Proctor and J.P. Hester, in 1933-34       </div> <hr style="width: 20%; margin: 10px auto;"/>

## BOOK 5487

Dependent Resurvey of a Portion of the South Boundary  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

## CHAINS

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 36 ins. above ground, supporting mound of stone, 4 ft. base, to top, with brass cap mkd. T42N R6W S35 S36 S2 S1 T41N 1934, from which original bearing trees

A pinon pine, 12 ins. diam., bears N. 33 1/2° E., 89 lks. dist., mkd. T42N R6W S36 BT, on partially healed blaze. (Record: 86 lks.)

A juniper, 17 ins. diam., bears S. 55 1/4° E., 44 lks. dist., mkd. T41N R6W S1 BT, on partially healed blaze.

A fallen pinon pine, 8 ins. diam., bears S. 6° W., 45 lks. dist., mkd. T41N R6W S2 BT, on opened blaze.

A pinon pine, 11 ins. diam., bears N. 23° W., 106 lks. dist., mkd. T42N R6W S35 BT, on partially healed blaze. (Record: 101 lks.)

from which a new accessory

A pinon pine, 6 ins. diam., bears S. 32 3/4° W. 45 lks. dist., mkd. T41N R6W S2 BT.

Add the marks 1993 to the brass cap.

Cor. is located on gentle S. slope at top of irregular cliffs.

N. 89°54' W., bet. secs. 2 and 35.

Desc. 140 ft. down steep slope of cliffs and ledges.

4.99

The original witness cor. to the cor. of secs. 1, 2, 35 and 36, identical with AP 41, sec. 35, and AP 32 sec. 2, T. 41 N., R. 6 W., on the Cottonwood Point Wilderness Area Bdy., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T42N R6W S35 S36 S2 S1 T41N 1916.

Add the marks CPWA 1993 to the brass cap.

Cor. is located 6 ft. above toe of slope, bears SE and NNW.

\_\_\_\_\_

S. 89°58' W., beginning new measurement.

## BOOK 5487

Dependent Resurvey of a Portion of the South Boundary  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
25.52	<p>The original witness cor. to the 1/4 sec. cor of secs. 2 and 35, identical with AP 1, sec. 35, and AP 31, sec. 2, T. 41 N., R. 6 W., on the Cottonwood Point Wilderness Area Bdy., monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. 1/4 S35 S2 WC 1916, from which original bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 14 ins. diam., bears S. 49 1/4° W, 40 lks. dist., mkd. WC 1/4 S2 BT, on unhealed blaze. (Record: S. 76 1/4° W., 41 lks.)</p> <p style="padding-left: 40px;">A juniper, 15 ins. diam., bears N. 74 1/4° W, 46 lks. dist., mkd. WC 1/4 S35 BT, on unhealed blaze. (Record: N. 49° W., 47 lks.)</p> <p>Add the marks T42N R6W T41N CPWA 1993 to the brass cap.</p> <p>Cor. is located 25 lks. W. of trail road, bears SSE and NNW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>West, beginning new measurement.</p>
9.52	<p>True point for the 1/4 sec. cor of secs. 2 and 35, at record bearing and dist. No monument established.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">Restoring the survey executed by B. D. Proctor and J. P. Hester, in 1933-34</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>From the 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 23 ins. above ground, in a supporting mound of stone 3 ft. base, to top, with brass cap mkd. 1/4 S33 S4 1934, from which original bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 17 ins. diam., bears S. 15° E, 22 lks. dist., mkd. 1/4 S4 BT, on unhealed blaze.</p> <p style="padding-left: 40px;">A pinon pine, 11 ins. diam., bears N. 23 1/4° W, 16 lks. dist., mkd. 1/4 S4 BT, on unhealed blaze.</p> <p>Add the marks T42N R6W T41N 1993 to the brass cap.</p> <p>Cor. is located on steep E. slope.</p> <p>Asc. 50 ft. over E. slope.</p> <p>N. 89°53' W., bet. secs. 4 and 33.</p>
4.20	<p>Top of cliff bears N. and S.; desc.</p>

## BOOK 5487

Dependent Resurvey of a Portion of the South Boundary  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
33.20	AP 3, sec. 33, identical with AP 1, sec. 4, T. 41 N., R. 6 W., on the Cottonwood Point Wilderness Area Bdy., hereinafter described.
40.17	<p>The cor. of secs. 4, 5, 32 and 33, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T42N R6W S32 S33 S5 S4 T41N 1916, from which original bearing trees</p> <p style="padding-left: 40px;">A cedar, 10 ins. diam., bears N. 52 1/4° E., 147 lks. dist., mkd. T42N R6W S33 BT, on partially healed blaze.</p> <p style="padding-left: 40px;">A pinon pine, 16 ins. diam., bears S. 4 3/4° E., 260 lks. dist., mkd. T41N R6W S4 BT, on partially healed blaze.</p> <p style="padding-left: 40px;">A pinon pine, 16 ins. diam., bears N. 11 1/2° W., 422 lks. dist., mkd. T42N R6W S32 BT, on partially healed blaze.</p> <p>Cor. is located 25 lks. W. of center of wash, 25 lks. wide, 4 ft. deep. drains S.</p> <hr/> <p style="text-align: center;">Restoring the survey executed by Thomas B. Matthews and William L. Nash, in 1916</p> <hr/> <p>S. 89°55' W., bet. secs. 5 and 32.</p> <p>Over gently rolling land through a scattering of pinon, and juniper.</p>
20.01	<p>Point for the E 1/16 sec. cor. of secs. 5 and 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W S32 E 1/16 — S5 T41N R6W 1993</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 83 1/2° W., 101 lks. dist., mkd. E 1/16 S32 S5 BT.</p> <p style="padding-left: 40px;">A juniper, 6 ins. diam., bears N. 10 1/2° E., 56.5 lks. dist., mkd. X BT.</p>

Dependent Resurvey of a Portion of the South Boundary  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 10 lks. S. of trail road, bears E. and W.; 4 lks., W. of fence, bears S.</p> <p>The 1/4 sec. cor. of secs. 5 and 32, determined from references set prior to the construction of a red sandstone and concrete monument. This is accepted as the best available evidence of the original cor. position, from which local reference monuments.</p> <p style="padding-left: 40px;">A 5/8 in. rebar set in concrete, bears East, 15.15 lks. dist.</p> <p style="padding-left: 40px;">A 5/8 in. rebar set in concrete, bears South, 15.15 lks. dist.</p> <p style="padding-left: 40px;">A 5/8 in. rebar set in concrete, bears West., 15.15 lks. dist.</p> <p>At the cor. point</p> <p>Set a brass tablet, 3 1/4 ins. diam., with a 3 1/2 ins. stem, in a drill hole cemented in place, in a red sandstone monument, 8 x 8 x 2 ft. high, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W S32 1/4 — S5 T41N R6W 1993</p> <p>Deposit a magnet in a 1 x 1 x 5/8 ins. cylindrical magnet beneath the stem.</p> <p>Cor. is located at the intersection of graded roads, 50 lks. wide, in the middle of a cemetery, which bear, N., E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°55' W., beginning new measurement.</p>
40.00	<p>The cor. of secs. 5, 6, 31 and 32, monumented with an X, chiseled on the top of a manhole cover, 24 ins. diam., firmly set, flush with pavement. This position is locally recognized as the cor. and is accepted as the best available evidence of the original cor. position, from which local reference monuments.</p> <p style="padding-left: 40px;">A PK nail and shiner, 1 in diam., bears North, 3.03 lks. dist., mkd. BBE.</p>

## BOOK 5487

Dependent Resurvey of a Portion of the South Boundary  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

## CHAINS

A PK nail and shiner, 1 in diam., bears East, 3.03 lks.  
dist., mkd. BBE.

A PK nail and shiner, 1 in diam., bears South, 3.03 lks.  
dist., mkd. BBE.

A PK nail and shiner, 1 in, diam., bears West, 3.03 lks.  
dist., mkd. BBE.

Not remonumented

Due to local conditions it was impractical to establish any  
B.L.M. reference monuments.

Cor. is located at the intersection of Central St., paved,  
120 lks. wide, bears N. and S. and Township Ave., paved, 120 lks.  
wide, bears E. and W.

---

Dependent Resurvey of a Portion of the Subdivisional lines,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

---

Restoring the survey executed by  
Thomas. B. Matthews and William L. Nash in 1916

---

From the cor. of secs. 4, 5, 32 and 33, hereinbefore described.

North, bet. secs. 32 and 33.

7.22 Point for AP 19, sec. 32, identical with AP 1, sec. 33, on the  
Cottonwood Point Wilderness Area Bdy., hereinafter described.

Asc. over sandstone ledges, through pinon and juniper.

20.07 Point for the S 1/16 sec. cor. of secs. 32 and 33.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26  
ins. in the ground, with brass cap mkd.

T42N R6W  
S 1/16  
S32 | S33  
1993

from which

A pinon pine, 7 ins. diam., bears S. 56° E., 37.5 lks.  
dist., mkd. S 1/16 S33 BT..

## BOOK 5487

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS											
40.14	<p>A pinon pine, 6, 6 ins. diam., bears S. 52° W., 17 lks. dist., mkd. S 1/16 S32 BT.</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located moderate S. slope.</p> <p>The 1/4 sec. cor. of secs. 32 and 33, monumented with an iron post, 1 in. diam., firmly set, projecting 30 ins. above ground, supporting mound of stone, 3 ft. base, to top, with brass cap mkd. 1/4 S32 S33 1916, from which original bearing trees</p> <p>A pinon pine, 5 ins. diam., bears N. 81 3/4° E., 28 lks. dist., mkd. 1/4 S33 BT, on partially healed blaze.</p> <p>A pinon pine, 12 ins. diam., bears N. 39 1/2° W., 85 lks. dist., mkd. 1/4 S32 BT, on partially healed blaze.</p> <p>Add the marks T42N R6W 1993 to the brass cap.</p> <hr/> <p>N. 0°06' W., beginning new measurement.</p>										
13.65	<p>Point for the closing cor. of secs. 32 and 33, at intersection with the Az.-Ut. State Boundary.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a supporting mound of stone, 3 ft. base, to top,, with brass cap mkd.</p> <div style="text-align: center;"> <p>T43S R10W UTAH</p> <hr/> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">S32</td> <td style="padding: 2px;">S33</td> </tr> <tr> <td style="padding: 2px;">AR</td> <td style="padding: 2px;">IZ</td> </tr> <tr> <td colspan="2" style="padding: 2px;">T42N R6W</td> </tr> <tr> <td colspan="2" style="padding: 2px;">CC</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1993</td> </tr> </table> </div> <p>from which an original bearing tree, now functioning as a new accessory</p> <p>A pinon pine, 9 ins. diam., bears S. 88 1/2° E., 32.5 lks. dist., mkd. CC T42N R6W S 33 BT, on partially healed blaze.</p> <p>and a new accessory</p> <p>A pinon pine, 4 ins. diam., bears S. 70° E., 83 lks. dist., mkd. X BT.</p>	S32	S33	AR	IZ	T42N R6W		CC		1993	
S32	S33										
AR	IZ										
T42N R6W											
CC											
1993											

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on steep W. slope.</p> <p>From this cor. point, the 60.19 mile cor., on the Az.-Ut. State Boundary, bears S. 89°53' W., 16.22 chs. dist., hereinbefore described.</p> <p>From this same cor. point, the original closing cor. of secs. 32 and 33, bears N. 0°06' W., 0.02 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. CC S32 S33 T42N R6W 1916, from which the original bearing trees</p> <p style="padding-left: 40px;">A pinon pine, 6 ins. diam., bears S. 85° E., 32.5 lks. dist., mkd. CC T42N R6W S 33 BT, on partially healed blaze. (Record: 31 lks.)</p> <p style="padding-left: 40px;">A fallen pinon pine, 12 ins. diam., bears S. 55° W., 52 lks. dist., mkd. CC T42N R6W S 32 BT on opened blaze.</p> <p>Add the marks 1993 and AM to the brass cap. Remove from iron post and bury brass cap at original cor. point.</p> <hr style="border: 0.5px solid black;"/> <p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp. N. 0° 08' W., bet. secs. 31 and 32.</p> <p>Along Central St., paved road, 120 lks. wide, bears N. and S.</p>
25.00	Central St. curves to the NW.
39.12	Short Creek wash, 65 lks. wide, 10 ft. deep, drains SW.
40.08	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor..</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T42N R6W 1/4 S31   S32 1993</p> </div> <p>from which</p>

## BOOK 5487

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
53.74	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, for a reference monument, bears N. 51° E., 37.9 ft. dist., with cap mkd. RM T43S R10W 37.9 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 2.3 lks. S. of 6 ft. high, chain link fence bears E. and W. and 3 lks. N. of N. edge of trail road bears E. and W.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears N. 38° W., 47.2 ft. dist., with cap mkd. RM T42N R6W 47.2 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 25 lks. W. of W. edge of trail road, bears N. and S.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 57 lks., S. 2° W., of 6 ft. steel fence cor. post, in chain link fence, bears, N. and E.</p> <p>Point for the closing cor. of secs. 31 and 32, at intersection with the Az.-Ut. State Boundary. Not monumented.</p> <p>From this point, the 60.19 mile cor., on the Az.-Ut. State Boundary bears N. 89°53' E., 63.90 chs. dist., hereinbefore described.</p> <p>From this same point, the original closing cor. of secs. 31 and 32, bears N. 0°08' W., 0.02 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, flush with the ground, with brass cap mkd. CC S32 S33 T42N R6W 1916.</p> <p>Add the marks 1993 and AM to the brass cap.</p> <p>Cor. is located 4.5 lks., N. of the NE cor. of a house and 6.5 lks. S. of a rock retaining wall, 2 ft. wide, 2 1/2 ft. high, bears E. and W.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 32 only, T. 42 N., R. 6 W., is at midpoint the N. bdy. of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, on top of a 4 ft. aluminum fence post driven flush with the ground, with brass cap mkd.</p>

## BOOK 5487

Dependent Resurvey of a Portion of the Subdivisional Lines,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
20.06	<p style="text-align: center;">UTAH</p> <hr/> <p style="text-align: center;">1/4 S 32 T42N R6W 1993</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears N. 54°30' E., 28.5 ft. dist., with cap mkd. RM T43S R10W 28.5 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 33 lks. N. of 4-strand barbed wire fence bears E. and W.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears S. 38° E., 23.0 ft. dist., with cap mkd. RM T42N R6W 23.0 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 33 lks. N. of 4-strand barbed wire fence, bears E. and W.</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, the 60.19 mile cor., on the Az.-Ut. State Boundary, bears N. 89°53' E., 23.84 chs. dist., hereinbefore described.</p> <p>Cor. is located in Short Creek Wash, drains SW and 7 lks. S. of 4-strand barbed wire fence.</p> <hr/> <p style="text-align: center;">Subdivision of Section 32, T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p>From the 1/4 sec. cor. of secs. 5 and 32, on the S. bdy. of the Tp.</p> <p>N. 0°04' W., on the N. and S. center line of sec. 32.</p> <p>Along 200 E. Street.</p> <p>Point for the center S 1/16 sec. cor. of sec. 32.</p> <p>Set an aluminum rod, 36 ins. long, 5/8 in. diam., 24 ins. below the graded surface of Academy Ave., with aluminum cap mkd.</p>

## BOOK 5487

Subdivision of Section 32  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T42N R6W C S 1/16   S32 C 1993</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 23 ins. in the ground, for a reference monument, bears S. 32°57' E., 91.6 ft. dist., with cap mkd. RM T42N R6W CS 1/16 91.6 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 8 lks. N. 48° W. of the NW cor. of a 10 x 8 x 10 ft. high brick shed.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 21 ins. in the ground, for a reference monument, bears S. 36°14' W., 78.8 ft. dist., with cap mkd. RM T42N R6W CS 1/16 78.8 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post. Cor. is located 7 lks., N. 49° W. of a power pole.</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the N. edge of Academy Ave., a graded road, 33 lks. wide, bears E. and W., and in the projection of 200 E. Street, a graded road, 50 lks. wide, bears S.</p> <p>40.12 Point for the center 1/4 sec. cor. of sec. 32, at intersection with the E. and W. center line of sec. 32</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W C1/4 S32 1993</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears S. 89°37' E., 73.3 ft. dist., with cap mkd. RM T42N R6W C 1/4 S32 73.3 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p>

## BOOK 5487

Subdivision of Section 32,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
53.77	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 36°14' W., 78.8 ft. dist., with cap mkd. RM T42N R6W C 1/4 S32 22.0 FT TO COR 1993, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 22 lks. E. of E. bank of wash, 45 lks. wide, 5 ft. deep, drains SW.</p> <p>The 1/4 sec. cor. of sec. 32 only, T. 42 N., R. 6 W., on the N. bdy. of sec. 32.</p>
20.03	<p>From the 1/4 sec. cor. of secs. 32 and 33.</p> <p>S. 89°53' W., on the E. and W. centerline of sec. 32.</p> <p>Point for the center E 1/16 sec. cor. of sec. 32, identical with AP 5, sec. 32, on the Cottonwood Point Wilderness Area Bdy.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="844 1155 1055 1312" style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a water tower bears S. 55° W.</p> <p>Cor. is located on moderate W. slope, 15 ft. above small valley bottom</p>
22.53	<p>Point for the 1/1024 sec. cor. of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="860 1753 990 1911" style="text-align: center;"> <p>T42N R6W</p> <p>1/1024</p> <p>1993</p> </div>

## BOOK 5487

Subdivision of Section 32,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.06	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>From this cor. point, a water tower bears S. 35° W.</p> <p>Cor. is located on 20 lks. W. of trail road, bears SSE and NW.</p>
80.10	<p>The center 1/4 sec. cor. of sec. 32.</p> <p>The 1/4 sec. cor. of secs. 31 and 32.</p>
<hr/> <p>SE 1/4 Sec. 32</p> <hr/>	
20.065	<p>From the E 1/16 sec. cor. of secs. 5 and 32, on the S. bdy. of the Tp.</p> <p>N. 0°02' W., on the N. and S. center line of the SE 1/4 of sec. 32.</p> <p>Point for the SE 1/16 sec. cor. of sec. 32, at intersection with the E. and W. center line of the SE 1/4 of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W SE1/16 S32 1993</p>
26.90	<p>from which</p> <p style="padding-left: 40px;">A juniper, 18 ins. diam., bears S. 66° E., 89.5 lks. dist., mkd. SE 1/16 S32.</p> <p style="padding-left: 40px;">A pinon pine, 18 , 18 ins. diam., bears N. 9° W., 32 lks. dist., mkd. SE 1/16 S32 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 58.5 lks., N. 75° E. of a fence cor., 4-strand barbed wire, bears S. and W.</p>
33.02	<p>Point for AP 12, sec. 32, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.</p>
33.02	<p>Point for AP 8, sec. 32, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.</p>

## BOOK 5487

Subdivision of Section 32,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
40.13	The center E 1/16 sec. cor. of sec. 32.
	<hr/> From the S 1/16 sec. cor. of secs. 32 and 33.  S. 89°54' W., on the E. and W. center line of the SE 1/4 of sec. 32.
10.69	Point for AP 15, sec. 32, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.
20.02	The SE 1/16 sec. cor. of sec. 32.
22.52	Point for 1/1024 sec. cor. of sec. 32.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.
	T42N R6W
	1/1024
	1993
	Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.
	Cor. is located 13 lks., N. of 4-strand barbed wire fence, bears E. and W.
40.04	The center S 1/16 sec. cor. of sec. 32.
	<hr/> From 1/1024 sec. cor. on the E. and W. center line of the SE 1/4 of sec 32.
	N. 0°02' W., on the N. and S. center line of the SE 1/4 of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32.
5.015	Point for the 1/1024 sec. cor.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.
	T42N R6W
	1/1024
	1993

## BOOK 5487

Subdivision of Section 32,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona


CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 3 lks. S. of trail road, bears E. and W.</p> <hr/> <p>S. 89°54' W., on the E. and W. center line of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32.</p>
2.50	<p>Point for the SE-NW-SE 1/256 sec. cor. of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W SE-NW-SE 1/256  1993</p>
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 10 lks., S. of trail road, bears E. and W.</p> <hr/> <p>N. 0°03' W., on the N. and S. center line of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32.</p>
1.06	<p>Point for AP 11, sec. 32, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.</p> <p>Thence, along the Cottonwood Point Wilderness Area Bdy.</p>
4.04	<p>Point for AP 10, sec. 32, on the Cottonwood Point Wilderness Area Bdy., hereinafter described.</p> <p>Leave the Cottonwood Point Wilderness Area Bdy.</p>
5.015	<p>Point for the center E-NW-SE 1/256 sec. cor of sec. 32.</p> <p>Set an aluminum rod, 36 ins. long, 5/8 in. diam., 24 ins. below the surface of trail road, in the ground, with aluminum cap mkd.</p> <p style="text-align: center;">T42N R6W C-E-NW-SE 1/256  1993</p> <p>from which</p>

## BOOK 5487




Subdivision of Section 32,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A 9 x 4 x 5 ft. high boulder, bears S. 73° E., 32 lks., chiseled X BO on the W. face.</p> <p>A juniper, 14 ins. diam., bears S. 2 3/4° E., 38.5 lks. dist., mkd. C E NW SE 1/256 S32 BT.</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Set a carsonite post 3 lks W. of cor.</p> <p>Cor. is located on W. edge of trail road, bears SE. and SW.</p> <hr/> <p>N. 89°54' E., on the E. and W. center line of the NW 1/4 of the SE 1/4 of sec. 32.</p>
2.50	<p>Point for 1/1024 sec. cor. of sec. 32, identical with AP 9, sec. 32, on the Cottonwood Point Wilderness Area Bdy.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W</p> <p style="text-align: center;">1/1024 CPWA</p> <p style="text-align: center;">1993</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on NW slope.</p> <hr/> <p>N. 0°02' W., on E 1/1024 line of the NE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32.</p>
10.03	<p>The 1/1024 sec. cor. on the E. and W. center line of sec. 32.</p> <hr/> <p style="text-align: center;">Metes-and-Bounds Survey of the Cottonwood Point Wilderness Area Boundary, T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona</p> <hr/> <p style="text-align: center;">In sec. 32</p> <hr/> <p>From AP 1, sec. 32, identical with the 60.19 mile cor. on the Az.-Ut. State Boundary, hereinbefore described.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
3.20	<p>S. 29°53' W., on line 1-2.</p> <p>Point for AP 2, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">  <p>T42N R6W S32 AP 2 CPWA</p> </div> <p style="text-align: center;">1993</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 201 lks. S. of canal, 25 lks wide, 5 ft. deep, drains WSW.</p> <hr style="width: 20%; margin: 20px auto;"/>
3.21	<p>N. 85°16' W., on line 2-3.</p> <p>Point for AP 3, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">  <p>T42N R6W S32 AP 3 CPWA</p> </div> <p style="text-align: center;">1993</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on N slope, 120 lks. S. of canal, 25 lks. wide, 5 ft. deep, drains W, and 165 lks. S. of graded dirt road, 20 lks. wide, bears SE and SW.</p> <hr style="width: 20%; margin: 20px auto;"/>
6.95	<p>S. 15°20' W., on line 3-4.</p> <p>Point for AP 4, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p>

BOOK 5487  
Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on W. slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 32°31' E., on line 4-5.</p>
5.28	<p>Point for AP 5, sec. 32, identical with the center E 1/16 sec. cor. of sec. 32, hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 24°18' E., on line 5-6.</p>
3.55	<p>Point for AP 6, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p>
	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on SW slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 34°48' E., on line 6-7.</p>
2.91	<p>Point for AP 7, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	

Metes-and-Bounds Survey of the  
 Cottonwood Point Wilderness Area Boundary,  
 T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 60 lks., SSE of mouth of wash, 15 lks. wide, 4 ft. deep, drains WNW.</p> <hr/> <p>S. 64°38' W., on line 7-8.</p>
<p>3.45</p>	<p>Point for AP 8, sec. 32, on the N. and S. center line of the SE 1/4 of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="857 766 1019 982" data-label="Diagram"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on NW slope, 1.3 chs. W. of trail road, bears E. and W.</p> <p>From this cor. point, the center E 1/16 sec. cor. of sec. 32, bears N. 0°02' W., 7.11 chs. dist., hereinbefore described.</p> <hr/> <p>S. 40°25' W., on line 8-9.</p>
<p>3.85</p>	<p>Point for AP 9, sec. 32, identical with the 1/1024 sec. cor. of sec. 32, hereinbefore described.</p> <hr/> <p>S. 68°36' W., on line 9-10.</p>
<p>2.68</p>	<p>Point for AP 10, sec. 32, on the N. and S. center line of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	<div style="text-align: center; margin-bottom: 10px;"> <p>T42N R6W</p> <p>S32   AP10   CPWA 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 110 lks., E. of graded dirt road, 20 lks. wide, bears NE and SW.</p> <p>From this cor. point, the center E-NW-SE 1/256 sec. cor. of sec. 32 bears N. 0°03' W., 0.975 chs. dist., hereinbefore described.</p> <hr/> <p>From the point for AP 11, sec. 32, on the N. and S. center line of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin-bottom: 10px;"> <p>T42N R6W</p> <p>S32   CPWA   AP11 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on S. slope of ridge, bears E. and W., and 100 lks., N. of trail road, bears E. and W.</p> <p>From this cor. point, the SE-NW-SE 1/256 sec. cor. of sec. 32 bears S. 0°03' E., 1.06 chs. dist., hereinbefore described.</p> <p>N. 81°16' E., on line 11-12.</p> <p>5.06 Point for AP 12, sec. 32, on the N. and S. center line of the SE 1/4 of sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>
--------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## BOOK 5487

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="857 296 1019 512" style="text-align: center;"> <p>T42N R6W E CP   WA AP   12 E 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at the base of slope bears E. and W.</p> <p>From this cor. point, the SE 1/16 sec. cor. of sec. 32, bears S. 0°02' E., 6.835 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 75°11' E., on line 12-13.</p>
3.50	<p>Point for AP 13, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div data-bbox="857 1058 1019 1247" style="text-align: center;"> <p>T42N R6W CPWA AP 13 S32 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 7 ft. above base of slope bears E. and W. and 50 lks., N. 29° W. of trail road bears S. and W.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 82°49' E., on line 13-14.</p>
5.02	<p>Point for AP 14, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="857 1724 1019 1913" style="text-align: center;"> <p>T42N R6W CPWA AP 14 S32 1993</p> </div>

BOOK 5487

Metes-and-Bounds Survey of the Cottonwood Point Wilderness Area Boundary, T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS

Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.


Cor. is located 25 lks. W. of wash, 6 lks. wide, 4 ft. deep, drains SSW.

S. 6°39' E., on line 14-15.

8.40

Point for AP 15, sec. 32, on the E. and W. center line of the SE 1/4 of sec. 32.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 27 ft. above base of slope, bears N. and S. and 20 lks. N. of 3-strand barbed wire fence, bears E. and W.


From this cor. point, the SE 1/16 sec. cor. of sec. 32, bears N. 89°54' W., 9.33 chs. dist., hereinbefore described.

S. 2°52' E., on line 15-16.

4.18

Point for AP 16, sec. 32.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 15 ft. above base of slope, bears N. and SE, on a ledge 30 lks. wide.


Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
7.67	<p>S. 56°08' E., on line 16-17.</p> <p>Point for AP 17, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears SE and NW.</p> <hr style="width: 20%; margin: 10px auto;"/>
3.97	<p>S. 20°31' E., on line 17-18.</p> <p>Point for AP 18, sec. 32.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears ESE and NNW and 55 lks. N. of wash 27 lks. wide, 3 ft. deep, drains WNW.</p> <hr style="width: 20%; margin: 10px auto;"/>
2.80	<p>S. 76°23' E., on line 18-19.</p> <p>Point for AP 19, sec. 32, identical with AP 1, sec. 33, on the line bet. secs. 32 and 33.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

## BOOK 5487

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.

Cor. is located 5 ft. above base of slope, bears ESE and WNW; 20 lks. N. of wash 20 lks. wide, 1 1/2 ft. deep, drains WNW.

From this cor. point, the cor. of secs. 4, 5, 32 and 33, bears South, 7.22 chs. dist., hereinbefore described.


In sec. 33

---

S. 88°54' E., on line 1-2.

7.05 Point for AP 2, sec. 33.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.

Cor. is located on low ridge, bears ENE and WSW.



---

S. 0°39' W., on line 2-3.




7.10 Point for AP 3, sec. 33, identical with AP 1, sec. 4, T. 41 N., R. 6 W., on the S. bdy. of the Tp.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on S. slope of low ridge, bears NE and WSW.</p> <p>From this cor. point, the cor. of secs. 4, 5, 32 and 33, bears N. 89°53' W., 6.97 chs. dist., hereinbefore described.</p> <hr/> <p style="text-align: center;">In sec. 35</p> <hr/> <p>From AP 1, sec. 35, identical with AP 31, sec. 2, T. 41 N., R. 6 W., and with the witness cor. to the 1/4 sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp., hereinbefore described.</p> <p>N. 39°53' W., on line 1-2.</p> <p>6.89 Point for AP 2, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
<p>10.37</p>	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at the base of slope, bears SE and NW and 204 lks. W. of trail road, bears SE and NW.</p> <hr/> <p>N. 30°36' W., on line 2-3.</p> <p>10.37 Point for AP 3, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on gentle E. slope, 53 lks., S. of S. face of boulder 20 x 22 x 20 ft. high.</p> <hr style="width: 20%; margin: 10px auto;"/>
9.43	<p>N. 35°30' W., on line 3-4.</p> <p>Point for AP 4, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
11.07	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears SE and WNW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 34°37' W., on line 4-5.</p> <p>Point for AP 5, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears SE and NW.</p> <hr style="width: 20%; margin: 10px auto;"/>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona


CHAINS	
11.35	<p>N. 27°26' W., on line 5-6.</p> <p>Point for AP 6, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on gentle NNE slope, 50 lks., S. of wash 45 lks wide, 6 ft. deep, drains E.</p> <hr style="width: 20%; margin: 20px auto;"/>
3.81	<p>N. 70°28' W., on line 6-7.</p> <p>Point for AP 7, sec. 35.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 2 1/2 ins. stem, in a drill hole, cemented in place, in sandstone ledge, 20 lks. wide, with top mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 5/8 in. cylindrical magnet below stem.</p> <p>From this cor. point, the spring box for Cottonwood Spring No. 3, bears S. 8 1/2° W., 55 lks. dist.</p> <p>Cor. is located 11 lks. W. of E. edge of ledge, 20 lks. wide, bears N. and SSW, 60 ft. above base of cliff, 190 ft. high.</p> <hr style="width: 20%; margin: 20px auto;"/>
0.67	<p>N. 9°25' W., on line 7-8.</p> <p>Point for AP 8, sec. 35.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 2 1/2 ins. stem, in a drill hole, cemented in place, with top mkd.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
0.65	<div style="text-align: center; margin-bottom: 10px;"> </div> <p>Deposit a magnet in a 1 x 1 x 5/8 in. cylindrical magnet below stem.</p> <p>From this cor. point, the spring box for Cottonwood Spring No. 3, bears S. 60° W., 22 lks. dist.</p> <p>Cor. is located 3 1/2 ft. above top of sandstone ledge, 20 lks. wide, 60 ft. above base of cliff, 190 ft. high, on a vertical rock face, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 48°14' E., on line 8-9.</p> <p>Point for AP 9, sec. 35.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 2 1/2 ins. stem, in a drill hole, cemented in place, on a sandstone ledge, 22 lks. wide, with top mkd.</p> <div style="text-align: center; margin-top: 10px;"> </div> <p>Deposit a magnet in a 1 x 1 x 5/8 in. cylindrical magnet below stem.</p> <p>From this cor. point, the spring box for Cottonwood Spring No. 3, bears S. 28 1/2° E., 22 lks. dist.</p> <p>Cor. is located 6 lks. S. of S. edge of sandstone ledge, 22 lks. wide, 60 ft. above base of cliff, 190 ft. high, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 87°42' E., on line 9-10.</p> <p>Point for AP 10, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS



1993

Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case  
beneath the stainless steel post.


Cor. is located 50 lks. W. of wash, 15 lks. wide, 2 ft. deep,  
drains S.

---

S. 62°59' E., on line 10-11.

3.23 Point for AP 11, sec. 35.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
26 ins. in the ground, with brass cap mkd.



35  
1993

Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case  
beneath the stainless steel post.

Cor. is located at base of slope, bears NE and NW.

---

N. 79°09' E., on line 11-12.

2.09 Point for AP 12, sec. 35.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,  
26 ins. in the ground, with brass cap mkd.



1993

Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case  
beneath the stainless steel post.

Cor. is located at base of slope, bears NNE and WSW.

---

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
7.15	<p>N. 22°28' E., on line 12-13.</p> <p>Point for AP 13, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="844 514 1006 682" style="text-align: center;"> <p>T42N R6W AP 13 CPWA S35 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on steep E. slope, 7 lks. N. of 4-strand barbed wire fence, bears E. and W.</p> <hr style="width: 20%; margin: 10px auto;"/>
6.49	<p>N. 43°47' E., on line 13-14.</p> <p>Point for AP 14, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="844 1144 1006 1312" style="text-align: center;"> <p>T42N R6W AP 14 CPWA S35 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NE and WNW, 110 lks. W. of trail road, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/>
1.93	<p>N. 34°37' E., on line 14-15.</p> <p>Point for AP 15, sec. 35, on the Az.-Ut. State Boundary.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.</p>




Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>T43N R9 1/2W S 31 UTAH</p> <hr style="width: 50%; margin: auto;"/> <p>AR / IZ AP 15 / CPWA S35 T42N R6W 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears N. and S., 20 lks. W. of center of stream, 10 lks. wide, 1 ft. deep, drains S.</p> <p>From this cor. point, State Line Spring, bears N. 14 1/2° W., 123 lks. dist.</p> <p>From this same cor. point, the 1/4 sec. cor. of sec. 35 only, T. 42 N., R. 6 W., bears S. 89°47' W., 2.29 chs. dist., hereinbefore described.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From the point for AP 16, sec. 35, on the Az.-Ut. State Boundary.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.</p>
	<p>T43N R9 1/2W S 31 UTAH</p> <hr style="width: 50%; margin: auto;"/> <p>AR   IZ AP 16 S35 CPWA T42N R6W 1993</p>
	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 5 lks. S. of large boulder 20 x 15 x 6 ft. high and 25 lks. E. of center of stream, 10 lks. wide, 1 ft. deep, drains S.</p> <p>From this cor. point, State Line Spring, bears N. 37 1/2° W., 150 lks. dist.</p>



BOOK 5487  
Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.83	<p>From this same cor. point, the 63 mile cor. on the Az.-Ut. State Boundary, bears N. 89°47' E., 20.89 chs. dist., hereinbefore described.</p> <p>S. 0°50' W., on line 16-17.</p> <p>Point for AP 17, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T42N R6W S35 ——— AP 17                   CPWA                   1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears N. and SW, 25 lks. W. of center of stream, 10 lks. wide, 1 ft. deep, drains S and 50 lks. E. of trail road, N. and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 45°51' W., on line 17-18.</p> <p>Point for AP 18, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T42N R6W S35 ——— AP 18                   CPWA                   1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NE and S., 40 lks. E. of trail road, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 8°27' W., on line 18-19.</p> <p>Point for AP 19, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
4.10	
12.41	

Metes-and-Bounds Survey of the  
 Cottonwood Point Wilderness Area Boundary,  
 T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears N and SSW; 1 ch. E. of wash, 1 ch. wide, 2 ft. deep, drains SSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 17°58' W., on line 19-20.</p> <p>2.67 Point for AP 20, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NNE and SSE., 160 lks. E. of wash, 1 ch. wide, 2 ft. deep, drains SSE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 6°30' E., on line 20-21.</p> <p>4.12 Point for AP 21, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.</p>
	<div style="text-align: center;">  </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.85	<p>Cor. is located at base of slope, bears N and SSE, 150 lks. E. of wash, 195 lks. wide, 2 ft. deep, drains SSE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 44°50' E., on line 21-22.</p> <p>Point for AP 22, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">  <p>T42N R6W CPWA S35 AP 22 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears SSE and NW, 150 lks. E. wash, 195 lks. wide, 2 ft. deep, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 32°25' E., on line 22-23.</p>
4.73	<p>Point for AP 23, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;">  <p>T42N R6W CPWA S35 AP 23 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears SSE and NW, 170 lks. E. of wash, 200 lks. wide, 2 ft. deep, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 33°28' E., on line 23-24.</p>
5.46	<p>Point for AP 24, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="828 289 1031 451" data-label="Diagram"> </div> <p data-bbox="410 485 1356 548">Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="410 579 1430 642">Cor. is located at base of slope, bears SSE and NNW, 230 lks. E. of wash, 60 lks. wide, 2 ft. deep, drains SSE.</p> <hr data-bbox="730 667 1096 676"/> <p data-bbox="410 705 857 737">S. 42°30' E., on line 24-25.</p> <p data-bbox="269 772 808 804">6.24 Point for AP 25, sec. 35.</p> <p data-bbox="410 835 1352 898">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<div data-bbox="828 930 1031 1092" data-label="Diagram"> </div> <p data-bbox="410 1123 1356 1186">Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="410 1218 1450 1312">Cor. is located at base of slope, bears SE and NW, 160 lks. E. of trail road, bears SE and NW and 190 lks. N. of trail road, bears SE and NW.</p> <hr data-bbox="808 1337 1177 1346"/> <p data-bbox="410 1375 857 1407">S. 37°49' E., on line 25-26.</p> <p data-bbox="269 1442 808 1474">5.69 Point for AP 26, sec. 35.</p> <p data-bbox="410 1505 1352 1568">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p>
	<div data-bbox="779 1600 950 1785" data-label="Diagram"> </div> <p data-bbox="410 1816 1356 1879">Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p>


48  
BOOK 5487

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
4.73	<p>Cor. is located at base of slope, bears ENE and NW, 75 lks. NE. of intersection of two trail roads, bears ESE and W., and NW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°02' E., on line 26-27.</p> <p>Point for AP 27, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NE and WSW, 30 lks. N. of trail road, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 36°58' E., on line 27-28.</p> <p>Point for AP 28, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears N. and SSW, 35 lks. W. trail road, bears NNE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 10°16' E., on line 28-29.</p> <p>Point for AP 29, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
6.25	<p>Cor. is located at base of slope, bears NE and WSW, 30 lks. N. of trail road, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 36°58' E., on line 27-28.</p> <p>Point for AP 28, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears N. and SSW, 35 lks. W. trail road, bears NNE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 10°16' E., on line 28-29.</p> <p>Point for AP 29, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>
11.12	<p>Cor. is located at base of slope, bears NE and WSW, 30 lks. N. of trail road, bears NE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 36°58' E., on line 27-28.</p> <p>Point for AP 28, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears N. and SSW, 35 lks. W. trail road, bears NNE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 10°16' E., on line 28-29.</p> <p>Point for AP 29, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.


Cor. is located 9 ft. above base of slope, bears NNE and SSW, 70 lks. W. of trail road, bears NNE and SSW.

---

N. 12°11' E., on line 29-30.

11.19 Point for AP 30, sec. 35.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.


Cor. is located at base of slope, bears NE and SSW.

---

N. 31°37' E., on line 30-31.

5.85 Point for AP 31, sec. 35.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd.



Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.

Cor. is located at base of slope, bears SSW and NNW, 120 lks. W. wash 85 lks. wide, drains SW..

---

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
<p>3.92</p>	<p>S. 75°54' E., on line 31-32.</p> <p>Point for AP 32, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="743 520 971 676" style="text-align: center;"> <p>T42N R6W CPWA AP 32 S 35 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in the middle of Cottonwood Wash Valley, 2 chs. N. of wash, 75 lks. wide, 2 ft. deep, drains SE.</p> <hr style="width: 20%; margin: 10px auto;"/>
<p>4.17</p>	<p>S. 51°27' E., on line 32-33.</p> <p>Point for AP 33, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="763 1155 974 1310" style="text-align: center;"> <p>T42N R6W CPWA AP 33 S35 1993</p> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 2 chs. W. of base of slope, bears NNE and SSW.</p> <hr style="width: 20%; margin: 10px auto;"/>
<p>11.54</p>	<p>S. 13°33' W., on line 33-34.</p> <p>Point for AP 34, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="763 1759 974 1915" style="text-align: center;"> <p>T42N R6W CPWA AP 34 S35 1993</p> </div>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
5.11	<p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NNE and SSW, 20 lks. S. of wash 6 lks. wide, 3 ft. deep, drains SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 33°43' W., on line 34-35.</p> <p>Point for AP 35, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NNE and SSW; 80 lks. E. of wash 190 lks. wide, 2 ft. deep, drains SSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 5°28' W., on line 35-36.</p>
12.32	<p>Point for AP 36, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> </div> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at base of slope, bears NNE and SSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 15°51' W., on line 36-37.</p>
4.63	<p>Point for AP 37, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the  
 Cottonwood Point Wilderness Area Boundary,  
 T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
	<div data-bbox="763 294 974 451" data-label="Diagram"> </div> <p data-bbox="406 451 1356 514">Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="406 546 1453 609">Cor. is located at base of slope, bears SE and NNW, 25 lks. N. of trail road, bears SE and NW.</p> <hr data-bbox="633 640 1063 646"/> <p data-bbox="406 672 860 703">S. 53°41' E., on line 37-38.</p>
2.02	<p data-bbox="406 735 812 766">Point for AP 38, sec. 35.</p> <p data-bbox="406 798 1356 861">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="779 903 917 1081" data-label="Diagram"> </div> <p data-bbox="406 1123 1356 1186">Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="406 1218 1453 1281">Cor. is located at base of slope, bears NE and NNW, 35 lks. N. of trail road, bears ESE and WNW.</p> <hr data-bbox="633 1312 1063 1318"/> <p data-bbox="406 1344 860 1375">N. 50°24' E., on line 38-39.</p>
4.55	<p data-bbox="406 1407 812 1438">Point for AP 39, sec. 35.</p> <p data-bbox="406 1470 1356 1533">Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="779 1564 933 1753" data-label="Diagram"> </div> <p data-bbox="406 1785 1356 1848">Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the  
Cottonwood Point Wilderness Area Boundary,  
T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS	
1.76	<p>Cor. is located 30 lks. E. of cliff, 35 ft. high, bears NNE and SSW and 127 lks. W. of wash, 6 lks. wide, 1 ft. deep, drains S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 62°36' E., on line 39-40.</p> <p>Point for AP 40, sec. 35.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T42N R6W CPWA</p> <p style="text-align: center;">S35 AP 40</p> <p style="text-align: center;">1993</p> <p>Deposit a magnet in a 1 x 1 x 1 7/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 50 lks. E. of cliff, 35 ft. high, bears NE and S and 65 lks. W. of wash, 6 lks. wide, 1 ft. deep, drains S.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 8°27' W., on line 40-41.</p>
7.37	<p>AP 41, sec. 35, identical with AP 32, sec.2, T. 41 N., R. 6 W., on the S. bdy. of the Tp., hereinbefore described.</p> <hr style="width: 80%; margin: 10px auto;"/> <p style="text-align: center;">Description of the Cottonwood Point Wilderness Area Boundary, T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona</p> <hr style="width: 80%; margin: 10px auto;"/> <p>The following description is for informational purposes only.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>Beginning at the 64 mile cor. on the Az.-Ut. State Boundary.</p> <p>thence N. 89°41' W., on the Az.-Ut. State Boundary, 81.23 chs. dist. to the 63 mile cor.;</p> <p>thence S. 89°47' W., on the Az.-Ut. State Boundary, 20.89 chs. dist. to Angle Point 16, sec. 35.</p> <hr style="width: 80%; margin: 10px auto;"/> <p>From Angle Point 15, sec. 35, on the Az.-Ut. State Boundary.</p> <p>thence S. 89°47' W., on the Az.-Ut. State Boundary, 58.11 chs. dist. to the 62 mile cor.;</p>

T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS

thence S. 89°53' W., on the Az.-Ut. State Boundary, 80.33 chs. dist. to the 61 mile cor.;

thence S. 89°53' W., on the Az.-Ut. State Boundary, 80.31 chs. dist. to the 60.19 mile cor., identical with Angle Point 1, sec. 32;

thence S. 29°53' W., 3.20 chs. dist. to Angle Point 2, sec. 32;

thence N. 85°16' W., 3.21 chs. dist. to Angle Point 3, sec. 32;

thence S. 15°20' W., 6.95 chs. dist. to Angle Point 4, sec. 32;

thence S. 32°31' E., 5.28 chs. dist. to Angle Point 5, sec. 32, identical with the center E 1/16 sec. cor. of sec. 32;

thence S. 24°18' E., 3.55 chs. dist. to Angle Point 6, sec. 32;

thence S. 34°48' E., 2.91 chs. dist. to Angle Point 7, sec. 32;

thence S. 64°38' W., 3.45 chs. dist. to Angle Point 8, sec. 32, on the N. and S. center line of the SE 1/4 of sec. 32;

thence S. 40°25' W., 3.85 chs. dist. to Angle Point 9, sec. 32. identical with the 1/1024 sec. cor. of sec. 32;

thence S. 68°36' W., 2.68 chs. dist. to Angle Point 10, sec. 32, on the N. and S. center line of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32;

thence S. 0°03' E., on the N. and S. center line of the SE 1/4 of the NW 1/4 of the SE 1/4 of sec. 32, 2.98 chs. dist. to Angle Point 11, sec. 32;

thence N. 81°16' E., 5.06 chs. dist. to Angle Point 12, sec. 32, on the N. and S. center line of the SE 1/4 of sec. 32;

thence N. 75°11' E., 3.50 chs. dist. to Angle Point 13, sec. 32;

thence N. 82°49' E., 5.02 chs. dist. to Angle Point 14, sec. 32;

thence S. 6°39' E., 8.40 chs. dist. to Angle Point 15, sec. 32, on the E. and W. center line of the SE 1/4 of sec. 32;

thence S. 2°52' E., 4.18 chs. dist. to Angle Point 16, sec. 32;

thence S. 56°08' E., 7.67 chs. dist. to Angle Point 17, sec. 32;

thence S. 20°31' E., 3.97 chs. dist. to Angle Point 18, sec. 32;

thence S. 76°23' E., 2.80 chs. dist. to Angle Point 19, sec. 32, identical with Angle Point 1, sec. 33, on the line bet. secs. 32 and 33;

thence S. 88°54' E., 7.05 chs. dist. to Angle Point 2, sec. 33;

thence S. 0°39' W., 7.10 chs. dist. to Angle Point 3, sec. 33, identical with Angle Point 1, sec. 4, T. 41 N., R. 6 W., on the S. bdy. of the Tp.

---

From Angle Point 1, sec. 35, identical with Angle Point 31, sec. 2, T. 41 N., R. 6 W., and the original witness cor. to the 1/4 sec. cor. of secs. 2 and 35, on the S. bdy. of the Tp.

thence N. 39°53' W., 6.89 chs. dist. to Angle Point 2, sec. 35;

thence N. 30°36' W., 10.37 chs. dist. to Angle Point 3, sec. 35;

thence N. 35°30' W., 9.43 chs. dist. to Angle Point 4, sec. 35;

thence N. 34°37' W., 11.07 chs. dist. to Angle Point 5, sec. 35;

thence N. 27°26' W., 11.35 chs. dist. to Angle Point 6, sec. 35;

thence N. 70°28' W., 3.81 chs. dist. to Angle Point 7, sec. 35;

thence N. 9°25' W., 0.67 chs. dist. to Angle Point 8, sec. 35;

## T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

## CHAINS

thence N. 48°14' E., 0.65 chs. dist. to Angle Point 9, sec. 35;  
 thence S. 87°42' E., 9.45 chs. dist. to Angle Point 10, sec. 35;  
 thence S. 62°59' E., 3.23 chs. dist. to Angle Point 11, sec. 35;  
 thence N. 79°09' E., 2.09 chs. dist. to Angle Point 12, sec. 35;  
 thence N. 22°28' E., 7.15 chs. dist. to Angle Point 13, sec. 35;  
 thence N. 43°47' E., 6.49 chs. dist. to Angle Point 14, sec. 35;  
 thence N. 34°37' E., 1.93 chs. dist. to Angle Point 15, sec. 35,  
 on the Az.-Ut. State Boundary.

From Angle Point 16, sec. 35, on the Az.-Ut. State Boundary.

thence S. 0°50' W., 1.83 chs. dist. to Angle Point 17, sec. 35;  
 thence S. 45°51' W., 4.10 chs. dist. to Angle Point 18, sec. 35;  
 thence S. 8°27' W., 12.41 chs. dist. to Angle Point 19, sec. 35;  
 thence S. 17°58' W., 2.67 chs. dist. to Angle Point 20, sec. 35;  
 thence S. 6°30' E., 4.12 chs. dist. to Angle Point 21, sec. 35;  
 thence S. 44°50' E., 4.85 chs. dist. to Angle Point 22, sec. 35;  
 thence S. 32°25' E., 4.73 chs. dist. to Angle Point 23, sec. 35;  
 thence S. 33°28' E., 5.46 chs. dist. to Angle Point 24, sec. 35;  
 thence S. 42°30' E., 6.24 chs. dist. to Angle Point 25, sec. 35;  
 thence S. 37°49' E., 5.69 chs. dist. to Angle Point 26, sec. 35;  
 thence N. 89°02' E., 4.73 chs. dist. to Angle Point 27, sec. 35;  
 thence N. 36°58' E., 6.25 chs. dist. to Angle Point 28, sec. 35;  
 thence N. 10°16' E., 11.12 chs. dist. to Angle Point 29, sec. 35;  
 thence N. 12°11' E., 11.19 chs. dist. to Angle Point 30, sec. 35;  
 thence N. 31°37' E., 5.85 chs. dist. to Angle Point 31, sec. 35;  
 thence S. 75°54' E., 3.92 chs. dist. to Angle Point 32, sec. 35;  
 thence S. 51°27' E., 4.17 chs. dist. to Angle Point 33, sec. 35;  
 thence S. 13°33' W., 11.54 chs. dist. to Angle Point 34, sec. 35;  
 thence S. 33°43' W., 5.11 chs. dist. to Angle Point 35, sec. 35;  
 thence S. 5°28' W., 12.32 chs. dist. to Angle Point 36, sec. 35;  
 thence S. 15°51' W., 4.63 chs. dist. to Angle Point 37, sec. 35;  
 thence S. 53°41' E., 2.02 chs. dist. to Angle Point 38, sec. 35;  
 thence N. 50°24' E., 4.55 chs. dist. to Angle Point 39, sec. 35;  
 thence S. 62°36' E., 1.76 chs. dist. to Angle Point 40, sec. 35;  
 thence S. 8°27' W., 7.37 chs. dist. to Angle Point 41, sec. 35,  
 identical with Angle Point 32, sec. 2, T. 41 N., R. 6 W, on  
 the S. bdy. of the Tp.

## GENERAL DESCRIPTION

The land encompassed in this survey is located along the Utah and Arizona State Boundary, 5 miles east of Colorado City, Arizona. Elevations range from 5000 to 6400 ft. above sea level.

The survey of the Cottonwood Point Wilderness Area Boundary, generally follows the base of the Vermillion Cliffs that project into Arizona from Utah, namely Cottonwood Point and Lyons Point.

T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona

CHAINS

At higher elevations the terrain is mountainous and rocky, interspersed with sandy washes. The cliffs are comprised of sedimentary rock formations typical of the geology of the Colorado Plateau. The lower elevations are broad sandy, valleys.

Vegetation at lower elevations consists of sagebrush and grasses, and pinon pine, and juniper. At higher elevations, there are ponderosa pine. Stands of cotton woods, and sparse maples thrive near natural springs.

Access is by way of Cane Beds Road and Rosy Canyon Road.

Ranching and farming are the principal commercial use in the area.

The mean magnetic declination is 13 1/2°.

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Kevin C. Berridge	Surveying Technician
Jeff A. Hill	Surveying Technician
Clinton T. Lancaster	Surveying Technician
Mark R. Searles	Surveying Technician
Steven R. Walton, Jr.	Surveying Aid

CERTIFICATE OF SURVEY

I, Belle A. Craig, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 15th day of July, 1993, I have dependently resurveyed the Arizona and Utah State Boundary (north boundary) from the 59 mile corner to the 64 mile corner, a portion of the south boundary and a portion of the subdivisional lines, subdivided section 32 and executed the metes-and-bounds survey of the Cottonwood Point Wilderness Area Boundary, in Fractional Township 42 North, Range 6 West, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Jan. 17, 1997  
(Date)

Belle A. Craig  
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Arizona State Office  
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of the Arizona and Utah State Boundary (north boundary) from the 58 mile corner to the 64 mile corner, a portion of the south boundary and a portion of the subdivisional lines, the subdivision of section 32 and the metes-and-bounds survey of the Cottonwood Point Wilderness Area Boundary, in Fractional Township 42 North, Range 6 West, Gila and Salt River Meridian, Arizona, executed by Belle A. Craig, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

April 29, 1997  
(Date)

Lonny A. Tollet  
(Acting Chief Cadastral Surveyor of Arizona)

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in Frac. T. 42 N., R. 6 W., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.~~

~~\_\_\_\_\_  
(Date)~~

~~\_\_\_\_\_  
(Acting Chief Cadastral Surveyor of Arizona)~~