

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES
OF THE
DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY,

A PORTION OF THE NORTH BOUNDARY,

AND A PORTION OF THE SUBDIVISIONAL LINES,

THE SUBDIVISION OF SECTIONS 8 AND 9

AND

THE METES-AND-BOUNDS SURVEY OF THE

DOS CABEZAS MOUNTAINS WILDERNESS AREA BOUNDARY,

IN TOWNSHIP 14 SOUTH, RANGE 28 EAST

Of the Gila and Salt River Meridian,
In the State of Arizona

EXECUTED BY

Clyde J. King

Cadastral Surveyor

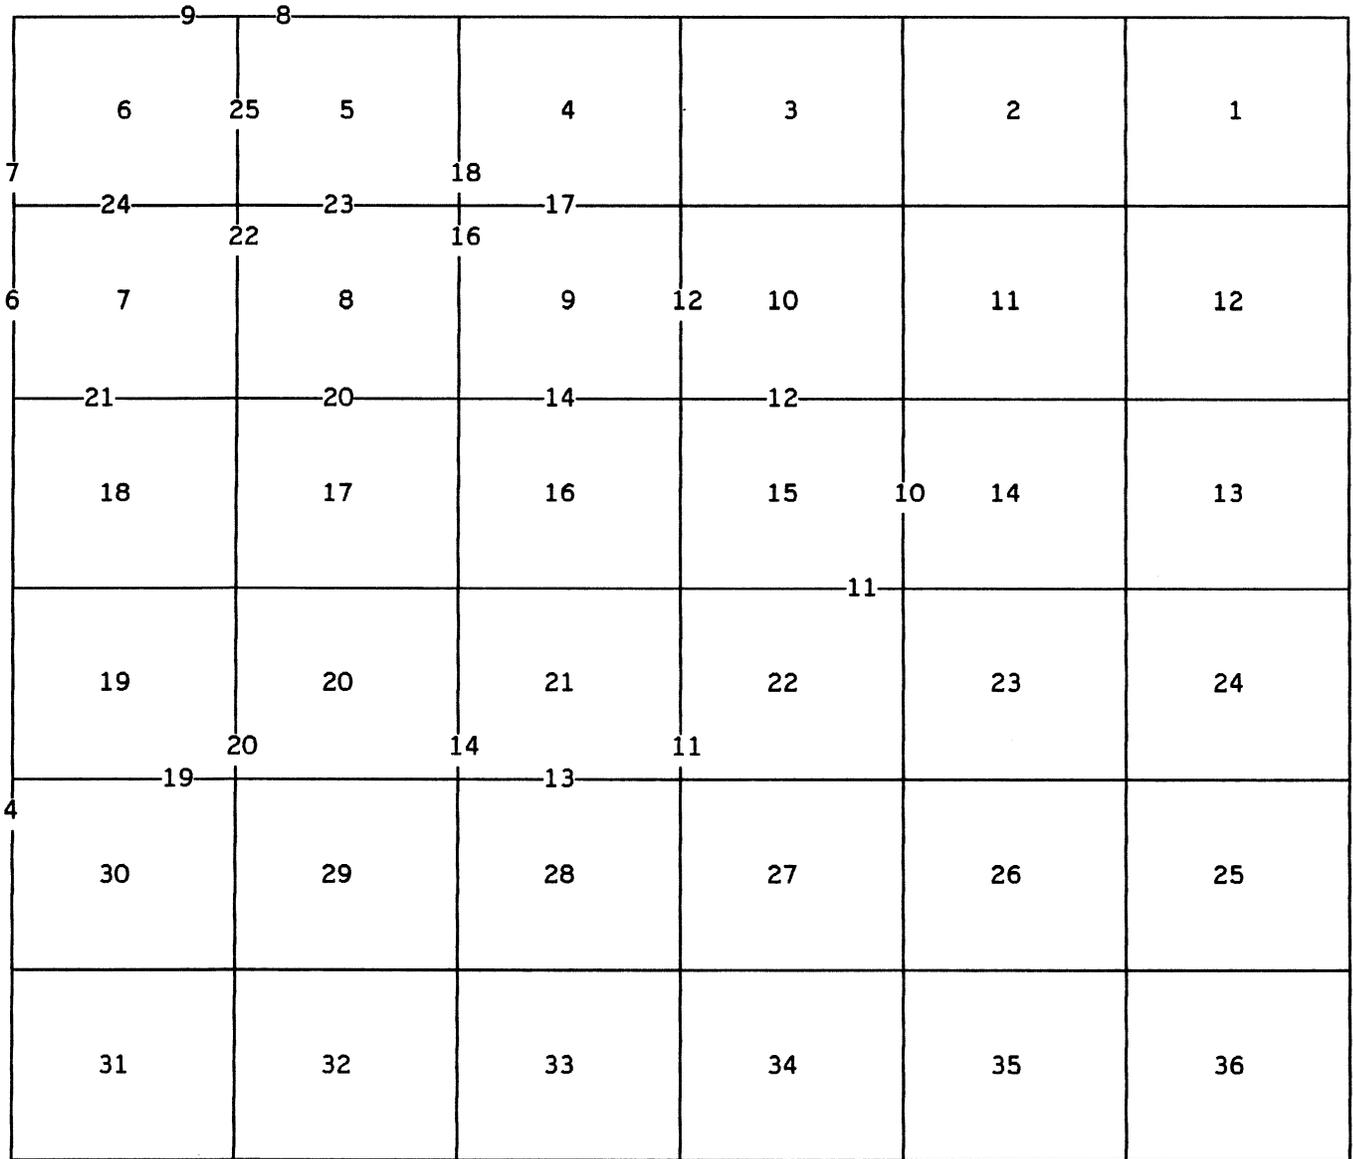
Under Special Instructions dated October 20, 1994, approved October 20, 1994, which provided for the surveys included under Group Number 781, and assignment instructions dated November 17, 1994.

Survey Commenced November 21, 1994

Survey Completed April 6, 1995

INDEX DIAGRAM

TOWNSHIP 14 SOUTH, RANGE 28 EAST,



Subdivision of sec. 8 pp. 26-27
 Subdivision of sec. 9 pp. 27-29
 M & B Survey of DCMWA pp. 29-43

T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

The following field notes describe the dependent resurvey of a portion of the west boundary, a portion of the north boundary, and a portion of the subdivisional lines, the subdivision of sections 8 and 9 and the metes-and-bounds survey of the Dos Cabezas Mountains Wilderness Area Boundary, in Township 14 South, Range 28 East, Gila and Salt River Meridian, Arizona.

The north boundary was surveyed by Theodore F. White in 1882. A portion of the west boundary was surveyed by Jesse B. Wright in 1907. The remaining portion of the west boundary was surveyed and a portion was resurveyed, the north boundary was resurveyed, and a portion of the subdivisional lines were surveyed by William B. Kimmel in 1914. The remaining subdivisional lines were surveyed by Benjamin J. Kinsey in 1939.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions dated October 20, 1994, for Group No. 781, Arizona.

Preliminary to the resurvey, the lines of the previous surveys were retraced and search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record. The retracement data were thoroughly verified and only the true line field notes are given herein.

The directions of all lines were determined by direct hour angle observations on the sun, and refer to the true meridian. Distances and angles were measured with a Sokkia SET 2BII total station instrument.

The geographic position of the cor. of secs. 14, 15, 22 and 23 was determined by the technique of static differential positioning using Ashtech models M-XII and MS-XII geodetic units. U.S. Coast and Geodetic Survey triangulation station "NINE 1945" was used as the control station.

Latitude 32°12'35.48" N. Longitude 109°27'56.46" W. NAD27

The mean magnetic declination, as taken from quadrangle map BOWIE MTN. NORTH, ARIZ., published in 1979 by U.S. Geological Survey, is 12 1/2° E.

Dependent Resurvey of a Portion of the West Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Restoring the resurvey executed by
William B. Kimmel in 1914

Beginning at the 1/4 sec. cor. of sec. 25 only, T. 14 S.,
R. 27 E., monumented with a slate stone, 19 x 7 x 3 ins., firmly
set, projecting 8 ins. above ground, mkd. 1/4 on the W. face.

At the cor. point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
22 ins. in the ground, encircled with a collar of stone, with
brass cap mkd.

T14S
R27E | R28E
1/4 S25 |
1995

from which

A forked juniper, 18 ins. diam. at base, bears S. 53° W.,
119 lks. dist., mkd. 1/4 S25 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case
beneath the stainless steel post.

Bury the original stone alongside the stainless steel post.

Cor. is located 200 lks. N. of a wash, drains SE.

From this cor. point, the closing cor. of secs. 30 and 31, bears
S. 0°13' W., 35.76 chs. dist., monumented with an iron pipe, 2
ins. diam., firmly set, projecting 14 ins. above ground, with
brass cap mkd. T14S S25 S36 S30 S31 R27E R28E 1914.

North, on the E. bdy. of sec. 25, T. 14 S., R. 27 E.

Over mountainous land through scattered juniper, oak, catclaw and
cacti.

4.22

Point for the 1/4 sec. cor. of sec. 30 only, on the W. bdy. of
the Tp., is at midpoint on the W. bdy. of sec. 30.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam.,
8 ins. in the ground, to bedrock, supported in a mound of stone,
3 ft. base, to top, with brass cap mkd.

Dependent Resurvey of a Portion of the West Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T14S R27E R28E 1/4 S30 1995</p> <p>from which</p> <p style="padding-left: 40px;">A forked juniper, 22 ins. diam. at base, bears S. 54 1/4° E., 119 lks. dist., mkd. 1/4 S30 BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a small ridge, bears NNE and SSW and 98 lks. W. of a wash, drains SSW.</p>
24.21	<p>Point for the N. 1/16 sec. cor. of sec. 30 only, on the W. bdy. of the Tp., is at midpoint bet. the closing cor. of secs. 19 and 30 and the 1/4 sec. cor. of sec. 30 only, on the W. bdy. of sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
40.09	<p style="text-align: center;">T14S R27E R28E N 1/16 S30 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Point was occupied by a rebar, 1/2 in. diam., firmly set, projecting 12 ins. above ground, with plastic cap mkd. LS 9086. Deposit the rebar inside the stainless steel post.</p> <p>The cor. of secs. 24 and 25 only, T. 14 S., R. 27 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap. mkd. T14S S19 S30 S24 S25 R27E R28E 1914, from which the remaining 1914 bearing tree</p> <p style="padding-left: 40px;">An oak, 17 ins. diam., bears N. 71° W., 14 lks. dist., with illegible marks on a partially healed blaze.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on a steep SW slope.</p>

Dependent Resurvey of a Portion of the West Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>From this cor. point, the closing cor. of secs 19 and 30, bears North, 4.11 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. T14S S19 S30 CC S24 S25 R27E R28E 1914, from which the remaining original bearing tree</p> <p style="padding-left: 40px;">An oak, 14 ins. diam., bears N. 28 3/4° E., 165 lks. dist., with healed blaze.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on steep SW slope.</p>
	<hr/> <p>Restoring the survey executed by William B. Kimmel in 1914</p> <hr/>
	<p>From the cor. of secs. 12 and 13 only, T. 14 S., R. 27 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 1 in. above ground, with brass cap. mkd. T14S S7 S18 S12 S13 R27E R28E 1914.</p> <p>Add the marks 1995 to the brass cap.</p> <p>North, on the E. bdy. of sec. 12, T. 14 S., R. 27 E.</p> <p>Over mountainous land through scattered mesquite, juniper, and catclaw.</p>
3.40	<p>The closing cor. of secs. 7 and 18, hereinafter described.</p> <p>Thence on the Dos Cabezas Mountains Wilderness Area Bdy.</p>
40.00	<p>The 1/4 sec. cor. of sec. 12 only, T. 14 S., R. 27 E., monumented with an iron post, 1 in. diam., firmly set, projecting 25 ins. above ground, supported in a mound of stone, 3 ft. base, to top, with brass cap. mkd. 1/4 S12 S7 1914.</p> <p>Add the marks T14S R27E R28E 1994 to the brass cap and remove the marks S7.</p>
	<hr/> <p>N. 0°11' E., beginning new measurement.</p> <p>Over mountainous land through scattered catclaw, juniper, and cacti.</p>
3.405	<p>Point for the 1/4 sec. cor. of sec. 7 only, hereinafter described.</p>

Dependent Resurvey of a Portion of the West Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.02	<p>The cor. of secs. 1 and 12 only, T. 14 S., R. 27 E., monumented with an iron post, 3 ins. diam., firmly set, projecting 16 ins. above ground, in a mound of stone, 4 ft. base, to top, with a mound of stone, 3 ft. base, 2 ft. high to the west, with brass cap. mkd. T14S S6 S7 S1 S12 R27E R28E 1914.</p> <p>Add the marks 1994 to the brass cap and remove the marks S6.</p> <p>Cor. is located on a steep S. slope and on the W. side of a ridge, bears N. and S.</p>
	<p>N. 0°06' W., on the E. bdy. of sec. 1, T 14 S., R. 27 E., on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>Over mountainous land through scattered catclaw, juniper and cacti.</p>
3.39	<p>The closing cor. of secs. 6 and 7, hereinafter described.</p> <p>Leave the Dos Cabezas Mountains Wilderness Area Bdy.</p>
40.02	<p>The 1/4 sec. cor. of sec. 1 only, T. 14 S., R. 27 E., determined at apparent transposed bearing and record dist. from the remaining original bearing tree</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears S. 58° E., 66 lks. dist., mkd. 1/4 S6 BT on an open blaze, facing NW. (Record: N. 58° E.)</p> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled in a collar of stone, with brass cap mkd.</p> <div style="text-align: center; padding: 10px 0;"> <p>T14S R27E R28E 1/4 S1 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>An iron post, 3 ft. long, 1 in. diam., with brass cap mkd. 1/4 S1 S6 1914, was lying loose on the ground nearby, bury the iron pipe alongside the stainless steel post.</p>

Dependent Resurvey of a Portion of the West Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	Cor. is located 25 lks. S. of a draw, drains E.
	<p>Dependent Resurvey of a Portion of the North Boundary, T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona</p>
	<p>Restoring the resurvey executed by William B. Kimmel in 1914</p>
	<p>From the 1/4 sec. cor. of sec. 32 only, T. 13 S., R. 28 E., determined by the original mound of stone, 4 ft. base, 2 ft. high.</p>
	At the cor. point
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>
	<p>T13S R28E 1/4 S32</p>
	<p>T14S R28E 1995</p>
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
	<p>Cor. is located 2 lks. N. of a barbed wire fence, 5 strand, bears E. and W.</p>
	S. 89°52' W., on the S. bdy. of sec. 32, T. 13 S., R. 28 E.
	Over rolling land through oak, sagebrush and cacti.
35.60	The closing cor. of secs. 5 and 6, hereinafter described.
	Thence on the Dos Cabezas Mountains Wilderness Area Bdy.
39.99	<p>The cor. of secs. 31 and 32 only, T. 13 S., R. 28 E., monumented by William E. Johnson, R.L.S. 13178, with a rebar, 1/2 in. diam., firmly set, projecting 6 ins. above the ground, in a mound of stone, 4 ft. base, to top, with aluminum tag mkd. LS 13178. This is accepted as the best available evidence of the position of the original corner.</p>
	At the cor. point

Dependent Resurvey of a Portion of the North Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R28E S31 S32</p> <hr style="width: 50px; margin: auto;"/> <p>S6 T14S R28E 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Deposit the rebar inside the stainless steel post.</p> <p>Cor. is located in a barbed wire fence, 5 strand, bears E. and W.</p> <p>Leave the Dos Cabezas Mountains Wilderness Area Bdy.</p>
39.67	<p>S. 89°59' W., on the S. bdy. of sec. 31, T. 13 S., R. 28 E.</p> <p>Over mountainous land through catclaw, scattered mesquite, and cacti.</p> <p>The 1/4 sec. cor. of sec. 31 only, T. 13 S., R. 28 E., determined by the original mound of stone, from which the remains of the original bearing tree</p> <div style="text-align: center;"> <p>A dead and down oak, bears N. 27 1/2° E., 238 lks. dist., no marks. (Record N. 29° E., 240 lks. dist.)</p> </div> <p>At the cor. point</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T13S R28E 1/4 S31</p> <hr style="width: 50px; margin: auto;"/> <p>T14S R28E 1995</p> </div> <p>from which</p> <div style="text-align: center;"> <p>An oak, 7 ins. diam., bears N. 45 1/2° E., 270 lks. dist., mkd. X BT.</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Dependent Resurvey of a Portion of the North Boundary,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	<p>Cor. is located on a ridge, bears ENE and WSW.</p> <hr/> <p>Dependent Resurvey of a Portion of the Subdivisional Lines, T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona</p> <hr/> <p>Restoring the surveys executed by William B. Kimmel in 1914 and Benjamin J. Kinsey in 1939.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23, monumented with an iron post, 2 ins. diam., firmly set, projecting 22 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone, 3 ft. base, 2 ft. high to the west, with brass cap. mkd. T14S R28E S15 S14 S22 S21 1914.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on a steep NW slope.</p> <p>N. 0°01' W., bet. secs. 14 and 15.</p> <p>Over rolling land through catclaw and cacti.</p> <p>20.09 Point for AP 3, sec. 15, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p> <p>Thence on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>39.97 The 1/4 sec. cor. of secs. 14 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 22 ins. above ground, in a mound of stone, 3 ft. base, 2 ft. high, with a mound of stone 3 ft. base, 2 ft. high to the west, with brass cap. mkd. 1/4 S15 S14 1914.</p> <p>Add the marks T14S R28E 1995 to the brass cap.</p> <p>Cor. is located on the W. side of a small Knob.</p> <hr/> <p>North, beginning new measurement.</p> <p>39.98 The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap. mkd. T14S R28E S10 S11 S15 S14 1914.</p> <p>Add the marks 1994 to the brass cap.</p>
--------	--

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on level ground, in a four strand barbed wire fence, bears N. and S. and 53 lks. N. of a fence cor., with fences extending N., S. and N. 64° W.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, supported in a mound of stone, 2 ft. base, to top, with brass cap. mkd. T14S R28E S21 S22 S27 S28 1914.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on a steep NW slope and 85 lks. E. of a wash draining NE.</p> <p>N. 0°01' W., bet. secs. 21 and 22.</p> <p>Over mountainous land through scattered mesquite, catclaw and cacti.</p>
15.07	<p>Point for AP 1, sec. 22, identical with AP 6 sec. 21, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p>
40.08	<p>The 1/4 sec. cor. of secs. 21 and 22, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap. mkd. 1/4 S21 S22 1914.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located on a steep rocky SW slope and 250 lks. N. of a narrow canyon drains SSE.</p>
	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 89°57' W., bet. secs. 15 and 22.</p> <p>Over rolling land through catclaw, mesquite and cacti.</p>
11.245	<p>Point for AP 1, sec. 15, identical with AP 10, sec. 22, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p>
40.075	<p>The 1/4 sec. cor. of secs. 15 and 22, monumented with an iron post, 1 in. diam., firmly set, projecting 18 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap. mkd. 1/4 S15 S22 1914.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a rocky E. slope and 120 lks. N. of a wash draining SE.</p>
39.98	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 89°48' W., bet. secs. 10 and 15, on the Dos Cabezas Wilderness Area Bdy.</p> <p>Over rolling land through catclaw and cacti.</p> <p>The 1/4 sec. cor. of secs. 10 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap. mkd. 1/4 S10 S15 1914.</p> <p>Add the marks T14SR28E 1994 to the brass cap.</p> <p>Cor. is located on level ground.</p> <hr/> <p>S. 89°48' W., beginning new measurement.</p>
40.06	<p>The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 ins. diam., firmly set, projecting 24 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap. mkd. T14S R28E S9 S10 S16 S15 1914.</p> <p>from which</p> <p style="padding-left: 40px;">A rock outcrop, 50 x 30 x 10 ft. high, bears S. 38 1/2° W., 60 lks. dist., with X B0 chiseled on the S. face.</p> <p>Add the marks 1994 to the brass cap.</p> <p>Cor. is located on a rocky E. slope and 120 lks. N. of a wash draining SE.</p>
39.94	<p>North, bet. secs. 9 and 10.</p> <p>Over rolling land through catclaw and scattered mesquite.</p> <p>The 1/4 sec. cor. of secs. 9 and 10, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, to the W., with brass cap. mkd. 1/4 S9 S10 1914.</p> <p>Add the marks T14SR28E 1994 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located 2 lks. S. of a wire fence, 3 strand with mesh on bottom, bears ENE and WSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0°05' E., beginning new measurement.</p>
20.05	<p>Point for the N. 1/16 sec. cor. of secs. 9 and 10.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14SR28E N 1/16 S9 S10 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a gentle N. slope at the foot of a steep ascent.</p>
40.10	<p>The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2 ins. diam., firmly set, 14 ins. below ground, with brass cap. mkd. T14SR28E S4 S3 S9 S10 1914, from which the remaining original bearing tree</p> <p style="padding-left: 40px;">A catclaw, 14 ins. diam., bears N. 81 3/4° E., 64 lks. dist., with illegible marks on an open rotted blaze.</p> <p>Add the marks 1994 to the brass cap.</p> <p>Set a steel fence post alongside the iron pipe.</p> <p>Cor. is located 20 lks. E. of a barbed wire fence, 4 strand, bears N. and S.</p>
39.58	<hr/> <p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 89°36' W., bet. secs. 21 and 28.</p> <p>Over steep, mountainous land through catclaw, scattered mesquite and juniper.</p> <p>The 1/4 sec. cor. of secs. 21 and 28, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, with brass cap. mkd. 1/4 S21 S28 1914, from which the remaining original bearing tree</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A juniper, 44 ins. diam., bears S. 29° W., 34 lks. dist., mkd. 1/4 S28 BT. (Record: 39 lks. dist.)</p> <p>Cor. is located on a steep ridge, bears ENE and WSW.</p> <hr/> <p>N. 89°34' W., beginning new measurement.</p>
40.02	<p>The cor. of secs. 20, 21, 28 and 29, monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, supported in a mound of stone, 4 ft. base, to top, with a mound of stone, 4 ft. base, 2 ft. high, to the N., with brass cap. mkd. T14S R28E S20 S21 S29 S28 1914.</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on a flat boulder outcrop.</p>
	<p>N. 0°08' W., bet. secs. 20 and 21.</p> <p>Over mountainous land through oak, scattered juniper and cacti.</p>
5.22	<p>Point for AP 1, sec. 21, identical with AP 4, sec. 20, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p>
39.88	<p>The 1/4 sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above ground, encircled with a collar of stone, with brass cap. mkd. 1/4 S20 S21 1914, from which the original bearing trees</p> <p>A dead and down oak, bears S. 11° E., 106 lks. dist., mkd. 1/4 S12 BT on an open blaze. (Record: 110 lks. dist.)</p> <p>An oak, 18 ins. diam., bears S. 9° W., 101 lks. dist., with healed blaze.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>from which a new bearing tree</p> <p>A juniper, 12 ins. diam., bears N. 76 1/4° E., 68 lks. dist., mkd. 1/4 S21 BT.</p> <p>Cor. is located on a grassy NE slope.</p>
	<p>From the cor. of secs. 9, 10, 15 and 16.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.96	<p>N. 89°58' W., bet. secs. 9 and 16, on the Dos Cabezas Wilderness Area Bdy.</p> <p>Over steep, rocky, mountainous land, through scattered oak, juniper and cacti.</p> <p>True point for the E. 1/16 sec. cor. of secs. 9 and 10, falls on the face of a rock wall.</p> <p>From this point, the point selected for a witness cor. to the E. 1/16 sec. cor. of secs. 9 and 10, bears N. 17°17' E., 0.42 chs. dist.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem., in a drill hole, cemented in place, in a rock outcrop, 60 x 50 x 40 ft., with cap mkd.</p> <div style="text-align: center;"> <p>WC T14S R28E S9 E 1/16 — S16 ↓ 1995</p> </div> <p>Leave the Dos Cabezas Mountains Wilderness Area Bdy.</p>
39.72	<p>The witness cor. to the 1/4 sec. cor. of secs. 9 and 16, monumented with an iron post, 1 in. diam., firmly set, projecting 22 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap. mkd. WC 1/4 S9 S16 1914, from which the original bearing trees</p> <p style="padding-left: 40px;">A dead and decaying oak, 9 ins. diam., bears N. 87° E., 26 lks. dist., mkd. BT on partially healed blaze.</p> <p style="padding-left: 40px;">An uprooted and displaced juniper, 20 ins. diam., bears S. 62° E., 83 lks. dist., mkd. S16 BT, on open blaze. (Record: S. 55 1/4° W., 68 lks. dist.)</p> <p>Add the marks T14SR28E 1994 to the brass cap.</p> <p>Cor. is located on steep N. slope.</p> <hr style="width: 20%; margin: 10px auto;"/>
0.20	<p>N. 89°56' W., beginning new measurement.</p> <p>True point for the 1/4 sec. of secs. 9 and 10, at proportionate dist., falls on a large rock outcrop.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.92	<p>The cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, with brass cap. mkd. T14S R28E S8 S9 S17 S16 1914, from which the remaining original bearing trees</p> <p style="padding-left: 40px;">An oak stump, bears N. 70° E., 2 lks. dist., no marks.</p> <p style="padding-left: 40px;">An oak, 14 ins. diam., bears S. 46° E., 22 lks. dist., with healed blaze.</p> <p style="padding-left: 40px;">An oak stump, bears S. 48° W., 24 lks. dist. no marks.</p> <p>Add the marks 1995 to the brass cap.</p> <p>from which new bearing trees</p> <p style="padding-left: 40px;">An oak, 11 ins. diam., bears S. 7 1/2° W., 10 lks. dist., mkd. T14SR28E S17 BT.</p> <p style="padding-left: 40px;">A forked juniper, 8 ins. diam., bears N. 9 1/2° W., 65 lks. dist., mkd. X BT.</p> <p>Cor. is located on step rocky NE slope.</p>
	<p>From the 1/4 sec. cor. of secs. 8 and 9, monumented with an iron post, 1 in. diam., firmly set, projecting 25 ins. above ground, in a mound of stone, 3 ft. base, to top, with brass cap. mkd. 1/4 S8 S9 1914, from which the remaining bearing tree</p> <p style="padding-left: 40px;">An oak, 18 ins. diam., bears S. 75° E., 79 lks. dist., with rotted out blaze. (Record: S. 79° E., 77 lks. dist.)</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located on a small plateau, overlooking a steep N. slope.</p> <p>N. 0°03' E., bet. secs. 8 and 9.</p> <p>Over steep, rocky, mountainous land through scattered catclaw and cacti.</p>
36.91	<p>Point for a witness point, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p>
40.13	<p>The cor. of secs. 4, 5, 8 and 9, monumented by person(s) unknown, with a rebar, 1/2 in. diam., firmly set, flush with the ground. This is accepted as the best available evidence of the original cor. position.</p> <p>At the cor. point</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS									
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr><td>T14S</td><td>R28E</td></tr> <tr><td>S5</td><td>S4</td></tr> <tr><td>S8</td><td>S9</td></tr> <tr><td colspan="2">1995</td></tr> </table> </div> <p>from which</p> <p style="padding-left: 40px;">A catclaw, 6 ins. diam., bears S. 8 3/4° W., 142 lks. dist., mkd. X BT.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 45 lks. N. of a trail road, 15 lks. wide, bears E. and W. and 23 lks. W. of a fence cor., fences extending E. and NNW.</p>	T14S	R28E	S5	S4	S8	S9	1995	
T14S	R28E								
S5	S4								
S8	S9								
1995									
	<p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>N. 89°57' W., bet. secs. 4 and 9.</p> <p>Over nearly level land, through catclaw, mesquite and cacti.</p>								
19.92	<p>The E. 1/16 sec. cor. of secs. 4 and 9, determined by William E. Johnson, in 1992, monumented with a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with aluminum cap. mkd. 1/16 LS 13178. This is accepted as a careful and faithful determination of the cor. position.</p>								
	<p style="text-align: center;">_____</p> <p>N. 89°57' W., beginning new measurement.</p>								
19.92	<p>The 1/4 sec. cor. of secs. 4 and 9, reestablished by William E. Johnson, in 1992, monumented with a rebar, 1/2 in. diam., firmly set, flush with the ground. This is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>from which</p> <p style="padding-left: 40px;">A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears N. 49°46' E., 30.8 ft. dist., with brass cap mkd. T14S R28E RM S4 1/4 30.8 FT TO COR 1995, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>								

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 66°04' W., 49.4 ft. dist., with brass cap mkd. T14S R28E RM S4 1/4 49.4 FT TO COR 1995, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in a graded gravel road, 30 lks. wide, bears E. and W.</p> <hr/> <p>N. 89°57' W., beginning new measurement.</p>
19.92	<p>Point for the W 1/16 sec. cor. of secs. 4 and 9.</p> <p>Set a spike, 12 ins. long, 12 ins. below the surface of the road.</p> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 57°40' E., 57.7 ft. dist., with brass cap mkd. T14S R28E RM W1/16 S4 57.7 FT TO COR 1995, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 25 ins. in the ground, for a reference monument, bears N. 45°24' W., 41.1 ft. dist., with brass cap mkd. T14S R28E RM W1/16 S4 41.1 FT TO COR 1995, and an arrow pointing to the cor. Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in a graded gravel road, 30 lks. wide, bears E. and W.</p>
39.84	<p>The cor. of secs. 4, 5, 8 and 9.</p> <hr/> <p>N. 0°07' W., bet. secs. 4 and 5.</p> <p>Over gently rolling land, in catclaw, scattered mesquite and cacti.</p>
19.98	<p>Point for the S 1/16 sec. cor. of secs. 4 and 5.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.96	<p style="text-align: center;">T14S R28E S 1/16 S5 S4 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 30 lks. W. of a barbed wire fence, 4 strand, bears N. and S.</p> <p>The 1/4 sec. cor. of secs. 4 and 5, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, encircled with a collar of stone, with brass cap. mkd. 1/4 S5 S4 1914.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located 34 lks. W. of a barbed wire fence, 4 strand, bears N. and S.</p>
40.20	<hr/> <p>From the cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap. mkd. T14S R28E S19 S20 S30 S29 1914, from which the remains of the original bearing trees</p> <p style="padding-left: 40px;">An oak, 24 ins. diam., bears N. 56° E., 36 lks. dist., with healed blaze.</p> <p style="padding-left: 40px;">A root hole, bears S. 68 1/2° E., 149 lks. dist..</p> <p style="padding-left: 40px;">A rotted oak, bears S. 29 1/2° W., 53 lks. dist., mkd. T14SR28E S30 BT on rotted blaze.</p> <p style="padding-left: 40px;">A root hole, bears N. 72° W., 32 lks. dist..</p> <p>Add the marks 1995 to the brass cap.</p> <p>Cor. is located on a steep NW slope.</p> <p>N. 89°57' W., bet. secs. 19 and 30.</p> <p>Over steep, mountainous land through scattered oak, juniper and cacti.</p> <p>The 1/4 sec. cor. of secs. 19 and 30, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap. mkd. 1/4 S19 S30 1914, from which the remaining original bearing tree</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>An alligator juniper, 30 ins. diam., bears N. 54° W., 23 lks. dist., mkd. 1/4 S19 BT.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located on steep NE slope.</p>
	<p>From the cor. of secs. 19, 20, 29 and 30.</p> <p>N. 0°10' E., bet. secs. 19 and 20.</p> <p>Over steep, mountainous land through scattered oak, juniper and cacti.</p>
35.15	<p>Point for AP 1, sec. 20, identical with AP 4, sec. 19, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p>
39.91	<p>The 1/4 sec. cor. of secs. 19 and 20, monumented with an iron post, 1 in. diam., firmly set, projecting 20 ins. above ground, with brass cap. mkd. 1/4 S19 S20 1939, from which the original bearing trees</p> <p>An oak, 13 ins. diam., bears N. 70° E., 32 lks. dist., with healed blaze.</p> <p>A pine, 22 ins. diam., bears S. 73° W., 50 lks. dist., mkd. with illegible scribe marks through partially healed blaze. (Record: juniper, 58 lks. dist.)</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located on a very steep NW slope.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>N. 89°50' W., bet. secs. 8 and 17.</p> <p>Over rocky mountainous land through scattered juniper and cacti.</p>
38.98	<p>True point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate dist.; falls on a rock outcrop.</p>
39.52	<p>Thence on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>The witness cor. to the 1/4 sec. cor. of secs. 8 and 17, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above ground, with brass cap. mkd. WC 1/4 S8 S17 1914, from which the remaining original bearing tree</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>A juniper, 14 ins. diam., bears S. 84 3/4° W., 101 lks. dist., with healed blaze.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <hr/> <p>S. 89°57' W., beginning new measurement.</p>
40.04	<p>From this point, the closing cor. of secs 17 and 18, bears North, 0.02 chs. dist., monumented with an iron post, 2 ins. diam., firmly set, projecting 30 ins. above ground, in a mound of stone, 4 ft. base, 3 ft. high, with brass cap mkd. T14SR28E S8 S18 S17 CC 1939.</p> <p>Add the marks 1995 to the brass cap and remove the marks S8 from the brass cap.</p>
40.60	<p>The cor. of secs. 7 and 8 only, monumented with an iron post, 2 ins. diam., firmly set, projecting 20 ins. above ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap. mkd. T14SR28E S7 S8 S18 1914, from which the original bearing tree</p> <p>A juniper, 17 ins. diam., bears N. 67 1/2° W., 117 lks. dist., mkd. 14SR28E S7BT on partially healed blaze. (Record: 113 lks. dist.)</p> <p>Add the marks 1995 to the brass cap remove the marks S18 from the brass cap.</p> <p>Cor. is located on a steep rocky E. slope.</p> <hr/> <p>S. 89°53' W., bet. secs. 7 and 18, on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>Over mountainous land through scattered oak and juniper.</p>
39.48	<p>The 1/4 sec. cor. of sec. 18 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. 1/4 S18 1940, from which the remaining original bearing tree</p> <p>An oak, 16 ins. diam., bears S. 39° E., 98 lks. dist., with healed blaze. (Record: 95 lks. dist.)</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.19	<p>The 1/4 sec. cor. of sec. 7 only, monumented with an iron post, 1 in. diam., firmly set, projecting 25 ins. above ground, in a mound of stone, 3 ft. base, 1 1/2 ft. high, with a mound of stone 3 ft. x 2 ft. to S., with brass cap. mkd. 1/4 S7 1914, from which the remaining original bearing tree</p> <p style="padding-left: 40px;">An oak, 11 ins. diam., bears S. 23 1/4° E., 224 lks. dist., with healed blaze. (Record: 226 lks. dist.)</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located alongside a fence cor., fences extending N., S. and WSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°58' W., beginning new measurement.</p>
38.38	<p>The closing cor. of secs. 7 and 18, on the E. bdy. of sec. 12, T. 14 S., R. 27 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 18 ins. above ground, in a mound of stone 3 ft. x 2 ft., with a mound of stone 3 ft. x 2 ft. to E., with brass cap. mkd. T14S S12 CC S7 S18 S13 R27E R28E 1914.</p> <p>Add the marks 1995 to the brass cap and remove the marks S13 from the brass cap.</p> <p>Cor. is located 15 lks. S. of a wash, drains WNW.</p> <p>From this cor. point, the cor. of secs. 12 and 13 only, T. 14 S., R. 27 E., bears South, 3.40 chs. dist., hereinbefore described.</p>
	<p>From the 1/4 sec. cor. of secs. 7 and 8, monumented with an iron post, 1 in. diam., firmly set, projecting 13 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, to W., with brass cap. mkd. 1/4 S7 S8 1914.</p> <p>Add the marks T14SR28E 1995 to the brass cap.</p> <p>Cor. is located 53 lks. W. of a cor. of fences, extending N. and E. and 38 lks. W. of a wash, drains N.</p> <p>N. 0°10' E., bet. secs. 7 and 8.</p> <p>Over steep, rocky mountainous land, through scattered mesquite, oak and cacti.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
20.00	<p>The N. 1/16 sec. cor. of secs. 7 and 8, determined by William E. Johnson, R. L. S. 13178, monumented with a rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with aluminum cap, mkd. N 1/16 S7 S8 LS13178. This is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>N. 0°10' E., beginning new measurement.</p>
20.00	<p>True point for the cor. of secs. 5, 6, 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor., falls in large wash.</p> <p>From this point, the point selected for a witness cor. to the cor. of secs. 5, 6, 7 and 8, bears S. 34°06' W., 0.53 ch. dist.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <div data-bbox="862 894 1057 1079" style="text-align: center;"> <pre> WC T14S R28E S6 S5 --- --- S7 S8 1995 </pre> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on an island above the wash.</p> <hr/> <p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>N. 89°58' W., bet. secs. 5 and 8.</p> <p>Over mountainous land through catclaw, mesquite and cacti.</p>
1.33	<p>Point for AP 1 on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.</p> <p>Thence on the Dos Cabezas Mountains Wilderness Area Bdy.</p>
39.91	<p>The 1/4 sec. cor. of secs. 5 and 8, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, encircled in a collar of stone, with a mound of stone, 3 ft. x 2 ft. to N., with brass cap. mkd. 1/4 S5 S8 1914.</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located on a steep E. slope.</p> <hr/> <p>S. 89°58' W., beginning new measurement.</p> <p>Leave the Dos Cabezas Mountains Wilderness Area Bdy.</p>
20.00	<p>The W. 1/16 sec. cor. of secs. 7 and 8, determined by William E. Johnson, R. L. S. 13178, monumented with a rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with aluminum cap, mkd. N 1/16 S5 S8 LS13178. This is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>S. 89°58' W., beginning new measurement.</p>
20.00	<p>The true point for the cor. of secs. 5, 6, 7 and 8.</p> <hr/>
	<p>S. 89°54' W., bet. secs. 6 and 7, on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>Over rolling to mountainous land through catclaw and scattered juniper.</p>
20.015	<p>The E. 1/16 sec. cor. of secs. 6 and 7, determined by William E. Johnson, R. L. S. 13178, monumented with a rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with aluminum cap, mkd. E 1/16 S6 S7 LS13178. This is accepted as a careful and faithful determination of the cor. position.</p> <hr/> <p>S. 89°54' W., beginning new measurement.</p>
20.015	<p>The 1/4 sec. cor. of secs. 6 and 7, monumented with an iron post, 1 in. diam., firmly set, projecting 25 ins. above ground, in a mound of stone, 4 x 3 ft., with brass cap. mkd. 1/4 S6 S7 1914.</p> <p>Add the marks T14SR28E 1994 to the brass cap.</p> <p>Cor. is located on a steep SE slope and 3 lks. W. of a barbed wire fence, 4 strand, bears N. and S.</p> <hr/> <p>N. 89°59' W., beginning a new measurement.</p>
38.59	<p>The closing cor. of secs. 6 and 7, on the E. bdy. of sec. 1, T. 14 S., R. 27 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above ground, with brass cap. mkd. T14S S6 CC S7 S1 S12 R27E R28E 1914, from which the original bearing tree</p>

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

A juniper limb, 13 ins. diam., bears N. 24° E., 144 lks. dist., with an open blaze mkd. T14SR28E S6BT.
(Record: 227 lks. dist.)

Add the marks 1995 to the brass cap.

Cor. is located on a steep W slope.

From this cor. point, the cor. of secs. 1 and 12 only, T. 14 S., R. 27 E., bears S. 0°06' E., 3.39 chs. dist., hereinbefore described.

The point for the 1/4 sec. cor. of sec. 7 only, on the W. bdy. of the Tp., is at midpoint on the W. bdy. of sec. 7.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.

```

      T14S
R27E | R28E
      | 1/4 S7
      | 1995
  
```

from which

A juniper, 18 ins. diam. at base, bears S. 10 1/4° E., 98 lks. dist., mkd. 1/4 S7 BT.

Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.

Cor. is located on a SE slope.

From this cor. point, the 1/4 sec. cor. of sec. 12 only, T. 14 S., R. 27 E., bears S. 0°11' W., 3.405 chs. dist., hereinbefore described.

From the true point for the cor. of secs. 5, 6, 7 and 8.

N. 0°02' W., bet. secs. 5 and 6, on the Dos Cabezas Mountains Wilderness Area Bdy.

Over rolling land through catclaw, scattered mesquite and cacti.

Dependent Resurvey of a Portion of the Subdivisional lines,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
40.00	<p>The 1/4 sec. cor. of secs. 5 and 6, monumented with an iron post, 1 in. diam., firmly set, projecting 20 ins. above ground, in a collar of stone, 3 ft. base, to top, with a mound of stone, 3 ft. x 2 ft. to W., with brass cap. mkd. 1/4 S6 S5 1914.</p> <p>Add the marks 1994 to the brass cap.</p> <p>Cor. is located on a gentle E. slope.</p> <hr/> <p>N. 0°08' W., beginning new measurement.</p>
34.10	<p>The closing cor. of secs. 5 and 6, on the S. bdy. of sec. 32, T. 13 S., R. 28 E., monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap. mkd. T13S S31 S32 R28E CC S6 S5 T14S 1914.</p> <p>Add the marks 1994 to the brass cap.</p> <p>Cor. is located in a barbed wire fence, 3 strand, bears E. and W.</p> <p>From this cor. point, the cor. of secs. 31 and 32 only, T. 13 S., R. 28 E., bears S. 89°52' W., 4.39 chs. dist., hereinbefore described.</p> <hr/> <p style="text-align: center;">Subdivision of Section 8, T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona.</p> <hr/> <p>From the true point for the 1/4 sec. cor. of secs. 8 and 17.</p> <p>N. 0°41' W., on the N. and S. center line of sec. 8, on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>Over steep, rocky, mountainous land through catclaw and cacti.</p>
35.53	<p>Point for a witness point on the N. and S. center line of sec. 8.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">WP T14S R28E S8 DCMWA 1995</p> <p>from which</p>

Subdivision of Section 8,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
79.96	<p>An oak, 18 ins. diam., bears N. 54° E., 53 lks. dist., mkd. WP S8 BT.</p> <p>Deposit 5 60D nails beneath the stainless steel post.</p> <p>The 1/4 sec. cor. of secs. 5 and 8.</p>
39.94	<p>Subdivision of Section 9, T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona.</p> <p>From the true point for the 1/4 sec. cor. of secs. 9 and 16. N. 0°05' E., on the N. and S. center line of sec. 9.</p> <p>Over steep, rocky, mountainous land through catclaw and cacti.</p> <p>Point for the center 1/4 sec. cor. of sec. 9, at intersection with the E. and W. center line of sec. 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14S R28E C 1/4 S9 1995</p> <p>from which</p> <p>A boulder, 10 x 8 x 7 ft., bears S. 71 1/2° E., 21 lks. dist., mkd. X B0 on W. face.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>
59.995	<p>The center N. 1/16 sec. cor. of sec. 9, determined by William E. Johnson, R. L. S. 13178, monumented with a rebar, 1/2 in. diam., firmly set, projecting 1 in. above ground, with aluminum cap, mkd. 1/16 LS13178. This is accepted as a careful and faithful determination of the cor. position.</p>
20.055	<p>N. 0°05' E., beginning new measurement.</p> <p>The 1/4 sec. cor. of secs. 4 and 9.</p> <p>From the 1/4 sec. cor. of secs. 9 and 10.</p> <p>N. 89°58' W., on the E. and W. center line of sec. 9.</p>

Subdivision of Section 9,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
19.93	<p>Over mountainous land through catclaw and cacti.</p> <p>Point for the center E. 1/16 sec. cor. of sec. 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., on bedrock, supported in a mound of stone, 5 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14S R28E E1/16 C———C S9 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Thence on the Dos Cabezas Mountains Wilderness Area Bdy.</p>
39.86	<p>The center 1/4 sec. cor. of sec. 9.</p>
59.77	<p>Point for the center W. 1/16 sec. cor. of sec. 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14S R28E W1/16 C———C S9 1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Leave the Dos Cabezas Mountains Wilderness Area Bdy.</p>
79.68	<p>The 1/4 sec. cor. of secs. 8 and 9.</p> <hr/> <p style="text-align: center;">SE 1/4</p> <hr/> <p>From the true point for the E. 1/16 sec. cor. of secs. 9 and 16.</p> <p>N. 0°03' E., on the N. and S. center line of the SE 1/4 of sec. 9., on the Dos Cabezas Mountains Wilderness Area Bdy.</p> <p>Over steep, rocky, mountainous land through catclaw and cacti.</p>

Subdivision of Section 9,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
39.94	The center E. 1/16 sec. cor. of sec. 9.
	NW 1/4




	From the center W. 1/16 sec. cor. of sec. 9.
	N. 0°04' E., on the N. and S. center line of the NW 1/4 of sec. 9, on the Dos Cabezas Mountains Wilderness Area Bdy.
	Over rolling land through catclaw and cacti, with scattered mesquite.
38.60	Point for AP 1, sec. 9, on the Dos Cabezas Mountains Wilderness Area Bdy., hereinafter described.
	Leave the Dos Cabezas Mountains Wilderness Area Bdy.
40.12	The W. 1/16 sec. cor. of secs. 4 and 9.
	Metes-and-Bounds Survey of the Dos Cabezas Mountains Wilderness Area Bdy., T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona.
	In Sec. 30

	From the point for AP 1, sec. 30, identical with the cor. of secs. 24 and 25 only, T. 14 S., R. 27 E., hereinbefore described.
	S. 80°06' E., on line 1-2, sec. 30, on the Dos Cabezas Mountains Wilderness Area Bdy.
16.06	Point for AP 2, sec. 30.
	Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T14S R28E DCMWA AP2 _____
	S30 1995



Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
18.34	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a steep bluff, bears E. and ESW and 15 lks. S. of a barbed wire fence, 4 strand, bears ESE and WSW.</p> <hr/> <p>N. 87°22' E., on line 2-3, sec. 30.</p> <p>Point for AP 3, sec. 30.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP3</p>  <p>S30 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the spine of a ridge, bears ENE and ESW.</p> <hr/> <p>N. 39°49' E., on line 3-4, sec. 30.</p> <p>Point for AP 4, sec. 30, identical with AP 1, sec. 19, and the 1/4 sec. cor. of secs. 19 and 30, hereinbefore described.</p>
11.74	<div style="text-align: center;"> <p>In Sec. 19</p> <hr/> </div> <p>N. 16°35' E., on line 1-2, sec. 19.</p> <p>Point for AP 2, sec. 19.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p style="text-align: center;">T14S R28E DCMWA AP2  1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a rocky knob.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 57°46' E., on line 2-3, sec. 19.</p>
36.17	<p>Point for AP 3, sec. 19.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14S R28E DCMWA AP3  1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ridge bears, ENE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 54°19' E., on line 3-4, sec. 19.</p>
7.84	<p>Point for AP 4, sec. 19, identical with AP 1, sec. 20, on the line bet. secs. 19 and 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T14S R28E DCMWA AP4 AP1  1995</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>



Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Cor. is located in a saddle, bears ENE and WSW and 4 lks. N. of a barbed wire fence, 4 strand, bears ENE and WSW.</p> <p>From this cor. point the 1/4 sec. cor. of secs. 19 and 20, bears N. 0°10' E., 4.76 chs. dist., hereinbefore described.</p>
28.01	<p style="text-align: center;">In Sec. 20</p> <hr style="width: 20%; margin: auto;"/> <p>N. 73°30' E., on line 1-2, sec. 20.</p> <p>Point for AP 2, sec. 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP2</p>  <p>S20 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on Government Peak, 8 lks. W. of a barbed wire fence, bears ENE and WSW.</p>
43.23	<hr style="width: 20%; margin: auto;"/> <p>S. 40°51' E., on line 2-3, sec. 20.</p> <p>Point for AP 3, sec. 20.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP3</p>  <p>S20 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>


Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
24.96	<p>Cor. is located on a ridge, bears SE and NW.</p> <hr/> <p>S. 78°05' E., on line 3-4, sec. 20.</p> <p>Point for AP 4, sec. 20, identical with AP 1, sec. 21, on the line bet. secs. 20 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP4 AP1 S20 S21 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 7 lks. N. of a barbed wire fence, bears E. and W.</p> <p>From this cor. point, the cor. of secs. 20, 21, 28 and 29, bears S. 0°08' E., 5.22 chs. dist., hereinbefore described.</p>
19.04	<p style="text-align: center;">In Sec. 21</p> <hr/> <p>N. 81°40' E., on line 1-2, sec. 21.</p> <p>Point for AP 2, sec. 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP2 S21 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>




Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
13.24	<p>Cor. is located on a ridge, bears SE and NW, 91 lks. E. of a barbed wire fence, 4 strand, bears SE and NW.</p> <hr/> <p>S. 52°48' E., on line 2-3, sec. 21.</p> <p>Point for AP 3, sec. 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP3</p>  <p>S21 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ridge, bears NE and SW, 38 lks. N. of a barbed wire fence, 4 strand, bears NE and SW.</p> <hr/>
16.94	<p>N. 75°31' E., on line 3-4, sec. 21.</p> <p>Point for AP 4, sec. 21.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, to bedrock, supported in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP4</p>  <p>S21 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ridge, bears ENE and WSW.</p> <hr/>
20.91	<p>N. 55°37' E., on line 4-5, sec. 21.</p> <p>Point for AP 5, sec. 21.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS							
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA AP5</p>  <p>S21 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the northerly end of a spur, bears ENE and SW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 84°45' E., on line 5-6, sec. 21.</p>						
16.65	<p>Point for AP 6, sec. 21, identical with AP 1, sec. 22, on the line bet. secs. 21 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E DCMWA</p> <table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">AP6</td> <td style="padding: 2px;">AP1</td> </tr> <tr> <td style="padding: 2px;">S21</td> <td style="padding: 2px;">S22</td> </tr> <tr> <td colspan="2" style="padding: 2px;">1995</td> </tr> </table> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ridge, bears NE and SW.</p> <p>From this cor. point, the cor. of secs. 21, 22, 27 and 28, bears S. 0°01' E., 15.07 chs. dist., hereinbefore described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p style="text-align: center;">In Sec. 22</p> <hr style="width: 20%; margin: 10px auto;"/> <p>S. 89°05' E., on line 1-2, sec. 22.</p>	AP6	AP1	S21	S22	1995	
AP6	AP1						
S21	S22						
1995							
12.66	<p>Point for AP 2, sec. 22.</p>						

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;"> T14S R28E DCMWA AP2  S22 1995 </p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a steep NW slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 54°25' E., on line 2-3, sec. 22.</p>
25.00	<p>Point for AP 3, sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;"> T14S R28E AP3 DCMWA S22  1995 </p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a ridge, bears NNE and SSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 28°21' E., on line 3-4, sec. 22.</p>
13.82	<p>Point for AP 4, sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled with a collar of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;"> T14S R28E AP4 S22 DCMWA  1995 </p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a gentle NW slope.</p> <hr/> <p>N. 20°04' E., on line 4-5, sec. 22.</p>
<p>11.30</p>	<p>Point for AP 5, sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, to bedrock, supported in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <div data-bbox="820 766 1031 924" style="text-align: center;"> <p>T14S R28E AP5 DCMWA S22 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 145 lks. E. of a wash, drains NNW.</p> <hr/> <p>N. 34°07' E., on line 5-6, sec. 22.</p>
<p>9.09</p>	<p>Point for AP 6, sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="820 1396 1031 1554" style="text-align: center;"> <p>T14S R28E AP6 DCMWA S22 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the SW side of a small knoll.</p> <hr/> <p>N. 11°24' E., on line 6-7, sec. 22.</p>
<p>3.08</p>	<p>Point for AP 7, sec. 22.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="824 386 1036 541" style="text-align: center;"> <p>T14S R28E AP7 DCMWA S22 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on the NW side of a small knoll.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 68°54' E., on line 7-8, sec. 22.</p>
10.51	<p>Point for AP 8, sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="824 1020 1036 1176" style="text-align: center;"> <p>T14S R28E AP8 DCMWA S22 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a gentle N. slope.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 48°32' E., on line 8-9, sec. 22.</p>
8.99	<p>Point for AP 9, sec. 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="824 1654 1036 1810" style="text-align: center;"> <p>T14S R28E AP9 DCMWA S22 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>



Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
8.22	<p>Cor. is located 240 lks. W. of a barbed wire fence, 4 strand, bears NNE and SSW and 170 lks. W. of a wash, drains N.</p> <hr/> <p>N. 22°30' E., on line 9-10, sec. 22.</p> <p>Point for AP 10, sec. 22, identical with AP 1, sec. 15, on the line bet. secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located in a saddle, bears ENE and WSW and 4 lks. N. of a barbed wire fence, 4 strand, bears ENE and WSW.</p> <p>From this cor. point, the cor. of secs. 14, 15, 22 and 23, bears N. 89°57' E., 11.245 chs. dist., hereinbefore described.</p>
7.70	<p style="text-align: center;">In Sec. 15</p> <hr/> <p>N. 31°38' E., on line 1-2, sec. 15.</p> <p>Point for AP 2, sec. 15.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
15.33	<p>Cor. is located 45 lks. W. of a barbed wire fence, 4 strand, bears NNE and SSW and 55 lks. E. of a wash drains N.</p> <hr/> <p>N. 28°00' E., on line 2-3, sec. 15.</p> <p>Point for AP 3, sec. 15, on the line bet. secs. 14 and 15.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="820 730 1015 892" style="text-align: center;"> <p>T14S R28E S15 S14 AP3 DCMWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located W. of a wash, drains N. and 30 lks. W. of a barbed wire fence, 4 strand, bears NNW and SSE.</p> <p>From this cor. point, the cor. of secs. 14, 15, 22 and 23, bears S. 0°01' E., 20.09 chs. dist., hereinbefore described.</p>
	<p style="text-align: center;">In Sec. 9</p> <hr/> <p>From the point for AP 1, sec.9, on the N. and S. centerline of the NW 1/4 of sec. 9.</p> <p>Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd.</p> <div data-bbox="836 1528 1015 1690" style="text-align: center;"> <p>T14S R28E S9 AP1 DCMWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 1.52 chs. S. of the centerline of a graded gravel road, 38 lks. wide, bear E. and W. and 45 lks. N. of a trail road, 15 lks. wide, bears E. and W.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
11.14	<p>From this cor. point, the W. 1/16 sec. cor. of secs. 4 and 9, bears N. 0°04' E., 1.52 chs. dist., hereinbefore described.</p> <p>N. 89°34' W., on line 1-2, sec. 9.</p> <p>Point for AP 2, sec. 9.</p> <p>Set a stainless steel post, 24 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E S9</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 152 lks. S. of a graded gravel road, 38 lks. wide, bears E. and W. and 75 lks. N. of a barbed wire fence, 5 strand, bears ESE and WSW.</p>
4.95	<p>S. 8°12' W., on line 2-3, sec. 9.</p> <p>Point for AP 3, sec. 9.</p> <p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem., in a drill hole, cemented in place, in a granite boulder, 120 x 60 x 15 ft., with cap mkd.</p> <div style="text-align: center;"> <p>T14S R28E S9</p>  </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located at the northerly end of a rock outcrop, bears SSE and NNW.</p>
1.43	<p>S. 22°31' W., on line 3-4, sec. 9.</p> <p>Point for AP 4, sec. 9.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
	<p>Set a brass tablet, 3 1/4 ins. diam., 3 1/2 ins. stem., in a drill hole, cemented in place, in a granite boulder, 300 x 300 x 150 ft., with cap mkd.</p> <div data-bbox="812 409 1015 577" style="text-align: center;"> <p>T14S R28E S9 / AP4 DCMWA 1995</p> </div> <p>from which</p> <p style="padding-left: 40px;">A boulder, 25 x 15 x 10 ft., bears S. 7 1/2° W., 10 lks. dist., mkd. X B0.</p> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located on a rock outcrop, bears SSE and NNW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°10' W., on line 4-5, sec. 9.</p>
5.74	<p>Point for AP 5, sec. 9.</p> <p>Set a stainless steel post, 24 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled with a collar of stone, with brass cap mkd.</p> <div data-bbox="844 1207 1006 1375" style="text-align: center;"> <p>T14S R28E S9 / AP5 DCMWA 1995</p> </div> <p>Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p>Cor. is located 30 lks. W. of a trail road, 15 lks. wide, bears NNE and SSW.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 22°27' W., on line AP 5, sec. 9 to AP 1, sec. 8.</p>
4.72	<p>Intersect the line bet. secs. 8 and 9, point for a witness point.</p> <p>Set a stainless steel post, 24 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.</p>

Metes-and-Bounds Survey of the
 Dos Cabezas Mountains Wilderness Area Bdy.,
 T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS	
3.49	<div data-bbox="831 289 1008 474" data-label="Diagram"> </div> <p data-bbox="415 510 1357 569">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="415 606 1373 665">From this cor. point, the cor. of secs. 4, 5, 8 and 9, bears N. 0°03' E., 3.22 chs. dist., hereinbefore described.</p> <p data-bbox="415 701 1003 730">Cor. is located on a grassy N. slope.</p> <hr/> <p data-bbox="862 800 1008 829" style="text-align: center;">In Sec. 8</p> <hr/> <p data-bbox="415 894 1227 924">N. 22°27' W., beginning new measurement, in sec. 8.</p> <p data-bbox="415 959 781 989">Point for AP 1, sec. 8.</p> <p data-bbox="415 1024 1406 1083">Set a stainless steel post, 26 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="831 1113 1008 1297" data-label="Diagram"> </div> <p data-bbox="415 1339 1357 1398">Deposit a magnet in a 1 x 1 x 2 5/8 ins. white plastic case beneath the stainless steel post.</p> <p data-bbox="415 1434 1227 1493">Cor. is located 23 lks. S. of a trail road, 15 lks. wide, bears SSE and NNW.</p> <p data-bbox="415 1528 1373 1587">From this cor. point, the cor. of secs. 4, 5, 8 and 9, bears S. 89°58' E., 1.33 chs. dist., hereinbefore described.</p> <hr/> <p data-bbox="781 1654 1084 1684" style="text-align: center;">GENERAL DESCRIPTION</p> <hr/> <p data-bbox="415 1751 1422 1839">This survey is located approximately 8 miles SSW of Bowie, Arizona. The elevation ranges from 4000 to 7500 feet above sea level.</p>

T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

Access to the surveyed area is by way of U.S. Interstate Highway No. 10 and Apache Pass road.

Limited mineral activity was noted.

The soil is a sandy loam. The vegetation consists of oak, juniper, pine cactus and mesquite.

Description of the Dos Cabezas Mountains Wilderness Area Bdy.,
T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

The following is for informational purposes only.

Beginning at Angle Point 1, sec. 30, identical with the cor. of secs. 24 and 25 only, T. 14 S., R. 27 E.

thence S. 80°06' E., 16.06 chs. dist., to Angle Point 2, sec. 30;
thence N. 87°22' E., 18.34 chs. dist., to Angle Point 3, sec. 30;
thence N. 39°49' E., 7.77 chs. dist., to Angle Point 4, sec. 30,
identical with Angle Point 1, sec. 19, and the 1/4 sec. cor.
of secs. 19 and 30;

thence N. 16°35' E., 11.74 chs. dist., to Angle Point 2, sec. 19;
thence N. 57°46' E., 36.17 chs. dist., to Angle Point 3, sec. 19;
thence N. 54°19' E., 7.84 chs. dist., to Angle Point 4, sec. 19,
identical with Angle Point 1, sec. 20, on the line bet.
secs. 19 and 20;

thence N. 73°30' E., 28.01 chs. dist., to Angle Point 2, sec. 20;
thence S. 40°51' E., 43.23 chs. dist., to Angle Point 3, sec. 20;
thence S. 78°05' E., 24.96 chs. dist., to Angle Point 4, sec. 20,
identical with Angle Point 1, sec. 21, on the line bet.
secs. 20 and 21;

thence N. 81°40' E., 19.04 chs. dist., to Angle Point 2, sec. 21;
thence S. 52°48' E., 13.24 chs. dist., to Angle Point 3, sec. 21;
thence N. 75°31' E., 16.94 chs. dist., to Angle Point 4, sec. 21;
thence N. 55°37' E., 20.91 chs. dist., to Angle Point 5, sec. 21;
thence S. 84°45' E., 16.65 chs. dist., to Angle Point 6, sec. 21,
identical with Angle Point 1, sec. 22, on the line bet.
secs. 21 and 22;

thence S. 89°05' E., 12.66 chs. dist., to Angle Point 2, sec. 22;
thence N. 54°25' E., 25.00 chs. dist., to Angle Point 3, sec. 22;
thence N. 28°21' E., 13.82 chs. dist., to Angle Point 4, sec. 22;
thence N. 20°04' E., 11.30 chs. dist., to Angle Point 5, sec. 22;
thence N. 34°07' E., 9.09 chs. dist., to Angle Point 6, sec. 22;
thence N. 11°24' E., 3.08 chs. dist., to Angle Point 7, sec. 22;
thence N. 68°54' E., 10.51 chs. dist., to Angle Point 8, sec. 22;
thence N. 48°32' E., 8.99 chs. dist., to Angle Point 9, sec. 22;

T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

thence N. 22°30' E., 8.22 chs. dist., to Angle Point 10, sec. 22, identical with Angle Point 1, sec. 15, on the line bet. secs. 15 and 22;

thence N. 31°38' E., 7.70 chs. dist., to Angle Point 2, sec. 15;

thence N. 28°00' E., 15.33 chs. dist., to Angle Point 3, on the line bet. secs. 14 and 15;

thence N. 0°01' W., on the line bet. secs. 14 and 15, 19.88 chs. dist., to the 1/4 sec. cor. of secs. 14 and 15;

thence North, on the line bet. secs. 14 and 15, 39.98 chs. dist., to the cor. of secs. 10, 11, 14 and 15;

thence S. 89°48' W., on the line bet. secs. 10 and 15, 39.98 chs. dist., to the 1/4 sec. cor. of secs. 10 and 15;

thence S. 89°48' W., on the line bet. secs. 10 and 15, 40.06 chs. dist., to the cor. of secs. 9, 10, 15 and 16;

thence N. 89°58' W., on the line bet. secs. 9 and 16, 19.96 chs. dist., to the true point for the E. 1/16 sec. cor. of secs. 9 and 16;

thence N. 0°03' E., on the N. and S. center line of the SE 1/4 of sec. 9, 39.94 chs. dist., to the center E. 1/16 sec. cor. of sec. 9;

thence N. 89°58' W., on the E. and W. center line of sec. 9, 39.84 chs. dist., to the center W. 1/16 sec. cor. of sec. 9;

thence N. 0°04' E., on the N. and S. center line of the NW 1/4 of sec. 9, 38.60 chs. dist., to Angle Point 1, sec. 9;

thence N. 89°34' W., 11.14 chs. dist., to Angle Point 2, sec. 9;

thence S. 8°12' W., 4.95 chs. dist., to Angle Point 3, sec. 9;

thence S. 22°31' W., 1.43 chs. dist., to Angle Point 4, sec. 9;

thence N. 89°10' W., 5.74 chs. dist., to Angle Point 5, sec. 9;

thence N. 22°27' W., 8.21 chs. dist., to Angle Point 1, sec. 8, on the line bet. secs. 5 and 8;

thence N. 89°58' W., on the line bet. secs. 5 and 8, 38.58 chs. dist., to the 1/4 sec. cor. of secs. 5 and 8;

thence S. 0°41' E., on the line N. and S. center line of sec. 8, 79.96 chs. dist., to the true point for the 1/4 sec. cor. of secs. 8 and 17;

thence N. 89°50' W., on the line bet. secs. 8 and 17, 0.54 ch. dist., to the witness cor. to the 1/4 sec. cor. of secs. 8 and 17;

thence S. 89°57' W., on the line bet. secs. 8 and 17, 40.60 chs. dist., to the cor. of secs. 7 and 8 only;

thence S. 89°53' W., on the line bet. secs. 7 and 18, 40.19 chs. dist., to the 1/4 sec. cor. of sec. 7 only;

thence S. 89°58' W., on the line bet. secs. 7 and 18, 38.38 chs. dist., to the closing cor. of secs. 7 and 18;

thence North, on the W. bdy. of sec. 7, 36.60 chs. dist., to the 1/4 sec. cor. of sec. 12 only, T. 14 S., R. 27 E.;

thence N. 0°11' E., on the W. bdy. of sec. 7, 40.02 chs. dist., to the cor. of secs. 1 and 12, only, T. 14 S., R. 27 E.;

thence N. 0°06' W., on the W. bdy. of sec. 7, 3.39 chs. dist., to the closing cor. of secs. 6 and 7;

T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona

CHAINS

thence S. 89°59' E., on the line bet. secs. 6 and 7, 38.59 chs.
dist., to the 1/4 sec. cor. of secs. 6 and 7;
thence N. 89°54' E., on the line bet. secs. 6 and 7, 40.03 chs.
dist., to the true point for the cor. of secs. 5, 6, 7 and
8;
thence N. 0°02' W., on the line bet. secs. 5 and 6, 40.00 chs.
dist., to the 1/4 sec. cor. of secs. 5 and 6;
thence N. 0°08' W., on the line bet. secs. 5 and 6, 34.10 chs.
dist., to the closing cor. of secs. 5 and 6;
thence S. 89°52' W., on the N. bdy. of sec. 6, 4.39 chs. dist.,
to the cor. of secs. 31 and 32 only, T. 13 S. R. 28 E.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Cheryl A. Baier	Surveying Technician
Lawrence T. Kempe	Surveying Technician

CERTIFICATE OF SURVEY

I, Clyde J. King, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of Special Instructions bearing date of the 20th day of October, 1994, I have dependently resurveyed a portion of the West boundary, a portion of the North boundary and a portion of the subdivisional lines, subdivided sections 8 and 9 and executed a metes-and-bounds survey of the Dos Cabezas Mountains Wilderness Area Boundary, in Township 14 South, Range 28 East, of the Gila and Salt River Meridian, in the State of Arizona, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

9/17/98
(Date)

Clyde J. King
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Arizona State Office
Phoenix, Arizona

The foregoing field notes of the dependent resurvey of a portion of the west boundary, a portion of the north boundary and a portion of the subdivisional lines, the subdivision of sections 8 and 9 and a metes-and-bounds survey of the Dos Cabezas Mountains Wilderness Area Boundary, in Township 14 South, Range 28 East, Gila and Salt River Meridian, Arizona, executed by Clyde J. King, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

October 21, 1998
(Date)

Kenny D. Lavin
(Chief Cadastral Surveyor of Arizona)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in T. 14 S., R. 28 E., Gila and Salt River Meridian, Arizona, is a true copy of the original field notes.

(Date)

(Chief Cadastral Surveyor of Arizona)