

COOS BAY SALE NO. ORC00-TS-2015.0002  
Lucky Star VRH

COOS BAY DISTRICT OFFICE  
UMPQUA RESOURCE AREA

SALE DATE: August 28, 2015  
SALE TIME: 10:00 a.m.

SALE NO. ORC00-TS-2015.0002, LUCKY STAR VRH

DOUGLAS COUNTY: OREGON: O&C: ORAL AUCTION: Bid deposit required: \$ 51,700.00

All timber designated for cutting on: T. 23 S., R. 9 W., Sec. 19, SW1/4, W1/2SE1/4. Will. Mer.

Approx. No. Merch. Trees	Est. Vol. MBF 32' Log	Species	Est. Vol. MBF 16' Log	Appraised Price Per MBF	Estimated Vol. Times Appraised Price
5,127	2,293	Douglas-fir	2,858	\$172.60	\$493,290.80
34	16	grand fir	20	\$86.70	\$1,734.00
437	157	western hemlock	197	\$85.30	\$16,804.10
379	37	red alder	48	\$94.30	\$4,526.40
385	11	misc. hardwood	14	\$3.90	\$54.60
<b>6,362</b>	<b>2,514</b>	<b>Totals</b>	<b>3,137</b>		<b>\$516,409.90</b>

**THIS TIMBER SALE HAS BEEN CRUISED, APPRAISED, AND ADVERTISED BASED UPON SCRIBNER BOARD FOOT MEASURE (16 FOOT LOG). THE MINIMUM BID FIGURES SHOWN BY SPECIES ARE DOLLARS PER THOUSAND BOARD FEET (MBF). THE MINIMUM BID INCREMENT WILL BE \$0.50 PER MBF. SCRIBNER BOARD FOOT VOLUMES (32 FOOT LOG) BY SPECIES ARE DISPLAYED FOR INFORMATIONAL PURPOSES.**

LOG EXPORT AND SUBSTITUTION: All timber sales, including timber from Federal rights-of-ways, shall be subject to the restrictions relating to the export and substitution of unprocessed timber from the United States in accordance with P.L. 94-165 and 43 CFR 5400 and 5424 as amended.

LOG EXPORT AND SUBSTITUTION RESTRICTIONS: Excepting Port-Orford-cedar, all timber offered for sale hereunder is restricted from export from the United States in the form of unprocessed timber and is prohibited from being used as a substitute for exported private timber.

CRUISE INFORMATION: With respect to merchantable trees of all species in all cruise strata: the average DBHOB is 19.8 inches: the average gross merchantable log contains 106 bd. ft.; the total gross volume is approximately 3,306 thousand bd. ft.; and 95% recovery is expected. The average DBHOB for Douglas-fir is 21.1 inches; and the average gross merchantable log contains 108bd. ft. The following cruise methods were used for volume determination:

3P: The Douglas-fir has been cruised using the 3P system to select sample trees, 82 sample trees have been cruised and their volumes computed using form class tables for estimating board foot volumes of trees in 16-foot logs. The volumes are then expanded to a total stratum volume.

100% CRUISE: The western hemlock, grand fir, red alder, and miscellaneous hardwood volumes were based on a 100% cruise using form class tables for estimating board foot volume of trees in 16-foot logs.

CUTTING AREA: Three units totaling eighty four (84) acres of Variable Retention Harvest. One (1) acre of road right-of-way must be cut. Acreage data was collected using a Trimble Geo XT Global Positioning System receiver. Acreage was calculated based on Global Positioning System traverse procedures including differential correction.

ACCESS: Access to the sale area is provided via: Oregon State highways, Douglas County roads and Government controlled roads.

DIRECTIONS TO SALE AREA: From Reedsport, travel east on Highway 38 for 13.2 miles and turn south onto Mill Creek County Road. Continue south for 11 miles to Soup Creek County Road. Refer to Exhibits A and A1 for unit locations.

ROAD USE & MAINTENANCE: Purchaser shall pay a maintenance obligation to the Government totaling \$6,453.80. Operator maintenance is required on 3.3 miles of road.

ROAD CONSTRUCTION:

Road construction estimates include the following:

174.37 Stations of Road Renovation

Surfacing:

1542 cu. yds. of 1.5" minus crushed hardrock  
2230 cu. yds of 3" minus crushed hardrock  
20 cu. yds. of 6" minus crushed hardrock  
Rip Rap barrier 15 cu. yds.

Drainage:

320 linear feet of 18-inch CPE culvert  
8 Culvert Markers

DURATION OF CONTRACT: Will be 36 months for cutting and removal of timber. The contract will contain special stipulations regarding logging, road construction, road use and maintenance, fire prevention, hazard reduction and logging residue reduction, log export and substitution, optional scale check of lump sum sales, equal opportunity in employment, cultural resource protection, and sensitive, threatened, or endangered plants or animals.

SPECIAL PROVISIONS:

1. No trees shall be felled in the aggregate reserve areas as shown on the Exhibit A. Line pulling, jacking, or other mechanical devices shall be used as necessary. (Section 41a)
2. Snags will be left on site. (Section 41c.)
3. All Pacific yew and hardwood trees other than red alder and greater than 12 inches DBH( diameter at breast height) are reserved from cutting, except within road right-of-ways. (Section 41d)
4. Existing down logs in all decay classes will be left on site. (Section 41e)
5. Incidental Ground-based yarding areas not shown on Exhibit A will be approved by the Authorized Officer prior to logging. (Section 42b. 1)
6. Directional felling is required away from roads, property lines, posted boundaries, orange-painted reserve trees, aggregate reserve, stream channels, and snags.(Section 42b. 3)
7. One-end suspension is required. Lift trees and/or intermediate support trees may be necessary to achieve the required suspension. (Section 42b. 4)
8. No yarding shall occur through the aggregate reserve. (Section 42b. 6)
9. Avoid use of trees for tailhold or guyline within the aggregate reserve. Appropriate measures must be taken to protect trees from damage so felling is not required. (Section 42b. 7)
10. During all operations, large branch structures (>4") on reserve trees shall be protected by directionally falling trees away from such structure. (Section 42b. 8)
11. The location and use of yarding roads and harvester roads shall be approved by BLM prior to use by the Purchaser. (Section 42b. 9)
12. Road building and logging equipment will be washed prior to moving into the Contract Area to minimize the spread of noxious weeds. (Section 42b.13 and Exhibit F)
13. Seasonal restrictions will apply for a portion of the road renovation on the 23-9-20.0. (Section 42b 14 and Exhibit A)
14. Any required renovation of landings and roads shall occur during the dry season, June 1 through October 15, both days inclusive, of the same calendar year. (Section 42c. 2)
15. Depending on winter haul conditions the Authorized Officer may require additional erosion control measures be taken to prevent sediment from entering Stream Channels. (Section 42c. 4)
16. BLM will assume supervisory responsibility for disposal of logging slash. (Section 42e. 1)
17. Broadcast burning and 100% mop-up is required on approximately 41 acres. Fire trails shall be constructed around the broadcast burn area of Unit 1 as shown on the Exhibit A. Locations of the fire trails will be identified by the Authorized Officer. (Section 42e. 3)
18. Hand Piling, Covering and Pile Burning will be required on approximately 55 acres. (Section 42e. 3)

## SCHEDULE I

Sec. 41. **TIMBER RESERVED FROM CUTTING.** The following timber on the Contract Area, shown on Exhibit A, which is attached hereto and made a part hereof, is hereby reserved from cutting and removal under the terms of this contract and is retained as the property of the Government:

- a. All timber in the Reserve, and Aggregate Reserve Area, shown on Exhibit A, and all blazed, orange painted and/or posted trees which are on or mark the boundaries of the Reserve Area and Aggregate Reserve Area
- b. All orange painted reserve trees marked above and below stump height within the Harvest Area, shown on Exhibit A.
- c. All existing standing dead trees within the Harvest Area, as shown on Exhibit A, except those trees which must be felled to permit safe working operations. Snags felled for safety reasons shall be left on site.
- d. All Pacific yew and hardwood trees, other than red alder and greater than 12 inches DBH, are reserved from cutting, except within road right-of-ways.
- e. All existing downed wood in all decay classes will be left on site.
- f. All Bearing Trees with metal tags which mark property corners.

## SPECIAL PROVISIONS - Page 1 of 20 pages

Sec. 42. **SPECIAL PROVISIONS.** Purchaser shall comply with the special provisions which are attached hereto and made a part hereof unless otherwise authorized, in writing, by the Authorized Officer:

### a. Periodic Payment and First Installment Adjustment

(1) Notwithstanding the provisions of Sec. 3(b), the amount of the first installment may be reduced by the Government when the Contracting Officer requests the Purchaser to interrupt or delay operations for a period expected to last more than thirty days during the operating season. Such interruption or delay must be beyond the Purchaser's control. Operating Season shall be defined, for this purpose, as the time of year in which operations of the type required are normally conducted and not specifically restricted under the contract. The first installment may be reduced to five percent of the installment amount listed in Sec. 3(b), during the delay period. The Purchaser must request such a reduction in writing. When the Contracting Officer notifies the Purchaser that operations may proceed, the purchaser shall have fifteen days after such notification to return the first installment to the full value specified in Sec. 3(b). Failure to return the first installment to the full value

## SPECIAL PROVISIONS – Page 2 of 18

within the allotted time will be considered a material breach of contract. No timber shall be cut or removed from the contract area until the first installment is restored to the full amount.

(2) Notwithstanding the provisions of Sec. 3(b), adjustments in the due dates for periodic payments may be made by the Government if the Contracting Officer interrupts or delays contract operations for a period expected to last at least thirty days, and the interruption or delay is beyond the Purchaser's control. Any adjustment made shall provide the Purchaser with an equal amount of operating time as would have been available without the delay. The Purchaser shall request such adjustment in writing before the due date for a periodic payment contained in Sec. 3(b).

b. Logging

(1) Prior to commencement of operations, the Purchaser shall obtain from the Authorized Officer written approval of a written operations and logging plan commensurate with the terms and conditions of the contract which shall include measures needed to assure protection of the environment and watershed. A pre-work conference between the Purchaser's authorized representative and the Authorized Officer's representative must be held at a location designated by the Authorized Officer before the logging plan will be approved.

(2) Before beginning operations on the contract area for the first time, or after a shutdown of ten or more days, the Purchaser shall notify the Authorized Officer in writing of the date he plans to begin operations. He shall also notify the Authorized Officer in writing if he intends to cease operations for any period of ten or more days.

(3) Directional felling is required away from reserve areas, roads, streams, property lines, posted boundaries, orange-painted reserve trees, and snags.

(4) One-end suspension will be required for in-haul of logs during cable yarding operations. Lift trees and/or intermediate supports may be required to obtain the required suspension.

(5) Use full log suspension in areas shown on Exhibit A or as required by the authorized officer. Seasonal restrictions may be required where full log suspension cannot be achieved.

(6) No cable yarding corridors shall be placed through Aggregate Reserve areas.

(7) Unless approved by the Authorized Officer, avoid use of trees within any Aggregate Reserve for a tailhold or guyline. Any use of trees within Aggregate Reserve areas would require use of tie-backs, and other measures to minimize bole damage, as directed by the Authorized Officer so that subsequent felling is not required.

(8) Unless approved by the Authorized Officer, during all operations, large branch structures (>4") on reserve trees shall be protected by directionally falling trees away from such structure.

SPECIAL PROVISIONS – Page 3 of 18

(9) If cable yarding must occur through riparian reserve, in the north portion of Unit 1. 3 pre-existing corridors must be used, and full suspension is required. The location of these corridors will be approved by the BLM prior to use.

(10) Prior to attaching any logging equipment to a reserve tree, the Purchaser shall obtain written approval from the Authorized Officer and shall take precautions to protect the tree from damage as directed in writing by the Authorized Officer

(11) As directed by Authorized Officer, for a distance of 100 feet from the perimeter of each landing, all logs more than six inches diameter at the large end and longer than eight feet in length shall be decked or windrowed at the location designated by the Authorized Officer except logs removed from the contract area. If a log or a piece of a log meeting or exceeding the above specifications is bucked all portions of that log shall be yarded and decked at the above described location.

(12) In the Harvest Area, significant damage to residual trees shall be kept to a minimum. Significant damage is defined as any tree having greater than twelve square inches of the bark removed from the circumference of the tree, any tree with top diameter broken at three inches in diameter or greater, or any tree being visually root-sprung. If the Authorized Officer determines that damage has become commonplace due to a lack of caution or operator negligence, a written warning of non-compliance will immediately be issued to the Purchaser. The Authorized Officer may suspend operations until safeguards are put in place to protect the reserve trees. If the damage continues, it will result in a violation of Sec. 13 of the contract, Timber Trespass, and the Purchaser will be held liable for damages. Any reserved trees significantly damaged or destroyed by the Purchaser shall be valued at current market value of the merchantable volume for purposes of determining damages.

(13) To control the spread of noxious weeds, the Purchaser shall conduct all operations involving the transportation and use of equipment and vehicles in strict accordance with the requirements shown on Exhibit F, which is attached hereto and made part hereof. All road building and logging equipment will be washed prior to moving into the Contract Area to minimize the spread of noxious weeds.

(14) In the Seasonally Restricted Area, as shown on Exhibit A, road renovation shall cease between April 1 and August 5 of the same calendar year, both days inclusive. Daily timing restriction area will apply from August 6 through September 15 of the same calendar year, both days inclusive. (Work is limited to two hours after sunrise to two hours before sunset). Refer to Exhibit A for restrictions.

c. Road Renovation

(1) The Purchaser shall construct landings, improve or renovate a road in strict accordance with the road plans and specifications shown on Exhibit C, which is attached hereto and made a part hereof.

(2) Any required construction, improvement, or renovation of structures and roads shall occur during the dry season, June 1 through October 1, both days inclusive, of the same calendar year.

SPECIAL PROVISIONS – Page 4 of 18

(3) Any required construction, improvement, or renovation of structures and roads shall be completed and accepted prior to the removal of any timber, except right-of-way timber, over that road.

(4) In addition to the requirements set forth in Sec. 26 of this contract, the Purchaser shall complete erosion control and soil stabilization measures on all cuts, fills, waste areas, and scarified areas, as designated by the Authorized Officer, along all sections of roadway disturbed during the year prior to October 1 of each year. The Authorized Officer may set time limits for the beginning and completion of erosion control and soil stabilization measures and modify seasonal dates to conform to existing weather conditions and changes in the construction schedule. Such work shall be accomplished in accordance with Erosion Control and Soil Stabilization, 1700 and 1800 Series, contained in Exhibit C.

(5) The Purchaser shall, prior to construction of landings, stake all landing locations in accordance with the requirements set forth in Exhibit C. Concurrently with, or at the termination of logging operations, the Purchaser shall pull back and shape onto the landings all overhanging materials to prevent erosion in accordance with the requirements set forth in Exhibit C.

6) Landing construction and road renovation will only occur during the dry season, June 1 through October 1, unless dry conditions exist that may extend those dates as approved by the authorized officer.

d. Road Use and Maintenance

(1) The Purchaser shall be required to secure written approval to use or haul equipment over Government owned or controlled structures when that equipment exceeds the maximum allowable weights or dimensions established by the State for vehicles operating without a permit.

Tracked type equipment shall not be allowed to cross over concrete bridge decks, other concrete surfaced structures or asphalt surfaced roads without the proper protection of that surface. Prior approval shall be obtained from the Authorized Officer when crossing with protective devices.

Details of such equipment shall be furnished to the Authorized Officer for evaluation of load characteristics, at least 15 days prior to proposed move in. Details shall include:

- (a) axle weights when fully loaded;
- (b) axle spacing;
- (c) transverse wheel spacing;
- (d) tire size;
- (e) outside width of vehicle;
- (f) operating speed;
- (g) frequency of use; and,
- (h) special features (e.g. running tracks, overhang loads, etc.).

The Purchaser shall be responsible for repair of any damage to structures caused by the use of

SPECIAL PROVISIONS – Page 5 of 18

overweight or over-dimension vehicles: (1) without written approval, (2) in violation of the conditions of a written approval or (3) in a negligent manner. The amount of actual damage shall be determined by the Authorized Officer following a technical inspection and evaluation.

(2) At all times during the period of his operations on the contract area, and upon completion of said operations, the Purchaser shall be liable for maintenance and repair of such roads shown on Exhibit D, which is attached hereto and made a part hereof, resulting from wear or damage in accordance with the maintenance specifications as shown on Exhibit D

(3) The Purchaser is authorized to use the roads shown on Exhibit E, which is attached hereto and made a part hereof, for the removal of Government timber sold under the terms of this contract and for haul of mineral material required under the terms of this contract; provided, that the Purchaser shall pay a Maintenance Obligation to the Government totaling \$6,453.80, as shown on Exhibit E. Unless the total Maintenance Obligation due to the BLM is paid prior to commencement of operations on the contract area, payments shall be made in installments payable in the same manner as and together with payments required by Sec. 3 of this contract.

e. Fire Prevention, Hazard Reduction and Logging Residue Reduction

(1) BLM will assume supervisory responsibility for disposal of logging slash. The assumption by the Government of all obligations for the disposal or reduction of fire hazard under state law does not relieve the Purchaser of the obligations to perform the fire prevention, hazard reduction and logging residue reduction measures required by this contract.

(2) Fire Prevention and Hazard Reduction. Primarily for hazardous fuel reduction, watershed protection and silvicultural purposes, the Purchaser shall comply with the following provisions:

(a) Prior to the operation of power driven equipment in construction or logging operations under this contract during the closed fire season or periods of fire danger, the Purchaser shall prepare a fire prevention and control plan to the satisfaction of the Authorized Officer.

(b) Slash shall be disposed of in accordance with the verbal or written instructions of the Authorized Officer.

(3) Logging Residue Reduction and Site Preparation.

Specifications for Landing Piling

(a) In addition to the requirements of Section 15 of this contract, the Purchaser shall be responsible for logging residue reduction at all landing sites in the sale area.

(b) Within the sale area, the Purchaser shall (1) remove logging residue at landing sites for



SPECIAL PROVISIONS – Page 6 of 18

offsite utilization or (2) pile on site for burning. Logging residue includes slash from the harvest operations and related road construction, renovation or improvement.

(c) If offsite utilization is intended, the Purchaser shall upon request from the Authorized Officer, provide information on the method of removal, the total tonnage, the intended use and destination of logging residue being removed from the sale area.

(d) Any logs or useable residue that is identified in the contract as reserved shall remain the property of the Government and may not be shipped for offsite utilization.

(e) Prior to commencement of logging residue removal, the Purchaser shall provide advanced notification to the Authorized Officer in order to arrange for on-site inspections of the removal operations. Upon completion of logging residue removal, the Purchaser shall notify the Authorized Officer to arrange for a final inspection of the landing sites.

(f) Logging residue within the immediate vicinity of the landing and any residue that overhangs the landing sites that can be reached with the logging equipment on site shall be pulled completely back up onto the landing surface and either piled for burning or segregated for other uses.

(g) Logging residue meeting the criteria set forth in Sec. 42.b.(11) shall not be piled for burning but shall be segregated into separate piles that are no closer than 20 feet from landing residue piles that will be burned.

(h) If during the course of logging, post-harvest landing pile construction or during a final acceptance inspection, the Authorized Officer determines that landing piles contain excessive amounts of: (1) logging residue that meets the specifications as described in Sec. 42.b.(11), or (2) soil, the purchaser may be required to remove the specified residue from the landing burn piles or re-pile the landing slash to remove excessive soil contamination.

(i) Landing burn piles shall be constructed as upright as possible and have a solid base to prevent toppling. Material extending more than two feet beyond the general contour of the pile shall be cut off and placed on the pile. Pile trimming can be deferred until the time actual pile covering takes place but shall be done before pile covering. Unless directed by the Authorized Officer, no landing piles shall be within twenty feet of any green trees, snags or marked wildlife trees.

Specifications for Landing Pile Covering

(j) The Purchaser shall place polyethylene sheeting (PE) that is four MIL thickness and black in color over the landing pile so as to provide an adequate level of protection from fall/winter rains.

(k) At landing sites with excessive logging residue that overhangs the landing which cannot be reached and pulled back up onto the landing with equipment on site, the Purchaser shall place additional PE

SPECIAL PROVISIONS – Page 7 of 18

sheeting over the residue concentrations below the landings.

(l) To meet ignition and combustion needs, large landing piles will require additional PE sheeting in excess of 100 square feet to adequately cover the pile and protect it from wetting fall/winter rains. The Purchaser shall contact the Authorized Officer before any pile covering begins to receive clarification on which landing piles will require additional covering. At that time, the Authorized Officer will identify all piles that shall have additional PE covering that may exceed the 100 square foot limit. If large piles are covered without the advice and consent of the Authorized Officer and are subsequently found to be inadequately covered, the Purchaser may be required to re-cover or add additional PE coverings to the piles before acceptance is made.

(m) All PE shall be tied and/or weighted down with slash or logging debris in order to prevent blowing off or sliding. An adequate amount of anchoring material should be placed on top of the pile but no more than twenty percent of the material to be piled may be placed on top of the PE. For piles described in (l), the Authorized Officer may require the removal of PE before burning so the Purchaser should exercise discretion with respect to the method of application, the amount and composition of anchoring material used when securing the PE.

(n) Piles of residue identified by the Authorized Officer for utilization shall not be covered with PE sheeting.

Specifications for Slashing and Hand Piling within Units No. 1, 2 and 3

(o) The Authorized Officer will determine the sequence of the following work to be performed based on the season and time of year each unit is completed. Multiple entries to complete the required work over the term of the contract will be required.

(p) In accordance with written, email or verbal instructions to be issued by the Authorized Officer at least ten days in advance of earliest date of required performance, the Purchaser shall, under supervision of the Authorized Officer or their designated representative, assist in site preparation of Units No. 1, 2 and 3 by furnishing at their own expense, the services of personnel and equipment as follows:

(q) Within the boundaries of Units No. 1, 2 and 3 in the hand pile areas as shown on the Exhibit A, the Purchaser shall slash, hand pile and cover specified vegetation and logging residue as follows:

(r) Prior to hand piling, the Purchaser shall slash all brush greater than one foot in height, including prostrate brush pinned down by logging debris. Trees not marked or otherwise identified by the Authorized Officer for retention shall be slashed and bucked every four feet. Stump heights of slashed vegetation shall not exceed six inches as measured from the uphill side.

(s) The Purchaser shall hand pile slashed vegetation and logging debris that is one-half inch to four inches in diameter (measured on the small end). Material exceeding the diameter limits specified may be

SPECIAL PROVISIONS – Page 8 of 18

left un-piled; however, attached limbs and/or tops falling within the diameter limits shall be cut off and piled.

(t) Hand piles shall be constructed in an upright manner with a solid base to prevent toppling and a core of compact small diameter fuel less than one inch that will provide for an ignition source within the pile. Piles found to be without these features or with large air pockets will be rejected and shall be re-piled.

(u) Unless approved by the Authorized Officer, maximum pile base dimensions shall not exceed an approximate 8 ft. x 8 ft. Piled material that is more than eight feet in length shall be cut off and added back into the pile. The maximum pile height shall not exceed five feet. Minimum pile dimensions shall not be less than an approximate 4 ft. x 4 ft. and 3 ft. in height or depth.

(v) Unless directed by the Authorized Officer, no hand piles shall be constructed within ten feet of any standing green trees, snags, wildlife trees or material identified as suitable coarse woody debris.

Specifications for Hand Pile Covering

(w) The Purchaser shall place PE sheeting, four mil thickness and black in color, over the pile so as to provide protection from fall/winter rains. This requires that at a minimum, the top of the pile be completely covered. The size of the PE sheeting for each pile shall not exceed approximately 100 square feet.

(x) All PE sheeting shall be weighted down with slash or logging debris in order to prevent blowing off or sliding. No more than twenty percent of the material to be piled may be placed on top of the PE sheeting. Any piles found by the Authorized Officer to have more than twenty percent of piled material on top of the PE sheeting shall be re-piled and recovered in compliance with this specification.

(y) The Purchaser shall leave approximately 10% of the hand piles uncovered. Selection of hand piles to leave uncovered shall be random in nature and evenly distributed across the unit. Uncovered hand piles shall be flagged by the Purchaser with pink flagging. The Authorized Officer will determine compliance with the 10% requirement by measuring 1/10<sup>th</sup> acre plots (37.2' radius) and counting the total number of piles in a plot and counting the total number of piles left uncovered. If on average, *more or less* than 1 pile is left uncovered for every 10 piles inventoried, the Purchaser shall rework the deficient areas as directed by the Authorized Officer until the 10% threshold is met.

(z) In accordance with verbal, email or written instructions to be issued by the Authorized Officer at least ten days in advance of the earliest date of required performance, the Purchaser shall, under supervision of the Authorized Officer or his/her designated representative and at the Purchaser's expense, assist in burning and fire control by providing the services of personnel and equipment as follows:

Specifications Applicable to Landing and Hand Pile Burning

1. The Purchaser shall begin landing and hand pile burning within fourteen hours of notification by the Authorized Officer.

## SPECIAL PROVISIONS – Page 9 of 18

2. In accordance with the Authorized Officer's verbal instruction, immediately before ignition on landing piles with PE coverings in excess of 100 sq. ft., the Purchaser may be required to remove as much PE sheeting from the pile as feasibly possible.
3. The Purchaser shall dispose of removed PE sheeting in accordance with any applicable Federal, State, and municipal laws.
4. Removed PE sheeting shall not be disposed of in burn piles.
5. For each entry, the Purchaser may provide more personnel, equipment and materials than indicated but no less than the minimum requirements below. Minimum personnel, equipment and material requirements for burning landing and hand piles are:
  - a. One English-speaking foreman for crew supervision.
  - b. Eight persons to assist the foreman in pile burning.
  - c. Nine drip torches and sufficient mixed fuel to complete all pile burning.
  - d. A minimum of ninety percent consumption of each pile is required.
  - e. Some stoking of piled material around pile edges may be required to meet the 90% consumption requirement. Stoking can be accomplished by hand or the Purchaser will be allowed to use heavy equipment (if onsite) to facilitate stoking or re-piling of landing residue during landing pile burn operations.
  - f. If used, the heavy equipment shall not be allowed to operate off of all-weather road surfaces.
  - g. Hand piles that are not covered shall not be burned.
  - h. No mop-up of piles is required of the Purchaser.

Specifications for Broadcast Burn Area Slashing, Pullback and Fire Trail Construction in Unit No. 1

(aa) Within the broadcast burn area of Unit No. 1 as shown on the Exhibit A and at the discretion of the Authorized Officer, the Purchaser shall (1) cut damaged conifer reproduction (2) cut all brush species (3) cut hardwoods not marked or otherwise identified by the Authorized Officer for retention, (4) perform slash pullback from around designated interior features and (5) construct fire trails in accordance with the following specifications:

1. All brush species one foot (1) or greater in height, damaged residual conifer, and hardwoods not marked or otherwise identified for retention, shall be completely severed from the stumps including prostrate brush and trees pinned down by logging debris. Brush species consist of shrubs with single or multiple stems originating at or near ground level and not normally reaching 20 feet in height. Examples include (but are not limited to) vine maple, salmonberry, hazel, huckleberry, thimbleberry, manzanita, ocean spray, ceanothus species, rhododendron and broom species.
2. Stump heights shall not exceed four (4) inches measured on the uphill side.
3. No live limbs will be left on the stump.
4. Slashed hardwoods greater than ten (10) feet in length shall be bucked every five (5) feet and the limbs will be severed from the bole of the cut hardwood.
5. All slashed material shall be lopped in such a manner to bring the material as close to the

SPECIAL PROVISIONS – Page 10 of 18

- ground as possible.
6. The Authorized Officer will identify internal features such as snags, coarse wood or green retention trees that will require slash pullback from around the feature to protect it from fire. In addition to slash pullback, fire trails may be required to be constructed around the internal features. The Authorized officer will make a determination as to the need and specifications for fire trail construction around these internal features.
  7. In locations identified and flagged by the Authorized Officer, fire trails not to exceed a total of 6,750 “horizontal” feet in length shall be constructed by hand. Locations will be flagged by the Authorized Officer.
  8. Fire trails shall be cleared of overhanging and adjacent vegetation to a width of no more than eight feet. The fire trail should be cleared to mineral soil to a width of three feet. Soil and litter berms from construction of the trail shall be pulled to the “outside” of the fire trail whenever possible.
  9. Unless otherwise approved for by the Authorized Officer, all slash and vegetation removed from the fire trail location shall be pulled or thrown back into the burn unit a sufficient distance from the fire trail to prevent holding problems. Heavy concentrations of this slash shall be scattered.
  10. Water bars shall be constructed in all fire trails following the slope guidelines below. Water bars shall consist of a diagonal ditch six inches deep across the fire trail and extend six inches beyond the width of the fire trail. Water bars shall be reconstructed after prescribed burning and mop-up is complete.

Trail Slope:	0% to 9%	1 water bar every 300 feet
	10% to 29%	1 water bar every 200 feet
	30 % to 100 %	1 water bar every 100 feet

11. If the Authorized Officer determines it to be necessary, the Purchaser shall perform maintenance of the fire trails prior to broadcast burning.

(ab) Notwithstanding the provisions of Sec. 15 of this contract, the Government shall be responsible for disposing of slash created by the Purchaser's operations on Government lands, except for slash created by clearing of rights-of-way for roads to be constructed, and except for assistance as required herein. In accordance with verbal, email or written instructions to be issued by the Authorized Officer at least ten (10) days in advance of earliest date of required performance, the Purchaser shall, under supervision of the Authorized Officer, assist with broadcast burning, fire control, mop-up and patrol by furnishing, at their own expense, the services of personnel and equipment as follows. After the 10 day advance notice period, mobilization of the following resources shall occur within 14 hours of final notification by the Authorized Officer:

Specifications Applicable to Unit No. 1, Broadcast Burning and Mop Up

Unit No. 1 - Ignition & Holding

SPECIAL PROVISIONS – Page 11 of 18

1. One English speaking foreman to supervise crew and equipment operators.
2. 20 person burn crew.
3. 2 water tenders with drivers with 2500 gallons or more capacity equipped with a pump or pumps, capable of filling the tank at a rate of 300 G.P.M. or more and discharging at 20.5 G.P.M. through a 1/4" tip on the end of 50' of 1-1/2" hose. Water tenders must have a dump valve of at least 4" diameter or more for filling portable tanks. Water tenders shall be filled with water before arriving on site.
4. 8 drip torches and 50 gallons of mixed slash fuel.
5. 2 chain saws.
6. 2 portable pressure pumps (Mark III type).
7. 4-1500 gallon or larger, portable water tanks.
8. 3000 feet of 1-1/2" cotton-jacket rubber-lined (CJRL) hose.
9. 3000 feet of 1" cotton-jacket rubber-lined (CJRL) hose.
10. 40 hose lay fittings; 10 reducers, 10 1-1/2" gated wyies, 10 1" gated wyies, 10 forester nozzles.
11. 21 hand tools; 5 shovels, 7 pulaskis, 9 hazel hoes.

Unit No. 1 - Mop Up

1. One foreman to supervise crew and equipment operators.
2. 20 person mop-up crew.
3. 2 water tenders that shall meet the same specifications as required on burn day.
4. Hose, pumps, hand tools, etc., shall be the same amounts as required for burn day.

(ac) All listed personnel shall be fit for duty and fully capable of functioning as required. Personnel with Federal wildland firefighting qualifications as described in PMS 310-1 (Wildland Fire Qualification System Guide) are desired, but at a minimum, all personnel shall arrive at the project area(s) with the currently required OSHA approved personal protective safety equipment required for prescribed fire operations. All listed tools and equipment shall be in good usable condition. All power-driven equipment shall be fully fueled and available for immediate use. During periods of use under this subsection, the Purchaser shall provide fuel and maintenance for all such power-driven equipment.

(ad) If necessary, before and/or following broadcast burning, the Purchaser shall provide one (1) set of fallers to cut any snags, wildlife or reserve trees that are deemed by the Authorized Officer to be a safety hazard or holding risk.

(ae) Except as provided hereafter for slash fire escapement, the Purchaser shall continue the required assistance in slash burning for 168 continuous hours, as directed by the Authorized Officer within a seven (7) day period beginning at 8:00 a.m. the day following completion of ignition in the unit or until released from such services by the Authorized Officer, whichever occurs first.

(af) In event of a slash fire escapement, the Purchaser's personnel and equipment shall, under supervision of the Authorized Officer or his designated representative, take action to control, suppress, and

SPECIAL PROVISIONS – Page 12 of 18

mop-up the escaped fire until released from such service by the Government.

(ag) Only the Government can declare a fire as escaped.

(ah) If it becomes necessary to use furnished personnel and equipment for the suppression of a fire which has been declared escaped from the slash disposal area for a period *beyond* the remainder of the day in which the fire escaped, then the Government shall, at its option, either:

1. Use the crew provided by the Purchaser if it meets the Federal requirements for wildland firefighting (310-1) and reimburse the Purchaser for such additional use of said personnel and equipment at wage rates shown in the current Administratively Determined Pay Rates for the Western Area and at equipment rates shown in the current Oregon-Washington Interagency Fire Fighting Equipment Rental Rates schedule until the Purchaser is released from such service by the Government, or,
2. Count the additional use of qualified persons and equipment against the required assistance obligated time specified for that particular unit, or,
3. Release the Purchaser provided manpower and equipment from any requirements to work on the escaped fire if they do not meet the Federal requirements for wildland firefighting.
4. The release of the Purchaser provided manpower and equipment from work on the escaped fire does not alter the Purchaser's obligation to continue with holding and mop up of the burn unit(s).

(ai) Based on the time of year and sequence in which harvest and treatment of the units is completed, burning may be required to be accomplished over multiple seasons using multiple entries. Early season windows of opportunity (late winter/early spring) in which southerly and westerly aspects may come into prescription could occur. Such opportunities may reduce mop up efforts and cost. Ignition, equipment and holding crew requirements may be adjusted to levels suitable for the conditions at the time of burning. The Authorized Officer will make the determination as to what is considered a suitable level.

(aj) Time is of the essence in complying with this provision. In the event the Purchaser fails to provide the personnel, equipment and materials required herein, the Purchaser shall be responsible for all additional costs incurred by the Government in disposing of slash including but not limited to the wages and other costs of providing federal employees and others as substitute labor force, the cost of providing substitute equipment, materials and appropriate additional overhead expenses. If the Purchaser's failure results in deferral of burning, and new conditions necessitate additional site preparation work and/or the use of additional personnel and equipment to accomplish the planned burn, the Purchaser also shall be responsible for such additional costs.

SPECIAL PROVISIONS – Page 13 of 18

f. Log Export and Substitution

All timber sales, including timber from Federal rights-of-ways, shall be subject to the restrictions relating to the export and substitution of unprocessed timber from the United States in accordance with P.L. 94-165 and 43 CFR 5400 and 5424 as amended.

(1) All timber sold to the Purchaser under the terms of the contract, except exempted species, is restricted from export under the United States in the form of unprocessed timber, and is prohibited from being used as a substitute for exported private timber. For the purpose of this contract, unprocessed timber is defined as (1) any logs except those of utility grade or below, such as saw logs, peeler logs, and pulp logs; (2) cants or squares to be subsequently remanufactured exceeding eight and three-quarters inches in thickness; (3) split or round bolts or other roundwood not processed to standards and specifications suitable for end-product uses; or (4) western redcedar lumber which does not meet lumber of American Lumber Standards Grades of Number 3 dimension or better, or Pacific Lumber Inspection Bureau R-List Grades of Number 3 Common or better. Thus, timber manufactured into the following will be considered processed: (1) lumber and construction timbers, regardless of size, manufactured to standards and specifications suitable for end-product uses; (2) chips, pulp and pulp products; (3) green or dry veneer and plywood; (4) poles and piling cut or treated for use as such; (5) cants, squares, and lumber cut for remanufacturing of eight and three-quarters inches in thickness or less; (6) shakes and shingles.

Substitution will be determined under the definition found in 43 CFR 5400.0-5(n).

The Purchaser is required to maintain and upon request to furnish the following information:

- (a) date of last export sale;
- (b) volume of timber contained in last export sale;
- (c) volume of timber exported in the past 12 months from the date of last export sale;
- (d) volume of Federal timber purchased in the past 12 months from the date of last export sale;
- (e) volume of timber exported in succeeding 12 months from date of last export sale; and,
- (f) volume of Federal timber purchased in succeeding 12 months from date of last export sale.

(2) In the event the Purchaser elects to sell any or all of the timber sold under this contract in the form of unprocessed timber, the Purchaser shall require each party buying, exchanging, or receiving such timber to execute a "Certificate as to Nonsubstitution and the Domestic Processing of Timber" (Form 5460-16). The original of such certification shall be filed with the Authorized Officer. Additionally, when the other party is an affiliate of the Purchaser, the Purchaser will be required to update information under item (2) of Form 5450-17 (Export Determination) and file the form with the Authorized Officer.

(3) In the event an affiliate of the Purchaser has exported private timber within twelve months prior to purchasing or otherwise acquiring Federal timber sold under this contract, the Purchaser shall, upon request, obtain from the affiliate information in a form specified by the Authorized Officer and furnish the information to the Authorized Officer.



SPECIAL PROVISIONS – Page 14 of 18

(4) Prior to the termination of this contract, the Purchaser shall submit to the Authorized Officer a "Log Scale and Disposition of Timber Removed Report" (Form 5460-15) which shall be executed by the Purchaser. In addition, the Purchaser is required under the terms of this contract to retain for a three-year period from the date of termination of the contract the records of all sales or transfer of logs involving timber from the sale for inspection and use of the Bureau of Land Management.

(5) Unless otherwise authorized in writing by the Contracting Officer, the Purchaser shall brand clearly and legibly one end of all logs with a scaling diameter (small end inside bark) of over ten inches, prior to the removal of timber from the contract area. All loads of eleven logs or more will have a minimum of ten logs clearly and legibly branded on one end regardless of the diameter of the logs. All logs will be branded on loads of ten logs or less. One end of all branded logs to be processed domestically will be marked with a three square inch spot of highway yellow paint. The Purchaser will stop trucks for accountability monitoring at mutually agreed upon locations when notified by the Authorized Officer.

If multiple trailers (mule trains) are used, each bunked load shall be considered an individual load, and these guidelines will apply to each bunked load. If a flatbed stake trailer is used, each bundle will be treated as a separate load.

At the discretion of the Contracting Officer, the Purchaser may be required to brand and paint all logs. Any increased costs for log branding and painting shall be the responsibility of the Purchaser.

(6) In the event of the Purchaser's noncompliance with this subsection of the contract, the Authorized Officer may take appropriate action as set forth in Sec. 10 of this contract. In addition, the Purchaser may be declared ineligible to receive future awards of Government timber for a period of one year.

g. Optional Scale Check of Lump Sum Sales

(1) The Government, at its option, may administratively check scale any portion of the timber removed from the contract area, and if necessary, conduct check scaling of independent scalers contracted to BLM for administrative check scaling purposes. The Purchaser hereby agrees to make such contract timber available for such scaling at a location or locations to be approved in writing by the Authorized Officer. At the approved location or locations, the Purchaser shall provide an area for logs to be safely rolled out for scaling, to unload logs from trucks, place logs in a manner so that both ends and three faces of each log are visible for scaling, and to reload or remove logs after scaling has been completed.

(2) In the event that BLM elects to administratively check scale and if such check scaling causes a delay in log transportation time, an adjustment will be made to the purchase price as follows. If the entire sale is check scaled by yard scale, the purchase price of this contract shall be reduced by \$2,352.75. In the event only a portion of the contract timber is scaled, the purchase price shall be reduced by that portion of \$2,352.75 which is equal to the percentage of timber sold which was actually scaled by the Government. For purposes of computing this price reduction, the percentage of timber sold which has been scaled shall be determined by the Government. Any reduction in purchase price under the terms of this provision shall be full compensation to

SPECIAL PROVISIONS – Page 15 of 18

the Purchaser for any expense or loss incurred as a result of such scaling. Scaling shall be conducted in accordance with the Eastside Scribner Scaling Rules by BLM scalers, and/or independent scalers contracted to BLM. A copy of the scale report will be made available to the Purchaser upon request.

h. Equal Opportunity in Employment

- (1) Certification of Nonsegregated Facilities, Form 1140-3, is attached hereto and made a part hereof.

i. Cultural Resource Protection

(1) If in connection with operations under this contract, the Purchaser, his contractors, sub-contractors, or the employees of any of them, discovers, encounters or becomes aware of any objects or sites of cultural value on the contract area such as historical or prehistorical ruins, fossils, or artifacts, the Purchaser shall immediately suspend all operations in the vicinity of the cultural value and notify the Authorized Officer of the findings. Operations may resume at the discovery site upon receipt of written instructions and authorization by the Authorized Officer.

(2) Pursuant to 43 CFR 10.4(g) the holder of this authorization must notify the Authorized Officer, by telephone, with written confirmation, immediately upon discovery of human remains, funerary items, sacred objects, or objects of cultural patrimony. Further, pursuant to 43 CFR 10.4(c) and (d), you must stop activities in the vicinity of the discovery and protect it for 30 days or until notified to proceed by the Authorized Officer.

j. Sensitive, Threatened, or Endangered Plants or Animals

The Purchaser shall immediately discontinue specified construction or timber harvesting operations upon written notice from the Contracting Officer that:

- (1) threatened or endangered plants or animals protected under the Endangered Species Act of 1973, as amended, may be affected by the operation, and a determination is made that consultation or reinitiation of consultation is required concerning the species prior to continuing operation, or;
- (2) when, in order to comply with the Endangered Species Act or to protect occupied marbled murrelet sites in accordance with the Standards and Guidelines of the Coos Bay District Record of Decision (ROD) and Resource Management Plan (RMP), the Contracting Officer determines it may be necessary to modify or terminate the contract, or;
- (3) federal proposed, federal candidate, Bureau sensitive or State listed species protected under BLM Manual 6840 - Special Status Species Management - have been identified, and a determination is made that continued operations would affect the species or its habitat, or;

SPECIAL PROVISIONS – Page 16 of 18

- (4) other active raptor nests have been discovered, and a determination is made that continued operations under this contract would adversely affect the present use of the discovered nesting area by the raptor, or;
- (5) when, in order to comply with a court order which enjoins operations on the sale or otherwise requires the Bureau of Land Management to suspend operations, or;
- (6) when, in order to comply with a court order, the Contracting Officer determines it may be necessary to modify or terminate the contract, or;
- (7) species have been discovered which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, and the Contracting Officer determines that continued operations would affect the species or its habitat, or;
- (8) when, in order to protect species which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, the Contracting Officer determines it may be necessary to modify or terminate the contract.

Those operations necessary for a safe removal of personnel and equipment from the contract area and those directed by the Contracting Officer which are required in order to leave the contract area in an acceptable condition will be permitted. Discontinued operations may be resumed upon receipt of written instructions and authorization by the Contracting Officer.

During any period of suspension, the Purchaser may withdraw performance and payment bond coverage aside from that deemed necessary by the Authorized Officer to secure cut and/or removed timber for which the Bureau of Land Management has not received payment, and/or unfulfilled contract requirements associated with harvest operations that have already occurred and associated post-harvest requirements.

In the event of a suspension period or a combination of suspension periods that exceed a total of 30 days, the First Installment held on deposit may be temporarily reduced upon the written request of the Purchaser. For the period of suspension extending beyond 30 days, the First Installment on deposit may be reduced to five percent of the First Installment amount listed in Sec. 3.b. (use 3.a. for scale contract form 5450-4) of the contract. Any First Installment amount temporarily reduced may be refunded or transferred to another BLM contract at the request of the Purchaser. However, if the Purchaser has outstanding debt owing the United States, the Contracting Officer must first apply the amount of First Installment that could be refunded to the debt owed in accordance with the Debt Collection Improvement Act, as amended (31 USC 3710, *et seq.*). Upon Purchaser's receipt of a bill for collection and written notice from the Contracting Officer lifting the suspension, the Purchaser shall restore the

SPECIAL PROVISIONS – Page 17 of 18

First Installment to the full amount shown in Sec. 3.b. (use 3.a. for scale contract form 5450-4) of the contract within fifteen days after the bill for collection is issued, subject to Sec. 3.h. (use 3.g. for scale contract form 5450-4) of the contract. The Purchaser shall not resume contract operations until the First Installment amount is fully restored.

In the event of a suspension period or a combination of suspension periods that exceed a total of thirty days, the unamortized Out-of-Pocket Expenses for road or other construction required pursuant to Exhibit C of the contract shall be refunded or transferred to another BLM contract at the request of the Purchaser. Upon written notice from the Contracting Officer lifting the suspension, the Purchaser shall reimburse the Government the amounts refunded or transferred. The Purchaser may choose to pay this reimbursement at once or in installments payable at the same time as payments are due for the timber under the contract and in amounts approximately equal to the expenses associated with the timber for which payment is due.

In the event that operating time is lost as a result of the incorporation of additional contract requirements, or delays due to Endangered Species Act consultation with the U.S. Fish and Wildlife Service or U.S. National Marine Fisheries Service, or court-ordered injunctions, the Purchaser agrees that an extension of time, without reappraisal, will constitute a full and complete remedy for any claim that delays due to the suspension hindered performance of the contract or resulted in damages of any kind to the Purchaser.

The Contracting Officer may determine that it is necessary to terminate the cutting and removal rights under the contract in order to comply with the Endangered Species Act, protect occupied marbled murrelet sites in accordance with the ROD and RMP, protect species that have been discovered which were identified for protection through survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, or comply with a court order. Following the issuance of a written notice that cutting and removal rights will be terminated, the Purchaser will be permitted to remove timber cut under the contract, if allowed by the Endangered Species Act, marbled murrelet occupied site protection in accordance with the ROD and RMP, survey and manage and/or protection buffer standards and guidelines established in the ROD and RMP, or court order requirements necessitating the modification or termination.

In the event cutting and removal rights are terminated under this subsection, the Purchaser agrees that the liability of the United States shall be limited to the actual costs incurred by the Purchaser which have not been amortized by timber removed from the contract area. This calculation of liability shall utilize actual Purchaser costs and Government estimates of timber volumes. At the Authorized Officer's request, the Purchaser agrees to provide documentation of the actual costs incurred in the performance of the contract. In addition, the Purchaser shall be released from the obligation to pay the contract price for any timber which is not authorized to be removed from the contract area.


The Purchaser specifically and expressly waives any right to claim damages, other than those described in the preceding paragraphs, based on an alleged breach of any duty to the Purchaser, whether

SPECIAL PROVISIONS – Page 18 of 18

express or implied, in regard to the manner in which the Government defended the litigation which resulted in the court order affecting the operation of the contract. This waiver also extends to any claims based on effects on the operation of the contract that arise from litigation against another agency. Furthermore, the Purchaser specifically acknowledges and agrees that a court ruling that the Government violated the Administrative Procedures Act cannot be interpreted, in itself, to mean that the Government had not acted reasonably in regard to its duties to the Purchaser under this contract.

TIMBER SALE CONTRACT MAP  
USDI-BLM COOS BAY DISTRICT  
T. 23 S., R. 09 W., Sec. 19 Will. Mer.

SALE NO. ORC00-TS-2015.0002  
EXHIBIT A 1  
Page 1 of 1  
Lucky Star VRH

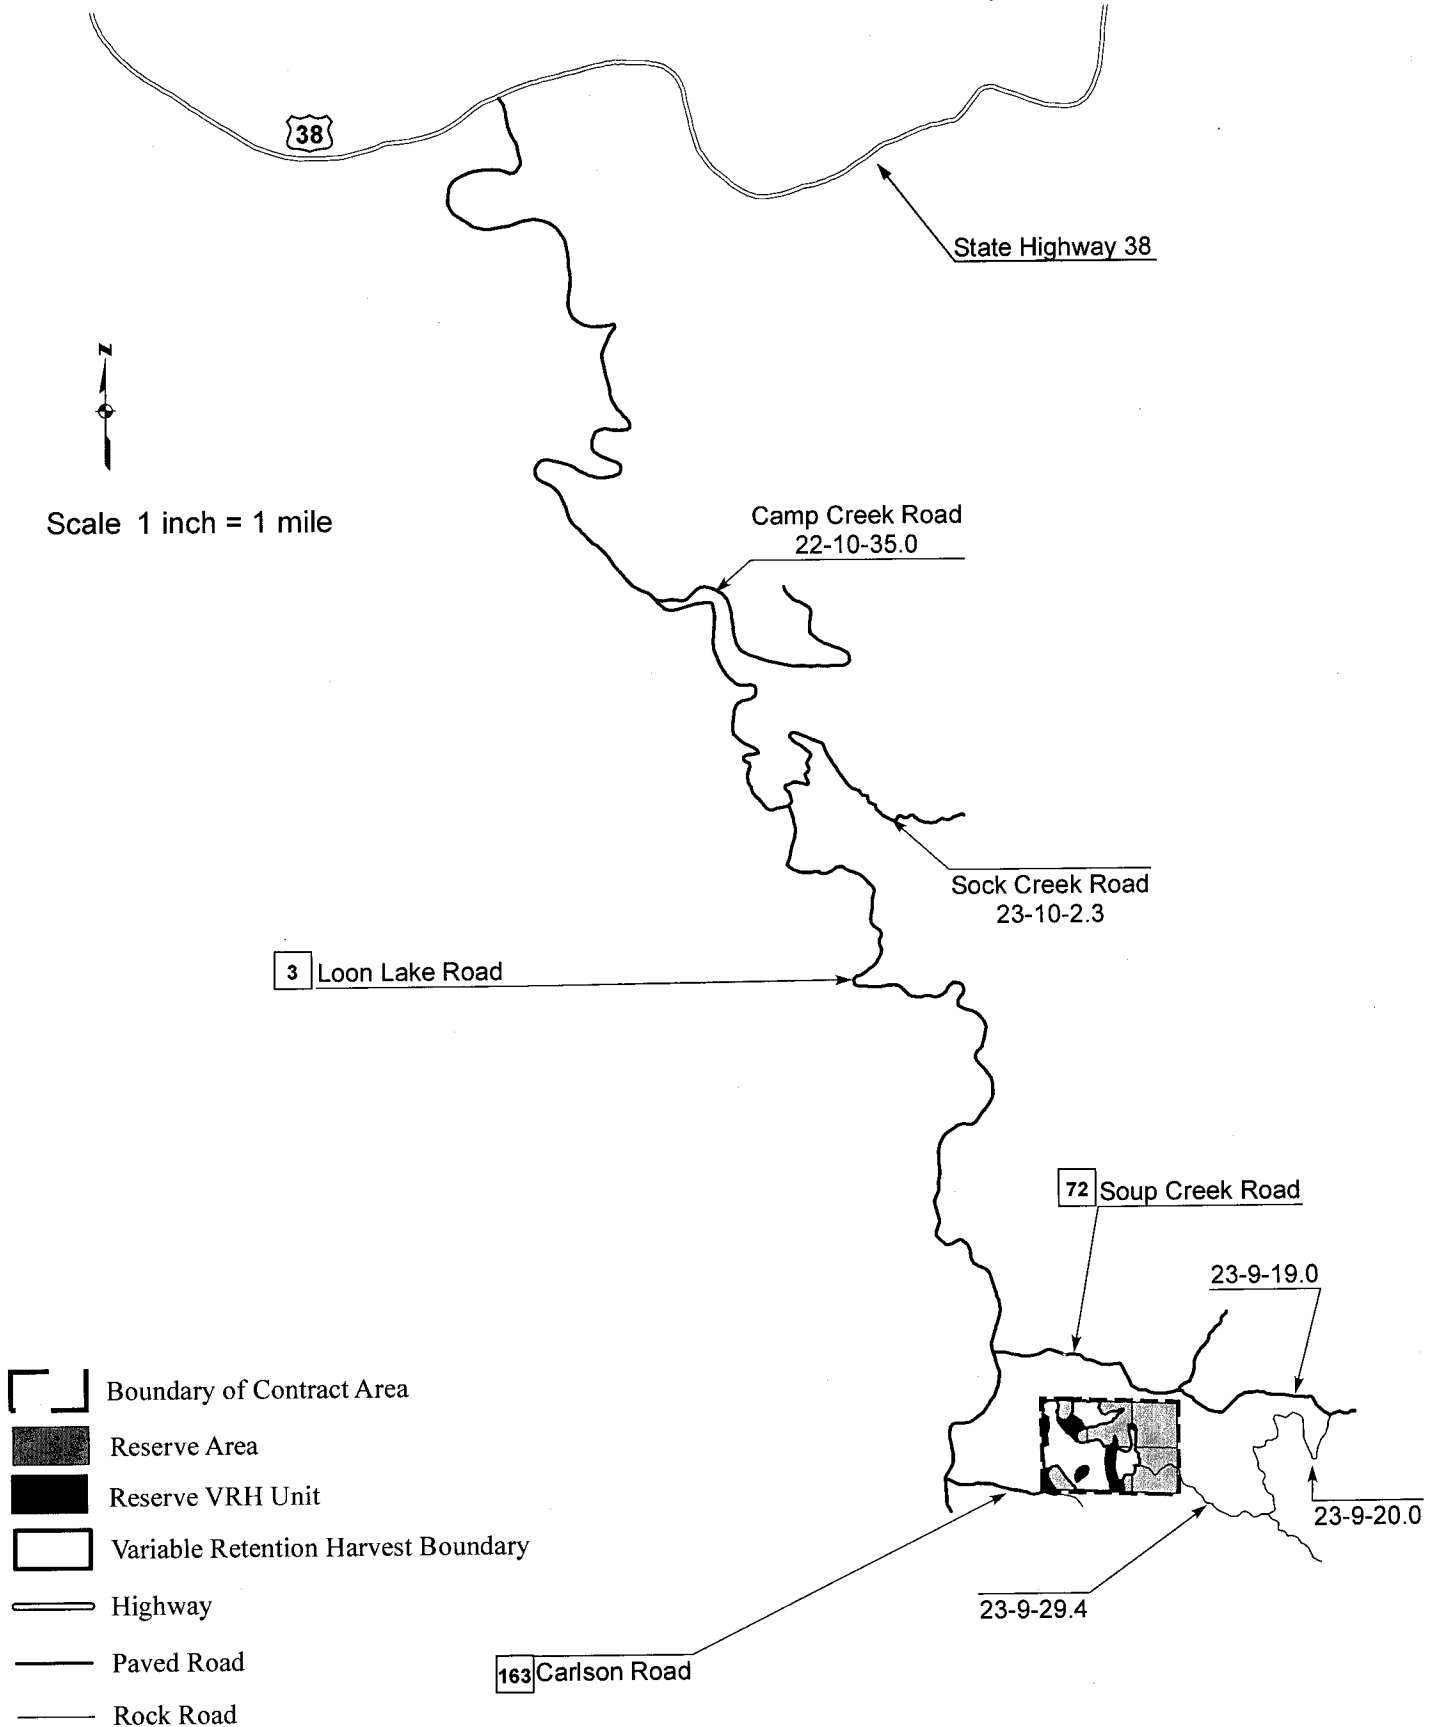

**TIMBER SALE CONTRACT MAP**  
**USDI-BLM COOS BAY DISTRICT**  
**T. 23 S., R. 09 W., Sec. 19, Will. Mer.**

**VARIABLE RETENTION HARVEST**

UNIT 1 57 ACRES  
 UNIT 2 15 ACRES  
 UNIT 3 12 ACRES

AGGREGATE RESERVE 24 ACRES

RW 1 ACRE


Total 109 ACRES  
 Total Reserve Area 148 ACRES  
 Total Contract Area 233 ACRES

**SALE NO. ORC00-TS-2015.0002**

**EXHIBIT A**

**Page 1 of 2**

**Lucky Star VRH**

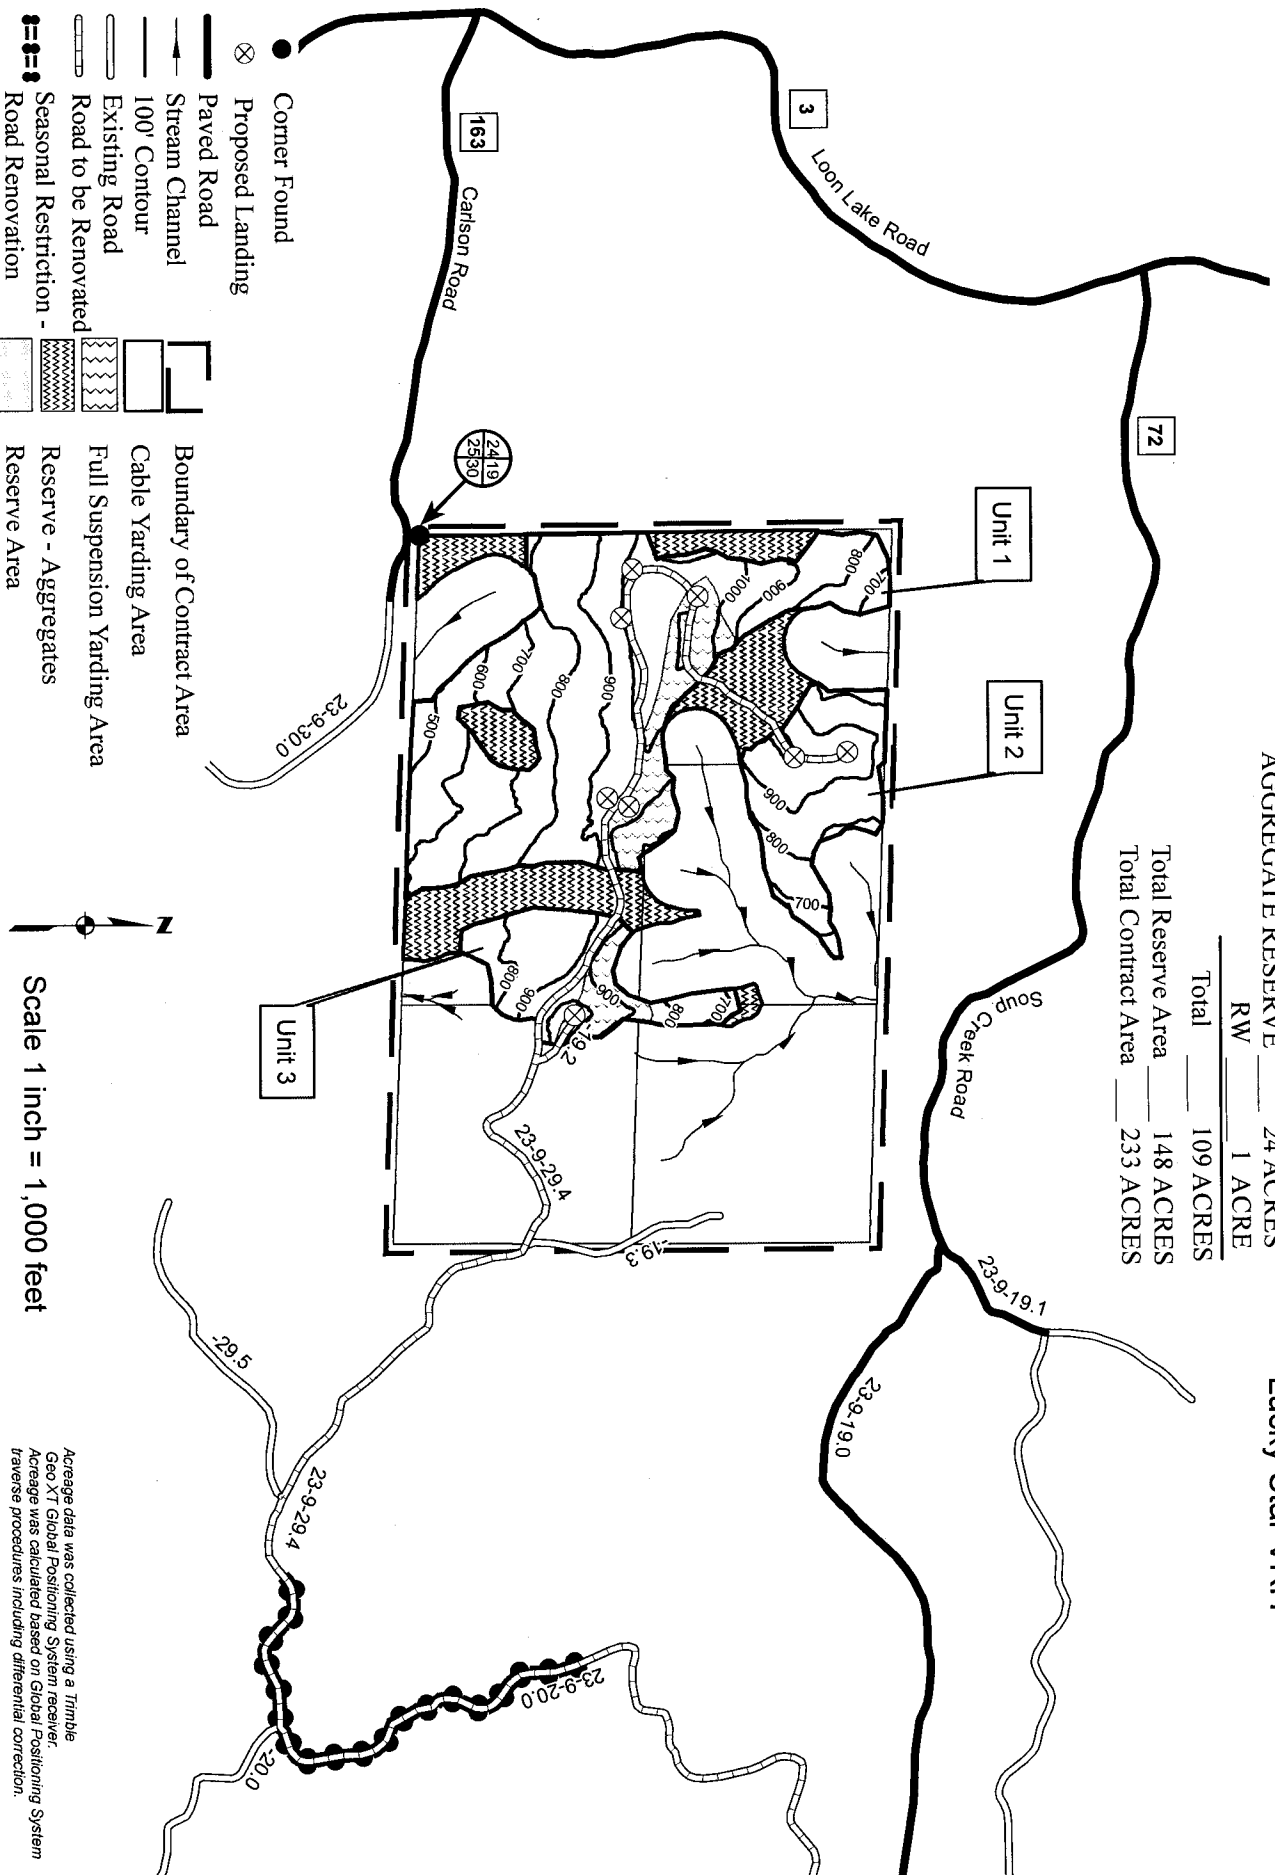

Scale 1 inch = 1,000 feet

Acreage data was collected using a Trimble  
 Geo XT Global Positioning System receiver.  
 Acreage was calculated based on Global Positioning System  
 traverse procedures including differential correction.


**TIMBER SALE CONTRACT MAP**  
**USDI-BLM COOS BAY DISTRICT**  
**T. 23 S., R. 09 W., Sec. 19, Will. Mer.**

**VARIABLE RETENTION HARVEST**

UNIT 1	57 ACRES
UNIT 2	15 ACRES
UNIT 3	12 ACRES
AGGREGATE RESERVE	24 ACRES
RW	1 ACRE

Total	109 ACRES
Total Reserve Area	148 ACRES
Total Contract Area	233 ACRES

**SALE NO. ORC00-TS-2015.0002**  
**EXHIBIT A - Fuel Treatments**  
**Page 2 of 2**  
**Lucky Star VRH**

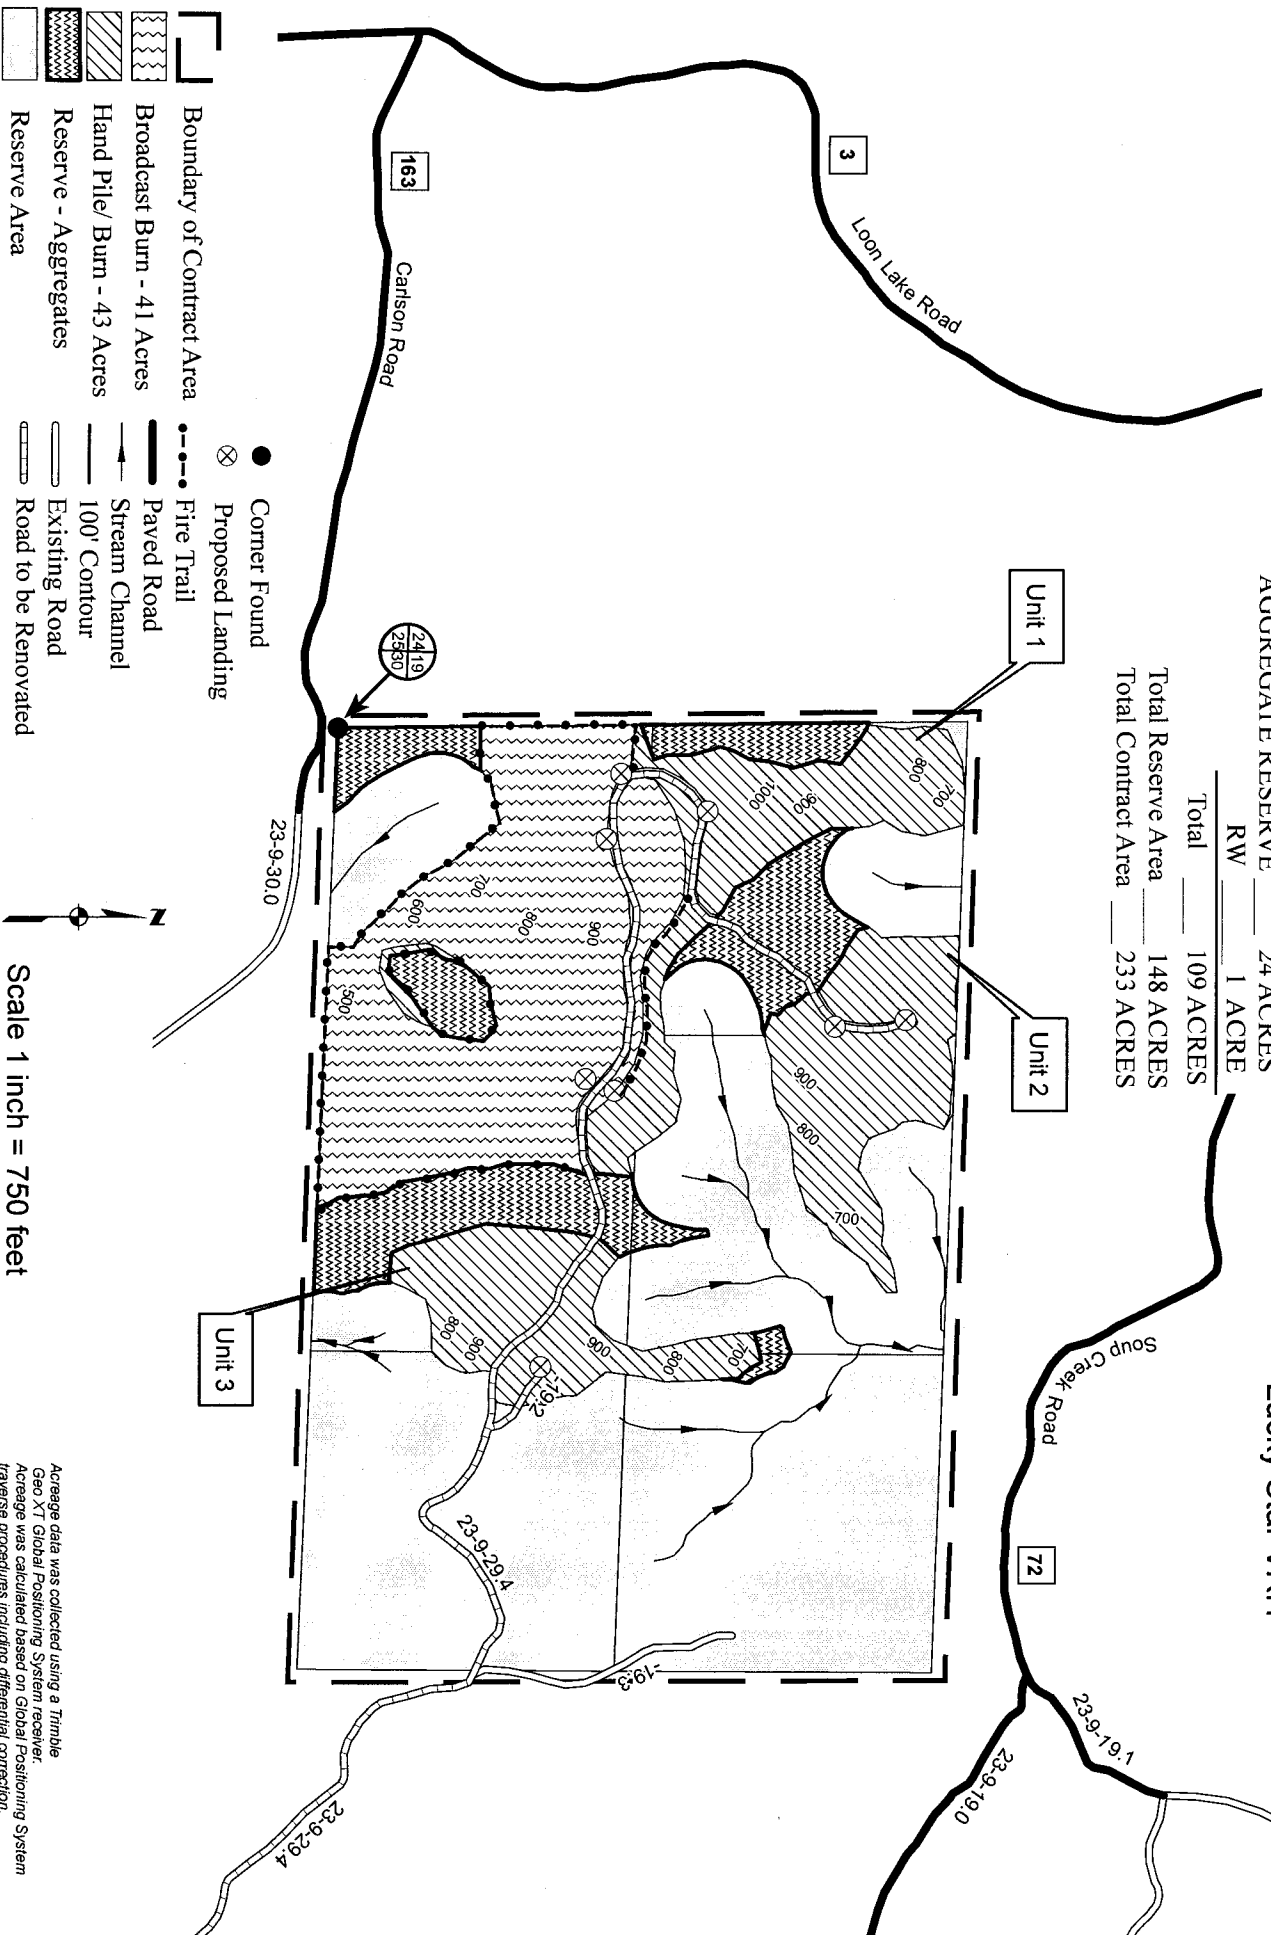

Acreege data was collected using a Trimble  
 Geo XT Global Positioning System receiver.  
 Acreege was calculated based on Global Positioning System  
 traverse procedures including differential correction.



**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

Coos Bay  
Lucky Stars VRH  
ORC00-TS-2015.0002

**Exhibit B**

The following estimates and calculations of timber sold are made solely as an administrative aid for determining: (1) Adjustments made or credits given in accordance with Sections 6, 9, or 11; (2) When payments are due; and (3) Value of timber subject to any special bonding provisions. The value of timber will be determined by multiplying the value per acre as shown below, times the amount of acreage as determined by the authorized officer, which has been cut or removed or designated for taking.

Except provided in Section 2, Purchaser shall be liable for the total purchase price even though the quantity of timber actually cut or removed or designated for taking is less than the estimated volume or quantity shown. Cutting areas are shown on the Exhibit A.

**Sale Totals (16' MBF)**

Species	Net Volume	Bid Price	Sale SubTotal
Douglas-fir	2,858		
Western Hemlock	197		
Red Alder	48		
Grand Fir	20		
Bigleaf Maple	14		
<b>Sale Totals</b>	<b>3,137</b>		

**Unit Details (16' MB)**

**Unit 1                      57 Acres                      Value per Acre : \$0.00**

Species	Net Volume	Bid Price	Species Value
Bigleaf Maple	7		
Douglas-fir	1,957		
Grand Fir	17		
Red Alder	32		
Western Hemlock	132		
<b>Unit Totals</b>	<b>2,145</b>		

**Unit 2                      15 Acres                      Value per Acre : \$0.00**

Species	Net Volume	Bid Price	Species Value
Bigleaf Maple	1		
Douglas-fir	471		
Grand Fir	2		
Red Alder	13		
Western Hemlock	63		
<b>Unit Totals</b>	<b>550</b>		

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Coos Bay  
Lucky Stars VRH  
ORC00-TS-2015.0002

Unit    3                                      12 Acres                                      Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Bigleaf Maple	6		
Douglas-fir	416		
Grand Fir	1		
Red Alder	2		
Western Hemlock	1		
Unit Totals	426		

Unit    RW                                      1 Acres                                      Value per Acre : \$0.00

Species	Net Volume	Bid Price	Species Value
Douglas-fir	14		
Red Alder	1		
Western Hemlock	1		
Unit Totals	16		

SALE NAME Lucky Stars VRH  
NET MBF 3137

EXHIBIT E  
ORC00-TS-2015.0002

A. ROAD USE FEES - Payable to Private Company:

COMPANY NAME:	AGREEMENT NUMBER:	ROAD NUMBER	NET MBF	USE FEE per MBF	TOTAL FEES:
TOTAL USE FEE:					\$0.00

B. MAINTENANCE FEES:

1. Maintenance and Rockwear Fees Payable to the U.S. (BLM Maintained Roads):

a. Timber Haul:

Surface Type	ROAD NUMBER:	NET MBF	ROAD MILES:	SURFACE REPLACEMENT /MBF/Mile	Subtotal	REGULAR MAINTENANCE /MBF/Mile	Subtotal	TOTAL FEE:
Pavement	23-9-19.0	3137	0.95		\$0.00	\$0.71	\$2,115.91	\$2,115.91
					\$0.00		\$2,115.91	\$2,115.91

2. ROCKWEAR Fees Payable to the U.S. (OPERATOR Maintained Roads):

a. Timber Haul:

Surface Type	ROAD NUMBER:	NET MBF	ROAD MILES:	SURFACE REPLACEMENT /MBF/Mile	ROCKWEAR Subtotal
Rock	23-9-29.4	404	0.05	\$0.49	\$9.90
Rock	23-9-29.4	735	0.15	\$0.49	\$54.02
Rock	23-9-29.4	883	0.07	\$0.49	\$30.29
Rock	23-9-29.4	1109	0.09	\$0.49	\$48.91
Rock	23-9-29.4	1294	0.06	\$0.49	\$38.04
Rock	23-9-29.4	1627	0.09	\$0.49	\$71.75
Rock	23-9-29.4	1960	0.09	\$0.49	\$86.44
Rock	23-9-29.4	2076	0.01	\$0.49	\$10.17
Rock	23-9-29.4	2711	0.32	\$0.49	\$425.08
Rock	23-9-19.2	426	0.06	\$0.49	\$12.52
Rock	23-9-29.4	3137	0.87	\$0.49	\$1,337.30
Rock	23-9-20.0	3137	1.44	\$0.49	\$2,213.47
3.3					\$4,337.89

3. ROAD MAINTENANCE AND/OR ROCKWEAR FEES - Payable to Private Company:

Surface Type	COMPANY NAME:	AGREEMENT NUMBER:	ROAD NUMBER	NET MBF	ROAD MILES:	MAINTENANCE AND/OR ROCKWEAR FEE /MBF/MILE	TOTALS:
							\$0.00
							\$0.00
0							\$0.00

4. OPERATOR MAINTENANCE WILL BE REQUIRED ON APPROX. 3.3 MILES OF ROAD. (SEE EXHIBIT D)

SALE VOLUME: 3137 MBF.		ROAD USE FEES:		ROCKWEAR FEES		MAINTENANCE FEES	
SUMMARY OF ROAD USE & ROAD MAINTENANCE	TOTAL:	\$ /MBF	TOTAL:	\$ /MBF	TOTAL:	\$ /MBF	
1. COMPANY-OWNED ROADS:	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	
2. BLM-MAINTAINED ROADS:			\$0.00	\$0.00	\$2,115.91	\$0.67	
3. OPERATOR-MAINTAINED ROADS:			\$4,337.89	\$1.38		\$0.00	
	\$0.00	\$0.00	\$4,337.89	\$1.38	\$2,115.91	\$0.67	

MAINTENANCE OBLIGATION PAYABLE TO BLM \$6,453.80 \$ 2.06 per mbf

Exhibit F  
Sheet 1 of 1

## SPECIAL PROVISIONS TO CONTROL THE SPREAD OF NOXIOUS WEEDS

### Vehicle and Equipment Cleaning

1. Cleaning shall consist of the removal of soil and debris by washing with a high pressure hose or steam cleaning. Cleaning and inspection sites will be agreed to by Purchaser and BLM. All petroleum product residues shall be contained at wash sites and dealt with in accordance to DEQ standards. Contractor shall provide an approved plan for the cleaning station that demonstrates that the station meets all DEQ and water quality regulations. All necessary permits shall be obtained by the contractor.

2. All equipment parts shall be cleaned as designated by the Authorized Officer, including removal of tractor belly plates, in accordance with Sec. 1 above.

All construction, logging and slash disposal equipment shall be cleaned prior to entering the contract area. The Authorized Officer will determine if log trucks and vehicles used for transportation of personnel shall be cleaned, based upon the location of use immediately prior to current timber sale. If the vehicles have been in a weed-infested area, they shall be washed before entering Contract Area, as shown on Exhibit A.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

EQUAL OPPORTUNITY IN EMPLOYMENT  
CERTIFICATION OF NONSEGREGATED FACILITIES

Bid, offer, or contract number or  
other identification

By the submission of this bid or offer and/or by entering into this contract, the bidder, offeror, lessee, subcontractor, or applicant certifies that he does not maintain or provide for his employees any segregated facilities at any of his establishments, and that he does not permit his employees to perform their services at any location, under his control, where segregated facilities are maintained. He certifies further that he will not maintain or provide for his employees any segregated facilities at any of his establishments, and that he will not permit his employees to perform their services at any location, under his control, where segregated facilities are maintained. The bidder, offeror, applicant, or subcontractor agrees that a breach of this certification is a violation of the Equal Opportunity clause in this contract. As used in this certification, the term "segregated facilities" means, but is not limited to, any waiting rooms, work areas, rest rooms and wash rooms, restaurants and

other eating areas, time clocks, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive or are in fact segregated on the basis of race, color, religion, sex, or national origin, because of habit, local custom, or otherwise. He further agrees that (except where he has obtained identical certifications from proposed subcontractors for specific time periods) he will obtain identical certifications from proposed subcontractors prior to the award of subcontracts exceeding \$10,000 which are not exempt from the provisions of the Equal Opportunity clause; that he will retain such certifications in his files; and that he will forward the following notice to such proposed subcontractors (except where the proposed subcontractors have submitted identical certifications for specific time periods):

NOTICE TO PROSPECTIVE SUBCONTRACTORS OF REQUIREMENT  
FOR CERTIFICATIONS OF NONSEGREGATED FACILITIES

A Certification of Nonsegregated Facilities, as required by the May 9, 1967, order (32 F.R. 7439, May 19, 1967) on Elimination of Segregated Facilities, by the Secretary of Labor, must be submitted prior to the award of a subcontract exceeding \$10,000 which is not exempt from the

provisions of the Equal Opportunity clause. The certification may be submitted either for each subcontract or for all subcontracts during a period (i.e., quarterly, semiannually, or annually).

In accordance with 41 CFR 60, as amended May 19, 1967, and Executive Order No. 11246 of September 24, 1965, as amended, this certification is applicable to all bids, offers, contracts and subcontracts as well as agreements with applicants who are themselves performing federally assisted contracts, which may exceed \$10,000 and are not exempt from the provisions of the Equal Opportunity clause of the Order.

## INSTRUCTIONS TO BIDDERS

1. **AUTHORITY**—Timber located on the revested Oregon and California Railroad Grant Lands and on the reconveyed Coos Bay Wagon Road Grant Lands is administered and sold pursuant to authority of the Act of August 28, 1937 (50 Stat. 874; 43 U.S.C. 1181a); timber located on other lands and other vegetative resources on all public lands of the United States under jurisdiction of the Bureau of Land Management are administered and sold pursuant to authority of the Act of July 31, 1947 (61 Stat. 681), as amended, by the Act of July 23, 1955 (69 Stat. 367; 30 U.S.C. 601 et. seq.). Regulations of the Secretary of the Interior governing sale of timber are codified in 43 CFR Group 5400.

2. **QUALIFICATIONS OF BIDDERS**—A bidder for sale of timber/vegetative resources must be either (a) a citizen of the United States, (b) a partnership composed wholly of such citizens, (c) an unincorporated association composed wholly of such citizens, or (d) a corporation authorized to transact business in the State in which the timber/vegetative resource is located.

3. **INSPECTION OF TIMBER/VEGETATIVE RESOURCES**—Bidder is invited, urged, and cautioned to inspect the timber/vegetative resource prior to submitting a bid. By executing the timber/vegetative resource sale contract, bidder warrants that the contract is accepted on the basis of his examination and inspection of the timber/vegetative resource and his opinion of its value.

4. **DISCLAIMER OF WARRANTY**—Government expressly disclaims any warranty of the fitness of the designated timber/vegetative resource for any purpose of the bidder; all timber/vegetative resources are to be sold "As Is" without any warranty of merchantability by Government. Any warranty as to the quantity or quality of timber/vegetative resource to be sold is expressly disclaimed by Government.

5. **BIDS**—Sealed or written bids for not less than the advertised appraised price, per timber/vegetative resource must be submitted in duplicate to the District Manager who issued *Timber/Vegetative Resource Sale Notice*.

(a) **Sealed Bid Sales**—Bids will be received until time for opening which is set out in the Notice. Enclose both copies of bid with required bid deposit in a sealed envelope marked on the outside *Bid for Timber/Vegetative Resources*, time bid is to be opened, tract number, and legal description of land on which timber/vegetative resource is located. In event of a tie, the high bidder shall be determined by lot from among those who submitted the tie bids.

(b) **Auction Sales**—Submission of the required bid deposit and a written bid is required to qualify for oral bidding. Oral bidding shall begin from the highest written bid. No oral bid will be considered which is not higher than the preceding bid. In the event there is a tie in high written bids, and no oral bidding occurs, the bidder who was the first to submit his bid deposit and written bid shall be declared the high bidder. If the officer conducting the sale cannot determine who made the first submission of high tie written bids, the high bidder shall be determined by lot. High bidder must confirm his bid, in writing, immediately upon being declared high bidder.

(c) Except as otherwise provided in 43 CFR 5442.2, bids will not be considered in resale of timber/vegetative resource remaining from an uncompleted contract from any person or affiliate of such person who failed to complete the original contract because of (1) cancellation for the purchaser's breach or (2) through failure to complete payment by expiration date.

(d) When it is in the interest of the Government to do so, it may reject any and all bids and may waive minor deficiencies in bids or in sale advertisement.

6. **BID FORMS**—All sealed, written bids, and confirmation of oral bids shall be submitted on forms provided by Government.

(a) **Lump Sum Sales**—Bids shall specify (1) Bureau of Land Management estimated volume, (2) price per unit, and (3) total purchase price. Estimated volume and price per unit are to be used for administrative and appraisal purposes only. Upon award of contract, high bidder shall be liable for total purchase price, including any adjustment which may be made as a result of reappraisal if an extension of time is granted, even though quantity of timber/vegetative resource actually cut, removed, or designated for taking is more or less than the estimated volume or quantity listed.

(b) **Timber Scale Sales**—Bids must state price per thousand board feet that will be paid for each species. High bidder will be determined by multiplying bid price per thousand board feet per species by Bureau of Land Management

estimate of volume of each species. Purchaser shall be liable for purchase price of all merchantable timber sold under contract even though all such timber is not actually cut and removed prior to expiration of time for cutting and removal as specified in contract.\*

7. **BID DEPOSIT**—All bidders must make a deposit of not less than the amount specified in the *Timber/Vegetative Resource Notice*. Deposit may be in the form of cash, money orders, bank drafts, cashiers or certified checks made payable to the Department of the Interior—BLM, bid bonds of a corporate surety shown on the approved list of the United States Treasury Department\*, or any approved guaranteed remittance approved by the Contracting Officer. Upon conclusion of bidding, the bid deposit of all bidders, except high bidder, will be returned. The cash deposit of the successful bidder may be applied toward the required sale deposit and/or the purchase price. Cash not applied to the sale deposit or the purchase price, or a corporate surety bid bond, will be returned at the time the contract is signed by the Government.

8. **AWARD OF CONTRACT**—Government may require high bidder to furnish such information as is necessary to determine the ability of bidder to perform the obligation of contract. Contract will be awarded to high bidder, unless he is not qualified or responsible or unless all bids are rejected. If high bidder is not qualified or responsible or fails to sign and return the contract together with required performance bond and any required payment, contract may be offered and awarded to the highest bidders qualified, responsible, and willing to accept the contract.

9. **TIMBER/VEGETATIVE RESOURCE SALE CONTRACT**—To be executed by purchaser, has been prepared by Government, and may be examined in the District Manager's office.

10. **PERFORMANCE BOND**—

(a) A performance bond in an amount of not less than 20 percent of total purchase price is required, but the amount of the bond shall not be in excess of \$500,000, except when the purchaser opts to increase the minimum bond to permit cutting prior to payment as provided in 43 CFR 5451.2, or in the event the purchaser is a holder of an unresolved default the bond may be increased as provided in 43 CFR 5450.1(b). Performance bond may be (1) bond of a corporate surety shown on approval list issued by the United States Treasury Department and executed on an approved standard form, (2) personal surety bond executed on an approved standard form if Government determines principals and bondsman are capable of carrying out the terms of the contract, (3) cash bonds, (4) negotiable securities of the United States, or (5) any guaranteed remittance approved by the Contracting Officer.

(b) If purchaser elects to cut timber without skidding or yarding it to a loading point or removing it prior to the payment of the second or subsequent installments, Government shall require an increase in amount of performance bond initially required by an amount equal to the value of timber to be cut. Such increase must be on a bond rider form supplied by Government and be approved, in writing, by Government prior to cutting timber covered by the bond increase. This increased amount of bond shall be used to assure payment for timber cut in advance of payment.\*

11. **PAYMENT BOND**—If purchaser elects to (a) cut and remove timber, or (b) remove timber already cut which has been secured by an increased performance bond as provided in paragraph 10(b) above, before payment of the second or subsequent installments, Government shall require a payment bond on a form supplied by Government. Purchaser shall obtain written approval from Government of payment bond prior to cutting and/or removal of timber covered by the bond. Payment bond shall be used to assure payment for timber cut and/or removed in advance of payment.\*

12. **PAYMENT OF PURCHASE PRICE**—For sales of \$500 or more, Government may allow payment by installments. Except as discussed in paragraphs 10 and 11 above, no part of any timber/vegetative resource sold may be severed, cut, or removed unless advance payment has been made as provided in contract.

13. **LIQUIDATED DAMAGES**—Within thirty (30) days from receipt of *Timber/Vegetative Resources Sale Contract*, the successful bidder shall sign contract and return it to Government, together with required bond and any required payment. If successful bidder fails to comply within the stipulated time, his bid deposit shall be retained by Government as liquidated damages.

14. **NINETY-DAY SALES** – If no bid is received within time specified in the advertisement of sale and if Government determines that there has been no significant rise in the market value of timber/vegetative resource, it may, in its discretion, keep the sale open, not to exceed ninety (90) days.

15. **UNAUTHORIZED USE OF GOVERNMENT PROPERTY** – A sale may be refused to high bidder who has been notified that he has failed to make satisfactory arrangements for payment of damages resulting from unauthorized use of, or injury to, property of the United States.

16. **EQUAL OPPORTUNITY CLAUSE** – This contract is subject to the provisions of Executive Order No. 11246 of September 24, 1965, as amended, which sets forth the nondiscrimination clauses. Copies of this order may be obtained from the District Manager. 43 CFR 60-1.7(b) requires that the Equal Opportunity Compliance Report Certification will be completed by prospective contractors. Certification may be obtained from District Manager.

17. **LOG EXPORT** – All timber offered for sale except as noted in the *Timber Sale Notice* is restricted from export from the United States in the form of unprocessed timber and cannot be used as a substitute for exported private timber. For the purpose of this contract, unprocessed timber is defined as: (1) any logs except those of utility grade or below, such as sawlogs, peeler logs, and pulp logs; (2)

cants or squares to be subsequently remanufactured exceeding eight and three quarters (8-3/4) inches in thickness; (3) split or round bolts or other roundwood not processed to standards and specifications suitable for end product use; or (4) western red cedar lumber which does not meet lumber of American Lumber Standards Grades of Number 3 dimensions or better, or Pacific Lumber Inspection Bureau R-List Grades of Number 3 common or better. Timber manufactured into the following will be considered processed: (1) lumber and construction timbers, regardless of size, manufactured to standards and specifications suitable for end product uses; (2) chips, pulp and pulp products; (3) green or dry veneer and plywood; (4) poles and piling cut or treated for use as such; (5) cants, squares, and lumber cut for remanufacture of eight and three quarters (8-3/4) inches in thickness or less; or (6) shakes and shingles. In event purchaser wishes to sell any or all of timber restricted from export in the form of unprocessed timber, the buyer, exchanges, or recipient shall be required to comply with contractual provisions relating to "unprocessed timber". Special reporting, branding and painting of logs may be included in contract provisions.\*

18. **DETAILED INFORMATION** – Detailed information concerning contract provisions, bid, performance bond forms, tract location maps, and access conditions may be obtained from the District Manager. All persons interested in bidding on the products listed are encouraged to familiarize themselves with all such detailed information.

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

☒ **TIMBER or  
TIMBER AND OTHER WOOD PRODUCTS**

**DEPOSIT AND BID FOR**

☐ **VEGETATIVE RESOURCES  
(Other Than Timber)**

Name of Bidder
Tract Number ORC00-TS-2015.0002
Sale Name Lucky Star VRH
Sale Notice (dated) July 30, 2015
BLM District Coos Bay District

<input type="checkbox"/> Sealed Bid for Sealed Bid Sale		<input checked="" type="checkbox"/> Written Bid for Oral Auction Sale	
Time for opening sealed bids	<input type="checkbox"/> a.m. <input type="checkbox"/> p.m.	Sale commences 10:00	<input checked="" type="checkbox"/> a.m. <input type="checkbox"/> p.m.
On (date)	Place	On (date) 08/28/2015	Place Conference Room A

In response to the above dated Sale Notice, the required deposit and bid are hereby submitted for the purchase of designated timber/vegetative resource on the tract specified above.

Required bid deposit is **\$51,700.00** and is enclosed in the form of:  
☐ cash ☐ money order ☐ cashier's check ☐ certified check ☐ bank draft  
☐ bid bond of corporate surety on approved list of the United States Treasury ☐ guaranteed remittance approved by the authorized officer.

IT IS AGREED That the bid deposit shall be retained by the United States as liquidated damages if the bid is accepted and the undersigned fails to execute and return the contract, together with any required performance bond and any required payment within 30 days after the contract is received by the successful bidder. It is understood that no bid for less than the appraised price on a unit basis per species will be considered. If the bid is rejected the deposit will be returned.

**BID SCHEDULE – LUMP SUM SALE**

*NOTE: Bidders should carefully check computations in completing the Bid Schedule*

BID SUBMITTED					ORAL BID MADE	
PRODUCT SPECIES	UNIT	ESTIMATED VOLUME OR QUANTITY	UNIT PRICE	TOTAL VALUE	UNIT PRICE	TOTAL VALUE
Douglas-fir	MBF	2,858	X	=	X	=
Grandfir	"	20	X	=	X	=
Western hemlock	"	197	X	=	X	=
Red alder	"	48	X	=	X	=
Misc. hardwood	"	14	X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
TOTAL PURCHASE PRICE						



If sale contract is executed, undersigned is liable for total purchase price even though the quantity cut, removed, or designated for taking is more or less than the total estimated volume or quantity shown above. Undersigned certifies bid was arrived at by bidder or offeror independently, and was tendered without collusion with any other bidder or offeror. In submitting or confirming this bid, undersigned agrees to the foregoing provisions, applicable regulations, and certifies that he is authorized to act as, or on behalf of, the bidder.

Bid submitted on *(date)*

*(Check appropriate box, sign in ink, and complete the following)*

<input type="checkbox"/> Signature, if firm is individually owned	Name of firm <i>(type or print)</i>
<input type="checkbox"/> Signatures, if firm is a partnership or L.L.C.	Business address, include zip code <i>(type or print)</i>
<input type="checkbox"/> Corporation organized under the state laws of	<i>(To be completed following oral bidding)</i>
Signature of Authorized Corporate Signing Officer	I HEREBY confirm the above oral bid By <i>(signature)</i>
Title	Date
Submit bid, in <i>duplicate</i> , to qualify for either an oral auction or sealed bid sale together with the required bid deposit made payable to the Department of the Interior – BLM.  Oral Auction – Submit to Sales Supervisor prior to closing of qualifying period for tract.	Sealed Bid – Send to District Manager, who issued the sale notice, in a sealed envelope marked on the outside: (1) “Bid for Timber” or (1a) “Vegetative Resources Other Than Timber” (2) Time bids are to be opened (3) Legal description

### NOTICES

The Privacy Act and 43 CFR 2.48(d) require that you be furnished with the following information in connection with the information required by this form.

**AUTHORITY:** 38 FR 6280 and 43 CFR 5442.1

**PRINCIPAL PURPOSE:** To qualify an oral auction bidder, and then if successful, to bind bidder to certain contract conditions.

**ROUTINE USES:** To determine that an individual is qualified to participate in oral auction bidding, and, as surety that bidder will fulfill contract requirements.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing this deposit and bid information is necessary only when an individual wishes to participate in a sealed or auction bid sale for timber or vegetative resources.

(Continued on page 3)

(Form 5440-9, page 2)

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

☒ **TIMBER or  
TIMBER AND OTHER WOOD PRODUCTS**

**DEPOSIT AND BID FOR**

☐ **VEGETATIVE RESOURCES  
(Other Than Timber)**

Name of Bidder
Tract Number ORC00-TS-2015.0002
Sale Name Lucky Star VRH
Sale Notice (dated) July 30, 2015
BLM District Coos Bay District

<input type="checkbox"/> Sealed Bid for Sealed Bid Sale	<input checked="" type="checkbox"/> Written Bid for Oral Auction Sale
Time for opening sealed bids <input type="checkbox"/> a.m. <input type="checkbox"/> p.m.	Sale commences 10:00 <input checked="" type="checkbox"/> a.m. <input type="checkbox"/> p.m.
On (date) Place	On (date) 08/28/2015 Place Conference Room A

In response to the above dated Sale Notice, the required deposit and bid are hereby submitted for the purchase of designated timber/vegetative resource on the tract specified above.

Required bid deposit is \$51,700.00 and is enclosed in the form of:  
☐ cash ☐ money order ☐ cashier's check ☐ certified check ☐ bank draft  
☐ bid bond of corporate surety on approved list of the United States Treasury ☐ guaranteed remittance approved by the authorized officer.

IT IS AGREED That the bid deposit shall be retained by the United States as liquidated damages if the bid is accepted and the undersigned fails to execute and return the contract, together with any required performance bond and any required payment within 30 days after the contract is received by the successful bidder. It is understood that no bid for less than the appraised price on a unit basis per species will be considered. If the bid is rejected the deposit will be returned.

**BID SCHEDULE – LUMP SUM SALE**

*NOTE: Bidders should carefully check computations in completing the Bid Schedule*

BID SUBMITTED					ORAL BID MADE	
PRODUCT SPECIES	UNIT	ESTIMATED VOLUME OR QUANTITY	UNIT PRICE	TOTAL VALUE	UNIT PRICE	TOTAL VALUE
Douglas-fir	MBF	2,858	X	=	X	=
Grandfir	"	20	X	=	X	=
Western hemlock	"	197	X	=	X	=
Red alder	"	48	X	=	X	=
Misc. hardwood	"	14	X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
			X	=	X	=
TOTAL PURCHASE PRICE						

If sale contract is executed, undersigned is liable for total purchase price even though the quantity cut, removed, or designated for taking is more or less than the total estimated volume or quantity shown above. Undersigned certifies bid was arrived at by bidder or offeror independently, and was tendered without collusion with any other bidder or offeror. In submitting or confirming this bid, undersigned agrees to the foregoing provisions, applicable regulations, and certifies that he is authorized to act as, or on behalf of, the bidder.

Bid submitted on *(date)*

*(Check appropriate box, sign in ink, and complete the following)*

<input type="checkbox"/> Signature, if firm is individually owned	Name of firm <i>(type or print)</i>
<input type="checkbox"/> Signatures, if firm is a partnership or L.L.C.	Business address, include zip code <i>(type or print)</i>
<input type="checkbox"/> Corporation organized under the state laws of	<i>(To be completed following oral bidding)</i>
Signature of Authorized Corporate Signing Officer	I HEREBY confirm the above oral bid By <i>(signature)</i>
Title	Date
Submit bid, in <i>duplicate</i> , to qualify for either an oral auction or sealed bid sale together with the required bid deposit made payable to the Department of the Interior – BLM.  Oral Auction – Submit to Sales Supervisor prior to closing of qualifying period for tract.	<b>Sealed Bid</b> – Send to District Manager, who issued the sale notice, in a sealed envelope marked on the outside: (1) “Bid for Timber” or (1a) “Vegetative Resources Other Than Timber” (2) Time bids are to be opened (3) Legal description

### NOTICES

The Privacy Act and 43 CFR 2.48(d) require that you be furnished with the following information in connection with the information required by this form.

**AUTHORITY:** 38 FR 6280 and 43 CFR 5442.1

**PRINCIPAL PURPOSE:** To qualify an oral auction bidder, and then if successful, to bind bidder to certain contract conditions.

**ROUTINE USES:** To determine that an individual is qualified to participate in oral auction bidding, and, as surety that bidder will fulfill contract requirements.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing this deposit and bid information is necessary only when an individual wishes to participate in a sealed or auction bid sale for timber or vegetative resources.

(Continued on page 3)

(Form 5440-9, page 2)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Timber - Sale - Summary

Coos Bay  
Lucky Stars VRH  
ORC00-TS-2015.0002

Legal Description

Forest Type	Township	Range	Section	Subdivision
O&C	23S	9W	19	SW 1/4, W1/2 SE 1/4

Cutting Volume (16' MBF)

Unit	DF	WH	RA	GF	BLM				Total	Regen	Partial	ROW
1	1,957	132	32	17	7				2,145	57	0	0
2	471	63	13	2	1				550	15	0	0
RW	14	1	1						16	0	0	1
3	416	1	2	1	6				426	12	0	0
Totals	2,858	197	48	20	14				3,137	84	0	1

Logging Costs per 16' MBF

Stump to Truck	\$	134.01
Transportation	\$	69.03
Road Construction	\$	21.28
Road Amortization	\$	0.00
Road Maintenance	\$	7.60

Other Allowances :

Landing pullback	\$ 0.36
Slash Disposal	\$ 20.96
Vehicle Washing	\$ 0.41
<b>Total Other Allowances :</b>	<b>\$ 21.73</b>

Total Logging Costs per 16' MBF

**\$ 253.65**

Utilization Centers

Center #1 : Winchester 70 Miles  
Center #1 : Millington 64 Miles  
Weighted distance to Utilization Centers 70

Length of Contract

Cutting and Removal Time 36 Months  
Personal Property Removal Time 1 Months

Profit & Risk

Total Profit & Risk	14 %
Basic Profit & Risk	11 % + Additional Risk 3 %
Back Off	0 %

Tract Features

Avg Log	Douglas-fir : 108 bf	All : 106 bf
Recovery	Douglas-fir : 95 %	All : 95 %
Salvage	Douglas-fir : 0 %	All : 0 %
Avg Volume ( 16' MBF per Acre)		37
Avg Yarding Slope		60 %
Avg Yarding Distance (feet)		397
Avg Age		65
Volume Cable		99 %
Volume Ground		1 %
Volume Aerial		0 %
Road Construction Stations		0.00
Road Improvement Stations		0.00
Road Renovation Stations		174.37
Road Decommission Stations		0.00

Cruise

Cruised By	Davis, Kirkland, Morgan
Date	06/01/2013
Type of Cruise	3P, 100%
County, State	Douglas, OR

Net Volume

Green (16' MBF)	3,137
Salvage (16' MBF)	0
Douglas-fir Peeler	0
Export Volume	0
Sealing Allowance (\$0.75 per 16' MBF)	\$2,352.75

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Coos Bay  
Lucky Stars VRH  
ORC00-TS-2015.0002

**Stumpage Summary**

**Stumpage Computation (16' MBF)**

Species	Trees	Net Volume	Pond Value	(-) Profit & Risk	(-) Logging Cost	(+) Marginal Log Value	(-) Back Off	Appraised Price	Appraised Value
DF	5,127	2,858	\$ 495.66	\$ 69.39	\$ 253.65			\$ 172.60	\$ 493,290.80
WH	437	197	\$ 394.16	\$ 55.18	\$ 253.65			\$ 85.30	\$ 16,804.10
RA	379	48	\$ 404.59	\$ 56.64	\$ 253.65			\$ 94.30	\$ 4,526.40
GF	34	20	\$ 395.80	\$ 55.41	\$ 253.65			\$ 86.70	\$ 1,734.00
BLM	385	14	\$ 39.29	\$ 5.50	\$ 253.65			\$ 3.90	\$ 54.60
<b>Totals</b>	<b>6,362</b>	<b>3,137</b>							<b>\$ 516,409.90</b>

**Log Code by Percent**

Species	Code #1	Code #2	Code #3	Code #4	Code #5	Code #6
Douglas-fir				80.0	19.0	1.0
Western Hemlock				80.0	17.0	3.0
Grand Fir				83.0	15.0	2.0
Red Alder		24.0	41.0	35.0		
Bigleaf Maple				100.0		

**Marginal Log Volume**

Species	Grade #7	Grade #8
Douglas-fir		
Western Hemlock		
Grand Fir		
Red Alder		
Bigleaf Maple		

**Appraised By :** Kirkland, Travis

**Date :** 02/02/2015

**Area Approval By :** Kirkland, Travis

**Date :** 03/18/2015

**District Approval By :** Davis, Brian

**Date :** 07/21/2015

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Coos Bay  
Lucky Stars VRH  
ORC00-TS-2015.0002

Prospectus

Appraisal Method : (16' MBF)

Species	Trees	Net Volume 16' MBF	Net Volume 32' MBF	Net Volume CCF
Douglas-fir	5,127	2,858	2,293	
Western Hemlock	437	197	157	
Red Alder	379	48	37	
Grand Fir	34	20	16	
Bigleaf Maple	385	14	11	
<b>Total</b>	<b>6,362</b>	<b>3,137</b>	<b>2,514</b>	

All Species

Gross Volume	Number Trees	Avg bf Volume Per Tree	DBH	Gross Merch Volume	Merch Logs	Avg bf Gross Merch Log
3,306	6,362	519	19.8	3,278	31,028	106

Merch Logs	Cull Logs	Total Logs	Logs per Tree	Net Volume	Gross Volume	Recovery
31,028	863	31,891	5.0	3,137	3,306	95 %

Douglas-fir

Gross Volume	Number Trees	Avg bf Volume Per Tree	DBH	Gross Merch Volume	Merch Logs	Avg bf Gross Merch Log
3,001	5,127	585	21.1	2,984	27,526	108

Merch Logs	Cull Logs	Total Logs	Logs per Tree	Net Volume	Gross Volume	Recovery
27,526	593	28,119	5.5	2,858	3,001	95 %

Cutting Areas

Unit	Regen Acres	Partial Cut Acres	Right Of Way Acres	Total Acres
1	57			57
2	15			15
RW			1	1
3	12			12
<b>Totals :</b>	<b>84</b>		<b>1</b>	<b>85</b>

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**Summary of All Roads and Projects**

Updated: 5/1/2013

T.S. Contract Name: Lucky Stars VRH    Tract No:    Sale Date:

Prepared by: JRM    Ph:    Print Date:

Construction: 0.00 sta

Improve: 0.00 sta    Renov: 174.37 sta    Decom: 0.00 sta    Temp: 0.00 sta

200 Clearing and Grubbing: 0.0 acres .....	\$0.00
Clearing: 0.0 sta    Grubbing: 0.0 acres	
Slash Treatment: 0.0 acres	
300 Excavation: .....	\$0.00
Haul: 0 sta-yds	
400 Drainage: .....	\$12,501.98
Culvert: 0 lf    wt = 0 lbs	
DownSpout: 60 lf	
PolyPipe: 260 lf	
500 Renovation: .....	\$12,299.91
Blading 3.30 mi	
Surfacing: .....	\$32,042.08
Quarry Name: 1.5-0" BLM    1,272 cy	
Quarry Name: 3-0" BLM    1,600 cy	
Quarry Name: 3-0" BLM LR    480 cy	
Quarry Name: 6-0" WWD    20 cy	
1300 Geotextiles: .....	\$0.00
1400 Slope Protection: .....	\$557.10
Gradation Class 4: 15 cy	
1800 Soil Stabilization: 1.0 acres .....	\$588.34
Includes Small Quantity Factor of 1.60	
1900 Cattleguards: .....	\$0.00
2100 RoadSide Brushing: 8.1 acres .....	\$3,507.08
2300 Engineering: 0.00 sta. ....	\$0.00
2400 Minor Concrete: .....	\$0.00
2500 Gabions: .....	\$0.00
8000 Miscellaneous: .....	\$0.00
Mobilization: Const. \$5,268.00    Surf. \$0.00.....	\$5,268.00
Quarry Development: .....	\$0.00

Total =    \$66,764.49

**Notes:**

Quantities shown are estimates only and not pay items.

Surfacing Quantities are COMPACTED in place cubic yards.

\*\* Landing, spot, and bedding rock are truck yards.

# ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Lucky Stars VRH Sale Date:

**Road Number: 23-9-19.2 R** Road Name:

Road Renovation: 0.06 mi 16 ft Subgrade 0 ft ditch 5/1/2013

200 Clearing and Grubbing: 0.0 acres .....	\$0.00
Clearing:0.0 sta    Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation: .....	\$0.00
400 Drainage: .....	\$0.00
Culvert: 0 lf    wt = 0 lbs    factor = 1.2	
DownSpout: 0 lf	
PolyPipe: 0 lf	
500 Renovation: .....	\$223.86
Blading 0.06 mi	
Surfacing: .....	\$73.35
Quarry Name: 3-0" BLM 10 cy	
1300 Geotextiles: .....	\$0.00
1400 Slope Protection: .....	\$0.00
1800 Soil Stabilization: 0.0 acres .....	\$0.00
1900 Cattleguards: .....	\$0.00
2100 RoadSide Brushing: 0.2 acres .....	\$55.67
2300 Engineering: 0.00 sta. ....	\$0.00
2400 Minor Concrete: .....	\$0.00
2500 Gabions: .....	\$0.00
8000 Miscellaneous: .....	\$0.00
Mobilization: Const. \$30.23 Surf. \$0.00.....	\$30.23
Quarry Development: .....	\$0.00

Total: \$383.11

## Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.



Road Construction Worksheet

Road Number: 23-9-19.2 R Road Name:

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Subtotal: \$0.00

Section 500 Renovation:

Blading:  $\$519.72/\text{mi} \times 0.06 \text{ mi} = \$31.18$

Compaction:  $\$1329.15/\text{mi} \times 0.06 \text{ mi} = \$79.75$

Earthen barrier fill & compact

Excavator 235B (1.75 CY) 1 hr  $\times \$112.93/\text{hr} = \$112.93$

Subtotal: \$223.86

3-0" Agg. Quarry Name: 3-0" BLM

Comment: Sta. 0+00 resurfacing

<u>Length</u>	<u>TopW</u>	<u>BotW</u>	<u>Depth</u>	<u>CWid</u>	<u>#TOs</u>	<u>Width</u>	<u>F.W.L</u>	<u>Taper</u>	<u>Other</u>
									10cy

Rock Volume = 10cy

Processing:  $\$1.40/\text{cy} \times 10\text{cy} = \$14.00$

Compaction:  $\$0.79/\text{cy} \times 10\text{cy} = \$7.90$

Stockpiling:  $\$1.39/\text{cy} \times 10\text{cy} = \$13.90$

Basic Rock Haul cost:  $\$0.93/\text{cy} \times 10\text{cy} = \$9.30$

Rock Haul -15% grades:  $\$1.39/\text{cy-mi} \times 10\text{cy} \times 1.50 \text{ mi} = \$20.85$

Basic Water Haul cost:  $\$0.61/\text{cy} \times 10\text{cy} = \$6.10$

Water Haul -15% grades:  $\$0.13/\text{cy-mi} \times 10\text{cy} \times 1.00 \text{ mi} = \$1.30$

Subtotal: \$73.35

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Subtotal: \$0.00

Section 1800 Soil Stabilization:

Subtotal: \$0.00

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Brushing width Left: 10ft. Right: 10ft.

RoadSide Brushing Light:  $\$278.34/\text{acre} \times 0.20 \text{ acres} = \$55.67$

Subtotal: \$55.67

Section 2300 Engineering:

Subtotal: \$0.00

Mobilization:

Construction - 0.57% of total Costs = \$30.23

Surfacing - 0.30% by rock volume = \$0.00

Subtotal: \$30.23

Quarry Development:

Based on 0.30% of total rock volume

Subtotal: \$0.00

Total: \$383.11

# ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Lucky Stars VRH Sale Date:

**Road Number: 23-9-20.0 R** Road Name:

Road Renovation: 1.44 mi 16 ft Subgrade 2 ft ditch 5/1/2013

200 Clearing and Grubbing: 0.0 acres ..... \$0.00  
 Clearing:0.0 sta Grubbing:0.0 acres  
 Slash Treatment:0.0 acres

300 Excavation: ..... \$0.00

400 Drainage: ..... \$10,737.38  
 Culvert: 0 lf wt = 0 lbs factor = 1.2  
 DownSpout: 40 lf  
 PolyPipe: 230 lf

500 Renovation: ..... \$5,475.79  
 Blading 1.44 mi

Surfacing: ..... \$17,295.38  
 Quarry Name: 1.5-0" BLM 1,272 cy  
 Quarry Name: 3-0" BLM LR 20 cy  
 Quarry Name: 6-0" WWD 20 cy

1300 Geotextiles: ..... \$0.00

1400 Slope Protection: ..... \$557.10  
 Gradation Class 4: 15 cy

1800 Soil Stabilization: 0.5 acres ..... \$294.17  
 Includes Small Quantity Factor of 1.60

1900 Cattleguards: ..... \$0.00

2100 RoadSide Brushing: 3.5 acres ..... \$974.19

2300 Engineering: 0.00 sta. .... \$0.00

2400 Minor Concrete: ..... \$0.00

2500 Gabions: ..... \$0.00

8000 Miscellaneous: ..... \$0.00

Mobilization: Const. \$3,026.83 Surf. \$0.00..... \$3,026.83

Quarry Development: ..... \$0.00

Total: \$38,360.84

## Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

# Road Construction Worksheet

Road Number: 23-9-20.0 R Road Name:

## Section 200 Clearing and Grubbing:

Subtotal: \$0.00

## Section 300 Excavation:

Subtotal: \$0.00

## Section 400 Drainage:

Full Round MP 0.13 18 inch 20 ea x \$20.65/ea = \$413.00  
 Full Round MP 1.13 18 inch 20 ea x \$20.65/ea = \$413.00  
 Poly Pipe MP 0.13 18 inch 30 ea x \$24.22/ea = \$726.60  
 Poly Pipe MP 0.31 18 inch 30 ea x \$24.22/ea = \$726.60  
 Poly Pipe MP 0.82 18 inch 30 ea x \$24.22/ea = \$726.60  
 Poly Pipe MP 0.88 18 inch 30 ea x \$24.22/ea = \$726.60  
 Poly Pipe MP 1.00 18 inch 40 ea x \$24.22/ea = \$968.80  
 Poly Pipe MP 1.13 18 inch 40 ea x \$24.22/ea = \$968.80  
 Poly Pipe MP 1.40 18 inch 30 ea x \$24.22/ea = \$726.60

### Culvert parts

markers 7 EA x \$10.00/EA = \$70.00  
 anchors 8 EA x \$10.00/EA = \$80.00

### Existing culvert

removal & disposal 7 EA x \$50.00/EA = \$350.00

### Water dissipater

Excavator 215B (1 CY) 2 hr x \$82.89/hr = \$165.78

### Culvert bedding & resurfacing

1.5" minus crushed aggregate 105 CY x \$35.00/CY = \$3,675.00

Subtotal: \$10,737.38

## Section 500 Renovation:

Blading: \$519.72/mi x 1.44 mi = \$748.40  
 Pull Ditches: \$140.38/mi x 1.44 mi = \$202.15  
 Compaction: \$1329.15/mi x 1.44 mi = \$1,913.98  
 Clean Culverts: \$270.05/mi x 1.44 mi = \$388.87  
 Multiple slide removal  
 Backhoe 24 inch 15 hr x \$73.88/hr = \$1,108.20  
 Dump truck 10 cy 15 hr x \$74.28/hr = \$1,114.20

Subtotal: \$5,475.79

## 1.5-0" Agg. Quarry Name: 1.5-0" BLM

Length	TopW	BotW	Depth	CWid	#Tos	Width	F.W.L	Taper	Other
1.44mi	12ft	13.33ft							
			4in	7%					

Rock Volume = 1,272cy  
 Processing: \$1.40/cy x 1,272cy = \$1,780.80  
 Compaction: \$0.79/cy x 1,272cy = \$1,004.88  
 Stockpiling: \$1.39/cy x 1,272cy = \$1,768.08  
 Basic Rock Haul cost: \$0.93/cy x 1,272cy = \$1,182.96  
 Rock Haul -15% grades: \$1.39/cy-mi x 1,272cy x 1.50 mi= \$2,652.12  
 Rock Haul St& Co Roads: \$0.62/cy-mi x 1,272cy x 9.00 mi= \$7,097.76  
 Basic Water Haul cost: \$0.61/cy x 1,272cy = \$775.92  
 Water Haul -15% grades: \$0.13/cy-mi x 1,272cy x 1.00 mi= \$165.36

## 3-0" Agg. LR Quarry Name: 3-0" BLM LR

Comment: MP 0.35 base rock

Length	TopW	BotW	Depth	CWid	#Tos	Width	F.W.L	Taper	Other
									20cy

Rock Volume = 20cy  
 Processing: \$1.40/cy x 20cy = \$28.00  
 Stockpiling: \$1.39/cy x 20cy = \$27.80  
 Basic Rock Haul cost: \$0.93/cy x 20cy = \$18.60

Road Number: 23-9-20.0 R Continued

Rock Haul -15% grades: \$1.39/cy-mi x 20cy x 1.50 mi= \$41.70

Basic Water Haul cost: \$0.61/cy x 20cy = \$12.20

Water Haul -15% grades: \$0.13/cy-mi x 20cy x 1.00 mi= \$2.60

6-0" Jaw run Quarry Name: 6-0" WWD

Comment: MP 0.86 ditch cover

<u>Length</u>	<u>TopW</u>	<u>BotW</u>	<u>Depth</u>	<u>CWid</u>	<u>#TOs</u>	<u>Width</u>	<u>F.W.L</u>	<u>Taper</u>	<u>Other</u>
									20cy

Rock Volume = 20cy

Royalty: \$9.00/cy x 20cy = \$180.00

Processing: \$1.40/cy x 20cy = \$28.00

Compaction: \$0.79/cy x 20cy = \$15.80

Basic Rock Haul cost: \$0.93/cy x 20cy = \$18.60

Rock Haul -15% grades: \$1.39/cy-mi x 20cy x 11.00 mi= \$305.80

Rock Haul St& Co Roads: \$0.62/cy-mi x 20cy x 14.00 mi= \$173.60

Basic Water Haul cost: \$0.61/cy x 20cy = \$12.20

Water Haul -15% grades: \$0.13/cy-mi x 20cy x 1.00 mi= \$2.60

Subtotal: \$17,295.38

Section 1300 Geotextiles:

Subtotal: \$0.00

Section 1400 Slope Protection:

Comment: water dissipater

Rock Source: Riprap WWD

Royalty fee: \$10.00/cy x 15cy = \$150.00

Furnish Class 4 type rock

Basic Rock Haul cost: \$1.30/cy x 15cy = \$19.50

Rock Haul -15% grades: \$1.30/cy-mi x 15cy x 11.00 mi= \$214.50

Rock Haul St& Co Roads: \$0.58/cy-mi x 15cy x 14.00 mi= \$121.80

Placement on Fill slopes: 15cy x \$3.42/cy = \$51.30

Subtotal: \$557.10

Section 1800 Soil Stabilization:

Comment: Slides, culverts, and waste area

Dry Method with Mulch: \$588.34/acre x 0.50 acres = \$294.17

Includes Small Quantity Factor of 1.60

Subtotal: \$294.17

Section 1900 Cattleguards:

Subtotal: \$0.00

Section 2100 Roadside Brushing:

Brushing width Left: 10ft. Right: 10ft.

RoadSide Brushing Light: \$278.34/acre x 3.50 acres = \$974.19

Subtotal: \$974.19

Section 2300 Engineering:

Subtotal: \$0.00

Surfacing - 38.91% by rock volume = \$0.00

Subtotal: \$3,026.83

Quarry Development:

Based on 38.91% of total rock volume

Subtotal: \$0.00

Total: \$38,360.84

# ROAD CONSTRUCTION SUMMARY

T.S. Contract Name: Lucky Stars VRH Sale Date:

**Road Number: 23-9-29.4 R** Road Name:

Road Renovation: 1.80 mi 16 ft Subgrade 2 ft ditch 5/1/2013

200 Clearing and Grubbing: 0.0 acres .....	\$0.00
Clearing:0.0 sta    Grubbing:0.0 acres	
Slash Treatment:0.0 acres	
300 Excavation: .....	\$0.00
400 Drainage: .....	\$1,764.60
Culvert: 0 lf    wt = 0 lbs    factor = 1.2	
DownSpout: 20 lf	
PolyPipe: 30 lf	
500 Renovation: .....	\$6,600.26
Blading 1.80 mi	
Surfacing: .....	\$14,673.35
Quarry Name: 3-0" BLM 1,590 cy	
Quarry Name: 3-0" BLM LR 460 cy	
1300 Geotextiles: .....	\$0.00
1400 Slope Protection: .....	\$0.00
1800 Soil Stabilization: 0.5 acres .....	\$294.17
Includes Small Quantity Factor of 1.60	
1900 Cattleguards: .....	\$0.00
2100 RoadSide Brushing: 4.4 acres .....	\$2,477.23
2300 Engineering: 0.00 sta. ....	\$0.00
2400 Minor Concrete: .....	\$0.00
2500 Gabions: .....	\$0.00
8000 Miscellaneous: .....	\$0.00
Mobilization: Const. \$2,210.94 Surf. \$0.00.....	\$2,210.94
Quarry Development: .....	\$0.00
Total:	\$28,020.54

## Notes:

Quantities shown are estimates only and not pay items.

Surfacing Quantities shown are COMPACTED in place cubic yards.

# Road Construction Worksheet

Road Number: 23-9-29.4 R Road Name:

Section 200 Clearing and Grubbing:

Subtotal: \$0.00

Section 300 Excavation:

Subtotal: \$0.00

Section 400 Drainage:

Full Round MP 0.10 18 inch 20 ea x \$20.65/ea = \$413.00

Poly Pipe MP 0.10 18 inch 30 ea x \$24.22/ea = \$726.60

Culvert parts

marker 1 EA x \$10.00/EA = \$10.00

anchors 4 EA x \$10.00/EA = \$40.00

Existing culvert

removal & disposal 1 EA x \$50.00/EA = \$50.00

Cuvert bedding & resurfacing

1.5" minus crushed aggregate 15 CY x \$35.00/CY = \$525.00

Subtotal: \$1,764.60

Section 500 Renovation:

Blading: \$519.72/mi x 1.80 mi = \$935.50

Pull Ditches: \$140.38/mi x 1.80 mi = \$252.68

Compaction: \$1329.15/mi x 1.80 mi = \$2,392.47

Clean Culverts: \$270.05/mi x 1.80 mi = \$486.09

Multiple landing construction

Tractor: D7 with rippers 8 hr x \$149.65/hr = \$1,197.20

Landings MPs 1.19 & 1.55

Backhoe 24 inch 5 hr x \$73.88/hr = \$369.40

Dump truck 10 cy 5 hr x \$74.28/hr = \$371.40

Vibratory roller, Steel Drum 2 hr x \$75.52/hr = \$151.04

Multiple slide removal

Backhoe 24 inch 3 hr x \$73.88/hr = \$221.64

Dump truck 10 cy 3 hr x \$74.28/hr = \$222.84

Subtotal: \$6,600.26

3-0" Agg. Quarry Name: 3-0" BLM

Length	TopW	BotW	Depth	CWid	#TOs	Width	F.W.L	Taper	Other
1.80mi	12ft	13.33ft							

4in 7%

Rock Volume = 1,590cy

Processing: \$1.40/cy x 1,590cy = \$2,226.00

Compaction: \$0.79/cy x 1,590cy = \$1,256.10

Stockpiling: \$1.39/cy x 1,590cy = \$2,210.10

Basic Rock Haul cost: \$0.93/cy x 1,590cy = \$1,478.70

Rock Haul -15% grades: \$1.39/cy-mi x 1,590cy x 1.50 mi= \$3,315.15

Basic Water Haul cost: \$0.61/cy x 1,590cy = \$969.90

Water Haul -15% grades: \$0.13/cy-mi x 1,590cy x 1.00 mi= \$206.70

3-0" Agg. LR Quarry Name: 3-0" BLM LR

Comment: Landings

Length	TopW	BotW	Depth	CWid	#TOs	Width	F.W.L	Taper	Other
									460cy

Rock Volume = 460cy

Processing: \$1.40/cy x 460cy = \$644.00

Stockpiling: \$1.39/cy x 460cy = \$639.40

Basic Rock Haul cost: \$0.93/cy x 460cy = \$427.80

Rock Haul -15% grades: \$1.39/cy-mi x 460cy x 1.50 mi= \$959.10

Basic Water Haul cost: \$0.61/cy x 460cy = \$280.60

Water Haul -15% grades: \$0.13/cy-mi x 460cy x 1.00 mi= \$59.80

Subtotal: \$14,673.35

Section 1300 Geotextiles:	Subtotal:	\$0.00
Section 1400 Slope Protection:	Subtotal:	\$0.00
Section 1800 Soil Stabilization: Comment: Slides, culvert, and landings Dry Method with Mulch: \$588.34/acre x 0.50 acres = \$294.17 Includes Small Quantity Factor of 1.60	Subtotal:	\$294.17
Section 1900 Cattleguards:	Subtotal:	\$0.00
Section 2100 Roadside Brushing: Brushing width Left: 10ft. Right: 10ft. RoadSide Brushing Light: \$278.34/acre x 2.90 acres = \$807.19 RoadSide Brushing Heavy: \$1113.36/acre x 1.50 acres = \$1,670.04	Subtotal:	\$2,477.23
Section 2300 Engineering:	Subtotal:	\$0.00
Section 2400 Minor Concrete:	Subtotal:	\$0.00
Section 2500 Gabions:	Subtotal:	\$0.00
Section 8000 Miscellaneous:	Subtotal:	\$0.00
Mobilization: Construction - 41.97% of total Costs = \$2,210.94 Surfacing - 60.79% by rock volume = \$0.00	Subtotal:	\$2,210.94
Quarry Development: Based on 60.79% of total rock volume	Subtotal:	\$0.00
	Total:	\$28,020.54

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**Mobilization Costs - Construction and Surfacing**

T.S. Contract Name: Lucky Stars VRH Sale Date:

Average Mobilization distance = 50 miles Factor = 1.00

Mobilization: Construction

Comment: Lump sum = Equipment wash

Fire Equipment:	1 ea x (1.00 x \$132.00/ea + 0 mi x \$3.51/mi)=	\$132.00
Graders-all:	1 ea x (1.00 x \$356.00/ea + 0 mi x \$13.91/mi)=	\$356.00
Brush Cutter:	1 ea x (1.00 x \$356.00/ea) =	\$356.00
Rollers & Comp:	1 ea x (1.00 x \$356.00/ea + 0 mi x \$15.10/mi)=	\$356.00
Excavators:	1 ea x (1.00 x \$688.00/ea + 0 mi x \$22.59/mi)=	\$688.00
RTBackhoes 24/30:	1 ea x (1.00 x \$356.00/ea + 0 mi x \$4.93/mi)=	\$356.00
Tractors <= D7:	1 ea x (1.00 x \$522.00/ea + 0 mi x \$29.75/mi)=	\$522.00
Dump Truck<=10cy:	1 ea x (1.00 x \$185.00/ea + 0 mi x \$3.70/mi)=	\$185.00
Water Truck:	1 ea x (1.00 x \$217.00/ea + 0 mi x \$4.33/mi)=	\$217.00
Lump Sum:		\$2,100.00

Subtotal: \$5,268.00

Mobilization: Surfacing

Subtotal: \$0.00



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**Summary of Construction Quantities**

T.S. Contract Name: Lucky Stars VRH    Sale Date:

Road Number	Const	Improv	Renov	Decomm	Temp
23-9-19.2 R			3.30		
23-9-20.0 R			76.03		
23-9-29.4 R			95.04		

Total Sta:			174.37		
------------	--	--	--------	--	--

200 Clearing and Grubbing**	Clearing stations	Grubbing acres	Slash acres
-----------------------------	----------------------	-------------------	----------------

Totals:	0.00	0.0	0.0
---------	------	-----	-----

\*\* Included in Time and Equipment for Excavation.

300 Excavation	Excav C.Y.s	Haul sta-yds
----------------	----------------	-----------------

Totals:	0	0
---------	---	---

400 Drainage

23-9-20.0 R	MP 0.13	Full Round	18 inch	20 lf
23-9-20.0 R	MP 1.13	Full Round	18 inch	20 lf
23-9-29.4 R	MP 0.10	Full Round	18 inch	20 lf
23-9-20.0 R	MP 0.13	Poly Pipe	18 inch	30 lf
23-9-20.0 R	MP 0.31	Poly Pipe	18 inch	30 lf
23-9-20.0 R	MP 0.82	Poly Pipe	18 inch	30 lf
23-9-20.0 R	MP 0.88	Poly Pipe	18 inch	30 lf
23-9-20.0 R	MP 1.00	Poly Pipe	18 inch	40 lf
23-9-20.0 R	MP 1.13	Poly Pipe	18 inch	40 lf
23-9-20.0 R	MP 1.40	Poly Pipe	18 inch	30 lf
23-9-29.4 R	MP 0.10	Poly Pipe	18 inch	30 lf

Culvert bedding & resurfacing    23-9-20.0 R

1.5" minus crushed aggregate . . . . . 105 CY

Culvert parts    23-9-29.4 R

marker . . . . . 1 EA

anchors . . . . . 4 EA

Culvert parts    23-9-20.0 R

markers . . . . . 7 EA

anchors . . . . . 8 EA

Cuvert bedding & resurfacing    23-9-29.4 R

1.5" minus crushed aggregate . . . . . 15 CY

Existing culvert    23-9-29.4 R

removal & disposal . . . . . 1 EA

Existing culvert    23-9-20.0 R

removal & disposal . . . . . 7 EA

Water dissipater    23-9-20.0 R

Excavator 215B (1 CY) . . . . . 2 hr

500 Renovation

	Miles	Slide cy
23-9-19.2 R	0.06	0
23-9-20.0 R	1.44	0
23-9-29.4 R	1.80	0

Totals:	3.30	0
---------	------	---

# Continuation of Construction Quantities

Earthen barrier fill & compact	23-9-19.2 R	
Excavator 235B (1.75 CY)		1 hr
Landings MPs 1.19 & 1.55	23-9-29.4 R	
Backhoe 24 inch		5 hr
Dump truck 10 cy		5 hr
Vibratory roller, Steel Drum		2 hr
Multiple landing construction	23-9-29.4 R	
Tractor: D7 with rippers		8 hr
Multiple slide removal	23-9-29.4 R	
Backhoe 24 inch		3 hr
Dump truck 10 cy		3 hr
Multiple slide removal	23-9-20.0 R	
Backhoe 24 inch		15 hr
Dump truck 10 cy		15 hr

## Surfacing (Cubic Yards)

Quarry Name: 1.5-0" BLM

1.5-0" Agg.	Roadway	Turnouts	Other	
23-9-20.0 R	1,272	0	0	1,272
Totals:	1,272	0	0	1,272

Quarry Name: 3-0" BLM

3-0" Agg.	Roadway	Turnouts	Other	
23-9-29.4 R	1,590	0	0	1,590
23-9-19.2 R	0	0	10	10
Totals:	1,590	0	10	1,600

Quarry Name: 3-0" BLM LR

3-0" Agg. LR	Roadway	Turnouts	Other	
23-9-29.4 R	0	0	460	460
23-9-20.0 R	0	0	20	20
Totals:	0	0	480	480

Quarry Name: 6-0" WWD

6-0" Jaw run	Roadway	Turnouts	Other	
23-9-20.0 R	0	0	20	20
Totals:	0	0	20	20

Quarry Name: Riprap WWD

Riprap	Roadway	Turnouts	Other	
Totals:	0	0	0	0

Quarry Name: 1.5-0" WWD (Culvert)

Resurfacing	Roadway	Turnouts	Other	
Totals:	0	0	0	0

1300 Geotextiles

Totals: No Quantities

1400 Slope Protection

Slope Protection Class 4	C.Y.s
23-9-20.0 R	15

## Continuation of Construction Quantities

Totals: 15

1800 Soil stabilization - acres	Dry W/O Mulch	Dry/with Mulch	Hydro Mulch
23-9-20.0 R	0.0	0.5	
23-9-29.4 R	0.0	0.5	
Totals:	<hr/> 0.0	<hr/> 1.0	<hr/> 0.0

1900 Cattleguards

Totals: No Quantities

2100 RoadSide Brushing	acres
23-9-19.2 R	0.2
23-9-20.0 R	3.5
23-9-29.4 R	4.4
Totals:	<hr/> 8.1

2300 Engineering stations

Totals: 

---

0.00

2400 Minor Concrete


Totals: No Quantities

2500 Gabions

Totals: No Quantities

8000 Miscellaneous

Totals: No Quantities

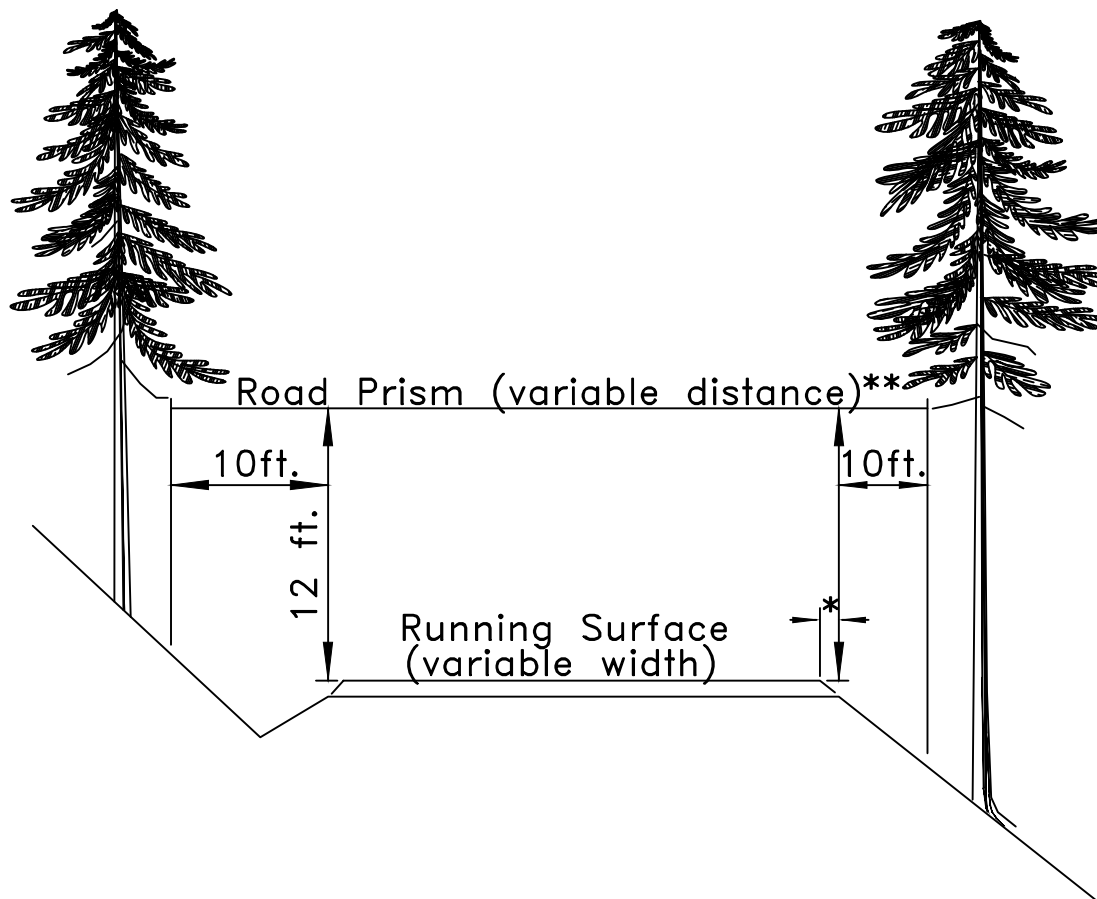

\* Variable distance between running surface and start of fill slope.

\*\* All areas within the variable distance shall be free of all vegetation capable of growing one (1) foot in height or higher, and free of all overhanging limbs and branches 12 feet in elevation above the running surface.

U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

# ROADSIDE BRUSHING DETAIL

DESIGNED J. MENGUITA

REVIEWED J. COUNTS

APPROVED T. BUCHHOLZ

DRAWN JRM SCALE NONE

DATE 09/14 SHEET 8 OF 37

DRAWING NO.

## ESTIMATE OF QUANTITIES\*

ROAD NUMBER	SURFACING					OTHER			SEEDING		OTHER (SEDIMENT CONTROL DEVICES)
	(3-0") BASE ROCK ***	(3-0") LANDING ROCK **	(6-0") JAW RUN **	SURFACE ROCK ***	SPOT ROCK **	CULVERT SURFACING/ BEDDING ROCK **	RIPRAP **	GEO- TEXTIILE	SEED, FERTILIZE AND MULCH		
									1800	1800	
SECTION NO.	1000	1000	1000	1200	1200	400	1400		DRY	HYDRO	
UNITS	C.Y.	C.Y.	C.Y.	C.Y.	C.Y.	C.Y.	C.Y.	S.Y.	ACRES	ACRES	EACH
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
23-9-19.2	10 (A)	(A)	(D)	(C)	(C)	(C)	(A)				
23-9-20.0	(A)	20 (A)	20 (D)	1272 (C)	(C)	105 (C)	15 (A)		0.5		
23-9-29.4	1590 (A)	460 (A)	(D)	(C)	(C)	15 (C)	(A)		0.5		
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D)	(C)	(C)	(C)	(A)				
	(A)	(A)	(D								

\* FOR INFORMATIONAL USE ONLY. QUANTITIES SHOWN ARE NOT PAY ITEMS. \*\*\* BASE AND SURFACE ROCK ARE COMPACTED QUANTITIES.  
\*\* LANDING ROCK, SPOT ROCK, BEDDING ROCK, AND RIPRAP ARE TRUCK MEASUREMENT QUANTITIES.

SECTION	GRADE	SIZE
400	C	1 ½"
700	B	PITRUN
1000	A	3"
	B	4"
	C	2"
	D	6"
1100	B	4"
1200	C	1 ½"
	D	1"
1400	A	10"-34"
CHIP SEAL ROCK	S	¾"

GRADE INDICATED IN CIRCLE ○



U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

### ESTIMATE OF QUANTITIES

DESIGNED	J. MENGUITA
REVIEWED	J. COUNTS
APPROVED	T. BUCHHOLZ

DRAWN JRM	SCALE NONE
DATE 09/14	SHEET 7 OF 37
DRAWING NO.	




ROAD NUMBER	NEW CONSTRUCTION	RENOVATION	IMPROVEMENT	SLASH TREATMENT	GRUBBING	ROADSIDE BRUSHING	SLOPE STAKING	EARTHWORK (DESIGNED)						CPE *1		CMP *2		DOWNSPOUTS *3				
								COMMON	RIPPABLE ROCK	ROCK CUT	FILL	SHORT HAUL 200-5000'	LONG HAUL 5000'+	18"	24"	12"	48"	FULL ROUND		FULL ROUND		MARKERS
																		18" CPE	24" CPE	24" CMP	36" CMP	
SECTION NO.	300	500	500	200	200	2100	2300	300	300	300	300	300	300	400	400	400	400	400	400	400	400	400
UNITS	STA.	STA.	STA.	ACRES	ACRES	STA.	SIDES	C.Y.	C.Y.	C.Y.	YDS.	STA.YD.	YD.MI.	L.F.	L.F.	L.F.	L.F.	L.F.	L.F.	L.F.	L.F.	EA.
23-9-19.2		3.30				3.30																
23-9-20.0		76.03				76.03								230				40				7
23-9-29.4		95.04				95.04								30				20				1
TOTAL		174.37				174.37								260				60				8

\*1 CPE - CORRUGATED POLYETHYLENE PIPE  
\*2 CMP - CORRUGATED METAL PIPE  
\*3 SEE DOWNSPOUT INSTALLATION SHEET



FOR INFORMATIONAL USE ONLY. QUANTITIES SHOWN ARE NOT PAY ITEMS.

## ESTIMATE OF QUANTITIES

DRAWN	JRM	SCALE	NONE
DATE	09/14	SHEET	6 OF 37
DRAWING NO.			

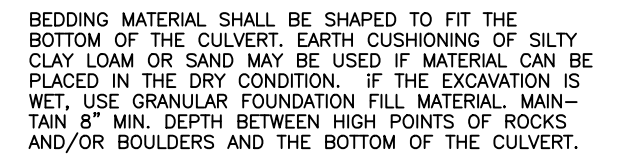

### BEDDING OF CULVERT IN SOLID ROCK OR BOULDER FOUNDATION



## BEDDING OF CULVERTS ON EXISTING SURFACED ROADS

CULVERT

1/2" id x 1" od GALV. WASHER

DOWNSPOUT



5/8" X 4" GALV. PIPE

1/2" X 5" GALV. BOLT

1/2" id x 1" od GALV. WASHER

★ NOTE: ANCHOR DOWNSPOUTS  
ACCORDING TO SECTION 407b  
OF THE ROAD CONSTRUCTION  
SPECIFICATIONS

## CULVERT INSTALLATION TYPES



★INSTALL DOWNSPOUT ANCHORS IN ACCORDANCE WITH SECTION 407b OF THE SPECIFICATIONS.

U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

## CULVERT INSTALLATION DETAILS

DESIGNED J. MENGUITAREVIEWED J. COUNTS

APPROVED T. BUCHHOLZ

DRAWN JRM

SCALE	NONE
-------	------

DATE	09/14
------	-------

SHEET 5 OF 37

**DRAWING NO.**

ALWAYS  
THINK  
SAFETY

[illegible]

NOTES

- ### 1. EXTRA SUBGRADE WIDTHS

ADD TO EACH FILL SHOULDER 1 FT. FOR FILLS OF 1-6 FT.  
AND 2 FT. FOR FILLS OVER 6 FT. WIDEN THE INSIDE  
SHOULDER OF ALL CURVES AS FOLLOWS:

WHEN THE RADIUS OF CURVE EQUALS

270-800 ADD 1FT.  
165-270 ADD 2FT.  
120-165 ADD 3FT.  
90-120 ADD 4FT.  
60-90 ADD 5FT.

OR AS SHOWN ON PLANS.

<u>MATERIALS</u>	<u>CUT SLOPES</u>	<u>FILL SLOPES</u>
COMMON	<u>1/2:1</u>	<u>1 1/2:1</u>
SOFT ROCK & SHALE	<u>1/2:1</u>	<u>1 1/2:1</u>
SOLID ROCK	<u>1/4:1</u>	REPOSE

FULL BENCH CONSTRUCTION IS REQUIRED ON  
SIDE SLOPES EXCEEDING 60%.

- ## 2. SURFACING TYPE

- A. PIT RUN ROCK MATERIAL.
- B. GRID ROLLED ROCK MATERIAL.
- C. SCREENED ROCK MATERIAL.
- D. CRUSHED ROCK MATERIAL.
- E. CLASS 'C' ASPHALT MIX.

- ### 3. SURFACING







- A. TURNOUTS, CURVE WIDENING AND ROAD APPROACH APRONS SHALL BE SURFACED.

- #### 4. DITCHES

- A. 4:1 SLOPE FROM SUBGRADE,  
OR AS OTHERWISE NOTED.  
DEPTH MAY BE EXCEEDED TO  
OBTAIN REQUIRED DRAINAGE.

- ## 5. TURNOUTS

- A. WIDTH 10 FT. IN ADDITION TO SUBGRADE WIDTH, OR AS SHOWN ON THE PLANS.
- B. LOCATED APPROXIMATELY AS SHOWN ON THE ROAD PLANS OR NARRATIVE.

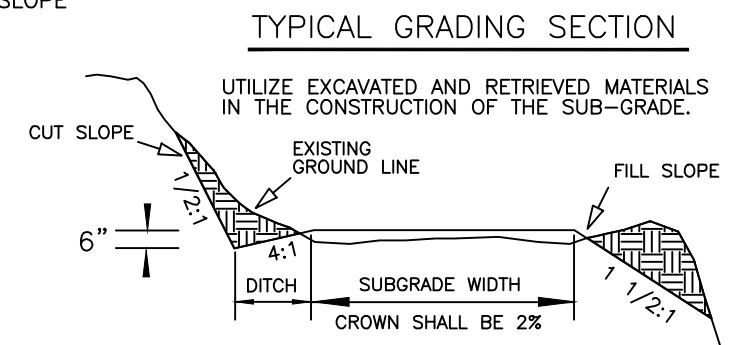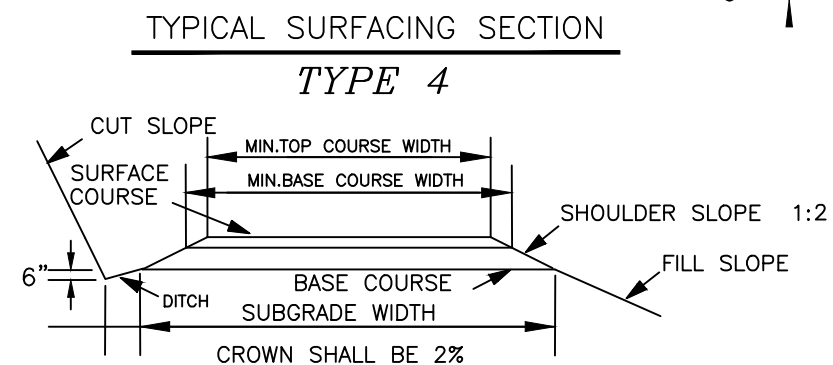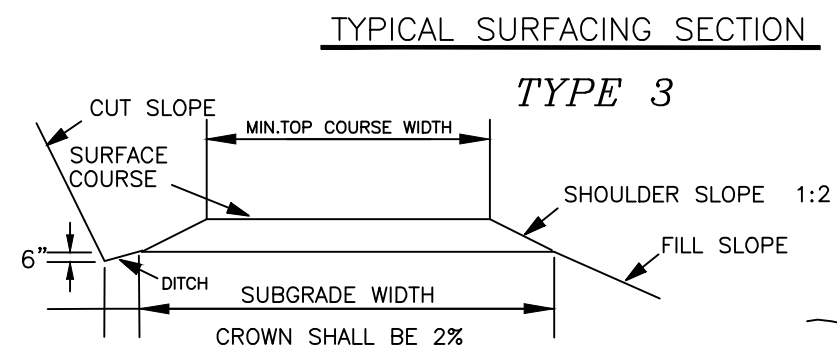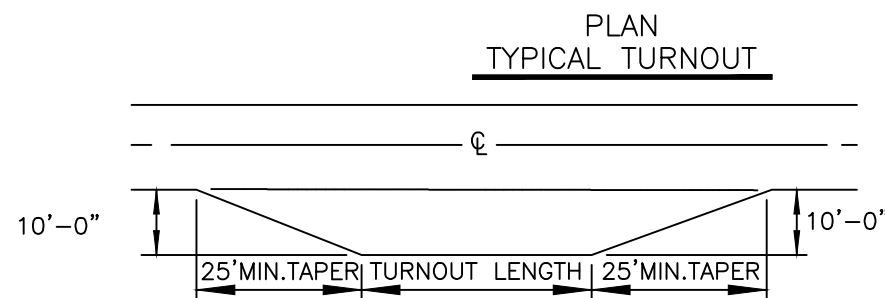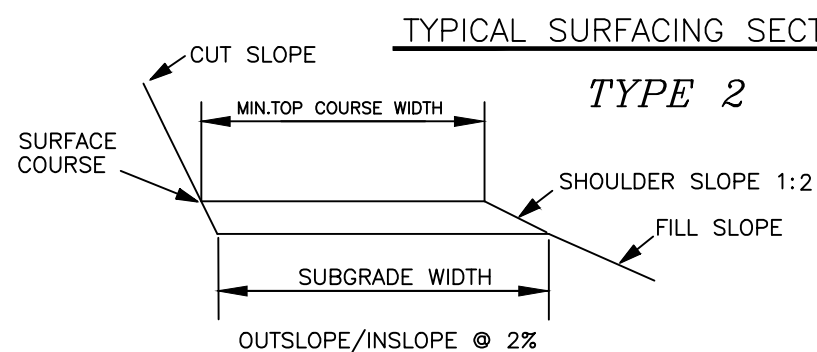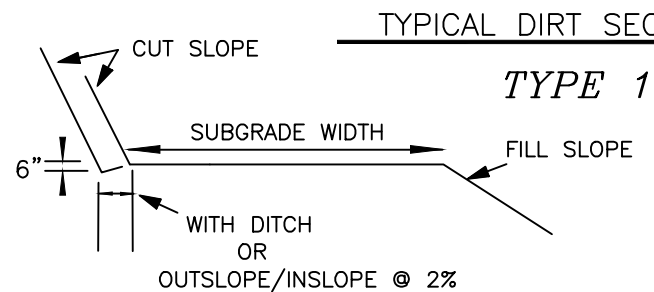

```
** RENOVATION = R
    IMPROVEMENT = I
    CONSTRUCTION = C
```

**ALWAYS  
THINK  
SAFETY**

U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

TYPICAL CROSS SECTION  
DETAIL

DESIGNED J. MENGUITA

REVIEWED J. COUNTS

APPROVED T. BUCHHOLZ

DRAWN	JRM
-------	-----


SCALE	NONE
-------	------

DATE	09/14
DRAWING NO.	

SHEET 4 OF 37

**DRAWING NO.**



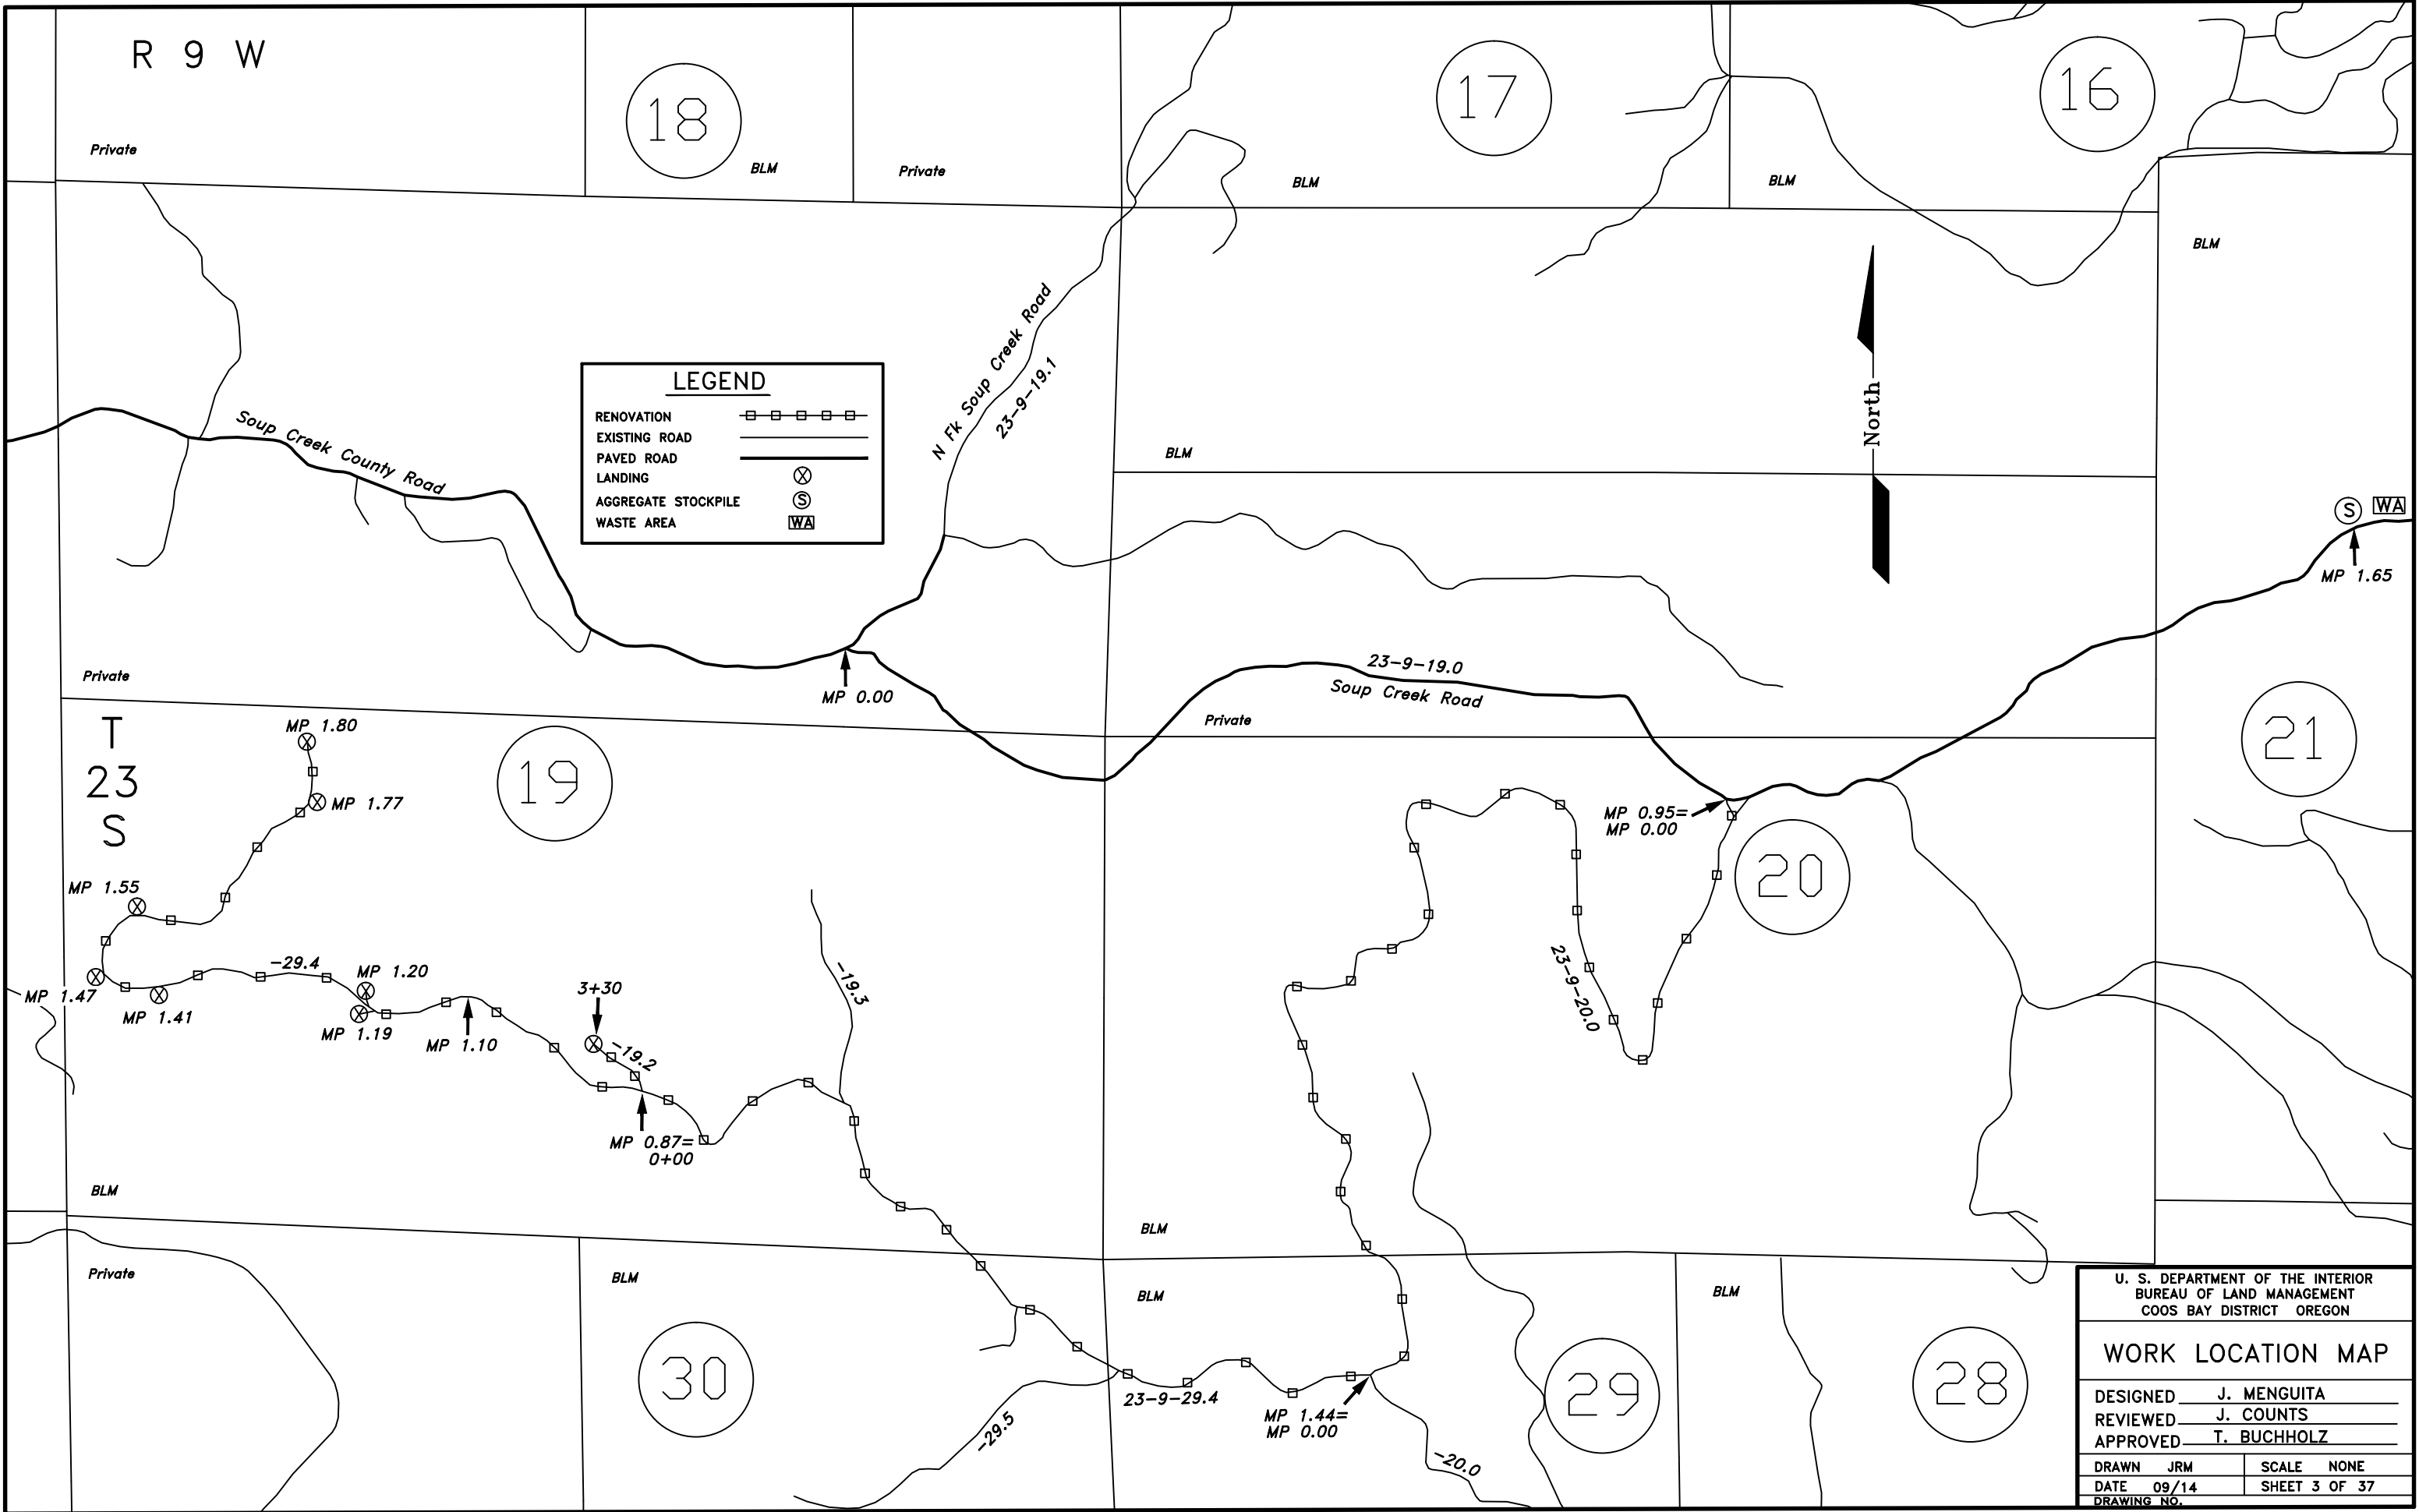


U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

WORK LOCATION MAP

DESIGNED J. MENGUITA  
REVIEWED J. COUNTS  
APPROVED T. BUCHHOLZ

DRAWN JRM	SCALE NONE
DATE 09/14	SHEET 3 OF 37
DRAWING NO.	

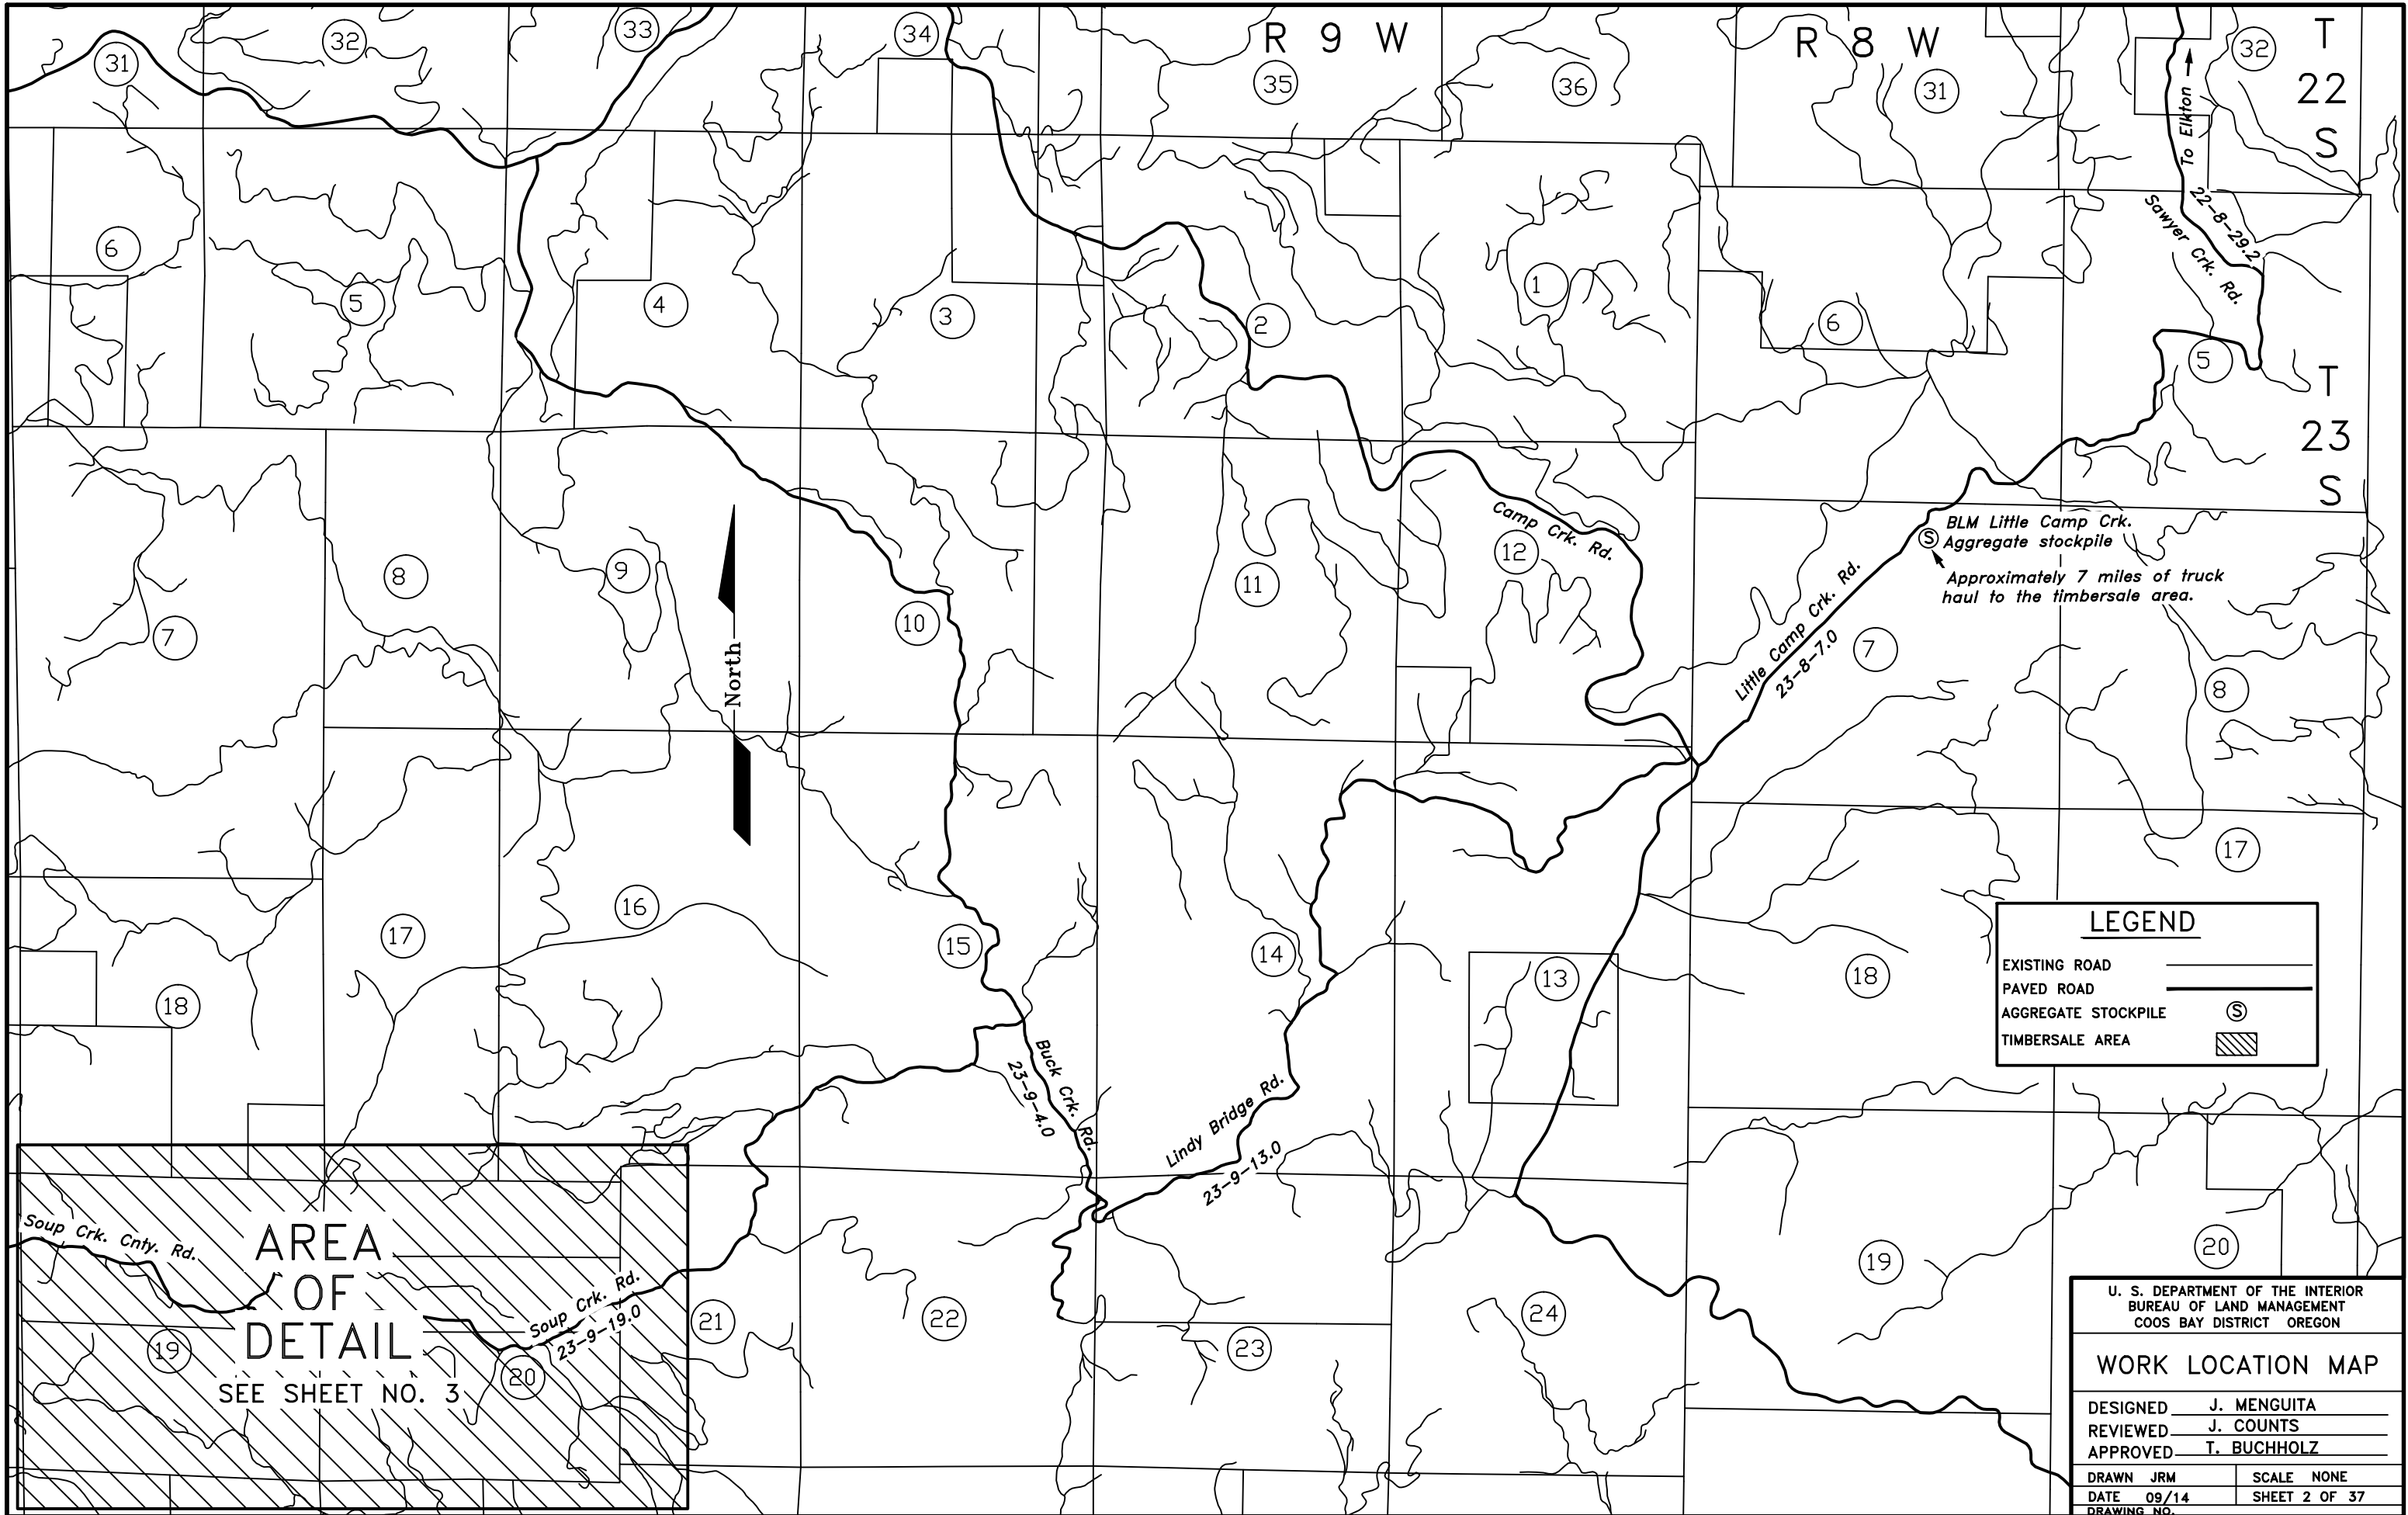

### LEGEND

- EXISTING ROAD
- PAVED ROAD
- AGGREGATE STOCKPILE
- TIMBERSALE AREA

U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

### WORK LOCATION MAP


DESIGNED J. MENGUITA  
REVIEWED J. COUNTS  
APPROVED T. BUCHHOLZ  
DRAWN JRM  
DATE 09/14  
DRAWING NO.  
SCALE NONE  
SHEET 2 OF 37

EXHIBIT C

TIMBER SALE NAME: LUCKY STARS VRH

TIMBER SALE NO. ORC00-TS-2015.0002

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OFFICE  
UMPQUA RESOURCE AREA

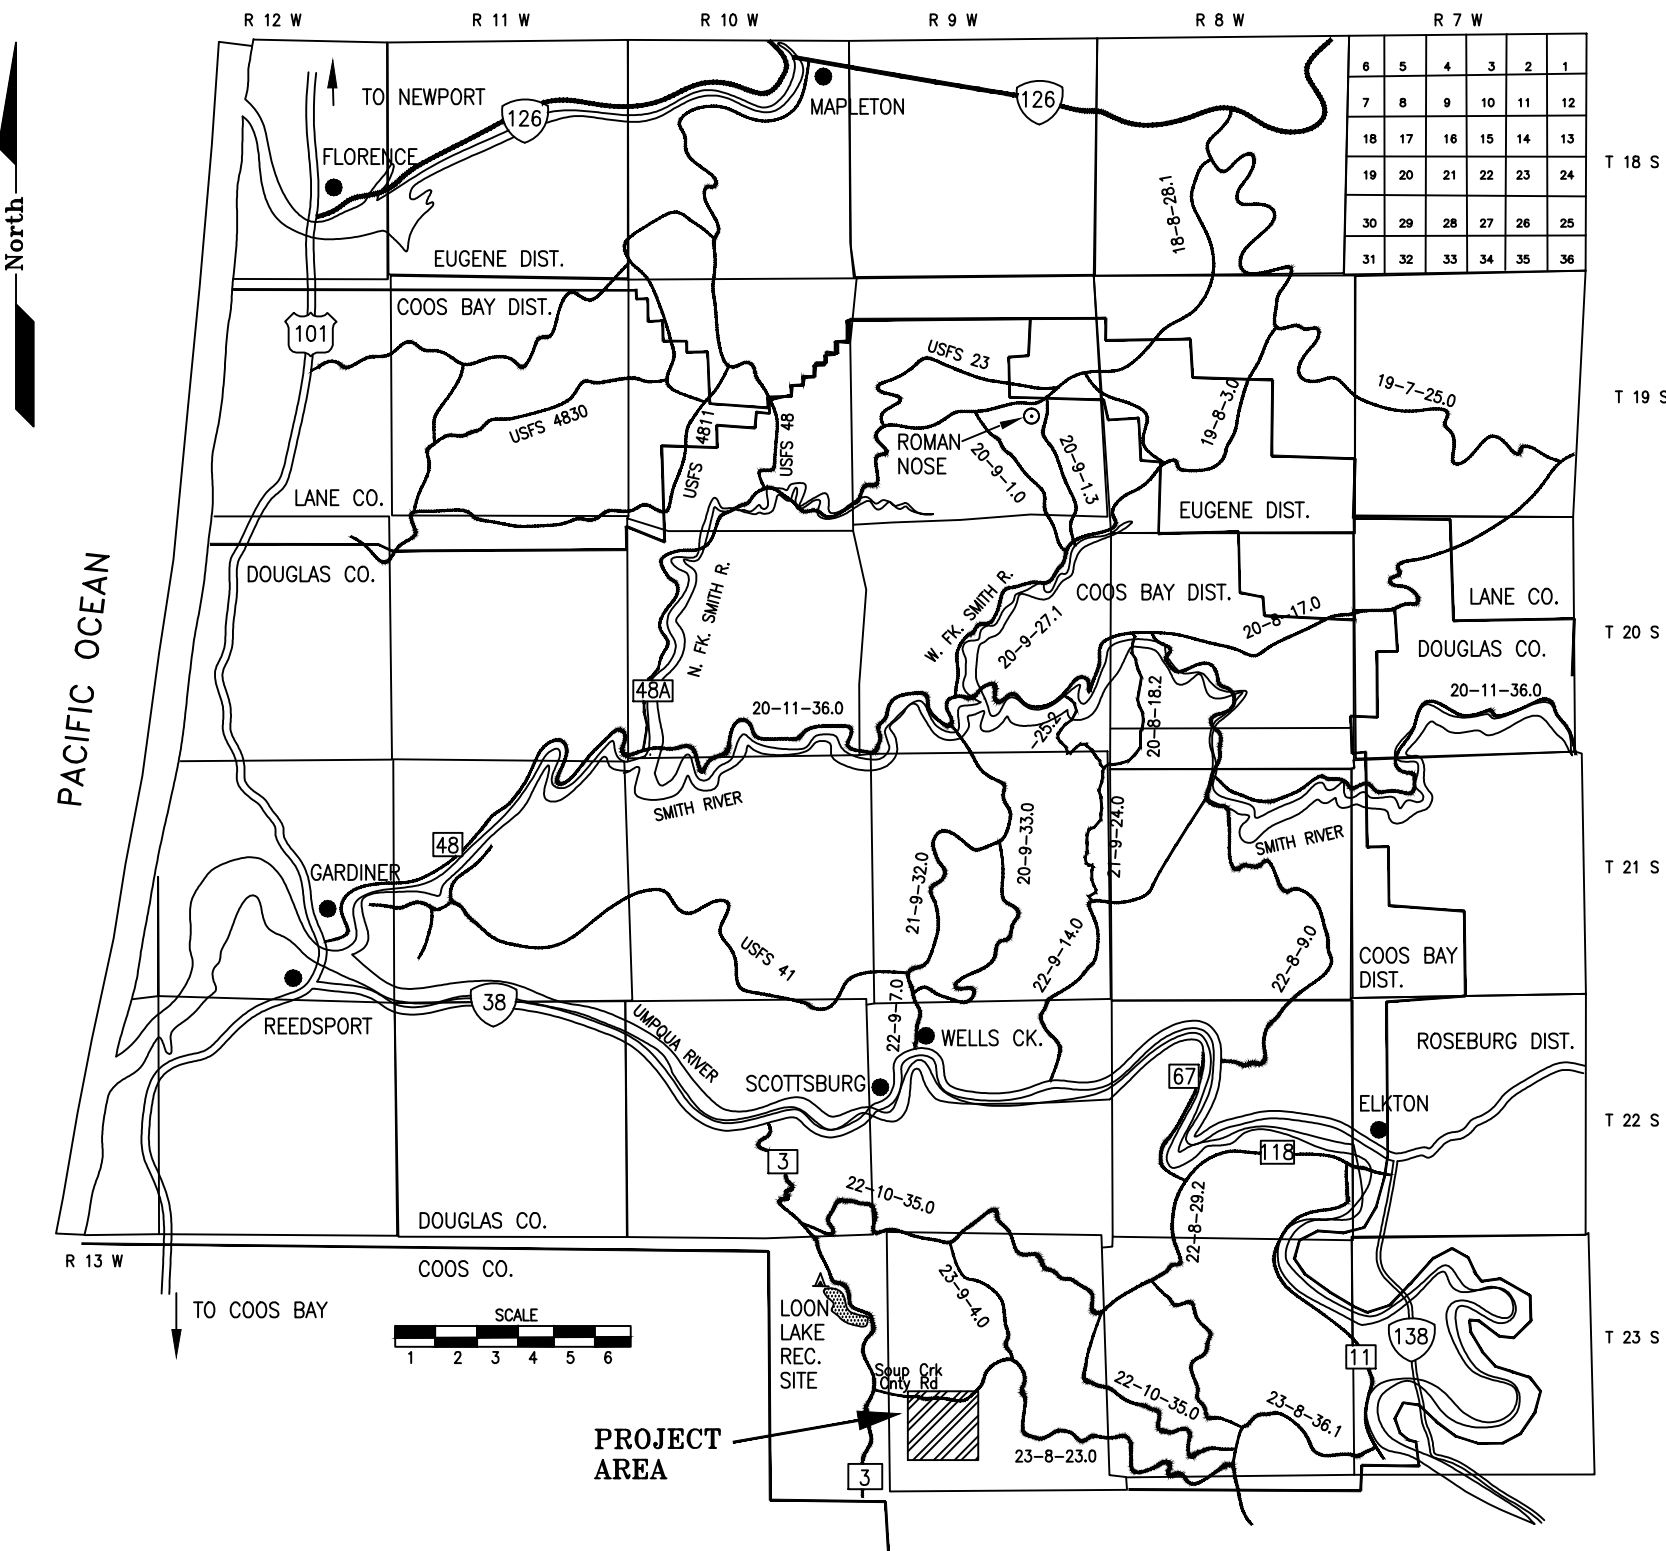

SHEET	CONTENTS
1	TITLE SHEET
2-3	WORK LOCATION MAPS
4	TYPICAL CROSS SECTION DETAIL
5	CULVERT INSTALLATION DETAILS
6-7	ESTIMATE OF QUANTITIES
8	ROADSIDE BRUSHING DETAIL
9	SPECIAL PROVISIONS
10-12	SPECIAL DETAILS
13-37	ROAD CONSTRUCTION SPECIFICATIONS

U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

**TITLE SHEET**

DESIGNED J. MENGUITA  
REVIEWED J. COUNTS  
APPROVED T. BUCHHOLZ

DRAWN JRM	SCALE NONE
DATE 09/14	SHEET 1 OF 37
DRAWING NO.	

## **SPECIAL PROVISIONS**

### Purchaser Responsibility

The Purchaser shall avoid damaging any bituminous surfaced roads, and will be responsible for the repair of any road damaged as a result of the activity. Bituminous roads shall be left in the same condition that they were prior to logging operations.

The bituminous road surface at any roadside landing locations will be protected by applying a layer of wood chips, hog fuel, or other material ( excluding rock or soil ) approved by the Authorized Officer, to a depth sufficient to prevent damage from yarding and loading activities.

### Seasonal Restrictions

**All road construction, renovation, and decommissioning work shall be done during the dry construction season, avoiding precipitation periods, between June 1 and October 15.**

Seasonal restrictions apply to summer haul roads.

### Native Seed

The Government will furnish native seed mix. The Purchaser shall pick up the native seed mix at the North Bend, BLM warehouse. The Purchaser shall give the Authorized Officer 3 day notice in advance before pick up. Person to contact is Jeanne Standley at (541) 751-4283. The native seed mix shall be applied at the rate of 60 pounds per acre (or one pound per 1,000 square feet). Sand can be mixed with the native seed to aid broadcast seeding.

Also, a generic fertilizer of 16-20-16 NPK shall be used at a rate of 200 pounds per acre. Approved mulch material shall be applied at the rate of two tons per acre. Seeding shall be applied according to the dates specified in road specification 1803.

### Over-wintering

All natural-surfaced new construction shall not over-winter without being either decommissioned, as specified in the Exhibit D, or winterized, in accordance with the 1700 Erosion Control specifications, prior to the first rains of the wet season, but no later than October 15 in the year of construction.

### **Note:**

Truck tickets shall be given to the Authorized Officer to confirm delivery of **aggregates and riprap not furnished by the Government**. Tickets shall have the following information: company name, size of aggregate or riprap, date, truck number, amount in tons to the nearest ton. The amount shall be verified by load tickets from an Oregon certified scales at a moisture content of 6% maximum. The addition of water to the aggregate prior to being weighed will not be permitted.

SPECIAL DETAILS

ROAD NO. 23-9-19.0 (SOUP CREEK ROAD)  
Milepost 0.00 to Milepost 1.66

<u>Milepost</u>	<u>Remarks</u>
0.00	Junction with Soup Creek County Road.
0.95	Junction, renovate Road No. 23-9-20.0 right.
1.65	Junction, BLM aggregate stockpile site left. <b>The Purchaser shall maintain records of material removed from the stockpile site. These records shall be submitted to the Authorized Officer upon completion of the surfacing operation.</b>
1.66	Junction, BLM waste area left. Waste area shall be sloped to drain, seeded and mulched.

RENOVATION OF ROAD NO. 23-9-19.2  
Station 0+00 to Station 3+30

<u>Station</u>	<u>Remarks</u>
0+00	Junction with Road No. 23-9-29.4. Begin brushing, slough and slide removal, grading and shaping, rocking in accordance with Sections 500, 1200, and 2100 of the Road Specifications, Typical Cross Section Sheet No. 4, and Roadside Brushing Detail Sheet No.8.  Fill and compact earthen barrier. Place 10 CY of 3-0" crushed aggregate for resurfacing conforming to Section 1000 of the Road Specifications.
3+30	End landing. End renovation.

RENOVATION OF ROAD NO. 23-9-20.0  
Milepost 0.00 to Milepost 1.44

<u>Milepost</u>	<u>Remarks</u>
0.00	Junction with Road No. 23-9-19.0. Begin brushing, slough and slide removal, grading and shaping, culvert installation, rocking, and soil stabilization in accordance with Sections 400, 500, 1200, 1800, and 2100 of the Road Specifications, Typical Cross Section Sheet No. 4, Culvert Installation Detail Sheet No. 5, and Roadside Brushing Detail Sheet No.8.
NOTE:	Apply a compacted 4" lift of 1.5" crushed aggregate from MP 0.00 to MP 1.44 conforming to Section 1200 of the Road Specifications and as directed by the Authorized Officer.

**Waste material shall be delivered to the designated waste area.**

**Seed and mulch all slide and pipe installation areas.**

0.13	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 30' CPE with 20' fullround downspout and a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) See Note in Sheet 9.
------	--

<u>Milepost</u>	<u>Remarks</u>
0.28	Remove waste pile, right.
0.30	Remove slide and haul to waste area.
0.31	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 30' CPE with a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) Install 5 CY of riprap for water energy dissipater and the culvert's outfall. See Note in Sheet 9.
0.35	Minor road settling. Shape road to blend with existing road grade. Install 20 CY of base rock from the stockpile before applying 4" lift of surface rock.
0.43	Remove slide and haul to waste area.
0.82	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 30' CPE with a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) Install 5 CY of riprap for water energy dissipater and the culvert's outfall. See Note in Sheet 9.
0.86	Minor road shoulder failure. Install 20 CY of 6-0" jaw run in the ditch to increase road surface width.
0.88	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 30' CPE with a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) Install 5 CY of riprap for water energy dissipater and the culvert's outfall. Skew new pipe to required angle in compliance with Sheet No. 5. See Note in Sheet 9.
1.00	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 40' CPE with a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) See Note in Sheet 9.
1.13	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 40' CPE with 20' fullround downspout and a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) See Note in Sheet 9.
1.40	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 30' CPE with a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) See Note in Sheet 9.
1.44	Junction, renovate Road 23-9-29.4 right. End renovation.

RENOVATION OF ROAD NO. 23-9-29.4  
 Milepost 0.00 to Milepost 1.80

<u>Milepost</u>	<u>Remarks</u>
0.00	Junction with Road No. 23-9-20.0. Begin brushing, slough and slide removal, grading and shaping, culvert installation, rocking, and soil stabilization in accordance with Sections 400, 500, 1000, 1800, and 2100 of the Road Specifications, Typical Cross Section Sheet No. 4, Culvert Installation Detail Sheet No. 5, and Roadside Brushing Detail Sheet No.8.

<u>Milepost</u>	<u>Remarks</u>
NOTE:	Apply a compacted 4" lift of 3-0" crushed aggregate from MP 0.00 to MP 1.80 conforming to Section 1200 of the Road Specifications and as directed by the Authorized Officer.
	<b>Waste material shall be delivered to the designated waste area.</b>
	<b>Seed and mulch all slide and pipe installation areas.</b>
0.10	Remove existing CMP and dispose of in a legal manner off U.S. Government lands. Install an 18" x 30' CPE with 20' fullround downspout and a marker. (15 CY of 1.5-0" is allocated for bedding and resurfacing.) See Note in Sheet 9.
0.26	Junction, Road No. 23-9-29.5 left.
0.41	Junction, Spur right.
0.65	Junction, Road No. 23-9-19.3 right.
0.87	Junction, renovate Road No. 23-9-19.2 right.
0.88	Approximate, unit begins.
0.96	Remove slide and haul to waste area.
1.10	Approximate unit boundary. Multiple small alders along the road that continues on to the end landing. See Section 2103 for cutting specifications.
1.19	Construct landing with approach left in accordance with Section 300 of the Road Specifications. Use excavated material from MP 1.55 landing to fill approach. Grade of landing shall not exceed 5%. (130 CY of landing rock allocated.)
1.20	Existing landing right. (50 CY of landing rock allocated.)
1.25	Remove slide and haul to waste area.
1.41	Construct landing left in accordance with Section 300 of the Road Specifications. Grade of landing shall not exceed 5%. (50 CY of landing rock allocated.)
1.47	Construct landing left in accordance with Section 300 of the Road Specifications. Grade of landing shall not exceed 5%. (50 CY of landing rock allocated.)
1.55	Construct landing with approach left in accordance with Section 300 of the Road Specifications. Use endhaul material to fill landing approach at MP 1.19. Grade of landing shall not exceed 5%. (80 CY of landing rock allocated.)
1.77	Existing landing right. (50 CY of landing rock allocated.)
1.80	Existing end landing. (50 CY of landing rock allocated.) End renovation.

EQUIPMENT WASHING

The Purchaser is responsible for conforming to the Exhibit F.

ROAD CONSTRUCTION SPECIFICATIONS

General road construction specifications are designated by numeric symbols according to the type of road work to be performed, as follows:

Section

100	GENERAL
200	CLEARING AND GRUBBING
300	EXCAVATION AND EMBANKMENT
400	PIPE CULVERTS
500	RENOVATION AND IMPROVEMENT OF EXISTING ROADS
600	WATERING
1000	AGGREGATE BASE COURSE (CRUSHED ROCK)
1200	AGGREGATE SURFACE COURSE (CRUSHED ROCK)
1400	SLOPE PROTECTION
1700	EROSION CONTROL
1800	SOIL STABILIZATION
2100	ROADSIDE BRUSHING



GENERAL - 100

101 - Pre-work Conference(s):

A pre-work conference will be held prior to the start of operations. The Purchaser shall request the conference at least 48 hours prior to the time it is to be held. The conference will be attended by the Purchaser and/or his representative(s), subcontractor(s) and/or his or their representative(s) and the Authorized Officer and/or his representative(s).

The purpose will be to review the required work, exhibits and specifications, and to establish a work schedule and a list of the Purchaser's representatives and subcontractor(s).

102 - Definitions:

AASHTO - American Association of State Highway and Transportation Officials. Current editions of tests and specifications.

Abrasion Resistance - The ability of a fabric surface to resist wear by friction.

ACI - American Concrete Institute

Apparent Opening Size (AOS) - Number of the U.S. Bureau of Standard sieve (or its opening size in millimeters or inches) having openings closest in size to the diameter of uniform particles which will allow 5 percent by weight to pass through the geotextile material when shaken in a prescribed manner. Also referred to as Equivalent Opening Size (EOS).

ASTM - American Society for Testing and Materials.

Base Course - Surfacing structure consisting of crushed gravel or stone, crushed sandstone, pitrun rock, bank or river-run gravels, etc., to provide support and, in the event no surface course is placed, the running surface for traffic load.

BLM - Bureau of Land Management

Borrow - Excavated material required for embankments and other portions of the work.

Burst Strength - The resistance of a geotextile material to rupture from pressure applied at right angles to the plane of the geotextile material under specified conditions, usually expressed as the amount of pressure causing failure. Rupture or burst results from tensile failure of the geotextile material.

Culvert - A pipe, pipe-arch, arch, or box structure constructed of metal, concrete, plastic or wood which provides an opening under the roadway primarily for the conveyance of liquids, pedestrians or livestock.

Curve Widening - Widening required on inside of curves to accommodate long log and equipment hauling trucks.

Embankment - A structure of soil, aggregate, or rock material placed on a prepared ground surface and constructed to subgrade.

End Haul - Excavated material moved, other than by dozer, to an embankment or waste area to prevent sidcasting material outside of the road prism.

Excess Excavation - Material from the roadway in excess of that needed for construction of the designed roadway (waste).

Grab Tensile Strength - A modified tensile strength of a geotextile material. The strength of a specific width of geotextile material together with the additional strength contributed by adjacent areas. Typically, grab strength is determined on a 12-inch-wide strip of geotextile material, with the tensile load applied at the midpoint of the geotextile material width through 1-inch-wide jaw faces.

Grading - Leveling to grade, shaping and smoothing of a road subgrade; the shaping of roadside ditches as to grade and contour. In some instances includes smoothing of the cut bank.

Nonwoven Geotextile Material - A textile structure produced by bonding or interlocking of fibers, or both, accomplished by mechanical or chemical means.

Overhaul - Distance excavated material is transported in excess of the distance included in the cost for excavation.

Pioneer Road - Temporary construction access built along the route of the project.

Penetration Resistance - The geotextile material property determined by the force required to penetrate a geotextile material with a sharp pointed object. Initial penetration is by separating the fibers. Further penetration is essentially a tearing process.

Percent Open Area - The net area of a geotextile material that is not occupied by geotextile material filaments, normally determinable only for woven and nonwoven geotextile material having distinct, visible, and measurable openings that continue directly through the geotextile material.

Permeability - The geotextile material property which permits water to be transmitted in the longitudinal or transverse planes of the geotextile material.

Piping - The process by which soil particles are washed in or through pore spaces in drains and filters or poorly compacted fill/backfill material.

Plans - The approved drawings, or exact reproductions thereof which show the locations, character, dimensions, and details of the work to be done.

Pore Size - The size of an opening between geotextile material filaments; apparent opening size (AOS) is used to quantify this geotextile material property.

Puncture Resistance - The geotextile material property determined by the force required to penetrate a geotextile material with a blunt object. Failure results in a tearing of the geotextile material.

Purchaser - The individual, partnership, joint venture, or corporation contracting with the Government under the terms of a Timber Sale Contract and acting independently or through their, or its agents, employees, or contractors.

Reasonably Close Conformity - Compliance with reasonable and customary manufacturing and construction tolerances where working tolerances are not specified.

Reinforcement - Strengthening of concrete with iron bars or mesh: geotextile with geotextile material inclusion: subgrade with aggregate: etc.

Roadbed - The graded portion of the road within top and side slopes, prepared as a foundation for the pavement structure and shoulders.

Road Centerline - Longitudinal center of roadbed.

Road Improvement - Work done to an existing road which improves it over its original design standard.

Road Renovation - Work done to an existing road which restores it to its original design.

Roadway - The portion of a road within limits of construction. Usually from the toe of the fill slope to a point where the cut slope intersects natural ground line. Synonym - road prism.

Scale - In quarrying, consists of the removal of loose or overhanging rock adhering to the solid face after a shot or a round of shots has been fired.

Scarification - The process of loosening or breaking up of the surface layer of soil or road, usually to a specified depth.

Separation - Function of geotextile material as a partition between adjacent materials to prevent mixing of those materials.

Shoulder - The portion of the roadbed contiguous with the traveled way designed for accommodation of stopped vehicles, safety, and lateral support of base and surface courses.

Spalls - Flakes or chips of stone.

Specifications - A general term applied to all directions, provisions, and requirements pertaining to performance of the work.

Specific Gravity - The ratio of the density of a material to the density of water obtained by weighing known volumes of both items in air. A specific gravity less than one implies that the material will float.

Structures - Bridges, culverts, catch basins, retaining walls, underdrains, flumes, splash pads, downspouts, and other project features which may be involved in the work and not otherwise classified in these specifications.

Subbase - Reinforcement of the subgrade with large particles of pitrun or crushed stone. Usually confined to roads having wet subgrades or subgrades with weak support characteristics.

Surface Course - Top layer of a road structure consisting of finely crushed gravels or asphalt designed to provide a smooth running surface for traffic load.

Subgrade - The top surface of a roadbed upon which the traveled way and shoulders are constructed.

Tackifier - A compound which penetrates into the earth and assists in creating a crust through the cohesive bonding of the surface materials to a depth sufficient to stabilize the soil surface and/or a compound used to mat together mulching material.

Tensile Strength - The strength shown by a geotextile material subjected to tension as distinct from torsion, compression, or shear.

Tensile Stress - Strain Modulus - A measure of the resistance to elongation under stress. The ratio of the change in tensile stress to the corresponding change in strain.

Tensile Test - A test which subjects geotextile material to tensile forces and measures resultant stresses and strains.

Timber - Standing trees, downed trees, or logs, or portions thereof, which are capable of being measured in board feet.

Traveled Way - The portion of the roadbed used for the movement of vehicles, exclusive of shoulders.

Typical Cross Sections - Cross-sectional plane of a typical roadway; showing natural ground line and designed roadway in relation to cut and fill, through cut, and through fill.

Turnout - Extra widening of the roadbed at appropriate intervals on single-lane roads for passing purposes.

Ultraviolet (UV) Radiation Stability - The ability of geotextile material to resist deterioration from exposure to sunlight.

Unaged Cloth - Cloth in condition received from the manufacturer or distributor.

Woven Geotextile Material - A textile structure comprising two or more sets of filaments of yarns interlaced in such a way that the elements pass each other at essentially right angles with one set of elements parallel to the geotextile material axis.

102a - Tests Used in These Specifications:

<u>AASHTO T 11</u>	Quantity of rock finer than No. 200 sieve.
<u>AASHTO T 27</u>	Sieve analysis of fine and coarse aggregate using sieves with square openings; gradation.
<u>AASHTO T 89</u>	Liquid limit of material passing the No. 40 sieve. Water content at which the soil passes from a plastic to a liquid state.
<u>AASHTO T 90</u>	Plastic limits and plasticity index of soil.  a. Plastic limit - lowest water content at which the soil remains plastic.  b. Plasticity index - range of water content, within which the material is in a plastic state. Numerical difference between the liquid and plastic limits of the soil.
<u>AASHTO T 96</u>	Resistance to abrasion of small size coarse aggregate by use of the Los Angeles machine.

<u>AASHTO T 99</u>	Relationship between soil moisture and maximum density of soil.  Method A - 4" mold, soil passing a No. 4 Sieve. 25 blows/layer & 3 layers.  Method D - 6" mold, soil passing a 19.00 mm (3/4 inches) sieve. 56 blows/layer & 5 layers.
<u>AASHTO T 176</u>	Shows relative portions of fine dust or clay-like materials in soil or graded aggregate.
<u>AASHTO T 180</u>	(OSHD 106-71) moisture density relationship of soil same as AASHTO T 99 proctor but uses a 10-lb rammer & 18-in drop.
<u>AASHTO T 191</u>	<u>Sand Cone.</u> Density of soil in place: For subgrade use 6-inch or 12-inch cone. For rock surfacing for 1-1/2-inch minus to 3-inch minus use 12-inch cone.
<u>AASHTO T 205</u>	<u>Rubber balloon.</u> Density of soil in place. Use for compacted or firmly bonded soil.
<u>AASHTO T 210</u>	Durability of aggregates based on resistance to produce fines.
<u>AASHTO T 224</u>	Correction for coarse particles in the soil.
<u>AASHTO T 238</u>	Determination of density of soil and soil-aggregates in place by nuclear methods.
<u>AASHTO T 248</u>	Reducing field samples of aggregate to testing size by mechanical splitter, quartering, or miniature stockpile sampling.
<u>DES. E-12</u>	Determination of relative density of cohesionless soils.
	<u>DMSO (dimethyl sulfide)</u> - Determines volume of expanding clays in aggregates. Usually associated with marine basalts.

103 - Compaction equipment shall meet the following requirements:

103e - Grid roller. A grid roller shall consist of two or more cylindrical drums independently mounted on a common shaft in a rigid frame. Each drum shall have a minimum outside diameter of 5 feet and a minimum width of 2 feet 6 inches. The overall width of the roller exclusive of frame shall be not less than 5 feet 6 inches of which not more than 6 inches shall be used for center spacing between two roller drums. The face of the drums shall have the appearance of woven open-mesh made by interlacing bars of not less than 1-1/4 inches nor more than 1-3/4 inches diameter space spaced on 4-1/2 inches to 5-1/2 inches center. Net opening between the bars shall be not less than 3-inches nor more than 4 inches. The roller shall be so constructed that counterweights can be used to adjust the gross weight of the roller to not less than 27,000 pounds. The grid roller shall be drawn by a power unit capable of propelling the fully loaded roller at a speed of at least 4 miles per hour.

- 103f - Vibratory roller. The drum diameter shall be not less than 48 inches, the drum width not less than 58 inches, and have a turning radius of 15 feet or less. Vibration frequency shall be regulated in steps to 1400, 1500, and 1600 vibrations per minute (VPM), corresponding to engine speeds of 1575, 1690, and 1800 RPM. The centrifugal force developed shall be 7 tons at 1600 RPM. It shall be activated by a power unit of not less than 25 horsepower. The vibratory roller shall be self-propelled or drawn by a vehicle of sufficient horsepower to enable the unit to travel through a loose layer of material at a speed ranging from 0.9 mile to 1.8 miles per hour, as directed by the Authorized Officer. The towing vehicle and roller or self-propelled unit meeting the above requirements shall be considered a vibratory roller unit.
- 103i - Other. Compaction equipment approved by the Authorized Officer.

CLEARING AND GRUBBING - 200

- 201 - This work shall consist of clearing, grubbing, removing and disposing of vegetation, debris, surface objects, and protruding obstructions within the clearing limits in accordance with these specifications and conforming to the lines, grades, dimensions and typical cross sections as shown on the plans.
- 202 - Where clearing limits have not been staked, established by these specifications or shown on the plans, the limits shall extend 10 feet back of the top of the cut slope and 5 feet out from the toe of the fill slope.
- 203 - Clearing shall consist of the removal and disposal of trees, logs, rotten material, brush, and other vegetative materials and surface objects in accordance with these specifications and within the limits established for clearing as specified under Subsection 202 and as shown on the plans.
- 203a - Brush under 2 feet in height need not be cut within the limits established for clearing.
- 203b - Standing trees and snags to be cleared shall be felled within the limits established for clearing unless otherwise authorized.
- 204 - Grubbing shall consist of the removal and disposal of stumps, roots, and other wood material embedded in the ground and protruding obstacles remaining as a result of the clearing operation in accordance with Subsection(s) 204a, 204b, 204c, 204d, 204e between the top of the cut slope and the toe of the fill slope. Undisturbed stumps, roots and other solid objects which will be a minimum of 3 feet below subgrades or slope surfaces or embankments are excepted.
- 204a - Stumps, including those overhanging cut banks, shall be removed within the required excavation limits.
- 204b - Stumps and other protruding objects shall be completely removed within the limits of required embankments having heights of less than 4 feet. When authorized, stumps and other nonperishable objects may be left provided they do not extend more than 6 inches above the existing ground line.
- 204c - On excavated areas, roots and embedded wood shall be removed to a depth not less than 6 inches below the subgrade.
- 204d - On areas to be occupied by embankments having heights greater than 4 feet, no stump or portion thereof shall remain within 3 feet of embankment subgrades or slope surfaces after grubbing is completed.

- 204e - Roots and embedded wood material shall be removed to a depth not less than 1 foot below embankment subgrades or slope surfaces.
- 205 - Clearing and grubbing debris shall not be placed or permitted to remain in or under road embankment sections.
- 206 - Clearing and grubbing debris shall be disposed of by scattering in accordance with Subsection 210.
- 210 - Disposal of clearing and grubbing debris shall be by scattering over government owned lands outside of established clearing limits in a manner acceptable to the Authorized Officer. The areas for such scattering shall have the prior approval of the Authorized Officer.
- 213 - No clearing or grubbing debris shall be left lodged against standing trees.

EXCAVATION AND EMBANKMENT - 300

- 301 - This work shall consist of excavating, overhaul, placement of embankments, backfilling, borrowing, leveling, ditching, grading, insloping, outsloping, crowning and scarification of the subgrade, compaction, disposal of excess and unsuitable materials, and other earth-moving work in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans.
- 302 - Excavation shall also consist of the excavation of road and landing cut sections, borrow sites, backfilling, leveling, ditching, grading, compaction, and other earth moving work necessary for the construction of the roadway in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans.
- 303 - Suitable material removed from the excavation shall be used in the formation of embankment subgrade, shoulders, slopes, bedding, backfill for structures, and for other purposes as shown on the plans.
- 303a - Excavated material shall not be wasted as sidecast or perched. All material perched or sidecast as waste shall be retrieved and disposed of at the Purchaser's expense and at the direction of the Authorized Officer.
- 305 - Embankment construction shall consist of the placement of excavated and borrowed materials, backfilling, leveling, grading, compaction, and other earth-moving work necessary for the construction of the roadway and landings in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans.
- 305a - Material used in the construction of embankment sections shall be free of stumps, cull logs, brush, muck, sod, roots, frozen material, and other deleterious materials and shall be placed and compacted as specified.
- 305b - Embankment materials shall be placed in successive parallel layers on areas cleared of stumps, cull logs, brush, sod, and other vegetative and deleterious materials, except as provided under Subsection 204. Roadway embankments of earth material shall be placed in horizontal layers not exceeding 8 inches in depth.

- 305c - Embankments formed of material containing less than 25 percent rock not larger than 8 inches in the greatest dimension shall be placed in 12-inch layers. Material containing more than 25 percent of rock not larger than 12 inches, in the greatest dimension, shall be placed in successive layers not exceeding 2 feet in thickness. Individual rocks and boulders greater than 12 inches in diameter may be used to construct 2-foot embankment layers, provided they are carefully distributed, with interstices filled with fine material to form a dense and compact mass.
- 305d - Where embankments are constructed predominantly of blasted rock material, depth of layers shall not exceed 4 feet. Rock fragments having dimensions greater than 4 feet will be permitted provided that they have no dimensions greater than 6 feet and that clearance between adjacent fragments is adequate for the placing and compacting of material in horizontal layers as specified, and that no part of the larger fragments comes within 4 feet of subgrade.
- 306 - Layers of embankment and final subgrade material as specified under Subsection(s) 305a and 305b shall be moistened or dried to a uniform optimum moisture content suitable for maximum density and compacted to full width with compacting equipment conforming to requirements of Subsection 103f and in accordance with the following table:

Road No.	From Sta./M.P.	To Sta./M.P.

- 306d - Compacted materials within 1 foot of the established subgrade elevation shall have a density in place of not less than 95 percent of maximum density, and below the 1-foot limit, these materials shall have a density in place of not less than 90 percent of maximum density. Maximum density shall be determined by AASHTO T 99, Method A or Method D.
- 306f - Compaction of embankment layers placed as specified under Subsection 305b above shall be accomplished by routing construction equipment over full width of embankment structures except as specified in Subsection 306.
- 306g - The face of all fill slopes shall be compacted to 85% of maximum density, either by walking with cat/excavator or by pressing with excavator bucket, to prevent surface erosion and raveling.
- 311 - In solid rock cuts where pockets that will not drain are formed by blasting below the subgrade elevation, drainage shall be provided by ditching to the edge of the subgrade and backfilling to grade and compacting both the pockets and the ditch with rock fragments, gravel, or other suitable porous material.
- 312 - When material, except solid rock, encountered in cuts at subgrade, is suitable for use in forming the finished roadbed, the top 6-inch layer of the subgrade shall be thoroughly scarified for the full width of the roadbed. Roots, sod, and other deleterious material or stones that will not pass a 6-inch square opening shall be removed. The scarified material shall be processed to the optimum moisture content suitable for maximum density and compacted in accordance with Subsection 306.
- 313 - In cut areas where solid rock is encountered at or near subgrade, the rock shall be excavated to a minimum depth of 6 inches below subgrade elevation and the excavated area backfilled with suitable material. The backfill material shall be processed to the optimum moisture content suitable for maximum density and compacted to full width in accordance with the requirements of Subsection 306.



- 314 - When heavy clays, muck, clay shale, or other deleterious material for forming the roadbed is encountered in cuts at subgrade, it shall be excavated to a minimum depth of 2 feet below the subgrade elevation and the excavated area backfilled with a selected borrow material approved by the Authorized Officer. The backfill material shall be uniformly moistened or dried to the optimum moisture content suitable for maximum density in accordance with the requirements of Subsection 306. Unsuitable material shall be disposed of as directed by the Authorized Officer.
  - 320 - Ditches shall conform to the slope, grade, dimensions, and shape of the required cross section shown on the plans. Roots, stumps, rocks, and other projections shall be removed to form smooth, even slopes.
  - 321 - Excess excavated, unsuitable, or slide materials shall not be disposed of on areas where the material will encroach on a stream course or other body of water. Such materials shall be disposed of in accordance with Subsection 321c.
- NOTE: Any material being hauled over gravel or bituminous surfaced roads will be done in vehicles which meet legal highway weight requirements while hauling.
- 321c - End-dumping will be permitted for the placement of excess materials under Subsection 321 in designated disposal areas or within areas approved by the Authorized Officer. Placement in layers is required. Materials placed shall be sloped, shaped, and otherwise brought to a neat and sightly condition acceptable to the Authorized Officer.
  - 324 - Excavated material shall not be allowed to cover boles of standing trees to a depth in excess of 2 feet on the uphill side.
  - 327 - The finished grading shall be approved in writing by the Authorized Officer. The Purchaser shall give the Authorized Officer 3 days notice prior to final inspection of the grading operations.
  - 328 - The Purchaser shall adopt methods and procedures in using explosives which will prevent damage to adjacent landscape features and which will minimize scattering rocks and other debris outside the road prism.

#### PIPE CULVERTS - 400

- 401 - This work shall consist of furnishing and installing pipe culverts, pipe arch culverts, half rounds flume(s), perforated pipe culverts, downspout(s), elbow(s), and other erosion control device(s) in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans. Individual lengths and locations are approximate; final lengths and locations will be determined by the Authorized Officer. Additional pipe and erosion control devices may be required at the option of the Authorized Officer, in which case a reduction in the total purchase price shall be made to offset the cost of furnishing and installing such items. Costs will be based upon the unit prices set forth in the current BLM Timber Appraisal Production Cost Schedule.
- 403 - Grade culverts shall have a gradient of from 2 percent to 4 percent greater than the adjacent road grade and shall be skewed down grade 30 degrees as measured from the perpendicular to the centerline unless otherwise specified on the plans.
- 404 - Damage to the spelter, or burn back in excess of 3/8 inch, shall be wire brushed and painted with two coats of zinc-rich paint on zinc-coated, steel pipe and aluminum-rich paint on aluminum or aluminum-coated pipe.

- 405 - Corrugated steel riveted and helical pipe culverts and pipe-arch culverts and special sections shall conform to the requirements of AASHTO M 36 and AASHTO M 218 or AASHTO M 274 as specified on the plans.
- 405a - Corrugated-steel-welded pipe culverts and pipe-arch culverts and special sections shall conform to the requirements of AASHTO M 36 and AASHTO M 218 or AASHTO M 274 as specified on the plans.
- 405e - Corrugated-polyethylene pipe for culverts 12-inch through 24-inch diameter shall meet the requirements of AASHTO M 294 for type S. Installation will be subject to the same specification as other pipe materials.
- 406 - Coupling bands shall conform to the requirements of AASHTO M 36 and AASHTO M 218 or AASHTO M 274 with the exception of band widths and the "Hugger"-type band which shall conform to the details, dimensions, and typical diagram shown on the plans.
- 406a - "Hugger"-type coupling bands shall only be used with annular corrugated pipe and pipe-arch culverts or helically corrugated pipe and pipe-arch culverts having annular reformed ends. Annular reformed ends shall consist of 2 annular corrugations.
- 406b - Coupling bands produced from flat galvanized steel sheets with impressed dimples will be permitted only for connecting annular corrugated steel pipe to helically corrugated steel pipe. Such coupling bands shall conform to the width requirements shown on the plans
- 406f - Channel-type or flanged-end coupling bands may be used on helical pipe with reformed rolled ends and flanged specifically to receive these bands. Such coupling bands shall conform to the requirements shown on the plans.
- 407 - Special sections, such as elbows, branch connections, and flared-end sections, shall be of the same gauge as the pipe to which they are joined and shall conform to the requirements of AASHTO M 36 and AASHTO M 218 or AASHTO M 274.
- 407b - Full round culvert downspouts conforming to the material and construction requirements as shown on the plans shall be anchored with two six-foot steel fence posts (one on each side of the pipe) wired together with No. 12 galvanized wire in a manner approved by the Authorized Officer. These anchors shall be placed every ten feet along the pipe beginning at the outlet of the culvert pipe.
- 408 - Pipe culverts and pipe-arch culverts shall be placed on the bed starting at the downstream end with the inside circumferential laps pointing downstream and with the longitudinal laps at the side or quarter points. Coupling bands of the type required under these specifications shall be installed so as to provide the circumferential and longitudinal strength necessary to preserve the pipe alignment, prevent separation of the pipe sections, and minimize infiltration of fill material.
- 409 - Structural-plate pipe culverts and pipe-arch culverts shall be installed in accordance with the plans and detailed erection instructions furnished by the manufacturer. One copy of the erection instructions shall be furnished the Authorized Officer prior to erection.
- 410 - Pipe shall be unloaded and handled with reasonable care. If the Authorized Officer determines any structure is damaged to the extent that it is unsuitable for use in the road construction, it shall be replaced at the Purchaser's expense.

- 411 - Trenches necessary for the installation of pipe culverts shall conform to the lines, grades, dimensions, and typical diagram included in the plans shown on Exhibit C and the Culvert Installation Detail Sheet.
- 412 - Where ledge rock, boulders, soft, or spongy soils are encountered, they shall be excavated a minimum of 24 inches below the invert grade for a width of at least one pipe diameter or span on each side of the pipe and shall be backfilled with selected granular or fine readily compactable soil material.
- 413 - Pipe culverts and pipe-arch culverts shall be bedded on a selected granular or fine readily compactable soil material. Foundation material shall be of uniform density throughout the length of the structure and shall be shaped to fit the pipe.
- 413a - Bedding material for pipe culverts on existing surfaced roads shall be 1½ inch minus crushed aggregate meeting the requirements of Sections 1204, 1205, 1206, 1207, and 1208 of these specifications.
- 414a - The invert grade of the bedding shall be cambered at the middle ordinate a minimum of 1 percent of the total length of the drainage structure. Camber shall be developed on a parabolic curve.
- 415 - Inspection of pipe culverts having a diameter of 48 inches and pipe-arch culverts having a height of 40 inches or a cross sectional area of 13 square feet or larger shall be made before backfill is placed. Culverts found to be out of alignment or damaged shall be replaced, reinstalled, or repaired as directed by the Authorized Officer at the Purchaser's expense.
- 416 - Side-fill material for pipe culverts shall be placed within 1 pipe diameter, or a minimum of 2 feet, of the sides of the pipe barrel and to 1 foot over the pipe with fine, readily compactable soil or granular fill material free of excess moisture, muck, frozen material, roots, sod, or other deleterious or caustic material and devoid of rocks or stones of sizes which may impinge upon and damage the pipe or otherwise interfere with proper compaction.
- 417 - For pipe culvert(s) side-fill material conforming to the requirements of Subsection 416 shall be placed and compacted under the haunches of the pipe and shall be brought up evenly and simultaneously on both sides of the pipe to 1 foot above the pipe in layers not exceeding 6 inches in depth and 1 pipe diameter/span or a minimum of 2 feet in width each side of, and adjacent to, the full length of the pipe barrel. Each layer shall be moistened or dried to a uniform moisture content suitable for maximum compaction and immediately compacted by approved hand or pneumatic tampers until a uniform density of 95 percent of the maximum density is attained as determined by AASHTO T 99, Method C.
- 418 - Side fills beyond the compaction limits specified under Subsection 417 shall be compacted as specified under Section 300.
- 423 - Construction of catch basins and ditch dams conforming to lines, grades, dimensions and typical diagrams shown on the plans, shall be required for grade culverts.
- 425 - Where pervious materials are used for backfill and bedding, collars consisting of selected impervious material shall be placed at the inlet and at various intervals along the pipe barrel as shown on the plans and as directed by the Authorized Officer.
- 426 - Culvert marker(s) consisting of ½-inch round steel bars 4 feet in length bolted to the culvert at the inlet or 6 foot steel fence posts painted white, shall be furnished, fabricated, and installed by the Purchaser at all grade culverts.

RENOVATION AND IMPROVEMENT OF EXISTING ROADS - 500

- 501 - This work shall consist of reconditioning and preparing the roadbed and shoulders, cleaning and shaping drainage ditches, trimming vegetation from cut and embankment slopes, and cleaning and repairing drainage structures of existing roads in accordance with these specifications and as shown on the plans.
- 501a - This work shall include the removal and disposal of slides in accordance with these specifications.
- 502 - The existing road surface shall be scarified to its full width and to a sufficient depth to eliminate surface irregularities and bladed and shaped to the lines, grades, dimensions, and typical cross sections shown on the plans at the following location(s):

Road No.	From Sta./M.P.	To Sta./M.P.
23-9-19.2	0+00	0+30
23-9-20.0	0.00	1.44
23-9-29.4	0.00	1.80

- 502a - Rocks larger than 4 inches in maximum dimension shall be removed from the scarified layers of the roadbed. Material so removed will not be permitted to remain on road shoulders or in ditches.
- 502b - Drainage ditches shall be bladed and shaped in accordance with the lines, grades, dimensions, and typical cross sections shown on the plans. Drainage ditches that are vegetated, capable of adequate water flow, and are in accordance with the lines, grades, dimensions, and typical cross sections shown on the plans shall not be bladed.
- 503 - Debris from slides shall be disposed of as directed by the Authorized Officer.
- 504 - Scarified material and existing road surface shall be uniformly moistened or dried to the optimum moisture content suitable for maximum density and compacted to full width with equipment conforming to requirements of Subsection 103f and in accordance with the following table:

Road No.	From Sta./M.P.	To Sta./M.P.
23-9-19.2	0+00	0+30
23-9-20.0	0.00	1.44
23-9-29.4	0.00	1.80

- 504a - Minimum compaction required shall be 1 hour of continuous rolling for each 4 stations of road, or fraction thereof, as measured along the centerline per layer of material.
- 506 - The inlet end of existing drainage structures shall be cleared of vegetative debris and boulders that are of sufficient size to obstruct normal stream flow. Pipe inverts shall be cleared of sediment and other debris lodged in the barrel of the pipe. The outflow area of designated pipe structures shall be cleared of rock and vegetative obstructions which will impede the structure's designed outflow configuration. Catch basins shall conform to the lines, grade, dimensions, and typical diagram shown on the plans.

- 507 - The finished grading shall be approved in writing by the Authorized Officer. The Purchaser shall give the Authorized Officer 3 days notice prior to final inspection of the grading operations.

WATERING - 600

- 601 - This work shall consist of furnishing and applying water required for the compaction of embankments, roadbeds, backfills, base courses, surface courses, finishing and reconditioning of existing roadbeds laying dust, or for other uses in accordance with these specifications.
- 602 - Water, when needed for compaction shall be applied at the locations in the amounts and during the hours as directed by the Authorized Officer. Amounts of water to be provided will be the minimum needed to properly execute the compaction requirements in conformance with these specifications.
- 603 - Water trucks used in this work shall be equipped with a distributing device of ample capacity and of such design as to ensure uniform application of water on the road bed.

AGGREGATE BASE COURSE AND LANDING ROCK - 1000  
CRUSHED ROCK MATERIAL

- 1001 - This work shall consist of furnishing, hauling, and placing one or more lifts of crushed rock material on roadbeds and landings approved for placing crushed rock material, in accordance with these specifications and conforming to the dimensions and typical cross sections shown on the plans. Material not conforming to these specifications will be rejected and shall be removed from the road.
- 1002a - Crushed rock materials may be obtained from commercial sources selected by the Purchaser at his option and expense providing that the rock materials selected comply with the specifications in this section.
- 1003 - Crushed rock material produced from gravel shall have 3 manufactured fractured face(s) on 75 percent, by weight, of the material retained on the No. 4 sieve.
- 1004 - Crushed rock materials shall consist of hard durable rock fragments conforming to the following gradation requirements:

TABLE 1004  
AGGREGATE BASE COURSE  
CRUSHED ROCK MATERIAL  
 Percentage by Weight Passing Square Mesh Sieves  
 (AASHTO T 11 & T 27)  
 GRADATION

Sieve Designation	A	D
6-inch	-	100
3-inch	100	45-65
2-inch	90-95	-
12-inch	-	-
1-inch	45-75	-
3/4-inch	-	-
2-inch	-	-
3/8-inch	-	-
No. 4	15-45	0-10
No. 8	-	-
No. 10	-	-
No. 30	-	-
No. 40	5-25	-
No. 200	2-15	-

- 1005 - Crushed rock material retained on the No. 4 sieve shall have a percentage of loss of not more than 35 at 500 revolutions, as determined by AASHTO T 96.
- 1006 - Crushed rock material shall show durability value of not less than 35 as determined by AASHTO T 210.
- 1006a - Crushed rock material shall show a loss of not more than 20 percent by weight when immersed in DMSO, dimethyl sulfoxide, for five days, in accordance with Federal Highway Administrations Region 10 Accelerated Weathering Test Procedure.
- 1007 - That portion of crushed rock material passing the No. 40 sieve, including blending filler, shall have liquid limits of not more than 35 and a plasticity index of not less than 4 and not more than 12, as determined by AASHTO T 89 and AASHTO T 90.

- 1007a - That portion of crushed rock material passing No. 4 sieve, including blending filler, shall have a sand equivalent of not less than 35 as determined by AASHTO T 176, except where that portion exhibits a sand equivalent of less than 35, the aggregate will be accepted if it complies with the additional requirement as follows:

Sand Equivalent AASHTO T 176 Maximum	Percentage Passing No. 200 Sieve AASHTO T 27 Maximum
34	9
33	8
32	7
31	6
30	5
29 or less	4

- 1008 - If additional binder or filler is necessary in order to meet the grading or plasticity requirements, or for satisfactory bonding of the material, it shall be uniformly blended with the crushed rock material at the crushing and screening plant prior to placing on the road, unless otherwise agreed. The material for such purposes shall be obtained from sources approved by the Authorized Officer and shall be free from stones, vegetative matter, and other deleterious materials.
- 1008a - Each layer of crushed rock material shall be thoroughly mixed on the roadbed by alternately blading to full depth until a uniform mixture has been obtained. The mixture shall then be spread to full width. When completed, the spreading shall produce a surface which is smooth, presents uniform shoulder lines, and conforms to the specified cross section.
- 1009 - The roadbed, as shaped and compacted under Sections 300 and 500 of these specifications, shall be approved in writing by the Authorized Officer prior to placement of crushed rock materials. Notification for subgrade approval prior to rocking shall be 3 days prior to that approval and shall be 6 days prior to start of rocking operations.
- 1010 - Crushed rock materials shall be placed and processed on the approved roadbed in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans and compacted in layers not to exceed 4 inches in depth. When more than one layer is required, each shall be shaped, processed, and compacted, before the succeeding layer is placed. Irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and adding or removing crushed rock material until the surface is smooth and uniform.
- 1010a - Crushed rock material used to repair or reinforce a soft, muddy, frozen, yielding, or rutted roadbed shall not be construed as surfacing under this specification.
- 1012 - Each layer of crushed rock material shall be placed, processed, shaped, moistened, or dried to a uniform moisture content suitable for maximum compaction, and compacted to full width by compaction equipment conforming to the requirements of Subsection 103f. Minimum compaction shall be one (1) hour of continuous compacting for each 150 cubic yards, or fraction thereof, of crushed rock material placed per layer.

- 1015 - The Purchaser is authorized to remove crushed material from BLM stockpile, for placement on the road(s) in accordance with the requirements and details shown on the plans from the following location(s):

Stockpile No.	W.M.			Approx. Cu. Yds.
	Sec.	T.	R.	
Soup Creek Rd. Stockpile	21	23S	09W	2560 (truck measurement quantities)

**The Purchaser shall maintain records of material removed from the stockpile sites designated above. These records shall be submitted to the Authorized Officer upon completion of the surfacing operation.**

AGGREGATE SURFACE COURSE, SPOT, AND MAINTENANCE ROCK - 1200  
CRUSHED ROCK MATERIAL

- 1201 - This work shall consist of furnishing, hauling, and placing one or more layers of crushed rock material on roadbeds and base courses approved for placing crushed rock material in accordance with these specifications and conforming to the dimensions and typical cross sections shown on the plans. Material not conforming to these specifications will be rejected and shall be removed from the road.
- 1202a - Crushed rock materials used in this work may be obtained from commercial source(s) selected by the Purchaser at his option and expense, providing rock materials furnished comply with the specifications in this section.
- 1203 - When crushed rock material is produced from gravel, not less than 75 percent by weight of the particles retained on the No. 4 sieve will have 3 manufactured fractured face(s).
- 1204 - Crushed rock material shall consist of hard durable rock fragments conforming to the following gradation requirements:



TABLE 1204

AGGREGATE SURFACE COURSE  
CRUSHED ROCK MATERIAL

Percentage by weight passing square mesh sieves  
AASHTO T 11 & T 27

GRADIATION

Sieve Designation	C
1-1/2-inch	100
1-inch	-
3/4-inch	50-90
1/2-inch	-
No. 4	25-50
No. 8	-
No. 30	-
No. 40	5-25
No. 200	2-15

- 1205 - Crushed rock material retained on the No. 4 sieve shall have a percentage of loss of not more than 35 at 500 revolutions, as determined by AASHTO T 96.
- 1206 - Crushed rock material shall show a durability value of not less than 35 as determined by AASHTO T 210.
- 1206a - The crushed rock material shall show a loss of not more than 20 percent by weight, when submerged in DMSO, dimethyl sulfoxide, for five days, according to Federal Highway Administration Region 10 Accelerated Weathering Test Procedure.
- 1207 - That portion of crushed rock material passing the No. 40 sieve, including blending filler, shall have liquid limits of not more than 35 and a plasticity index of not less than 4 and not more than 12 as determined by AASHTO T 89 and AASHTO T 90.
- 1207a - That portion of crushed rock material passing No. 4 sieve, including blending filler, shall have a sand equivalent of not less than 35, as determined by AASHTO T 176, except where that portion exhibits a sand equivalence of less than 35, the aggregate will be accepted if it complies with the additional requirement as follows:

Sand Equivalent AASHTO T 176 Maximum	Liquid Limit AASHTO T 89 Maximum	Plasticity Index AASHTO T 90 Maximum	Percentage Passing No. 200 Sieve AASHTO T 27 Maximum
34	25	9	9
33	25	8	8
32	25	7	7
31	25	6	6
30	25	5	5
29 or less	25	4	4

- 1208 - If additional binder or filler material is necessary to meet the grading or plasticity requirements or for satisfactory bonding of the material, it shall be uniformly blended with the crushed rock material at the crushing and screening plant prior to placing on the road, unless otherwise agreed. The material for such purposes shall be obtained from sources approved by the Authorized Officer and shall be free from stones, vegetative matter, and other deleterious materials.
- 1208a - Each layer of crushed rock material shall be thoroughly mixed on the roadbed by alternately blading, to full depth, until a uniform mixture has been obtained. The mixture shall then be spread to full width. When completed, the spreading shall produce a surface which is smooth, presents uniform shoulder lines, and conforms to the specified cross section.
- 1209 - Shaping and compacting of roadbed shall be completed and approved in writing, prior to placing crushed rock material, in accordance to the requirements of Subsections 500 for placing on the roadbeds. Notification for roadbed inspection, prior to rocking, shall be 3 days prior to that inspection and shall be 6 days prior to start of rocking operations.
- 1210 - Crushed rock material conforming to the requirements of these specifications shall be placed on the approved roadbed in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans. Compacted layers shall not exceed 4 inches in depth. When more than one layer is required, each shall be shaped, processed, compacted, and approved by the Authorized Officer before the succeeding layer is placed. Irregularities or depressions that develop during compaction of the top layer shall be corrected by loosening the material at these places and then adding or removing crushed rock material until the surface is smooth and uniform.
- 1210a - Crushed rock material used to repair or reinforce soft, muddy, frozen, yielding, or rutted roadbed shall not be construed as surfacing required by this specification.
- 1212 - Each layer of crushed rock material placed, processed, and shaped as specified shall be moistened or dried to a uniform moisture content suitable for maximum compaction and compacted to full width by compacting equipment conforming to the requirements of Subsection 103i. Minimum compaction shall be 1 hour of continuous compacting for each 150 cubic yards or fraction thereof, of crushed rock material placed per layer.

- 1215 - The Purchaser is authorized to remove crushed material from BLM stockpile, for placement on the road(s) in accordance with the requirements and details shown on the plans from the following location(s):

Stockpile No.	W.M.			Approx. Cu. Yds.
	Sec.	T.	R.	
Little Camp Creek Rd. Aggregate stockpile	07	23S	8W	1654 (truck measurement quantities)

**The Purchaser shall maintain records of material removed from the stockpile sites designated above. These records shall be submitted to the Authorized Officer upon completion of the surfacing operation.**

SLOPE PROTECTION - 1400

- 1401 - This work shall consist of furnishing, hauling, and placing stone materials (riprap) for slope protection structures (energy dissipaters at culvert outlets) in accordance with these specifications. Material not conforming to these specifications will be rejected, and shall be removed from the slope protection structure as directed by the Authorized Officer.
- 1402 - Riprap shall be hard, durable, angular in shape, and resistant to weathering and water action. Thickness of a single stone should be more than one-third its length. Do not use rounded rock or boulders. Stone shall be free from overburden, spoil, shale, and organic material and conforming to the following:

- a. Apparent Specific Gravity (AASHTO T85) 2.50 Min.
- b. Absorption (AASHTO T85) 4.2% Max.
- c. Coarse Durability Index (AASHTO T210) 20 Min.

- 1403 - Loose riprap shall meet the following gradation:

<u>Equivalent Cubic Dimensions</u>	<u>Total Size Smaller Than Given</u>
34 inches	100
27 inches	80
22 inches	50
10 inches	10

- 1404 - The placement of slope protection riprap by the end dumping method is not permitted.

- 1405 - Riprap shall be placed to produce a well keyed mass of rock with the least practical amount of void spaces. The foundation course is the course placed in contact with the ground surface, and shall be placed on a stable key bench. Bearing shall not be on smaller rocks that may be used for filling voids.
- 1405a - Riprap shall be placed directly under the culvert outlet and extend to the point where a 45-degree angle from the outlet invert intersects the key bench. Riprap shall extend a minimum distance equal to the culvert diameter on all sides.
- 1406 - Determination of the acceptability of the slope protection structure will be by visual inspection and / or physical measurements by the Authorized Officer.

EROSION CONTROL - 1700

- 1701 - This work shall consist of measures to control soil erosion or water pollution during the construction operation through the use of berms, dikes dams, sediment basins, fiber mats, netting, gravel, mulches, grasses, slope drains and other erosion control devices or methods in accordance with these specifications and conforming to the lines, grades, dimensions, and typical cross sections shown on the plans.
- 1702 - The Purchaser shall construct dike(s), dam(s), diversion channel(s), settling basin(s) and other erosion control structure(s) as directed by the Authorized Officer.
- 1704 - The erosion control provisions specified under this subsection shall be coordinated with the soil stabilization requirement(s) of Section 1800.
- 1705 - The surface area of erodible earth material exposed at any one time by clearing and grubbing shall not exceed 25,000 square feet without prior approval by the Authorized Officer.
- 1706 - The surface area of erodible earth material exposed at one time by excavation, borrow, or fill within the right-of-way shall not exceed 25,000 square feet without prior approval by the Authorized Officer.
- 1706a - The Purchaser shall perform, during the same construction season, erosion control measures specified in the plans on all exposed excavation, borrow, and embankment areas.
- 1707 - Completed and partially completed segments of road(s) to be carried over the winter and early spring periods shall be stabilized by mulching exposed areas at the rate of 2,000 pounds per acre.
- 1708a - Road segments not completed during dry weather periods shall be winterized, by providing a well-drained roadway by waterbarring, maintaining drainage, and performing additional measures necessary to minimize erosion and other damage to the roadway, as directed by the Authorized Officer. Portions of roads not having surface rock in place will be blocked or barricaded to prevent vehicular traffic.

SOIL STABILIZATION - 1800

- 1801 - This work shall consist of seeding, fertilizing and mulching on designated cut, fill, borrow, disposal, and special areas in accordance with these specifications and as shown on the plans. This work is not required for road acceptance under Section 18 of this contract.

- 1802a - Soil stabilization work consisting of seeding, fertilizing and mulching shall be performed on new road construction, road renovation, improvements, landings and disturbed areas in accordance with these specifications and as shown on the plans.

- 1803 - Soil stabilization work as specified under Subsection 1802a shall be performed during the following seasonal periods:

From: March 15 To: April 30  
From: September 1 To: October 15

If soil stabilization of disturbed areas is not completed by the specified fall date, the Purchaser shall treat disturbed areas in accordance with Section 1707 and then complete the requirements of Soil Stabilization 1800 the next construction season.

The Authorized Officer may modify the above seasonal dates to conform to existing weather conditions and changes in the construction schedule.

- 1806 - The Purchaser shall apply the seed mixtures specified under Special Provisions to the corresponding seeding projects as shown on Sheet No. 7.

- 1806a - Additional soil stabilization work consisting of seeding, fertilizing and mulching may be required at the option of the Authorized Officer. Providing the additional stabilization is not due to Purchaser negligence as specified in Section 12 of the contract, a reduction in the total purchased price shall be made to offset the cost of furnishing and applying such additional stabilization material. Cost shall be based upon the unit price set forth in the current BLM Timber Appraisal Production Cost Schedule.

- 1808 - Fertilizer shall be a standard commercial grade of fertilizer conforming to all State and Federal regulations and to the standards of the Association of Official Agricultural Chemists. Fertilizer furnished shall provide the minimum percentage of available nutrients as specified below:

Available nitrogen	16%
Available phosphoric acid	20%
Potassium	16%

The Authorized Officer will take what samples he deems necessary for determining compliance with the above requirements.

Fertilizer shall be furnished in new sealed and properly labeled containers with name, weight, and guaranteed analysis of contents clearly marked. Material failing to meet these requirements, or that which has become wet or otherwise damaged in transit or storage, will be subject to rejection by the Authorized Officer.

- 1809 - Mulch materials conforming to the requirements of Subsections 1809b, 1809d or 1809e shall be furnished by the Purchaser in the amounts specified under Subsection 1812.

- 1809b - Natural wood cellulose or grass fiber shall have the property of dispersing readily in water and shall have no toxic effect when combined with seed or other materials. The homogeneous slurry or mixture shall be capable of application with power spray equipment. A green-colored dye which is noninjurious to plant growth shall be used. Processed wood cellulose or grass fiber shall be packaged in new, labeled containers in an air dry condition. Processed wood cellulose or grass fiber furnished by the Purchaser shall be one of the following brand names or approved equal :

Silva Fiber	-	Weyerhaeuser Timber Co.
Conweb Fiber	-	Wood Conversion Co.
Spra-Mulch	-	Spra-Mulch Industries, Inc.
Grass-Mulch	-	Grass Mulch, Inc.

If the Purchaser proposes using a wood or grass fiber other than those listed above, he shall furnish a sample and descriptive literature to the Authorized Officer for approval prior to application. Processed wood cellulose or grass fiber furnished by the Purchaser which has become wet or otherwise damaged in transit or storage will not be accepted.

- 1809d - Straw mulch shall be from oats, wheat, rye, or other approved grain crops which are free from noxious weeds, mold, or other objectionable materials. Straw mulch shall be in an air-dry condition and suitable for placing with power spray equipment.
- 1809e - Grass straw mulch shall be from perennial grass or, if specified, an annual rye grass, from which the seed has been removed. The straw shall be free from noxious weed seed, mold, or other objectionable materials.
- 1810 - Mulch material shall be delivered to the work area in a dry state. Material found to be wet will not be accepted. Material to be used in the mulching operation may be stockpiled along the road designated for treatment provided that it be maintained in a dry state and has the approval of the Authorized Officer.
- 1811 - Bulk mulching material required under these specifications shall be delivered to the work area bound either by twine, string, or hemp rope. Wire binding and plastic twine will not be permitted.
- 1812 - The Purchaser shall furnish and apply to approximately 1.0 acres designated for treatment as shown on the plans and as specified under Subsection 1806, a mixture of water, fertilizer and mulch material, or a mixture of grass seed and fertilizer material at the following rate of application:
- |    |                           |                  |
|----|---------------------------|------------------|
| a. | Single Stage (Hydraulic): |                  |
|    | Water                     | 3,000 gals./acre |
|    | Grass Seed                | 60 lbs./acre     |
|    | Fertilizer                | 200 lbs./acre    |
|    | Mulch                     | 3,000 lbs./acre  |
| b. | Dry Application:          |                  |
|    | Grass Seed                | 60 lbs./acre     |
|    | Fertilizer                | 200 lbs./acre    |
|    | Mulch/Straw               | 3,000 lbs./acre  |

The above proportion and application rate are subject to adjustment by the Authorized Officer during the application operation.

- 1815 - The Purchaser may reduce the application rate on partially covered slopes and no application on areas already well stocked with grass or on rock surfaces.
- 1816 - The seed, fertilizer and mulch materials shall be placed by the hydraulic or dry method in accordance with the requirements set forth in Subsection 1816a and 1816b.

- 1816a - Hydraulic Method - The seed, fertilizer and mulch materials shall be mixed with water to form a slurry and then applied under pressure by hydroseeder.

When processed wood cellulose or grass fiber mulch material is to be incorporated as an integral part of the slurry mix, it shall be added after the seed and fertilizer have been thoroughly mixed.

- 1816b - Dry Method - Blowers, mechanical seeders, seed drills, landscape seeders, cultipacker seeders, fertilizer spreaders, or other approved mechanical seeding equipment may be used when seed and fertilizer are to be applied in dry form.

- 1817 - Hydraulic equipment used for the application of slurry shall meet the following requirements:

The equipment shall have a built-in agitation system. The slurry distribution lines shall be large enough to prevent stoppage. Discharge line shall be equipped with a set of hydraulic spray nozzles which will provide even distribution of the slurry on the various slopes to be treated. The slurry tank shall have a minimum operation capacity of 1,300 gallons and shall be mounted on a traveling unit which will place the slurry tank and spray nozzles within sufficient proximity to the areas to be treated so as to provide uniform distribution without waste. Lug- or track-type units are not authorized. The hydroseeder must be capable of spraying the slurry a minimum distance of 100 feet. The nozzle, mounted on a stand, must be capable of traversing 360 degrees on a horizontal plane and a minimum of 70 degrees on a vertical plane.

- 1817a - Hydromulch slurry mixing shall be with water and seed first, followed by fertilizer, and finally fiber. The time between mixing and application shall not exceed 1 hour.

- 1819 - The maximum distance to be seeded, fertilized and mulched from the road centerline shall be 100 feet for the cut slopes and 150 feet for the fill slopes.

- 1820 - The Purchaser shall notify the Authorized Officer at least 3 days in advance of date he intends to commence the specified soil stabilization work.

- 1822 - Mulch that collects at the end of culverts or accumulates to excessive depths on the slopes shall be evenly spread by hand methods, as directed by the Authorized Officer.

- 1823 - No materials shall be applied when wind velocities would prevent a uniform application of the mix or slurry or when winds would drift the mix or slurry spray outside of the designated treatment area.

- 1826 - Twine, rope, sacks, and other debris resulting from the soil-stabilization operation shall be picked up and disposed of to the satisfaction of the Authorized Officer.

#### ROADSIDE BRUSHING – 2100

- 2101 - This work shall consist of cutting and the removal of vegetation from the road prism - variable distance and inside curves in accordance with these specifications. This work shall conform to the lines, grades, dimensions, and typical cross sections shown on the Roadside Brushing Detail Sheet, at designated locations as shown in the plans.

- 2102 - Roadside brushing may be performed mechanically with self-powered, self-propelled equipment and/or manually with hand tools, including chainsaws.

- 2103 - Vegetation cut manually or mechanically less than 6 inches in diameter at D.B.H. shall be cut to a maximum height of 6 inches above the ground surface or above obstructions such as rocks or stumps on cut and fill sloped and all limbs will be severed from the trunk.
- 2103a - Vegetation shall be cut and removed from the road bed between the outside shoulders and the ditch centerline and such vegetation shall be cut to a maximum height of 1 inch above the ground and running surface. All limbs will be severed from the trunk. Sharp pointed ends will not be permitted. Cuts shall be parallel to the ground line or running surface.
- 2104 - Trees in excess of 6 inches in diameter at D.B.H. shall be limbed, so that no limbs extend into the treated area or over the roadbed to a height of 12 feet above the running surface of the roadway on cut and fill slopes, within the road prism-variable distance. Limbs shall be cut to within 1 inch of the trunk to produce a smooth vertical face. Removal of trees larger than 6 inches in diameter for sight distance or safety may be directed by the Authorized Officer.
- 2105 - Vegetation that is outside of the road prism-variable distance that protrudes into the road prism and within 12 feet in elevation above the running surface shall be cut, to within 1 inch of the trunk to produce a smooth vertical face.
- 2106 - Vegetative growth capable of growing 1 foot in height or higher shall be cut within the road prism/variable distance or as directed by the Authorized Officer.
- 2108 - Self propelled equipment shall not be permitted on cut and fill slopes or in ditches.
- 2109 - Debris resulting from roadside brushing shall be scattered downslope from the roadway. Debris shall not be allowed to accumulate in concentrations. Debris in excess of 1 foot in length and 2 inches in diameter shall not be allowed to remain on cut slopes, ditches, roadways or water courses, or as directed by the Authorized Officer.
- 2113 - Roadside brushing shall be accomplished as specified on the roads listed on Sheet No. 6.
- 2116 - Mechanical brush cutters shall not be operated when there are people and occupied vehicles within 400 feet of the immediate operating area.
- 2117 - Traffic warning signs shall be required at each end of the work area. Signs shall meet the requirements of the Manual on Uniform Traffic Devices.



SALE NO. ORC00-TS-2015.0002  
LUCKY STARS VRH  
EXHIBIT D  
SHEET 4 OF 8 SHEETS

ROAD MAINTENANCE SPECIFICATIONS

General road maintenance specifications are designated by numeric symbols according to the type of road work to be performed, as follows:

Section

3000	GENERAL
3100	OPERATIONAL MAINTENANCE
3200	SEASONAL MAINTENANCE
3300	FINAL MAINTENANCE
3400	OTHER MAINTENANCE

GENERAL - 3000

- 3001 - The Purchaser shall be required to maintain all roads as shown on the Exhibit D map of this contract in accordance with Sections 3000, 3100, 3200, 3300, and 3400 of this exhibit.
- 3002 - The Purchaser shall maintain the cross section of existing dirt or graveled roads to the existing geometric standards. **Any roads required to be constructed, improved, or renovated under terms of this contract shall be maintained to the standards required in Exhibit C of this contract.**
- 3003 - The minimum required maintenance on any roads shall include the provisions specified in Subsections 3101, 3104, and 3105.
- 3004 - The Purchaser shall be responsible for providing timely maintenance and cleanup on any road(s) with logging units substantially completed prior to moving operations to other roads. Release of maintenance requirements may be granted, upon written request, when the conditions specified in Sections 3300 and 3400 are met satisfactorily.

OPERATIONAL MAINTENANCE - 3100

- 3101 - The Purchaser shall blade and shape the road surface and shoulders with a motor patrol grader. Banks shall not be undercut. Back blading with tractors or similar equipment will be allowed only around landings and other areas when approved by the Authorized Officer.
- 3102 - The Purchaser shall place 150 yds<sup>3</sup> of crushed aggregate, conforming to the requirements in Section 1000 of Exhibit C of this contract, and 150 yds<sup>3</sup> of crushed aggregate, conforming to the requirements in Section 1200 of Exhibit C of this contract, on the roadway at locations and in the amounts designated by the Authorized Officer.  
  
This crushed aggregate shall be used to repair surface failures, and areas of depleted surface depth, excluding damages covered by Section 12 of this contract. The aggregate shall be furnished, hauled, placed, spread, and compacted by use of dump trucks, water trucks, roller, and motor patrol grader.
- 3103 - The Purchaser shall maintain established berms and place additional berms using adjacent material where needed to protect fills as directed by the Authorized Officer.
- 3104 - The Purchaser shall perform other road cleanup including removal of debris, fallen timber, bank slough, and slides which can practicably be accomplished by a motor patrol grader, rubber-tired front-end bucket loader, rubber-tired backhoe or comparable equipment, and by the use of hand tools.
- 3104a - Removal of bank slough and slide material includes placement of material at the nearest suitable turnout or disposal site where material cannot erode into streams, lakes, or reservoirs or cause undue damage to road fill slopes which have been planted or mulched to control soil erosion.

SALE NO. ORC00-TS-2015.0002  
LUCKY STARS VRH  
EXHIBIT D  
SHEET 6 OF 8 SHEETS

- 3104b - The Purchaser shall be responsible for removal of all slides or slough, up to fifteen (15) station yards in quantity, at any one site. This work includes unlimited multiple sites on all roads required to be maintained by the Purchaser.  
Prior to removal of any slough or slide material exceeding fifteen (15) station yards at any one site, the Purchaser and the Authorized Officer or their Authorized Representatives shall agree in writing, in the field, to the quantity of material, method of disposal, and the disposal site. Work may commence immediately after agreement.
- Upon completion of agreed upon work, a reduction in timber sale purchase price will be made to offset the cost of work, based on current BLM Timber Appraisal Production Cost Schedules. Adjustments in purchase price for completed work shall be made as necessary and no less than once per year when actual work is ongoing.
- 3105 - The Purchaser shall be responsible for maintaining normal flow in drainage structures. This includes cleaning out drainage ditches, catch basins, clearing pipe inverts of sediment and other debris lodged in the barrel of the pipe and maintaining water dips and waterbars using equipment specified in Subsection 3104 and other culvert cleaning and flushing equipment.
- 3106 - The Purchaser shall be responsible for repair and replacement of all materials eroded from road shoulders and fill slopes, up to fifteen (15) station yards in quantity, at any one site. The work includes unlimited multiple sites on all roads required to be maintained by the Purchaser. Prior to repair and replacement of eroded material exceeding fifteen (15) station yards at any one site, the Purchaser and the Authorized Officer or their Authorized Representatives shall agree in writing, in the field, to the quantity of material, borrow source, and method of repair. Work may commence immediately after agreement.
- Upon completion of agreed upon work, a reduction in timber sale purchase price will be made to offset the cost of the work, based upon current BLM Timber Sale Appraisal Production Cost Schedules. Adjustments in purchase price for completed work shall be made as necessary, and no less than once per year when actual work is ongoing.
- 3107 - The Purchaser shall cut or trim trees and brush which obstructs vision or prevents the safe passage of traffic along the traveled way, when directed by the Authorized Officer.
- The Purchaser shall also cut trees or brush encroaching on the road prism that are a result of his activities or winter damage during the contract period. Disposal of such vegetative material shall be by scattering below the road.
- 3108 - The Purchaser shall avoid fouling gravel or bituminous surfaces through covering with earth and debris from side ditches, slides, or other sources. The Purchaser shall also avoid blading surfacing material off the running surface of the roadway. Skidding of logs on the roadway in or outside designated logging units is not authorized without prior written approval by the Authorized Officer. Repair required by such skidding activity is not considered maintenance and shall be performed at the Purchaser's expense.
- 3108a - The Purchaser shall perform logging operations on gravel and/or bituminous roadways only where the locations have been marked on the ground and/or approved by the Authorized Officer.

SEASONAL MAINTENANCE - 3200

- 3201 - The Purchaser shall perform preventive maintenance at the end of Purchaser's hauling each season and during nonhauling periods which occur between other operations on the contract area. This includes cross ditching, blockage, removing ruts or other surface irregularities, and all other requirements specified in Section 3100.
- 3202 - The Purchaser shall perform and complete maintenance, specified in Sections 3000, 3100, and 3200, on all roads maintained by him, prior to October 1 each year, except as specified in Subsection 3203, after initial commencement of construction or logging operations. Thereafter all roads shall have continuous preventive maintenance and road cleanup until suspension of seasonal operations. This includes all roads used and not used during the preceding operating seasons.
- 3203 - The Purchaser shall complete road cleanup and maintenance, as specified in Section 3100, at the completion of logging operations on any road(s) located in an area separate from the area where logging activities will resume.
- 3204 - The Purchaser shall be responsible for performing post storm inspections and maintenance during the winter season to minimize erosion and potential road or watershed damage.

FINAL MAINTENANCE - 3300

- 3301 - The Purchaser shall complete final maintenance and/or damage repairs on all roads used under terms of their contract within 30 calendar days following the expiration of Purchaser's right to cut and remove timber (Sec. 4) and in accordance with Sec. 16(b) of this contract. This work shall include any maintenance and/or damage repairs specified in Sections 3000, 3100, and 3200 necessary to meet the conditions specified in Subsection 3002 and shall be executed in accordance with Subsection 3302 of this section.

The Authorized Officer may grant acceptance of Purchaser's maintenance responsibility in part where certain individual roads or road segments are no longer of any use to the Purchaser's remaining removal operations, providing that all contract requirements as specified under Section 16(b), Special Provisions Sections 3000, 3100, 3200, and 3300 of the maintenance specifications have been completed and a relinquishment of cutting and removal rights on cutting units tributary to these roads is signed by the Purchaser. Request for partial acceptance must be submitted in writing by the Purchaser.

- 3302 - The Purchaser shall perform final road maintenance only when weather or soil moisture conditions are suitable for normal maintenance equipment operations as determined by the Authorized Officer.

If final maintenance is delayed after the date required in Subsection 3301 of this contract by adverse soil moisture or unsuitable equipment operating conditions, the Purchaser will be notified by the Authorized Officer when soil moisture and equipment operating conditions are suitable. The Purchaser shall then be required to complete final maintenance within 30 days.

OTHER MAINTENANCE - 3400

- 3401 - The Purchaser shall repair any damage to road surfaces that was specified under Subsections 3108 and 3108a. **This repair includes restoring the roadway to the designed standard and replacement of surfacing with approved surface material.** This repair is not limited to use of equipment specified in Subsection 3104.
- 3402 - The Purchaser shall be permitted to remove ice and snow from roads authorized for use under this contract only when prior written approval has been secured from the Authorized Officer. The Purchaser shall submit a written request for permission to remove ice and snow in advance of the date operations are to begin.

"EXHIBIT D" ESTIMATE OF QUANTITIES\*

ROAD NUMBER	SURFACING				OTHER			SOIL STABILIZATION		OTHER	
	TOP **	AGG. MAINT. ROCK **	AGG. MAINT. ROCK **	BASE	RIPRAP BARRIER **	RIPRAP ARMOR **	JAWRUN ROCK **	DRY	HYDRO- MULCH		
SPEC. NO.	1200	1200	1000	1000	1400			1800	1800		
UNITS	C.Y.	C.Y.	C.Y.	C.Y.	C.Y.	C.Y.	C.Y.	ACRES	ACRES		
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
23-9-19.2	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
23-9-20.0	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
23-9-29.4	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
	(C)	(C)	(B)	(B)	(A)	(B)	(A)				
TOTALS	(C)	150 (C)	150 (B)	(B)	(A)	(B)	(A)				

\* FOR INFORMATIONAL USE ONLY. QUANTITIES SHOWN ARE NOT PAY ITEMS.

**\*\* ROCK QUANTITIES ARE TRUCK MEASUREMENT.**

ITEM	SIZE	GRADE
PITRUN		
1000 (Base)	3"	B
1100	4"	B
1200 (Top)	1 1/2"	C
1400 (RIPRAP)	34"	A
	28"	B
CHIP SEAL ROCK	3/4"	S

GRADE INDICATED IN CIRCLE ○




U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON


"EXHIBIT D"  
ESTIMATE OF QUANTITIES

DESIGNED J. MENGUITA  
REVIEWED J. COUNTS  
APPROVED T. BUCHHOLZ


DRAWN JRM	SCALE NONE
DATE 09/14	SHEET 3 OF 8
DRAWING NO.	

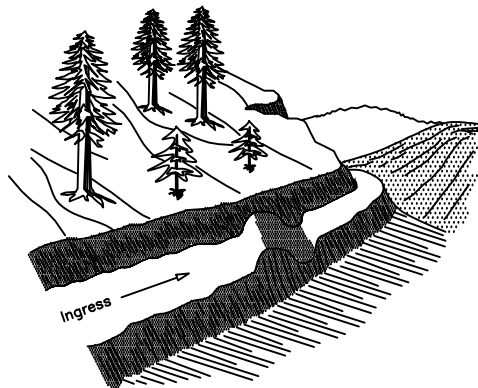


BARRIERS

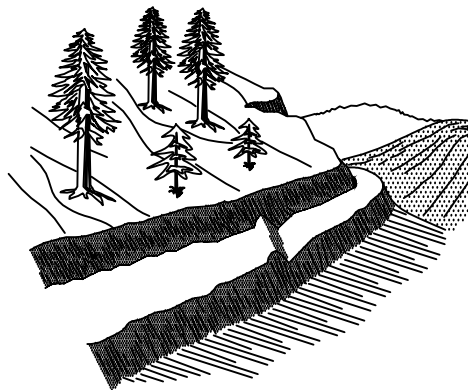


WATER BAR

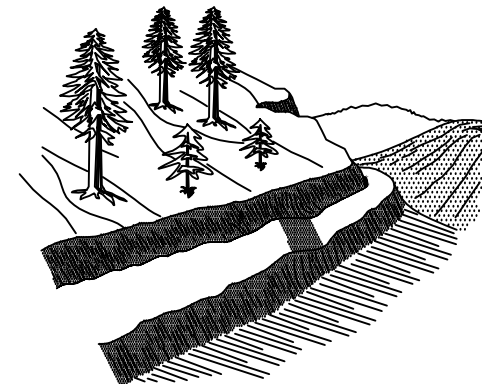


WATER DIP

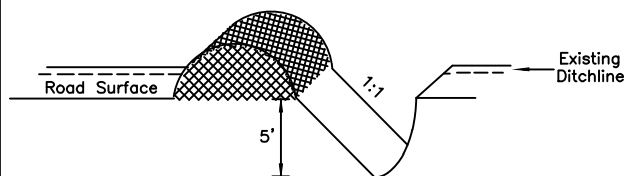


(NOT TO SCALE)

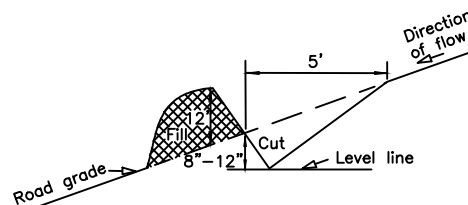

(NOT TO SCALE)

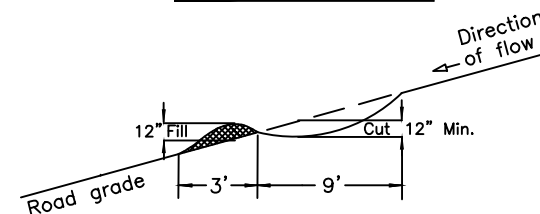


(NOT TO SCALE)

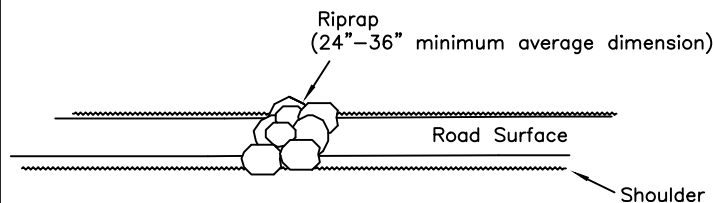

NOTES

1. ALL BARRIERS, WATER BARS, AND WATER DIPS AS REQUIRED SHALL BE CONSTRUCTED AS SHOWN.
2. LOCATIONS WILL BE AS DIRECTED BY THE AUTHORIZED OFFICER PRIOR TO CONSTRUCTION.
3. ALL WATER BARS SHALL BE SKEWED 30° - 40°.
4. ALL WATER DIPS SHALL BE SKEWED 60° - 70°.
5. ALL WATER BARS AND WATER DIPS SHALL BE CUT INTO THE ROADBED FROM THE DITCHLINE.
6. DITCHLINES SHALL BE BLOCKED WITH EXCAVATED MATERIAL (DITCH DAM) DOWNGRADE FROM ALL WATER BARS AND WATER DIPS.
7. EXCAVATED MATERIAL FROM BARRIER TRENCH SHALL BE PLACED ON THE SIDE NEAREST THE BEGINNING OF THE ROAD.
8. OUTLETS OF WATER DIPS MUST BE ROCKED ON FILL SLOPE.
9. RIPRAP BARRIERS SHALL BE AT LEAST 4' HIGH, 4' DEEP, AND OF SUFFICIENT WIDTH TO COMPLETELY BLOCK THE ROADWAY AND ANY ADJACENT SHOULDERS THAT CAN BE TRAVELED WITH A VEHICLE.
10. ALL BERMS INCLUDING WATER BARS, WATER DIPS, AND EARTHEN BARRIERS SHALL BE COMPACTED TO 85% OF MAXIMUM DENSITY.

SKEW DIAGRAM

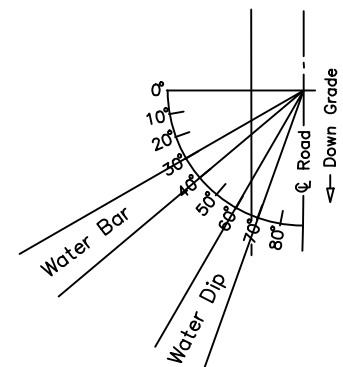

WATER DIP/BAR SPACING

ROAD GRADE	MAXIMUM SPACING
%	FEET
0-4	500
5-6	400
7-9	300
10-14	100
15-20	50



U. S. DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
COOS BAY DISTRICT OREGON

**BARRIER AND EROSION  
CONTROL DETAIL**

DESIGNED J. MENGUITA  
REVIEWED J. COUNTS  
APPROVED T. BUCHHOLZ

DRAWN JRM SCALE NONE  
DATE 09/14 SHEET 2 OF 8  
DRAWING NO.

EXHIBIT D

R 9 W

18

BLM

Private

17

BLM


16

BLM

BLM

LEGEND

Operator  
Maintained - B.L.M.  
Road



Fee  
Maintained - B.L.M.  
Road



Total Maintenance Rock: 150 CY 1-1/2" Aggregate\*  
150 CY 3-0" Aggregate\*\*

\*1-1/2" Aggregate  
Surfaced Roads ONLY

\*\*3-0" Aggregate  
Surfaced Roads ONLY

BLM

North

Soup Creek County Road

N Fk Soup Creek Road  
23-9-19.1

23-9-19.0  
Soup Creek Road

Private

Private

T  
23  
S

19

21

20

-29.4

-19.3

-19.2

23-9-20.0

BLM

Private

BLM

30

BLM

BLM

23-9-29.4

-29.5

29

-20.0

BLM

28

USDI-BLM COOS BAY DISTRICT  
MAINTENANCE DETAILS

LUCKY STARS VRH

SALE NO.  
ORC00-TS-2015.0002 SHEET 1 OF 8



## ROAD MAINTENANCE APPRAISAL

SALE NO.  
ORC00-TS-2015.0002

SALE NAME:  
LUCKY STARS VRH

ROAD NUMBERS	MILES
23-9-19.2	0.1
23-9-20.0	1.4
23-9-29.4	1.8
<hr/>	
Total	3.3

## - SUMMARY -

1.	MOVE IN:	\$1,232.00
2.	CULVERTS, SLOUGH, SLUMPS, & MISC	\$1,369.40
3.	GRADING FOR TIMBER HAUL	\$3,473.60
4.	GRADING FOR AGGREGATE HAUL	\$0.00
5.	MAINTENANCE ROCK	\$11,316.00
6.	OTHER MAINTENANCE	\$0.00
		<hr/>
TOTAL MAINTENANCE:		\$17,391.00

## ROAD MAINTENANCE APPRAISAL

SALE NO.  
ORC00-TS-2015.0002

SALE NAME:  
LUCKY STARS VRH

## - APPRAISAL WORKSHEET-

1.	MOVE-IN: EQUIPMENT	MOVE-INS	COST/ MOVE	
	DUMP TRUCK	1	\$185.00	\$185.00
	GRADER	1	\$356.00	\$356.00
	COMPACTOR	1	\$356.00	\$335.00
	BACKHOE W/ FE LOADER	1	\$356.00	\$356.00
		TOTAL =		\$1,232.00
2.	CULVERT MAINT., SLOUGH REMOVAL, SLUMP REPAIRS, ETC.			
	MAINT. OBLIGATION	AVE. COST		
	3.3 MILES @	\$410.00 / MILE =		\$1,369.40
3.	GRADING FOR TIMBER HAUL			
	UNIT #	GRADINGS	X MILES	ACC. MILES
		2	3.3	6.7
			TOTAL MILES	6.7
	6.7 MILES @	\$520.00	/ MILE =	\$3,473.60
4.	GRADING FOR AGGREGATE HAUL:			
	MILES @		/ MILE =	
5.	MAINTENANCE ROCK: WWD			
	SIZE 3-0"	APPR FROM		
			MILES	
	ROYALTY 150 CU. YDS. @	\$12.50		\$1,875.00
	PROCESSING 150 CU. YDS. @	\$1.40		\$210.00
	SLOW HAUL 0 CU. YDS. @	\$2.18		\$0.00
	MED. HAUL 150 CU. YDS. @	\$1.39	11.0	\$2,293.50
	FAST HAUL 150 CU. YDS. @	\$0.62	14.0	\$1,302.00
		TOTAL =		\$5,680.50
	MAINTENANCE ROCK: WWD			
	SIZE 1.5-0"	APPR FROM		
			MILES	
	ROYALTY 150 CU. YDS. @	\$12.20		\$1,830.00
	PROCESSING 150 CU. YDS. @	\$1.40		\$210.00
	SLOW HAUL 0 CU. YDS. @	\$2.18		\$0.00
	MED. HAUL 150 CU. YDS. @	\$1.39	11	\$2,293.50
	FAST HAUL 150 CU. YDS. @	\$0.62	14.0	\$1,302.00
		TOTAL =		\$5,635.50
	SIZE	APPR FROM		
			MILES	
	ROYALTY 0 CU. YDS. @	\$0.00		\$0.00
	PROCESSING 0 CU. YDS. @	\$0.00		\$0.00
	SLOW HAUL 0 CU. YDS. @	\$0.00		\$0.00
	MED. HAUL 0 CU. YDS. @	\$0.00		\$0.00
	FAST HAUL 0 CU. YDS. @	\$0.00		\$0.00
		TOTAL =		\$0.00