

GRO Order No. 2: Drilling, Completion and Spacing
of Geothermal Wells

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
CONSERVATION DIVISION

GEOHERMAL RESOURCES OPERATIONAL ORDER NO. 2

Effective February 1, 1975

DRILLING, COMPLETION AND SPACING OF GEOHERMAL WELLS

This Order is established pursuant to the authority prescribed in 30 CFR 270.11 and in accordance with 30 CFR 270.14, 270.15, and 270.40. All wells shall be drilled in such a manner as to minimize damage to the environment and to protect life, health, property, usable ground waters and geothermal resources.

All exploratory wells drilled for geothermal resources shall be drilled in accordance with the provisions of this Order. Initial development wells drilled for geothermal resources shall be drilled in accordance with the provisions of this Order, and these provisions shall continue in effect until field rules are issued. After field rules have been established by the Area Geothermal Supervisor (Supervisor), development wells in the individual fields shall be drilled in accordance with such rules.

Where sufficient geologic and engineering information is obtained through exploratory drilling, lessees may make application or the Supervisor may request the lessee to submit an application for the establishment of field rules. The Supervisor may issue field rules at any time he deems appropriate upon failure of the lessee to timely file for such field rules.

All wells drilled under the provisions of this Order shall have been included in an exploratory or development Plan of Operations as required under 30 CFR 270.34. Each Application for Permit to Drill (Form 9-331C) shall include all information required under 30 CFR 270.71, and shall include a notation of any proposed variances from the requirements of this Order. All variances from the requirements specified in this Order shall be subject to approval pursuant to 30 CFR 270.48. References in this Order to approvals, determinations, and requirements for submitting of information or applications for approval are to those granted, made or required by the Supervisor or his delegated representative. The lessee shall comply with the following requirements:

1. Well Casing. All wells shall be cased and cemented in accordance with the requirements of 30 CFR 270.15, and the application for permit to drill shall include the casing design safety factors for collapse, tension and burst. The permanent wellhead completion equipment shall be attached to the production casing or to the intermediate casing if the production casing does not reach to the surface except as otherwise authorized by the Supervisor to meet special well conditions. All casing strings reaching the surface shall be cemented at a sufficient

depth to provide adequate anchorage and support for the casing and any blowout prevention equipment required thereon. For the purpose of this Order, the several casing strings in order of normal installation are (1) conductor, (2) surface, (3) intermediate and (4) production strings. The following casing setting depth requirements are general in nature and subject to variations to permit the casing to be set and cemented in a competent formation. The Supervisor's determination of adequate casing setting depths shall be based upon all geologic and engineering factors including apparent geothermal gradients, depths and pressures of the various formations to be penetrated and all other pertinent information about the area. All depths in this Order refer to true vertical depth (TVD) below ground level, unless otherwise specified.

A. Conductor Casing. This casing shall be set at a minimum depth of 15 metres (50 feet) and a maximum depth of 60 metres (200 feet) before drilling into shallow formations suspected or known to contain geothermal resources, non-condensable gases, or other mineral resources or upon encountering such formations.

B. Surface Casing. This casing shall be set at a depth equivalent to or in excess of ten percent of the proposed total depth of the well provided, however, that such setting depth shall be not less than 60 metres (200 feet) nor more than 400 metres (1,300 feet).

C. Intermediate Casing. This casing shall be set at any time when required by well conditions encountered in drilling below the surface casing such as anomalous pressure zones, uncased fresh water aquifers, cave-ins, washouts, lost circulation zones, rapidly increasing thermal gradients or other drilling hazards. If a liner is used as an intermediate string, the lap shall be tested by a fluid entry or pressure test to determine whether a seal between the liner top and the next larger casing string has been achieved. The liner overlap shall be a minimum of 30 metres (100 feet). The test shall be recorded on the driller's log and may be witnessed by the Supervisor. In the event of lap or casing failure during the test, the lap or casing must be repaired or recemented and successfully retested as required by the Supervisor.

D. Production Casing. This casing may be set at the top of or through the potential producing zone and shall be set before completing the well for production. Production casing shall be run to the surface or lapped into the next larger casing string. The liner overlap, if utilized, shall be at least 30 metres (100 feet) and shall be tested, witnessed and recorded as in the case of intermediate casing hereinabove. In the event of lap or casing failure during the test, the lap or casing must be repaired or recemented and successfully retested as required

by the Supervisor. Production casing shall normally be of consistent nominal outside diameter from the surface or from the top of the lap to the casing shoe. The surface casing shall not be used as production casing, unless otherwise authorized by the Supervisor to meet special well conditions.

E. Cementing of Casing. The conductor and surface casing strings shall be cemented with a quantity of cement sufficient to fill the annular space back to the surface. The intermediate casing string shall likewise be cemented back to the surface or to the top of the lap if a liner is used as an intermediate string. Production casing shall be cemented with a high temperature resistant admix, unless waived by the Supervisor and shall be cemented in a manner necessary to exclude, isolate or segregate overlying formation fluids from the geothermal resources zone and to prevent the movement of fluids into possible fresh water zones. Production casing shall be cemented back to the surface or, if lapped, to the top of the lap. A temperature or cement bond log may be required by the Supervisor after setting and cementing the production casing and after all primary cementing operations if an unsatisfactory cementing job is indicated. Proposed well cementing techniques differing from the requirements of this paragraph will be considered by the Supervisor on an individual well basis.

F. Pressure Testing. Prior to drilling out the casing shoe after cementing, all casing strings set to a depth of 152 metres (500 feet) or greater, except for conductor casing, shall be pressure tested to a minimum pressure of 69 bars (1,000 psi) or 0.045 bars/metre (0.2 psi/ft) whichever is greater. All casing strings set at a depth less than 152 metres (500 feet), except for conductor casing, shall be pressure tested to a minimum pressure of 35 bars (500 psi). Such test shall not exceed the rated working pressure of the casing or the blow-out preventer stack assembly, whichever is lesser.

In the event of casing failure during the test, the casing must be repaired or recemented until a satisfactory test is obtained. A pressure decline of 10 percent or less in 30 minutes shall be considered satisfactory.

Casing test results shall be recorded on the driller's log and reported to the Supervisor within 30 days after the completion of such test. Advance notice of all casing and lap tests shall be given in sufficient time to enable the Supervisor to be present to witness such tests. The casing and lap test reports shall give a detailed description of the test, including mud and cement volumes, lapse of time between running and cementing casing and testing, method of testing and test results.

G. Directional Surveys.

(1) General. Deviation surveys (inclination from vertical or single shot) shall be taken on all wells during the normal course of drilling at intervals not to exceed 152 metres (500 feet). The Supervisor may require a directional survey giving both inclination and azimuth or a dipmeter to be obtained on all wells. In calculating all surveys, a correction from true north to Lambert-Grid north shall be made after making the magnetic to true north correction. All surveys shall be filed with the Supervisor. Where directional surveys are required, composite surveys shall be filed with the Supervisor showing the interval from the bottom of the conductor casing to total depth.

(2) Vertical Wells. Wells are considered vertical if inclination does not exceed an average of five degrees from the vertical. The Supervisor may require a directional survey giving both inclination and azimuth at intervals not exceeding 30 metres (100 feet) between stations prior to, or upon, setting any casing string or liner (except conductor casing) and at total depth on any vertical well drilled in close proximity to lease boundaries or areas with an unstable land surface, highly faulted or steeply dipping beds, or in areas of suspected abnormal formation pressures.

(3) Directional Wells. Wells are considered directional if inclination exceeds an average of five degrees from the vertical. Directional surveys giving both inclination and azimuth shall be obtained at intervals not to exceed 30 metres (100 feet) between stations prior to, or upon, setting any casing string or liner (except conductor casing) and at total depth.

2. Blowout Prevention Equipment and Procedures. All necessary precautions shall be taken to keep all wells under control at all times, utilize trained and competent personnel, and utilize properly maintained equipment and materials. Blowout preventers and related well control equipment shall be installed, tested immediately thereafter and maintained ready for use until drilling operations are completed. Certain components, such as packing elements and ram rubbers, shall be of high temperature resistant material as necessary. All kill lines, blowdown lines, manifolds and fittings shall be steel and shall have a temperature derated minimum working pressure rating equivalent to the maximum anticipated wellhead surface pressure. Subject to subparagraphs (A) and (B) hereinbelow blowout prevention equipment shall have manually operated gates and hydraulic actuating systems and accumulators of sufficient capacity to close all of the hydraulically-operated equipment and have a minimum pressure of 69 bars (1,000 psi) remaining on the accumulator. Dual control stations shall be installed with a high

pressure backup system. One control panel shall be located at the driller's station and one control panel shall be located on the ground at least 15 metres (50 feet) away from the wellhead or rotary table. Air or other gaseous fluid drilling systems shall have blowout prevention assemblies. Such assemblies may include, but are not limited to, a rotating head, a double ram blowout preventer or equivalent, a banjo-box or an approved substitute therefor and a blind ram blowout preventer or gate valve, respectively. Exceptions to the requirements of this paragraph will be considered by the Supervisor only for certain geologic and well conditions such as stable surface areas with known low subsurface formation pressures and temperatures.

A proposed blowout prevention program and a blowout contingency plan including proposed containment, public health and safety and clean-up measures shall be submitted with the Application for Permit to Drill (Form 9-331C).

A. Conductor Casing. Before drilling below this string, at least one remotely controlled hydraulically-operated expansion type preventer or an acceptable alternative, approved by the Supervisor, including a drilling spool with side outlets or equivalent, shall be installed. A kill line and blowdown line with appropriate fittings shall be connected to the drilling spool.

B. Surface, Intermediate and Production Casing. Before drilling below any of these strings, the blowout prevention equipment shall include a minimum of:

- (1) One expansion-type preventer and accumulator or a rotating head;
- (2) A manual and remotely controlled hydraulically-operated double ram blowout preventer or equivalent having a temperature derated minimum working pressure rating which exceeds the maximum anticipated surface pressure at the anticipated reservoir fluid temperature;
- (3) A drilling spool with side outlets or equivalent;
- (4) A fillup line;
- (5) A kill line equipped with at least one valve; and
- (6) A blowdown line equipped with at least two valves and securely anchored at all bends and at the end.

C. Testing and Maintenance. Ram-type blowout preventers and auxiliary equipment shall be tested to a minimum of 69 bars (1,000 psi) or to the working pressure of the casing or assembly, whichever is the lesser. Expansion-type blowout preventers shall be tested to 70

percent of the above pressure testing requirements.

The blowout prevention equipment shall be pressure tested:

- (1) When installed;
- (2) Prior to drilling out plugs and/or casing shoes;
- (3) Not less than once each week, alternating the control stations; and
- (4) Following repairs that require disconnecting a pressure seal in the assembly.

During drilling operations blowout prevention equipment shall be actuated to test proper functioning as follows:

- (1) Once each trip for blind and pipe rams but not less than once each day for pipe rams; and
- (2) At least once each week on the drill pipe for expansion-type preventers.

All flange bolts shall be inspected at least weekly and re-tightened as necessary during drilling operations. The auxiliary control systems shall be inspected daily to check the mechanical condition and effectiveness and to ensure personnel acquaintance with the method of operation. Blowout prevention and auxiliary control equipment shall be cleaned, inspected and repaired, if necessary, prior to installation to assure proper functioning. Blowout prevention controls shall be plainly labeled, and all crew members shall be instructed on the function and operation of such equipment. A blowout prevention drill shall be conducted weekly for each drilling crew. All blowout prevention tests and crew drills shall be recorded on the driller's log.

D. Related Well Control Equipment. A full opening drill string safety valve in the open position shall be maintained on the rig floor at all times while drilling operations are being conducted. A kelly cock shall be installed between the kelly and the swivel.

3. Drilling Fluid. The properties, use and testing of drilling fluids and the conduct of related drilling procedures shall be such as are necessary to prevent the blowout of any well. Sufficient drilling fluid materials to ensure well control shall be maintained in the field area readily accessible for use at all times.

A. Drilling Fluid Control. Before pulling drill pipe, the drilling fluid shall be properly conditioned or displaced. The hole shall be kept reasonably full at all times, however, in no event shall the annular mud level be deeper than 30 metres (100 feet) from the rotary table when coming out of the hole with drill pipe. Mud cooling techniques shall be utilized when necessary to maintain mud characteristics for proper well control and hole conditioning.

B. Drilling Fluid Testing. Mud testing and treatment consistent with good operating practice shall be performed daily or more frequently as conditions warrant. Mud testing equipment shall be maintained on the drilling rig at all times.

The following drilling fluid system monitoring or recording devices shall be installed and operated continuously during drilling operations, with mud, occurring below the shoe of the conductor casing. No exceptions to these requirements will be allowed without the specific prior permission of the Supervisor:

(1) High-low level mud pit indicator including a visual and audio-warning device;

(2) Degassers, desilters and desanders;

(3) A mechanical, electrical or manual surface drilling fluid temperature monitoring device. The temperature of the drilling fluid going into and coming out of the hole shall be monitored, read and recorded on the driller's or mud log for a minimum of every 9 metres (30 feet) of hole drilled below the conductor casing; and

(4) A hydrogen sulfide indicator and alarm shall be installed in areas suspected or known to contain hydrogen sulfide gas which may reach levels considered to be dangerous to the health and safety of personnel in the area.

C. Monitoring. From the time drilling operations are initiated and until the well is completed or abandoned, a member of the drilling crew or the toolpusher shall monitor the rig floor at all times for surveillance purposes, unless the well is secured with blowout preventers or cement plugs.

4. Well Logging. All wells shall be logged with an induction electric log or equivalent from total depth to the shoe of the conductor casing. The Supervisor may grant an exception to this requirement when well conditions make it impractical or impossible to meet the above requirements.

A. Electric Logs. The lessee shall furnish to the Supervisor two legible exact copies of all logs run, within 30 days after completion of drilling operations on each well. Two copies of field prints of such logs shall be made immediately available to the Supervisor upon his request. Two copies of chemical analyses of geothermal fluids or other similar services performed shall be submitted to the Supervisor within 30 days after such services are completed.

B. Lithologic Logs. Two legible exact copies of core analysis reports and lithologic (mud) logs shall be submitted to the Supervisor within 30 days after the completion of such reports or logs, when such services are used. However, daily logs shall be made available to the Supervisor immediately upon the completion of such daily logs upon his request.

5. Wellhead Equipment and Testing.


A. Completions. All wellhead connections shall be fluid pressure tested to the API or ASA working pressure rating. Cold water is recommended as the testing fluid. Welding of wellhead connections shall be performed by a certified welder using materials in conformance with ASTM specifications.

B. Wellhead Equipment. All completed wells shall be equipped with a minimum of one casinghead with side outlets, one master valve and one production valve, unless otherwise authorized by the Supervisor. All casingheads, Christmas trees, fittings and connections shall have a temperature derated working pressure equal to or greater than the surface shut-in pressure of the well at reservoir temperature. Packing, sealing mediums and lubricants shall consist of materials or substances that function effectively at, and are resistant to, high temperatures. Wellhead equipment, valves, flanges and fittings shall meet minimum ASA standards or minimum API Standard 6A specifications. Casinghead connections shall be made such that fluid can be pumped between casing strings.

C. Testing. Any well showing sustained casinghead pressure or leaking of geothermal fluids between casing strings shall be tested to determine the origin of the failure, when such failure point is not otherwise determinable, and corrective measures shall be taken.


6. Well Spacing. No producing interval of any well shall be located within 30 metres (100 feet) of the outer boundaries of the leased lands, except where approved by the Supervisor. No surface location of a well shall be located within 15 metres (50 feet) of the boundary of any legal subdivision unless otherwise authorized by the Supervisor. The Supervisor may approve or prescribe such well

spacing as he determines to be necessary for the proper development of the geothermal resources in accordance with the provisions of 30 CFR 270.15.



Reid T. Stone
Area Geothermal Supervisor

Approved:

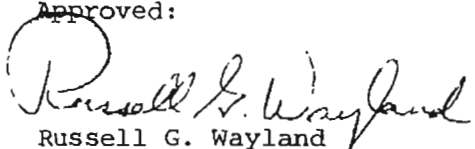

Russell G. Wayland
Chief, Conservation Division