


TERRACING PLAN VIEW

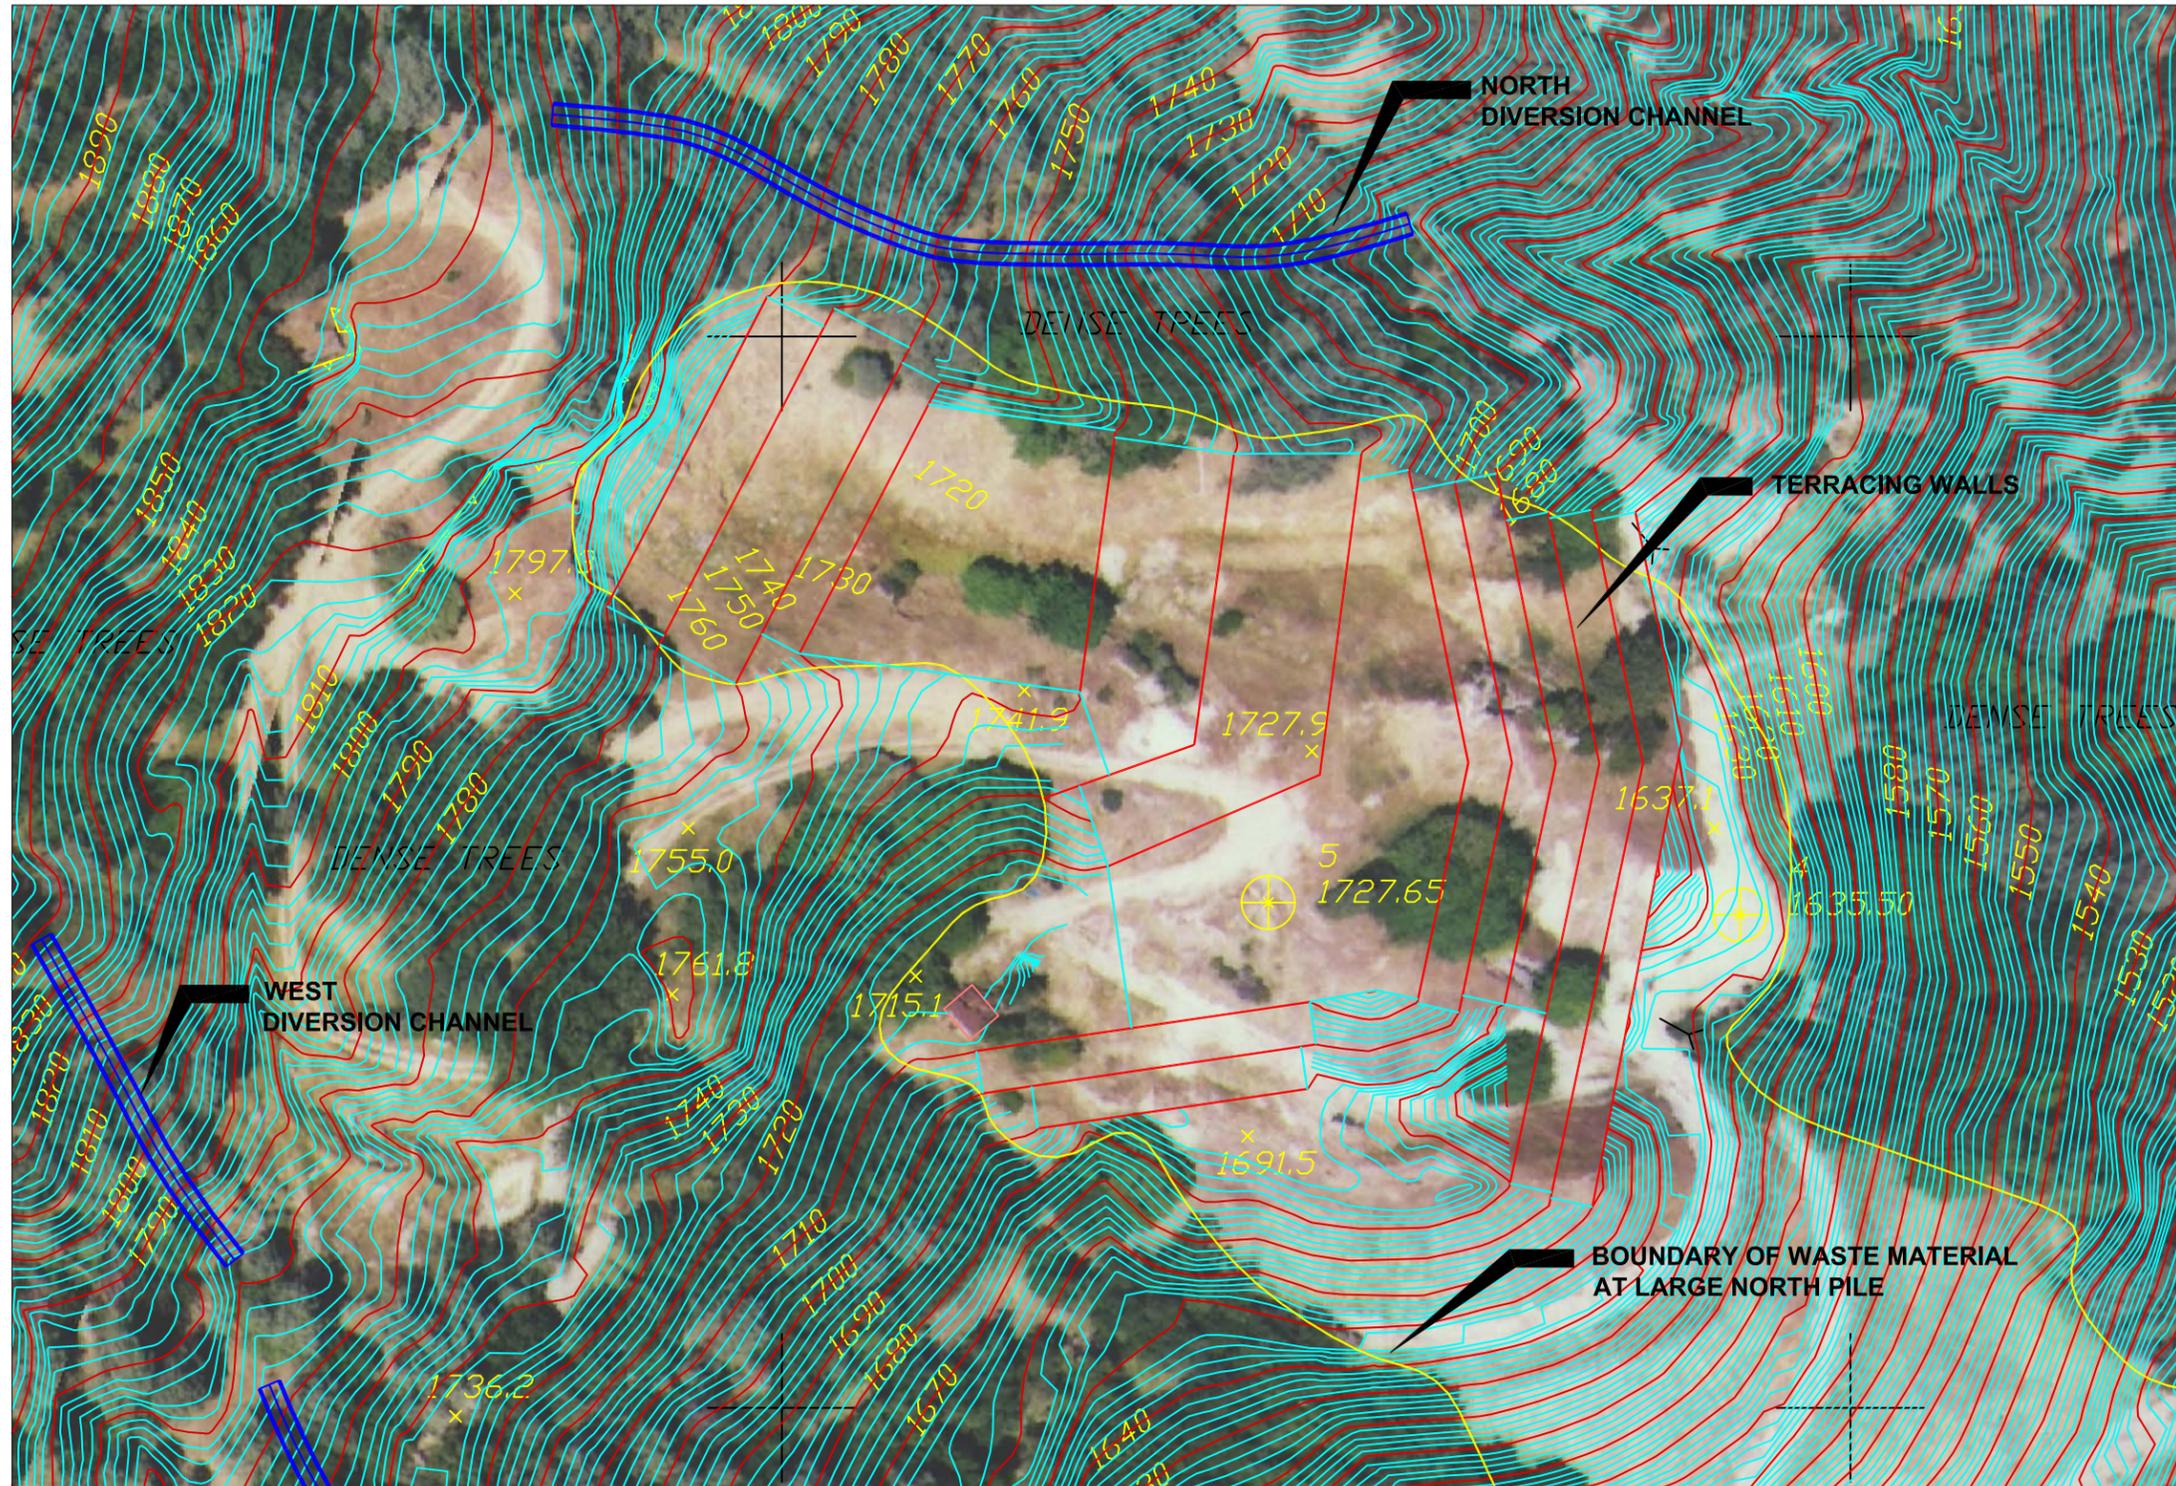


NOTES

STABILIZATION BY TERRACING:

1. MAXIMUM SLOPES BETWEEN TERRACE WALLS IS 2H:1V.
2. WALLS ARE 10 VERTICAL FEET (5 FEET VISIBLE AND 5 FEET BURIED).
3. TYPICAL HORIZONTAL DISTANCE BETWEEN TERRACE WALLS IS 20 FEET; HOWEVER, THIS VARIES BY LOCATION. SEE PLAN VIEW.

TERRACING DETAILS

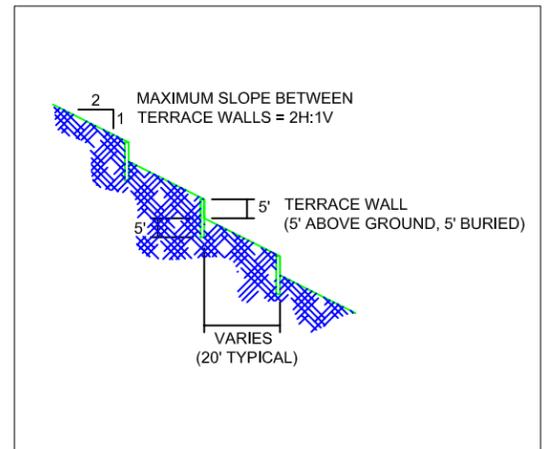

ALTERNATIVE 3: STABILIZATION BY TERRACING SLOPES

No.	Revisions	Date
#1		
#2		
#3		
#4		

Date: SEPTEMBER 21, 2007	Drawn By: A. HAINES
Project No. 7469-010	Checked By: C. G. LABERGE, PE
Figure: 7-2	Sheet: 1 OF 1