

**U.S. Department of the Interior
Bureau of Land Management
Colorado River Valley Field Office
2300 River Frontage Road
Silt, Colorado 81652**

DOCUMENTATION OF LAND USE PLAN CONFORMANCE AND NEPA ADEQUACY

NUMBER: DOI-BLM-CO-N040-2012-0043-DNA

PROJECT NAME: Drill One Federal Well (11D-3-791) from Existing MDP 26 Pad in Gibson Gulch Unit.

PLANNING UNIT: Colorado River Valley Field Office (CRVFO)

LEGAL DESCRIPTIONS: Township 6 South (T6S), Range 91 West (R91W), Section 33, SESE, Sixth Principal Meridian

APPLICANT: Bill Barrett Corporation (“BBC”)

DESCRIPTION OF PROPOSED ACTION: BBC submitted an Application for Permit to Drill (APD) for the 11D-3-791 oil and gas well from the existing “MDP 26 Pad” located on Federal surface with underlying Federal minerals. The well would be drilled directionally into Federal lease COC66577. The existing pad was analyzed previously in the BBC Gibson Gulch II MDP, DOI-BLM-CO-N040-2010-0032-EA. The proposed well was analyzed in the Antero Resource Corporation (“Antero”) North Castle Springs Master Development Plan (MDP), DOI-BLM-CO-N040-2011-0030-EA, as one of 22 wells to be drilled from the “O Pad.” Subsequent to those EAs, a joint operating agreement was completed between BBC and Antero to drill the Antero well from the BBC pad. Figure 1 is a map of the pad location and access routes. Figure 2 is a sketch of the existing pad layout and planned production equipment.

LAND USE PLAN (LUP) CONFORMANCE REVIEW: The Proposed Action is subject to the following plan:

Name of Plan, as Amended: 1984 Record of Decision and Resource Management Plan, Glenwood Springs Resource Area (Revised 1988); amended by the 1991 Colorado Oil and Gas Leasing and Development Final Environmental Impact Statement (FEIS); amended by the 1999 Oil & Gas Leasing & Development Record of Decision and Resource Management Plan Amendment.

The Proposed Action is in conformance with the LUP because it is specifically provided for in the following LUP decision(s): “697,720 acres of BLM-administered mineral estate within the Glenwood Springs Resource Area [= Colorado River Valley Field Office Area] are open to oil and gas leasing and development, subject to lease terms and (as applicable) lease stipulations” (BLM 1991, page 3).

The Proposed Action is in conformance with the LUP, even though it is not specifically provided for, because it is clearly consistent with the following LUP decisions (objectives, terms, and conditions):

REVIEW OF EXISTING NEPA DOCUMENTS:

- Glenwood Springs Resource Area, Oil & Gas Leasing & Development Final Supplemental Environmental Impact Statement (FSEIS), March 1999
- North Castle Springs MDP, Environmental Assessment DOI-BLM-CO-N040-2010-0032
- Gibson Gulch II MDP, Environmental Assessment DOI-BLM-CO-N040-2011-0030

NEPA ADEQUACY CRITERIA:

1. Is the Proposed Action substantially the same action and at the same site as specifically analyzed in an existing NEPA document?

Documentation of answer and explanation: Yes. The Proposed Action (well X) was addressed and analyzed in the North Castle Springs MDP DOI-BLM-CO-N040-2010-0032-EA, signed July 16, 2010. The proposed site was analyzed in the Gibson Gulch II MDP, DOI-BLM-CO-N040-2011-0030-EA, signed October 24, 2011.

2. Was a reasonable range of alternatives to the Proposed Action analyzed in the existing NEPA document(s), and does that range and analysis appropriately consider current environmental concerns, interests, and resource values?

Documentation of answer and explanation: Yes. The EA for the well was analyzed the Proposed Action and a No Action Alternative. No other alternative was considered a reasonable option for efficient development of the leasehold.

3. Does the information or circumstances upon which the existing NEPA document was based remain valid and germane to the Proposed Action? Is the analysis still valid in light of new studies or resource assessment information?

Documentation of answer and explanation: Yes. The EAs for the well was a recent document (2010) that was based on contemporary studies and resource assessment information. The circumstances upon which the RMPA/EIS is based remain valid and germane to the Proposed Action.

4. Do the methodology and analytical approach used in the existing NEPA document continue to be appropriate for the Proposed Action?

Documentation of answer and explanation: Yes. The methodology and analytical approach used in the EA consisted of relying on the results of the most recent regional air quality modeling available at that time, prepared for BLM in conjunction with the Resource Management Plan (RMP) amendment for the Roan Plateau Planning Area (BLM 2006). Since then, new modeling prepared for BLM in 2011 in conjunction with an RMP revision confirms the results of the analysis in the EA. Specifically, the new model confirms that projects of the type and scale of the Gibson Gulch II and North Castle Springs MDPs (BLM 2010, 2011) are predicted to not have significant adverse impacts on air quality. Both models assessed potential impacts of pollutants resulting from oil and gas development, including volatile organic compounds (VOCs) and other hazardous air pollutants (HAPs), particulates, greenhouse gases and other pollutants derived from combustion of fossil fuels, and acid deposition. Both models also analyzed potential impacts on visibility in several Class I and sensitive Class II areas within and beyond the CRVFO boundary. The current model also predicts no

violation of current air quality standards for ozone. The new modeling thus confirms that the methodology and analytical approach used in the EA remain appropriate for the Proposed Action.

5. Are the direct and indirect impacts of the Proposed Action unchanged from those identified in the existing NEPA document?

Documentation of answer and explanation: Yes. Results of the updated air quality model currently being used by CRVFO for analysis of oil and gas projects are consistent with those predicted using the earlier model cited in the air quality analysis section of the EA. The direct and indirect impacts of the proposed lease sales are substantially unchanged from those identified in the RMPA/EIS, upon which the air impacts analysis in the EA was based.

6. Are the cumulative impacts that would result from implementation of the Proposed Action unchanged from those analyzed in the existing NEPA document(s)?

Documentation of answer and explanation: Yes. The cumulative impacts remain substantially unchanged from those analyzed in the EA.

7. Is the existing analysis valid in light of any new information or circumstances regarding climate change, global warming, and greenhouse gas emissions? Can it reasonably be concluded that new information and new circumstances would not substantially change the analysis of the new Proposed Action?

Documentation of answer and explanation: Yes. The EA includes information on these topics, and greenhouse gas emissions were included in both the earlier air quality model used in the EA analysis and in the updated air quality model which the CRVFO is currently using.

8. Is the public involvement and interagency review associated with the existing NEPA document adequate for the Proposed Action?

Documentation of answer and explanation: Yes. The Proposed Action for the North Castle Springs MDP, which included the current Proposed Action (drilling of a Federal well into lease COC66577), was published for public review. Public comments arising from that review were incorporated into the EA document, as were written responses to the comments. In addition, the APD for the subject well was available for public review and comment for a period of 30 days prior to their qualifying for approval, subject to the results of this DNA.

INTERDISCIPLINARY REVIEW: CRVFO team members who participated in review of air quality impacts of the Proposed Action in the context of the updated air quality model currently being used by the CRVFO for oil and gas projects are listed below. No review relative to other resources was required, because all other aspects of the Proposed Action were addressed in the EAs for the well pad (BLM 2010) and for the well (BLM 2011), with no changed circumstances or new analyses relative to those resources.

<u>Name</u>	<u>Title</u>	<u>Review Completed</u>
Allen B. Crockett, Ph.D.	Supervisory Natural Resource Specialist/Physical Scientist	NEPA Compliance
Shauna M. Kocman, Ph.D.	Environmental Engineer, Air Program Lead	Air Quality Impacts

MITIGATION: Mitigation remains the same as included in the Conditions of Approval (COAs) incorporated into the two EAs and specified to be attached to all APDs issued pursuant to those NEPA documents, including the APD associated with Proposed Action.

Vanessa Bull, Natural Resource Specialist

SIGNATURE OR PREPARER:



Vanessa Bull, Natural Resource Specialist

DATE SIGNED: 2/27/12

CONCLUSION

DOI-BLM-CO-N040-2012-0043-DNA

Based on the review documented above, I have concluded that this proposal conforms to the current CRVFO land use plan and that the NEPA documentation previously prepared for the well (DOI-BLM-CO-N040-2010-0032-EA) and the well pad (DOI-BLM-CO-N040-2011-0030-EA) cover fully the Proposed Action and constitute BLM's compliance with the requirements of NEPA.

SIGNATURE OF RESPONSIBLE OFFICIAL:



Allen B. Crockett, Ph.D., J.D.
Supervisory NRS/Physical Scientist

DATE SIGNED: 2/27/12

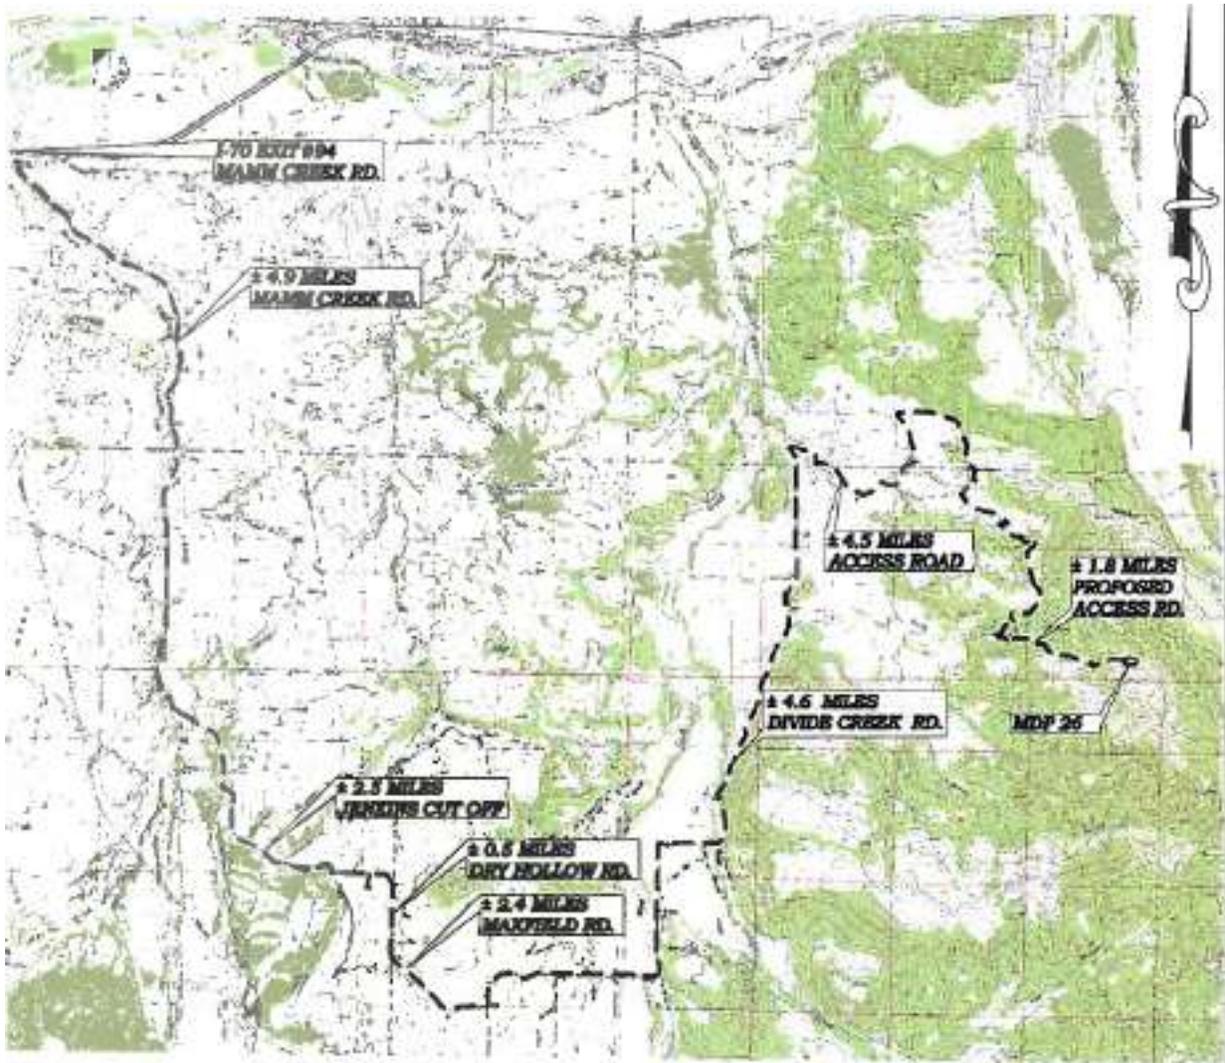


Figure 1. Existing Pad Location and Access

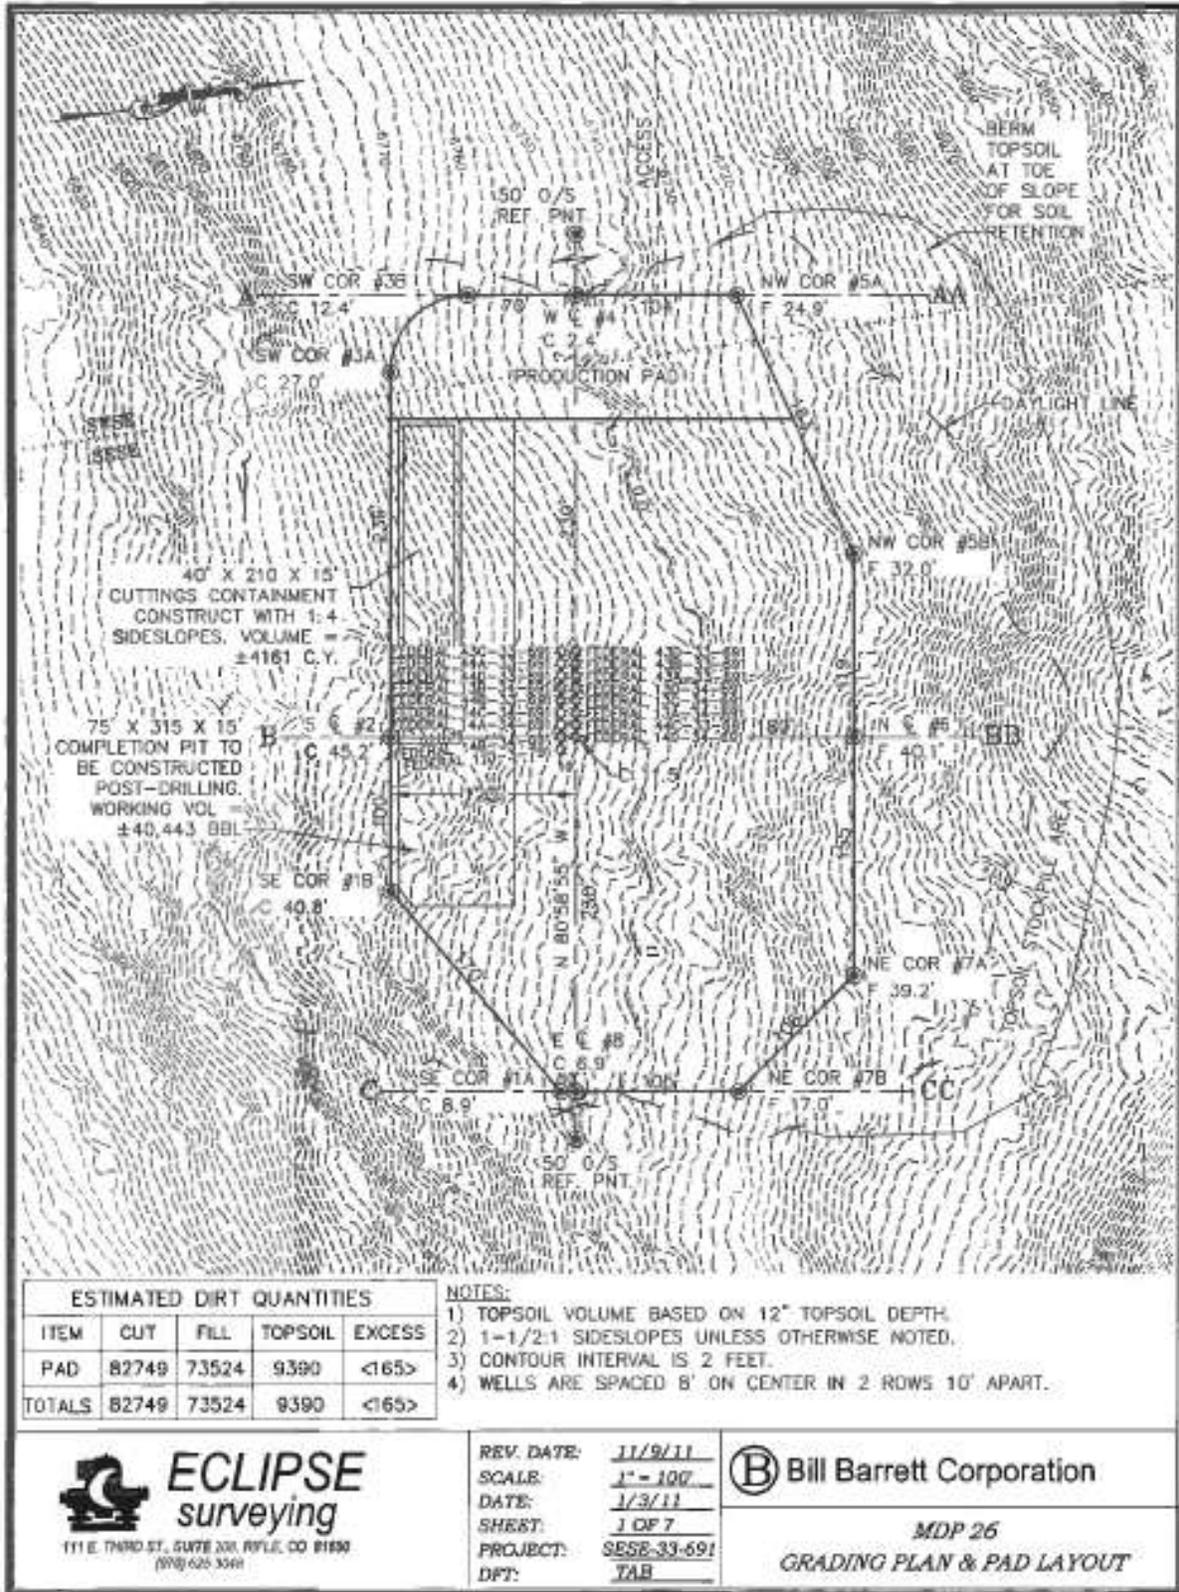


Figure 2. Existing Pad Location With Proposed Well.

STANDARD SURFACE USE CONDITIONS OF APPROVAL
Antero Resources 11D-3-791 Well from Bill Barrett Corporation MDP 26 Pad
DOI-BLM-CO-N040-2012-0043-DNA

The following standard surface use COAs are in addition to stipulations attached to the respective Federal leases and to any site-specific COAs for individual well pads. Wording and numbering of these COAs may differ from those included in the Gibson Gulch II MDP (DOI-BLM-CO-N040-2011-0030-EA). In cases of discrepancies, the following COAs supersede earlier versions.

1. Administrative Notification. The operator shall notify the BLM representative at least 48 hours prior to initiation of construction. If requested by the BLM representative, the operator shall schedule a pre-construction meeting, including key operator and contractor personnel, to ensure that any unresolved issues are fully addressed prior to initiation of surface-disturbing activities or placement of production facilities.
2. Road Construction and Maintenance. Roads shall be crowned, ditched, surfaced, drained with culverts and/or water dips, and constructed to BLM Gold Book standards. Initial gravel application shall be a minimum of 6 inches. The operator shall provide timely year-round road maintenance and cleanup on the access roads. A regular schedule for maintenance shall include, but not be limited to, blading, ditch and culvert cleaning, road surface replacement, and dust abatement. When rutting within the traveled way becomes greater than 6 inches, blading and/or gravelling shall be conducted as approved by the BLM.
3. Dust Abatement. The operator shall implement dust abatement measures as needed to prevent fugitive dust from vehicular traffic, equipment operations, or wind events. The BLM may direct the operator to change the level and type of treatment (watering or application of various dust agents, surfactants, and road surfacing material) if dust abatement measures are observed to be insufficient to prevent fugitive dust.
4. Drainage Crossings and Culverts. Construction activities at perennial, intermittent, and ephemeral drainage crossings (e.g. burying pipelines, installing culverts) shall be timed to avoid high flow conditions. Construction that disturbs any flowing stream shall utilize either a piped stream diversion or a cofferdam and pump to divert flow around the disturbed area.

Culverts at drainage crossings shall be designed and installed to pass a 25-year or greater storm event. On perennial and intermittent streams, culverts shall be designed to allow for passage of aquatic biota. The minimum culvert diameter in any installation for a drainage crossing or road drainage shall be 24 inches. Crossings of drainages deemed to be jurisdictional waters of the U.S. pursuant to Section 404 of the Clean Water Act may require additional culvert design capacity. Due to the flashy nature of area drainages and anticipated culvert maintenance, the U.S. Army Corps of Engineers (USACE) recommends designing drainage crossings for the 100-year event. Contact the USACE Colorado West Regulatory Branch at 970-243-1199 ext. 17.

Pipelines installed beneath stream crossings shall be buried at a minimum depth of 4 feet below the channel substrate to avoid exposure by channel scour and degradation. Following burial, the channel grade and substrate composition shall be returned to pre-construction conditions.

5. Jurisdictional Waters of the U.S. The operator shall obtain appropriate permits from the U.S. Army Corps of Engineers (USACE) prior to discharging fill material into waters of the U.S. in accordance

with Section 404 of the Clean Water Act. Waters of the U.S. are defined in 33 CFR Section 328.3 and may include wetlands as well as perennial, intermittent, and ephemeral streams. Permanent impacts to waters of the U.S. may require mitigation. Contact the USACE Colorado West Regulatory Branch at 970-243-1199 ext. 17. Copies of any printed or emailed approved USACE permits or verification letters shall be forwarded to the BLM.

6. Wetlands and Riparian Zones. The operator shall restore temporarily disturbed wetlands or riparian areas. The operator shall consult with the BLM Colorado River Valley Field Office to determine appropriate mitigation, including verification of native plant species to be used in restoration.
7. Reclamation. The goals, objectives, timelines, measures, and monitoring methods for final reclamation of oil and gas disturbances are described in Appendix I (Surface Reclamation) of the 1998 Draft Supplemental EIS (DSEIS). Specific measures to follow during interim and temporary (pre-interim) reclamation are described below.
 - a. Reclamation Plans. In areas that have low reclamation potential or are especially challenging to restore, reclamation plans will be required prior to APD approval. The plan shall contain the following components: detailed reclamation plans, which include contours and indicate irregular rather than smooth contours as appropriate for visual and ecological benefit; timeline for drilling completion, interim reclamation earthwork, and seeding; soil test results and/or a soil profile description; amendments to be used; soil treatment techniques such as roughening, pocking, and terracing; erosion control techniques such as hydromulch, blankets/matting, and wattles; and visual mitigations if in a sensitive VRM area.
 - b. Deadline for Interim Reclamation Earthwork and Seeding. Interim reclamation to reduce a well pad to the maximum size needed for production, including earthwork and seeding of the interim reclaimed areas, shall be completed within 6 months following completion of the last well planned to be drilled on that pad as part of a continuous operation. If a period of greater than one year is expected to occur between drilling episodes, BLM may require implementation of all or part of the interim reclamation program.

Reclamation, including seeding, of temporarily disturbed areas along roads and pipelines, and of topsoil piles and berms, shall be completed within 30 days following completion of construction. Any such area on which construction is completed prior to December 1 shall be seeded during the remainder of the early winter season instead of during the following spring, unless BLM approves otherwise based on weather. If road or pipeline construction occurs discontinuously (e.g., new segments installed as new pads are built) or continuously but with a total duration greater than 30 days, reclamation, including seeding, shall be phased such that no portion of the temporarily disturbed area remains in an unreclaimed condition for longer than 30 days. BLM may authorize deviation from this requirement based on the season and the amount of work remaining on the entirety of the road or pipeline when the 30-day period has expired.

If requested by the project lead NRS for a specific pad or group of pads, the operator shall contact the NRS by telephone or email approximately 72 hours before reclamation and reseeding begin. This will allow the NRS to schedule a pre-reclamation field visit if needed to ensure that all parties are in agreement and provide time for adjustments to the plan before work is initiated.

The deadlines for seeding described above are subject to extension upon approval of the BLM based on season, timing limitations, or other constraints on a case-by-case basis. If the BLM approves an extension for seeding, the operator may be required to stabilize the reclaimed surfaces using hydromulch, erosion matting, or other method until seeding is implemented.

- c. Topsoil Stripping, Storage, and Replacement. All topsoil shall be stripped following removal of vegetation during construction of well pads, pipelines, roads, or other surface facilities. In areas of thin soil, a minimum of the upper 6 inches of surficial material shall be stripped. The BLM may specify a stripping depth during the onsite visit or based on subsequent information regarding soil thickness and suitability. The stripped topsoil shall be stored separately from subsoil or other excavated material and replaced prior to final seedbed preparation. The BLM best management practice (BMP) for the Windrowing of Topsoil (COA number 19) shall be implemented for well pad construction whenever topography allows.
- d. Seedbed Preparation. For cut-and-fill slopes, initial seedbed preparation shall consist of backfilling and recontouring to achieve the configuration specified in the reclamation plan. For compacted areas, initial seedbed preparation shall include ripping to a minimum depth of 18 inches, with a maximum furrow spacing of 2 feet. Where practicable, ripping shall be conducted in two passes at perpendicular directions. Following final contouring, the backfilled or ripped surfaces shall be covered evenly with topsoil.

Final seedbed preparation shall consist of scarifying (raking or harrowing) the spread topsoil prior to seeding. If more than one season has elapsed between final seedbed preparation and seeding, and if the area is to be broadcast-seeded or hydroseeded, this step shall be repeated no more than 1 day prior to seeding to break up any crust that has formed.

If directed by the BLM, the operator shall implement measures following seedbed preparation (when broadcast-seeding or hydroseeding is to be used) to create small depressions to enhance capture of moisture and establishment of seeded species. Depressions shall be no deeper than 1 to 2 inches and shall not result in piles or mounds of displaced soil. Excavated depressions shall not be used unless approved by the BLM for the purpose of erosion control on slopes. Where excavated depressions are approved by the BLM, the excavated soil shall be placed only on the downslope side of the depression.

If directed by the BLM, the operator shall conduct soil testing prior to reseeding to identify if and what type of soil amendments may be required to enhance revegetation success. At a minimum, the soil tests shall include texture, pH, organic matter, sodium adsorption ratio (SAR), cation exchange capacity (CEC), alkalinity/salinity, and basic nutrients (nitrogen, phosphorus, potassium [NPK]). Depending on the outcome of the soil testing, the BLM may require the operator to submit a plan for soil amendment. Any requests to use soil amendments not directed by the BLM shall be submitted to the CRVFO for approval.

Seedbed preparation is not required for topsoil storage piles or other areas of temporary seeding.

- e. Seed Mixes. A seed mix consistent with BLM standards in terms of species and seeding rate for the specific habitat type shall be used on all BLM lands affected by the project (see Attachments 1 and 2 of the letter provided to operators dated May 1, 2008). Note that temporary seeding no longer allows the use of sterile hybrid non-native species.

For private surfaces, the menu-based seed mixes are recommended, but the surface landowner has ultimate authority over the seed mix to be used in reclamation. The seed shall contain no noxious, prohibited, or restricted weed seeds and shall contain no more than 0.5 percent by weight of other weed seeds. Seed may contain up to 2.0 percent of "other crop" seed by weight, including the seed of other agronomic crops and native plants; however, a lower percentage of other crop seed is recommended. Seed tags or other official documentation shall be submitted to

BLM at least 14 days before the date of proposed seeding for acceptance. Seed that does not meet the above criteria shall not be applied to public lands.

- f. Seeding Procedures. Seeding shall be conducted no more than 24 hours following completion of final seedbed preparation.

Where practicable, seed shall be installed by drill-seeding to a depth of 0.25 to 0.5 inch. Where drill-seeding is impracticable, seed may be installed by broadcast-seeding at twice the drill-seeding rate, followed by raking or harrowing to provide 0.25 to 0.5 inch of soil cover or by hydroseeding and hydromulching. Hydroseeding and hydromulching shall be conducted in two separate applications to ensure adequate contact of seeds with the soil.

If interim revegetation is unsuccessful, the operator shall implement subsequent reseeding until interim reclamation standards are met.

- g. Mulch. Mulch shall be applied within 24 hours following completion of seeding. Mulch may consist of either hydromulch or of certified weed-free straw or certified weed-free native grass hay crimped into the soil.

NOTE: Mulch is not required in areas where erosion potential mandates use of a biodegradable erosion-control blanket (straw matting).

- h. Erosion Control. Cut-and-fill slopes shall be protected against erosion with the use of water bars, lateral furrows, or other measures approved by the BLM. Cut-and-fill slopes along drainages or in areas with high erosion potential shall also be protected from erosion using hydromulch designed specifically for erosion control or biodegradable blankets/matting, bales, or wattles of weed-free straw or weed-free native grass hay. A well-anchored fabric silt fence shall also be placed at the toe of cut-and-fill slopes along drainages or to protect other sensitive areas from deposition of soils eroded off the slopes. Additional BMPs shall be employed as necessary to reduce soil erosion and offsite transport of sediments.

- i. Site Protection. The pad shall be fenced to BLM standards to exclude livestock grazing for the first two growing seasons or until seeded species are firmly established, whichever comes later. The seeded species will be considered firmly established when at least 50 percent of the new plants are producing seed. The BLM will approve the type of fencing.

- j. Monitoring. The operator shall conduct annual monitoring surveys of all sites categorized as “operator reclamation in progress” and shall submit an annual monitoring report of these sites to the BLM by **December 31** of each year. The monitoring program shall use the four Reclamation Categories defined in Appendix I of the 1998 DSEIS to assess progress toward reclamation objectives. The annual report shall document whether attainment of reclamation objectives appears likely. If one or more objectives appear unlikely to be achieved, the report shall identify appropriate corrective actions. Upon review and approval of the report by the BLM, the operator shall be responsible for implementing the corrective actions or other measures specified by the BLM.

8. Weed Control. The operator shall regularly monitor and promptly control noxious weeds or other undesirable plant species as set forth in the Glenwood Springs Field Office *Noxious and Invasive Weed Management Plan for Oil and Gas Operators*, dated March 2007. A Pesticide Use Proposal (PUP) must be approved by the BLM prior to the use of herbicides. Annual weed monitoring reports shall be submitted to BLM by **December 1**.

9. Big Game Winter Range Timing Limitation. To minimize impacts to wintering big game, no construction, drilling or completion activities shall occur during a Timing Limitation (TL) period from **December 1 to April 30 annually.**
10. Bald and Golden Eagles. It shall be the responsibility of the operator to comply with the Bald and Golden Eagle Protection Act (Eagle Act) with respect to “take” of either eagle species. Under the Eagle Act, “take” includes to pursue, shoot, shoot at, poison, wound, kill, capture, trap, collect, molest and disturb. “Disturb” means to agitate or bother a bald or golden eagle to a degree that causes, or is likely to cause, based on the best scientific information available, (1) injury to an eagle; (2) a decrease in its productivity by substantially interfering with normal breeding, feeding, or sheltering behavior; or (3) nest abandonment by substantially interfering with normal breeding, feeding, or sheltering behavior. Avoidance of eagle nest sites, particularly during the nesting season, is the primary and preferred method to avoid a take. Any oil or gas construction, drilling, or completion activities planned within 0.5 mile of a bald or golden eagle nest, or other associated activities greater than 0.5 miles from a nest that may disturb eagles, should be coordinated with the BLM project lead and BLM wildlife biologist and the USFWS representative to the BLM Field Office (970-876-9051).
11. Raptor Nesting. Raptor nest surveys in the project vicinity resulted in the location of one or more raptor nest structures within 0.25 mile of a well pad or 0.125 mile of an access road, pipeline, or other surface facility. To protect nesting raptors, a 60-day Timing Limitation (TL) shall be applied to construction, drilling, or completion activities within the buffer widths specified above, if the activities would be initiated during the nesting period of April 1 to May 31. An exception to this TL may be granted for any year in which a subsequent survey determines one of the following: (a) the nest is in a severely dilapidated condition or has been destroyed due to natural causes, (b) the nest is not occupied during the normal nesting period for that species, (c) the nest was occupied but subsequently failed due to natural causes, or (d) the nest was occupied, but the nestlings have fledged and dispersed from the nest. If project-related activities are initiated within the specified buffer distance of any active nest, even if outside the 60-day TL period, the operator remains responsible for compliance with the MBTA with respect to a “take” of birds or of active nests (those containing eggs or young), including nest failure caused by human activity (see COA for Migratory Birds).
12. Migratory Birds. It shall be the responsibility of the operator to comply with the Migratory Bird Treaty Act (MBTA) with respect to “take” of migratory bird species, which includes injury and direct mortality resulting from human actions not intended to have such result. To minimize the potential for the take of a migratory bird, the operator shall take reasonable steps to prevent use by birds of fluid-containing pits associated with oil or gas operations, including but not limited to reserve pits, produced-water pits, hydraulic fracturing flowback pits, evaporation pits, and cuttings trenches. Liquids in these pits—whether placed or accumulating from precipitation—may pose a risk to birds as a result of ingestion, absorption through the skin, or interference with buoyancy and temperature regulation.

Based on low effectiveness of brightly colored flagging or spheres suspended over a pit, the operator shall install netting with a mesh size of 1 to 1.5 inches, and suspended at least 4 feet above the fluid surface, on all pits into which fluids are placed, except for storage of fresh water in a pit that contains no other material. The netting shall be installed within 24 hours following fluids release. In addition, oil slicks and oil sheens shall be promptly skimmed off the fluid surface. The requirement for prompt skimming of oil slicks and oil sheens also applies to cuttings trenches in which precipitation has accumulated. To minimize the potential for violation of the MBTA, the BLM recommends installation of netting at cuttings trenches left open for more than 24 hours following cessation of drilling and completion activities during a continuous development cycle on a pad. The

recommendation for prompt netting does not apply to cuttings trenches during periods of active manipulation for cuttings management, remediation of contaminated materials, or other purposes.

All mortality or injury to birds shall be reported immediately to the BLM project lead and to the USFWS representative to the BLM Field Office at 970-243-2778 x28 and visit <http://www.fws.gov/mountain-prairie/contaminants/oilpits.htm>.

13. Birds of Conservation Concern. Pursuant to BLM Instruction Memorandum 2008-050, all surface-disturbing activities are prohibited from **May 1 to July 1** to reduce impacts to Birds of Conservation Concern (BCC). An exception to this TL will be granted if nesting surveys conducted no more than one week prior to surface-disturbing activities indicate that no BCC species are nesting within 30 meters (100 feet) of the area to be disturbed. Nesting shall be deemed to be occurring if a territorial (singing) male is present within the distance specified above. Nesting surveys shall include an aural survey for diagnostic vocalizations in conjunction with a visual survey for adults and nests. Surveys shall be conducted by a qualified breeding bird surveyor between sunrise and 10:00 AM under favorable conditions for detecting and identifying a BCC species. This provision does not apply to ongoing construction, drilling, or completion activities that are initiated prior to May 1 and continue into the 60-day period at the same location.
14. Range Management. Range improvements (fences, gates, reservoirs, pipelines, etc.) shall be avoided during development of natural gas resources to the maximum extent possible. If range improvements are damaged during exploration and development, the operator will be responsible for repairing or replacing the damaged range improvements. If a new or improved access road bisects an existing livestock fence, steel frame gate(s) or a cattle guard with associated bypass gate shall be installed across the roadway to control grazing livestock.
15. Ips Beetle. To avoid mortality of pinyon pines due to infestations of the *Ips* beetle, any pinyon trees damaged during road, pad, or pipeline construction shall be chipped after being severed from the stump or grubbed from the ground, buried in the toe of fill slopes (if feasible), or cut and removed from the site within 24 hours to a location approved by the Colorado State Forest Service.
16. Paleontological Resources. All persons associated with operations under this authorization shall be informed that any objects or sites of paleontological or scientific value, such as vertebrate or scientifically important invertebrate fossils, shall not be damaged, destroyed, removed, moved, or disturbed. If in connection with operations under this authorization any of the above resources are encountered the operator shall immediately suspend all activities in the immediate vicinity of the discovery that might further disturb such materials and notify the BLM of the findings. The discovery must be protected until notified to proceed by the BLM.

Where feasible, the operator shall suspend ground-disturbing activities at the discovery site and immediately notify the BLM of any finds. The BLM will, as soon as feasible, have a BLM-permitted paleontologist check out the find and record and collect it if warranted. If ground-disturbing activities cannot be immediately suspended, the operator shall work around or set the discovery aside in a safe place to be accessed by the BLM-permitted paleontologist.

17. Cultural Education/Discovery. All persons in the area who are associated with this project shall be informed that if anyone is found disturbing historic, archaeological, or scientific resources, including collecting artifacts, the person or persons will be subject to prosecution.

Pursuant to 43 CFR 10.4(g), the BLM shall be notified by telephone, with written confirmation, immediately upon the discovery of human remains, funerary items, sacred objects, or objects of

cultural patrimony. Further, pursuant to 43 CFR 10.4 (c) and (d), activities shall stop in the vicinity of the discovery, and the discovery shall be protected for 30 days or until notified by the BLM to proceed.

If in connection with operations under this contract, the operator, its contractors, their subcontractors, or the employees of any of them discovers, encounters, or becomes aware of any objects or sites of cultural value or scientific interest such as historic ruins or prehistoric ruins, graves or grave markers, fossils, or artifacts, the operator shall immediately suspend all operations in the vicinity of the cultural resource and shall notify the BLM of the findings (16 USC 470h-3, 36 CFR 800.112). Operations may resume at the discovery site upon receipt of written instructions and authorization by the BLM. Approval to proceed will be based upon evaluation of the resource. Evaluation shall be by a qualified professional selected by the BLM from a Federal agency insofar as practicable. When not practicable, the operator shall bear the cost of the services of a non-Federal professional.

Within five working days, the BLM will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places
- what mitigation measures the holder will likely have to undertake before the site can be used (assuming that *in-situ* preservation is not necessary)
- the timeframe for the BLM to complete an expedited review under 36 CFR 800.11, or any agreements in lieu thereof, to confirm through the SHPO State Historic Preservation Officer that the findings of the BLM are correct and that mitigation is appropriate

The operator may relocate activities to avoid the expense of mitigation and delays associated with this process, as long as the new area has been appropriately cleared of resources and the exposed materials are recorded and stabilized. Otherwise, the operator shall be responsible for mitigation costs. The BLM will provide technical and procedural guidelines for relocation and/or to conduct mitigation. Upon verification from the BLM that the required mitigation has been completed, the operator will be allowed to resume construction.

Antiquities, historic ruins, prehistoric ruins, and other cultural or paleontological objects of scientific interest that are outside the authorization boundaries but potentially affected, either directly or indirectly, by the Proposed Action shall also be included in this evaluation or mitigation. Impacts that occur to such resources as a result of the authorized activities shall be mitigated at the operator's cost, including the cost of consultation with Native American groups.

Any person who, without a permit, injures, destroys, excavates, appropriates or removes any historic or prehistoric ruin, artifact, object of antiquity, Native American remains, Native American cultural item, or archaeological resources on public lands is subject to arrest and penalty of law (16 USC 433, 16 USC 470, 18 USC 641, 18 USC 1170, and 18 USC 1361).

18. Visual Resources. Production facilities shall be placed to avoid or minimize visibility from travel corridors, residential areas, and other sensitive observation points—unless directed otherwise by the BLM due to other resource concerns—and shall be placed to maximize reshaping of cut-and-fill slopes and interim reclamation of the pad.

To the extent practicable, existing vegetation shall be preserved when clearing and grading for pads, roads, and pipelines. The BLM may direct that cleared trees and rocks be salvaged and redistributed over reshaped cut-and-fill slopes or along linear features.

Above-ground facilities shall be painted **Juniper Green** to minimize contrast with adjacent vegetation.

19. Windrowing of Topsoil. Topsoil shall be windrowed around the pad perimeter to create a berm that limits and redirects stormwater runoff and extends the viability of the topsoil per BLM Topsoil Best Management Practices (BLM 2009 PowerPoint presentation available upon request from Glenwood Springs Field Office). Topsoil shall also be windrowed, segregated, and stored along pipelines and roads for later spreading across the disturbed corridor during final reclamation. Topsoil berms shall be promptly seeded to maintain soil microbial activity, reduce erosion, and minimize weed establishment.
20. Reserve Pit. A minimum of 2 feet of freeboard shall be maintained in the reserve pit. Freeboard is measured from the highest level of drilling fluids and cuttings in the reserve pit to the lowest surface elevation of ground at the reserve pit perimeter.
21. Soils. Cuts and fills shall be minimized when working on erosive soils and slopes in excess of 30 percent. Cut-and-fill slopes shall be stabilized through revegetation practices with an approved seed mix shortly following construction activities to minimize the potential for slope failures and excessive erosion. Fill slopes adjacent to drainages shall be protected with well-anchored silt fences, straw wattles, or other acceptable BMPs designed to minimize the potential for sediment transport. On slopes greater than 50 percent, BLM personnel may request a professional geotechnical analysis prior to construction.

DOWNHOLE CONDITIONS OF APPROVAL
Applications for Permit to Drill

Company/Operator: Bill Barrett Corporation

Mamm Creek Field

Federal 11D-3-791

Well Pad Surface Location: Garfield County, SESE, Section 33, T6S, R91W

1. Twenty-four hours *prior* to (a) spudding, (b) conducting BOPE tests, (c) cementing/running casing strings, and (d) within 24 hours *after* spudding, the CRVFO shall be notified. One of the following CRVFO inspectors shall be notified by phone. The contact number for all notifications is: 970-876-9064. The BLM CRVFO inspectors are Julie King, Lead PET; David Giboo, PET; Greg Rios, PET; Alan White, PET; and Tim Barrett, PET.
2. A CRVFO petroleum engineer shall be contacted for a verbal approval prior to commencing remedial work, plugging operations on newly drilled boreholes, changes within the drilling plan, sidetracks, changes or variances to the BOPE, deviating from conditions of approval, and conducting other operations not specified within the APD. Contact, Bob Hartman at 970-244 3041 (office) or 970-210-2374 (cell) for verbal approvals.
3. If a well control issue or failed test (e.g. kick, blowout, water flow, casing failure, or a bradenhead pressure increase) arises during drilling or completions operations, Bob Hartman at 970-244 3041 (office) or 970-210-2374 (cell) shall be notified within 24 hours from the time of the event. IADC/Driller's Logs and Pason Logs (mud logs) shall be forwarded to CRVFO – Petroleum Engineer, 2300 River Frontage Road, Silt, CO 81652 within 24 hours of a well control event.
4. Prior to drilling out the surface casing shoe, gas detecting equipment shall be installed in the mud return system. The mud system shall be monitored for hydrocarbon gas/pore pressure changes, rate of penetration, and fluid loss.
5. As a minimum, cement shall be brought to surface. After WOC for the production casing, a CBL shall be run to verify the TOC and an electronic copy in .las and .pdf format shall be submitted to CRVFO – Petroleum Engineer, 2300 River Frontage Road, Silt, CO 81652 within 48 hours. If the TOC is lower than required or the cement sheath of poor quality, a CRVFO petroleum engineer shall be notified for remedial operations within 48 hours from running the CBL and prior to commencing fracturing operations,

A greater volume of cement may be required to meet the 200-foot cement coverage requirement for the Williams Fork Formation /Mesaverde Group. Evaluate the top of cement on the first cement job on the pad (Temperature Log). If cement is below 200-foot cement coverage requirement, adjust cement volume to compensate for low TOC/cement coverage.
6. Submit the (a) mud/drilling log (e.g. Pason disc), (b) driller's event log/operations summary report, (c) production test volumes, (d) directional survey, and (e) Pressure Integrity Test results within 30 days of completed operations (i.e. landing tubing) per 43 CRF 3160-9 (a).
7. Prior to commencing fracturing operations, the production casing shall be tested to the maximum anticipated surface treating/fracture pressure and held for 15 minutes without a 2% leak-off. If leak-off is found, Bob Hartman shall be notified within 24 hours of the failed test, but prior to proceeding

with fracturing operations. The test shall be charted and set to a time increment as to take up no less than a quarter of the chart per test. The chart shall be submitted with the well completion report.

8. During hydraulic frac operations, monitor the bradenhead/casing head pressures throughout the frac job. Frac operations shall be terminated upon any sharp rise in annular pressure (+/- 40 psi or greater) in order to determine well/wellbore integrity. Notify BLM Bob Hartman at 970-244 3041 (office) or 970-210-2374 (cell) immediately.
9. Per 43 CFR 3162.4-1(c), not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in a case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed.