


Applicability of Hydraulic Fracture Rule

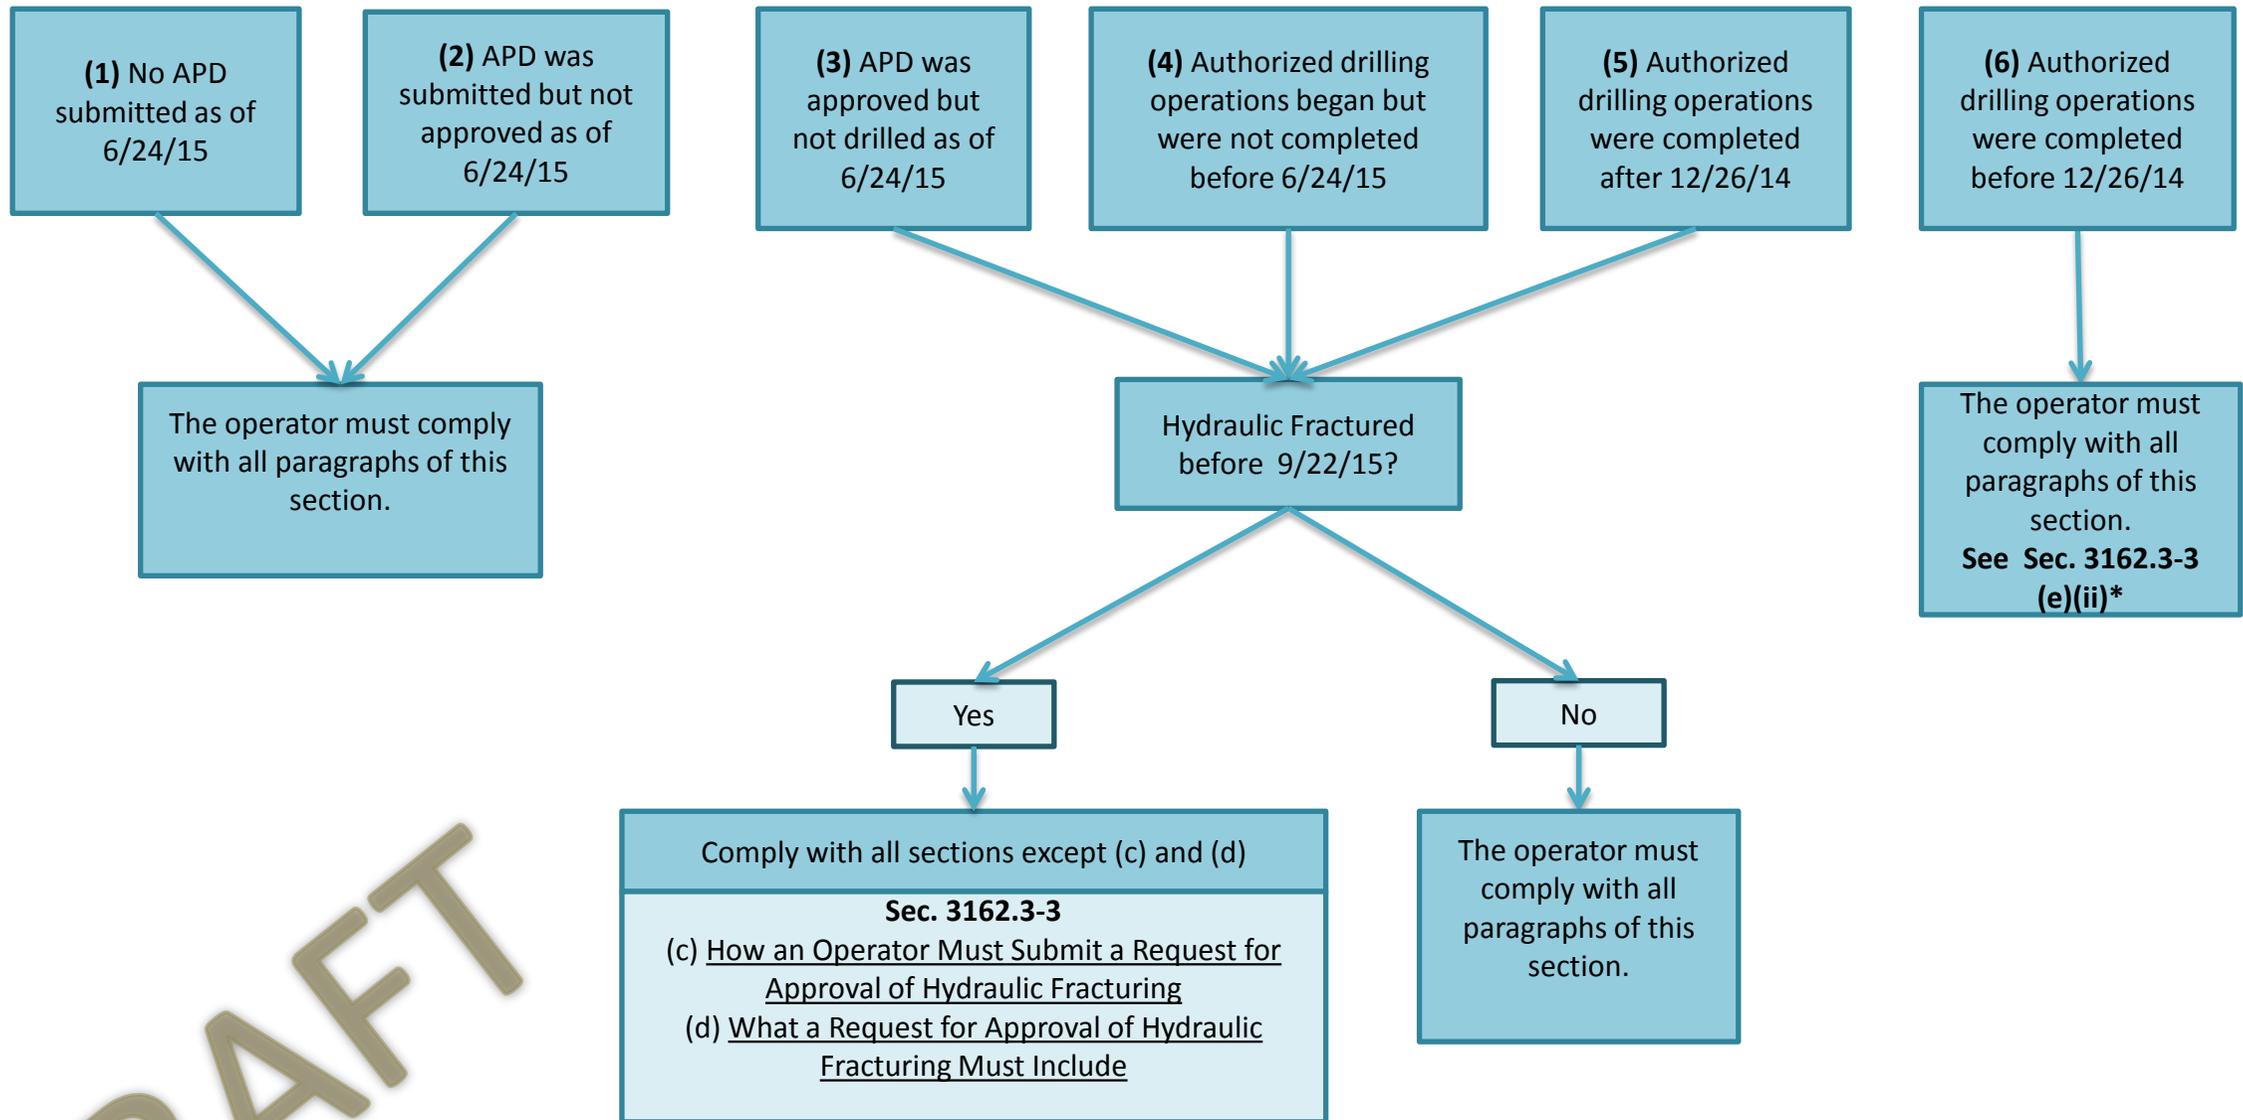

DRAFT

*** Sec. 3162.3-3 (e)(ii)**

For any well completed pursuant to an APD that did not authorize hydraulic fracturing operations, the operator must submit documentation to demonstrate that adequate cementing was achieved for all casing strings designed to isolate and protect usable water. The operator must submit the documentation with its request for approval of hydraulic fracturing operations, or no less than 48 hours prior to conducting hydraulic fracturing operations if no prior approval is required, pursuant to paragraph (a) of this section. The authorized officer may approve the hydraulic fracturing of the well only if the documentation provides assurance that the cementing was sufficient to isolate and to protect usable water, and may require such additional tests, verifications, cementing or other protection or isolation operations, as the authorized officer deems necessary.