

**Appendix A:**

**CONDITIONS OF APPROVAL FOR THE CBNG APPLICATION  
FOR PERMIT TO DRILL**

POD Name: KDU Epsilon POD

Operator: Lance Oil & Gas

Field Office: Buffalo Field Office  
Address: 1425 Fort Street  
Buffalo, Wyoming 82834

Office Telephone Number: 307-684-1100

List of Wells:

	Well Name	Well #	QTR	Sec	TWN	RNG	Lease
1	KDU EPSILON KDU	11/1-5077	NWNW	1	50N	77W	WYW149154
2	KDU EPSILON KDU	21-1-5077	NENW	1	50N	77W	WYW149154
3	KDU EPSILON KDU	22-1-5077	SENW	1	50N	77W	WYW149154
4	KDU EPSILON KDU	32-1-5077	SWNE	1	50N	77W	WYW146306
5	KDU EPSILON KDU	33-1-5077	NWSE	1	50N	77W	WYW146306
6	KDU EPSILON KDU	41-1-5077	NENE	1	50N	77W	WYW146306
7	KDU EPSILON KDU	42-1-5077	SENE	1	50N	77W	WYW146306
8	KDU EPSILON KDU	12-2-5077	SWNW	2	50N	77W	WYW149154
9	KDU EPSILON KDU	21-2-5077	NENW	2	50N	77W	WYW149154
10	KDU EPSILON KDU	31-2-5077	NWNE	2	50N	77W	WYW146851
11	KDU EPSILON KDU	32-2-5077	SWNE	2	50N	77W	WYW146851
12	KDU EPSILON KDU	41-2-5077	NENE	2	50N	77W	WYW146851
13	KDU EPSILON KDU	42-2-5077	SENE	2	50N	77W	WYW146851
14	KDU EPSILON KDU	23-19-5176	NESW	19	51N	76W	WYW137646
15	KDU EPSILON KDU	34-24-5177	SWSE	24	51N	77W	WYW146311
16	KDU EPSILON KDU	43-24-5177	NESE	24	51N	77W	WYW146311
17	KDU EPSILON KDU	44-24-5177	SESE	24	51N	77W	WYW146311
18	KDU EPSILON KDU	13-25-5177	NWSW	25	51N	77W	WYW138448
19	KDU EPSILON KDU	14-25-5177	SWSW	25	51N	77W	WYW138448
20	KDU EPSILON KDU	32-25-5177	SWNE	25	51N	77W	WYW138448
21	KDU EPSILON KDU	43-25-5177	NESE	25	51N	77W	WYW138448
22	KDU EPSILON KDU	51-25-5177	NENE	25	51N	77W	WYW138448
23	KDU EPSILON KDU	24-26-5177	SESW	26	51N	77W	WYW146314
24	KDU EPSILON KDU	24-35-5177	SESW	35	51N	77W	WYW146314
25	KDU EPSILON KDU	31-35-5177	NWNE	35	51N	77W	WYW114691
26	KDU EPSILON KDU	32-35-5177	SWNE	35	51N	77W	WYW146314
27	KDU EPSILON KDU	34-35-5177	SWSE	35	51N	77W	WYW146314
28	KDU EPSILON KDU	42-35-5177	SENE	35	51N	77W	WYW146314
29	KDU EPSILON KDU	43-35-5177	NESE	35	51N	77W	WYW146314

Water Management Infrastructure  
Existing Facilities.

	<b>FACILITY Name / Number</b>	<b>Qtr/Qtr</b>	<b>Sec</b>	<b>TWP</b>	<b>RNG</b>	<b>Capacity (Acre Feet)</b>	<b>New Surface Disturbance</b>	<b>Lease #</b>
1	Kinney Draw Treatment Facility	NE¼NE¼	20	51N	77W	NA	0 acres	None
2	Barber Creek Treatment Facility	NE¼NW¼	9	50N	77W	NA	0 acres	WYW149359
3	Outfall WY0056081-019	NW¼SE¼	20	51N	77W	NA	0 acres	None
4	Outfall WY0056081-012	SE¼NE¼	8	50N	77W	NA	0 acres	None
5	Outfall WY0056081-013	SW¼SW¼	4	50N	77W	NA	0 acres	WYW146307
6	Outfall WY0056081-014	SW¼SW¼	4	50N	77W	NA	0 acres	WYW146307
7	Outfall WY0056081-046	NE¼NW¼	9	50N	77W	NA	0 acres	WYW149359
8	Outfall WY0056081-016	NE¼SW¼	32	51N	77W	NA	0 acres	None

Proposed Facilities.

	<b>FACILITY Name / Number</b>	<b>Qtr/Qtr</b>	<b>Sec</b>	<b>TWP</b>	<b>RNG</b>	<b>Capacity (Acre Feet)</b>	<b>Surface Disturbance</b>	<b>Lease #</b>
1	Outfall 053	NE¼NW¼	28	51N	77W	NA	0.01 acres	WYW146315

The spud date will be reported electronically, (see website location below) to the Authorized Officer 24 HOURS BEFORE SPUDDINIG, unless otherwise required in site specific conditions of approval.

Spud Notice Site:

[http://www.wy.blm.gov/minerals/og/og\\_notices/spud\\_notice.php](http://www.wy.blm.gov/minerals/og/og_notices/spud_notice.php)

Please contact Eric Holborn, Natural Resource Specialist, at (307) 684-1044, Bureau of Land Management, Buffalo, if there are any questions concerning the following surface use COAs.

**SITE SPECIFIC**

**Surface Use**

1. All changes made at the onsite will be followed. They were all incorporated into the operator's POD.
2. All permanent above-ground structures (e.g., production equipment, tanks, etc.) not subject to safety requirements will be painted to blend with the natural color of the landscape. The paint used will be a color which simulates "Standard Environmental Colors." The color selected for the KDUE POD is Juniper Green, (Munsell Soil Color 18-0617 TPX).
3. All persons involved in surface disturbance within the KDU Epsilon POD i.e. Lance Oil & Gas employees, contractors, operators of equipment etc. will have in their possession at all times a complete set of the Surface Use Conditions of Approval and applicable right-of-way stipulations.
4. The operator will drill seed on the contour to a depth of 0.5 inch, followed by cultipaction to compact the seedbed, preventing soil and seed losses. To maintain quality and purity, the current years tested, certified seed with a minimum germination rate of 80% and a minimum purity of 90% will be used. ON BLM surface or in lieu of different specific mix desired by the surface owner, use the following:

<b>Shallow Loamy Ecological Site Seed Mix</b>		
<b>Species</b>	<b>% in Mix</b>	<b>Lbs PLS*</b>
<b>Thickspike Wheatgrass</b> <i>(Elymus lanceolatus ssp. lanceolatus)</i>	50	6.0
<b>Bluebunch wheatgrass</b> <i>(Pseudoroegneria spicata ssp. Spicata)</i>	35	4.2
<b>Prairie coneflower</b> <i>(Ratibida columnifera)</i>	5	0.6
<b>White or purple prairie clover</b> <i>(Dalea candidum, purpureum)</i>	5	0.6
<b>Rocky Mountain beeplant</b> <i>(Cleome serrulata)</i>	5	0.6
<b>Totals</b>	<b>100%</b>	<b>12 lbs/acre</b>

5. The operator is responsible for having the licensed professional engineer certify that the actual construction of the roads meets the design criteria and is constructed to Bureau standards.
6. LRP Areas: To control or reduce erosion, areas where wells and access/pipelines impact LRP areas namely badlands, blown-out lands, and rock outcrop components will be stabilized within 30 days of the start of construction.
7. To protect erodible soils, all engineered road segments should be completed, including any culverts, low water crossings and required surfacing, before the drilling rig or other drilling equipment moves onto the pad.

### Water

1. The operator will sample the springs as listed below twice each year (spring and fall) for the duration of production to determine any changes in water quality or quantity. Analysis will follow the WYPDES Permit initial quality criteria suite. Flow rate will also be determined. Copies of water quality and quantity data will be reported to the BLM BFO. If it is determined that either are changing as a result of CBNG production in the area, additional mitigation may be required.

<b>Spring Name</b>	<b>Qtr/Qtr</b>	<b>Section</b>	<b>Township</b>	<b>Range</b>
Christmas Spring #1	SW <sup>1</sup> / <sub>4</sub> SW <sup>1</sup> / <sub>4</sub>	32	51N	76W
Upper Spring	NW <sup>1</sup> / <sub>4</sub> SW <sup>1</sup> / <sub>4</sub>	13	51N	77W

### **Wildlife**

#### **Greater Sage-grouse**

No surface disturbing activities are permitted during sage-grouse breeding and nesting period (March 15 – June 30), for the entire Kinney Divide Unit POD.

1. For any surface-disturbing activities proposed in sagebrush shrublands, the operator will conduct clearance surveys for sage-grouse breeding activity during the sage-grouse's breeding season before initiating the activities. The surveys must encompass all sagebrush shrublands within 0.5 miles of the proposed activities. This will apply to all approved wells and infrastructure. All survey results shall

be submitted in writing to a Buffalo BLM biologist no later than July 31 of the current year. This condition will be implemented on an annual basis for the duration of surface disturbing activities. If a previously unknown lek is identified during surveys (April 1-May 7), a Buffalo BLM biologist shall be notified.

**Raptors**

The following conditions will alleviate impacts to raptors:

1. No surface-disturbing activity shall occur within 0.5 mile of all identified raptor nests from February 1 through July 31, annually, prior to a raptor nest occupancy survey for the current breeding season. Please refer to Figure 1 in Appendix A for affected wells and infrastructure.
2. Surveys to document nest occupancy shall be conducted by a biologist following BLM protocol, between April 15 and June 15. All survey results shall be submitted in writing to a Buffalo BLM biologist and approved prior to surface-disturbing activities. Surveys outside this window may not depict nesting activity. If a survey identifies active raptor nests, a 0.5 mile timing buffer will be implemented. The timing buffer restricts surface-disturbing activities within 0.5 mile of occupied raptor nests from February 1 to July 31.
3. If an undocumented raptor nest is located during project construction or operation, the Buffalo Field Office (307-684-1100) shall be notified within 24 hours.

**Elk**

1. No surface disturbing activity shall occur within identified elk Crucial Winter range from November 15 to April 1. Please refer to Figure 3 in Appendix A for affected wells and infrastructure.

Township/Range	Section	Wells and Infrastructure
T51N R76W	19	Well location(s): 23-19-5176 All access roads and associated utility corridors within the SW of this section.
T51N R77W	24	Well location(s): 34-24-5177, 43-5177, 44-24-5177 All access roads and associated utility corridors within the SE of this section.
	25	Well location(s): 13-25-5177, 14-25-5177, 32-25-5177, 43-25-5177, 51-25-5177 All access roads and associated utility corridors within this ENTIRE section.
	26	Well location(s): 23-19-5177 All access roads and associated utility corridors within the SESW and SWSE of this section.

2. No surface disturbing activity shall occur within identified elk Parturition range from May 1 to June 30. Please refer to Figure 4 in Appendix A for affected wells and infrastructure.

Township/Range	Section	Wells and Infrastructure
T51N R76W	19	Well location(s): 23-19-5176 All access roads and associated utility corridors within the SW of this section.

<b>Township/Range</b>	<b>Section</b>	<b>Wells and Infrastructure</b>
T51N R77W	24	Well location(s): 34-24-5177, 43-5177, 44-24-5177 All access roads and associated utility corridors within the SE of this section.
	25	Well location(s): 13-25-5177, 14-25-5177, 32-25-5177, 43-25-5177, 51-25-5177 All access roads and associated utility corridors within this ENTIRE section.
	26	Well location(s): 23-19-5177 All access roads and associated utility corridors within the SESW and SWSE of this section.
	35	Well location(s): 42-35-5177 All access roads and associated utility corridors within the SESW and SWSE of this section.
T50N R77W	1	Well location(s): 11-1-5077, 12-1-5077, 21-1-5077, 22-1-5077, 32-1-5077, 33-1-5077, 41-1-5077 42-1-5077 All access roads and associated utility corridors within this ENTIRE section ACCEPT the E2NWNW.

**Sharp-Tailed Grouse**

1. No surface disturbing activity shall occur within 0.63 miles of the sharp-tailed grouse lek located in NWNW Section 1 T50N R77W from April 1 – June 15), annually, prior to a survey to determine activity at the lek. Please refer to Figure 2 in Appendix A for affected wells and infrastructure.
2. A survey is required for sharp-tailed grouse between April 1 and May 7, annually, within the project area. This condition will be implemented on an annual basis for the duration of surface disturbing activities.
3. If an active lek is identified during the survey, the 0.64 mile timing restriction (April 1-June 15) will be applied and surface-disturbing activities will not be permitted until after the nesting season. The required sharp-tailed grouse survey will be conducted by a biologist following WGFD protocol. All survey results shall be submitted in writing to a Buffalo BLM biologist and approved prior to surface-disturbing activities.

**STANDARD**

**General**

1. A pre-construction field meeting shall be conducted prior to beginning any dirt work approved under this POD. The operator shall contact the BLM Authorized Officer Eric Holborn at (307)684-1044 at least 4-days prior to beginning operations so that the meeting can be scheduled. The operator is responsible for having all contractors present (dirt contractors, drilling contractor, pipeline contractor, project oversight personnel, etc.) including the overall field operations superintendent, and for providing all contractors copies of the approved POD, project map and BLM Conditions of Approval pertinent to the work that each will be doing.
2. If any cultural values [sites, artifacts, human remains (Appendix L FEIS)] are observed during operation of this lease/permit/right-of-way, they will be left intact and the Buffalo Field Manager notified. The authorized officer will conduct an evaluation of the cultural values to establish appropriate mitigation, salvage or treatment. The operator is responsible for informing all persons in

the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized BLM officer (AO). Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
  - the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and,
  - a time-frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that the required mitigation has been completed, the operator will then be allowed to resume construction measures.
3. If paleontological resources, either large or conspicuous, and/or a significant scientific value are discovered during construction, the find will be reported to the Authorized Officer immediately. Construction will be suspended within 250 feet of said find. An evaluation of the paleontological discovery will be made by a BLM approved professional paleontologist within five (5) working days, weather permitting, to determine the appropriate action(s) to prevent the potential loss of any significant paleontological values. Operations within 250 feet of such a discovery will not be resumed until written authorization to proceed is issued by the Authorized Officer. The applicant will bear the cost of any required paleontological appraisals, surface collection of fossils, or salvage of any large conspicuous fossils of significant scientific interest discovered during the operation.
  5. The first well drilled to each targeted coal zone will be designated as the POD reference well. Designated reference wells must have the ability to be sampled at the wellhead. Water quality samples will be collected by the operator and submitted for analysis using WDEQ NPDES criteria within 30-60 days of initial water production. Results of the analysis will be submitted to the BFO-BLM Authorized Officer as soon as they become available.
  6. All stock tanks shall include a ramp to enable trapped small birds and mammals to escape. See Idaho BLM Technical Bulletin 89-4 entitled Wildlife Watering and Escape Ramps on Livestock Water Developments: Suggestions and Recommendations.

## **DRILLING AND PRODUCTION OPERATIONS**

1. The operator shall complete wells (case, cement and under ream) as soon as possible, but no later than 30 days after drilling operations, unless an extension is given by the BLM Authorized Officer.
2. If in the process of air drilling the wells there is a need to utilize mud, all circulating fluids will be contained either in an approved pit or in an aboveground containment tank. The pit or containment tank will be large enough to safely contain the capacity of all expected fluids without danger of overflow. Fluid and cuttings will not be squeezed out of the pit, and the pit will be reclaimed in an expedient manner.

### **Well Control Equipment**

1. The flow line shall be a minimum of 30 feet from the well bore and securely anchored. The 30-foot length of line is a minimum and operators must make consideration for increasing this length for topography and/or wind direction.

2. The flow line shall be a straight run.
3. The flow line must be constructed from non-flammable material.
4. All cuttings and circulating medium shall be directed to and contained in a reserve pit.
5. The nearest edge of the pits shall be a minimum of 25' from the rig.
6. A minimum of 2' of freeboard shall be maintained in the pits at all times.
7. The authorized officer may modify these requirements at any time if it is determined that increased pressure control is deemed necessary.
8. Verbal notification shall be given to the Authorized Officer at least 24 hours before formation tests, BOP tests, running and cementing casing, and drilling over lease expiration dates.

### **Cement Program**

1. If there are indications of inadequate primary cementing of the surface, intermediate, or production casing strings; such as but not limited to no returns to surface, cement channeling, fallback or mechanical failure of equipment, the operator will evaluate the adequacy of the cementing operations. This evaluation will consist of running a cement bond log (CBL) or an alternate method approved by the Authorized Officer (AO) no sooner than 12 hours and no later than 24 hours from the time the cement was first pumped.
2. If the evaluation indicates inadequate cementing, the operator shall contact a BLM Buffalo Field Office Petroleum Engineer for approval of remedial cementing work.
3. The adequacy of the remedial cementing operations shall be verified by a cement bond log (CBL) or an alternate method approved by the Authorized Officer (AO). All remedial work shall be completed and verified prior to drilling out the casing shoe or perforating the casing for purposes other than remedial cementing.
4. The cement mix water used must be of adequate quality so as not to degrade the setting properties of the cement. Any water that does not meet municipal quality water standards shall be tested by mixing the water and cement in a lab and comparing the results to the municipal quality water mix results. If the results show that the cement qualities are not the same or greater, then the non-municipal water shall not be used for mixing cement in the well.

### **Production Equipment**

1. Other actions such as off-lease measurement, commingling, allocation, etc. shall be approved via a Notice of Intent sundry (Form No. 3160-5). Submission of additional information in the POD shall not be construed as permission for these items. If the operator wishes to utilize off-lease gas measurement for wells approved in this POD, they are required to obtain approval via a Notice of Intent sundry (Form No. 3160-5) prior to any gas production.

### **Well and POD Building Identification**

1. From the time a well pad is constructed or a well is spudded (if no well pad needed), until abandonment, all well locations must be properly identified with a legible sign. The sign will include the well name and number, operator name, lease number, and the surveyed location.
2. At each POD building site where federal wells are metered, the operator is required to maintain a

legible sign displayed in a conspicuous place. This sign is required to be in place at the time metering goes online. The sign shall include: POD name, Operator, Federal well names and numbers, Federal lease numbers being metered at the POD building, and surveyed location of the building.

#### **Protection of Fresh Water Resources**

1. All oil and gas operations shall be conducted in a manner to prevent the pollution of all freshwater resources. All fresh waters and waters of present or probable future value for domestic, municipal, commercial, stock or agricultural purposes will be confined to their respective strata and shall be adequately protected. Special precautions will be taken to guard against any loss of artesian water from the strata in which it occurs and the contamination of fresh water by objectionable water, oil, condensate, gas or other deleterious substance to such fresh water.

#### **Miscellaneous Conditions**

1. Any changes to the approved drilling plan and/or these conditions of approval shall be approved by the BLM-Buffalo Field Office Petroleum Engineer prior to being implemented.

After hour's numbers:

Supervisory Petroleum Engineer: Matthew Warren      Cell Telephone: 307-620-0103

2. If any cores are collected, a copy of all analysis performed shall be submitted to the BLM-Buffalo Field Office Petroleum Engineer.

### **SURFACE USE STANDARD**

#### **Construction**

1. Construction and drilling activity will not be conducted using frozen or saturated soil material during periods when watershed damage or excessive rutting is likely to occur.
2. Remove all available topsoil from constructed well locations including areas of cut and fill, and stockpile at the site. Topsoil will also be salvaged for use in reclamation on all other areas of surface disturbance (roads, pipelines, etc.). Clearly segregate topsoil from excess spoil material. Any topsoil stockpiled for one year or longer will be signed and stabilized with annual ryegrass or other suitable cover crop.
3. The operator will not push soil material and overburden over side slopes or into drainages. All soil material disturbed will be placed in an area where it can be retrieved without creating additional undue surface disturbance and where it does not impede watershed and drainage flows.
4. Construct the backslope no steeper than ½:1, and construct the foreslope no steeper than 2:1, unless otherwise directed by the BLM Authorized Officer.
5. Maintain a minimum 20-foot undisturbed vegetative border between toe-of-fill of pad and/or pit areas and the edge of adjacent drainages, unless otherwise directed by the BLM Authorized Officer.
6. To minimize electrocution potential to birds of prey, all overhead electrical power lines will be constructed to standards identified by the Avian Power Line Interaction Committee (2006).
7. The reserve pit will be oriented to prevent collection of surface runoff. After the drilling rig is removed, the operator may need to construct a trench on the uphill side of the reserve pit to divert surface drainage around it. If constructed, the trench will be left intact until the pit is closed.

8. The reserve pit will be lined with an impermeable liner if permeable subsurface material is encountered. An impermeable liner is any liner having a permeability less than  $10^{-7}$  cm/sec. The liner will be installed so that it will not leak and will be chemically compatible with all substances that may be put in the pit. Liners made of any man-made synthetic material will be of sufficient strength and thickness to withstand normal installation and pit use. In gravelly or rocky soils, a suitable bedding material such as sand will be used prior to installing the liner.
9. The reserve pit will be constructed so that at least half of its total volume is in solid cut material (below natural ground level).
10. Reserve pits will be adequately fenced during and after drilling operations until pit is reclaimed so as to effectively keep out wildlife and livestock. Adequate fencing, in lieu of more stringent requirements by the surface owner, is defined as follows:
  - Construction materials will consist of steel or wood posts. Three or four strand wire (smooth or barbed) fence or hog panel (16-foot length by 50-inch height) or plastic snow fence must be used with connectors such as fence staples, quick-connect clips, hog rings, hose clamps, twisted wire, etc. Electric fences will not be allowed.
  - Construction standards: Posts shall be firmly set in ground. If wire is used it must be taut and evenly spaced, from ground level to top wire, to effectively keep out animals. Hog panels must be tied securely into posts and one another using fence staples, clamps, etc. Plastic snow fencing must be taut and sturdy. Fence must be at least 2-feet from edge of pit. 3 sides fenced before beginning drilling, the fourth side fenced immediately upon completion of drilling and prior to rig release. Fence must be left up and maintained in adequate condition until pit is closed.
11. Reserve pits will be closed as soon as possible, but no later than 90 days from time of drilling/well completion, unless the BLM Authorized Officer gives an extension. Squeezing of pit fluids and cuttings is prohibited. Pits must be dry of fluids or they must be removed via vac truck or other environmentally acceptable method prior to backfilling, recontouring and replacement of topsoil. Mud and cuttings left in pit must be buried at least 3-feet below recontoured grade. The operator will be responsible for recontouring any subsidence areas that develop from closing a pit before it is sufficiently dry.
12. Culverts will be placed on channel bottoms on firm, uniform beds, which have been shaped to accept them, and aligned parallel to the channel to minimize erosion. Backfill will be thoroughly compacted.
13. The minimum diameter for culverts will be 18 inches. However, all culverts will be appropriately sized in accordance with standards in BLM Manual 9113.
14. Construction and other project-related traffic will be restricted to approved routes. Cross-country vehicle travel will not be allowed.
15. Maximum design speed on all operator constructed and maintained roads will not exceed 25 miles per hour.
16. Pipeline construction shall not block nor change the natural course of any drainage. Pipelines shall cross perpendicular to drainages. Pipelines shall not be run parallel in drainage bottoms. Suspended pipelines shall provide adequate clearance for maximum runoff.
17. Pipeline trenches shall be compacted during backfilling. Pipeline trenches shall be routinely inspected and maintained to ensure proper settling, stabilization and reclamation.

18. During construction, emissions of particulate matter from well pad and road construction would be minimized by application of water or other non-saline dust suppressants with at least 50 percent control efficiency. Dust inhibitors (surfacing materials, non-saline dust suppressants, and water) will be used as necessary on unpaved roads that present a fugitive dust problem. The use of chemical dust suppressants on public surface will require prior approval from the BLM Authorized Officer.
19. Operators are required to obtain a National Pollution Discharge Elimination System (NPDES) Storm Water Permit from the Wyoming DEQ for any projects that disturb five or more acres (changing to one acre in March 2005). This general construction storm water permit must be obtained from WDEQ prior to any surface disturbing activities and can be obtained by following directions on the WDEQ website at <http://deq.state.wy.us>. Further information can be obtained by contacting Barb Sahl at (307) 777-7570.
20. The operator shall submit a Sundry Notice (Form 3160-5) to BLM for approval prior to construction of any new surface disturbing activities that are not specifically addressed in the approved APD or POD Surface Use Plan.

### **Operations/Maintenance**

1. Confine all equipment and vehicles to the access road(s), pad(s), and area(s) specified in the approved APD or POD.
2. All waste, other than human waste and drilling fluids, will be contained in a portable trash cage. This waste will be transported to a State approved waste disposal site immediately upon completion of drilling operations. No trash or empty barrels will be placed in the reserve pit or buried on location. Operators and their contractors will comply with all state and local laws and regulations pertaining to disposal of human and solid waste will be complied with.
3. The operator will be responsible for prevention and control of noxious weeds and weeds of concern on all areas of surface disturbance associated with this project (well locations, roads, water management facilities, etc.) Use of pesticides shall comply with the applicable Federal and State laws. Pesticides shall be used only in accordance with their registered uses and within limitations imposed by the Secretary of Interior. Prior to the use of pesticides on public land, the holder shall obtain from the BLM authorized officer written approval of a plan showing the type and quantity of material to be used, pest(s) to be controlled, method of application, location of storage and disposal of containers, and any other information deemed necessary by the authorized officer to such use.
4. All permanent above-ground structures ( e.g. , production equipment, tanks, etc.) not subject to safety requirements will be painted to blend with the natural color of the landscape. The paint used will be a color which simulates "Standard Environmental Colors." The color selected for this (site, project), is (name and Munsell Soil Color Number).
5. Sewage shall be placed in a self-contained, chemically treated porta-potty on location.
6. The operator and their contractors shall ensure that all use, production, storage, transport and disposal of hazardous and extremely hazardous materials associated with the drilling, completion and production of these wells will be in accordance with all applicable existing or hereafter promulgated federal, state and local government rules, regulations and guidelines. All project-related activities involving hazardous materials will be conducted in a manner to minimize potential environmental impacts. In accordance with OSHA requirements, a file will be maintained onsite containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds and/or substances which are used in the course of construction, drilling, completion and production operations.

7. Produced fluids shall be put in test tanks on location during completion work. Produced water will be put in the reserve pit during completion work per Onshore Order #7.
8. The only fluids/waste materials which are authorized to go into the reserve pit are RCRA exempt exploration and production wastes. These include:
  - drilling muds & cuttings
  - rigwash
  - excess cement and certain completion & stimulation fluids defined by EPA as exempt
 It does not include drilling rig waste, such as:
  - spent hydraulic fluids
  - used engine oil
  - used oil filter
  - empty cement, drilling mud, or other product sacks
  - empty paint, pipe dope, chemical or other product containers
  - excess chemicals or chemical rinsate
 Any evidence of non-exempt wastes being put into the reserve pit may result in the BLM Authorized Officer requiring specific testing and closure requirements.
9. The operator shall restrict travel on unimproved two-track roads during periods of inclement weather or spring thaw when the possibility exists for excessive surface resource damage (e.g., rutting in excess of 4-inches, travel outside two-track roadway, etc.).

### **Producing Well**

1. Landscape those areas not required for production to the surrounding topography as soon as possible. The Fluids and mud must be dry in the reserve pit before re-contouring pit area. The operator will be responsible for re-contouring and reseeded of any subsidence areas that develop from closing a pit before it is completely dry.
2. Reduce the backslope to 2:1 and the foreslope to 3:1, unless otherwise directed by the BLM Authorized Officer. Reduce slopes by pulling fill material up from foreslope into the toe of cut slopes.
3. Any spilled or leaked oil, produced water or treatment chemicals must be reported in accordance with NTL-3A and immediately cleaned up in accordance with BLM requirements. This includes clean-up and proper disposition of soils contaminated as a result of such spills/leaks.
4. Distribute stockpiled topsoil evenly over those areas not required for production (ie.,cut/fill slopes, road ditches, pipelines, etc.) and reseed with approved seed mix.
5. Upgrade and maintain access roads and drainage control (e.g., culverts, drainage dips, ditching, crowning, surfacing, etc.) as necessary and as directed by the BLM Authorized Officer to prevent soil erosion and accommodate safe, environmentally-sound access.
6. Prior to construction of production facilities not specifically addressed in the APD/POD, the operator shall submit a Sundry Notice to the BLM Authorized Officer for approval.
7. Waterbars shall be installed on all reclaimed pipeline corridors per the guidelines in A.4.2.4 #6.

**Reclamation/Dry Hole**

1. All disturbed lands associated with this project, including the pipelines, access roads, water management facilities, etc will be expediently reclaimed and reseeded in accordance with the surface use plan and any pertinent site-specific COAs.
2. Disturbed lands will be re-contoured back to conform with existing undisturbed topography. No depressions will be left that trap water or form ponds.
3. The fluids and mud must be dry in the reserve pit before re-contouring pit area. The operator will be responsible for re-contouring of any subsidence areas that develop from closing a pit before it is completely dry. The plastic pit liner (if any) will be cut off below grade and properly disposed of at a state authorized landfill before beginning to re-contour the site.
4. Before the location has been reshaped and prior to redistributing the topsoil, the operator will rip or scarify the drilling area and access road on the contour, to a depth of at least 12 inches. The rippers are to be no farther than 24 inches apart.
5. Distribute the topsoil evenly over the entire location and other disturbed areas. Prepare the seedbed by disking following the contour.
6. Waterbars are to be constructed at least one (1) foot deep, on the contour with approximately two (2) feet of drop per 100 feet of waterbar to ensure drainage, and extended into established vegetation. All waterbars are to be constructed with the berm on the downhill side to prevent the soft material from silting in the trench. The initial waterbar should be constructed at the top of the backslope. Subsequent waterbars should follow the following general spacing guidelines:

<b>Slope (percent)</b>	<b>Spacing Interval (feet)</b>
< 2	200
2 - 4	100
4 - 5	75
> 5	50

7. The operator will drill seed on the contour no greater than xxxxxx followed by cultipaction to compact the seedbed, preventing soil and seed losses. To maintain quality and purity, the current years tested, certified seed with a minimum germination rate of 80% and a minimum purity of 90% will be used. On BLM surface or in lieu of a different specific mix desired by the surface owner, use the following:

<b><u>SPECIES-CULTIVAR</u></b>	<b><u>LBS PLS/ACRE</u></b>
<b>(To be determined at the site-specific onsite inspection)</b>	

Slopes too steep for machinery may be hand broadcast and raked with twice the specified amount of seed.

8. BLM will not release the performance bond until the area has been successfully revegetated (evaluation will be made after the second complete growing season) and has met all other reclamation goals of the surface owner and surface management agency.
9. A Notice of Intent to Abandon and a Subsequent Report of Abandonment must be submitted for abandonment approval.


10. For performance bond release approval, a Final Abandonment Notice (with a surface owner release letter on split-estate) must be submitted prior to a final abandonment evaluation by BLM.
11. Phased reclamation plans will be submitted to BLM for approval prior to individual POD facility abandonment via a Notice of Intent (NOI) Sundry Notice. Individual facilities, such as well locations, pipelines, discharge points, impoundments, etc. need to be addressed in these plans as they are no longer needed. Individual items that will need to be addressed in reclamation plans include:
  - Pit closure (Close ASAP after suitably dry, but no later than 90 days from time of drilling unless an extension is given by BLM Authorized Officer.) BLM may require closure prior to 90 days in some cases due to land use or environmental concerns.
  - Configuration of reshaped topography, drainage systems, and other surface manipulations
  - Waste disposal
  - Revegetation methods, including specific seed mix (pounds pure live seed/acre) and soil treatments (seedbed preparation, fertilization, mulching, etc.). On private surface, the landowner should be consulted for the specific seed mix.
  - Other practices that will be used to reclaim and stabilize all disturbed areas, such as water bars, erosion fabric, hydro-mulching, etc.
  - An estimate of the timetables for beginning and completing various reclamation operations relative to weather and local land uses.
  - Methods and measures that will be used to control noxious weeds, addressing both ingress and egress to the individual well or POD.
  - Decommissioning/removal of all surface facilities
  - Closure and reclamation of areas utilized or impacted by produced CBM water, including discharge points, reservoirs, off-channel pits, land application areas, livestock/wildlife watering facilities, surface discharge stream channels, etc.
12. Soil fertility testing and the addition of soil amendments may be required to stabilize some disturbed lands.
13. Any mulch utilized for reclamation needs to be certified weed free.



Figure 2. Proposed and Existing Infrastructure Within 0.6 Miles of the Sharp-tailed Lek in Section 1 T50N R77W.



**Figure 3. Proposed and Existing Infrastructure within Elk Crucial Winter Range in the KDUE Project Area.**

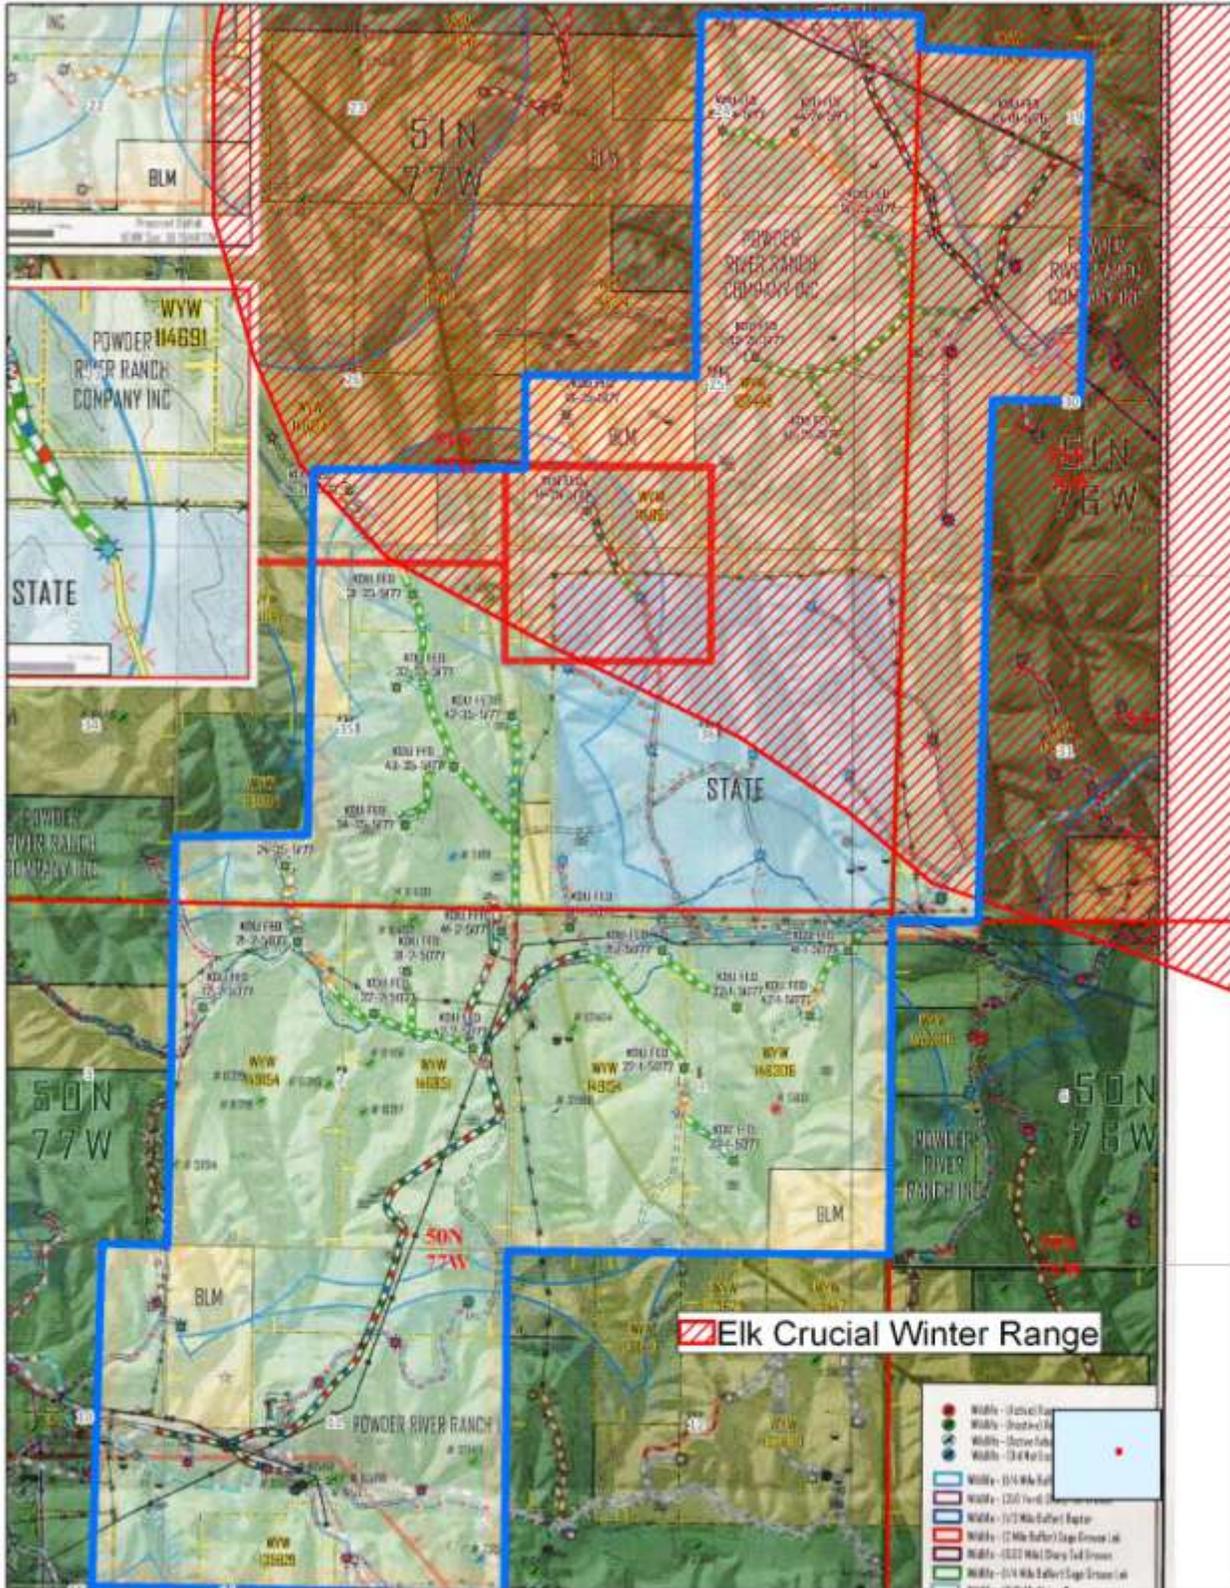

**Figure 4. Proposed and Existing Infrastructure within Elk Parturition Range in the KDUE Project Area.**

