

Original
3385

Book "B"

4-679

BOOK 3385

FIELD NOTES

OF THE

RESURVEY OF SUBDIVISIONS

IN T. 1 S., R. 1 E.

AND

METES AND BOUNDS SURVEY

TRACT 37, T. 1 S., R. 1 E.

Of the GILA AND SALT RIVER BASE AND Meridian,

In the State of ARIZONA

EXECUTED BY

GUY P. HARRINGTON

U. S. CADASTRAL ENGINEER

In the capacity of U. S. Surveyor, under Special Instructions dated Sept. 20, 1919, issued by the United States Surveyor General to govern surveys included in Group No. 98, which were approved by the Commissioner of the General Land Office, Oct. 11, 1919, and Assignment Instructions dated Oct. 11, 1919

Survey commenced November 26, 1919

Survey completed November 26, 1919

3385

3385


1A.
30

3385

BOOK 3385

INDEX DIAGRAM.

Township 1 South, Range 1 East

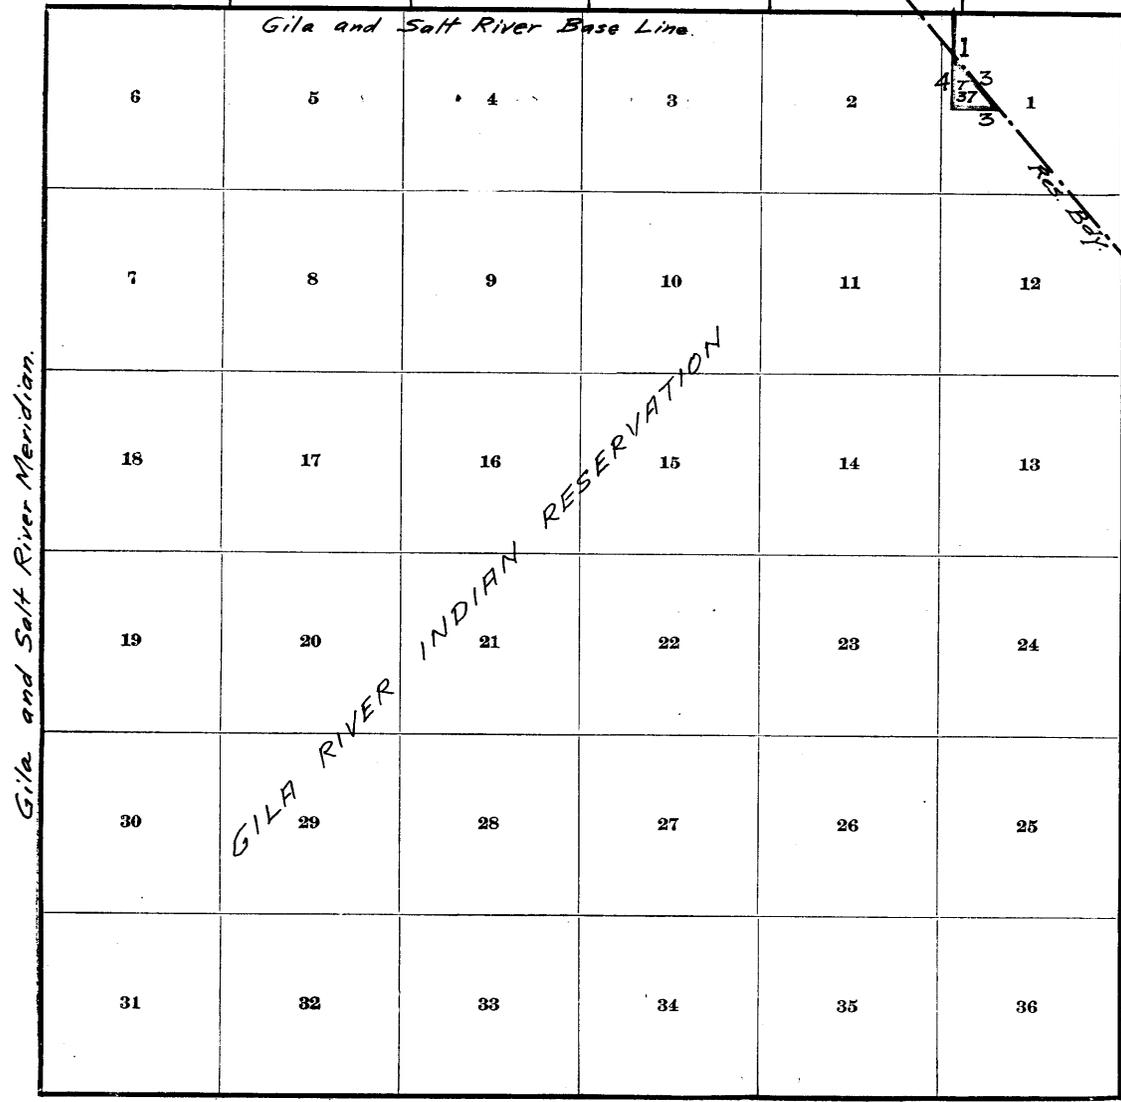

Lines surveyed or ~~resurveyed~~ surveyed under this Group.
Surveys executed November 26, 1919.

Resurvey of Subdivision T. 1 S. R. 1 E.

The object of this resurvey is to identify the C. E. 986 Jas. B. Washburn in sec. 2 and H.E. 1596 Wm. N. Price, in Sec. 1 and to segregate such portions thereon as conflict with the Gila River Indian Reservation.

I begin at the original closing cor. bet. secs. 1 and 2 on the base line which is a sandstone 12 x 12 x 6 ins. buried 6 ins. under ground mkd. C. C. whence the standard cor. of secs. 35 and 36 bears N. 89° 50' E., 1.86 chs. dist.

Alongside this old stone set an iron post 3 ft. long, 2 ins dia. 24 ins. in the ground for C. C. with brass cap mkd.

T1N R1E
S35
E:C
T1S:R1E
1919

Raise a mound of stone 2½ ft. base 1½ ft. high S. of post.

Thence S. 0° 03' E., bet. secs. 1 and 2, along middle of roadway with fences to the E. and W. 45 lks. dist.

8.00 Concrete farm house bears W. 3.50 chs. dist.

15.50 Intersect the Reservation bdy. at a point from which the ¼ mile cor. bears N. 40° 58' W., 45 lks. dist. which cor. is previously described.

Set an iron post 3 ft. long, 2 ins. dia., 24 ins. in the ground for C. C. with brass cap mkd.

T1S:R1E
S2:S1
C:
T1S.C
R1E:
GR S1:
IR 1919

A mesquite 36 ins. dia. bears N. 38½° E. 192 lks. dist. mkd. T1S R1E S1 CCBT.

A cottonwood, 16 ins. dia. bears N. 13½° W., 213 lks. dist. mkd. T1S R1E S2 CCBT.

Leave roadway which bears to the W. Enter dense mesquite undergrowth.

40.48 The original ¼ sec. cor. which is a mesquite post

Resurvey of Subdivision T. 1 S. R. 1 E.

3 ins. sq. 10 ins. above ground and mkd. $\frac{1}{4}$ on W. face.

No accessories remain but the post is very old and weathered and I have no doubt is the old original corner.

From the above original cor.

East on random line through the center of sec. 1 in accordance with the survey of 1868.

80.38 Fall 35 lks. S. of a point which is taken locally as the $\frac{1}{4}$ sec. cor. This point is in center of road bearing N. and S. and in line with fences which bear E. and W.

Note - This random line was run in order to determine the S. bdy. of H. E. 1596 Wm. N. Price, the determination of which is shown in the survey of Tract 37. The restoration of the original closing cor. bet. secs. 1 and 2 identifies the land of H. E. 1543, for lot 1, Sec. 2, Jas. B. Washburn, which is adjacent on the west.

Metes and Bounds Survey T. 1 S. R. 1 E.

Tract 37

Wm. N. Price, Claimant, H.E.1596, F.C.800, Pat.

In order to segregate the portion of the claim within the reservation which cannot conform to the resurvey of 1910 within the reservation, I survey said portion by metes and bounds.

I commence at the C. C. bet. secs. 1 and 2 on the reservation bdy. on the line of the 1868 survey. I additionally mark this post A. P. 1, TR.37 in the SE. quadrant for angle point No. 1 for Tract 37.

Thence S. 40° 58' E. along reservation bdy., over level cultivated lands.

0.26 Intersect the C. C. as established by Deputy Patrick, in the survey of the reservation bdy. bet. secs. 1 and 2. I destroy this cor.

31.46 Intersect the C. C. on E. and W. center line established in the independent resurvey of the Indian Reservation in 1910. I destroy this cor.

32.95 Intersect the E. and W. center line of sec. 1, in accordance with the original 1868 survey.

Set an iron post 3 ft. long 1 in. dia. 26 ins. in the ground mkd.

TR37
AP 2
TISRLE
S1
GRIR
1919

Thence S. 89° 45' W. along the center of sec. 1 in accordance with the original survey of 1868, over level land with cultivated fields to the N. and mesquite undergrowth to the S.

21.60 The old original $\frac{1}{4}$ sec. cor. bet. secs. 1 and 2, in accordance with the survey of 1868 previously described.

I destroy this post and in its place set an iron post 3 ft. long 1 in. dia. 26 ins. in the ground for A. P. 3 with brass cap mkd.

:TR37
S 1:AP 3
TISRLE
1919

For establishment this cor. see Pg. 32 Book "DV"

Metes and Bounds Survey T. 1 S. R. 1 E.

The $\frac{1}{4}$ sec. cor. bet. secs. 1 and 2 in accordance with the 1910 independent resurvey of the area on the reservation, which is an iron post 1 in. dia. 1 ft. above ground mkd. and witnessed as described in the notes of survey Book "D", bears N. 49° 52' W. 1.73 chs. dist.

Thence N. 0° 03' W. along the line bet. original secs. 1 and 2 as in accordance with the 1868 survey, over level land with dense mesquite undergrowth to the W. and cultivated fields to the E.

- 24.98 The C. C. of line bet. secs. 1 and 2 in accordance with the original survey of 1868, on the Reservation Bdy., which is also A. P. 1 of Tract 37, the point of beginning. Land level.
Soil, sandy loam and adobe, 1st. to 3rd. rates.
Undergrowth, dense mesquite.

6
36
BOOK 3335

CERTIFICATE OF UNITED STATES SURVEYOR.

I, _____, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for _____ bearing date of the _____ day of _____, 191____, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of _____

For oath of U.S.Cadastral Engineer see Book "A" (T. 1 N., R. 1 E.)

_____ of the _____ Meridian, in the State of _____, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for _____ and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

U. S. Surveyor.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Phoenix, Arizona, September 2, 1920

The foregoing field notes of the survey of **a portion of the subdivision lines in T. 1 S., R. 1 E. and the metes and bounds survey of Tract 37 (HE 1596) in T. 1 S., R. 1 E,**

of the Gila and Salt River Base and Meridian, in the State of Arizona,

executed by **Guy P. Harrington U.S.Cadastral Engineer**

under his special instructions dated **September 20,** _____, 1919, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.


U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in _____, has been correctly copied from the original notes on file in this office.

XXXXXXXXXXXXX

U. S. Surveyor General.