

INDEX DIAGRAM.

Township _____, *Range* _____


6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX DIAGRAM

111
1A

BOOK 3991

9th Standard Parallel North

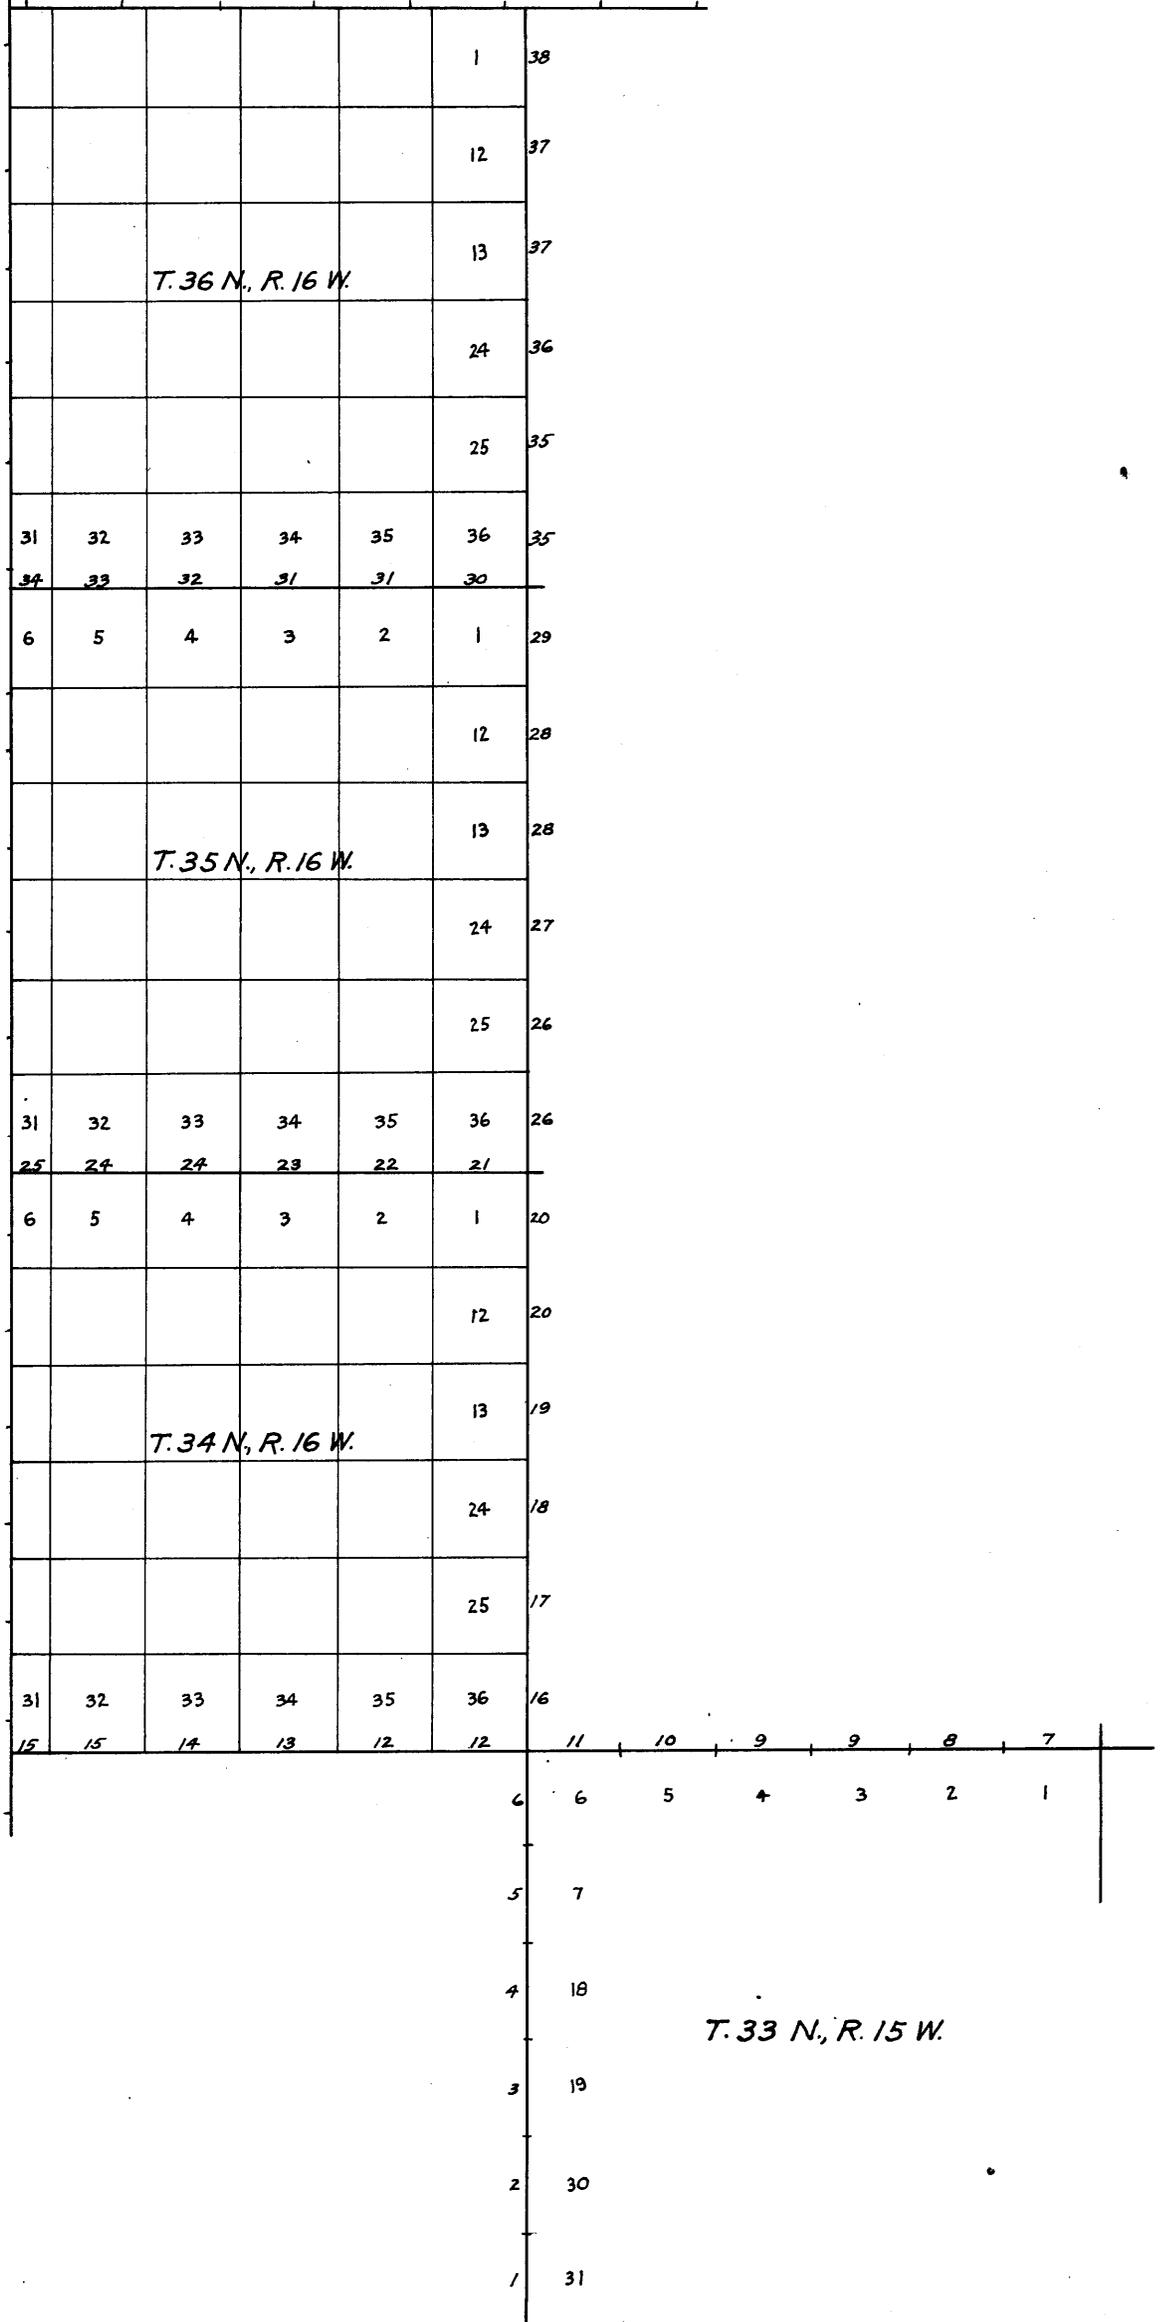

8th Std. Par. N.

EAST BOUNDARY OF T. 33 N., R. 16 W.

BOOK 3991

Chains. The survey was executed with a light mountain transit made by Buff and Buff, Serial No. 16740, used by Benjamin J. Kimsey U. S. Surveyor, and Buff and Buff transit No. 19423, used by William E. Hiester U.S. Surveyor. For description and tests of instrumental equipment and for preliminary observations, see the field notes of the survey of the 8th and 9th standard parallels north, surveyed under this group.

Beginning at the standard cor. of Tps. 33 N., Rs. 15 and 16 W., which is an iron post, 3 ins. diam., firmly set, mkd. and witnessed as described in the field notes of the survey of the 8th standard parallel north, surveyed under this group.

North, bet. secs. 31 and 36.

Over rolling land, through scattered desert growth.

Descend NE. slope.

- 1.40 Wash, 10 lks. wide, course SE.; asc. 119 ft. over SW. slope.
- 9.00 Spur, slopes SE.; desc. 34 ft. over NE. slope.
- 11.25 Wash, near head, course E.; asc. 11 ft. over SE. slope.
- 13.50 Spur, slopes E.; desc. 17 ft. over NE. slope.
- 16.70 Wash near head, course SE.; asc. 109 ft. over SW. slope.
- 24.00 Spur, slopes NE.; desc. 63 ft. over NW. slope.
- 29.50 **Junction of washes from SW and NW.; course NE.; asc. 40 ft. over SE. slope.**
- 33.00 Spur, slopes E.; desc. 40 ft. over NE. slope.
- 37.08 Wash, 5 lks. wide, course SE.; asc. 21 ft. over SW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, with a sandstone, 10x8x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
S36 | S31
1932

Ascend 38 ft. over SW. slope.

- 43.00 Spur, slopes SE.; desc. NE. slope.
- 45.00 Head of wash, course SE.
- 46.50 Spur, slopes NE.; desc. 40 ft. over NW. slope.
- 52.40 Wash, 5 lks. wide, course NE.; asc. 34 ft. over SE. slope.
- 57.40 Road, bears NE. and SW.
- 57.60 Divide, bears NE. and SW.; desc. 36 ft. over NW. slope.

EAST BOUNDARY OF T. 33 N., R. 16 W.

Chains.
64.35 Wash, 5 lks. wide, course NE.; asc. 59 ft. over SE. slope.
73.93 Spur, slopes E.; desc. 45 ft. over NE. slope.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, with a limestone, 8x8x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

T33N	
R16W	R15W
S 25	S 30
S 36	S 31
1932	

Land, rolling.
Soil, rocky; 4th rate.
Timber, none; undergrowth, black sage, greasewood and cactus.

North, bet. secs. 25 and 30.

Over rolling land, through scattered desert growth.

Descend 11 ft. over NE. slope.

1.19 Wash, 5 lks. wide, course NW.; asc. 11 ft. over SW. slope.
5.00 Spur, slopes NW.; desc. 14 ft. over NE. slope.
5.50 Head of wash, course NE.
7.00 Spur, slopes NE.; desc. 51 ft. over NW. slope.
21.00 Wash, 5 lks. wide, course NE.; asc. 9 ft.
26.00 Spur, slopes NE.; desc. 48 ft. over NW. slope.
29.16 Wash, 5 lks. wide, course NE.; asc. 42 ft. over SE. slope.
38.50 Spur, slopes NE.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a limestone, 10x10x12 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor. with brass cap mkd.

1	
S25	S30
1932	


Descend 96 ft. over NW. slope.

48.38 Wash, 5 lks. wide, course NE.; asc. 10 ft. over SE. slope.
49.50 Spur, slopes E.; desc. 12 ft.
50.74 Wash, 15 lks. wide, course NW.; asc. 12 ft.
55.00 Spur, slopes W.
61.00 Same wash, course NE.

EAST BOUNDARY OF T. 33 N., R. 16 W.

BOOK 3991

- Chains
- 65.00 Spur, slopes E.; desc. 29 ft. over NE. slope.
- 70.70 Same wash, course W.; asc. 62 ft. over SW. slope.
- 74.20 Spur, slopes NW.; desc. 45 ft. over NE. slope.
- 76.80 Wash, 10 lks. wide, course W.; asc. 45 ft. over SW. slope.
- 79.20 Spur, slopes NW.; desc. 13 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a sandstone, 10x10x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.




Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, greasewood and cactus.

North, bet. secs. 19 and 24.

Over rolling land, through scattered desert growth.

Descend 28 ft.

- 1.13 Wash, 10 lks. wide, course NW.; asc. 93 ft. over SW. slope.
- 6.30 Spur, slopes E.; continue along E. slope of same.
- 21.00 Descend NE. slope.
- 21.90 Head of wash, course SE.; asc. 81 ft. over SE. slope.
- 26.30 Spur, slopes SW.
- 28.50 Head of wash, course W.
- 31.00 Low spur, slopes W.; desc. 16 ft. over NW. slope.
- 33.05 Wash near head, course W.; asc. 16 ft.
- 36.53 Spur, slopes W. Desc. NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a sandstone, 10x10x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.



Descend 172 ft. over NW. slope.

- 58.26 Wash, 20 lks. wide, course W.; asc. 70 ft. over SW. slope.

EAST BOUNDARY OF T.33 N., R. 16 W.

Chains.
 62.00 Spur, slopes W.; desc. 26 ft. over NW. slope.
 64.74 Wash near head, course SW.; asc. 26 ft.
 67.00 Spur, slopes SW.; desc. 20 ft. over NW. slope.
 68.85 Wash, 5 lks. wide, course SW.; asc. 50 ft. over SE. slope.
 72.54 Spur, slopes SW.; desc. 131 ft. over NW. slope.
 76.96 Head of draw, course NW.
 78.50 Low spur, slopes W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to bedrock, with a sandstone 8x10x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T33N
 R16W R15W
 S 13 | S 18
 S 24 | S 19
 1932

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, greasewood and cactus.

North, bet. secs. 13 and 18.

Over rolling land, through scattered desert growth.


.30 Wash, near head, course NW.; asc. 18 ft.
 4.00 Spur, slopes W.; desc. 100 ft. over broken NE. slope.
 10.20 Wash, 5 lks. wide, course NW.; asc. 31 ft. over SW. slope.
 16.50 Spur, slopes W.; desc. 32 ft. over NW. slope.
 21.00 Road, bears NE. and SW.
 21.50 Center of Pigeon Wash, 300 lks. wide, course SW.
 29.50 Top of white ledges, 25 ft. high, bears NE. and SW. Asc. 152 ft.
 29.80 Spur, slopes SW.; desc. 30 ft. over NW. slope.
 31.30 Wash near head, course SW.; asc. 76 ft. over SE. slope.
 35.00 Spur, slopes SW.; desc. 45 ft. over broken NW. slope.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a sandstone 10x10x7 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
 S13 | S18
 1932

EAST BOUNDARY OF T.33 N., R. 16 W.

BOOK 3991


- Chains. Descend 111 ft. over broken NW. slope.
- 45.25 Road, bears NE. and SW. in wash, 50 lks. wide, course SW.; asc. 117 ft. over broken SE. slope.
- 59.60 Spur, slopes E.; desc. 21 ft. over NE. slope.
- 65.95 Wash near head, course E.; asc. 130 ft. over SE. slope.
- 78.00 Top of ledge, 4 ft. high, bears NE. and SW.
- 79.00 Spur, slopes E.; desc. 8 ft.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a sandstone 12x10x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.



Land, rolling.
 Soil rocky; 4th rate.
 Timber, none; undergrowth, black greasewood and cactus.

North, bet. secs. 7 and 12.
 Over rolling land, through scattered desert growth.
 Descend 37 ft. over NE. slope.

- 5.80 Wash, 10 lks. wide, course SE.; asc. 112 ft. over SW. slope.
- 8.80 Spur, slopes W.; desc. NW. slope.
- 12.50 Same wash, course SW.; asc. 112 ft. over SE. slope.
- 20.00 Spur, slopes SW.; desc. 39 ft. over NW. slope.
- 23.17 Wash, 50 lks. wide, course SW.; asc. 131 ft. over SE. slope.
- 38.50 Spur, slopes W.; desc. NE. slope.
- 38.90 Road, bears E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a sandstone 10x8x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.



- Descend 61 ft. over NE. slope.
- 46.23 Wash, 5 lks. wide, course NW.; asc. 15 ft. over SW. slope.
- 48.50 Spur, slopes, NW.; desc. 13 ft.

EAST BOUNDARY OF T. 33 N., R. 16 W.

Chains.	
50.01	Wash, 7 lks. wide, course NW.; asc. 13 ft.
53.50	Spur, slopes W.; desc. 40 ft. over NW. slope.
58.41	Wash, 5 lks. wide course W.
63.50	Low spur, slopes W.; desc. 5 ft.
65.40	Wash, 5 lks. wide, course W.; asc. 29 ft. over SE. slope.
69.00	Spur, slopes SW.; desc. 10 ft. over SE. slope.
71.50	Wash near head, course SW.; asc. 7 ft.
79.50	Spur, slopes W.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a sandstone, 10x10x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T33N
R16W R15W
S 1 | S 6
S12 | S 7
1932

Land, rolling.
Soil, rocky; 4th rate.
Timber, none; undergrowth, black greasewood and cactus.

North, bet. secs. 1 and 6.

Over rolling land, through scattered desert growth.

Descend 28 ft.

2.87	Wash, 10 lks. wide, course W.; asc. 23 ft.
12.50	Spur, slopes W; desc. 28 ft. over NW. slope.
18.47	Wash, 5 lks. wide, course SW.; asc. 60 ft. over SE. slope.
22.80	Spur, slopes SW.; desc. 52 ft. over NW. slope.
27.60	Old road, bears E. and W.
27.88	Wash, 10 lks. wide, course W.; asc. 17 ft. over SW. slope.
31.00	Spur, slopes W.; desc. 16 ft.
32.86	Wash, 5 lks. wide, course SW.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a sandstone, 12x12x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

EAST BOUNDARY OF T.33 N., R. 16 W.

BOOK 3991

Chains.

1/4
S1 | S6
1932

- 41.50 Low spur, slopes SW.; desc. 30 ft. over NW. slope.
- 44.16 Wash, 10 lks. wide, course SW.
- 59.00 Continue along gradual W. slope.
- 65.90 Road, bears E. and W.
- 79.76 Wash near head, course SW.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 4 ins. in the ground to bedrock, with a sandstone, 12x12x12 ins. mkd. X, deposited at the base; and in a mound of stone to top, for cor. of Tps. 33 and 34 N., Rs. 15 and 16 W., with brass cap mkd.

T34N
R16W R15W
S 36 | S 31
S 1 | S 6
T33N
1932

Land, rolling.
Soil rocky; 4th rate.
Timber, none; undergrowth greasewood and cactus.

NORTH BOUNDARY OF T.33 N., R. 15 W.

From the cor. of Tps. 33 and 34 N., Rs. 15 and 16 W.
East on a random line, setting temp. 1/4 and sec. cor. along the line bet. Tps. 33 and 34 N., R. 15 W. At 478.92 chs. intersect a N. and S. line, 29 lks. N. of the cor. of Tps. 33 and 34 N., Rs. 14 and 15 W., which is an iron post, 3 ins. diam., firmly set in a mound of stone, mkd. and witnessed as described in the official record.

Thence

- N. 89° 58' W., on a true line bet. secs. 1 and 36.
- Over rolling land, through scattered desert growth.
- 1.00 Wash, 10 lks. wide, course SW.
- 5.00 Spur, slopes SW.; desc. 88 ft. over NW. slope.
- 14.50 Wash, 10 lks. wide, course S.; continue descending 53 ft.
- 15.50 Spur, slopes S.
- 29.00 Enter small valley, bears SE. and NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a sandstone. 8x8x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.

NORTH BOUNDARY OF T. 33 N., R. 15 W.

Chains.

$\frac{1}{4}$ S 36
S 1
1932

- 44.00 Wash, 10 lks. wide, course SW.
47.00 Leave valley, bears NW. and SE.; enter bottom of wash course NW. continue along same.
56.80 Leave wash, course SW.; asc. 21 ft. over SE. slope.
65.00 Spur, slopes SW.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a sandstone 6x6x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.

T34N R15W
S 35 | S 36
S 2 | S 1
T33N
1932

Land, rolling.
Soil, rocky; 4th rate.
Timber, none; undergrowth, greasewood and cactus.

N. 89° 58' W., on a true line bet. secs. 2 and 35.

Over rolling land, through scattered desert growth.

- .75 Wash, 5 lks. wide, course SW.
7.50 Low spur, slopes SW.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a sandstone, 6x5x5 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 35
S 2
1932

- 43.80 Road, bears NE. and SW.
50.54 Wash, 40 lks. wide, course SW.; continue along same.
57.80 Leave wash, course SW.; asc. 61 ft. over SE. slope.
69.00 Spur, slopes SW.; desc. along NW. slope of knoll.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 4 ins. in the ground to bedrock, with a sandstone, 12x12x10 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T34N R15W
S 34 | S 35
S 3 | S 2
T33N
1932

NORTH BOUNDARY OF T. 33 N., R. 15 W.

BOOK 8991

Chains. Land, rolling.
Soil, rocky; 4th rate.
Timber, none; undergrowth, greasewood and cactus.

N.89°58'W., on a true line bet. secs. 3 and 34.
Over rolling land, through scattered desert growth.

- 3.50 Wash, 5 lks. wide, course SW.
- 6.50 Low spur, slopes S.; desc. 39 ft. over W. slope.
- 13.45 Wash, 15 lks. wide, course SW.; asc. 113 ft. over broken SE. slope.
- 30.00 Long spur, slopes SW.; desc. 115 ft. over NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, with a sandstone, 10x10x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.

1/4 S 34
S 3
1932

- 40.59 Head of wash, course S.; asc. 24 ft. over SE. slope.
- 43.00 Top of knoll, slopes SW.; desc. 57 ft. over NW. slope.
- 45.36 Wash, 15 lks. wide, course SW.; asc. 113 ft. over SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T34N R15W
S 33 | S 34
S 4 | S 3
T33N
1932

18x18x12 ins. , in each sec. 3 ft. dist. dig pits

Land, rolling.
Soil, rocky; 4th rate.
Timber none,; undergrowth. greasewood and cactus.

N.89°58'W., on a true line, bet. secs. 4 and 33.
Over rolling land, through scattered desert growth.
Ascend broken SE. slope.

- 5.00 Divide, bears NE. and SW.; desc. 183 ft. over NW. slope.
- 39.50 Wash near head, course NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground , on spur sloping N., for 1/4 sec. cor. with brass cap mkd.

1/4 S 33
S 4
1932

Chains.	raise a mound of stone, 3 ft. base, 2 ft. high. N. of cor.
40.30	Same wash, course SW.
41.10	Low spur, slopes S.
47.00	Wash, 100 lks. wide, course SW.; asc. 47 ft. over SE. slope.
61.70	Spur, slopes SW.; desc. 72 ft. over NW. slope.
63.72	Wash, 10 lks. wide, course SW.; asc. 32 ft. over SE. slope.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a sandstone 8x8x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 4, 32 and 33, with brass cap mkd.
	T34N R15W S 32 S 33 S 5 S 4 T33N 1932
	Land, rolling. Soil, rocky; 4th rate. Timber, none; undergrowth greasewood and cactus.
	N. 89° 58' W., on a true line bet. secs. 5 and 32. Over rolling land, through scattered desert growth. Ascend 23 ft. over SE. slope.
4.50	Spur, slopes S.; continue over broken SW. slope.
12.90	Wash, 5 lks. wide, course S.
14.70	Spur, slopes S.
29.14	Wash, 20 lks. wide, course S.; also Bronzel road in wash, bears NW. and S.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.
	$\frac{1}{4}$ S 32 S 5 1932
	dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
55.00	Ridge, bears N. and S.
63.00	Tassi wash, 10 lks. wide, course SW.; asc. 28 ft. over SE. slope.
70.50	Road, bears N. and S. near head of wash, course S.; asc. 16 ft.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, with a sandstone, 8x6x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

Chains.

T34N R15W
 S 31 | S 32
 S 6 | S 5
 T33N
 1932

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, greasewood, joshua and sage brush.

N.89°58'W., on a true line, bet. secs. 6 and 31.

Over rolling land, through scattered desert growth.

Ascend 23 ft. over SE. slope.

9.00 Ridge, bears NE. and SW.; desc. 23 ft. over broken NW. slope.

9.95 Road, bears NE. and SW.

15.00 Wash near head, course W.; continue along bottom of same.

26.20 Leave wash, course NW. Asc. NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 3 ins. in the ground to bedrock. (on spur slopes W) with a sandstone, 8x10x10 ins. mkd. X, deposited alongside, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.

1/4 S 31
 S 6
 1932

Top of spur, sloping W. Descend slightly.

69.00 Leave spur, slopes NW.; desc. 43 ft. over NW. slope.

75.36 Wash, 5 lks. wide, course W.; continue along same.

78.20 Leave wash, course SW.

78.92 The cor. of Tps. 33 and 34 N., Rs.15 and 16 W., herein- before described.

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, sage brush and greasewood.

Chains.	From the cor. of Tps. 33 and 34 N., Rs. 15 and 16 W., hereinbefore described.
	West bet. secs. 1 and 36.
	Over rolling land, through scattered desert growth.
4.30	Wash, 5 lks. wide, course NW. Asc. NE. slope.
24.00	Low spur, slopes NW.; desc. 70 ft. over SW. slope.
37.96	Wash, 10 lks. wide, course NW.; asc. 24 ft. over NE. slope.
40.00	Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, with a limestone, 6x6x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.
	$\frac{1}{4}$ S 36 S 1 1933
	Ascend 34 ft. over NE. slope.
47.00	Spur, slopes NW.; desc. 54 ft. over SW. slope.
55.60	Wash, 10 lks. wide, course NW.; asc. 60 ft. over NE. slope.
60.50	Spur, slopes NW.; desc. 32 ft. over SW. slope.
65.07	Wash, near head, course NW.; asc. 48 ft. over NE. slope.
74.00	Spur, slopes NW.
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a limestone, 14x8x5 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 1, 2, 35, and 36, with brass cap mkd.
	T34N R16W S 35 S 36 S 2 S 1 T33N 1933
	Land, rolling. Soil, rocky; 4th rate. Timber, none; undergrowth, sage brush and greasewood.
	West, bet. secs. 2 and 35.
	Over rolling land, through scattered desert growth.
	Along top of spur.
6.00	Leave spur, slopes NW.; desc. 84 ft. over SW. slope.
23.30	Wash, 20 lks. wide, course NW.; asc. 61 ft. over NE. slope.
28.50	Spur, slopes NW.; desc. 38 ft. over SW. slope.
33.30	Wash near head, course NW.; asc. 52 ft. over NE. slope.
39.50	Spur, slopes NW.

Chains.
40.00

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a limestone, 6x6x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 35
S 2
1933

Descend 75 ft. over SW. slope.

46.10 Wash, 5 lks. wide, course NW.; asc. 67 ft. over NE. slope.

52.00 Spur, slopes NW.; desc. 105 ft. over SW. slope.

64.20 Wash, 15 lks. wide, course NW.; asc. 34 ft. over NE. slope.

68.00 Spur, slopes N.; desc. 152 ft. over NW. slope.

68.90 Trail on top of rimrocks, bears N. and S.

68.96 House, bears N. 38° W.; and a barn bears N. 52° 50' W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a limestone, 6x6x7 ins. mkd. X, deposited at the base and in a mound of stone to top, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T34N R16W
S 34 | S 35
S 3 | S 2
T33N
1933

from which

A lava boulder, 8x8x8 ft. above ground, mkd. with a cross X, B S34 bears N. 89° 45' W. 25 lks. dist.

Land, rolling.

Soil, sandy and gravelly; 3rd rate.

Timber, none; undergrowth, greasewood, joshua and cactus.

West bet. secs. 3 and 34.

Over rolling land, through scattered desert growth.

Descend 161 ft. over NW. slope.

15.30 Enter small valley, bears N. and S.

28.90 Center of Grand Wash, 300 lks. wide, course S.

30.40 Leave valley; asc. 56 ft. over SE. slope.

34.00 Spur, slopes S.; desc. 45 ft.

36.78 Wash, 10 lks. wide, course S.; asc. 13 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

Chains.

$$\frac{1}{4} \frac{S 34}{S 3}$$
 1933

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend 59 ft. over E. slope.

50.00 Spur, slopes S.; desc. 52 ft. over SW. slope.

56.20 Wash, 20 lks. wide, course SE.; asc. 69 ft. over NE. slope.

61.40 Continue ascending over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a limestone, 12x8x6 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T34N R16W
S 33 | S 34
S 4 | S 3
T33N
1933

Land, rolling.

Soil, gravelly; 3rd rate.

Timber, none; undergrowth, joshua, cactus and catclaw.

West bet. secs. 4 and 33.

Over rolling land, through scattered desert growth.

14.00 Low spur, slopes SW.

24.00 Wash, 20 lks. wide, course SE.; asc. 32 ft.

35.00 Spur, slopes SE.; desc. gradually over broken SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a limestone, 12x8x6 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.
$$\frac{1}{4} \frac{S 33}{S 4}$$
 1933

Descend 30 ft. over SW. slope.

41.33 Wash, 10 lks. wide, course SE.; asc. 82 ft. along spur.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a limestone, 12x8x4 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T34N R16W
S 32 | S 33
S 5 | S 4
T33N
1933

Chains. Land, rolling.
Soil, sandy; 2nd rate.
Timber, none; undergrowth, cactus, joshua and greasewood.

West, bet. secs. 5 and 32.

Over rolling land, through scattered desert growth.

2.00 ~~Top of spur sloping E.~~; thence along broken S. slope.

24.00 Leave rolling land, asc. 132 ft. over rough mountainous land.

31.50 Spur, slopes S.; desc. 32 ft. over SW. slope.

38.93 Wash, 5 lks. wide, course SE.; asc. 3 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a limestone, 14x6x6 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 32
S 5
1933

Ascend 278 ft. over NE. slope.

60.00 Spur, slopes S.; desc. 241 ft. over broken SW. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

T34N R16W
S 31 | S 32
S 6 | S 5
T33N
1933

Land, rolling and mountainous.

Soil, rocky; 4th rate.

Timber, none; undergrowth, joshua, catclaw, cactus and greasewood.

West, bet. secs. 6 and 31.

Over mountainous land, through scattered desert growth.

Descend 11 ft. over SW. slope.

7.30 Wash, 30 lks. wide, course SE.; leave mountainous land, continue over rolling land.

17.00 Low spur, slopes SE.

32.79 Intersect the Arizona and Nevada State Bdy.

Set an iron post, 3 ft. long, 3 ins. diam., 14 ins. in the ground to bedrock, with a limestone 12x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for closing cor. of frac. Tps. 33 and 34 N., R. 16 W., with brass cap mkd.

SOUTH BOUNDARY OF T. 34 N., R. 16 W.

Chains.

T34N
R16W
NEV | S 31 C
 | s 6 C
 T33N

1933

From this point the 349 Mi. Cor. on the Ariz. and Nev. State Bdy., bears N. 1° 10' E., 30.42 chs. dist., an iron post, 3 ins. diam., firmly set in a mound of stone, mkd. and witnessed as described in the field notes of the resurvey of said bdy. resurveyed under this group.

Land, rolling and mountainous.

Soil, rocky; 4th rate.

Timber, none; undergrowth, joshua, catclaw and cactus.

EAST BOUNDARY OF T. 34 N., R. 16 W.

From the cor. of Tps. 33 and 34 N., Rs. 15 and 16 W. hereinbefore described.

North bet. secs. 31 and 36.

Over rolling land, through scattered desert growth.

Ascend 18 ft. over SE. slope.


- 6.50 Spur, slopes NW.; desc. 32 ft. over NE. slope.
- 11.46 Wash, 5 lks. wide, course NW.; asc. 28 ft. over SW. slope.
- 14.50 Spur, slopes NW.; desc. 60 ft. over NE. slope.
- 19.66 Wash, 10 lks. wide, course W.; asc. 55 ft. over SW. slope.
- 23.50 Spur, slopes W.; desc. 60 ft. over NW. slope.
- 27.06 Wash, 20 lks. wide, course W.; asc. 89 ft. over SE. slope.
- 39.00 Spur, slopes W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 2 ins. in the ground to bedrock, with a limestone, 10x8x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.
- $\frac{1}{4}$
- s36 | s31
- 1932
- Descend 100 ft. over broken N. slope.
- 59.89 Center of wash, 150 lks. wide, course SW.; asc. 40 ft. over SE. slope.
- 70.59 Road, bears NE. and SW, on spur slopes W.; desc. 34 ft. along broken W. slope.
- 75.00 Continue descending over NW. slope.
- 79.90 Wash, 10 lks. wide, course SW.

EAST BOUNDARY OF T. 34 N., R. 16 W.

BOOK 8901

Chains.
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a limestone, 10x10x10 ins. mkd. X, deposited at the base and in a mound of stone to top, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.



Land, rolling,
Soil, rocky; 4th rate.
Timber, none; undergrowth, cactus, joshua and greasewood.

North, bet. secs. 25 and 30.

Over rolling land, through scattered desert growth.

Ascend 29 ft. over SE. slope.

.50 Low spur, slopes SW.


1.50 Wash, 5 lks. wide, course SW.

10.67 Road, bears E. and W.

15.00 Head of wash, course W.

25.00 Wash, 5 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, with a limestone, 8x8x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.



43.70 Road, bears E. and W.

53.11 Wash, 50 lks. wide, course SW.; asc. 57 ft. over SE. slope.

69.50 Top of ascent; desc. 28 ft. over NW. slope.

73.23 Wash, 10 lks. wide, course SW.; asc. 46 ft. over SE. slope.

77.43 Road, bears E. and W.

77.50 Spur, slopes SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a limestone, 12x10x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

Chains.

T34N	
R16W	R15W
S 24	S 19
S 25	S 30
1932	

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, cactus, joshua, catclaw and greasewood.

North, bet. secs. 19 and 24.

Over rolling land, through scattered desert growth.

Descend 32 ft. over N. slope.

- 1.94 Wash, 5 lks. wide, course W.; asc. 45 ft. over S. slope.
- 6.50 Spur, slopes W.; desc. 47 ft. over NW. slope.
- 10.33 Wash, 10 lks. wide, course SW.; asc. 56 ft. over SE. slope.
- 14.50 Continue along W. slope.
- 20.00 Wash near head, course W.
- 33.00 Wash near head, course SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, with a limestone, 10x8x6 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$	
S24	S19
1932	

- 40.78 Old road, bears E. and W.; desc. 48 ft. over N. slope.
- 54.14 Wash, 20 lks. wide, course W.; asc. 57 ft. over S. slope.
- 60.00 Spur, slopes W.; desc. 34 ft. over N. slope.
- 64.31 Wash, 10 lks. wide, course W.; asc. 34 ft. over S. slope.
- 68.00 Spur, slopes W.; desc. 128 ft. over N. slope.
- 77.51 Wash, 40 lks. wide, course W.; asc. 71 ft. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a limestone, 10x6x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

T34N	
R16W	R15W
S 13	S 18
S 24	S 19
1932	


EAST BOUNDARY OF T. 34 N., R. 16 W.

BOOK 8991

Chains. Land, mountainous, and rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, cactus, Joshua and catclaw.

North, bet. secs. 13 and 18.
 Over rolling land, through scattered desert growth.
 Ascend 107 ft. over SW. slope.


- 5.61 Road, bears E. to Tassi Spring, and W. to St Thomas Nev.
- 6.50 Spur, slopes NW.; desc. 159 ft. over NE. slope.
- 14.59 Wash, 10 lks. wide, course NW.; asc. 68 ft. over SW. slope.
- 19.40 Spur, slopes W.; desc. 136 ft. over NW. slope.
- 32.51 Center of Grand Wash, 300 lks. wide, course SW.; asc. 16 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend 177 ft. over SE. slope.

- 56.00 Continue over nearly level bench land.
- 66.00 Leave bench land, bears E. and W.
- 73.50 Road, bears NE. to Tassi Spring, and SW. to St. Thomas Nev.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a lava stone, 8x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.



Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, sage brush, cactus and Joshua.

Chains. North, bet. secs. 7 and 12.
 Over rolling land, through scattered desert growth.
 Ascend SE. slope.
 5.00 Continue over top of spur,
 18.20 Leave spur, slopes SW.; desc. 137 ft. over NW. slope.
 36.35 Wash, 20 lks. wide, course SW.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
 the ground to bedrock, with a lava stone, 6x6x9 ins.
 mkd. X, deposited at the base, and in a mound of
 stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
 S12 | S 7
 1932

Ascend 303 ft. over broken SE. slope.
 47.00 Continue along top of spur,
 48.00 Volcanic Butte, bears SE. about 150 lks. dist.; also
 a volcanic Butte bears SW. about 350 lks. dist.
 69.50 Top of Butte on spur, slopes SW.; desc. 151 ft. over
 NW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in
 the ground, for cor. of secs. 1, 6, 7 and 12, with
 brass cap mkd.

T34N
 R16W R15W
 S 1 | S 6
 S 12 | S 7
 1932

raise a mound
 of stone, 3 ft. base, 2 ft. high. W. of cor.

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, cactus, greasewood and joshua.

North, bet. secs. 1 and 6.
 Over rolling land, through scattered desert growth.
 Descend 52 ft. over NW. slope.
 18.13 Wash, 30 lks. wide, course SW.; asc. 212 ft. over SE.
 slope.
 26.90 Top of ledges 30 ft. high, bears NE. and SW.; continue
 ascending.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in
 the ground to bedrock, with a lava stone, 10x10x10 ins.
 mkd. X, deposited at the base, and in a mound of
 stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

EAST BOUNDARY OF T. 34 N., R. 16 W.

BOOK 3991

Chains.

1/4 S 1 S 6
1932

- Ascend 23 ft. over SE. slope.
- 45.00 Spur, slopes SE.; desc. along NE. slope.
- 50.00 Head of wash, course E.; asc. 34 ft. over SE. slope.
- 57.10 Old road, bears NE. and SW., on spur, slopes E.; desc. 157 ft. over broken NE. slope.
- 61.50 Head of wash, course E.
- 63.50 Spur, slopes SW.; desc. over NW. slope.
- 68.50 Ledge, 12 ft. high, bears NE. and SW.
- 75.20 Road on dugway, bears NE. and SW.
- 80.00 Set an iron post, 3 ft. long, 3 ins. diam., 20 ins. in the ground to bedrock, with a lava stone, 8x6x6 ins. mkd. X, deposited at the base, and in a mound of stone, to top, for cor. of Tps. 34 and 35 N., Rs. 15 and 16 W., with brass cap mkd.

T35N
R16W R15W
S 36 S 31
S 1 S 6
T34N
1932

Land, rolling.
Soil, rocky; 4th rate.
Timber, none; undergrowth, cactus, joshua, catclaw and greasewood.

SOUTH BOUNDARY OF T. 35 N., R. 16 W.

- From the cor. of Tps. 34 and 35 N., Rs. 15 and 16 W., above described.
- West bet. secs. 1 and 36.
- Over mountainous land, through scattered desert growth.
- Descend 9 ft. over NW. slope.
- 1.96 Wash, 10 lks. wide, course N.; asc. 134 ft. over NE. slope.
- 6.21 Road, bears SE. to St George Utah, and NW. to St Thomas Nev.
- 14.70 Point of spur, slopes N.; desc. 118 ft. over NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for 1/4 sec. cor. with brass cap mkd.

1/4 S 36
S 1
1933

SOUTH BOUNDARY OF T. 35 N., R. 16 W.

Chains.	<p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Continue over rolling valley land.</p> <p>45.36 Same road, bears NE. and SW.</p> <p>53.51 Road, bears NE. and SW.</p> <p>63.91 Center of Cottonwood wash, 200 lks. wide, course SW.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.</p> <div style="text-align: center;"> <p>T35N R16W</p> <p>S 35 S 36</p> <hr style="width: 50%; margin: 0 auto;"/> <p>S 2 S 1</p> <p>T34N</p> <p>1933</p> </div> <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, rolling and mountainous.</p> <p>Soil, sandy; 3rd rate.</p> <p>Timber, none; undergrowth. catclaw, cactus, joshua and greasewood.</p>
	<p>West, bet. secs. 2 and 35.</p> <p>Over rolling land, through scattered desert growth.</p> <p>10.00 Leave valley, bears NE. and SW.; asc. 142 ft. over SE. slope.; enter rough mountainous. land.</p> <p>25.50 Spur, slopes S.; desc. 60 ft. over SW. slope.</p> <p>31.10 Trail, bears E. and W.</p> <p>40.00 True point for $\frac{1}{4}$ sec. cor. falls in wash, 20 lks. wide, course SE.</p> <p>40.34 Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a lava stone, 18x14x10 ins. mkd. X, deposited alongside, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor. with brass cap mkd.</p> <div style="text-align: center;"> <p>$\frac{1}{4}$ S 35 WC</p> <p>S 2</p> <p>1933</p> </div> <p>41.55 Wash, 10 lks. wide, course SE.; asc. 233 ft. over rocky NE. slope.</p> <p>59.00 Spur, slopes SE.; desc. 100 ft. along S. slope.</p> <p>65.00 Continue descending over SW. slope.</p> <p>74.73 Wash, 10 lks. wide, course SE.; asc. 35 ft. over NE. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.</p>

Chains.

T35N R16W
 S 34 | S 35
 S 3 | S 2
 T34N
 1933

raise a mound
 of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous.
 Soil, sandy and rocky; 3rd and 4th rates.
 Timber, none; undergrowth, cactus, joshua and catclaw.

West het. secs. 3 and 34.

Over mountainous land, through scattered desert growth.

Ascend 248 ft. over steep SE. slope.

- 1.66 Top, of rimrocks, 60 ft. high, bears NE. and SW.; continue over rolling bench land.
- 17.90 Low spur, slopes S.; desc. 12 ft.
- 23.50 Wash. 3 lks. wide, course S.; asc. 35 ft. over SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a lava stone, 10x10x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 34
 S 3
 1933

- 50.00 Low spur, slopes S.
- 73.00 Low spur, slopes SW.; desc. 34 ft. over NW. slope.
- 79.88 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, with a lava stone, 10x10x10 ins. mkd. X, deposited alongside, and in a mound of stone to top, for witness cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T35N R16W
 WC S 33 | S 34
 S 4 | S 3
 T34N
 1933

- 80.00 True point for cor. of secs. 3, 4, 33 and 34 falls on N. face of bluff, 50 ft. high.

Land, mountainous and rolling.
 Soil, sandy and rocky; 3rd and 4th rates.
 Timber, none; undergrowth, cactus, joshua and catclaw.

Chains.	<p>From true point for cor. of secs. 3,4,33 and 34. West, bet. secs. 4 and 33. Over mountainous land, through scattered desert growth. Descend 322 ft. over rocky NW. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ <u>S 33</u> S 4 1933</p> <p style="text-align: right;">raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Descend 105 ft. over NW. slope.</p> <p>58.50 Wash, 30 lks. wide, course SW.; asc. 62 ft. over SE. slope.</p> <p>66.30 Spur, slopes S.; desc. 96 ft. over SW. slope.</p> <p>74.24 Wash, 40 lks. wide, course SE.; continue along S. slope.</p> <p>80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 4,5,32 and 33, with brass cap mkd.</p> <p style="text-align: center;">T35N R16W S 32 S 33 S 5 S 4 T34N 1933</p> <p style="text-align: right;">raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, mountainous. Soil, rocky; 4th rate. Timber, none; undergrowth, cactus, joshua and catclaw.</p>
	<p>West, bet. secs. 5 and 32. Over rolling land, through scattered desert growth. Ascend 81 ft. over SE. slope.</p> <p>13.00 Spur, slopes S.; desc. 57 ft. over W. slope.</p> <p>19.00 Wash, 10 lks. wide, course S.; asc. 82 ft. over E. slope.</p> <p>33.00 Spur, slopes S.; desc. 80 ft. over SW. slope.</p> <p>40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.</p> <p style="text-align: center;">$\frac{1}{4}$ <u>S 32</u> S 5 1933</p> <p style="text-align: right;">raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>

Chains.

- 40.60 Draw, course S.
- 46.32 Wash, 15 lks. wide, course SE.; asc. 18 ft.
- 48.30 Old road, bears NW. and SE.
- 61.00 Spur, slopes SE.; desc. 36 ft. over SW. slope.
- 64.38 Wash, 20 lks. wide, course SE.
- 71.60 Wash, 50 lks. wide, course SE.; asc. 27 ft. over NE. slope.
- 78.00 Spur, slopes N.; desc. 12 ft. over NW. slope.
- 79.30 Drain, 3 lks. wide, course N.; continue along drain.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.

T35N R16W
 S 31 | S 32
 S 6 | S 5
 T34N
 1933

raise a mound
 of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.
 Soil, sandy; 3rd rate.
 Timber, none; undergrowth, cactus, catclaw, greasewood, joshua and yucca.

West bet. secs. 6 and 31.

Over rolling land, through scattered desert growth.

- 11.50 Wash, 10 lks. wide, course NE.; continue along bottom of wash.
- 20.00 Leave bottom of wash.
- 23.06 Intersect the Arizona and Nevada State Bdy.

Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for closing cor. of frac. Tps. 34 and 35 N., R. 16 W., with brass cap mkd.

T35N
 R16W
 NEV | S 31 | C
 S 6 | C
 T34N
 1933

raise a mound
 of stone, 3 ft. base, 2 ft. high E. of cor.

From this point, the the 343 Mi. Cor. on the Ariz. and Nev. State Bdy., bears N. 1° 25' E., 27.52 chs. dist., an iron post, 3 ins. diam., firmly set, mkd. and witnessed as described in the field notes of the resurvey of said bdy. resurveyed under this group.

Land, rolling.
 Soil, sandy; 3rd rate.
 Timber, none; undergrowth cactus, joshua and catclaw.

Chains. From the cor. of Tps. 34 and 35 N., Rs. 15 and 16 W., hereinbefore described.

North, bet. secs. 31 and 36.

Over rolling land, through scattered desert growth.

5.75 Wash, 5 lks. wide, course W.; asc. 28 ft. over SW. slope.

9.00 Spur, slopes W. ; desc. 40 ft. over broken NW. slope.

27.45 Cottonwood Wash, 150 lks. wide, course SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

S36	S31
1932	

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

50.00 Low spur, slopes SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a sandstone, 10x10x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 25, 30, 31 and 36, with brass cap mkd.

T35N	
R16W	R15W
S 25	S 30
S 36	S 31
1932	

Land, rolling.
Soil, sandy and rocky; 3rd and 4th rates.
Timber none; undergrowth, catclaw, joshua, black sage and cactus.

North, bet. secs. 25 and 30.

Over rolling land, through scattered desert growth.

Ascend SW. slope.

9.00 Spur, slopes SE.; desc. 16 ft.

10.76 Wash, 150 lks. wide, course SE.; asc. 16 ft. over SW. slope.

25.50 Spur, slopes SE.; desc. 25 ft. over NE. slope.

29.18 Wash, 5 lks. wide, course E.; asc. 25-ft.

31.00 Spur, slopes SE.; desc. 6 ft.

34.19 Wash, 5 lks. wide, course SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock, with a limestone, 10x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

Chains.

$\frac{1}{4}$
 S25 | S30
 1932

- 49.15 Mound of stone, bears E. 100 lks. dist.
- 54.00 Low spur, slopes SE.
- 57.50 **Pakoon**
Wash, 50 lks. wide, course SE.; asc. 91 ft. over broken SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a limestone, 8x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 19, 24, 25 and 30, with brass cap mkd.

T35N
 R16W | R15W
 S 24 | S 19
 S 25 | S 30
 1932

Land, rolling.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, cactus, joshua and black sage.

North, bet. secs. 19 and 24.
 Over rolling land, through scattered desert growth.
 Ascend 40 ft. over SE. slope.

- 2.50 Spur, slopes SE.; desc. 21 ft. over NE. slope.
- 4.51 Head of wash, course SE.; asc. 217 ft. over SE. slope.
- 18.00 Spur, slopes SW.; desc. 20 ft. over NW. slope.
- 26.53 Wash near head, course SW.; asc. 40 ft. over broken SE. slope.
- 33.00 Spur, slopes SW.; desc. 87 ft. over broken NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a limestone, 6x6x4 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
 S24 | S19
 1932

- Descend 153 ft. over NW. slope.
- 52.38 Wash, 100 lks. wide, course SW.; asc. 32 ft.
- 55.00 Spur, slopes E.; desc. 32 ft. over NE. slope.
- 57.88 Same wash, course SE.; asc. 69 ft. over broken SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a limestone, 14x10x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 13, 18, 19 and 24, with brass cap mkd.

Chains.

T35N	
R16W	R15W
S 13	S 18
S 24	S 19
1932	

Land, rolling.
Soil, sandy and rocky; 3rd and 4th rates.
Timber, none; undergrowth, catclaw, greasewood, cactus and joshua.

North, bet. secs. 13 and 18.

Over rolling land, through scattered desert growth.

- 13.00 Spur, slopes SW.; desc. 34 ft. over NW. slope.
- 19.67 Wash, 20 lks. wide, course SW.; asc. 88 ft. over SE. slope.
- 31.00 Spur, slopes SW.; continue ascending 24 ft. along broken W. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a lava stone, 8x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$	
S13	S18

1932

The above $\frac{1}{4}$ sec. cor. set, in swale, drains SW.

Ascend 126 ft. over broken W. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a lava stone, 10x10x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 7, 12, 13 and 18, with brass cap mkd.

T35N	
R16W	R15W
S 12	S 7
S 13	S 18
1932	

Land, rolling and mountainous.
Soil, rocky; 4th rate.
Timber, none; undergrowth, catclaw, cactus, greasewood and joshua.

North, bet. secs. 7 and 12.

Over mountainous land, through scattered desert growth.

Ascend 132 ft. over SW. slope.

- 9.80 Head of draw, course SW.
- 20.00 Spur, slopes SE.; desc. 174 ft. over steep SW. slope.
- 26.01 Wash, 30 lks. wide, in canyon, course SE.; asc. 125 ft. over steep SW. slope.

Chains.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock, with a lava stone, 8x6x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.

1/4
S12 | S 7
1932

Ascend 52 ft. over gradual S. slope.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 4 ins. in the ground to bedrock, with a lava stone 10x12x12 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 1, 6, 7 and 12, with brass cap mkd.

T35N
R16W R15W
S 1 | S 6
S 12 | S 7
1932

Land, mountainous.

Soil, rocky; 4th rate.

Timber, none; undergrowth, cactus, joshua, greasewood and catclaw.

North, bet. secs. 1 and 6.

Over rolling land, through scattered desert growth.

35.00

Small draw, course SW.; asc. 29 ft. over SW. slope.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, with a lava stone, 6x6x7 ins. mkd. X, deposited alongside, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.

1/4
S6 | S1
1932

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a lava stone, 6x8x4 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of Tps. 35 and 36 N., Rs. 15 and 16 W. with brass cap mkd.

T36N
R16W R15W
S 36 | S 31
S 1 | S 6
T35N
1932

Land, rolling.

Soil, sandy and rocky; 3rd and 4th rates.

Timber, none; undergrowth cactus, joshua and catclaw.

Chains. From the cor. of Tps. 35 and 36 N., Rs. 15 and 16 W., hereinbefore described.

West, bet. secs. 1 and 36.

Over rolling land, through scattered desert growth.

Descend 12 ft. over gradual SW. slope.

6.30 Small wash, course SW.; asc. 23 ft. over gradual E. slope.

12.50 Small spur, slopes S.; desc. 49 ft. over W. slope.

19.95 Wash, 30 lks. wide, course S.; asc. 40 ft. over E. slope.

31.26 Wash, 20 lks. wide, course S.

35.00 Small spur, slopes SE.; desc. 12 ft. over W. slope.

36.89 Wash, 20 lks. wide, course SE.; asc. 36 ft. over NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 5 ins. in the ground to bedrock, with a limestone, 8x8x4 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

S 36
S 1
1932

Ascend gradual NE. slope.

41.50 Small spur, slopes SE.; desc. 16 ft. over SW. slope.

44.50 Small wash, course SE.; asc. 46 ft. over NE. slope.

50.00 Spur, slopes S.; desc. 131 ft. over W. slope.

52.53 Draw, course S.

57.00 Road, bears N. and S. on spur, slopes S.

70.97 Wash, 40 lks. wide, course S.; asc. 49 ft. over NE. slope.

77.50 Spur, slopes N.; desc. 26 ft.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a sandstone, 10x10x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.

T36N R16W
S 35 | S 36
S 2 | S 1
T35N
1932

Land, rolling.
Soil, sandy and rocky; 3rd and 4th rates.
Timber, none; undergrowth, cactus, joshua, catclaw, sage brush and greasewood.

Chains. West bet. secs. 2 and 35.

Over mountainous land, through scattered desert growth.

3.20 Wash, 20 lks. wide, course S.; asc. 152 ft. over E. slope.

15.00 Top of rimrocks, bears NW. and SE.

24.00 Spur, slopes S.; desc. 296 ft. over W. slope.

30.78 Wash, 20 lks. wide, in small canyon, course SW; asc. 23 ft. over SE. slope.

35.00 Top of rimrocks, bears N. and S.; continue ascending over broken W. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., between two malapi rocks, (on spur slopes SE) with a malpais stone, 8x8x10 ins. mkd. X, deposited alongside, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 35
S 2
1932

Descend 100 ft. over SW. slope.

53.04 Road, bears SE. and NW.

53.94 Wash, 50 lks. wide, course S. 25° E.; asc. 90 ft. over E. slope.

60.00 Spur, slopes SE.; continue along broken SW. slope.

71.50 Wash, 30 lks. wide, course SE.; asc. 158 ft. over N. slope of spur.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 5 ins. in the ground to bedrock, with a lava stone, 12x8x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

T36N R16W
S 34 | S 35
S 3 | S 2
T35N
1932

Land, mountainous.
Soil, rocky; 4th rate.
Timber, none; undergrowth, cactus, joshua, catclaw and greasewood.

West, bet. secs. 3 and 34.

Over mountainous land, through scattered desert growth.

Ascend 678 ft. over E. slope.

35.34 Rocky ridge, bears N. and S.; desc. 100 ft. over W. slope.

40.00 True point for $\frac{1}{4}$ sec. cor. falls on W. face of bluff 100 ft. high.

40.50 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a limestone, 8x6x4 ins.

SOUTH BOUNDARY OF T. 36 N., R. 16 W.

Chains.

mkd. X, deposited at the base, and in a mound of stone to top, for witness $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 34 WC
S 3
1932

Descend 233 ft. over broken W. slope.

52.40 Wash, 20 lks. wide, course SW.

60.00 Small spur, slopes SW.

66.10 Wash, 20 lks. wide, course S.

73.40 Small wash, course SE.

79.27 Small spur, slopes S.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock, with a limestone 10x8x6 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T36N R16W
S 33 | S 34
S 4 | S 3
T35N
1932

Land, mountainous.
Soil, sandy and rocky; 3rd and 4th rates.
Timber, none; undergrowth, cactus, joshua, catclaw, greasewood and sage.

West, bet. secs. 4 and 33.

Over rolling land, through scattered desert growth.

1.00 Wash, 5 lks. wide, course S.; asc. 14 ft.

3.00 Spur, slopes S.; desc. 18 ft. over SW. slope.

8.70 Wash, 50 lks. wide, course S.; asc. 41 ft. over E. slope.

13.00 Spur, slopes S.

14.00 Wash, 10 lks. wide, course S.; asc. 12 ft.

16.50 Spur, slopes S.; desc. 36 ft. over W. slope.

20.00 Wash, 20 lks. wide, course S.; asc. 70 ft. over E. slope.

25.00 Spur, slopes SE.; desc. 40 ft. over SW. slope.

33.60 Wash 20 lks. wide, course SE.; asc. 43 ft. over NE. slope.

38.50 Spur, slopes SE.; desc. 8 ft.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a limestone, 10x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$ S 33
S 4
1932

- Chains. Descend 33 ft. over SW. slope.
- 48.20 Wash, 20 lks. wide, course SE.; asc. 26 ft.
- 52.50 Spur, slopes SE.; desc. 23 ft.
- 55.00 Wash, 20 lks. wide, course SE.; asc. 57 ft. over SE. slope.
- 60.00 Spur, slopes SE.; desc. 66 ft. over SW. slope.
- 65.84 Rocky draw, 100 lks. wide, course S.; asc. 74 ft. over rocky E. slope.
- 75.00 Spur, slopes S.; desc. 34 ft. over W. slope.
- 75.75 Wash, 100 lks. wide, course SE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock, with a limestone, 10x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 4, 5, 32, and 33, with brass cap mkd.

T36N R16W
 S 32 | S 33
 S 5 | S 4
 T35N
 1932

Land, rolling.
 Soil, sandy; 3rd rate.
 Timber, none; undergrowth, cactus, joshua, sage and greasewood.

West, bet. secs. 5 and 32.

Over rolling land, through scattered desert growth.

- 1.30 Drain, course SE.; asc. 28 ft.
- 4.00 Spur, slopes SE.; desc. 5 ft.
- 8.00 Wash, 30 lks. wide, course SE.; asc. 57 ft. over NE. slope.
- 18.50 Flat spur, 200 lks. wide, slopes SE.; desc. 31 ft. over SW. slope.
- 22.92 Draw, 20 lks. wide, course SE.; asc. 39 ft. over SE. slope.
- 32.00 Spur, 400 lks. wide, slopes SE.; desc. 25 ft. over SW. slope.
- 37.19 Draw, 30 lks. wide, course SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a limestone, 10x10x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for sec. cor. with brass cap mkd.

1/4 S 32
 S 5
 1932

- 40.50 Spur, slopes SE.

SOUTH BOUNDARY OF T. 36 N., R. 16 W.

Chains.
 45.00 Broad spur, slopes SE.; desc. 23 ft. over SW. slope.
 51.00 Wash, 30 lks. wide, course SE.
 60.10 Draw, 30 lks. wide, course SE.; asc. 121 ft. over rocky NE. slope.
 70.00 Broad spur, slopes SE.; desc. 23 ft. over SW. slope.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to bedrock, with a limestone, 6x6x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 5, 6, 31, and 32 with brass cap mkd.

T36N R16W
 S 31 | S 32
 S 6 | S 5
 T35N
 1932

Land, rolling.
 Soil, sandy; 3rd rate.
 Timber, none; undergrowth joshua, cacti and catclaw.

West, bet. secs. 6 and 31.

Over rolling land, through scattered desert growth.

Descend over SW. slope.

1.40 Draw, course SE.; asc. 40 ft. over NE. slope.
 8.50 Spur, slopes SE.; desc. 77 ft. over E. slope.
 12.67 Draw, course SE.; asc. 159 ft. over NE. slope.
 21.50 Spur, slopes SE.
 23.51 Intersect the Arizona and Nevada State Bdy.

Set an iron post, 3 ft. long, 3 ins. diam., 6 ins. in the ground to bedrock, with a limestone, 24x12x12 ins. mkd. X, deposited alongside, and in a mound of stone to top, for closing cor. of frac. Tps. 35 and 36 N., R. 16 W., with brass cap mkd.

NEV | T36N
 | R16W
 | S 31 C
 | S 6 C
 | T35N
 1932

From this point the 337 Mi. Cor. on the Ariz. and Nev. State Bdy. bears N. 1° 27' W., 18.20 chs. dist., an iron post, 3 ins. diam., firmly set, mkd. and witnessed as described in the field notes of the resurvey of said bdy. resurveyed under this group.

Land, rolling.
 Soil, sandy and rocky; 3rd and 4th rates.
 Timber, none; undergrowth, cactus, joshua, greasewood and sage.

EAST BOUNDARY OF T.36 N., R. 16 W.

BOOK 3991


Chains. From the cor. of Tps. 35 and 36 N., Rs. 15 and 16 W., hereinbefore described.

North, bet. secs. 31 and 36.

Over rolling land, through scattered desert growth.

35.80 Wash, 30 lks. wide, course SE.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, with a limestone, 8x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.



Ascend 40 ft. over gradual SW. slope.

65.00 Continue along E. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, with a limestone, 10x8x6 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 25, 30, 31, and 36. with brass cap mkd.



Land, rolling.
Soil, sandy; 3rd rate.
Timber, none; undergrowth, Joshua, cactus and catclaw.


North, bet. secs. 25 and 30.

Over rolling land, through scattered desert growth.

Along E. slope.

25.00 Wash, 20 lks. wide, course SE.; asc. 63 ft. over gradual SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, with a limestone, 12x10x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for 1/4 sec. cor. with brass cap mkd.



55.00 Rim of Cedar Canyon, bears NW. and SE. ; desc. 113 ft. over NE. slope.

78.50 Low spur, slopes W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock, with a lava stone, 12x10x10 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 19, 24, 25, and 30. with brass cap mkd.

Chains.

T36N
 R16W R15W
 S 24 | S 19
 S 25 | S 30
 1932

Land, rolling.
 Soil, sandy; 3rd rate.
 Timber, none; undergrowth, sage, cactus, catclaw and joshua.

North, bet. secs. 19 and 24.

Over rolling, and mountainous land, through scattered desert growth.

Descend 67 ft. over NE. slope.

25.20 Center of wash ^{Cedar Canyon} inc., 200 lks. wide, course SE.; asc. 114 ft. over rocky SW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a lava stone 12x12x12 ins. mkd. X, deposited at the base, and in a mound of stone to top for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
 S24 | S19
 1932

Ascend 154 ft. over SW. slope.

44.00 Top of rimrocks, 30 ft. high, bears SE. and NW.

50.00 Spur, slopes SE.; desc. 16 ft. over NE. slope.

63.50 Spur, slopes E.; desc. 34 ft. over NE. slope.


68.20 Wash, 30 lks. wide, course SE.; asc. 23 ft. along SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock, with a lava stone, 10x8x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 13, 18, 19, and 24, with brass cap mkd.


T36N
 R16W R15W
 S 13 | S 18
 S 24 | S 19
 1932

Land, mountainous.
 Soil, rocky; 4th rate.
 Timber, none; undergrowth, sage, joshua, cactus and greasewood.

Chains. North, bet. secs. 13 and 18.
 Over rolling land, through scattered desert growth.
 7.30 Wash, 20 lks. wide, course SE.
 20.00 Wash, 15 lks. wide, course SW.; asc. 46 ft. over SE. slope.
 28.50 Spur, slopes SW.; continue along same.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, with a limestone, 10x8x8 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.



54.30 Draw, 100 lks. wide, course SE.; asc. 86 ft. over SW. slope.
 59.00 Spur, 300 lks. wide, slopes SE.; desc. 34 ft. over NW. slope.
 72.00 Head of draw, course NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a limestone, 8x8x4 ins. mkd. X, deposited at the base, and in a mound of stone to top, for cor. of secs. 7, 12, 13, and 18, with brass cap mkd.



Land, rolling.
 Soil, sandy; 3rd rate.
 Timber, none; undergrowth, joshua, greasewood, cactus and sage brush.

North, bet. secs. 7 and 12.
 Over rolling land, through scattered desert growth.
 Descend 23 ft. over NE. slope.
 5.81 Wash, 30 lks. wide, course SE.; asc. 40 ft. over SW. slope.
 13.50 Same wash, course SW.; continue ascending 40 ft. over SW. slope.
 18.10 Same wash, course SE.
 29.60 Same wash, course SW.; asc. 29 ft. over SE. slope.
 32.50 Small spur, slopes E.; desc. 26 ft. over NE. slope.
 35.00 Head of draw, course E.; asc. 25 ft. over SE. slope.

EAST BOUNDARY OF T. 36 N., R. 16 W.

Chains.

40.00 Set an iron post, 3 ft. long, 2 ins. diam., on solid rock, mkd. with a cross X, at true point, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
S12 | S 7
1932

Ascend 25 ft. over SE. slope.

45.00 Top of ascent; desc. 29 ft. over NE. slope.

52.84 Wash, 20 lks. wide, course SE.; asc. 34 ft. over SW. slope.

55.00 Spur, slopes W.; desc. along W. slope.

60.20 Same wash, course SW.; asc. 120 ft. over SE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock, with a limestone 12x12 x8 ins. mkd. X, deposited alongside, and in a mound of stone to top, for cor. of secs. 1, 6, 7, and 12, with brass cap mkd.

T36N
R16W | R15W
S 1 | S 6
S 12 | S 7
1932

Land, rolling.

Soil, sandy; 3rd rate.

Timber, none; undergrowth joshua, cactus and catclaw.

North, bet. secs. 1 and 6.

Over rolling land, through scattered desert growth.

7.50 Low spur, slopes SW.

38.00 Low spur, 300 lks. wide, slopes SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a limestone, 10x5x5 ins. mkd. X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
S1 | S6
1932

Descend 87 ft. over NE. slope.


52.63 Large draw, course SE.; asc. 72 ft. over SW. slope.

65.00 Saddle on low ridge, bears NE. and SW.; desc. 41 ft. over NE. slope.

81.69 Intersect the 9th Standard Parallel North.

Chains.

Set an iron post, 3 ft. long, 3 ins. diam., 26 ins. in the ground, for closing cor. of Tps. 36 N., Rs. 15 and 16 W., with brass cap mkd.

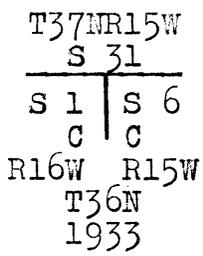

raise a mound
of stone, 3 ft. base, 2 ft. high, S. of cor.

From point of intersection the standard $\frac{1}{4}$ sec. cor. on S. bdy. of sec. 31, T. 37 N., R. 15 W., bears East, 7.55 chs. dist., an iron post, 1 in. diam., firmly set, mkd. and witnessed as described in the field notes of the survey of the 9th standard parallel north, surveyed under this group.

Land, rolling.
Soil, sandy and gravelly; 3rd rate.
Timber, none; undergrowth, joshua, catclaw, cactus, yucca and greasewood.

FINAL TESTS OF INSTRUMENTS.

For final tests of instrument No. 16740, used by Benjamin J. Kinsey, U. S. Surveyor, and instrument No. 19423, used by William E. Hiester, U. S. Surveyor, see field notes of subdivision of T. 36 N., R. 16 W., surveyed under this group.

[Faint, illegible text]

