Sound Levels at Greater Sage-grouse Leks in the Pinedale Anticline Project Area, WY, April, 2013–2016

October 25, 2016 DRAFT

Prepared by:
Skip Ambrose[a]
Chris Florian[a]
John MacDonald, PE[b]

[a]Sandhill Company
HC 64 Box 2205
393 Castle Creek Lane
Castle Valley, UT 84532
Email: skipambrose@frontiernet.net
Office: 435-259-0401
Cell: 435-220-0129

[b]3142 Ash Park Loop
Winter Park, FL 32792

Sound Levels at Greater Sage-grouse Leks, Pinedale Anticline Project Area, Wyoming, April 2013-2016

Summary
The Bureau of Land Management's Pinedale Anticline Project Area Supplement Environmental Impact Statement developed a "Wildlife Monitoring and Mitigation Matrix" that identifies specific species to be monitored as well as criteria to be measured and changes that will be monitored. Greater sage-grouse was identified as a species to be monitored, and one criterion for this species was sound levels at leks.

The objective of this project was to monitor sound levels at 19 greater sage-grouse leks in the PAPA area south of Pinedale, WY. This is the fourth year monitoring sound levels at 19 leks in the PAPA.

A total of 8045 hours of acoustic data were collected at 19 leks in the PAPA from 2013-2016 (999 hours 2013, 1092 in 2014, 2280 in 2015, 3674 hours in 2016). For all years and all leks and all hours (0000-2400), the median hourly L_{50} dBA was 26.0 dBA (range 17.5-36.9 dBA). For all years and all leks and lekking hours (1800-0800), the median hourly L_{50} dBA was 25.8 dBA (range 16.0-38.5 dBA).

Sound levels at leks varied little among years except in situations where gas field activity changed significantly (SD=2.1 dBA; range 0.8-4.3 dBA). Sound levels at leks were directly related to the distance to the nearest pad with gas field activity and the type of activity at that pad.

Table of Contents

Summary 2
Table of Contents 3
List of Tables 4
List of Figures 4
Introduction 5
Objective 5
Study Area 5
Methods 5
Measurement Protocol *5*
Instrumentation *6*
Measurement Locations *7*
Measurement Schedule *7*
Results 8
Data Collection *8*
Sound Levels *8*
Discussion 13
Sound Levels at PAPA Leks, 2013-2016 ..... *13*
Sound Levels and Distance to Pad *13*
Acknowledgements 14
Literature Cited 14
Appendix A. Hourly dBA Metrics, PAPA Leks, April 2013-2016 16
Appendix B. Credentials of Authors 208

List of Tables

Table 1. Hours of acoustic data collected at each lek by year, PAPA, April 2013-2016. .. 8
Table 2. Median L_{50} dBA, all hours (0000-2400), at 19 PAPA leks, April 2013-2016..... 9
Table 3. Median L_{50} dBA, lekking hours (1800-0800), at 19 PAPA leks, April 2013-2016..... 10
Table 4. L50 dBA sound levels at leks and mowed areas, including distance and direction from lek to mowed area, April 2016. 14

List of Figures

Figure 1. Typical equipment deployment near lek, showing case (sound level meter, digital recorder, battery) and microphone with foam windscreen and bird spike (in circle) at 0.3 m above ground. Lek is open area in background. 6
Figure 2. Mean L_{50} dBA at leks relative to distance to pad with some type of gas field activity, PAPA, 2013-2016 (circle with x indicates no grouse at lek). 13

Introduction

Greater sage-grouse (*Centrocercus urophasianus*) use elaborate audio and visual display behaviors to attract and select mates, and depend on audio communication between females and chicks during brood rearing. A potential threat to greater sage-grouse is anthropogenic noise associated with human activity, including noise from oil and gas development and production (Holloran 2005, BLM 2008, Patricelli et al. 2013).

The Bureau of Land Management's Pinedale Anticline Project Area Supplement Environmental Impact Statement (BLM 2008) developed a "Wildlife Monitoring and Mitigation Matrix" that identified specific species to be monitored as well as criteria to be measured and changes that will be monitored. Greater sage-grouse was identified as a species to be monitored, and one criterion for this species was sound levels at leks.

This is the fourth year monitoring sound levels at 19 leks in the PAPA.

Objective

The objective of this project was to measure sound levels at 19 leks in the Pinedale Anticline Project Area (PAPA) during the lekking period.

Study Area

The study area was south of Pinedale, WY, in the Pinedale Anticline Project Area. The 19 leks studied were in the Mesa, Duke's Triangle, and Yellowpoint complexes.

Methods

Measurement Protocol

We followed "Procedures for Outdoor Measurement of Sound Pressure Level" (ANSI 1994) and acoustic measurement protocols developed for the Pinedale Anticline Project Office by Blickley and Patricelli (2012), "Noise monitoring recommendations for Greater Sage Grouse habitat in Wyoming." ANSI procedures recommend microphone heights of 1.2 m to 1.8 m but these were developed to assess noise impacts to humans. ANSI standards also state: "Other heights may be used if they prove to be more practicable or if they are specified in other pertinent standards" (ANSI 1994, Section 7.3.2.4). Several authors recommend that in wildlife acoustic studies microphones be placed such that sound level measurements accurately reflect sound stimulus to which the target animal is exposed (Pater et al. 2009; Grubb et al. 1998, Delaney et al. 2009, Delaney et al. 2011; Blickley and Patricelli 2013). The approximate ear height of greater sage-grouse is 0.3 m (12"); therefore, microphones were placed 0.3 m above the ground. Standardizing microphone height at 0.3 m for acoustic studies relative to greater sage-grouse is consistent with flexibility and guidance provided by ANSI (1994, Section 7.3.2.4).

Leks in the PAPA are situated in a variety of terrain situations, including valley floors, hillsides, and ridges. Most leks are open areas surrounded by sage vegetation. Equipment was placed at the perimeter of the lek, in sage vegetation typical of that surrounding the lek and not visible to grouse (Figure 1). Locations were selected to minimize potential influence on grouse behavior while capturing sound levels that grouse experience. The average distance from the center of the lek to the microphone in 2015 was 62 m.

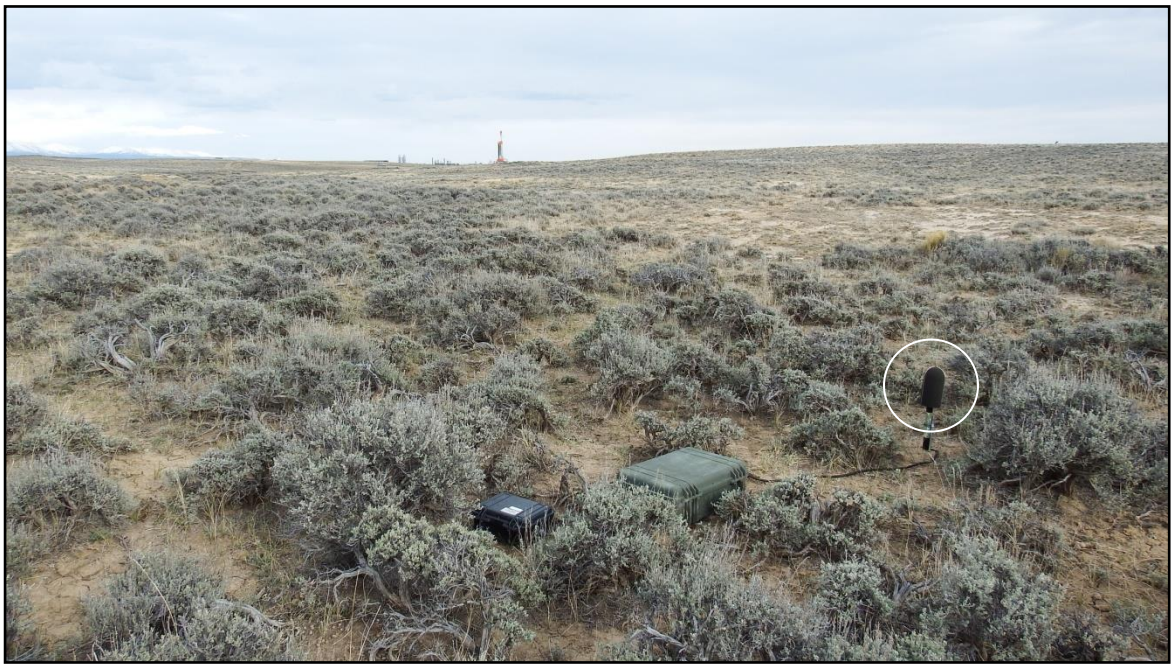

Figure 1. Typical equipment deployment near lek, showing case (sound level meter, digital recorder, battery) and microphone with foam windscreen and bird spike (in circle) at 0.3 m above ground. Lek is open area in background.

Instrumentation

We used Larson-Davis 831 sound level meters with PCB 377B20 microphones, Larson-Davis PRM831 preamplifiers, and Larson-Davis EPS2106 Environmental Shrouds (foam windscreen and bird spike). All acoustic equipment used for data collection (sound level meters, microphones, and preamplifiers) met or exceeded ANSI S1.4-1983 Type 1 standards. Sound level analyzers (capable of one-third octave band and broadband measurements) met ANSI S1.11-2004 and ANSI S1.42-2001, respectively. All acoustic equipment and field calibrators were calibrated to meet ANSI S1.40-2006 prior to deployment. All systems and calibrators were factory calibrated as recommended by the manufacturer, and all systems were field calibrated at the beginning and end of each measurement period at each location using a field calibrator that met ANSI S1.40-1984 standards. All system components (SLM, digital recorder were synchronized with GPS time, and differences at the end of the measurement period noted. We used a Bruel and Kjaer (B&K) Acoustic Calibrator Type 4231 for field calibration.

We also collected continuous digital recordings at all measurement locations (MP3, 128 kbps). We used Roland R05 digital recorders, and used the microphone output from the sound level meters for input to the R05 recorder. Recordings were used to review unusual sound events and to determine sound sources and the percent time that various sound sources were audible.

Sound level meters were set to collect 1-second dBA, dBF, and dBC, as well as unweighted one-third octave band data, 12.5-20,000 Hz. We expected sound levels at some locations to be very low (<15 dBA) in some areas, so sound level meters were set to "low-range" with a gain of +20 dB. These settings ensured meters would collect data at the lowest measurement limit for these systems (approximately 13.5 dBA).

Data Analysis

For every hour (3600 seconds of data), L_{min}, L_{max}, L_{eq}, L_{10}, L_{50}, and L_{90} were calculated. L_{min} and L_{max} were the minimum and maximum levels for that hour. L_{eq} was the energy average (a logarithmic average) of that hour. L_{10}, L_{50}, and L_{90} were levels exceeded 10%, 50%, and 90% of the time during that hour. All of our data sets were for multi-day periods, and summary hourly metrics for each site were calculated as follows. L_{min} and L_{max} were the minimum and maximum levels of all 0800 hours, all 0900 hours, all 1000 hours, etc., during the measurement period. Summary hourly and summary site metrics (L_{eq}, L_{10}, L_{50}, and L_{90}) for each hour of day (0800, 0900, 1000, etc.), were calculated using the median L_{eq}, L_{10}, L_{50}, and L_{90} of all 0800 hours, all 0900 hours, all 1000 hours, etc.

For each site, summary metrics for two time periods were calculated, all hours (0000-2400) and lekking hours (1800-0800). The time period 1800-0800 is specified in the Wyoming Governor's Executive Order 2015-4 relative to greater sage-grouse and noise levels (Mead 2015).

Measurement Locations

We collected acoustic data at 19 greater sage-grouse leks in the PAPA in April 2013-2015 (Table 1). These leks were in the Mesa (9), Duke's Triangle (3), and Yellowpoint (7) complexes. Sound level meters were placed at the perimeter of each lek, and averaged 62 m from the center point of the lek in 2015 (lek center and boundary defined by WGFD). Exact measurement locations are not provided in this report due to security concerns regarding lek locations.

Measurement Schedule

Wyoming Governor's Executive Order 2011-5 (Mead 2011) stipulates that sound levels shall be measured "during the initiation of breeding (March 1 – May 15)," so all measurements were made in the month of April during the years 2013-2015. Our goal was to collect a minimum of 48 hours at each lek in each year in order to account for variability in sound levels due to natural causes (meteorological conditions, birds singing near the equipment, etc.). Very short measurement periods of only a few hours could significantly over- or under-estimate actual long-term sound levels. In 2015, we collected ≥7 days of data at leks (n=11) where grouse were observed in 2014 in order to review variability over time at these leks.

More detailed Methods and Definitions are provided in 2013 and 2014 reports (Ambrose and Florian 2014, Ambrose et al. 2015)

Results

Data Collection

Acoustic data were collected at 19 greater sage-grouse leks in the PAPA in April 2013-2015. A total of 4371 hours of acoustic data were collected (999 hours 2013, 1092 in 2014, and 2280 hours in 2015) (Table 1).

Sound Levels

The median L_{50} dBA for all leks for the years 2013-2015 was 26.0 dBA (range 17.5-36.9). The median L_{50} dBA for lekking hours (1800-0800) was 25.8 dBA (range 16.0-38.5). Sound levels at leks varied according to the distance and type of gas field activity. There was little difference between L_{50} dBA for all hours (0000-2400) compared to lekking hours (1800-0800), due primarily to gas field sounds being generally continuous. L_{50} dBA site summary metrics for two time periods (0000-2400 and 1800-0800) for PAPA leks, April 2013-2016, are shown in Tables 2-3. L_{eq} site summary metrics for two time periods for PAPA leks, April 2013-2016, are shown in Tables 4-5.

Hourly dBA metrics (L_{eq}, L_{10}, L_{50}, L_{90}. L_{min}, L_{max}) for each lek for 2013-2015 are presented in Appendices A.

Table 1. Hours of acoustic data collected at each lek by year, PAPA, April 2013-2016.

Lek Num.	Lek Name	2013	2014	2015	2016	Total
PAPA001	Big Fred	47	43	48	170	308
PAPA002	Little Fred	47	45	25	167	284
PAPA003	Lower Sand Springs	50	48	193	168	459
PAPA004	Two Buttes	75	46	169	171	461
PAPA005	Mesa Spring	75	68	68	236	447
PAPA006	Lovatt Draw Res.	59	42	48	128	277
PAPA007	Shelter Cabin Res.	49	43	188	212	492
PAPA008	The Rocks	50	98	48	148	344
PAPA009	South Rocks	50	61	191	157	459
PAPA010	Stud Horse Butte	49	98	48	167	362
PAPA011	Little Saddle	47	18	167	172	404
PAPA012	Alkali Draw	46	68	189	216	519
PAPA013	Sand Draw	46	68	96	176	386
PAPA014	Lovatt West	75	43	64	239	421
PAPA015	Cat	49	44	50	172	315
PAPA016	Tyler Draw North	46	108	167	247	568
PAPA017	Oil Fork Road	46	59	194	245	544
PAPA018	Mesa Road 3	47	46	164	242	499
PAPA019	Bloom Res. Sat.	46	46	163	241	496

Table 2. Median L_{50} dBA, all hours (0000-2400), at 19 PAPA leks, April 2013-2016.

Lek Num.	Lek Name	2013	2014	2015	2016	Median
PAPA001	Big Fred	36.9	27.0	30.4	28.9	29.7
PAPA002	Little Fred	28.4	23.6	27.7	29.0	28.1
PAPA003	Lower Sand Springs	28.4	28.5	29.6	26.0	28.4
PAPA004	Two Buttes	26.4	24.5	21.8	21.5	23.1
PAPA005	Mesa Spring	30.0	24.9	27.0	25.6	26.3
PAPA006	Lovatt Draw Res.	32.0	30.9	28.6	27.8	29.8
PAPA007	Shelter Cabin Res.	26.0	27.0	29.7	27.8	27.4
PAPA008	The Rocks	26.2	25.4	30.1	30.1	28.1
PAPA009	South Rocks	26.2	25.6	28.5	29.5	27.3
PAPA010	Stud Horse Butte	27.3	30.4	25.9	25.5	26.6
PAPA011	Little Saddle	22.3	18.4	21.3	22.1	21.7
PAPA012	Alkali Draw	23.3	18.4	23.0	25.6	23.2
PAPA013	Sand Draw	27.3	23.8	28.6	30.2	27.9
PAPA014	Lovatt West	29.6	29.2	27.7	28.2	28.7
PAPA015	Cat	17.5	20.1	20.2	21.1	20.1
PAPA016	Tyler Draw North	21.8	22.9	21.1	22.8	22.3
PAPA017	Oil Road Fork	24.9	28.0	26.0	23.2	25.4
PAPA018	Mesa Road 3	24.1	20.7	21.2	20.3	20.9
PAPA019	Bloom Res. Sat.	22.0	18.6	19.3	19.7	19.5

Table 3. Median L_{50} dBA, lekking hours (1800-0800), at 19 PAPA leks, April 2013-2016.

Lek Num.	Lek Name	2013	2014	2015	2016	Median
PAPA001	Big Fred	38.5	26.2	32.2	29.1	30.6
PAPA002	Little Fred	28.9	23.8	30.5	28.9	28.9
PAPA003	Lower Sand Springs	28.9	29.5	30.6	26.1	29.2
PAPA004	Two Buttes	26.1	23.1	21.9	21.3	22.5
PAPA005	Mesa Spring	29.9	25.1	25.8	25.5	25.6
PAPA006	Lovatt Draw Res.	32.6	31.5	29.0	28.2	30.3
PAPA007	Shelter Cabin Res.	24.1	27.1	30.0	27.2	27.1
PAPA008	The Rocks	24.5	24.2	30.8	31.3	27.6
PAPA009	South Rocks	25.3	25.7	28.3	29.9	27.0
PAPA010	Stud Horse Butte	26.7	29.8	27.6	26.7	27.2
PAPA011	Little Saddle	21.9	17.7	20.5	21.7	21.1
PAPA012	Alkali Draw	22.2	18.1	22.7	25.0	22.4
PAPA013	Sand Draw	25.9	26.0	29.0	31.6	27.5
PAPA014	Lovatt West	30.1	30.0	28.7	29.2	29.6
PAPA015	Cat	16.0	18.0	17.7	20.5	17.8
PAPA016	Tyler Draw North	20.5	21.1	20.7	20.0	20.6
PAPA017	Oil Road Fork	25.3	31.1	27.8	22.9	26.6
PAPA018	Mesa Road 3	25.7	16.9	21.1	19.2	20.1
PAPA019	Bloom Res. Sat.	23.0	16.1	18.9	17.2	18.0

Table 4. Median L_{eq} dBA, all hours (0000-2400), at 19 PAPA leks, April 2013-2016.

Lek Num.	Lek Name	2013	2014	2015	2016	Median
PAPA001	Big Fred	39.0	28.6	33.2	33.1	33.1
PAPA002	Little Fred	31.2	26.8	31.3	31.7	31.3
PAPA003	Lower Sand Springs	30.8	30.5	31.5	28.6	30.7
PAPA004	Two Buttes	28.6	29.7	25.7	25.6	27.2
PAPA005	Mesa Spring	32.4	30.8	30.0	28.4	30.4
PAPA006	Lovatt Draw Res.	33.4	32.2	30.3	29.9	31.2
PAPA007	Shelter Cabin Res.	27.9	30.7	31.5	30.8	30.7
PAPA008	The Rocks	28.1	29.1	31.9	33.0	30.5
PAPA009	South Rocks	27.7	27.9	31.1	32.2	29.5
PAPA010	Stud Horse Butte	28.4	32.1	32.6	29.3	30.7
PAPA011	Little Saddle	26.5	28.8	26.4	25.8	26.5
PAPA012	Alkali Draw	26.0	24.1	27.6	28.9	26.8
PAPA013	Sand Draw	29.2	27.6	30.7	33.0	29.9
PAPA014	Lovatt West	31.2	30.3	32.3	31.8	31.5
PAPA015	Cat	24.0	24.1	26.6	27.4	25.3
PAPA016	Tyler Draw North	25.2	26.5	26.2	29.2	26.3
PAPA017	Oil Fork Road	26.3	31.3	30.3	26.3	28.3
PAPA018	Mesa Road 3	27.6	26.7	25.9	25.7	26.3
PAPA019	Bloom Res. Sat.	25.3	28.0	25.2	25.6	25.5

Table 5. Median L_{eq} dBA, lekking hours (1800-0800), at 19 PAPA leks, April 2013-2016.

Lek Num.	Lek Name	2013	2014	2015	2016	Median
PAPA001	Big Fred	40.2	27.9	33.0	33.2	33.1
PAPA002	Little Fred	31.1	26.5	31.6	31.3	31.2
PAPA003	Lower Sand Springs	30.8	31.1	31.8	28.2	30.9
PAPA004	Two Buttes	27.5	25.2	23.9	23.6	24.5
PAPA005	Mesa Spring	31.0	30.4	27.9	27.3	29.1
PAPA006	Lovatt Draw Res.	33.3	32.2	29.5	29.6	30.9
PAPA007	Shelter Cabin Res.	25.2	29.3	31.5	29.2	29.3
PAPA008	The Rocks	26.1	26.8	32.2	33.7	29.5
PAPA009	South Rocks	26.4	27.5	29.8	32.2	28.6
PAPA010	Stud Horse Butte	27.7	31.2	30.1	29.0	29.5
PAPA011	Little Saddle	24.4	25.1	22.8	24.1	24.2
PAPA012	Alkali Draw	24.5	22.7	24.8	26.6	24.7
PAPA013	Sand Draw	28.2	28.3	30.0	33.8	29.2
PAPA014	Lovatt West	31.0	30.8	31.6	30.3	30.9
PAPA015	Cat	20.5	20.6	21.0	24.4	20.8
PAPA016	Tyler Draw North	24.0	24.9	24.3	24.9	24.6
PAPA017	Oil Fork Road	26.0	32.6	29.3	24.5	27.7
PAPA018	Mesa Road 3	27.3	20.7	23.8	21.2	22.5
PAPA019	Bloom Res. Sat.	25.5	20.0	23.0	22.0	22.5

Discussion

Sound Levels at PAPA Leks, 2013-2016

Sound levels at each lek in the PAPA were generally similar for all years, except when nearby gas field operations changed significantly. The mean standard deviation for L_{50} dBA at 19 leks from 2013-2016 was 2.1 dBA (range 0.8-4.3). The largest SD was 4.3 dBA and was due to a drill rig being near a lek (Big Fred) in 2013, but not in 2014-2016.

Sound Levels and Distance to Pad

L_{50} dBA (median, all years) and distance (m) to pad were highly correlated ($R^2 = 0.652$, $P \leq 0.001$). Sound levels at each pad varied due to the type of activity at nearby pads. Attenuation rates at each lek varied due to terrain and other variables. In general, the closer the lek was to a pad with some type of activity, the higher the L_{50} dBA (Figure 2).

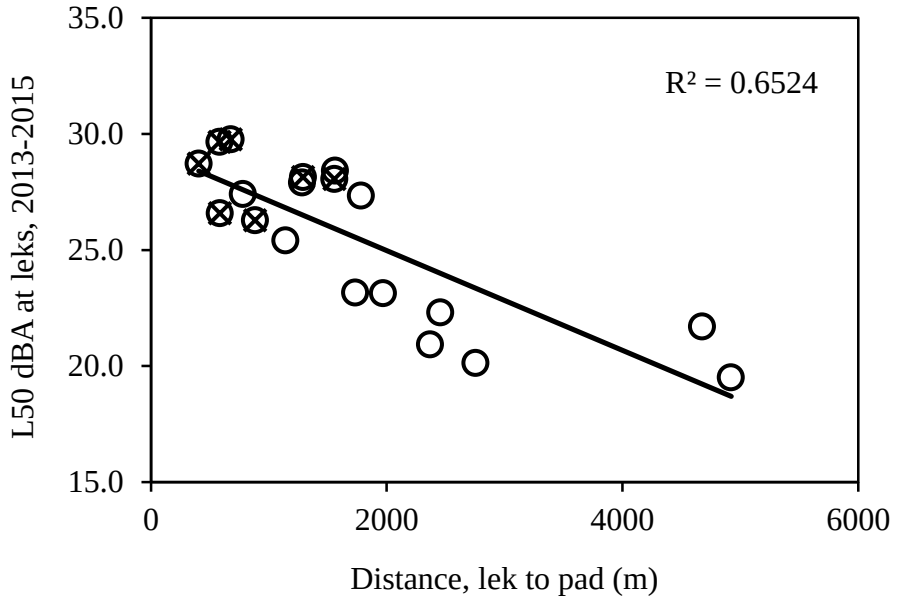

Figure 2. L_{50} dBA at 19 leks relative to distance to pad with some type of gas field activity, PAPA, 2013-2016 (circle with x indicates no grouse at lek).

Sound Levels at Mowed Areas

In 2015, areas near three existing leks (Little Fred, Lower Sand Springs Draw, and Oil Road Fork) were mowed in an attempt to create new lek areas. These new lek areas were created because gas field activities were planned near the current leks, and this was an effort to move grouse away from existing leks and approaching activity. Two areas were mowed west of the Oil Road Fork lek. In 2016, sound level measurements were conducted at all of these mowed areas, simultaneous with measurements at the nearest lek. Sound levels at mowed areas were somewhat lower than sound levels at the nearby lek due to greater distance from gas field activity. Sound levels at leks and mowed areas, as well as distance (m) and direction (° from north) from lek, are presented in Table 4.

Table 6. L50 dBA sound levels at leks and mowed areas, including distance and direction from lek to mowed area, April 2016.

Lek Num.	Lek Name	L50 dBA 2016	Distance (m) from lek	Direction (°) from lek
PAPA002	Little Fred	29.0		
PAPA022	Little Fred, mowed	25.6	1305	3
PAPA003	Lower Sand Springs	26.0		
PAPA024	Lower Sand S., mowed (west)	25.4	470	65
PAPA017	Oil Road Fork	23.2		
PAPA023	Oil Road, 3 mowed east	21.7	1120	292
PAPA021	Oil Road 2, mowed west	21.0	1750	292

Acknowledgements

Several individuals assisted us during this study, including Therese Hartman (WGFD), Dean Clause (WGFD), and Theresa Gulbrandson (BLM). We appreciate their help.

Literature Cited

Ambrose, S., and C. Florian. 2014. Sound Levels at Greater Sage-grouse Leks, Pinedale Anticline Project Area, Wyoming, April 2013. Unpublished report to Wyoming Department of Game and Fish, Cheyenne, WY.

Ambrose, S., C. Florian, and J. MacDonald. 2014. Ambient sound levels in sage habitats in Wyoming, April 2014. Unpublished report to Wyoming Department of Game and Fish, Cheyenne, WY.

American National Standard (ANSI). 1994. Procedures for Outdoor Measurement of Sound Pressure Level. American National Standards, Inc. New York, NY.

Blickley, J. L., and G. L. Patricelli. 2012. Potential acoustic masking of greater sage-grouse (*Centrocercus urophasianus*) display components by chronic industrial noise. Ornithological Monographs Volume (2012), No. 74, 23–35.

Blickley, J. L, and G. L. Patricelli. 2013. Noise monitoring recommendations for Greater Sage Grouse habitat in Wyoming. Prepared for the PAPA, Pinedale, WY.

Bureau of Land Management (BLM). 2008. Final Supplemental Environmental Impact Statement for the Pinedale Anticline Oil and Gas Exploration and Development Project, Sublette County, Wyoming. US Department of the Interior, Bureau of Land Management, Cheyenne, Wyoming.

Delaney, D. K., T. G. Grubb, P. Beier, L. L. Pater, and M. H. Reiser. 1999. Effects of helicopter noise on Mexican spotted owls. Journal of Wildlife Management 63:60–76.

Delaney, D. K., L. L. Pater, L. D. Carlile, E. W. Spadgenske, T. A. Beaty, and R. H. Melton. 2011. Responses of red-cockaded woodpeckers to military training operations. Wildlife Monographs, No. 177, 1-38.

Environmental Protection Agency (EPA). 1971. Community Noise. U.S. Environmental Protection Agency, Office of Noise Abatement and Control, Washington, D.C. 20460.

Grubb, T. G., L. L. Pater, and D. K. Delaney. 1998. Logging truck noise near nesting northern goshawks. U.S. Forest Service Research Note RM-RMRSRN-3, Rocky Mountain Research Station, Ft. Collins, Colorado, USA.

Holloran, M. J. 2005. Greater sage-grouse (*Centrocercus urophasianus*) population response to natural gas field development in western Wyoming. Department of Zoology and Physiology, University of Wyoming, Laramie.

KC Harvey. 2009. Pinedale Anticline Project Area Sage Grouse Monitoring, Noise Monitoring Report. Unpublished report to Pinedale Area Project Office, Pinedale, WY.

Mead, M.H. 2015. State of Wyoming, Executive Department, Executive Order 2015-4, Greater sage-grouse Core Area Protection. Office of the Governor, Cheyenne, WY.

National Weather Service (NWS). 2014. National Climate Data, National Oceanic and Atmospheric Administration. Silver Springs, MD.

Pater, L. L., T. G. Grubb, and D. K. Delaney. 2009. Recommendations for Improved Assessment of Noise Impacts on Wildlife. J. Wildlife Management 73(5):788-795.

Patricelli, G. L., J. L. Blickley, and S. L. Hooper. Recommended management strategies to limit anthropogenic noise impacts on greater sage-grouse in Wyoming. Human-Wildlife Interactions 7(2):23-249, Fall 2013.

Appendix A. Hourly dBA Metrics, PAPA Leks, April 2013-2016.

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	05-Apr-13	16	42.2	45.4	40.3	36.9	33.5	53.0
PAPA001	05-Apr-13	17	39.6	41.8	38.6	36.0	33.0	51.4
PAPA001	05-Apr-13	18	41.1	43.1	39.3	36.6	32.2	62.1
PAPA001	05-Apr-13	19	39.0	40.5	37.9	35.3	31.2	56.5
PAPA001	05-Apr-13	20	42.7	42.8	40.2	38.1	34.7	65.7
PAPA001	05-Apr-13	21	42.9	44.1	41.9	39.6	36.6	60.7
PAPA001	05-Apr-13	22	43.7	45.3	42.7	40.9	38.4	59.6
PAPA001	05-Apr-13	23	46.1	48.9	45.2	41.0	34.8	58.0
PAPA001	06-Apr-13	0	45.6	46.9	43.8	37.9	33.0	67.1
PAPA001	06-Apr-13	1	43.5	46.8	40.9	38.1	36.5	56.4
PAPA001	06-Apr-13	2	42.0	44.4	40.0	38.0	36.1	60.7
PAPA001	06-Apr-13	3	38.4	38.3	36.5	34.8	33.0	63.2
PAPA001	06-Apr-13	4	42.5	44.8	41.2	37.6	35.7	60.4
PAPA001	06-Apr-13	5	42.5	45.8	40.5	39.2	37.8	60.4
PAPA001	06-Apr-13	6	38.6	39.3	37.7	36.5	35.3	54.8
PAPA001	06-Apr-13	7	35.0	37.8	33.7	29.7	27.3	45.1
PAPA001	06-Apr-13	8	33.8	35.6	32.9	31.4	29.7	45.4
PAPA001	06-Apr-13	9	34.0	35.2	33.6	32.5	31.1	45.2
PAPA001	06-Apr-13	10	35.0	36.4	34.4	32.7	29.9	45.9
PAPA001	06-Apr-13	11	34.2	36.3	33.7	30.5	27.4	45.8
PAPA001	06-Apr-13	12	32.6	34.5	31.5	28.7	26.1	45.6
PAPA001	06-Apr-13	13	36.6	39.4	35.1	32.1	28.6	49.2
PAPA001	06-Apr-13	14	35.1	37.7	33.4	29.2	26.3	50.6
PAPA001	06-Apr-13	15	34.8	36.1	33.9	32.0	29.4	48.6
PAPA001	06-Apr-13	16	33.9	36.3	33.1	30.6	26.2	46.4
PAPA001	06-Apr-13	17	34.0	35.8	33.3	31.3	28.6	46.0
PAPA001	06-Apr-13	18	33.9	35.3	33.5	32.1	30.6	44.9
PAPA001	06-Apr-13	19	40.0	41.2	36.8	34.1	30.4	61.8
PAPA001	06-Apr-13	20	39.2	41.0	37.6	36.1	34.7	55.1
PAPA001	06-Apr-13	21	38.3	39.4	36.9	34.9	33.0	55.2
PAPA001	06-Apr-13	22	40.3	41.8	39.2	37.6	34.8	56.1
PAPA001	06-Apr-13	23	40.1	41.7	38.3	36.3	33.8	58.2
PAPA001	07-Apr-13	0	39.6	41.0	38.6	35.2	33.4	57.5
PAPA001	07-Apr-13	1	40.8	41.1	38.4	36.2	31.6	60.6
PAPA001	07-Apr-13	2	39.9	42.7	36.4	33.5	31.7	60.0
PAPA001	07-Apr-13	3	39.4	40.3	37.6	34.7	30.8	57.3
PAPA001	07-Apr-13	4	41.0	44.0	39.1	36.6	34.6	55.7
PAPA001	07-Apr-13	5	39.7	42.8	37.9	35.3	32.6	56.0
PAPA001	07-Apr-13	6	41.7	44.6	40.4	35.9	32.7	56.0
PAPA001	07-Apr-13	7	32.5	35.2	31.4	29.0	27.1	41.0
PAPA001	07-Apr-13	8	32.9	34.1	32.1	30.6	28.5	48.6
PAPA001	07-Apr-13	9	32.3	34.0	31.5	29.1	26.2	45.4
PAPA001	07-Apr-13	10	29.5	31.9	27.9	24.4	22.1	45.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	07-Apr-13	11	33.9	34.5	28.0	25.2	23.1	53.7
PAPA001	07-Apr-13	12	34.1	36.5	33.1	29.8	26.6	45.9
PAPA001	07-Apr-13	13	34.2	35.8	33.3	31.2	28.4	47.8
PAPA001	07-Apr-13	14	36.9	37.9	33.1	29.4	25.8	55.2
PAPA001	12-Apr-14	13	26.9	29.4	25.2	23.6	22.3	41.6
PAPA001	12-Apr-14	14	27.0	29.2	26.1	23.8	22.0	39.2
PAPA001	12-Apr-14	15	35.1	37.6	33.1	29.8	25.9	52.3
PAPA001	12-Apr-14	16	33.9	35.9	33.1	30.9	28.2	46.7
PAPA001	12-Apr-14	17	31.8	33.7	31.5	29.2	26.4	42.6
PAPA001	12-Apr-14	18	30.6	32.7	29.9	27.2	24.3	45.2
PAPA001	12-Apr-14	19	30.8	32.6	30.1	27.5	25.1	45.5
PAPA001	12-Apr-14	20	31.2	33.0	30.8	28.6	25.7	38.0
PAPA001	12-Apr-14	21	33.6	35.8	33.0	30.7	27.6	39.9
PAPA001	12-Apr-14	22	32.6	34.5	32.4	28.6	25.1	38.2
PAPA001	12-Apr-14	23	29.7	30.4	27.5	25.6	23.6	47.8
PAPA001	13-Apr-14	0	27.4	29.6	26.3	24.9	23.4	35.9
PAPA001	13-Apr-14	1	27.0	28.2	26.5	25.4	24.0	37.9
PAPA001	13-Apr-14	2	27.5	29.3	27.0	25.7	24.2	33.0
PAPA001	13-Apr-14	3	28.1	30.1	27.1	25.4	23.7	41.4
PAPA001	13-Apr-14	4	30.3	32.6	27.9	26.2	24.5	49.4
PAPA001	13-Apr-14	5	28.6	30.5	27.9	26.3	24.7	38.0
PAPA001	13-Apr-14	6	27.6	29.2	27.0	25.0	23.4	41.0
PAPA001	13-Apr-14	7	28.4	30.2	27.5	25.3	23.1	42.7
PAPA001	13-Apr-14	8	33.0	35.5	32.1	28.7	25.4	43.2
PAPA001	13-Apr-14	9	31.7	34.3	31.0	27.7	24.0	40.8
PAPA001	13-Apr-14	10	33.1	36.2	31.0	27.0	22.7	44.1
PAPA001	13-Apr-14	11	29.6	32.1	28.7	25.2	21.9	40.4
PAPA001	13-Apr-14	12	30.7	31.9	27.7	24.8	21.6	55.6
PAPA001	13-Apr-14	13	30.1	32.5	28.2	25.4	22.4	53.2
PAPA001	13-Apr-14	14	34.3	34.1	29.8	25.8	22.6	54.7
PAPA001	13-Apr-14	15	30.2	32.3	28.0	24.0	20.6	47.1
PAPA001	13-Apr-14	16	27.9	30.7	27.0	23.4	20.7	34.9
PAPA001	13-Apr-14	17	26.3	29.2	25.0	22.4	20.7	41.4
PAPA001	13-Apr-14	18	25.5	27.3	24.0	22.1	20.7	37.7
PAPA001	13-Apr-14	19	30.4	27.7	24.0	22.6	21.4	54.2
PAPA001	13-Apr-14	20	27.3	27.2	23.6	21.8	20.7	47.8
PAPA001	13-Apr-14	21	27.3	26.6	22.9	21.6	20.5	46.7
PAPA001	13-Apr-14	22	29.6	26.8	23.6	22.3	21.2	52.4
PAPA001	13-Apr-14	23	25.5	26.8	25.1	23.7	22.2	35.4
PAPA001	14-Apr-14	0	31.3	26.8	24.9	23.4	22.0	51.8
PAPA001	14-Apr-14	1	26.3	27.8	25.8	24.3	22.9	37.8
PAPA001	14-Apr-14	2	28.3	28.2	26.0	24.3	23.0	47.3
PAPA001	14-Apr-14	3	27.3	28.1	26.1	24.2	23.0	44.6
PAPA001	14-Apr-14	4	25.7	27.5	25.6	23.3	21.1	29.3
PAPA001	14-Apr-14	5	24.9	26.6	24.6	22.8	21.0	30.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	14-Apr-14	6	24.8	26.7	24.1	22.4	20.9	34.1
PAPA001	14-Apr-14	7	24.3	26.2	23.7	21.8	20.6	33.0
PAPA001	11-Apr-15	18	37.5	41.2	34.3	28.2	23.7	52.7
PAPA001	11-Apr-15	19	34.5	37.5	32.1	28.4	24.2	48.8
PAPA001	11-Apr-15	20	36.7	39.0	34.9	32.1	29.0	51.5
PAPA001	11-Apr-15	21	30.4	32.8	29.5	27.4	25.5	40.8
PAPA001	11-Apr-15	22	34.3	37.2	33.1	30.2	27.4	42.5
PAPA001	11-Apr-15	23	31.5	34.8	29.9	26.9	25.2	40.6
PAPA001	12-Apr-15	0	33.0	34.9	32.5	30.8	27.9	41.7
PAPA001	12-Apr-15	1	30.8	33.1	30.0	27.7	25.4	39.5
PAPA001	12-Apr-15	2	31.3	33.3	30.8	28.5	26.0	38.3
PAPA001	12-Apr-15	3	28.9	31.1	27.8	25.6	23.8	39.5
PAPA001	12-Apr-15	4	31.5	33.2	30.7	29.0	26.6	45.7
PAPA001	12-Apr-15	5	31.7	33.7	31.1	28.5	25.8	42.1
PAPA001	12-Apr-15	6	31.0	33.6	29.9	27.5	24.5	40.5
PAPA001	12-Apr-15	7	36.3	33.9	30.9	28.6	24.6	61.3
PAPA001	12-Apr-15	8	33.3	32.7	26.5	24.4	22.0	55.8
PAPA001	12-Apr-15	9	36.6	37.6	30.8	26.1	22.5	57.9
PAPA001	12-Apr-15	10	36.1	36.6	28.6	24.3	21.8	63.4
PAPA001	12-Apr-15	11	29.4	31.3	25.8	23.3	21.7	56.9
PAPA001	12-Apr-15	12	33.3	32.5	25.8	23.6	20.6	61.3
PAPA001	12-Apr-15	13	29.0	31.8	25.8	23.4	21.3	48.8
PAPA001	12-Apr-15	14	33.0	34.3	26.4	23.5	21.8	55.9
PAPA001	12-Apr-15	15	34.9	38.5	30.9	25.4	22.3	49.1
PAPA001	12-Apr-15	16	34.8	38.3	30.5	25.2	22.2	54.0
PAPA001	12-Apr-15	17	32.1	35.4	28.7	24.7	21.8	47.4
PAPA001	12-Apr-15	18	31.0	34.6	27.4	23.8	21.1	46.4
PAPA001	12-Apr-15	19	29.0	31.9	27.4	24.3	21.4	43.3
PAPA001	12-Apr-15	20	31.4	33.9	30.3	28.0	25.8	40.8
PAPA001	12-Apr-15	21	31.2	33.6	30.7	28.1	24.9	37.2
PAPA001	12-Apr-15	22	33.0	34.8	32.6	30.9	28.8	40.3
PAPA001	12-Apr-15	23	34.6	36.2	34.4	32.5	30.5	38.9
PAPA001	13-Apr-15	0	32.4	33.8	32.2	30.8	29.4	35.2
PAPA001	13-Apr-15	1	44.7	35.5	33.8	32.0	30.0	70.5
PAPA001	13-Apr-15	2	41.2	36.7	35.1	33.3	31.2	67.5
PAPA001	13-Apr-15	3	34.8	36.4	34.6	32.7	31.3	38.5
PAPA001	13-Apr-15	4	35.9	37.2	35.7	33.9	32.3	43.1
PAPA001	13-Apr-15	5	37.7	40.3	36.5	34.7	31.7	47.6
PAPA001	13-Apr-15	6	35.9	37.7	35.3	33.7	31.9	44.6
PAPA001	13-Apr-15	7	40.4	38.7	35.9	34.0	32.1	61.0
PAPA001	13-Apr-15	8	42.9	37.6	34.6	30.6	26.9	73.0
PAPA001	13-Apr-15	9	31.0	30.2	26.9	24.5	23.0	60.9
PAPA001	13-Apr-15	10	26.3	26.2	24.2	23.0	21.3	45.0
PAPA001	13-Apr-15	11	41.8	28.6	24.2	22.7	21.3	62.2
PAPA001	13-Apr-15	12	32.5	30.5	26.9	24.7	21.8	54.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	13-Apr-15	13	38.4	29.4	26.5	24.3	21.6	62.7
PAPA001	13-Apr-15	14	37.2	30.5	25.5	23.4	21.4	60.6
PAPA001	13-Apr-15	15	28.2	29.9	26.7	24.3	22.0	45.4
PAPA001	13-Apr-15	16	35.7	33.9	27.6	24.6	22.2	60.1
PAPA001	13-Apr-15	17	29.3	32.2	27.3	23.7	20.4	42.5
PAPA001	12-Apr-16	10	33.1	34.9	29.8	27.0	22.8	49.5
PAPA001	12-Apr-16	11	43.1	29.6	24.3	22.5	21.0	66.9
PAPA001	12-Apr-16	12	33.9	32.1	24.5	22.4	20.7	56.0
PAPA001	12-Apr-16	13	34.0	38.0	27.4	23.3	21.1	53.1
PAPA001	12-Apr-16	14	37.4	33.9	27.0	22.5	20.6	58.4
PAPA001	12-Apr-16	15	28.5	30.8	24.7	22.4	20.6	47.4
PAPA001	12-Apr-16	16	26.3	28.7	23.6	21.5	19.3	44.6
PAPA001	12-Apr-16	17	24.2	25.7	22.7	21.3	20.2	38.9
PAPA001	12-Apr-16	18	24.6	26.6	22.4	21.2	19.9	41.6
PAPA001	12-Apr-16	19	34.8	37.1	26.2	22.8	21.0	52.2
PAPA001	12-Apr-16	20	35.1	32.9	31.1	29.6	26.7	57.2
PAPA001	12-Apr-16	21	35.9	34.7	32.6	31.2	28.9	60.3
PAPA001	12-Apr-16	22	36.3	35.1	32.0	29.8	28.1	56.3
PAPA001	12-Apr-16	23	36.4	34.5	32.7	30.8	29.0	60.8
PAPA001	13-Apr-16	0	34.3	34.3	32.2	31.0	30.0	54.4
PAPA001	13-Apr-16	1	33.0	34.3	31.8	30.5	29.0	50.6
PAPA001	13-Apr-16	2	34.4	36.0	34.0	31.8	29.0	50.7
PAPA001	13-Apr-16	3	33.6	33.3	31.2	29.8	28.5	57.5
PAPA001	13-Apr-16	4	35.3	33.8	32.1	30.4	28.9	61.0
PAPA001	13-Apr-16	5	34.6	33.9	32.0	30.4	28.6	58.0
PAPA001	13-Apr-16	6	37.0	38.4	34.1	32.1	29.3	60.6
PAPA001	13-Apr-16	7	38.3	38.5	34.4	32.7	30.3	59.0
PAPA001	13-Apr-16	8	52.0	34.7	30.3	27.5	24.4	85.8
PAPA001	13-Apr-16	9	37.1	32.6	29.0	24.5	21.9	61.5
PAPA001	13-Apr-16	10	48.1	29.9	23.2	21.5	20.3	72.9
PAPA001	13-Apr-16	11	31.6	35.4	26.4	22.8	21.1	49.1
PAPA001	13-Apr-16	12	32.8	35.6	30.6	27.5	24.4	49.1
PAPA001	13-Apr-16	13	33.7	32.9	27.3	24.1	21.8	56.3
PAPA001	13-Apr-16	14	31.6	33.2	26.1	23.9	22.1	48.9
PAPA001	13-Apr-16	15	26.8	28.2	23.6	21.7	20.2	50.1
PAPA001	13-Apr-16	16	31.5	33.2	28.0	25.8	23.4	49.5
PAPA001	13-Apr-16	17	32.9	35.3	30.5	24.7	22.6	56.1
PAPA001	13-Apr-16	18	28.2	29.2	24.3	22.8	21.7	52.4
PAPA001	13-Apr-16	19	31.0	33.3	25.9	23.2	20.3	53.4
PAPA001	13-Apr-16	20	30.0	33.8	27.2	23.9	21.8	44.5
PAPA001	13-Apr-16	21	33.0	32.4	29.6	27.9	24.0	56.9
PAPA001	13-Apr-16	22	24.9	26.6	24.0	22.8	21.1	35.0
PAPA001	13-Apr-16	23	29.9	32.9	28.6	25.3	23.5	39.0
PAPA001	14-Apr-16	0	29.9	31.6	27.1	24.8	23.2	53.3
PAPA001	14-Apr-16	1	29.1	30.4	25.4	22.8	20.3	49.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	14-Apr-16	2	24.1	25.2	23.8	22.8	21.2	29.1
PAPA001	14-Apr-16	3	24.1	25.6	23.6	22.6	21.4	32.6
PAPA001	14-Apr-16	4	24.1	25.9	23.5	22.4	21.0	33.2
PAPA001	14-Apr-16	5	26.6	28.3	25.6	23.9	21.0	37.3
PAPA001	14-Apr-16	6	27.7	29.8	26.9	25.0	23.1	37.9
PAPA001	14-Apr-16	7	34.0	36.1	28.3	25.5	23.8	51.5
PAPA001	14-Apr-16	8	32.2	33.0	28.9	26.3	24.2	52.8
PAPA001	14-Apr-16	9	37.0	38.0	30.3	27.3	24.9	60.1
PAPA001	14-Apr-16	10	36.1	39.2	34.2	30.6	27.4	49.5
PAPA001	14-Apr-16	11	37.8	41.1	34.2	29.8	25.9	52.4
PAPA001	14-Apr-16	12	44.2	48.0	38.5	33.4	29.7	61.3
PAPA001	14-Apr-16	13	36.5	39.5	34.5	31.7	28.1	51.0
PAPA001	14-Apr-16	14	35.1	38.0	32.9	29.7	26.6	50.8
PAPA001	14-Apr-16	15	36.2	38.8	34.0	30.8	26.9	57.2
PAPA001	14-Apr-16	16	34.8	37.1	31.6	28.4	25.7	52.8
PAPA001	14-Apr-16	17	35.2	37.0	29.8	26.7	24.5	59.9
PAPA001	14-Apr-16	18	33.0	36.3	30.2	24.7	23.0	53.1
PAPA001	14-Apr-16	19	38.5	32.7	28.8	26.4	23.6	69.5
PAPA001	14-Apr-16	20	31.4	32.3	28.4	24.5	22.6	54.1
PAPA001	14-Apr-16	21	35.7	33.5	31.2	29.4	27.5	61.5
PAPA001	14-Apr-16	22	36.5	34.8	31.8	29.8	27.3	59.7
PAPA001	14-Apr-16	23	33.9	33.2	30.9	28.4	25.7	56.2
PAPA001	15-Apr-16	0	32.2	31.7	29.6	27.0	24.7	54.0
PAPA001	15-Apr-16	1	34.8	32.5	30.0	28.2	27.0	60.0
PAPA001	15-Apr-16	2	38.4	34.9	32.2	30.2	28.3	64.8
PAPA001	15-Apr-16	3	35.1	35.0	32.1	28.6	25.1	59.1
PAPA001	15-Apr-16	4	33.1	32.0	30.2	28.6	27.0	56.3
PAPA001	15-Apr-16	5	33.3	34.3	30.4	28.5	26.9	52.3
PAPA001	15-Apr-16	6	40.0	43.7	35.6	30.0	26.9	56.6
PAPA001	15-Apr-16	7	38.1	38.2	33.6	30.1	26.8	62.8
PAPA001	15-Apr-16	8	32.0	34.3	30.1	26.8	24.0	52.4
PAPA001	15-Apr-16	9	33.1	36.3	30.7	26.8	23.2	47.3
PAPA001	15-Apr-16	10	34.9	38.3	31.8	26.8	23.8	49.1
PAPA001	15-Apr-16	11	45.1	42.1	35.1	29.8	25.8	68.8
PAPA001	15-Apr-16	12	39.6	43.0	36.5	30.6	23.9	55.3
PAPA001	15-Apr-16	13	41.2	45.1	38.3	32.2	26.7	53.7
PAPA001	15-Apr-16	14	41.1	44.8	37.9	32.2	27.4	56.7
PAPA001	15-Apr-16	15	39.3	43.1	35.4	28.1	22.1	55.7
PAPA001	15-Apr-16	16	31.7	31.7	28.4	25.7	22.0	58.2
PAPA001	15-Apr-16	17	32.8	36.1	28.9	26.1	22.9	47.4
PAPA001	15-Apr-16	18	37.7	41.3	34.4	29.2	24.7	51.6
PAPA001	15-Apr-16	19	33.0	36.0	28.6	24.0	21.9	51.6
PAPA001	15-Apr-16	20	34.3	34.9	30.2	25.7	23.1	56.2
PAPA001	15-Apr-16	21	35.9	36.3	33.1	31.0	28.8	59.0
PAPA001	15-Apr-16	22	38.0	36.6	32.7	30.7	28.6	62.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	15-Apr-16	23	38.9	36.5	32.9	30.9	28.4	64.3
PAPA001	16-Apr-16	0	39.1	38.1	32.8	30.8	28.9	67.6
PAPA001	16-Apr-16	1	35.5	35.8	32.7	30.6	28.5	56.9
PAPA001	16-Apr-16	2	36.5	34.1	31.9	30.4	28.8	61.2
PAPA001	16-Apr-16	3	36.2	34.4	32.1	30.3	28.0	61.4
PAPA001	16-Apr-16	4	37.3	35.0	32.0	30.2	28.0	60.4
PAPA001	16-Apr-16	5	36.1	37.6	33.2	30.7	27.7	55.6
PAPA001	16-Apr-16	6	36.6	37.6	34.2	31.8	29.6	56.7
PAPA001	16-Apr-16	7	39.0	42.1	35.6	33.2	29.8	60.2
PAPA001	16-Apr-16	8	30.8	33.3	27.2	25.4	24.0	47.8
PAPA001	16-Apr-16	9	31.4	31.8	25.4	23.7	21.3	51.7
PAPA001	16-Apr-16	10	27.9	29.8	25.2	23.3	21.2	49.2
PAPA001	16-Apr-16	11	41.2	30.7	23.9	20.9	18.7	67.9
PAPA001	16-Apr-16	12	31.5	30.5	24.0	21.6	19.5	58.0
PAPA001	16-Apr-16	13	31.8	34.2	26.6	22.7	21.0	51.7
PAPA001	16-Apr-16	14	35.4	37.9	30.4	24.7	20.4	62.4
PAPA001	16-Apr-16	15	36.6	40.3	33.2	26.1	20.9	50.6
PAPA001	16-Apr-16	16	39.2	42.9	36.4	29.9	23.6	51.9
PAPA001	16-Apr-16	17	40.9	44.5	38.1	32.1	26.4	55.0
PAPA001	16-Apr-16	18	40.1	43.9	37.2	31.5	25.9	53.1
PAPA001	16-Apr-16	19	37.0	40.5	33.0	26.8	23.4	55.8
PAPA001	16-Apr-16	20	34.6	35.7	29.4	26.6	24.3	53.6
PAPA001	16-Apr-16	21	34.2	34.1	29.6	27.5	25.2	56.8
PAPA001	16-Apr-16	22	33.1	32.7	28.9	26.4	23.6	58.8
PAPA001	16-Apr-16	23	34.6	32.5	30.0	27.1	23.8	58.1
PAPA001	17-Apr-16	0	33.8	31.6	29.3	25.5	23.5	57.9
PAPA001	17-Apr-16	1	33.4	34.0	29.1	27.4	25.6	57.1
PAPA001	17-Apr-16	2	30.6	30.5	29.1	27.4	25.1	54.1
PAPA001	17-Apr-16	3	28.0	29.6	27.3	25.4	23.5	45.8
PAPA001	17-Apr-16	4	28.2	30.6	27.2	25.2	23.5	39.6
PAPA001	17-Apr-16	5	38.8	36.4	31.5	27.0	24.9	60.1
PAPA001	17-Apr-16	6	38.3	43.8	30.4	27.8	24.2	53.6
PAPA001	17-Apr-16	7	34.9	34.0	30.9	27.4	22.9	57.2
PAPA001	17-Apr-16	8	36.0	34.8	31.5	28.5	24.3	61.3
PAPA001	17-Apr-16	9	30.4	31.5	26.5	23.5	20.9	56.9
PAPA001	17-Apr-16	10	25.8	27.3	23.5	21.8	20.5	48.4
PAPA001	17-Apr-16	11	26.1	28.6	23.6	21.6	19.8	43.7
PAPA001	17-Apr-16	12	36.2	40.0	32.9	26.4	19.8	50.6
PAPA001	17-Apr-16	13	35.2	38.9	31.8	26.1	22.0	49.7
PAPA001	17-Apr-16	14	34.3	38.2	30.7	24.3	19.9	46.1
PAPA001	17-Apr-16	15	34.4	38.1	30.9	25.1	21.0	48.8
PAPA001	17-Apr-16	16	34.5	37.9	31.1	26.2	22.0	49.1
PAPA001	17-Apr-16	17	38.3	42.0	35.1	29.0	23.3	53.3
PAPA001	17-Apr-16	18	34.0	37.3	30.5	25.4	21.3	53.7
PAPA001	17-Apr-16	19	28.5	29.3	23.7	21.6	20.1	53.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA001	17-Apr-16	20	31.3	32.3	26.0	22.6	21.4	54.9
PAPA001	17-Apr-16	21	43.8	29.1	25.2	23.2	21.9	68.2
PAPA001	17-Apr-16	22	30.5	29.0	27.2	25.8	23.9	54.4
PAPA001	17-Apr-16	23	27.7	28.7	26.4	24.2	21.7	46.9
PAPA001	18-Apr-16	0	27.5	29.7	25.8	23.7	22.0	42.0
PAPA001	18-Apr-16	1	25.8	27.0	25.6	24.5	23.2	30.6
PAPA001	18-Apr-16	2	26.1	27.3	25.7	24.5	23.3	34.9
PAPA001	18-Apr-16	3	27.7	29.1	26.4	24.5	22.3	46.0
PAPA001	18-Apr-16	4	30.9	30.4	27.8	26.4	24.4	51.2
PAPA001	18-Apr-16	5	31.8	31.6	28.7	27.4	26.1	53.5
PAPA001	18-Apr-16	6	30.5	33.1	27.0	24.4	22.1	56.9
PAPA001	18-Apr-16	7	26.8	27.8	25.4	23.8	21.8	44.4
PAPA001	18-Apr-16	8	27.4	30.3	24.7	22.8	20.7	42.5
PAPA001	18-Apr-16	9	26.4	28.1	23.7	22.2	20.8	45.2
PAPA001	18-Apr-16	10	26.8	27.5	22.3	21.3	20.1	53.6
PAPA001	18-Apr-16	11	23.5	24.6	22.8	21.2	19.9	38.3
PAPA001	18-Apr-16	12	26.2	27.0	23.0	21.7	20.3	48.4
PAPA001	18-Apr-16	13	24.9	27.2	22.9	21.2	19.6	38.5
PAPA001	18-Apr-16	14	26.4	27.8	23.6	21.2	19.8	48.2
PAPA001	18-Apr-16	15	27.7	26.7	22.3	20.7	19.5	53.1
PAPA001	18-Apr-16	16	25.5	28.0	23.7	21.7	20.2	40.0
PAPA001	18-Apr-16	17	27.8	28.1	22.2	20.8	19.5	46.5
PAPA001	18-Apr-16	18	26.2	27.5	22.8	21.2	19.5	44.8
PAPA001	18-Apr-16	19	37.7	25.9	22.4	21.3	19.6	63.3
PAPA001	18-Apr-16	20	25.2	26.3	23.0	21.4	19.6	44.8
PAPA001	18-Apr-16	21	26.9	29.8	25.9	23.1	21.6	34.1
PAPA001	18-Apr-16	22	23.4	24.7	23.1	22.0	19.8	28.7
PAPA001	18-Apr-16	23	24.8	26.0	24.5	23.6	22.2	27.9
PAPA001	19-Apr-16	0	24.2	25.2	22.9	22.0	20.8	35.5
PAPA001	19-Apr-16	1	23.9	26.2	22.1	21.1	19.6	37.8
PAPA001	19-Apr-16	2	24.6	26.7	24.0	21.9	20.4	30.9
PAPA001	19-Apr-16	3	25.3	27.1	24.7	23.3	21.8	38.0
PAPA001	19-Apr-16	4	25.3	26.4	25.1	23.9	21.6	35.5
PAPA001	19-Apr-16	5	23.4	24.9	22.5	21.6	20.5	36.3
PAPA001	19-Apr-16	6	24.1	26.0	22.9	21.5	20.3	35.7
PAPA001	19-Apr-16	7	29.1	29.8	23.3	21.5	20.1	51.7
PAPA001	19-Apr-16	8	26.4	27.9	23.7	21.9	19.9	43.5
PAPA001	19-Apr-16	9	25.5	27.8	24.2	22.6	21.1	38.1
PAPA001	19-Apr-16	10	27.0	28.4	24.2	22.6	21.0	49.9
PAPA001	19-Apr-16	11	26.5	28.9	24.4	22.6	21.0	42.5
PAPA002	05-Apr-13	13	32.9	35.9	27.8	24.3	21.9	48.6
PAPA002	05-Apr-13	14	31.7	34.1	29.4	26.6	23.4	48.4
PAPA002	05-Apr-13	15	41.2	45.3	36.8	25.2	22.4	56.8
PAPA002	05-Apr-13	16	45.0	48.5	42.4	36.3	27.9	60.2
PAPA002	05-Apr-13	17	41.2	45.0	38.0	31.7	26.2	56.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	05-Apr-13	18	42.1	46.0	39.1	31.5	25.5	55.6
PAPA002	05-Apr-13	19	33.3	37.5	28.2	22.7	20.3	47.6
PAPA002	05-Apr-13	20	28.2	29.2	24.7	22.8	20.9	45.2
PAPA002	05-Apr-13	21	25.5	26.3	24.3	22.4	21.1	43.2
PAPA002	05-Apr-13	22	27.1	29.2	24.7	23.4	21.9	41.7
PAPA002	05-Apr-13	23	32.5	36.2	29.7	25.9	23.7	47.4
PAPA002	06-Apr-13	0	33.8	37.2	31.8	28.3	25.9	47.7
PAPA002	06-Apr-13	1	30.0	32.0	27.4	25.2	22.4	44.8
PAPA002	06-Apr-13	2	32.9	36.4	31.5	26.3	24.8	44.1
PAPA002	06-Apr-13	3	29.1	29.6	27.4	26.0	24.3	48.2
PAPA002	06-Apr-13	4	32.3	34.9	30.6	27.4	25.6	46.6
PAPA002	06-Apr-13	5	36.7	39.4	35.6	31.4	28.1	50.3
PAPA002	06-Apr-13	6	33.5	35.1	32.5	30.2	27.9	44.6
PAPA002	06-Apr-13	7	34.1	35.8	32.8	30.6	28.8	49.4
PAPA002	06-Apr-13	8	35.0	37.2	33.2	30.4	26.6	55.7
PAPA002	06-Apr-13	9	36.7	39.1	34.8	31.8	28.4	57.0
PAPA002	06-Apr-13	10	31.8	35.0	28.4	25.0	21.2	46.6
PAPA002	06-Apr-13	11	25.7	25.7	22.4	20.9	19.5	46.0
PAPA002	06-Apr-13	12	25.7	27.4	23.5	21.7	20.1	39.6
PAPA002	06-Apr-13	13	32.5	35.8	26.2	22.1	20.1	47.6
PAPA002	06-Apr-13	14	32.3	35.1	30.0	24.9	21.9	49.2
PAPA002	06-Apr-13	15	30.6	33.6	25.3	22.5	20.6	48.5
PAPA002	06-Apr-13	16	29.9	29.7	25.1	21.8	19.5	58.3
PAPA002	06-Apr-13	17	29.5	31.2	25.0	22.1	19.6	48.6
PAPA002	06-Apr-13	18	27.7	29.6	25.8	21.3	19.1	46.2
PAPA002	06-Apr-13	19	33.8	36.0	28.8	21.7	18.8	51.3
PAPA002	06-Apr-13	20	29.0	30.1	26.8	24.3	23.2	51.4
PAPA002	06-Apr-13	21	25.6	27.4	23.7	20.4	19.0	46.4
PAPA002	06-Apr-13	22	24.8	26.9	23.4	20.4	19.2	40.5
PAPA002	06-Apr-13	23	26.3	28.2	23.9	21.6	20.5	45.3
PAPA002	07-Apr-13	0	24.5	25.5	23.4	21.9	20.6	40.8
PAPA002	07-Apr-13	1	28.7	30.0	26.3	24.6	23.5	49.3
PAPA002	07-Apr-13	2	31.0	32.6	29.4	25.7	23.9	52.1
PAPA002	07-Apr-13	3	32.8	32.4	30.1	28.3	26.5	55.9
PAPA002	07-Apr-13	4	30.5	31.4	29.0	27.3	25.6	48.4
PAPA002	07-Apr-13	5	31.1	31.8	29.5	27.8	25.9	48.5
PAPA002	07-Apr-13	6	31.2	33.1	29.7	27.9	26.0	46.3
PAPA002	07-Apr-13	7	33.5	36.1	31.8	27.2	24.8	48.4
PAPA002	07-Apr-13	8	34.4	36.4	31.5	28.0	24.6	51.8
PAPA002	07-Apr-13	9	29.0	31.0	28.2	25.6	24.3	40.1
PAPA002	07-Apr-13	10	28.5	30.7	27.2	24.9	22.7	40.2
PAPA002	07-Apr-13	11	31.1	31.1	27.7	25.9	24.0	52.9
PAPA002	12-Apr-14	12	33.4	36.2	24.3	22.6	21.6	53.2
PAPA002	12-Apr-14	13	29.8	32.8	25.6	23.5	22.1	45.8
PAPA002	12-Apr-14	14	27.0	29.2	24.6	23.0	22.0	43.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	12-Apr-14	15	40.0	44.4	35.4	26.9	23.4	53.8
PAPA002	12-Apr-14	16	37.6	41.5	33.9	26.9	22.1	52.2
PAPA002	12-Apr-14	17	28.3	31.5	24.5	22.5	21.7	46.6
PAPA002	12-Apr-14	18	24.3	26.3	22.5	21.4	20.7	40.4
PAPA002	12-Apr-14	19	25.4	26.4	22.2	21.5	20.8	41.3
PAPA002	12-Apr-14	20	25.9	25.8	24.5	23.4	22.4	45.5
PAPA002	12-Apr-14	21	25.7	26.9	23.9	22.7	21.8	38.1
PAPA002	12-Apr-14	22	24.8	26.2	24.5	23.2	22.0	29.7
PAPA002	12-Apr-14	23	31.7	33.9	29.6	26.4	23.6	47.8
PAPA002	13-Apr-14	0	30.2	32.0	29.6	27.2	24.3	47.3
PAPA002	13-Apr-14	1	31.5	33.6	30.2	27.0	25.0	45.0
PAPA002	13-Apr-14	2	27.2	29.1	26.2	24.6	23.6	37.6
PAPA002	13-Apr-14	3	32.4	35.2	27.3	25.1	23.6	50.7
PAPA002	13-Apr-14	4	33.7	36.5	31.0	27.9	25.3	51.1
PAPA002	13-Apr-14	5	30.5	33.0	29.0	27.1	24.9	45.8
PAPA002	13-Apr-14	6	26.6	28.8	25.4	23.1	21.7	40.8
PAPA002	13-Apr-14	7	24.4	25.2	23.3	22.2	20.9	45.0
PAPA002	13-Apr-14	8	25.3	26.6	23.3	22.1	21.0	40.8
PAPA002	13-Apr-14	9	25.8	27.5	23.9	21.7	20.3	40.1
PAPA002	13-Apr-14	10	29.4	31.4	23.4	21.0	20.1	45.6
PAPA002	13-Apr-14	11	32.8	29.9	23.6	21.2	20.5	62.6
PAPA002	13-Apr-14	12	29.3	28.5	22.4	21.5	20.7	50.9
PAPA002	13-Apr-14	13	28.1	29.4	22.7	21.4	20.6	46.2
PAPA002	13-Apr-14	14	33.0	28.2	22.3	21.1	20.4	56.7
PAPA002	13-Apr-14	15	25.1	24.7	21.6	20.8	20.3	47.5
PAPA002	13-Apr-14	16	22.9	24.8	21.7	21.0	20.6	33.1
PAPA002	13-Apr-14	17	22.4	23.3	21.6	20.9	20.5	37.2
PAPA002	13-Apr-14	18	26.7	29.9	22.9	21.0	20.4	41.8
PAPA002	13-Apr-14	19	30.9	30.8	25.0	22.6	20.6	51.0
PAPA002	13-Apr-14	20	26.8	26.8	21.8	20.5	19.9	46.1
PAPA002	13-Apr-14	21	28.2	31.2	23.3	20.5	19.9	48.4
PAPA002	13-Apr-14	22	27.1	27.6	23.2	21.8	20.8	47.5
PAPA002	13-Apr-14	23	24.4	24.9	23.5	22.5	21.6	38.4
PAPA002	14-Apr-14	0	32.8	26.1	24.2	23.2	22.3	58.8
PAPA002	14-Apr-14	1	24.4	25.5	23.7	22.8	21.9	35.8
PAPA002	14-Apr-14	2	26.3	24.8	23.5	22.5	21.7	44.8
PAPA002	14-Apr-14	3	25.3	25.6	23.9	22.8	21.8	42.8
PAPA002	14-Apr-14	4	23.0	24.5	22.6	21.6	21.0	29.8
PAPA002	14-Apr-14	5	21.6	22.1	21.6	21.1	20.7	23.4
PAPA002	14-Apr-14	6	22.4	23.2	22.2	21.0	20.7	39.4
PAPA002	14-Apr-14	7	21.6	22.0	21.4	21.1	20.8	28.4
PAPA002	14-Apr-14	8	22.7	23.7	22.1	21.5	21.0	38.0
PAPA002	12-Apr-15	17	35.1	38.6	30.6	25.0	21.4	50.3
PAPA002	12-Apr-15	18	31.7	35.0	29.1	25.1	20.8	44.9
PAPA002	12-Apr-15	19	34.1	30.2	26.6	23.6	20.5	63.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	12-Apr-15	20	28.8	31.2	27.9	25.3	22.3	39.0
PAPA002	12-Apr-15	21	32.2	35.5	30.7	26.0	23.4	46.8
PAPA002	12-Apr-15	22	31.4	33.8	30.7	27.5	24.2	39.4
PAPA002	12-Apr-15	23	27.2	29.0	26.1	24.8	23.3	37.3
PAPA002	13-Apr-15	0	24.9	26.0	24.7	23.5	22.2	31.6
PAPA002	13-Apr-15	1	25.8	27.8	25.1	23.3	21.8	31.3
PAPA002	13-Apr-15	2	31.5	33.3	31.1	29.0	25.7	36.5
PAPA002	13-Apr-15	3	31.3	34.0	30.3	27.9	26.2	41.8
PAPA002	13-Apr-15	4	33.2	35.0	32.9	30.2	27.1	40.0
PAPA002	13-Apr-15	5	32.1	34.2	31.4	29.2	26.3	43.4
PAPA002	13-Apr-15	6	33.0	34.6	31.8	30.0	27.8	44.9
PAPA002	13-Apr-15	7	33.6	36.2	32.2	30.1	28.1	52.1
PAPA002	13-Apr-15	8	37.7	38.1	32.5	28.0	24.2	58.7
PAPA002	13-Apr-15	9	27.3	28.3	24.2	21.8	20.0	48.3
PAPA002	13-Apr-15	10	30.2	24.8	22.7	21.5	20.0	60.1
PAPA002	13-Apr-15	11	30.3	24.2	22.4	21.2	19.6	59.0
PAPA002	13-Apr-15	12	25.3	26.8	22.1	20.4	18.8	44.6
PAPA002	13-Apr-15	13	28.5	25.7	22.0	20.4	19.0	53.3
PAPA002	13-Apr-15	14	25.8	27.2	23.3	21.2	18.9	44.2
PAPA002	13-Apr-15	15	27.3	28.9	24.0	21.8	19.5	52.6
PAPA002	13-Apr-15	16	33.3	33.6	26.5	22.1	19.8	56.9
PAPA002	13-Apr-15	17	30.9	34.2	27.7	23.8	20.3	45.4
PAPA002	12-Apr-16	12	32.5	31.6	26.9	24.6	22.0	56.4
PAPA002	12-Apr-16	13	34.5	35.9	30.4	23.3	20.8	58.6
PAPA002	12-Apr-16	14	34.7	34.2	29.9	26.4	23.7	54.9
PAPA002	12-Apr-16	15	31.5	34.1	30.3	27.2	24.1	43.6
PAPA002	12-Apr-16	16	31.1	32.4	28.7	26.2	23.5	50.4
PAPA002	12-Apr-16	17	33.0	36.7	26.7	23.0	20.2	49.3
PAPA002	12-Apr-16	18	31.6	29.0	25.6	23.3	20.7	55.0
PAPA002	12-Apr-16	19	32.1	34.7	30.7	26.8	20.6	45.3
PAPA002	12-Apr-16	20	29.8	34.2	25.9	21.7	19.2	41.3
PAPA002	12-Apr-16	21	27.2	29.3	25.3	23.3	21.1	46.6
PAPA002	12-Apr-16	22	26.7	28.3	25.4	23.7	21.8	44.1
PAPA002	12-Apr-16	23	26.3	26.5	25.1	23.8	22.4	44.2
PAPA002	13-Apr-16	0	28.2	29.7	27.3	25.0	23.3	49.6
PAPA002	13-Apr-16	1	28.6	30.0	28.1	26.2	24.4	44.2
PAPA002	13-Apr-16	2	29.5	30.9	28.9	26.6	24.5	41.8
PAPA002	13-Apr-16	3	31.1	33.2	30.7	27.8	25.8	41.4
PAPA002	13-Apr-16	4	28.2	29.8	27.9	25.7	24.1	37.2
PAPA002	13-Apr-16	5	34.0	37.4	32.3	29.4	25.7	43.4
PAPA002	13-Apr-16	6	44.1	49.6	37.1	30.1	27.1	57.1
PAPA002	13-Apr-16	7	33.3	35.3	31.8	29.5	27.2	49.2
PAPA002	13-Apr-16	8	37.8	40.8	34.4	32.1	30.4	52.6
PAPA002	13-Apr-16	9	33.2	35.7	31.3	29.0	26.5	48.2
PAPA002	13-Apr-16	10	33.1	34.9	31.5	28.8	26.8	53.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	13-Apr-16	11	46.5	39.5	34.0	29.9	26.9	66.6
PAPA002	13-Apr-16	12	35.8	39.1	34.5	26.7	23.9	48.0
PAPA002	13-Apr-16	13	30.6	32.5	27.6	25.3	23.7	46.8
PAPA002	13-Apr-16	14	31.5	35.0	28.3	24.6	22.3	46.8
PAPA002	13-Apr-16	15	33.8	36.0	32.5	29.9	26.9	52.7
PAPA002	13-Apr-16	16	35.3	36.6	31.4	26.6	23.6	59.2
PAPA002	13-Apr-16	17	33.1	36.3	31.0	28.5	26.4	46.6
PAPA002	13-Apr-16	18	28.8	30.5	28.3	26.6	24.9	39.3
PAPA002	13-Apr-16	19	31.7	29.3	27.3	25.1	22.8	60.7
PAPA002	13-Apr-16	20	30.7	32.2	29.1	26.6	25.0	50.0
PAPA002	13-Apr-16	21	27.9	29.7	26.8	24.7	23.3	44.0
PAPA002	13-Apr-16	22	35.3	38.9	33.8	26.9	24.4	43.8
PAPA002	13-Apr-16	23	36.9	39.3	36.1	33.4	30.7	47.1
PAPA002	14-Apr-16	0	33.5	35.3	32.9	31.2	28.2	44.8
PAPA002	14-Apr-16	1	35.7	38.8	34.3	30.0	26.9	46.6
PAPA002	14-Apr-16	2	35.1	37.6	34.2	31.8	29.0	42.6
PAPA002	14-Apr-16	3	37.0	39.5	36.2	33.2	30.5	44.8
PAPA002	14-Apr-16	4	34.9	37.1	34.3	32.0	29.9	43.6
PAPA002	14-Apr-16	5	37.7	40.8	36.1	33.5	31.1	46.2
PAPA002	14-Apr-16	6	37.2	39.4	35.9	33.6	30.6	51.3
PAPA002	14-Apr-16	7	36.8	38.5	35.4	33.3	30.9	56.6
PAPA002	14-Apr-16	8	38.7	37.8	34.3	31.8	28.3	66.4
PAPA002	14-Apr-16	9	36.8	39.3	35.2	32.6	30.3	52.0
PAPA002	14-Apr-16	10	37.9	40.7	36.2	33.3	30.6	54.4
PAPA002	14-Apr-16	11	48.4	43.1	38.5	35.4	30.6	72.7
PAPA002	14-Apr-16	12	44.7	47.6	42.3	34.0	30.1	59.9
PAPA002	14-Apr-16	13	37.8	40.6	35.9	32.9	30.6	53.4
PAPA002	14-Apr-16	14	35.9	38.9	32.7	29.4	26.5	52.0
PAPA002	14-Apr-16	15	35.6	38.5	33.5	30.4	27.6	53.3
PAPA002	14-Apr-16	16	35.1	38.7	30.9	27.8	25.9	50.7
PAPA002	14-Apr-16	17	34.2	35.3	29.6	27.5	25.1	56.0
PAPA002	14-Apr-16	18	31.3	34.4	28.6	25.4	23.3	44.7
PAPA002	14-Apr-16	19	33.1	34.8	32.5	30.1	28.0	44.7
PAPA002	14-Apr-16	20	32.3	34.5	31.6	28.0	25.4	51.1
PAPA002	14-Apr-16	21	29.4	31.2	28.8	25.0	22.2	47.7
PAPA002	14-Apr-16	22	29.8	30.1	27.2	24.9	23.0	49.6
PAPA002	14-Apr-16	23	28.6	29.4	27.4	25.9	24.2	45.5
PAPA002	15-Apr-16	0	29.0	30.0	27.9	26.3	24.6	47.1
PAPA002	15-Apr-16	1	29.6	30.9	28.7	26.2	23.6	46.0
PAPA002	15-Apr-16	2	33.1	34.9	32.3	30.2	28.3	47.9
PAPA002	15-Apr-16	3	33.5	35.5	32.8	31.0	29.2	45.6
PAPA002	15-Apr-16	4	30.2	31.9	29.6	28.1	26.4	41.7
PAPA002	15-Apr-16	5	33.9	36.6	29.6	27.9	26.4	49.0
PAPA002	15-Apr-16	6	32.1	32.9	30.7	28.7	26.7	47.2
PAPA002	15-Apr-16	7	31.7	31.7	28.5	26.7	24.6	54.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	15-Apr-16	8	31.1	31.3	26.9	24.4	22.0	54.5
PAPA002	15-Apr-16	9	44.4	33.8	28.3	24.7	21.4	74.5
PAPA002	15-Apr-16	10	32.6	35.0	29.2	25.5	21.7	53.0
PAPA002	15-Apr-16	11	37.0	40.3	32.9	26.7	22.2	55.1
PAPA002	15-Apr-16	12	37.8	41.3	34.3	28.9	25.1	51.6
PAPA002	15-Apr-16	13	39.3	43.2	36.1	29.9	22.2	54.8
PAPA002	15-Apr-16	14	40.2	43.8	36.4	29.7	24.0	55.1
PAPA002	15-Apr-16	15	40.1	43.8	35.2	27.3	22.1	58.6
PAPA002	15-Apr-16	16	27.8	30.7	25.9	22.8	20.6	41.6
PAPA002	15-Apr-16	17	29.3	31.5	27.2	24.1	21.1	49.6
PAPA002	15-Apr-16	18	35.3	38.7	31.6	25.5	20.3	49.7
PAPA002	15-Apr-16	19	28.9	31.9	23.0	18.6	16.8	48.7
PAPA002	15-Apr-16	20	27.4	28.4	22.7	19.2	17.1	47.1
PAPA002	15-Apr-16	21	25.8	27.1	24.4	22.7	21.4	43.7
PAPA002	15-Apr-16	22	34.7	27.0	22.1	19.9	18.4	60.5
PAPA002	15-Apr-16	23	23.3	24.1	21.8	20.6	18.9	39.7
PAPA002	16-Apr-16	0	24.5	25.3	23.0	20.8	19.5	41.6
PAPA002	16-Apr-16	1	27.5	28.0	25.2	23.7	22.4	47.1
PAPA002	16-Apr-16	2	24.1	24.8	22.8	21.6	20.1	39.6
PAPA002	16-Apr-16	3	25.4	26.1	24.2	22.6	20.7	40.6
PAPA002	16-Apr-16	4	25.2	26.1	23.7	22.5	20.9	41.7
PAPA002	16-Apr-16	5	31.5	33.7	26.5	24.0	22.6	49.3
PAPA002	16-Apr-16	6	32.9	35.0	27.7	25.6	23.5	55.9
PAPA002	16-Apr-16	7	36.0	32.1	29.0	27.5	25.9	62.8
PAPA002	16-Apr-16	8	32.0	31.9	29.0	26.2	23.9	59.7
PAPA002	16-Apr-16	9	33.8	28.1	23.8	21.4	19.7	62.5
PAPA002	16-Apr-16	10	25.7	26.0	23.3	21.8	19.5	51.0
PAPA002	16-Apr-16	11	24.5	25.3	22.8	21.4	20.0	46.9
PAPA002	16-Apr-16	12	24.9	27.2	23.8	21.9	20.6	35.2
PAPA002	16-Apr-16	13	30.0	33.4	23.7	20.8	18.0	47.6
PAPA002	16-Apr-16	14	31.4	34.9	27.3	21.7	18.9	49.9
PAPA002	16-Apr-16	15	35.6	39.3	32.6	25.7	20.3	49.0
PAPA002	16-Apr-16	16	38.6	42.0	34.9	28.0	20.7	54.3
PAPA002	16-Apr-16	17	39.6	43.2	36.2	30.5	26.0	56.8
PAPA002	16-Apr-16	18	40.0	43.2	36.8	31.1	26.0	60.8
PAPA002	16-Apr-16	19	35.1	38.7	31.6	26.3	22.1	50.2
PAPA002	16-Apr-16	20	28.5	29.6	25.5	23.2	21.4	50.7
PAPA002	16-Apr-16	21	32.3	35.3	29.2	25.7	22.9	48.9
PAPA002	16-Apr-16	22	33.3	36.6	29.7	24.9	21.9	50.4
PAPA002	16-Apr-16	23	23.9	25.7	22.3	20.3	18.5	40.0
PAPA002	17-Apr-16	0	28.4	31.3	27.1	23.7	20.8	37.4
PAPA002	17-Apr-16	1	31.3	33.9	30.4	27.6	24.7	41.0
PAPA002	17-Apr-16	2	32.1	34.1	31.5	29.6	27.1	40.0
PAPA002	17-Apr-16	3	34.0	37.0	32.6	29.9	26.6	47.4
PAPA002	17-Apr-16	4	32.1	34.0	30.8	28.0	24.2	48.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	17-Apr-16	5	34.5	37.0	32.3	29.3	26.0	48.7
PAPA002	17-Apr-16	6	31.0	33.1	27.5	23.5	19.1	52.5
PAPA002	17-Apr-16	7	28.5	31.7	26.8	21.9	18.5	40.5
PAPA002	17-Apr-16	8	31.2	33.8	30.3	26.7	23.5	44.9
PAPA002	17-Apr-16	9	29.8	33.0	27.0	23.9	22.3	49.4
PAPA002	17-Apr-16	10	31.5	32.7	26.7	23.0	20.0	60.9
PAPA002	17-Apr-16	11	30.7	29.9	26.0	22.7	18.1	56.7
PAPA002	17-Apr-16	12	38.7	40.3	33.1	27.1	20.0	57.8
PAPA002	17-Apr-16	13	31.3	34.6	28.6	23.7	19.4	48.8
PAPA002	17-Apr-16	14	29.5	32.5	27.3	23.0	19.4	45.3
PAPA002	17-Apr-16	15	32.4	35.0	29.6	25.2	20.7	53.4
PAPA002	17-Apr-16	16	34.9	38.0	31.9	26.3	21.9	53.1
PAPA002	17-Apr-16	17	32.6	36.3	30.1	25.0	20.8	45.6
PAPA002	17-Apr-16	18	28.5	32.1	25.9	20.5	17.7	42.0
PAPA002	17-Apr-16	19	22.0	24.1	19.8	18.1	17.0	38.7
PAPA002	17-Apr-16	20	26.6	26.2	20.4	18.0	16.2	49.5
PAPA002	17-Apr-16	21	43.5	27.2	22.2	18.8	16.7	69.6
PAPA002	17-Apr-16	22	25.9	28.4	25.8	20.3	19.1	34.7
PAPA002	17-Apr-16	23	32.3	35.7	30.5	26.7	23.0	41.2
PAPA002	18-Apr-16	0	35.4	37.8	34.7	31.5	28.1	46.2
PAPA002	18-Apr-16	1	34.8	36.5	34.0	32.1	28.8	47.5
PAPA002	18-Apr-16	2	37.5	41.6	35.4	32.4	29.7	46.6
PAPA002	18-Apr-16	3	36.4	38.3	36.0	34.2	30.6	41.7
PAPA002	18-Apr-16	4	31.7	33.6	30.9	28.6	26.9	47.2
PAPA002	18-Apr-16	5	32.6	36.6	27.7	26.1	24.5	47.0
PAPA002	18-Apr-16	6	30.8	31.9	29.6	27.9	25.0	45.4
PAPA002	18-Apr-16	7	30.6	32.1	28.0	25.6	23.4	49.5
PAPA002	18-Apr-16	8	28.5	29.2	27.1	25.3	23.4	49.9
PAPA002	18-Apr-16	9	30.2	30.7	27.2	24.9	23.0	49.9
PAPA002	18-Apr-16	10	28.9	30.8	28.0	25.7	23.2	39.5
PAPA002	18-Apr-16	11	28.2	29.2	26.9	25.2	23.5	52.5
PAPA002	18-Apr-16	12	27.4	29.2	26.0	24.3	22.3	43.5
PAPA002	18-Apr-16	13	29.5	28.1	25.5	23.5	21.5	49.0
PAPA002	18-Apr-16	14	26.4	28.4	25.7	23.7	21.7	40.1
PAPA002	18-Apr-16	15	29.1	29.9	26.8	24.8	22.7	49.8
PAPA002	18-Apr-16	16	28.9	27.8	24.3	22.6	20.0	53.6
PAPA002	18-Apr-16	17	28.7	29.0	25.9	23.9	21.5	47.4
PAPA002	18-Apr-16	18	28.6	30.5	27.1	24.6	20.3	47.0
PAPA002	18-Apr-16	19	25.2	27.3	23.9	21.0	18.1	42.4
PAPA002	18-Apr-16	20	30.9	33.9	29.4	25.3	22.4	44.8
PAPA002	18-Apr-16	21	32.4	34.1	31.4	29.5	26.5	45.1
PAPA002	18-Apr-16	22	31.9	34.2	31.1	28.9	26.7	41.3
PAPA002	18-Apr-16	23	33.8	35.7	33.4	31.4	28.7	39.7
PAPA002	19-Apr-16	0	32.8	34.7	32.6	29.7	27.0	42.0
PAPA002	19-Apr-16	1	28.6	29.9	28.3	26.7	24.7	39.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA002	19-Apr-16	2	28.0	29.0	27.2	25.4	23.5	45.3
PAPA002	19-Apr-16	3	29.2	31.2	28.8	26.6	24.1	34.0
PAPA002	19-Apr-16	4	29.8	31.0	29.7	28.4	26.5	37.4
PAPA002	19-Apr-16	5	29.3	30.6	28.9	27.7	25.2	37.1
PAPA002	19-Apr-16	6	29.8	30.8	29.2	27.9	26.4	39.8
PAPA002	19-Apr-16	7	29.0	31.0	27.5	25.1	22.6	42.4
PAPA002	19-Apr-16	8	28.8	29.7	26.5	24.0	21.7	46.7
PAPA002	19-Apr-16	9	29.2	28.7	26.2	24.6	22.7	52.0
PAPA002	19-Apr-16	10	28.0	29.4	26.3	24.6	22.8	42.2
PAPA003	05-Apr-13	14	30.9	32.9	28.9	24.9	21.5	48.6
PAPA003	05-Apr-13	15	35.0	38.9	31.8	24.7	22.3	47.8
PAPA003	05-Apr-13	16	38.2	41.8	35.9	30.6	25.8	50.0
PAPA003	05-Apr-13	17	37.5	41.0	34.8	29.9	25.3	51.9
PAPA003	05-Apr-13	18	37.7	40.9	33.8	28.8	24.7	53.5
PAPA003	05-Apr-13	19	29.8	33.4	26.5	24.0	20.9	43.8
PAPA003	05-Apr-13	20	30.3	30.4	27.4	25.3	22.7	51.4
PAPA003	05-Apr-13	21	28.2	29.1	26.6	24.5	22.6	46.9
PAPA003	05-Apr-13	22	28.3	29.4	26.8	24.8	23.1	43.3
PAPA003	05-Apr-13	23	34.5	37.0	31.8	27.8	25.5	46.6
PAPA003	06-Apr-13	0	37.0	40.8	33.6	29.3	27.3	49.0
PAPA003	06-Apr-13	1	31.5	32.9	30.6	27.5	24.8	49.3
PAPA003	06-Apr-13	2	33.9	36.5	32.3	29.3	26.7	47.8
PAPA003	06-Apr-13	3	30.4	30.8	28.6	27.1	26.1	50.1
PAPA003	06-Apr-13	4	35.0	37.9	34.3	27.9	26.1	49.6
PAPA003	06-Apr-13	5	40.0	42.9	38.7	35.3	31.7	51.7
PAPA003	06-Apr-13	6	35.2	37.0	34.3	33.1	31.4	49.6
PAPA003	06-Apr-13	7	35.9	37.7	34.7	31.1	28.3	52.9
PAPA003	06-Apr-13	8	38.6	39.6	36.3	33.6	31.5	59.1
PAPA003	06-Apr-13	9	36.9	40.1	35.1	31.1	28.0	53.0
PAPA003	06-Apr-13	10	30.1	31.6	28.1	24.0	20.0	50.5
PAPA003	06-Apr-13	11	25.4	26.0	23.1	21.1	19.4	44.6
PAPA003	06-Apr-13	12	26.5	28.7	24.0	21.5	19.9	42.7
PAPA003	06-Apr-13	13	30.5	33.1	26.8	23.0	20.5	49.4
PAPA003	06-Apr-13	14	31.5	34.4	28.9	26.0	23.2	48.5
PAPA003	06-Apr-13	15	29.3	31.4	25.1	23.0	21.0	48.8
PAPA003	06-Apr-13	16	27.5	29.4	25.1	21.7	19.4	52.7
PAPA003	06-Apr-13	17	27.4	29.9	24.4	21.4	18.8	48.4
PAPA003	06-Apr-13	18	29.0	30.9	27.2	22.4	19.4	47.6
PAPA003	06-Apr-13	19	34.2	35.7	30.1	21.6	18.5	54.5
PAPA003	06-Apr-13	20	30.7	32.7	28.8	26.1	24.1	45.8
PAPA003	06-Apr-13	21	25.9	26.8	23.6	21.7	20.0	46.7
PAPA003	06-Apr-13	22	25.7	28.0	24.1	19.4	17.4	42.8
PAPA003	06-Apr-13	23	27.7	28.4	24.7	22.4	20.3	52.3
PAPA003	07-Apr-13	0	27.5	29.2	25.6	23.7	21.5	48.6
PAPA003	07-Apr-13	1	29.2	30.1	27.4	23.9	21.9	51.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	07-Apr-13	2	31.1	33.7	29.2	24.3	22.5	46.8
PAPA003	07-Apr-13	3	30.3	31.1	27.5	25.0	23.8	52.2
PAPA003	07-Apr-13	4	30.8	30.9	28.9	27.1	25.0	48.9
PAPA003	07-Apr-13	5	28.9	29.7	27.9	26.3	24.9	48.2
PAPA003	07-Apr-13	6	31.7	32.4	30.2	28.6	26.9	50.5
PAPA003	07-Apr-13	7	35.4	37.8	33.4	29.5	26.5	54.3
PAPA003	07-Apr-13	8	34.5	36.9	32.7	30.2	28.1	50.5
PAPA003	07-Apr-13	9	32.5	35.4	32.1	23.7	22.2	47.1
PAPA003	07-Apr-13	10	25.0	27.0	24.3	21.4	18.6	37.1
PAPA003	07-Apr-13	11	31.7	33.3	28.0	25.7	23.3	47.8
PAPA003	07-Apr-13	12	30.8	34.2	25.6	22.7	20.8	48.7
PAPA003	07-Apr-13	13	26.7	27.9	23.4	21.1	19.2	44.4
PAPA003	07-Apr-13	14	28.7	32.4	24.3	20.9	19.2	43.7
PAPA003	07-Apr-13	15	35.2	36.6	26.8	23.9	20.3	52.2
PAPA003	16-Apr-14	13	34.2	36.5	29.4	25.6	22.2	59.8
PAPA003	16-Apr-14	14	32.4	35.9	29.0	24.9	22.3	49.2
PAPA003	16-Apr-14	15	33.2	34.9	27.6	24.7	22.1	53.0
PAPA003	16-Apr-14	16	30.4	33.5	27.3	24.0	20.7	47.3
PAPA003	16-Apr-14	17	30.2	32.9	27.4	24.4	21.3	46.9
PAPA003	16-Apr-14	18	31.9	31.3	26.1	23.1	19.5	56.3
PAPA003	16-Apr-14	19	28.7	30.7	26.3	23.1	19.2	47.3
PAPA003	16-Apr-14	20	30.0	30.8	29.3	27.8	25.6	48.3
PAPA003	16-Apr-14	21	30.6	31.6	29.6	28.4	27.0	46.1
PAPA003	16-Apr-14	22	35.7	37.5	34.7	31.2	28.0	50.8
PAPA003	16-Apr-14	23	32.4	34.6	31.6	28.9	26.5	48.2
PAPA003	17-Apr-14	0	30.3	31.6	28.9	27.4	25.9	49.5
PAPA003	17-Apr-14	1	31.6	33.8	30.5	27.2	25.3	48.7
PAPA003	17-Apr-14	2	33.4	34.7	32.6	30.9	29.0	51.3
PAPA003	17-Apr-14	3	32.5	35.3	31.5	29.8	28.3	40.6
PAPA003	17-Apr-14	4	35.0	36.6	34.6	33.0	30.3	44.5
PAPA003	17-Apr-14	5	35.2	37.1	34.8	32.5	30.8	47.0
PAPA003	17-Apr-14	6	34.3	36.3	33.6	31.6	30.1	42.6
PAPA003	17-Apr-14	7	34.1	35.8	33.8	31.7	29.5	40.3
PAPA003	17-Apr-14	8	31.5	33.6	30.7	28.0	25.5	45.9
PAPA003	17-Apr-14	9	29.2	31.3	27.2	23.5	20.2	43.3
PAPA003	17-Apr-14	10	24.8	26.1	23.3	21.8	20.1	42.2
PAPA003	17-Apr-14	11	25.7	27.7	24.9	23.1	21.8	39.2
PAPA003	17-Apr-14	12	29.2	28.5	25.6	23.3	20.4	52.5
PAPA003	17-Apr-14	13	29.7	30.1	25.6	23.6	21.6	47.9
PAPA003	17-Apr-14	14	30.9	28.9	24.7	22.5	20.7	53.6
PAPA003	17-Apr-14	15	28.3	27.6	24.0	22.3	20.0	51.1
PAPA003	17-Apr-14	16	29.2	29.1	24.9	22.4	20.6	49.7
PAPA003	17-Apr-14	17	27.6	29.3	25.4	23.2	20.9	44.2
PAPA003	17-Apr-14	18	24.6	26.5	23.2	21.0	19.0	37.5
PAPA003	17-Apr-14	19	26.0	27.2	24.0	21.0	19.3	40.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	17-Apr-14	20	28.8	30.5	27.4	25.1	22.9	43.9
PAPA003	17-Apr-14	21	29.8	31.7	28.7	23.0	20.6	43.2
PAPA003	17-Apr-14	22	28.1	31.5	26.5	21.3	19.7	36.0
PAPA003	17-Apr-14	23	32.6	34.0	32.3	30.9	28.6	36.9
PAPA003	18-Apr-14	0	33.0	34.8	32.7	30.6	27.1	37.2
PAPA003	18-Apr-14	1	30.3	34.5	26.9	24.7	22.2	43.9
PAPA003	18-Apr-14	2	26.6	29.8	25.0	22.0	20.4	34.1
PAPA003	18-Apr-14	3	27.2	28.2	25.0	23.4	22.2	43.1
PAPA003	18-Apr-14	4	28.4	30.0	27.1	25.0	21.8	40.6
PAPA003	18-Apr-14	5	29.1	31.8	28.0	25.4	22.8	37.4
PAPA003	18-Apr-14	6	33.0	35.3	32.6	29.6	26.5	40.9
PAPA003	18-Apr-14	7	32.3	33.5	31.9	30.6	29.1	43.9
PAPA003	18-Apr-14	8	31.1	33.0	30.5	28.4	26.1	44.0
PAPA003	18-Apr-14	9	29.2	31.0	28.6	26.6	23.9	40.6
PAPA003	18-Apr-14	10	31.3	34.1	28.3	25.9	22.6	47.2
PAPA003	18-Apr-14	11	42.1	45.8	36.4	29.3	24.2	58.1
PAPA003	18-Apr-14	12	42.4	46.1	38.2	32.7	27.3	62.1
PAPA003	03-Apr-15	14	24.1	26.7	21.7	19.8	18.4	38.4
PAPA003	03-Apr-15	15	25.0	27.6	21.2	19.2	17.8	42.2
PAPA003	03-Apr-15	16	26.3	27.4	21.2	19.3	17.4	46.1
PAPA003	03-Apr-15	17	26.1	25.2	20.6	18.7	17.3	55.3
PAPA003	03-Apr-15	18	24.5	27.0	21.5	19.0	17.6	44.5
PAPA003	03-Apr-15	19	24.3	25.8	22.9	21.3	17.9	38.8
PAPA003	03-Apr-15	20	27.5	29.5	26.9	21.9	19.9	42.0
PAPA003	03-Apr-15	21	25.4	27.4	24.4	22.6	20.9	38.5
PAPA003	03-Apr-15	22	24.5	25.8	24.4	22.9	21.3	30.6
PAPA003	03-Apr-15	23	26.0	27.5	25.7	24.3	22.9	32.4
PAPA003	04-Apr-15	0	27.6	29.2	27.6	24.8	23.3	32.7
PAPA003	04-Apr-15	1	30.1	32.8	29.1	27.3	25.8	36.1
PAPA003	04-Apr-15	2	29.9	32.4	29.0	26.3	23.4	37.2
PAPA003	04-Apr-15	3	27.6	29.2	27.3	25.9	24.4	31.3
PAPA003	04-Apr-15	4	26.9	28.3	26.5	25.3	24.1	36.4
PAPA003	04-Apr-15	5	31.5	34.7	30.4	26.6	24.4	40.7
PAPA003	04-Apr-15	6	28.3	30.4	28.0	23.8	21.1	40.4
PAPA003	04-Apr-15	7	28.2	31.4	26.4	22.9	21.0	41.7
PAPA003	04-Apr-15	8	34.3	29.5	24.3	19.7	17.7	60.5
PAPA003	04-Apr-15	9	24.8	21.5	18.6	17.6	16.8	44.7
PAPA003	04-Apr-15	10	32.0	24.2	19.9	18.3	17.0	56.3
PAPA003	04-Apr-15	11	25.5	22.7	20.3	18.9	17.7	50.9
PAPA003	04-Apr-15	12	26.8	25.4	21.5	19.9	18.4	47.1
PAPA003	04-Apr-15	13	28.7	27.0	21.0	19.6	18.4	53.1
PAPA003	04-Apr-15	14	29.0	32.6	24.6	20.7	18.9	47.6
PAPA003	04-Apr-15	15	39.7	43.6	34.6	27.0	22.5	55.3
PAPA003	04-Apr-15	16	44.4	48.1	40.5	32.7	26.8	59.5
PAPA003	04-Apr-15	17	44.5	48.1	41.2	34.9	28.2	61.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	04-Apr-15	18	42.3	46.1	38.7	32.8	26.5	55.4
PAPA003	04-Apr-15	19	36.9	40.2	32.6	29.6	25.9	52.9
PAPA003	04-Apr-15	20	31.8	34.9	30.7	26.9	24.8	38.8
PAPA003	04-Apr-15	21	35.7	38.3	34.7	30.9	27.9	45.0
PAPA003	04-Apr-15	22	35.0	37.0	34.5	32.0	29.3	42.4
PAPA003	04-Apr-15	23	35.0	37.5	34.1	31.0	29.2	42.1
PAPA003	05-Apr-15	0	34.7	37.8	33.2	30.2	28.0	41.2
PAPA003	05-Apr-15	1	33.3	38.1	30.7	26.4	23.2	42.2
PAPA003	05-Apr-15	2	30.8	33.9	29.3	27.5	25.1	38.3
PAPA003	05-Apr-15	3	33.7	36.3	32.9	30.2	27.1	40.9
PAPA003	05-Apr-15	4	30.5	33.5	29.1	27.2	25.2	39.9
PAPA003	05-Apr-15	5	31.5	33.7	31.1	28.5	25.4	38.1
PAPA003	05-Apr-15	6	32.5	34.3	32.0	30.4	28.1	46.2
PAPA003	05-Apr-15	7	34.0	36.9	32.7	30.6	28.0	41.1
PAPA003	05-Apr-15	8	30.8	32.2	29.6	27.6	23.9	52.6
PAPA003	05-Apr-15	9	31.2	28.2	25.3	23.6	21.1	53.5
PAPA003	05-Apr-15	10	29.2	31.6	27.3	24.6	21.7	44.4
PAPA003	05-Apr-15	11	30.5	33.0	28.8	25.7	21.3	44.1
PAPA003	05-Apr-15	12	33.9	36.4	30.6	27.1	22.6	52.8
PAPA003	05-Apr-15	13	40.3	44.0	36.4	30.9	26.7	54.6
PAPA003	05-Apr-15	14	39.6	43.2	35.2	29.3	23.3	57.6
PAPA003	05-Apr-15	15	42.7	46.4	38.5	31.4	25.3	57.8
PAPA003	05-Apr-15	16	44.0	47.9	39.5	32.7	26.2	60.9
PAPA003	05-Apr-15	17	42.8	46.4	38.8	32.8	26.9	59.6
PAPA003	05-Apr-15	18	35.3	38.3	31.9	27.2	24.1	53.7
PAPA003	05-Apr-15	19	29.6	32.7	28.1	24.1	22.1	45.7
PAPA003	05-Apr-15	20	25.1	26.4	25.0	23.3	21.6	29.2
PAPA003	05-Apr-15	21	26.4	28.1	26.0	24.7	23.2	32.4
PAPA003	05-Apr-15	22	30.0	33.0	28.6	24.8	21.0	38.0
PAPA003	05-Apr-15	23	30.9	34.9	28.2	22.0	19.7	38.9
PAPA003	06-Apr-15	0	33.3	36.7	31.7	26.6	23.5	41.7
PAPA003	06-Apr-15	1	31.2	35.1	29.1	24.9	22.0	38.7
PAPA003	06-Apr-15	2	40.7	43.9	39.1	35.3	32.4	54.5
PAPA003	06-Apr-15	3	40.0	42.7	39.0	36.0	29.8	51.0
PAPA003	06-Apr-15	4	35.9	38.1	34.9	32.8	30.2	45.3
PAPA003	06-Apr-15	5	37.3	40.0	36.3	33.1	30.2	45.8
PAPA003	06-Apr-15	6	32.4	34.6	31.6	29.6	27.5	39.5
PAPA003	06-Apr-15	7	37.8	40.5	36.9	32.2	28.8	47.9
PAPA003	06-Apr-15	8	37.8	40.7	36.8	31.9	28.6	47.0
PAPA003	06-Apr-15	9	31.7	33.9	29.8	27.6	25.6	53.3
PAPA003	06-Apr-15	10	33.9	31.2	27.6	25.9	23.9	60.7
PAPA003	06-Apr-15	11	36.7	39.9	33.1	28.6	25.4	52.7
PAPA003	06-Apr-15	12	43.3	47.2	39.1	32.5	27.3	60.2
PAPA003	06-Apr-15	13	42.7	46.4	38.4	32.3	26.6	59.5
PAPA003	06-Apr-15	14	46.0	50.1	41.3	34.5	27.9	62.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	06-Apr-15	15	44.0	47.7	40.2	34.4	28.7	60.4
PAPA003	06-Apr-15	16	42.0	45.8	38.0	32.0	26.8	56.5
PAPA003	06-Apr-15	17	46.0	50.0	42.4	35.3	29.5	59.5
PAPA003	06-Apr-15	18	42.7	46.4	38.2	31.9	26.5	59.1
PAPA003	06-Apr-15	19	37.9	41.3	34.3	29.1	24.5	53.6
PAPA003	06-Apr-15	20	37.0	40.6	33.8	29.7	26.3	50.5
PAPA003	06-Apr-15	21	30.9	32.5	30.3	28.7	26.2	44.6
PAPA003	06-Apr-15	22	29.4	31.0	29.1	27.2	25.4	37.7
PAPA003	06-Apr-15	23	28.4	29.8	28.0	26.7	25.0	36.4
PAPA003	07-Apr-15	0	29.8	31.6	29.5	27.1	25.5	38.2
PAPA003	07-Apr-15	1	33.2	34.9	32.5	30.8	27.5	42.5
PAPA003	07-Apr-15	2	31.9	33.8	31.7	29.0	27.1	37.3
PAPA003	07-Apr-15	3	33.5	35.1	33.1	31.6	29.7	37.7
PAPA003	07-Apr-15	4	32.7	34.3	32.4	30.3	28.1	38.2
PAPA003	07-Apr-15	5	32.7	34.3	32.4	30.5	28.9	39.4
PAPA003	07-Apr-15	6	31.9	33.6	31.5	29.3	27.3	48.7
PAPA003	07-Apr-15	7	33.3	35.0	32.8	30.8	28.5	45.4
PAPA003	07-Apr-15	8	32.1	32.9	30.8	26.8	23.9	51.8
PAPA003	07-Apr-15	9	28.3	28.2	24.3	19.9	18.5	51.8
PAPA003	07-Apr-15	10	32.9	33.6	29.4	22.5	19.0	61.1
PAPA003	07-Apr-15	11	29.8	31.9	29.2	26.1	23.9	39.2
PAPA003	07-Apr-15	12	30.1	32.3	29.2	27.2	24.3	40.3
PAPA003	07-Apr-15	13	34.1	28.9	26.3	24.7	23.2	68.6
PAPA003	07-Apr-15	14	29.3	31.4	28.3	26.3	24.3	45.7
PAPA003	07-Apr-15	15	27.0	29.1	26.3	24.3	22.0	36.0
PAPA003	07-Apr-15	16	29.6	30.7	26.2	23.0	21.0	51.8
PAPA003	07-Apr-15	17	42.9	45.5	32.2	28.8	25.9	62.7
PAPA003	07-Apr-15	18	27.5	29.9	26.4	24.0	21.8	38.6
PAPA003	07-Apr-15	19	27.0	29.2	24.7	22.8	21.3	42.9
PAPA003	07-Apr-15	20	27.9	30.3	27.0	24.1	21.6	39.1
PAPA003	07-Apr-15	21	24.2	24.2	22.8	21.1	19.8	41.3
PAPA003	07-Apr-15	22	29.5	34.2	24.9	20.3	18.8	39.3
PAPA003	07-Apr-15	23	34.7	38.5	32.9	25.0	21.3	43.6
PAPA003	08-Apr-15	0	26.4	29.9	24.1	20.3	18.2	41.0
PAPA003	08-Apr-15	1	27.1	29.5	24.5	21.9	19.0	39.8
PAPA003	08-Apr-15	2	30.9	33.0	30.0	27.8	25.5	42.5
PAPA003	08-Apr-15	3	32.4	35.9	30.2	23.7	21.6	44.5
PAPA003	08-Apr-15	4	29.6	32.5	28.5	25.5	22.6	37.7
PAPA003	08-Apr-15	5	24.2	26.3	23.5	21.6	18.9	34.6
PAPA003	08-Apr-15	6	27.3	29.8	26.2	23.1	19.6	38.1
PAPA003	08-Apr-15	7	25.7	28.2	24.4	22.7	20.0	35.6
PAPA003	08-Apr-15	8	27.2	29.5	26.2	24.2	22.8	39.0
PAPA003	08-Apr-15	9	29.2	32.0	27.1	24.7	22.0	46.5
PAPA003	08-Apr-15	10	31.3	34.1	29.3	26.2	23.2	45.5
PAPA003	08-Apr-15	11	27.1	29.2	26.2	24.7	23.2	36.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	08-Apr-15	12	31.2	33.6	29.8	27.4	24.4	42.0
PAPA003	08-Apr-15	13	31.8	33.6	30.2	27.5	24.5	49.8
PAPA003	08-Apr-15	14	32.4	33.4	30.3	26.9	24.8	47.2
PAPA003	08-Apr-15	15	32.1	33.9	31.7	29.4	27.0	39.2
PAPA003	08-Apr-15	16	34.4	36.3	33.3	31.0	28.9	57.1
PAPA003	08-Apr-15	17	34.0	36.1	33.4	31.1	28.7	42.3
PAPA003	08-Apr-15	18	31.8	33.4	29.2	24.8	21.0	49.9
PAPA003	08-Apr-15	19	32.3	34.5	31.5	28.8	26.9	42.1
PAPA003	08-Apr-15	20	30.5	32.7	29.6	27.2	24.2	42.2
PAPA003	08-Apr-15	21	30.2	33.1	29.1	26.3	22.8	38.9
PAPA003	08-Apr-15	22	29.6	31.8	29.5	25.8	23.4	34.4
PAPA003	08-Apr-15	23	30.7	32.7	29.6	27.5	25.9	46.7
PAPA003	09-Apr-15	0	31.2	32.1	30.4	28.4	25.2	45.1
PAPA003	09-Apr-15	1	42.2	47.4	38.3	30.1	27.5	53.8
PAPA003	09-Apr-15	2	36.1	38.7	35.3	31.2	28.6	45.2
PAPA003	09-Apr-15	3	41.0	44.4	39.5	34.6	32.0	48.5
PAPA003	09-Apr-15	4	36.9	41.2	27.4	22.3	19.0	48.5
PAPA003	09-Apr-15	5	37.6	40.7	36.9	25.5	21.6	44.5
PAPA003	09-Apr-15	6	35.6	37.9	34.9	31.8	29.3	43.3
PAPA003	09-Apr-15	7	33.5	36.1	32.9	29.4	27.9	39.6
PAPA003	09-Apr-15	8	28.7	30.9	27.7	26.1	24.0	39.2
PAPA003	09-Apr-15	9	31.4	29.9	26.3	24.1	22.1	53.6
PAPA003	09-Apr-15	10	28.5	30.2	27.2	25.2	23.4	49.1
PAPA003	09-Apr-15	11	26.2	27.2	25.3	23.7	21.6	46.0
PAPA003	09-Apr-15	12	25.0	26.7	23.9	22.3	21.1	38.2
PAPA003	09-Apr-15	13	30.5	26.2	23.8	22.7	21.6	62.5
PAPA003	09-Apr-15	14	31.0	29.0	26.0	23.0	20.6	54.0
PAPA003	09-Apr-15	15	27.7	29.5	26.4	24.6	22.7	40.6
PAPA003	09-Apr-15	16	28.7	31.4	28.0	23.6	21.9	39.2
PAPA003	09-Apr-15	17	28.2	30.0	25.8	23.2	21.6	43.0
PAPA003	09-Apr-15	18	28.9	30.8	27.3	25.1	23.3	43.9
PAPA003	09-Apr-15	19	26.6	27.7	23.8	20.0	18.1	44.2
PAPA003	09-Apr-15	20	25.8	27.3	24.6	21.8	19.4	38.3
PAPA003	09-Apr-15	21	22.7	24.4	22.2	20.4	18.8	29.9
PAPA003	09-Apr-15	22	31.4	36.0	29.6	23.5	20.6	41.4
PAPA003	09-Apr-15	23	37.2	39.0	36.8	34.4	32.2	43.8
PAPA003	10-Apr-15	0	34.6	37.4	33.0	30.3	27.6	42.9
PAPA003	10-Apr-15	1	31.6	34.2	31.2	27.1	25.4	37.1
PAPA003	10-Apr-15	2	35.6	40.6	31.1	26.3	24.3	45.7
PAPA003	10-Apr-15	3	37.7	41.2	35.2	29.6	26.7	47.7
PAPA003	10-Apr-15	4	43.2	47.0	41.2	38.1	34.7	50.2
PAPA003	10-Apr-15	5	37.8	40.5	37.1	34.0	31.9	46.5
PAPA003	10-Apr-15	6	35.9	37.0	34.4	32.3	31.0	63.5
PAPA003	10-Apr-15	7	36.9	38.6	36.5	34.4	31.2	45.4
PAPA003	10-Apr-15	8	34.4	37.4	32.6	30.2	27.9	48.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	10-Apr-15	9	31.9	33.4	31.3	29.9	28.2	40.1
PAPA003	10-Apr-15	10	29.2	31.6	28.5	24.9	23.1	38.2
PAPA003	10-Apr-15	11	27.6	29.5	26.2	24.0	22.3	50.8
PAPA003	10-Apr-15	12	30.3	31.7	28.8	26.6	24.6	46.3
PAPA003	10-Apr-15	13	28.0	30.0	27.1	25.4	23.4	39.8
PAPA003	10-Apr-15	14	32.4	31.7	28.6	26.4	23.1	53.3
PAPA003	10-Apr-15	15	27.4	28.4	26.0	23.9	22.2	52.2
PAPA003	10-Apr-15	16	30.0	32.4	29.3	25.7	22.7	43.3
PAPA003	10-Apr-15	17	28.0	29.9	27.3	25.5	23.5	37.6
PAPA003	10-Apr-15	18	25.0	26.7	24.6	22.9	20.7	33.2
PAPA003	10-Apr-15	19	25.3	27.5	22.2	19.1	17.6	40.7
PAPA003	10-Apr-15	20	28.8	31.9	26.9	23.8	21.6	41.8
PAPA003	10-Apr-15	21	27.2	29.5	26.5	24.5	23.1	33.1
PAPA003	10-Apr-15	22	28.5	31.2	27.5	25.5	24.0	35.6
PAPA003	10-Apr-15	23	35.9	38.8	34.8	29.2	25.9	43.7
PAPA003	11-Apr-15	0	38.9	41.6	38.2	34.9	32.9	45.0
PAPA003	11-Apr-15	1	39.7	42.0	39.1	36.7	34.7	44.6
PAPA003	11-Apr-15	2	35.9	39.1	34.6	31.0	27.5	45.8
PAPA003	11-Apr-15	3	37.4	40.5	36.5	30.5	27.6	46.6
PAPA003	11-Apr-15	4	38.9	42.0	37.5	33.2	27.9	47.4
PAPA003	11-Apr-15	5	36.8	39.2	36.0	33.4	32.2	52.9
PAPA003	11-Apr-15	6	39.8	41.8	39.8	35.9	33.2	44.2
PAPA003	11-Apr-15	7	40.1	43.4	37.8	35.8	33.6	47.3
PAPA003	11-Apr-15	8	36.8	39.6	35.3	31.2	27.5	55.5
PAPA003	11-Apr-15	9	29.6	30.8	28.2	26.1	24.1	49.0
PAPA003	11-Apr-15	10	27.3	29.0	26.8	25.0	23.4	43.4
PAPA003	11-Apr-15	11	27.5	29.2	26.4	24.5	22.6	50.9
PAPA003	11-Apr-15	12	37.4	37.8	30.7	26.3	23.3	62.3
PAPA003	11-Apr-15	13	39.9	43.5	35.9	30.0	24.7	56.9
PAPA003	11-Apr-15	14	42.6	46.6	38.4	31.6	25.9	56.2
PAPA003	12-Apr-16	11	23.8	25.2	22.5	20.7	19.0	42.2
PAPA003	12-Apr-16	12	31.2	32.9	22.1	19.9	18.2	51.7
PAPA003	12-Apr-16	13	32.2	31.7	23.7	19.9	18.6	54.9
PAPA003	12-Apr-16	14	35.8	32.1	24.5	20.4	19.0	59.9
PAPA003	12-Apr-16	15	26.6	29.6	23.1	20.7	19.0	40.7
PAPA003	12-Apr-16	16	25.1	28.0	21.8	19.8	18.5	41.3
PAPA003	12-Apr-16	17	21.3	22.8	19.9	18.3	17.4	34.6
PAPA003	12-Apr-16	18	21.0	21.2	18.9	17.8	16.4	38.6
PAPA003	12-Apr-16	19	26.1	25.6	20.2	18.0	16.6	44.5
PAPA003	12-Apr-16	20	27.1	27.5	24.4	22.6	20.4	45.3
PAPA003	12-Apr-16	21	29.1	30.0	26.4	24.8	22.2	49.2
PAPA003	12-Apr-16	22	29.1	29.2	26.8	24.8	22.8	51.2
PAPA003	12-Apr-16	23	27.9	28.6	25.9	23.4	21.9	46.5
PAPA003	13-Apr-16	0	29.8	29.2	27.6	26.4	24.9	49.7
PAPA003	13-Apr-16	1	30.3	30.1	28.6	27.1	25.2	49.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	13-Apr-16	2	30.9	31.2	29.6	28.1	26.4	47.1
PAPA003	13-Apr-16	3	30.3	31.2	29.6	28.2	26.0	44.6
PAPA003	13-Apr-16	4	30.4	31.0	29.5	28.0	26.9	45.8
PAPA003	13-Apr-16	5	31.3	31.9	30.6	29.0	26.9	46.9
PAPA003	13-Apr-16	6	34.9	37.7	33.3	30.2	28.1	47.3
PAPA003	13-Apr-16	7	32.7	34.4	31.3	29.1	27.4	49.6
PAPA003	13-Apr-16	8	36.2	35.5	32.2	30.2	27.7	65.9
PAPA003	13-Apr-16	9	50.9	34.7	30.1	24.8	23.3	71.3
PAPA003	13-Apr-16	10	28.5	25.0	22.5	21.1	19.7	62.2
PAPA003	13-Apr-16	11	30.6	34.3	22.2	20.6	19.4	49.1
PAPA003	13-Apr-16	12	34.9	39.0	29.9	25.3	22.5	47.7
PAPA003	13-Apr-16	13	27.5	29.5	23.9	22.0	20.0	43.0
PAPA003	13-Apr-16	14	29.1	26.9	23.0	21.7	20.5	56.0
PAPA003	13-Apr-16	15	26.9	25.7	21.8	19.7	17.8	56.3
PAPA003	13-Apr-16	16	32.5	32.5	28.3	25.6	22.8	52.9
PAPA003	13-Apr-16	17	31.5	33.7	30.1	26.2	23.6	48.4
PAPA003	13-Apr-16	18	27.0	29.8	26.0	21.0	19.5	37.8
PAPA003	13-Apr-16	19	26.7	28.8	25.5	22.6	19.3	41.2
PAPA003	13-Apr-16	20	27.4	28.9	25.6	22.8	19.8	42.2
PAPA003	13-Apr-16	21	28.0	28.9	25.4	23.4	20.9	47.3
PAPA003	13-Apr-16	22	25.7	26.7	24.2	21.1	19.3	45.7
PAPA003	13-Apr-16	23	29.7	32.8	28.6	23.1	20.5	43.0
PAPA003	14-Apr-16	0	31.6	33.5	30.5	27.4	22.9	50.3
PAPA003	14-Apr-16	1	32.1	35.2	30.0	24.6	20.9	46.3
PAPA003	14-Apr-16	2	27.0	29.1	26.5	24.4	22.1	34.9
PAPA003	14-Apr-16	3	29.4	32.0	28.4	26.3	23.9	39.8
PAPA003	14-Apr-16	4	27.2	29.1	26.6	24.9	22.6	34.6
PAPA003	14-Apr-16	5	29.9	32.8	28.8	26.3	22.6	39.0
PAPA003	14-Apr-16	6	30.4	32.3	29.9	27.7	25.6	43.7
PAPA003	14-Apr-16	7	32.8	35.2	31.6	29.4	26.6	46.0
PAPA003	14-Apr-16	8	34.5	34.5	30.0	27.1	23.9	51.6
PAPA003	14-Apr-16	9	31.3	33.9	29.6	27.4	24.8	48.9
PAPA003	14-Apr-16	10	35.9	39.1	33.6	30.0	26.5	50.3
PAPA003	14-Apr-16	11	39.9	42.8	34.1	29.7	26.6	61.0
PAPA003	14-Apr-16	12	44.8	48.7	39.1	32.4	28.1	61.4
PAPA003	14-Apr-16	13	34.2	36.5	32.4	29.9	26.4	51.3
PAPA003	14-Apr-16	14	32.5	35.6	30.7	27.4	24.5	45.4
PAPA003	14-Apr-16	15	33.9	36.9	32.2	28.8	26.2	47.0
PAPA003	14-Apr-16	16	32.2	35.5	29.0	25.7	23.7	50.2
PAPA003	14-Apr-16	17	32.1	32.4	26.8	24.2	21.7	57.6
PAPA003	14-Apr-16	18	29.3	32.6	26.5	22.3	20.4	45.7
PAPA003	14-Apr-16	19	30.1	31.1	28.5	26.7	23.4	47.3
PAPA003	14-Apr-16	20	29.5	29.5	26.1	23.8	22.1	51.2
PAPA003	14-Apr-16	21	28.6	30.1	25.8	23.9	22.3	48.2
PAPA003	14-Apr-16	22	31.6	30.7	28.1	25.8	23.4	51.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	14-Apr-16	23	29.8	30.3	27.4	24.4	21.4	50.2
PAPA003	15-Apr-16	0	26.6	28.4	25.8	23.1	20.9	39.1
PAPA003	15-Apr-16	1	25.6	27.3	24.0	21.7	20.7	42.1
PAPA003	15-Apr-16	2	27.9	28.0	26.2	24.5	22.6	45.1
PAPA003	15-Apr-16	3	28.5	28.8	26.4	24.4	22.3	47.5
PAPA003	15-Apr-16	4	26.8	28.3	26.2	23.8	22.0	41.2
PAPA003	15-Apr-16	5	30.4	31.7	28.0	22.4	19.8	49.3
PAPA003	15-Apr-16	6	27.8	28.7	26.3	24.7	23.1	44.8
PAPA003	15-Apr-16	7	28.6	29.7	27.6	24.9	21.6	44.8
PAPA003	15-Apr-16	8	27.0	29.2	25.2	22.2	19.7	43.9
PAPA003	15-Apr-16	9	28.8	32.0	26.7	23.2	20.0	43.3
PAPA003	15-Apr-16	10	31.1	34.4	27.3	22.9	20.2	47.5
PAPA003	15-Apr-16	11	35.1	38.9	31.7	25.6	19.9	51.2
PAPA003	15-Apr-16	12	37.7	41.3	34.2	28.0	21.3	53.1
PAPA003	15-Apr-16	13	38.2	41.9	34.8	28.6	23.5	54.3
PAPA003	15-Apr-16	14	38.9	42.4	35.6	29.4	23.1	53.9
PAPA003	15-Apr-16	15	38.7	42.2	33.8	25.9	18.4	56.7
PAPA003	15-Apr-16	16	27.4	29.7	25.0	21.1	18.9	45.3
PAPA003	15-Apr-16	17	26.6	29.1	23.6	21.1	19.0	44.3
PAPA003	15-Apr-16	18	34.6	37.4	30.0	24.2	18.9	56.1
PAPA003	15-Apr-16	19	28.6	32.2	22.2	17.6	15.7	49.0
PAPA003	15-Apr-16	20	25.7	27.5	23.7	19.9	17.0	43.1
PAPA003	15-Apr-16	21	27.9	28.8	26.0	24.1	22.1	48.6
PAPA003	15-Apr-16	22	34.3	28.3	24.1	22.1	20.0	58.5
PAPA003	15-Apr-16	23	27.2	27.0	24.9	22.7	20.5	46.5
PAPA003	16-Apr-16	0	26.9	27.6	23.7	21.9	20.5	49.0
PAPA003	16-Apr-16	1	31.0	30.7	27.3	25.5	23.3	53.3
PAPA003	16-Apr-16	2	27.1	26.8	25.0	23.6	22.0	46.7
PAPA003	16-Apr-16	3	27.3	27.3	25.4	24.0	22.5	46.4
PAPA003	16-Apr-16	4	29.0	27.6	25.2	23.8	22.1	56.5
PAPA003	16-Apr-16	5	31.5	31.8	28.1	25.1	22.8	54.4
PAPA003	16-Apr-16	6	31.5	30.2	28.1	26.5	24.5	52.8
PAPA003	16-Apr-16	7	36.7	33.0	30.3	27.1	25.4	59.5
PAPA003	16-Apr-16	8	44.4	32.7	26.9	22.3	20.7	73.8
PAPA003	16-Apr-16	9	27.0	25.5	21.2	18.4	17.2	53.6
PAPA003	16-Apr-16	10	26.4	24.6	19.4	18.3	17.6	49.2
PAPA003	16-Apr-16	11	22.2	23.0	18.6	17.5	16.8	46.1
PAPA003	16-Apr-16	12	21.2	22.5	19.1	18.1	17.2	40.2
PAPA003	16-Apr-16	13	29.7	32.1	22.3	18.3	17.0	48.1
PAPA003	16-Apr-16	14	33.5	37.2	26.5	20.1	18.0	49.6
PAPA003	16-Apr-16	15	38.2	41.9	32.3	24.6	18.8	54.2
PAPA003	16-Apr-16	16	40.3	44.0	35.6	27.9	21.4	56.5
PAPA003	16-Apr-16	17	41.2	45.3	37.0	28.9	23.9	55.3
PAPA003	16-Apr-16	18	41.0	45.0	36.7	29.4	23.4	56.5
PAPA003	16-Apr-16	19	35.9	39.3	30.6	24.3	20.5	55.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	16-Apr-16	20	30.1	30.3	26.0	23.9	21.4	56.8
PAPA003	16-Apr-16	21	28.1	29.9	24.7	22.5	19.1	47.0
PAPA003	16-Apr-16	22	26.9	29.6	23.9	19.9	17.0	43.6
PAPA003	16-Apr-16	23	25.2	27.5	21.5	18.5	17.0	43.2
PAPA003	17-Apr-16	0	21.3	22.9	19.9	18.3	16.9	36.1
PAPA003	17-Apr-16	1	22.4	24.8	20.7	18.3	17.1	40.0
PAPA003	17-Apr-16	2	25.9	26.1	24.2	21.9	19.6	46.4
PAPA003	17-Apr-16	3	29.4	30.0	27.8	26.4	23.6	47.4
PAPA003	17-Apr-16	4	29.0	29.4	26.8	24.1	22.4	52.0
PAPA003	17-Apr-16	5	28.3	29.0	26.2	23.8	19.8	49.1
PAPA003	17-Apr-16	6	27.7	28.6	25.7	20.8	18.2	51.3
PAPA003	17-Apr-16	7	24.0	25.9	22.1	19.6	17.8	42.2
PAPA003	17-Apr-16	8	26.7	27.4	23.6	21.7	19.8	49.6
PAPA003	17-Apr-16	9	22.4	24.4	21.6	19.8	18.0	31.8
PAPA003	17-Apr-16	10	22.1	24.3	21.2	18.7	17.6	32.6
PAPA003	17-Apr-16	11	24.1	26.6	19.3	17.9	16.4	48.3
PAPA003	17-Apr-16	12	33.2	37.0	28.5	21.8	17.0	48.7
PAPA003	17-Apr-16	13	33.8	37.3	29.5	23.2	18.9	49.3
PAPA003	17-Apr-16	14	32.7	36.0	26.6	20.0	17.0	49.1
PAPA003	17-Apr-16	15	32.3	36.0	28.2	22.7	18.6	47.6
PAPA003	17-Apr-16	16	35.5	38.9	30.5	24.0	19.5	51.6
PAPA003	17-Apr-16	17	37.1	40.8	32.4	26.3	20.5	53.2
PAPA003	17-Apr-16	18	32.1	35.7	27.2	21.2	17.9	49.6
PAPA003	17-Apr-16	19	22.5	25.1	19.0	16.6	15.5	39.3
PAPA003	17-Apr-16	20	22.9	23.7	19.1	16.9	15.7	38.6
PAPA003	17-Apr-16	21	41.2	24.7	18.7	16.2	15.4	65.1
PAPA003	17-Apr-16	22	19.2	20.6	18.1	15.6	15.1	39.2
PAPA003	17-Apr-16	23	23.6	24.5	21.2	19.0	17.3	43.7
PAPA003	18-Apr-16	0	31.9	31.6	28.5	26.6	22.7	52.9
PAPA003	18-Apr-16	1	30.0	30.1	28.1	26.7	25.0	52.7
PAPA003	18-Apr-16	2	28.8	29.6	27.4	25.7	24.4	46.7
PAPA003	18-Apr-16	3	29.3	30.4	28.1	26.6	24.8	46.8
PAPA003	18-Apr-16	4	28.2	29.2	27.0	25.5	23.2	47.9
PAPA003	18-Apr-16	5	27.9	28.0	25.8	23.4	21.3	47.7
PAPA003	18-Apr-16	6	28.2	27.3	25.0	21.5	18.8	49.8
PAPA003	18-Apr-16	7	28.7	25.2	22.9	20.2	18.4	54.7
PAPA003	18-Apr-16	8	22.5	23.9	20.8	18.6	17.2	41.5
PAPA003	18-Apr-16	9	24.1	24.7	20.7	19.4	18.5	52.5
PAPA003	18-Apr-16	10	26.3	25.6	20.7	19.5	18.3	57.9
PAPA003	18-Apr-16	11	25.9	20.8	19.3	18.0	17.0	56.9
PAPA003	18-Apr-16	12	20.7	22.4	19.3	18.4	17.2	38.1
PAPA003	18-Apr-16	13	22.2	22.1	19.0	18.1	17.3	46.8
PAPA003	18-Apr-16	14	20.9	23.2	19.6	17.8	17.1	34.9
PAPA003	18-Apr-16	15	25.5	24.4	19.5	18.5	17.5	50.2
PAPA003	18-Apr-16	16	23.0	25.0	19.3	18.1	17.3	39.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA003	18-Apr-16	17	28.2	27.8	20.1	18.7	17.6	48.2
PAPA003	18-Apr-16	18	24.0	26.7	19.7	17.8	16.5	41.1
PAPA003	18-Apr-16	19	21.5	21.8	19.3	17.8	16.7	36.3
PAPA003	18-Apr-16	20	24.7	27.0	20.9	18.0	16.9	41.0
PAPA003	18-Apr-16	21	28.2	30.8	27.0	23.6	21.6	46.3
PAPA003	18-Apr-16	22	25.1	26.6	24.9	22.4	20.7	37.3
PAPA003	18-Apr-16	23	27.6	28.9	27.3	26.1	24.2	42.8
PAPA003	19-Apr-16	0	26.8	27.8	26.2	25.1	23.9	36.7
PAPA003	19-Apr-16	1	23.0	24.3	22.8	21.6	20.0	28.9
PAPA003	19-Apr-16	2	25.1	26.6	24.7	23.2	21.2	31.2
PAPA003	19-Apr-16	3	24.3	25.7	24.2	22.7	20.6	28.6
PAPA003	19-Apr-16	4	24.7	25.9	24.5	23.4	22.0	30.0
PAPA003	19-Apr-16	5	24.1	25.7	23.4	21.9	20.3	38.2
PAPA003	19-Apr-16	6	23.2	24.3	22.9	21.8	20.1	38.8
PAPA003	19-Apr-16	7	25.1	25.0	22.6	21.2	19.4	40.5
PAPA003	19-Apr-16	8	26.0	24.8	21.7	20.1	18.6	54.8
PAPA003	19-Apr-16	9	22.8	25.8	21.0	19.3	17.9	35.7
PAPA003	19-Apr-16	10	27.0	25.8	20.3	19.1	18.2	48.5
PAPA004	18-Apr-13	10	21.5	23.4	20.7	18.9	17.2	32.9
PAPA004	18-Apr-13	11	28.3	31.7	23.6	18.7	16.3	47.9
PAPA004	18-Apr-13	12	31.5	35.0	27.8	22.6	19.8	49.2
PAPA004	18-Apr-13	13	33.6	37.5	29.0	22.4	19.4	50.9
PAPA004	18-Apr-13	14	35.0	38.7	31.4	25.4	21.9	49.4
PAPA004	18-Apr-13	15	37.8	41.3	34.1	27.7	23.8	52.7
PAPA004	18-Apr-13	16	39.2	42.8	36.2	30.0	24.0	52.8
PAPA004	18-Apr-13	17	37.9	41.2	35.1	29.5	24.4	53.3
PAPA004	18-Apr-13	18	38.9	42.6	36.0	30.6	23.6	52.8
PAPA004	18-Apr-13	19	40.9	44.4	38.0	32.1	26.1	55.4
PAPA004	18-Apr-13	20	40.3	43.4	36.6	31.1	26.1	61.5
PAPA004	18-Apr-13	21	28.3	31.3	24.7	22.3	20.8	43.7
PAPA004	18-Apr-13	22	27.3	29.6	24.2	21.1	18.9	43.2
PAPA004	18-Apr-13	23	26.4	28.7	24.7	21.9	18.4	41.7
PAPA004	19-Apr-13	0	25.7	27.0	24.9	23.7	22.2	39.7
PAPA004	19-Apr-13	1	22.6	24.9	21.7	18.7	16.5	31.4
PAPA004	19-Apr-13	2	21.4	23.8	20.6	17.4	16.1	29.0
PAPA004	19-Apr-13	3	18.3	21.7	16.2	15.2	14.8	28.2
PAPA004	19-Apr-13	4	19.2	23.3	16.6	15.5	15.0	27.4
PAPA004	19-Apr-13	5	26.9	28.6	26.0	23.9	21.2	40.8
PAPA004	19-Apr-13	6	27.8	29.7	27.2	23.7	19.7	42.4
PAPA004	19-Apr-13	7	27.6	29.9	27.2	23.8	20.0	35.7
PAPA004	19-Apr-13	8	30.3	28.5	22.6	19.8	18.3	52.4
PAPA004	19-Apr-13	9	23.9	23.2	20.1	18.8	17.3	43.6
PAPA004	19-Apr-13	10	21.7	22.9	20.6	19.4	18.2	34.5
PAPA004	19-Apr-13	11	23.7	24.5	21.2	19.9	18.3	39.8
PAPA004	19-Apr-13	12	29.2	32.5	26.5	22.7	20.3	47.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	19-Apr-13	13	31.8	34.9	28.0	23.1	19.2	51.3
PAPA004	19-Apr-13	14	29.0	32.1	26.2	22.1	19.7	44.9
PAPA004	19-Apr-13	15	31.9	33.8	27.2	22.5	19.0	51.9
PAPA004	19-Apr-13	16	30.4	33.6	27.0	22.5	19.1	47.0
PAPA004	19-Apr-13	17	29.4	32.3	25.2	21.2	18.5	47.6
PAPA004	19-Apr-13	18	23.5	25.5	20.7	18.2	16.6	38.7
PAPA004	19-Apr-13	19	23.2	24.0	20.4	18.1	16.4	42.6
PAPA004	19-Apr-13	20	22.2	23.5	20.4	17.7	16.4	39.0
PAPA004	19-Apr-13	21	19.6	21.8	17.5	16.0	15.3	36.1
PAPA004	19-Apr-13	22	26.1	25.8	15.7	15.0	14.6	50.7
PAPA004	19-Apr-13	23	20.1	22.8	18.9	16.0	15.1	30.4
PAPA004	20-Apr-13	0	26.6	30.6	23.6	20.1	18.0	41.0
PAPA004	20-Apr-13	1	24.2	26.2	23.8	21.2	19.6	34.1
PAPA004	20-Apr-13	2	28.8	31.2	27.8	25.3	23.3	36.3
PAPA004	20-Apr-13	3	27.0	29.3	26.7	23.1	21.2	31.9
PAPA004	20-Apr-13	4	26.6	29.4	25.5	22.2	19.5	33.9
PAPA004	20-Apr-13	5	32.8	30.0	27.5	23.0	20.4	57.1
PAPA004	20-Apr-13	6	25.7	27.2	25.4	23.5	20.9	31.1
PAPA004	20-Apr-13	7	27.1	29.5	26.1	23.0	20.9	42.5
PAPA004	20-Apr-13	8	29.9	31.1	22.4	18.3	16.8	48.8
PAPA004	20-Apr-13	9	27.2	30.6	24.1	19.6	17.6	42.2
PAPA004	20-Apr-13	10	30.9	34.7	27.1	21.4	18.5	48.6
PAPA004	20-Apr-13	11	34.4	38.2	31.1	23.9	18.9	51.2
PAPA004	20-Apr-13	12	34.7	38.1	32.0	25.5	21.5	47.2
PAPA004	20-Apr-13	13	32.3	35.9	29.5	24.3	20.1	44.7
PAPA004	20-Apr-13	14	35.2	38.0	31.4	26.4	22.1	54.9
PAPA004	20-Apr-13	15	36.8	40.6	33.5	27.7	23.4	50.7
PAPA004	20-Apr-13	16	36.0	39.5	32.7	26.3	22.5	52.7
PAPA004	20-Apr-13	17	41.7	45.1	34.5	28.4	23.1	58.7
PAPA004	20-Apr-13	18	37.4	41.0	33.5	27.7	24.3	52.7
PAPA004	20-Apr-13	19	31.7	35.1	28.8	25.2	22.5	44.5
PAPA004	20-Apr-13	20	28.9	30.5	28.1	26.1	23.9	42.4
PAPA004	20-Apr-13	21	28.6	31.4	26.4	24.0	21.6	43.5
PAPA004	20-Apr-13	22	28.0	30.2	27.2	24.8	22.6	38.1
PAPA004	20-Apr-13	23	32.3	36.1	29.4	25.3	22.7	44.4
PAPA004	21-Apr-13	0	30.7	33.7	29.5	25.7	22.7	41.1
PAPA004	21-Apr-13	1	33.2	36.2	32.5	25.3	22.0	48.5
PAPA004	21-Apr-13	2	28.0	30.3	26.8	24.5	21.9	39.8
PAPA004	21-Apr-13	3	33.0	36.0	30.7	26.0	23.1	49.6
PAPA004	21-Apr-13	4	30.3	33.0	29.3	26.1	23.4	43.6
PAPA004	21-Apr-13	5	27.1	30.0	25.3	21.3	18.3	44.6
PAPA004	21-Apr-13	6	33.3	38.1	27.4	23.1	17.0	43.1
PAPA004	21-Apr-13	7	29.2	33.2	26.0	22.4	20.2	44.0
PAPA004	21-Apr-13	8	25.9	26.9	24.0	22.0	19.8	44.1
PAPA004	21-Apr-13	9	24.5	26.8	22.7	19.9	18.8	41.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	21-Apr-13	10	26.0	25.5	21.7	19.7	18.0	52.1
PAPA004	21-Apr-13	11	24.8	27.7	23.4	20.8	19.4	34.0
PAPA004	21-Apr-13	12	27.0	29.5	25.6	23.2	21.8	41.9
PAPA004	15-Apr-14	11	38.6	23.6	21.1	20.0	19.0	62.1
PAPA004	15-Apr-14	12	25.3	27.4	21.0	19.6	18.5	44.1
PAPA004	15-Apr-14	13	34.6	26.3	22.7	21.4	20.3	56.0
PAPA004	15-Apr-14	14	37.7	41.5	33.7	25.2	20.7	53.8
PAPA004	15-Apr-14	15	41.4	44.9	38.9	32.9	26.5	56.9
PAPA004	15-Apr-14	16	42.1	46.1	36.3	28.1	23.3	57.4
PAPA004	15-Apr-14	17	39.7	43.3	36.6	30.4	25.8	55.9
PAPA004	15-Apr-14	18	32.8	36.1	30.4	25.7	21.8	45.6
PAPA004	15-Apr-14	19	37.7	41.2	33.0	27.8	23.0	54.5
PAPA004	15-Apr-14	20	43.2	47.4	37.0	31.4	27.8	59.3
PAPA004	15-Apr-14	21	36.3	39.7	31.4	22.7	19.8	52.8
PAPA004	15-Apr-14	22	25.0	27.4	23.4	21.3	19.9	37.9
PAPA004	15-Apr-14	23	25.4	27.9	23.3	20.9	18.8	40.9
PAPA004	16-Apr-14	0	23.5	26.1	21.5	19.5	17.0	37.6
PAPA004	16-Apr-14	1	24.2	27.2	21.2	18.4	17.1	39.8
PAPA004	16-Apr-14	2	23.3	25.4	22.5	20.3	18.8	35.8
PAPA004	16-Apr-14	3	25.3	28.2	23.5	20.7	18.9	39.2
PAPA004	16-Apr-14	4	24.1	27.0	22.0	19.0	17.3	38.6
PAPA004	16-Apr-14	5	20.9	23.4	19.8	17.2	15.6	31.9
PAPA004	16-Apr-14	6	22.0	24.0	20.6	18.5	16.9	34.4
PAPA004	16-Apr-14	7	23.7	24.2	20.7	18.9	17.1	38.9
PAPA004	16-Apr-14	8	43.5	31.9	24.8	22.2	19.6	70.5
PAPA004	16-Apr-14	9	40.0	29.6	21.2	18.9	17.7	64.9
PAPA004	16-Apr-14	10	28.9	31.0	22.4	18.4	16.6	51.4
PAPA004	16-Apr-14	11	29.2	33.1	26.0	20.8	17.1	42.3
PAPA004	16-Apr-14	12	30.0	33.6	26.7	20.7	17.8	45.4
PAPA004	16-Apr-14	13	34.1	37.7	31.4	25.3	19.7	47.3
PAPA004	16-Apr-14	14	32.3	35.9	29.0	23.2	19.7	47.0
PAPA004	16-Apr-14	15	30.8	34.4	26.8	21.7	19.1	46.5
PAPA004	16-Apr-14	16	30.7	34.2	27.7	22.0	18.7	44.6
PAPA004	16-Apr-14	17	30.1	33.7	26.6	21.6	18.7	44.3
PAPA004	16-Apr-14	18	29.4	32.8	24.8	19.8	17.4	47.5
PAPA004	16-Apr-14	19	26.1	27.4	19.6	17.6	16.6	46.2
PAPA004	16-Apr-14	20	22.4	22.7	19.6	17.9	16.4	36.5
PAPA004	16-Apr-14	21	24.1	24.4	20.9	18.4	17.5	39.1
PAPA004	16-Apr-14	22	22.9	23.7	19.3	16.4	15.1	37.2
PAPA004	16-Apr-14	23	17.9	18.7	17.0	16.2	15.6	28.9
PAPA004	17-Apr-14	0	23.2	26.0	22.8	17.7	16.5	30.0
PAPA004	17-Apr-14	1	21.6	23.6	20.9	19.1	17.9	29.0
PAPA004	17-Apr-14	2	25.7	27.9	25.3	20.9	18.8	34.7
PAPA004	17-Apr-14	3	25.5	28.0	24.1	22.1	20.9	35.1
PAPA004	17-Apr-14	4	30.6	32.2	29.2	25.5	22.6	43.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	17-Apr-14	5	31.2	33.1	30.7	28.6	26.8	37.0
PAPA004	17-Apr-14	6	33.3	33.0	30.3	28.2	26.7	55.9
PAPA004	17-Apr-14	7	31.6	33.8	29.7	27.9	25.8	43.9
PAPA004	17-Apr-14	8	31.5	32.8	30.0	27.7	26.1	52.1
PAPA004	03-Apr-15	15	24.3	25.8	18.3	17.1	16.2	42.7
PAPA004	03-Apr-15	16	23.3	24.9	18.9	16.5	15.7	48.9
PAPA004	03-Apr-15	17	20.6	24.4	17.2	16.1	15.5	34.2
PAPA004	03-Apr-15	18	20.5	22.1	17.4	15.7	15.1	37.2
PAPA004	03-Apr-15	19	19.4	19.9	16.1	15.0	14.6	37.9
PAPA004	03-Apr-15	20	21.8	22.2	17.4	16.1	15.4	40.7
PAPA004	03-Apr-15	21	17.5	18.9	15.7	15.0	14.5	29.4
PAPA004	03-Apr-15	22	20.0	20.0	15.5	14.7	14.4	38.8
PAPA004	03-Apr-15	23	15.8	16.7	15.2	14.5	14.2	25.1
PAPA004	04-Apr-15	0	16.4	17.9	15.1	14.6	14.3	25.9
PAPA004	04-Apr-15	1	19.4	22.2	18.0	16.3	15.6	29.7
PAPA004	04-Apr-15	2	19.5	21.4	19.3	17.0	16.2	24.0
PAPA004	04-Apr-15	3	20.3	21.6	19.8	18.6	17.2	27.9
PAPA004	04-Apr-15	4	23.0	24.3	22.8	21.0	19.6	31.3
PAPA004	04-Apr-15	5	25.5	27.7	25.2	21.8	20.4	31.6
PAPA004	04-Apr-15	6	28.2	29.9	27.0	24.8	22.1	44.1
PAPA004	04-Apr-15	7	35.4	30.6	27.1	24.0	20.9	56.0
PAPA004	04-Apr-15	8	51.3	56.5	30.9	21.7	18.4	63.9
PAPA004	04-Apr-15	9	40.3	29.9	24.2	21.7	19.8	60.7
PAPA004	04-Apr-15	10	34.1	30.6	20.3	17.6	16.6	56.2
PAPA004	04-Apr-15	11	37.7	25.5	19.1	17.8	16.6	66.5
PAPA004	04-Apr-15	12	38.5	24.1	18.0	16.6	15.8	70.9
PAPA004	04-Apr-15	13	32.7	23.4	18.3	17.1	16.4	53.8
PAPA004	04-Apr-15	14	23.9	24.8	18.9	17.2	16.3	41.3
PAPA004	04-Apr-15	15	33.1	36.8	28.6	21.0	17.9	50.9
PAPA004	04-Apr-15	16	35.0	36.7	28.4	21.9	18.5	61.7
PAPA004	04-Apr-15	17	33.4	36.8	29.6	23.7	20.0	48.7
PAPA004	04-Apr-15	18	35.5	39.1	32.1	25.2	19.3	49.6
PAPA004	04-Apr-15	19	28.0	31.2	23.7	20.8	18.8	45.0
PAPA004	04-Apr-15	20	23.9	24.8	22.3	20.1	19.0	40.2
PAPA004	04-Apr-15	21	23.0	24.2	21.7	19.9	18.5	36.0
PAPA004	04-Apr-15	22	21.6	24.4	20.0	18.3	17.4	32.7
PAPA004	04-Apr-15	23	25.0	26.9	24.5	22.9	20.1	32.6
PAPA004	05-Apr-15	0	21.2	22.9	20.2	18.6	17.2	33.3
PAPA004	05-Apr-15	1	22.3	23.8	22.1	19.9	18.8	29.1
PAPA004	05-Apr-15	2	23.5	25.5	22.9	21.3	19.7	29.9
PAPA004	05-Apr-15	3	26.7	28.3	26.3	24.7	21.5	42.6
PAPA004	05-Apr-15	4	27.7	29.1	27.6	25.2	23.4	34.1
PAPA004	05-Apr-15	5	28.3	29.6	28.1	26.7	24.7	34.8
PAPA004	05-Apr-15	6	28.7	30.4	28.3	26.7	24.8	37.3
PAPA004	05-Apr-15	7	29.4	31.3	28.7	26.0	23.4	41.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	05-Apr-15	8	31.2	32.2	29.7	27.5	25.0	54.1
PAPA004	05-Apr-15	9	30.8	32.3	28.6	26.5	24.0	46.5
PAPA004	05-Apr-15	10	26.5	28.6	25.4	22.3	18.6	37.1
PAPA004	05-Apr-15	11	25.2	26.5	19.8	17.4	16.5	49.7
PAPA004	05-Apr-15	12	25.1	28.0	21.6	18.6	17.3	42.7
PAPA004	05-Apr-15	13	34.2	37.3	28.6	20.7	17.5	55.7
PAPA004	05-Apr-15	14	34.8	38.5	31.1	24.1	19.1	49.2
PAPA004	05-Apr-15	15	37.5	41.4	33.5	26.1	20.7	52.8
PAPA004	05-Apr-15	16	39.0	42.5	35.2	28.4	22.0	58.1
PAPA004	05-Apr-15	17	34.5	38.2	30.8	25.0	20.7	50.8
PAPA004	05-Apr-15	18	29.4	32.9	25.7	20.8	18.1	43.9
PAPA004	05-Apr-15	19	23.0	24.9	19.7	18.3	17.1	47.6
PAPA004	05-Apr-15	20	18.8	19.9	17.9	17.1	16.3	34.4
PAPA004	05-Apr-15	21	20.5	20.3	17.6	16.4	15.1	35.0
PAPA004	05-Apr-15	22	21.4	20.3	17.5	16.0	15.4	37.0
PAPA004	05-Apr-15	23	22.1	24.1	21.5	20.2	18.6	27.4
PAPA004	06-Apr-15	0	24.8	25.8	23.6	21.9	19.6	40.8
PAPA004	06-Apr-15	1	27.4	29.5	26.9	24.2	21.0	35.5
PAPA004	06-Apr-15	2	29.6	31.5	29.2	27.3	24.8	34.7
PAPA004	06-Apr-15	3	30.1	32.1	29.9	27.2	25.1	35.4
PAPA004	06-Apr-15	4	28.5	29.6	28.3	27.2	26.1	32.0
PAPA004	06-Apr-15	5	28.5	30.0	28.0	26.9	25.7	37.2
PAPA004	06-Apr-15	6	34.1	32.1	29.0	27.7	26.1	59.2
PAPA004	06-Apr-15	7	28.4	29.3	27.9	26.6	24.9	48.1
PAPA004	06-Apr-15	8	29.8	31.8	28.5	26.8	25.3	51.0
PAPA004	06-Apr-15	9	40.0	34.5	31.3	27.0	23.0	65.8
PAPA004	06-Apr-15	10	23.6	26.2	21.0	18.3	17.0	40.8
PAPA004	06-Apr-15	11	26.7	30.1	22.0	18.1	17.0	43.0
PAPA004	06-Apr-15	12	28.8	31.2	23.3	19.2	17.6	53.4
PAPA004	06-Apr-15	13	29.7	33.7	25.0	19.5	17.5	46.3
PAPA004	06-Apr-15	14	32.6	35.2	27.5	21.7	18.9	52.6
PAPA004	06-Apr-15	15	32.2	35.7	28.6	22.9	19.3	49.2
PAPA004	06-Apr-15	16	37.3	41.3	33.5	25.8	20.6	55.3
PAPA004	06-Apr-15	17	36.0	39.6	33.0	27.1	22.0	51.7
PAPA004	06-Apr-15	18	36.5	39.7	33.6	27.5	20.6	52.6
PAPA004	06-Apr-15	19	34.3	37.6	31.8	27.7	23.1	47.0
PAPA004	06-Apr-15	20	38.1	41.5	35.8	31.3	27.5	51.2
PAPA004	06-Apr-15	21	29.5	31.8	26.1	20.1	18.2	47.4
PAPA004	06-Apr-15	22	22.6	25.2	20.8	18.7	17.5	34.0
PAPA004	06-Apr-15	23	21.9	25.0	19.0	16.7	15.7	38.6
PAPA004	07-Apr-15	0	19.1	20.9	17.9	16.0	15.1	35.0
PAPA004	07-Apr-15	1	19.0	20.6	18.1	17.0	16.1	32.5
PAPA004	07-Apr-15	2	18.9	20.4	18.0	16.4	15.6	35.1
PAPA004	07-Apr-15	3	20.2	22.0	19.7	17.8	16.3	28.8
PAPA004	07-Apr-15	4	22.5	23.8	20.9	19.3	18.0	39.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	07-Apr-15	5	23.7	26.0	22.6	20.5	18.4	34.9
PAPA004	07-Apr-15	6	25.7	27.7	25.3	21.3	18.6	35.7
PAPA004	07-Apr-15	7	27.0	28.8	25.5	22.3	20.5	39.7
PAPA004	07-Apr-15	8	40.1	36.1	28.5	26.1	23.0	58.5
PAPA004	07-Apr-15	9	29.0	30.9	27.7	25.8	23.5	43.0
PAPA004	07-Apr-15	10	26.5	29.4	22.5	18.4	16.1	41.3
PAPA004	07-Apr-15	11	25.8	26.3	23.0	21.1	18.9	41.6
PAPA004	07-Apr-15	12	35.2	33.8	30.3	25.6	22.8	56.7
PAPA004	07-Apr-15	13	23.6	26.4	20.3	18.9	17.9	44.0
PAPA004	07-Apr-15	14	27.9	31.2	19.8	18.2	17.3	50.4
PAPA004	07-Apr-15	15	23.5	24.1	18.8	17.6	16.9	46.2
PAPA004	07-Apr-15	16	28.0	28.5	18.8	17.2	16.3	50.8
PAPA004	07-Apr-15	17	34.0	37.9	29.3	24.5	21.0	50.3
PAPA004	07-Apr-15	18	29.9	32.3	28.6	25.1	22.8	40.7
PAPA004	07-Apr-15	19	28.4	28.2	22.0	18.7	17.0	49.3
PAPA004	07-Apr-15	20	26.0	23.8	20.4	19.1	17.5	48.3
PAPA004	07-Apr-15	21	25.7	23.3	19.3	17.7	16.6	47.6
PAPA004	07-Apr-15	22	19.9	22.9	18.4	17.0	16.1	30.3
PAPA004	07-Apr-15	23	24.4	27.7	22.7	19.1	17.3	35.0
PAPA004	08-Apr-15	0	25.6	26.2	21.6	19.6	17.1	46.8
PAPA004	08-Apr-15	1	24.5	28.0	22.3	19.2	17.9	35.9
PAPA004	08-Apr-15	2	25.3	30.2	20.1	17.5	16.4	35.3
PAPA004	08-Apr-15	3	27.2	29.2	26.7	24.6	22.0	33.6
PAPA004	08-Apr-15	4	26.7	30.0	24.7	20.5	17.9	38.0
PAPA004	08-Apr-15	5	23.2	25.9	21.8	19.8	17.5	33.9
PAPA004	08-Apr-15	6	25.7	27.7	23.7	21.2	18.9	47.8
PAPA004	08-Apr-15	7	25.1	27.6	23.4	20.7	18.1	37.7
PAPA004	08-Apr-15	8	24.3	27.4	21.7	19.0	17.2	38.8
PAPA004	08-Apr-15	9	26.6	26.2	20.6	16.9	15.6	54.1
PAPA004	08-Apr-15	10	29.5	31.2	19.3	16.2	15.4	51.2
PAPA004	08-Apr-15	11	23.6	21.4	16.1	15.6	15.3	50.0
PAPA004	08-Apr-15	12	26.8	23.1	16.6	16.0	15.4	50.0
PAPA004	08-Apr-15	13	27.0	29.5	24.2	21.3	17.9	42.3
PAPA004	08-Apr-15	14	20.6	23.2	19.1	16.6	15.7	32.9
PAPA004	08-Apr-15	15	24.1	25.4	19.0	16.9	16.0	44.8
PAPA004	08-Apr-15	16	29.2	30.0	23.6	18.6	16.3	50.5
PAPA004	08-Apr-15	17	29.1	32.7	24.6	20.2	17.5	45.7
PAPA004	08-Apr-15	18	27.0	29.3	25.6	23.4	21.2	39.1
PAPA004	08-Apr-15	19	28.0	31.2	24.9	20.1	17.1	42.8
PAPA004	08-Apr-15	20	26.8	28.8	23.5	21.0	17.4	42.6
PAPA004	08-Apr-15	21	25.4	27.7	22.7	18.2	16.0	41.8
PAPA004	08-Apr-15	22	19.0	20.7	17.9	16.8	15.8	29.5
PAPA004	08-Apr-15	23	20.3	22.4	17.0	15.7	14.9	36.5
PAPA004	09-Apr-15	0	20.0	21.6	15.7	15.2	14.8	37.6
PAPA004	09-Apr-15	1	25.4	25.4	19.9	18.2	17.1	48.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	09-Apr-15	2	21.7	23.7	21.0	18.4	17.0	28.1
PAPA004	09-Apr-15	3	22.3	24.0	21.8	20.3	19.1	32.8
PAPA004	09-Apr-15	4	24.1	26.5	23.4	20.0	18.7	30.9
PAPA004	09-Apr-15	5	23.8	25.9	22.6	20.2	18.4	36.3
PAPA004	09-Apr-15	6	25.1	27.8	23.8	20.9	18.5	37.6
PAPA004	09-Apr-15	7	26.3	27.0	22.2	20.2	18.6	44.5
PAPA004	09-Apr-15	8	26.4	28.2	22.1	20.4	19.0	41.8
PAPA004	09-Apr-15	9	26.4	28.8	16.6	15.1	14.8	53.1
PAPA004	09-Apr-15	10	24.7	16.5	15.3	14.9	14.7	54.3
PAPA004	09-Apr-15	11	27.1	30.5	17.2	16.0	15.1	48.0
PAPA004	09-Apr-15	12	21.9	22.3	17.9	16.7	16.0	41.6
PAPA004	09-Apr-15	13	26.1	25.6	18.2	16.8	16.0	46.5
PAPA004	09-Apr-15	14	48.2	26.8	17.5	16.2	15.7	75.9
PAPA004	09-Apr-15	15	30.2	28.4	18.4	16.4	15.9	58.3
PAPA004	09-Apr-15	16	24.8	27.1	18.3	15.7	15.3	45.9
PAPA004	09-Apr-15	17	24.7	27.2	22.9	16.7	15.7	39.6
PAPA004	09-Apr-15	18	20.6	22.4	20.0	18.2	16.7	32.5
PAPA004	09-Apr-15	19	20.9	22.9	18.8	15.0	14.7	42.2
PAPA004	09-Apr-15	20	23.5	23.3	20.8	18.5	16.8	45.7
PAPA004	09-Apr-15	21	20.0	21.5	19.4	18.0	17.0	29.6
PAPA004	09-Apr-15	22	23.2	26.0	19.6	17.9	16.9	37.5
PAPA004	09-Apr-15	23	20.6	21.6	18.3	16.9	15.9	32.6
PAPA004	10-Apr-15	0	18.0	19.9	17.4	16.0	15.3	23.5
PAPA004	10-Apr-15	1	17.8	20.1	17.0	16.0	15.2	23.7
PAPA004	10-Apr-15	2	21.3	22.8	21.3	18.1	16.7	28.6
PAPA004	10-Apr-15	3	22.1	22.9	20.5	19.1	18.0	40.7
PAPA004	10-Apr-15	4	20.6	22.3	20.1	18.1	16.8	29.6
PAPA004	10-Apr-15	5	21.8	23.9	20.8	19.5	17.8	30.5
PAPA004	10-Apr-15	6	25.9	27.8	25.0	22.3	20.0	41.4
PAPA004	10-Apr-15	7	31.3	31.4	25.6	23.2	20.9	47.7
PAPA004	10-Apr-15	8	26.3	28.3	25.3	23.4	21.5	36.2
PAPA004	10-Apr-15	9	26.7	29.3	25.3	22.7	20.5	39.0
PAPA004	10-Apr-15	10	21.3	23.2	18.7	16.0	15.5	44.3
PAPA004	10-Apr-15	11	21.3	24.3	17.3	16.6	16.2	39.4
PAPA004	10-Apr-15	12	30.6	33.3	21.6	17.6	16.2	48.7
PAPA004	10-Apr-15	13	23.7	24.5	18.6	17.3	16.3	45.0
PAPA004	10-Apr-15	14	28.1	28.6	19.8	17.7	16.9	54.6
PAPA004	10-Apr-15	15	22.7	25.6	19.3	17.5	16.5	37.9
PAPA004	11-Apr-16	15	26.0	27.6	21.7	19.7	18.1	44.6
PAPA004	11-Apr-16	16	24.3	27.1	20.6	17.7	16.7	41.9
PAPA004	11-Apr-16	17	30.7	31.9	21.8	18.4	16.9	51.1
PAPA004	11-Apr-16	18	21.0	21.5	17.0	16.4	15.9	38.3
PAPA004	11-Apr-16	19	27.2	29.5	21.5	18.0	16.8	48.5
PAPA004	11-Apr-16	20	21.8	23.7	19.9	18.3	16.6	35.5
PAPA004	11-Apr-16	21	22.6	24.5	19.2	17.8	17.2	38.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	11-Apr-16	22	24.4	21.0	18.7	16.9	16.0	45.6
PAPA004	11-Apr-16	23	21.3	21.1	17.5	16.1	15.6	40.0
PAPA004	12-Apr-16	0	23.9	21.4	18.2	16.0	15.6	45.1
PAPA004	12-Apr-16	1	21.8	23.3	20.9	19.4	17.9	32.5
PAPA004	12-Apr-16	2	21.7	23.6	20.6	19.1	17.9	32.4
PAPA004	12-Apr-16	3	21.0	23.9	19.5	18.1	17.1	32.0
PAPA004	12-Apr-16	4	20.1	22.1	19.4	17.6	16.8	29.1
PAPA004	12-Apr-16	5	23.8	25.9	22.4	19.9	18.4	43.8
PAPA004	12-Apr-16	6	26.9	28.9	25.4	23.7	21.5	39.7
PAPA004	12-Apr-16	7	26.2	28.6	25.1	23.4	21.8	37.5
PAPA004	12-Apr-16	8	26.3	27.5	24.4	21.9	19.8	40.5
PAPA004	12-Apr-16	9	34.8	27.8	21.6	18.9	17.3	62.8
PAPA004	12-Apr-16	10	32.7	29.6	20.9	17.7	16.9	56.7
PAPA004	12-Apr-16	11	34.9	25.8	20.0	18.1	17.2	62.4
PAPA004	12-Apr-16	12	26.9	30.6	19.7	17.4	16.8	45.5
PAPA004	12-Apr-16	13	34.0	37.5	24.6	18.4	16.9	50.3
PAPA004	12-Apr-16	14	32.1	33.1	20.9	18.1	17.0	51.5
PAPA004	12-Apr-16	15	26.1	28.6	21.4	18.8	17.6	43.6
PAPA004	12-Apr-16	16	25.3	27.1	20.4	18.5	17.5	45.5
PAPA004	12-Apr-16	17	23.7	25.1	18.3	16.8	16.3	42.6
PAPA004	12-Apr-16	18	18.3	20.5	16.8	16.3	16.1	28.4
PAPA004	12-Apr-16	19	22.3	23.8	16.6	16.0	15.7	40.0
PAPA004	12-Apr-16	20	22.9	25.6	20.9	18.7	17.1	38.0
PAPA004	12-Apr-16	21	27.0	28.0	21.8	20.0	18.4	48.4
PAPA004	12-Apr-16	22	20.1	22.0	19.5	17.6	16.6	28.5
PAPA004	12-Apr-16	23	18.9	19.7	17.6	16.7	16.2	31.8
PAPA004	13-Apr-16	0	17.4	18.3	17.1	16.3	15.9	26.5
PAPA004	13-Apr-16	1	19.0	21.0	18.1	16.6	16.1	24.8
PAPA004	13-Apr-16	2	24.7	27.0	24.0	21.9	19.8	30.6
PAPA004	13-Apr-16	3	26.0	28.1	25.3	23.2	21.6	33.6
PAPA004	13-Apr-16	4	27.0	28.6	26.5	25.2	23.1	34.6
PAPA004	13-Apr-16	5	28.3	29.5	27.3	25.9	24.3	39.5
PAPA004	13-Apr-16	6	30.3	33.0	29.5	25.4	23.0	36.8
PAPA004	13-Apr-16	7	27.9	29.9	27.1	24.7	23.0	41.2
PAPA004	13-Apr-16	8	32.2	35.0	28.6	25.9	23.8	46.5
PAPA004	13-Apr-16	9	25.5	28.0	23.8	20.2	18.4	37.9
PAPA004	13-Apr-16	10	20.6	20.9	18.9	17.6	17.0	48.1
PAPA004	13-Apr-16	11	26.2	27.3	17.8	17.0	16.6	41.8
PAPA004	13-Apr-16	12	39.4	44.0	33.8	23.8	20.9	51.6
PAPA004	13-Apr-16	13	27.3	29.5	25.3	21.0	19.2	43.2
PAPA004	13-Apr-16	14	25.9	30.0	21.1	18.6	17.8	38.1
PAPA004	13-Apr-16	15	36.8	33.3	26.3	22.1	19.3	62.3
PAPA004	13-Apr-16	16	27.4	29.7	24.1	20.6	18.7	47.3
PAPA004	13-Apr-16	17	23.3	25.7	22.2	19.9	18.7	32.6
PAPA004	13-Apr-16	18	24.7	24.7	21.4	19.6	18.3	43.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	13-Apr-16	19	23.6	24.5	20.4	18.6	17.4	40.4
PAPA004	13-Apr-16	20	23.3	23.0	18.7	16.7	16.2	40.6
PAPA004	13-Apr-16	21	23.0	23.3	18.0	16.7	16.2	38.9
PAPA004	13-Apr-16	22	19.6	20.9	17.9	16.5	16.1	35.1
PAPA004	13-Apr-16	23	24.5	28.2	21.8	18.8	17.3	35.7
PAPA004	14-Apr-16	0	27.1	30.8	23.4	19.3	17.8	45.7
PAPA004	14-Apr-16	1	30.2	32.3	29.0	26.2	22.8	45.1
PAPA004	14-Apr-16	2	23.8	26.0	23.4	18.1	16.8	30.4
PAPA004	14-Apr-16	3	21.7	23.7	21.3	18.1	16.9	30.5
PAPA004	14-Apr-16	4	28.1	30.5	28.1	22.2	19.2	36.3
PAPA004	14-Apr-16	5	22.3	23.8	21.5	19.6	18.1	40.7
PAPA004	14-Apr-16	6	27.0	29.4	25.9	23.3	19.5	37.8
PAPA004	14-Apr-16	7	26.1	28.1	24.4	22.7	21.0	42.5
PAPA004	14-Apr-16	8	29.5	32.2	27.2	23.4	20.1	46.7
PAPA004	14-Apr-16	9	27.2	29.9	25.6	23.4	21.4	39.1
PAPA004	14-Apr-16	10	32.0	35.5	29.4	25.3	22.4	49.4
PAPA004	14-Apr-16	11	31.3	34.4	28.9	25.5	23.2	45.8
PAPA004	14-Apr-16	12	38.9	42.8	34.9	29.0	22.7	56.7
PAPA004	14-Apr-16	13	34.6	37.8	32.3	27.6	23.1	49.9
PAPA004	14-Apr-16	14	29.1	32.3	27.1	22.3	20.6	43.9
PAPA004	14-Apr-16	15	32.8	36.2	30.6	26.7	23.6	46.3
PAPA004	14-Apr-16	16	34.6	35.1	27.4	20.8	18.4	57.4
PAPA004	14-Apr-16	17	30.9	29.4	23.3	21.1	19.5	55.5
PAPA004	14-Apr-16	18	29.5	33.4	24.9	20.0	18.4	45.1
PAPA004	14-Apr-16	19	22.3	23.9	22.1	19.7	18.3	32.3
PAPA004	14-Apr-16	20	23.2	25.5	22.2	19.5	18.3	39.8
PAPA004	14-Apr-16	21	24.6	27.4	22.0	19.7	18.8	41.4
PAPA004	14-Apr-16	22	23.3	23.7	21.4	19.7	18.4	39.5
PAPA004	14-Apr-16	23	23.8	24.9	22.1	20.4	18.9	39.1
PAPA004	15-Apr-16	0	20.4	23.1	19.3	16.8	16.3	29.6
PAPA004	15-Apr-16	1	18.4	19.6	18.0	17.0	16.4	26.7
PAPA004	15-Apr-16	2	16.8	18.3	16.1	15.8	15.6	23.7
PAPA004	15-Apr-16	3	19.8	23.5	16.7	15.7	15.5	28.6
PAPA004	15-Apr-16	4	19.5	21.5	18.6	16.9	16.0	27.4
PAPA004	15-Apr-16	5	20.9	23.3	19.0	17.1	16.3	37.4
PAPA004	15-Apr-16	6	21.5	23.3	20.6	18.8	17.1	32.9
PAPA004	15-Apr-16	7	24.3	26.3	23.4	21.5	19.3	36.9
PAPA004	15-Apr-16	8	25.5	28.6	23.4	20.9	18.8	37.7
PAPA004	15-Apr-16	9	39.1	34.5	27.6	23.3	19.3	60.3
PAPA004	15-Apr-16	10	32.6	35.9	29.5	24.8	21.8	48.9
PAPA004	15-Apr-16	11	36.7	40.0	33.8	28.3	22.4	52.4
PAPA004	15-Apr-16	12	39.5	43.0	36.5	31.0	25.7	55.2
PAPA004	15-Apr-16	13	38.9	42.4	36.2	30.3	24.5	52.9
PAPA004	15-Apr-16	14	39.4	43.1	36.5	30.3	24.1	52.7
PAPA004	15-Apr-16	15	37.7	41.3	34.7	29.3	23.7	50.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	15-Apr-16	16	36.4	39.9	33.5	27.5	22.8	51.4
PAPA004	15-Apr-16	17	37.0	40.5	34.3	28.8	23.6	49.6
PAPA004	15-Apr-16	18	35.5	38.8	32.9	26.9	18.1	54.1
PAPA004	15-Apr-16	19	25.8	26.4	20.0	17.8	16.6	48.7
PAPA004	15-Apr-16	20	25.4	28.3	23.3	19.5	17.1	40.3
PAPA004	15-Apr-16	21	31.0	34.6	28.8	24.4	20.4	43.2
PAPA004	15-Apr-16	22	39.2	29.8	22.4	18.7	16.4	66.8
PAPA004	15-Apr-16	23	25.7	28.2	22.6	19.9	18.5	44.1
PAPA004	16-Apr-16	0	25.1	27.9	23.4	19.8	17.8	38.4
PAPA004	16-Apr-16	1	29.3	32.2	27.5	23.8	20.2	44.1
PAPA004	16-Apr-16	2	31.8	35.0	29.8	26.1	23.0	43.6
PAPA004	16-Apr-16	3	31.8	35.0	29.7	25.3	21.6	45.6
PAPA004	16-Apr-16	4	25.3	27.9	24.3	21.3	18.9	35.1
PAPA004	16-Apr-16	5	29.3	31.5	27.5	24.5	21.1	49.6
PAPA004	16-Apr-16	6	27.0	29.3	26.3	23.6	21.4	37.0
PAPA004	16-Apr-16	7	26.1	28.3	25.3	22.9	20.3	34.8
PAPA004	16-Apr-16	8	30.3	25.1	20.4	17.2	16.3	52.8
PAPA004	16-Apr-16	9	25.1	27.7	21.3	18.2	16.8	41.4
PAPA004	16-Apr-16	10	30.6	25.9	17.9	16.9	16.5	51.7
PAPA004	16-Apr-16	11	19.7	20.2	18.1	17.5	16.9	44.0
PAPA004	16-Apr-16	12	23.5	26.9	19.8	17.9	17.0	37.1
PAPA004	16-Apr-16	13	32.8	36.7	29.3	20.6	18.3	49.0
PAPA004	16-Apr-16	14	36.4	40.0	33.5	27.3	21.3	50.3
PAPA004	16-Apr-16	15	39.0	42.3	36.0	30.5	25.9	58.7
PAPA004	16-Apr-16	16	38.9	42.3	36.4	31.1	25.1	53.0
PAPA004	16-Apr-16	17	37.5	41.2	35.2	29.8	24.4	48.9
PAPA004	16-Apr-16	18	36.7	40.4	34.1	28.1	23.3	48.7
PAPA004	16-Apr-16	19	29.8	32.7	27.1	24.0	21.1	45.4
PAPA004	16-Apr-16	20	35.2	26.9	22.8	19.2	17.5	60.7
PAPA004	16-Apr-16	21	21.3	23.5	19.5	18.1	17.0	37.9
PAPA004	16-Apr-16	22	21.8	22.1	18.1	16.6	16.0	40.4
PAPA004	16-Apr-16	23	21.0	23.4	17.7	16.7	16.1	36.4
PAPA004	17-Apr-16	0	17.9	19.5	17.0	16.4	16.0	27.4
PAPA004	17-Apr-16	1	16.2	16.9	15.9	15.7	15.5	23.8
PAPA004	17-Apr-16	2	18.5	20.2	18.1	16.3	15.8	26.7
PAPA004	17-Apr-16	3	21.0	22.5	20.6	18.8	17.4	27.3
PAPA004	17-Apr-16	4	21.1	22.7	20.4	18.7	17.5	32.6
PAPA004	17-Apr-16	5	21.3	23.1	19.9	18.0	16.3	39.5
PAPA004	17-Apr-16	6	22.9	24.8	19.6	17.9	16.5	42.3
PAPA004	17-Apr-16	7	26.3	23.7	18.7	17.1	16.2	47.4
PAPA004	17-Apr-16	8	23.3	25.9	21.3	18.6	17.3	37.5
PAPA004	17-Apr-16	9	20.4	22.7	18.7	17.0	16.4	35.2
PAPA004	17-Apr-16	10	19.6	20.3	17.1	16.5	16.2	39.7
PAPA004	17-Apr-16	11	26.0	29.5	23.6	17.6	16.1	40.4
PAPA004	17-Apr-16	12	30.6	34.1	28.1	22.7	18.8	45.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA004	17-Apr-16	13	22.1	24.7	20.5	18.0	16.7	37.8
PAPA004	17-Apr-16	14	22.0	25.5	19.3	16.9	16.2	33.6
PAPA004	17-Apr-16	15	27.1	26.0	21.5	18.7	17.1	53.2
PAPA004	17-Apr-16	16	27.7	31.1	24.6	19.6	17.0	43.7
PAPA004	17-Apr-16	17	32.4	35.9	29.6	24.0	19.8	46.2
PAPA004	17-Apr-16	18	26.5	29.5	23.8	19.6	17.6	43.2
PAPA004	17-Apr-16	19	21.3	24.5	19.2	17.0	16.2	33.8
PAPA004	17-Apr-16	20	22.2	23.3	18.0	16.7	16.0	39.5
PAPA004	17-Apr-16	21	34.5	23.3	16.9	15.8	15.5	58.8
PAPA004	17-Apr-16	22	18.2	20.1	16.4	15.6	15.3	32.1
PAPA004	17-Apr-16	23	21.5	20.3	16.6	15.6	15.4	41.8
PAPA004	18-Apr-16	0	25.8	23.8	19.5	16.4	15.8	48.1
PAPA004	18-Apr-16	1	21.7	23.3	21.2	19.9	18.4	29.7
PAPA004	18-Apr-16	2	23.5	24.9	23.1	21.9	20.0	32.1
PAPA004	18-Apr-16	3	27.8	29.5	27.3	25.6	22.5	34.2
PAPA004	18-Apr-16	4	26.6	28.7	26.1	24.1	21.8	33.0
PAPA004	18-Apr-16	5	23.5	24.4	22.2	20.3	18.8	46.6
PAPA004	18-Apr-16	6	20.7	22.7	20.0	18.3	17.2	28.3
PAPA004	18-Apr-16	7	22.3	24.2	18.8	17.7	17.0	42.6
PAPA004	18-Apr-16	8	23.0	26.2	16.8	16.1	15.9	39.9
PAPA004	18-Apr-16	9	24.1	25.7	18.8	17.6	17.0	53.3
PAPA004	18-Apr-16	10	23.8	23.5	17.6	17.1	16.7	40.2
PAPA004	18-Apr-16	11	25.9	18.6	17.2	16.5	16.2	54.3
PAPA004	18-Apr-16	12	17.8	18.8	17.5	16.6	16.3	25.9
PAPA004	18-Apr-16	13	22.8	24.6	17.6	17.1	16.7	43.7
PAPA004	18-Apr-16	14	25.0	24.4	17.7	17.1	16.7	49.6
PAPA004	18-Apr-16	15	25.6	23.3	17.4	16.9	16.6	49.1
PAPA004	18-Apr-16	16	24.5	27.8	17.6	17.1	16.7	43.6
PAPA004	18-Apr-16	17	26.3	28.9	19.9	17.5	16.9	43.9
PAPA005	18-Apr-13	11	26.1	29.7	22.2	19.3	17.2	41.4
PAPA005	18-Apr-13	12	34.3	36.8	29.8	24.3	20.1	59.8
PAPA005	18-Apr-13	13	35.1	38.9	31.6	25.0	21.4	49.0
PAPA005	18-Apr-13	14	37.4	41.0	34.5	28.4	22.8	52.0
PAPA005	18-Apr-13	15	40.0	43.9	36.0	28.9	22.3	54.4
PAPA005	18-Apr-13	16	42.3	45.9	39.5	33.4	27.2	57.1
PAPA005	18-Apr-13	17	41.9	45.4	39.4	33.7	28.4	54.7
PAPA005	18-Apr-13	18	42.2	45.8	40.0	34.4	27.2	53.4
PAPA005	18-Apr-13	19	41.1	44.7	38.7	33.0	28.2	52.5
PAPA005	18-Apr-13	20	37.5	40.8	34.7	30.8	27.7	51.0
PAPA005	18-Apr-13	21	31.2	33.0	30.3	28.6	26.5	41.5
PAPA005	18-Apr-13	22	31.0	32.1	29.9	28.4	26.6	45.8
PAPA005	18-Apr-13	23	30.9	32.4	30.6	28.8	27.0	37.1
PAPA005	19-Apr-13	0	32.4	34.4	31.8	30.0	28.2	40.4
PAPA005	19-Apr-13	1	28.3	30.9	27.6	24.1	22.1	35.5
PAPA005	19-Apr-13	2	24.8	26.3	24.5	23.0	21.4	28.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	19-Apr-13	3	25.2	27.7	24.7	21.3	19.7	31.1
PAPA005	19-Apr-13	4	21.9	23.5	21.5	19.9	18.3	26.5
PAPA005	19-Apr-13	5	30.5	32.1	29.3	27.5	25.0	45.7
PAPA005	19-Apr-13	6	28.0	31.2	26.4	24.9	23.4	38.9
PAPA005	19-Apr-13	7	29.9	32.8	28.3	24.3	22.5	41.0
PAPA005	19-Apr-13	8	32.4	33.9	30.0	26.5	23.5	50.9
PAPA005	19-Apr-13	9	26.0	26.7	23.6	21.7	20.1	45.7
PAPA005	19-Apr-13	10	25.6	26.8	23.8	22.2	20.5	50.8
PAPA005	19-Apr-13	11	28.4	30.0	25.1	23.0	21.0	50.8
PAPA005	19-Apr-13	12	35.4	34.6	28.8	25.8	23.2	62.2
PAPA005	19-Apr-13	13	35.3	38.7	31.1	26.0	22.5	51.9
PAPA005	19-Apr-13	14	36.4	36.7	30.2	26.0	23.5	63.6
PAPA005	19-Apr-13	15	42.9	37.5	30.5	26.3	23.1	66.6
PAPA005	19-Apr-13	16	33.1	36.2	30.1	26.3	23.6	54.1
PAPA005	19-Apr-13	17	30.0	32.9	28.1	24.7	21.6	44.7
PAPA005	19-Apr-13	18	28.5	30.9	26.6	23.8	21.2	43.0
PAPA005	19-Apr-13	19	28.0	29.7	26.5	24.5	22.5	42.6
PAPA005	19-Apr-13	20	30.4	32.8	29.4	26.1	22.9	40.1
PAPA005	19-Apr-13	21	24.6	27.7	23.5	20.2	18.3	34.5
PAPA005	19-Apr-13	22	27.8	26.3	20.4	19.1	18.1	50.3
PAPA005	19-Apr-13	23	24.3	27.1	23.2	18.6	17.4	33.9
PAPA005	20-Apr-13	0	28.5	30.6	27.7	25.0	22.2	39.2
PAPA005	20-Apr-13	1	26.4	28.9	25.1	23.2	21.7	37.8
PAPA005	20-Apr-13	2	30.9	34.4	29.3	26.7	22.2	40.2
PAPA005	20-Apr-13	3	30.1	32.5	29.2	26.8	25.3	37.1
PAPA005	20-Apr-13	4	30.7	33.2	29.8	27.5	25.4	36.9
PAPA005	20-Apr-13	5	30.1	32.4	29.2	27.2	25.0	38.0
PAPA005	20-Apr-13	6	31.9	32.8	29.3	27.1	25.0	45.3
PAPA005	20-Apr-13	7	27.4	29.4	27.0	23.8	21.1	38.2
PAPA005	20-Apr-13	8	31.7	33.7	27.4	22.7	20.4	48.1
PAPA005	20-Apr-13	9	30.6	34.1	27.7	23.7	20.7	42.7
PAPA005	20-Apr-13	10	32.6	36.6	28.8	25.0	22.4	46.4
PAPA005	20-Apr-13	11	36.1	39.8	32.8	26.6	22.2	51.6
PAPA005	20-Apr-13	12	36.5	40.2	33.3	28.7	24.8	51.4
PAPA005	20-Apr-13	13	35.4	38.5	32.7	28.8	24.9	48.7
PAPA005	20-Apr-13	14	39.4	42.3	34.9	29.4	25.6	56.1
PAPA005	20-Apr-13	15	38.8	42.5	35.6	29.5	24.6	54.2
PAPA005	20-Apr-13	16	39.5	42.8	36.9	31.6	26.4	54.2
PAPA005	20-Apr-13	17	44.9	48.3	40.0	34.4	29.3	60.2
PAPA005	20-Apr-13	18	41.0	44.5	37.9	32.9	27.8	54.5
PAPA005	20-Apr-13	19	35.5	38.9	32.8	29.4	26.1	50.4
PAPA005	20-Apr-13	20	36.7	39.7	35.1	28.6	26.5	48.6
PAPA005	20-Apr-13	21	34.7	37.7	33.2	30.5	27.9	43.8
PAPA005	20-Apr-13	22	34.1	37.0	32.8	29.3	26.3	44.6
PAPA005	20-Apr-13	23	40.2	43.4	38.1	34.7	31.7	53.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	21-Apr-13	0	41.6	45.0	39.7	33.9	29.7	53.6
PAPA005	21-Apr-13	1	38.3	41.1	36.1	33.3	30.5	50.5
PAPA005	21-Apr-13	2	36.7	40.0	35.3	31.1	27.9	45.3
PAPA005	21-Apr-13	3	38.2	40.8	37.1	32.6	29.4	47.1
PAPA005	21-Apr-13	4	35.3	37.1	34.7	32.7	30.2	46.4
PAPA005	21-Apr-13	5	32.4	35.9	30.7	26.1	22.9	41.6
PAPA005	21-Apr-13	6	36.7	40.2	35.2	25.0	21.8	45.5
PAPA005	21-Apr-13	7	36.1	39.0	35.3	30.5	27.1	44.0
PAPA005	21-Apr-13	8	31.5	34.7	29.2	26.9	24.6	40.6
PAPA005	21-Apr-13	9	30.2	33.6	28.3	24.9	22.4	41.0
PAPA005	21-Apr-13	10	28.6	30.8	27.5	24.7	22.5	51.9
PAPA005	21-Apr-13	11	28.1	30.1	27.2	24.6	22.7	46.7
PAPA005	21-Apr-13	12	31.4	33.9	30.0	27.6	25.3	44.8
PAPA005	21-Apr-13	13	35.8	36.7	31.1	27.9	24.3	56.8
PAPA005	17-Apr-14	11	24.1	25.8	22.3	20.8	19.6	37.8
PAPA005	17-Apr-14	12	34.8	30.9	22.2	20.8	19.8	55.6
PAPA005	17-Apr-14	13	31.3	29.2	23.4	21.3	20.1	55.7
PAPA005	17-Apr-14	14	28.0	29.0	22.9	21.1	19.7	46.0
PAPA005	17-Apr-14	15	30.7	25.6	21.8	20.8	19.7	57.0
PAPA005	17-Apr-14	16	36.1	29.3	22.4	20.1	18.4	61.7
PAPA005	17-Apr-14	17	29.8	29.4	22.3	20.0	18.3	47.4
PAPA005	17-Apr-14	18	32.9	30.9	21.3	19.7	18.1	53.1
PAPA005	17-Apr-14	19	31.4	34.2	22.7	19.5	18.1	52.1
PAPA005	17-Apr-14	20	35.4	37.4	22.1	20.3	18.9	52.4
PAPA005	17-Apr-14	21	26.5	25.8	21.7	20.2	18.9	42.4
PAPA005	17-Apr-14	22	25.7	28.0	24.8	22.3	20.9	32.2
PAPA005	17-Apr-14	23	30.6	33.0	29.8	26.8	24.6	38.2
PAPA005	18-Apr-14	0	30.2	33.0	29.4	26.8	24.3	36.2
PAPA005	18-Apr-14	1	29.1	30.9	28.6	27.2	24.8	36.2
PAPA005	18-Apr-14	2	31.3	33.4	30.7	28.9	26.9	37.4
PAPA005	18-Apr-14	3	32.6	34.1	32.4	30.8	28.9	39.8
PAPA005	18-Apr-14	4	33.5	35.9	32.1	30.0	27.7	43.9
PAPA005	18-Apr-14	5	35.0	35.8	32.2	30.1	28.2	49.2
PAPA005	18-Apr-14	6	32.5	34.1	31.6	30.0	28.1	45.7
PAPA005	18-Apr-14	7	36.6	38.2	36.4	34.7	31.6	43.8
PAPA005	18-Apr-14	8	35.0	37.0	34.5	31.5	29.5	44.0
PAPA005	18-Apr-14	9	37.1	38.7	36.0	33.5	30.4	53.6
PAPA005	18-Apr-14	10	32.4	33.7	30.2	26.9	24.1	49.1
PAPA005	18-Apr-14	11	35.5	37.2	31.8	28.5	25.1	57.6
PAPA005	18-Apr-14	12	40.0	43.8	35.8	29.8	26.4	57.0
PAPA005	18-Apr-14	13	44.4	48.0	42.1	36.3	32.2	56.4
PAPA005	18-Apr-14	14	35.3	38.7	32.6	28.6	24.5	53.1
PAPA005	18-Apr-14	15	30.7	33.4	28.4	26.0	22.8	45.4
PAPA005	18-Apr-14	16	35.5	39.7	26.8	23.7	21.7	53.3
PAPA005	18-Apr-14	17	26.4	27.8	24.5	22.6	21.0	40.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	18-Apr-14	18	30.3	27.2	23.0	21.3	18.8	49.9
PAPA005	18-Apr-14	19	22.4	23.2	21.3	19.7	17.7	39.5
PAPA005	18-Apr-14	20	34.1	30.7	22.3	20.6	18.7	52.1
PAPA005	18-Apr-14	21	25.1	27.1	24.3	22.7	20.2	32.7
PAPA005	18-Apr-14	22	30.9	35.1	26.2	23.9	21.9	38.3
PAPA005	18-Apr-14	23	29.7	33.1	27.9	25.4	23.5	37.9
PAPA005	19-Apr-14	0	25.1	27.0	24.7	23.0	21.3	32.1
PAPA005	19-Apr-14	1	25.2	27.0	23.3	21.6	20.1	35.3
PAPA005	19-Apr-14	2	23.7	25.1	23.4	21.6	18.9	30.2
PAPA005	19-Apr-14	3	25.1	27.4	24.6	21.8	19.9	32.0
PAPA005	19-Apr-14	4	22.4	23.8	22.2	20.7	18.9	29.1
PAPA005	19-Apr-14	5	29.2	32.5	25.0	21.8	19.9	43.2
PAPA005	19-Apr-14	6	27.9	30.1	26.8	24.1	21.3	39.5
PAPA005	19-Apr-14	7	30.4	31.8	29.5	27.1	23.7	42.5
PAPA005	19-Apr-14	8	35.8	37.2	32.0	25.2	21.3	55.4
PAPA005	19-Apr-14	9	25.3	26.1	23.3	21.5	19.1	42.5
PAPA005	19-Apr-14	10	40.0	27.6	22.0	20.1	18.4	66.5
PAPA005	19-Apr-14	11	23.5	25.0	22.6	21.4	19.5	40.5
PAPA005	19-Apr-14	12	26.3	26.6	23.5	22.2	20.7	50.5
PAPA005	19-Apr-14	13	26.1	28.7	23.9	22.1	20.7	43.4
PAPA005	19-Apr-14	14	33.1	30.1	23.6	22.0	20.7	62.8
PAPA005	19-Apr-14	15	32.5	35.6	27.2	22.8	20.6	49.0
PAPA005	19-Apr-14	16	30.3	33.8	27.3	23.1	20.6	46.0
PAPA005	19-Apr-14	17	29.0	31.6	24.8	21.4	19.2	46.8
PAPA005	19-Apr-14	18	24.6	27.1	22.8	20.9	19.1	38.1
PAPA005	19-Apr-14	19	32.1	24.3	21.2	19.7	18.3	55.2
PAPA005	19-Apr-14	20	34.0	36.6	21.0	19.5	18.0	56.3
PAPA005	19-Apr-14	21	21.3	22.4	20.9	19.4	17.7	31.2
PAPA005	19-Apr-14	22	22.9	24.6	22.4	20.8	18.9	32.5
PAPA005	19-Apr-14	23	26.0	28.4	25.1	23.5	20.6	34.1
PAPA005	20-Apr-14	0	28.3	30.6	27.8	25.2	22.3	33.5
PAPA005	20-Apr-14	1	31.8	34.7	30.6	27.8	24.3	39.1
PAPA005	20-Apr-14	2	34.9	36.6	34.6	32.8	30.9	40.6
PAPA005	20-Apr-14	3	33.4	35.8	32.9	29.2	26.3	40.3
PAPA005	20-Apr-14	4	32.3	34.7	31.1	29.4	27.8	42.3
PAPA005	20-Apr-14	5	34.8	37.8	32.3	30.6	28.3	48.1
PAPA005	20-Apr-14	6	34.7	36.3	34.0	32.7	30.9	48.2
PAPA005	10-Apr-15	16	23.1	24.7	19.9	18.3	17.2	39.4
PAPA005	10-Apr-15	17	27.3	24.9	20.5	18.5	16.9	50.1
PAPA005	10-Apr-15	18	23.1	26.5	19.2	17.6	15.6	38.5
PAPA005	10-Apr-15	19	26.2	30.0	19.8	17.4	15.6	41.2
PAPA005	10-Apr-15	20	26.1	27.5	17.8	16.1	14.6	46.5
PAPA005	10-Apr-15	21	17.9	19.3	16.8	15.8	14.8	28.1
PAPA005	10-Apr-15	22	22.9	26.8	20.4	18.2	16.7	29.9
PAPA005	10-Apr-15	23	20.9	22.1	20.7	19.4	17.4	26.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	11-Apr-15	0	27.2	31.2	24.8	22.0	19.1	35.5
PAPA005	11-Apr-15	1	27.9	31.8	25.4	23.3	20.9	36.9
PAPA005	11-Apr-15	2	27.8	29.6	27.5	25.3	22.3	32.5
PAPA005	11-Apr-15	3	32.4	34.6	32.0	29.1	26.8	36.6
PAPA005	11-Apr-15	4	34.1	35.5	34.0	32.1	30.1	37.6
PAPA005	11-Apr-15	5	34.3	35.3	33.8	32.7	31.3	51.0
PAPA005	11-Apr-15	6	41.6	40.2	36.4	33.8	30.7	61.2
PAPA005	11-Apr-15	7	36.4	37.4	35.0	32.6	30.9	60.1
PAPA005	11-Apr-15	8	32.5	34.6	31.6	29.3	26.5	49.1
PAPA005	11-Apr-15	9	42.4	36.6	27.7	25.3	23.8	67.6
PAPA005	11-Apr-15	10	27.4	29.5	25.6	23.8	21.8	41.4
PAPA005	11-Apr-15	11	25.4	27.0	22.6	20.9	19.1	48.9
PAPA005	11-Apr-15	12	51.7	39.2	28.1	22.8	19.9	74.6
PAPA005	11-Apr-15	13	38.7	42.5	34.6	27.1	21.9	53.6
PAPA005	11-Apr-15	14	40.2	43.8	36.1	29.2	22.6	55.3
PAPA005	11-Apr-15	15	41.8	45.7	37.0	29.5	23.2	58.5
PAPA005	11-Apr-15	16	42.0	45.4	37.2	29.7	24.4	64.3
PAPA005	11-Apr-15	17	37.8	41.3	32.4	26.3	21.9	60.0
PAPA005	11-Apr-15	18	38.3	41.9	35.4	30.1	25.0	51.4
PAPA005	11-Apr-15	19	33.7	37.4	30.4	27.3	25.0	46.5
PAPA005	11-Apr-15	20	34.5	37.1	33.1	29.4	25.3	47.1
PAPA005	11-Apr-15	21	35.7	38.5	35.1	29.0	25.6	44.0
PAPA005	11-Apr-15	22	30.1	33.3	29.1	22.8	20.5	40.4
PAPA005	11-Apr-15	23	24.3	25.2	22.6	21.1	19.4	41.9
PAPA005	12-Apr-15	0	28.1	30.8	27.0	23.2	21.3	41.1
PAPA005	12-Apr-15	1	29.8	32.4	29.2	25.6	23.6	36.3
PAPA005	12-Apr-15	2	27.5	29.5	26.1	24.3	22.7	47.5
PAPA005	12-Apr-15	3	27.0	29.2	25.2	23.5	21.3	41.9
PAPA005	12-Apr-15	4	29.5	32.0	27.7	25.4	23.7	41.5
PAPA005	12-Apr-15	5	37.4	41.3	34.0	27.5	24.5	53.4
PAPA005	12-Apr-15	6	31.9	35.4	29.5	23.9	19.6	46.6
PAPA005	12-Apr-15	7	34.4	36.2	28.7	23.7	21.6	53.1
PAPA005	12-Apr-15	8	28.6	31.3	23.7	19.7	17.5	45.5
PAPA005	12-Apr-15	9	33.1	36.9	29.2	23.4	20.2	47.9
PAPA005	12-Apr-15	10	36.1	39.3	32.1	24.7	19.4	54.3
PAPA005	12-Apr-15	11	30.5	34.1	25.1	20.6	18.5	49.1
PAPA005	12-Apr-15	12	32.5	36.3	26.9	21.2	19.1	48.5
PAPA005	12-Apr-15	13	34.4	37.8	27.8	21.5	18.9	53.4
PAPA005	12-Apr-15	14	40.0	42.9	34.4	26.0	21.0	64.4
PAPA005	12-Apr-15	15	41.0	44.9	38.0	31.2	23.7	54.2
PAPA005	12-Apr-15	16	36.9	40.9	32.1	25.1	20.2	50.7
PAPA005	12-Apr-15	17	33.8	37.0	29.2	23.9	19.3	50.0
PAPA005	12-Apr-15	18	30.3	33.8	26.7	21.7	19.0	47.7
PAPA005	12-Apr-15	19	23.3	25.8	21.2	19.6	16.6	38.5
PAPA005	12-Apr-15	20	25.8	27.4	22.2	19.8	18.1	44.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	12-Apr-15	21	23.8	24.9	22.6	20.0	18.3	38.3
PAPA005	12-Apr-15	22	19.4	20.6	19.1	17.9	16.6	26.8
PAPA005	12-Apr-15	23	21.5	23.8	18.7	17.8	16.0	38.4
PAPA005	13-Apr-15	0	17.0	18.1	17.0	15.5	14.9	22.2
PAPA005	13-Apr-15	1	18.5	20.4	18.0	16.6	15.7	31.3
PAPA005	13-Apr-15	2	21.4	22.6	21.2	19.8	18.1	29.4
PAPA005	13-Apr-15	3	21.0	22.5	20.7	19.2	18.1	25.5
PAPA005	13-Apr-15	4	20.9	21.9	20.5	19.5	18.1	35.9
PAPA005	13-Apr-15	5	28.7	32.2	22.9	20.2	17.7	45.2
PAPA005	13-Apr-15	6	31.1	34.3	29.4	24.2	18.9	44.0
PAPA005	13-Apr-15	7	33.5	37.7	29.0	24.7	21.8	48.5
PAPA005	13-Apr-15	8	26.5	28.8	22.4	19.2	17.8	54.5
PAPA005	13-Apr-15	9	25.3	27.2	23.8	21.1	18.4	39.0
PAPA005	13-Apr-15	10	54.4	41.1	21.2	19.2	17.5	77.6
PAPA005	13-Apr-15	11	22.4	24.3	20.7	19.0	17.7	37.7
PAPA005	01-Apr-16	17	22.2	23.9	21.0	19.9	18.8	35.5
PAPA005	01-Apr-16	18	25.3	27.1	23.6	21.7	19.6	39.6
PAPA005	01-Apr-16	19	23.8	25.2	23.0	21.4	19.0	36.2
PAPA005	01-Apr-16	20	24.9	26.4	23.8	22.2	20.6	41.4
PAPA005	01-Apr-16	21	30.1	33.7	27.3	25.1	23.3	40.5
PAPA005	01-Apr-16	22	27.6	29.3	27.3	25.4	23.4	35.8
PAPA005	01-Apr-16	23	30.1	33.5	28.6	26.1	24.4	38.5
PAPA005	02-Apr-16	0	31.9	34.0	31.3	29.3	26.4	37.7
PAPA005	02-Apr-16	1	34.6	37.5	34.2	27.9	25.7	41.1
PAPA005	02-Apr-16	2	30.0	32.6	28.8	26.3	23.4	38.9
PAPA005	02-Apr-16	3	32.1	34.4	31.4	28.1	25.1	40.4
PAPA005	02-Apr-16	4	31.1	33.2	30.7	28.5	25.3	35.9
PAPA005	02-Apr-16	5	29.7	31.5	29.2	27.3	25.5	40.1
PAPA005	02-Apr-16	6	30.6	32.7	30.0	27.6	25.4	36.5
PAPA005	02-Apr-16	7	33.8	35.9	30.0	26.3	23.4	50.9
PAPA005	02-Apr-16	8	26.9	28.6	25.5	24.1	22.6	49.3
PAPA005	02-Apr-16	9	26.7	27.2	23.7	22.0	20.8	56.8
PAPA005	02-Apr-16	10	27.3	26.1	22.1	20.5	19.2	52.4
PAPA005	02-Apr-16	11	23.1	22.8	21.1	19.8	18.6	45.5
PAPA005	02-Apr-16	12	26.2	29.1	22.9	20.6	19.6	43.0
PAPA005	02-Apr-16	13	30.7	32.0	25.6	22.6	20.0	56.8
PAPA005	02-Apr-16	14	28.4	31.2	25.5	21.9	19.6	48.7
PAPA005	02-Apr-16	15	33.2	33.8	26.6	22.2	20.2	57.0
PAPA005	02-Apr-16	16	31.5	34.8	28.5	24.1	21.1	46.8
PAPA005	02-Apr-16	17	29.3	32.4	27.2	23.7	20.8	41.2
PAPA005	02-Apr-16	18	28.3	31.1	26.4	23.7	20.8	41.8
PAPA005	02-Apr-16	19	27.3	28.6	24.2	22.8	21.2	54.2
PAPA005	02-Apr-16	20	23.8	24.1	22.3	21.0	19.5	45.3
PAPA005	02-Apr-16	21	25.0	25.2	24.0	22.6	20.8	38.8
PAPA005	02-Apr-16	22	24.1	24.7	23.5	22.4	20.6	35.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	02-Apr-16	23	22.9	24.4	23.1	20.1	18.8	27.5
PAPA005	03-Apr-16	0	23.5	24.9	23.1	22.1	20.8	29.1
PAPA005	03-Apr-16	1	21.0	22.2	20.6	19.1	17.3	31.8
PAPA005	03-Apr-16	2	23.9	26.5	22.6	20.7	18.6	31.7
PAPA005	03-Apr-16	3	29.0	31.5	28.3	25.0	22.1	36.8
PAPA005	03-Apr-16	4	27.6	29.8	26.7	25.1	23.4	34.7
PAPA005	03-Apr-16	5	25.3	27.7	24.7	22.5	20.3	30.8
PAPA005	03-Apr-16	6	26.6	27.6	24.6	21.2	19.6	45.4
PAPA005	03-Apr-16	7	26.9	27.9	25.0	23.6	21.9	43.1
PAPA005	03-Apr-16	8	25.7	26.7	23.8	21.9	19.8	40.7
PAPA005	03-Apr-16	9	33.5	27.5	20.4	18.7	17.6	57.4
PAPA005	03-Apr-16	10	34.2	23.9	21.1	19.8	18.5	61.9
PAPA005	03-Apr-16	11	44.7	31.9	24.7	21.1	18.5	75.5
PAPA005	03-Apr-16	12	36.3	36.2	29.6	25.4	22.2	58.8
PAPA005	03-Apr-16	13	31.7	35.5	28.5	24.3	21.7	46.4
PAPA005	03-Apr-16	14	30.8	34.6	27.3	23.0	20.1	44.3
PAPA005	03-Apr-16	15	29.7	33.2	26.1	22.3	20.2	44.2
PAPA005	03-Apr-16	16	28.3	31.6	24.6	21.3	19.5	48.1
PAPA005	03-Apr-16	17	27.6	30.4	23.8	20.8	19.1	45.3
PAPA005	03-Apr-16	18	23.1	24.9	21.1	19.8	17.2	41.9
PAPA005	03-Apr-16	19	22.4	23.0	21.5	19.9	17.7	35.0
PAPA005	03-Apr-16	20	21.4	23.0	20.6	17.1	16.3	39.2
PAPA005	03-Apr-16	21	27.7	31.6	21.0	19.4	18.0	41.1
PAPA005	03-Apr-16	22	33.0	36.6	29.6	24.4	22.3	46.4
PAPA005	03-Apr-16	23	28.3	31.2	25.6	24.3	22.9	40.9
PAPA005	04-Apr-16	0	27.0	30.2	25.1	23.2	21.0	36.8
PAPA005	04-Apr-16	1	21.7	22.8	21.4	20.1	18.4	29.6
PAPA005	04-Apr-16	2	22.3	23.7	21.6	20.0	18.8	36.6
PAPA005	04-Apr-16	3	27.0	30.5	23.9	21.8	20.1	37.7
PAPA005	04-Apr-16	4	30.2	33.9	28.5	23.1	21.1	36.9
PAPA005	04-Apr-16	5	27.0	28.7	26.7	24.5	23.0	33.8
PAPA005	04-Apr-16	6	31.6	34.2	30.6	28.0	26.5	41.3
PAPA005	04-Apr-16	7	31.1	33.7	29.1	27.2	25.0	45.1
PAPA005	04-Apr-16	8	34.4	38.1	30.8	27.8	24.9	52.7
PAPA005	04-Apr-16	9	36.7	38.5	35.2	32.0	24.6	50.6
PAPA005	04-Apr-16	10	38.8	25.6	20.7	19.4	18.5	69.0
PAPA005	04-Apr-16	11	23.9	24.9	21.5	20.3	19.1	46.9
PAPA005	04-Apr-16	12	28.4	31.2	24.0	21.4	20.4	50.1
PAPA005	04-Apr-16	13	34.1	37.5	29.4	24.6	20.4	52.4
PAPA005	04-Apr-16	14	38.4	42.1	34.5	23.3	20.4	52.5
PAPA005	04-Apr-16	15	27.5	30.1	24.0	21.7	19.4	45.1
PAPA005	04-Apr-16	16	45.5	43.7	27.5	24.2	21.5	75.2
PAPA005	04-Apr-16	17	30.4	31.5	27.7	25.4	23.2	49.7
PAPA005	04-Apr-16	18	38.0	41.7	31.6	26.8	23.8	53.3
PAPA005	04-Apr-16	19	33.3	35.4	32.5	29.9	27.3	44.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	04-Apr-16	20	30.5	32.7	29.3	26.9	25.2	49.9
PAPA005	04-Apr-16	21	25.1	26.5	22.4	20.8	19.0	42.6
PAPA005	04-Apr-16	22	24.0	26.6	23.0	20.2	18.7	29.8
PAPA005	04-Apr-16	23	28.4	31.4	26.8	24.6	22.6	38.6
PAPA005	05-Apr-16	0	31.7	35.6	28.4	24.7	21.5	47.6
PAPA005	05-Apr-16	1	30.6	34.1	26.4	24.9	23.0	47.4
PAPA005	05-Apr-16	2	28.7	30.6	25.8	23.7	20.8	47.3
PAPA005	05-Apr-16	3	26.3	28.9	24.6	21.3	20.1	39.7
PAPA005	05-Apr-16	4	32.4	35.5	29.7	26.0	22.5	46.9
PAPA005	05-Apr-16	5	25.9	27.3	25.5	24.0	21.7	34.3
PAPA005	05-Apr-16	6	29.0	29.3	25.9	24.6	22.2	48.1
PAPA005	05-Apr-16	7	26.4	27.3	25.2	23.9	21.7	42.4
PAPA005	05-Apr-16	8	35.7	37.2	27.7	23.6	21.5	55.5
PAPA005	05-Apr-16	9	41.6	44.9	38.6	33.2	28.3	61.3
PAPA005	05-Apr-16	10	39.5	43.3	35.8	30.8	26.9	54.1
PAPA005	05-Apr-16	11	41.5	45.0	38.9	33.3	27.3	55.5
PAPA005	05-Apr-16	12	44.2	47.2	40.5	34.1	28.4	62.9
PAPA005	05-Apr-16	13	40.5	44.2	37.4	31.3	24.8	55.3
PAPA005	05-Apr-16	14	40.1	43.6	37.5	31.7	27.2	54.3
PAPA005	05-Apr-16	15	42.4	46.1	39.0	32.8	27.1	55.1
PAPA005	05-Apr-16	16	40.8	44.4	38.0	32.5	25.5	54.4
PAPA005	05-Apr-16	17	41.2	44.8	38.5	33.1	27.4	54.0
PAPA005	05-Apr-16	18	36.3	39.9	33.8	28.9	24.8	49.1
PAPA005	05-Apr-16	19	32.5	35.8	29.1	25.3	23.5	49.1
PAPA005	05-Apr-16	20	27.2	28.3	26.1	25.0	23.5	46.4
PAPA005	05-Apr-16	21	26.5	27.2	26.0	25.0	23.3	37.0
PAPA005	05-Apr-16	22	24.8	26.1	24.6	22.9	21.1	30.8
PAPA005	05-Apr-16	23	23.9	25.1	23.6	21.8	20.6	33.6
PAPA005	06-Apr-16	0	23.6	24.8	23.3	22.0	20.0	31.3
PAPA005	06-Apr-16	1	22.0	23.3	21.7	20.8	19.4	26.2
PAPA005	06-Apr-16	2	26.0	25.3	23.8	22.1	20.1	46.8
PAPA005	06-Apr-16	3	24.5	25.8	24.2	23.2	21.8	28.6
PAPA005	06-Apr-16	4	25.8	27.5	25.5	23.4	22.2	31.4
PAPA005	06-Apr-16	5	26.1	27.2	25.9	24.7	23.3	33.4
PAPA005	06-Apr-16	6	27.0	28.4	26.2	24.5	22.5	41.7
PAPA005	06-Apr-16	7	29.7	31.9	28.6	26.4	23.9	42.5
PAPA005	06-Apr-16	8	33.5	36.7	31.4	27.9	25.5	46.6
PAPA005	06-Apr-16	9	37.0	40.1	34.6	29.7	25.8	51.1
PAPA005	06-Apr-16	10	36.8	37.9	32.3	28.4	25.0	60.6
PAPA005	06-Apr-16	11	34.7	37.3	31.3	27.1	23.6	56.1
PAPA005	06-Apr-16	12	38.4	41.8	35.6	30.5	24.6	53.3
PAPA005	06-Apr-16	13	40.4	44.0	36.6	29.6	24.6	57.2
PAPA005	06-Apr-16	14	42.2	45.7	39.3	33.2	27.9	57.7
PAPA005	06-Apr-16	15	41.8	45.5	38.6	32.0	26.4	57.5
PAPA005	06-Apr-16	16	41.1	44.6	38.4	33.0	27.7	54.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	06-Apr-16	17	41.1	43.9	38.1	32.8	26.8	60.6
PAPA005	06-Apr-16	18	34.9	38.2	32.5	28.4	25.9	48.6
PAPA005	06-Apr-16	19	51.2	34.8	27.3	24.3	22.1	76.7
PAPA005	06-Apr-16	20	27.6	25.5	23.9	22.7	20.7	57.3
PAPA005	06-Apr-16	21	25.4	26.8	25.1	23.6	21.3	31.8
PAPA005	06-Apr-16	22	27.4	29.6	26.8	24.7	22.1	33.6
PAPA005	06-Apr-16	23	25.1	25.9	24.6	23.7	22.0	34.4
PAPA005	07-Apr-16	0	23.1	24.4	22.9	21.2	19.6	26.3
PAPA005	07-Apr-16	1	22.7	24.0	22.5	20.8	18.8	26.4
PAPA005	07-Apr-16	2	24.5	26.2	24.2	22.6	20.8	29.9
PAPA005	07-Apr-16	3	24.6	25.8	24.6	22.7	21.2	29.4
PAPA005	07-Apr-16	4	24.8	26.2	24.5	23.2	21.7	30.3
PAPA005	07-Apr-16	5	24.9	26.1	24.6	23.5	22.1	32.9
PAPA005	07-Apr-16	6	27.9	29.9	26.8	25.2	23.3	38.8
PAPA005	07-Apr-16	7	34.7	31.0	26.9	25.4	23.8	56.4
PAPA005	07-Apr-16	8	37.9	36.3	29.5	26.6	23.8	70.6
PAPA005	07-Apr-16	9	34.8	38.1	32.7	28.7	25.4	47.7
PAPA005	07-Apr-16	10	39.2	40.1	33.8	28.8	24.8	63.3
PAPA005	07-Apr-16	11	36.9	39.5	32.7	28.0	24.5	54.4
PAPA005	07-Apr-16	12	37.5	39.9	33.8	28.8	24.4	59.8
PAPA005	07-Apr-16	13	39.5	42.3	35.4	29.9	25.0	57.9
PAPA005	07-Apr-16	14	39.0	42.4	35.8	30.0	24.3	53.7
PAPA005	07-Apr-16	15	35.0	38.5	32.3	26.5	22.1	46.7
PAPA005	07-Apr-16	16	38.1	40.9	34.8	29.8	24.9	56.2
PAPA005	07-Apr-16	17	33.7	37.2	30.8	26.2	22.1	47.5
PAPA005	07-Apr-16	18	29.2	32.4	26.1	22.3	19.9	42.5
PAPA005	07-Apr-16	19	27.5	30.4	25.4	22.7	21.1	40.4
PAPA005	07-Apr-16	20	22.7	24.0	21.6	20.2	18.5	35.8
PAPA005	07-Apr-16	21	23.3	25.6	22.7	19.1	17.6	33.6
PAPA005	07-Apr-16	22	25.2	26.8	24.6	23.2	21.7	36.1
PAPA005	07-Apr-16	23	26.1	28.3	25.6	22.0	18.5	40.4
PAPA005	08-Apr-16	0	27.4	30.9	25.1	21.7	20.1	35.7
PAPA005	08-Apr-16	1	25.0	27.3	24.2	22.1	20.3	31.2
PAPA005	08-Apr-16	2	29.6	32.4	28.5	25.9	24.3	35.9
PAPA005	08-Apr-16	3	29.9	32.4	29.0	26.1	23.6	37.0
PAPA005	08-Apr-16	4	27.8	30.4	27.3	24.1	22.8	34.1
PAPA005	08-Apr-16	5	31.8	33.9	31.1	28.5	26.3	40.4
PAPA005	08-Apr-16	6	33.0	35.1	31.7	27.8	23.9	47.4
PAPA005	08-Apr-16	7	38.1	35.7	32.3	30.4	28.5	58.6
PAPA005	08-Apr-16	8	31.0	32.9	29.1	26.8	24.7	49.3
PAPA005	08-Apr-16	9	41.5	27.3	23.1	19.6	18.0	69.1
PAPA005	08-Apr-16	10	42.2	21.6	19.4	18.5	17.7	69.6
PAPA005	08-Apr-16	11	24.3	23.5	21.4	20.2	18.9	55.9
PAPA005	08-Apr-16	12	34.6	29.1	22.3	20.4	19.0	58.3
PAPA005	08-Apr-16	13	32.3	29.2	22.5	20.3	19.0	65.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	08-Apr-16	14	24.2	26.5	21.9	19.9	18.7	40.8
PAPA005	08-Apr-16	15	27.2	30.5	23.4	20.7	19.1	41.2
PAPA005	08-Apr-16	16	27.1	29.9	22.1	19.6	18.5	44.6
PAPA005	08-Apr-16	17	23.9	26.6	20.6	18.7	17.3	41.0
PAPA005	08-Apr-16	18	28.7	24.7	19.3	18.1	17.2	53.2
PAPA005	08-Apr-16	19	21.5	23.7	20.7	18.6	17.7	36.7
PAPA005	08-Apr-16	20	29.1	29.7	25.9	23.7	22.2	57.7
PAPA005	08-Apr-16	21	28.0	29.9	27.6	25.8	23.7	34.4
PAPA005	08-Apr-16	22	29.8	31.1	29.5	28.3	26.7	42.3
PAPA005	08-Apr-16	23	32.6	34.7	32.1	30.0	28.0	38.9
PAPA005	09-Apr-16	0	34.4	36.4	34.0	31.1	28.7	40.2
PAPA005	09-Apr-16	1	31.2	33.6	30.9	25.8	23.1	40.3
PAPA005	09-Apr-16	2	30.7	32.4	30.4	27.6	24.1	36.3
PAPA005	09-Apr-16	3	31.3	33.5	30.8	28.0	25.8	37.3
PAPA005	09-Apr-16	4	28.0	30.5	27.1	25.3	23.9	34.7
PAPA005	09-Apr-16	5	27.6	29.6	27.7	23.9	21.1	36.5
PAPA005	09-Apr-16	6	27.8	29.6	26.9	24.3	22.5	42.3
PAPA005	09-Apr-16	7	33.8	35.9	33.3	30.9	28.6	40.0
PAPA005	09-Apr-16	8	34.6	36.7	34.7	28.9	25.7	41.5
PAPA005	09-Apr-16	9	25.6	28.3	23.5	21.7	20.7	38.1
PAPA005	09-Apr-16	10	23.0	25.6	21.1	19.3	18.1	34.8
PAPA005	09-Apr-16	11	35.7	31.9	23.7	20.4	18.4	58.5
PAPA005	09-Apr-16	12	31.9	33.3	25.3	21.2	18.9	59.3
PAPA005	09-Apr-16	13	35.1	34.5	26.6	22.2	19.9	63.0
PAPA005	09-Apr-16	14	29.0	32.2	24.7	21.2	19.4	45.7
PAPA005	09-Apr-16	15	27.6	30.8	25.1	21.4	19.5	41.6
PAPA005	09-Apr-16	16	28.4	31.6	25.4	21.4	18.8	44.2
PAPA005	09-Apr-16	17	28.5	31.7	26.4	22.2	19.1	43.5
PAPA005	09-Apr-16	18	27.5	30.4	24.2	21.5	19.3	42.8
PAPA005	09-Apr-16	19	31.3	34.4	28.9	24.9	20.8	47.3
PAPA005	09-Apr-16	20	24.6	26.1	23.3	21.6	20.0	39.8
PAPA005	09-Apr-16	21	24.6	26.3	23.6	22.0	19.8	36.4
PAPA005	09-Apr-16	22	25.9	27.5	22.8	20.9	19.6	43.6
PAPA005	09-Apr-16	23	30.3	33.6	28.2	24.3	21.2	40.5
PAPA005	10-Apr-16	0	28.4	31.7	26.1	23.0	20.5	39.7
PAPA005	10-Apr-16	1	22.9	24.7	22.5	20.8	19.5	27.8
PAPA005	10-Apr-16	2	23.6	24.7	23.4	22.2	20.2	26.6
PAPA005	10-Apr-16	3	23.3	24.7	23.1	21.4	19.5	29.4
PAPA005	10-Apr-16	4	25.4	27.2	25.1	23.3	21.6	31.1
PAPA005	10-Apr-16	5	29.0	30.6	28.7	26.8	24.9	36.0
PAPA005	10-Apr-16	6	25.2	26.5	24.7	23.3	21.9	42.9
PAPA005	10-Apr-16	7	25.7	26.9	24.7	22.8	21.1	39.1
PAPA005	10-Apr-16	8	25.0	26.0	23.5	20.6	18.4	40.1
PAPA005	10-Apr-16	9	30.0	33.5	27.7	23.2	19.1	45.1
PAPA005	10-Apr-16	10	36.7	41.9	28.9	20.0	18.1	49.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA005	10-Apr-16	11	29.2	26.6	19.2	17.9	17.2	56.6
PAPA005	10-Apr-16	12	26.7	26.3	19.7	18.6	18.1	46.0
PAPA005	10-Apr-16	13	22.0	22.5	19.6	18.5	17.6	42.5
PAPA005	10-Apr-16	14	26.8	27.5	22.1	19.0	17.9	49.6
PAPA005	10-Apr-16	15	28.9	28.5	22.0	19.8	18.7	55.7
PAPA005	10-Apr-16	16	47.4	47.7	21.5	19.3	17.9	72.1
PAPA005	10-Apr-16	17	25.2	27.1	22.1	19.6	17.9	43.9
PAPA005	10-Apr-16	18	26.4	29.5	24.6	20.9	19.1	38.4
PAPA005	10-Apr-16	19	28.8	31.3	27.5	24.6	21.8	43.6
PAPA005	10-Apr-16	20	31.0	33.4	30.4	27.0	23.7	39.2
PAPA005	10-Apr-16	21	33.2	36.0	32.5	26.6	23.8	40.2
PAPA005	10-Apr-16	22	30.2	32.4	29.1	26.6	24.0	42.8
PAPA005	10-Apr-16	23	24.6	26.7	23.8	21.7	20.0	37.1
PAPA005	11-Apr-16	0	24.3	24.4	22.8	21.7	20.0	43.5
PAPA005	11-Apr-16	1	21.2	22.5	20.4	19.5	18.5	35.6
PAPA005	11-Apr-16	2	21.6	22.0	20.6	19.4	18.4	38.7
PAPA005	11-Apr-16	3	21.7	23.4	20.5	18.9	18.1	36.4
PAPA005	11-Apr-16	4	22.2	24.0	21.1	19.5	17.9	36.2
PAPA005	11-Apr-16	5	24.7	25.7	23.3	20.0	18.8	43.1
PAPA005	11-Apr-16	6	24.5	26.7	23.9	19.8	17.4	36.8
PAPA005	11-Apr-16	7	26.9	25.7	21.1	18.7	17.5	48.1
PAPA005	11-Apr-16	8	22.6	24.4	20.0	18.7	17.9	38.4
PAPA005	11-Apr-16	9	28.6	24.7	20.4	19.3	18.0	49.0
PAPA005	11-Apr-16	10	28.2	23.7	20.4	19.0	17.8	56.8
PAPA005	11-Apr-16	11	24.0	22.7	20.5	19.4	18.2	50.9
PAPA005	11-Apr-16	12	22.2	24.3	20.3	19.2	18.4	40.9
PAPA006	18-Apr-13	11	29.5	31.9	28.6	26.0	23.2	43.4
PAPA006	18-Apr-13	12	34.8	35.2	31.0	28.1	24.5	60.6
PAPA006	18-Apr-13	13	33.3	36.1	31.7	29.0	26.4	46.1
PAPA006	18-Apr-13	14	34.6	37.3	33.0	30.4	27.5	46.7
PAPA006	18-Apr-13	15	37.6	41.1	35.3	31.7	28.7	50.4
PAPA006	18-Apr-13	16	39.3	41.7	36.2	32.3	29.2	55.4
PAPA006	18-Apr-13	17	36.6	39.5	34.8	30.7	27.2	49.1
PAPA006	18-Apr-13	18	38.0	41.3	35.3	31.5	28.4	52.9
PAPA006	18-Apr-13	19	41.0	44.1	39.0	35.4	30.6	54.2
PAPA006	18-Apr-13	20	37.4	40.1	36.0	32.6	30.3	51.3
PAPA006	18-Apr-13	21	35.7	38.5	34.1	31.4	29.6	47.0
PAPA006	18-Apr-13	22	33.8	35.7	32.8	30.7	28.9	45.9
PAPA006	18-Apr-13	23	31.3	33.1	30.7	29.1	27.4	39.8
PAPA006	19-Apr-13	0	32.4	34.3	31.8	30.0	27.7	39.3
PAPA006	19-Apr-13	1	32.8	34.3	32.4	30.6	29.1	39.7
PAPA006	19-Apr-13	2	34.2	36.2	33.7	31.8	27.9	39.2
PAPA006	19-Apr-13	3	31.7	33.4	31.3	29.3	27.0	38.9
PAPA006	19-Apr-13	4	33.2	34.8	32.8	31.0	29.5	39.7
PAPA006	19-Apr-13	5	32.9	34.3	32.0	30.5	28.7	46.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA006	19-Apr-13	6	46.7	51.7	36.7	33.6	31.7	58.6
PAPA006	19-Apr-13	7	35.6	36.6	34.4	33.1	31.3	50.7
PAPA006	19-Apr-13	8	33.4	34.1	29.9	28.3	26.8	53.0
PAPA006	19-Apr-13	9	29.5	31.2	28.5	27.3	25.8	41.6
PAPA006	19-Apr-13	10	30.0	31.0	28.8	27.4	24.8	45.9
PAPA006	19-Apr-13	11	32.2	34.0	30.2	28.2	26.3	50.9
PAPA006	19-Apr-13	12	30.6	33.0	29.0	26.7	23.8	46.5
PAPA006	19-Apr-13	13	36.9	38.5	31.2	28.0	25.1	58.0
PAPA006	19-Apr-13	14	30.7	33.4	29.0	26.8	25.1	43.6
PAPA006	19-Apr-13	15	34.4	35.6	30.2	27.2	24.8	55.5
PAPA006	19-Apr-13	16	31.0	33.3	29.0	26.5	23.7	47.0
PAPA006	19-Apr-13	17	28.8	30.6	27.6	25.7	23.2	43.7
PAPA006	19-Apr-13	18	26.4	27.9	25.6	24.3	22.6	39.1
PAPA006	19-Apr-13	19	27.6	28.3	26.4	24.3	22.4	44.2
PAPA006	19-Apr-13	20	28.6	30.0	28.2	26.7	25.3	39.8
PAPA006	19-Apr-13	21	29.3	31.3	28.5	26.3	24.6	39.7
PAPA006	19-Apr-13	22	30.4	31.5	27.3	25.5	23.7	45.3
PAPA006	19-Apr-13	23	31.1	32.7	26.6	23.1	21.4	51.6
PAPA006	20-Apr-13	0	31.1	32.1	28.7	25.2	22.0	49.8
PAPA006	20-Apr-13	1	31.1	33.2	29.9	27.4	25.7	45.1
PAPA006	20-Apr-13	2	33.3	35.1	32.1	30.5	28.7	47.1
PAPA006	20-Apr-13	3	35.3	37.7	34.4	31.8	29.9	41.4
PAPA006	20-Apr-13	4	34.8	36.7	33.9	32.4	31.0	42.0
PAPA006	20-Apr-13	5	34.1	35.3	33.3	31.2	30.0	52.6
PAPA006	20-Apr-13	6	48.2	54.0	37.8	33.1	31.4	60.4
PAPA006	20-Apr-13	7	35.8	37.3	34.4	31.8	28.4	54.4
PAPA006	20-Apr-13	8	34.0	36.2	32.2	29.2	26.8	48.3
PAPA006	20-Apr-13	9	31.6	33.9	30.2	28.1	25.4	47.7
PAPA006	20-Apr-13	10	32.1	34.2	30.8	28.5	26.3	46.6
PAPA006	20-Apr-13	11	34.6	37.3	32.8	30.2	28.0	48.6
PAPA006	20-Apr-13	12	34.9	37.8	32.8	29.7	27.1	52.0
PAPA006	20-Apr-13	13	32.2	34.7	30.8	28.6	26.2	46.5
PAPA006	20-Apr-13	14	36.2	39.3	33.4	29.8	26.4	50.7
PAPA006	20-Apr-13	15	37.3	41.2	33.9	29.9	26.5	50.2
PAPA006	20-Apr-13	16	35.8	38.7	34.1	31.4	29.0	47.5
PAPA006	20-Apr-13	17	41.4	45.3	36.9	32.1	28.5	54.9
PAPA006	20-Apr-13	18	36.4	39.4	35.0	31.6	27.5	47.7
PAPA006	20-Apr-13	19	31.2	33.7	29.8	27.1	25.0	46.3
PAPA006	20-Apr-13	20	31.5	33.8	31.5	26.9	25.0	38.0
PAPA006	20-Apr-13	21	33.8	35.6	33.2	31.7	29.2	41.4
PAPA006	14-Apr-14	13	26.3	28.1	25.4	24.0	23.1	38.2
PAPA006	14-Apr-14	14	28.1	28.4	26.2	25.2	24.1	47.4
PAPA006	14-Apr-14	15	27.4	28.5	26.5	25.1	23.6	42.0
PAPA006	14-Apr-14	16	29.0	29.3	25.8	24.5	23.2	47.0
PAPA006	14-Apr-14	17	26.3	27.7	25.7	24.7	23.3	36.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA006	14-Apr-14	18	29.0	30.4	28.4	27.1	24.8	38.9
PAPA006	14-Apr-14	19	29.3	30.7	28.8	27.0	25.4	39.8
PAPA006	14-Apr-14	20	31.3	32.6	30.5	29.1	27.8	51.8
PAPA006	14-Apr-14	21	30.0	31.5	29.8	28.0	26.9	36.5
PAPA006	14-Apr-14	22	32.3	32.7	31.4	30.1	28.8	47.6
PAPA006	14-Apr-14	23	30.7	31.8	30.5	29.7	28.5	35.6
PAPA006	15-Apr-14	0	30.3	31.6	30.2	28.5	27.2	34.9
PAPA006	15-Apr-14	1	30.3	32.0	29.9	28.0	26.1	34.7
PAPA006	15-Apr-14	2	31.1	32.4	30.4	29.1	27.0	47.0
PAPA006	15-Apr-14	3	29.9	31.0	29.8	28.5	26.6	40.1
PAPA006	15-Apr-14	4	30.8	32.1	30.4	29.2	27.8	40.9
PAPA006	15-Apr-14	5	33.2	34.4	32.2	30.5	28.9	48.0
PAPA006	15-Apr-14	6	32.5	34.1	32.0	30.4	28.4	41.6
PAPA006	15-Apr-14	7	31.7	33.5	31.3	29.2	27.3	41.5
PAPA006	15-Apr-14	8	32.3	33.4	30.1	27.0	25.3	50.7
PAPA006	15-Apr-14	9	30.8	32.3	29.0	25.5	23.5	47.1
PAPA006	15-Apr-14	10	46.6	29.4	25.7	24.6	23.5	67.3
PAPA006	15-Apr-14	11	26.5	28.0	25.5	24.4	23.2	37.8
PAPA006	15-Apr-14	12	37.2	28.2	25.4	24.5	23.7	68.2
PAPA006	15-Apr-14	13	43.6	32.8	25.6	24.5	23.2	68.3
PAPA006	15-Apr-14	14	44.1	47.8	40.3	34.5	30.6	60.3
PAPA006	15-Apr-14	15	45.9	49.5	41.8	35.2	30.0	64.3
PAPA006	15-Apr-14	16	46.3	50.4	41.7	34.8	30.2	63.7
PAPA006	15-Apr-14	17	43.5	47.6	39.6	32.9	29.7	57.4
PAPA006	15-Apr-14	18	40.2	43.5	33.8	29.5	25.6	56.6
PAPA006	15-Apr-14	19	43.9	47.8	38.2	31.9	28.3	59.8
PAPA006	15-Apr-14	20	44.1	48.0	39.4	32.7	30.1	59.6
PAPA006	15-Apr-14	21	40.6	44.1	37.0	32.5	29.5	55.0
PAPA006	15-Apr-14	22	33.5	35.6	32.3	30.3	28.0	46.1
PAPA006	15-Apr-14	23	32.2	33.8	31.5	30.1	28.1	42.8
PAPA006	16-Apr-14	0	33.5	35.5	32.4	30.9	29.2	48.5
PAPA006	16-Apr-14	1	34.3	36.4	33.1	31.5	29.6	48.1
PAPA006	16-Apr-14	2	32.2	33.7	31.5	30.1	28.2	44.4
PAPA006	16-Apr-14	3	31.9	33.0	31.5	30.4	28.8	43.7
PAPA006	16-Apr-14	4	32.0	33.2	31.8	30.6	29.0	38.5
PAPA006	16-Apr-14	5	33.2	35.3	32.4	30.5	28.9	44.2
PAPA006	16-Apr-14	6	34.0	35.2	33.8	32.5	30.5	41.8
PAPA006	11-Apr-15	15	37.6	41.2	34.1	28.1	24.0	52.3
PAPA006	11-Apr-15	16	38.0	42.0	33.5	27.2	23.3	54.8
PAPA006	11-Apr-15	17	32.1	35.2	28.3	23.5	20.4	49.0
PAPA006	11-Apr-15	18	36.9	40.5	33.4	28.6	24.5	51.8
PAPA006	11-Apr-15	19	32.0	34.6	29.1	27.0	24.9	48.0
PAPA006	11-Apr-15	20	30.8	32.6	29.4	27.7	25.2	42.6
PAPA006	11-Apr-15	21	28.2	29.7	27.9	26.3	24.6	33.9
PAPA006	11-Apr-15	22	28.0	29.6	27.5	26.0	24.2	35.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA006	11-Apr-15	23	28.3	29.2	27.4	25.8	23.6	43.2
PAPA006	12-Apr-15	0	30.2	32.4	29.6	27.0	25.0	42.6
PAPA006	12-Apr-15	1	27.6	29.6	27.0	25.2	23.3	34.1
PAPA006	12-Apr-15	2	29.4	31.1	29.0	27.4	25.3	37.2
PAPA006	12-Apr-15	3	30.1	32.0	28.7	27.0	25.4	47.3
PAPA006	12-Apr-15	4	29.9	31.8	29.2	27.4	25.3	40.8
PAPA006	12-Apr-15	5	34.5	37.0	32.1	29.8	27.2	52.1
PAPA006	12-Apr-15	6	30.4	32.0	29.8	28.3	26.6	39.5
PAPA006	12-Apr-15	7	28.4	30.0	28.2	25.7	23.0	35.3
PAPA006	12-Apr-15	8	27.5	30.2	24.9	22.8	21.1	44.6
PAPA006	12-Apr-15	9	33.6	36.1	28.2	24.8	21.9	54.8
PAPA006	12-Apr-15	10	32.1	34.9	27.9	24.6	21.9	51.5
PAPA006	12-Apr-15	11	30.6	33.8	26.5	23.4	21.7	47.9
PAPA006	12-Apr-15	12	31.4	33.9	26.4	23.4	21.4	49.7
PAPA006	12-Apr-15	13	34.1	37.4	29.0	24.3	21.8	54.6
PAPA006	12-Apr-15	14	37.5	41.1	33.0	26.8	23.7	53.8
PAPA006	12-Apr-15	15	37.0	40.7	32.3	26.1	22.5	53.8
PAPA006	12-Apr-15	16	34.5	38.3	30.0	25.2	22.1	50.8
PAPA006	12-Apr-15	17	33.5	37.0	30.4	25.9	23.4	48.3
PAPA006	12-Apr-15	18	33.3	36.9	29.8	25.6	22.7	49.2
PAPA006	12-Apr-15	19	27.3	29.0	26.6	24.6	22.0	40.9
PAPA006	12-Apr-15	20	28.9	30.0	28.3	26.8	24.7	41.2
PAPA006	12-Apr-15	21	28.7	30.4	28.4	26.4	24.7	35.9
PAPA006	12-Apr-15	22	27.1	28.5	27.0	25.4	24.0	31.5
PAPA006	12-Apr-15	23	27.7	29.1	27.2	25.8	24.3	36.4
PAPA006	13-Apr-15	0	28.7	30.1	28.5	26.9	24.7	32.8
PAPA006	13-Apr-15	1	29.1	30.4	29.0	27.5	25.9	34.8
PAPA006	13-Apr-15	2	30.3	32.0	29.8	28.3	26.4	37.4
PAPA006	13-Apr-15	3	29.5	30.8	29.2	28.0	26.8	35.1
PAPA006	13-Apr-15	4	29.4	30.5	29.2	28.3	26.5	33.2
PAPA006	13-Apr-15	5	30.0	30.1	29.1	28.2	26.8	47.3
PAPA006	13-Apr-15	6	31.8	30.7	28.8	27.4	26.5	53.3
PAPA006	13-Apr-15	7	37.2	37.9	34.1	30.7	26.5	61.2
PAPA006	13-Apr-15	8	31.5	31.9	26.9	23.8	21.2	54.8
PAPA006	13-Apr-15	9	25.9	27.3	23.6	21.6	19.8	46.9
PAPA006	13-Apr-15	10	30.7	23.4	22.0	21.0	20.1	62.0
PAPA006	13-Apr-15	11	22.8	23.2	21.5	20.7	19.4	42.8
PAPA006	13-Apr-15	12	24.2	26.2	22.1	20.9	19.8	44.9
PAPA006	13-Apr-15	13	30.8	27.7	22.8	21.3	20.1	51.0
PAPA006	13-Apr-15	14	23.6	25.4	22.2	21.1	19.7	39.3
PAPA006	01-Apr-16	16	39.0	32.7	24.8	22.3	20.6	62.6
PAPA006	01-Apr-16	17	30.3	26.4	23.2	21.6	19.5	59.5
PAPA006	01-Apr-16	18	25.8	28.0	24.3	22.6	20.7	39.5
PAPA006	01-Apr-16	19	27.7	29.6	26.7	24.1	21.5	41.6
PAPA006	01-Apr-16	20	28.8	30.9	27.8	25.8	24.3	44.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA006	01-Apr-16	21	28.4	30.0	27.7	26.3	24.7	37.6
PAPA006	01-Apr-16	22	29.2	30.7	28.8	27.7	26.5	38.6
PAPA006	01-Apr-16	23	29.5	30.5	29.2	27.8	26.5	39.5
PAPA006	02-Apr-16	0	31.2	32.8	30.9	29.5	27.6	36.0
PAPA006	02-Apr-16	1	31.6	32.0	29.8	28.6	26.8	53.0
PAPA006	02-Apr-16	2	29.8	31.1	29.7	27.6	26.0	35.3
PAPA006	02-Apr-16	3	30.3	31.9	29.9	28.0	25.9	36.2
PAPA006	02-Apr-16	4	31.3	32.8	30.5	28.3	25.8	47.8
PAPA006	02-Apr-16	5	30.8	33.1	29.9	27.9	25.2	39.3
PAPA006	02-Apr-16	6	31.1	32.4	30.0	28.5	27.0	47.2
PAPA006	02-Apr-16	7	32.4	35.0	30.3	28.5	27.1	45.4
PAPA006	02-Apr-16	8	28.6	31.3	27.2	25.2	23.0	36.8
PAPA006	02-Apr-16	9	26.3	27.7	25.3	24.0	22.0	35.0
PAPA006	02-Apr-16	10	24.8	26.6	23.7	22.0	20.0	38.2
PAPA006	02-Apr-16	11	37.1	25.2	22.3	20.8	19.3	65.5
PAPA006	02-Apr-16	12	26.8	29.5	24.4	21.6	19.7	43.3
PAPA006	02-Apr-16	13	29.3	32.4	26.0	23.1	21.1	43.8
PAPA006	02-Apr-16	14	29.4	32.6	26.7	23.0	20.6	43.2
PAPA006	02-Apr-16	15	33.3	33.6	26.5	23.0	20.8	55.9
PAPA006	02-Apr-16	16	32.7	35.8	29.2	24.8	21.3	51.7
PAPA006	02-Apr-16	17	31.6	34.7	29.0	25.5	22.5	45.3
PAPA006	02-Apr-16	18	30.7	34.0	28.4	24.6	22.3	44.6
PAPA006	02-Apr-16	19	29.1	30.9	28.0	26.1	23.6	45.7
PAPA006	02-Apr-16	20	28.5	30.0	28.2	26.4	24.7	36.4
PAPA006	02-Apr-16	21	28.8	30.4	28.1	25.8	24.2	42.5
PAPA006	02-Apr-16	22	28.3	30.5	27.3	25.7	23.7	37.8
PAPA006	02-Apr-16	23	28.1	30.0	27.9	25.2	23.2	33.5
PAPA006	03-Apr-16	0	27.0	28.4	26.7	25.6	24.0	30.7
PAPA006	03-Apr-16	1	27.9	29.7	27.3	26.1	25.2	33.7
PAPA006	03-Apr-16	2	30.0	32.2	29.4	27.0	24.9	36.5
PAPA006	03-Apr-16	3	30.6	32.8	30.1	27.4	25.0	36.6
PAPA006	03-Apr-16	4	29.2	31.0	28.5	27.1	25.5	37.2
PAPA006	03-Apr-16	5	27.3	28.7	27.2	25.1	22.8	30.7
PAPA006	03-Apr-16	6	29.0	30.2	28.8	27.5	26.3	33.4
PAPA006	03-Apr-16	7	29.6	30.4	28.1	26.4	24.2	47.9
PAPA006	03-Apr-16	8	34.1	31.5	28.4	25.1	21.0	53.7
PAPA006	03-Apr-16	9	31.8	29.0	22.7	21.5	20.4	53.5
PAPA006	03-Apr-16	10	24.0	24.3	22.1	20.8	19.1	42.7
PAPA006	03-Apr-16	11	28.9	32.6	25.4	22.2	20.4	43.5
PAPA006	03-Apr-16	12	34.9	38.1	30.2	25.5	21.7	52.8
PAPA006	03-Apr-16	13	33.7	37.2	30.3	25.2	22.3	50.9
PAPA006	03-Apr-16	14	31.9	35.2	27.8	23.4	20.3	49.2
PAPA006	03-Apr-16	15	29.7	33.1	26.4	22.9	21.0	43.5
PAPA006	03-Apr-16	16	28.7	32.1	26.2	23.0	20.6	41.7
PAPA006	03-Apr-16	17	26.7	28.8	24.4	21.9	19.5	48.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA006	03-Apr-16	18	31.0	24.9	22.5	20.9	19.2	60.1
PAPA006	03-Apr-16	19	26.6	28.7	25.9	22.4	20.0	38.0
PAPA006	03-Apr-16	20	27.1	28.7	26.7	25.2	23.5	33.6
PAPA006	03-Apr-16	21	29.9	32.7	27.5	25.7	24.0	44.4
PAPA006	03-Apr-16	22	33.7	36.3	31.8	28.8	24.8	46.6
PAPA006	03-Apr-16	23	28.3	29.8	27.6	25.8	24.0	40.0
PAPA006	04-Apr-16	0	28.0	29.7	27.2	26.0	24.1	36.9
PAPA006	04-Apr-16	1	28.4	29.8	28.1	26.8	24.4	34.0
PAPA006	04-Apr-16	2	29.9	32.3	29.0	26.8	25.3	37.4
PAPA006	04-Apr-16	3	29.0	30.7	28.7	26.8	25.0	35.1
PAPA006	04-Apr-16	4	30.0	31.6	29.7	28.1	26.0	36.3
PAPA006	04-Apr-16	5	30.0	33.2	28.0	26.3	25.0	37.8
PAPA006	04-Apr-16	6	31.3	32.9	31.0	29.2	26.9	40.6
PAPA006	04-Apr-16	7	33.2	34.7	32.6	29.3	26.9	48.9
PAPA006	04-Apr-16	8	33.4	35.3	32.9	27.6	24.9	52.5
PAPA006	04-Apr-16	9	29.3	32.6	27.5	23.0	21.0	38.1
PAPA006	04-Apr-16	10	23.1	23.5	21.4	20.5	19.3	39.1
PAPA006	04-Apr-16	11	27.0	28.8	23.1	21.0	19.3	45.4
PAPA006	04-Apr-16	12	27.1	29.0	23.0	20.9	19.5	44.1
PAPA006	04-Apr-16	13	31.4	34.1	26.1	22.7	20.2	47.0
PAPA006	04-Apr-16	14	36.3	40.1	31.1	21.9	19.1	54.5
PAPA006	04-Apr-16	15	28.3	31.3	24.4	21.3	19.7	44.0
PAPA006	04-Apr-16	16	55.8	44.9	28.2	22.1	19.9	88.0
PAPA006	04-Apr-16	17	30.3	29.3	25.1	22.8	20.6	54.1
PAPA006	11-Apr-16	16	26.3	28.8	23.1	21.1	19.3	42.5
PAPA006	11-Apr-16	17	27.0	28.3	22.5	20.5	18.8	44.9
PAPA006	11-Apr-16	18	24.1	26.0	21.6	20.0	18.4	39.5
PAPA006	11-Apr-16	19	31.1	33.6	26.7	24.4	22.1	51.1
PAPA006	11-Apr-16	20	29.2	28.9	25.5	23.7	22.0	50.3
PAPA006	11-Apr-16	21	25.5	27.1	24.3	23.1	21.6	37.9
PAPA006	11-Apr-16	22	29.8	29.5	27.0	24.7	22.5	50.7
PAPA006	11-Apr-16	23	27.8	28.5	26.7	24.8	23.3	44.6
PAPA006	12-Apr-16	0	30.2	33.4	26.8	25.3	23.6	47.4
PAPA006	12-Apr-16	1	29.2	31.5	28.6	25.3	22.2	34.7
PAPA006	12-Apr-16	2	29.7	31.3	29.1	27.7	25.9	37.5
PAPA006	12-Apr-16	3	29.4	30.6	29.2	28.1	25.6	37.7
PAPA006	12-Apr-16	4	28.1	29.4	27.8	26.6	24.7	35.2
PAPA006	12-Apr-16	5	33.2	30.4	27.1	25.5	24.2	54.5
PAPA006	12-Apr-16	6	35.1	37.6	30.6	27.0	24.5	50.0
PAPA006	12-Apr-16	7	35.2	33.8	30.5	28.6	26.3	56.4
PAPA006	12-Apr-16	8	32.6	33.7	29.6	26.4	24.2	54.0
PAPA006	12-Apr-16	9	30.2	31.4	27.9	24.4	20.8	51.4
PAPA006	12-Apr-16	10	41.6	31.2	24.1	21.1	19.0	71.2
PAPA006	12-Apr-16	11	25.0	27.6	23.6	21.2	19.5	40.5
PAPA006	12-Apr-16	12	35.2	33.2	24.2	21.4	19.2	58.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA006	12-Apr-16	13	48.9	43.7	26.7	21.6	19.5	77.0
PAPA006	12-Apr-16	14	42.1	33.1	22.7	20.8	18.4	63.5
PAPA006	12-Apr-16	15	34.8	34.8	23.5	20.9	19.3	55.5
PAPA006	12-Apr-16	16	25.5	26.8	21.9	20.0	18.7	52.3
PAPA006	12-Apr-16	17	25.4	26.6	21.3	19.5	18.2	45.8
PAPA006	12-Apr-16	18	22.1	23.7	21.2	19.7	18.5	34.0
PAPA006	12-Apr-16	19	26.0	28.1	23.6	21.0	19.2	41.9
PAPA006	12-Apr-16	20	32.9	29.8	27.0	25.5	23.3	59.4
PAPA006	12-Apr-16	21	28.9	30.2	27.3	25.7	24.0	46.1
PAPA006	12-Apr-16	22	27.1	28.6	26.9	24.6	22.7	36.9
PAPA006	12-Apr-16	23	25.9	27.4	25.6	23.9	22.3	40.8
PAPA006	13-Apr-16	0	26.9	28.9	26.2	24.9	23.2	39.2
PAPA006	13-Apr-16	1	27.0	28.5	26.6	25.0	23.6	36.9
PAPA006	13-Apr-16	2	29.6	31.6	29.2	27.1	26.0	36.5
PAPA006	13-Apr-16	3	29.5	30.8	29.3	27.8	26.0	41.5
PAPA006	13-Apr-16	4	30.6	32.4	30.1	28.0	26.1	41.8
PAPA006	13-Apr-16	5	31.4	32.9	31.2	29.2	27.2	40.4
PAPA006	13-Apr-16	6	33.2	35.5	32.2	28.3	23.8	43.3
PAPA006	13-Apr-16	7	32.9	34.3	28.7	25.5	23.7	51.6
PAPA006	13-Apr-16	10	52.4	37.8	26.1	23.5	20.7	76.7
PAPA006	13-Apr-16	11	36.7	37.8	27.2	24.2	20.8	62.1
PAPA006	13-Apr-16	12	33.7	36.5	32.2	27.6	24.6	53.8
PAPA006	13-Apr-16	13	32.0	34.8	29.5	27.3	23.9	50.4
PAPA006	13-Apr-16	14	31.5	34.6	29.5	26.5	23.8	41.1
PAPA006	13-Apr-16	15	34.8	38.8	29.3	26.1	23.5	52.6
PAPA006	13-Apr-16	16	33.0	32.5	28.4	25.6	23.0	52.9
PAPA006	13-Apr-16	17	35.3	35.6	31.5	27.7	24.4	59.4
PAPA006	13-Apr-16	18	31.4	31.5	28.0	26.0	23.7	56.5
PAPA006	13-Apr-16	19	35.0	34.4	28.7	26.1	21.1	62.6
PAPA006	13-Apr-16	20	34.0	36.0	33.7	29.3	21.9	44.3
PAPA006	13-Apr-16	21	34.2	36.0	34.0	31.2	29.5	39.8
PAPA006	13-Apr-16	22	32.2	35.2	31.1	28.2	25.3	40.1
PAPA006	13-Apr-16	23	30.8	34.0	29.3	26.5	24.6	41.0
PAPA007	10-Apr-13	10	27.9	29.2	26.0	24.5	23.3	48.6
PAPA007	10-Apr-13	11	29.6	29.1	26.3	24.6	22.7	52.8
PAPA007	10-Apr-13	12	43.1	28.7	25.5	24.1	22.4	73.2
PAPA007	10-Apr-13	13	26.0	28.3	24.9	23.2	21.4	37.3
PAPA007	10-Apr-13	14	27.8	30.1	26.5	24.7	23.2	42.7
PAPA007	10-Apr-13	15	27.8	30.2	26.0	24.2	21.4	41.2
PAPA007	10-Apr-13	16	33.3	37.0	28.2	24.7	22.3	48.8
PAPA007	10-Apr-13	17	35.0	38.5	31.8	26.8	23.8	48.8
PAPA007	10-Apr-13	18	39.2	42.8	36.3	31.0	26.7	54.3
PAPA007	10-Apr-13	19	36.7	40.2	34.2	29.9	26.6	50.0
PAPA007	10-Apr-13	20	35.2	38.3	32.5	28.6	25.1	49.6
PAPA007	10-Apr-13	21	29.3	32.0	27.5	24.9	22.8	44.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	10-Apr-13	22	28.0	30.9	24.1	22.2	20.6	45.0
PAPA007	10-Apr-13	23	24.3	26.3	23.2	21.9	20.4	36.7
PAPA007	11-Apr-13	0	22.3	23.6	22.0	19.9	18.1	34.1
PAPA007	11-Apr-13	1	23.1	24.7	23.0	20.5	18.9	32.8
PAPA007	11-Apr-13	2	24.6	25.8	23.7	22.5	21.0	38.3
PAPA007	11-Apr-13	3	24.0	25.2	23.5	21.9	19.7	39.2
PAPA007	11-Apr-13	4	23.4	24.7	23.0	21.7	20.3	31.4
PAPA007	11-Apr-13	5	25.4	27.3	24.4	22.7	21.5	37.4
PAPA007	11-Apr-13	6	28.3	30.1	27.8	25.7	23.0	38.5
PAPA007	11-Apr-13	7	27.6	29.0	26.2	24.5	22.3	45.8
PAPA007	11-Apr-13	8	28.9	30.8	27.7	25.3	22.7	44.4
PAPA007	11-Apr-13	9	31.7	35.5	28.0	24.3	20.8	45.4
PAPA007	11-Apr-13	10	36.1	39.8	32.9	27.0	22.6	52.0
PAPA007	11-Apr-13	11	36.5	40.4	33.4	27.4	22.1	47.6
PAPA007	11-Apr-13	12	35.7	39.2	33.2	27.4	21.7	49.1
PAPA007	11-Apr-13	13	35.2	38.8	32.0	26.0	21.4	50.8
PAPA007	11-Apr-13	14	33.9	37.5	30.5	24.7	20.9	47.7
PAPA007	11-Apr-13	15	35.3	38.9	32.0	26.7	21.8	50.8
PAPA007	11-Apr-13	16	35.9	39.7	33.2	25.8	19.6	50.0
PAPA007	11-Apr-13	17	34.6	38.1	31.4	25.8	20.4	49.1
PAPA007	11-Apr-13	18	35.7	39.3	33.2	28.6	23.1	50.2
PAPA007	11-Apr-13	19	31.7	35.0	28.8	23.4	19.5	46.6
PAPA007	11-Apr-13	20	27.0	29.6	25.0	22.6	20.8	45.0
PAPA007	11-Apr-13	21	25.0	27.1	24.1	22.2	20.0	37.5
PAPA007	11-Apr-13	22	24.5	26.4	23.8	22.0	20.2	33.2
PAPA007	11-Apr-13	23	23.7	25.4	23.2	21.8	20.4	30.1
PAPA007	12-Apr-13	0	23.8	25.2	21.6	20.2	18.7	38.6
PAPA007	12-Apr-13	1	22.8	25.1	22.1	20.0	18.0	30.8
PAPA007	12-Apr-13	2	23.6	24.5	20.3	18.7	17.1	40.5
PAPA007	12-Apr-13	3	22.3	24.5	21.8	19.5	18.3	28.2
PAPA007	12-Apr-13	4	23.5	26.0	22.2	20.1	17.9	39.1
PAPA007	12-Apr-13	5	26.1	27.8	24.1	21.4	19.4	44.0
PAPA007	12-Apr-13	6	26.9	29.1	25.9	23.7	21.8	38.0
PAPA007	12-Apr-13	7	26.9	28.6	26.0	24.1	22.4	46.2
PAPA007	12-Apr-13	8	27.3	29.5	24.8	21.5	19.5	49.3
PAPA007	12-Apr-13	9	29.0	30.7	22.9	20.4	18.6	48.9
PAPA007	12-Apr-13	10	32.4	35.8	29.7	24.1	19.7	48.0
PAPA007	14-Apr-14	16	35.5	28.4	25.2	23.5	21.8	58.6
PAPA007	14-Apr-14	17	26.1	26.9	23.5	21.7	20.4	43.8
PAPA007	14-Apr-14	18	23.0	24.4	22.3	21.1	19.0	33.7
PAPA007	14-Apr-14	19	30.2	31.5	25.1	22.7	20.6	53.6
PAPA007	14-Apr-14	20	32.3	35.4	30.3	26.0	23.4	44.7
PAPA007	14-Apr-14	21	25.5	27.4	24.6	22.7	21.0	34.5
PAPA007	14-Apr-14	22	24.2	26.1	23.4	21.7	20.1	33.7
PAPA007	14-Apr-14	23	20.2	21.6	19.9	18.6	17.3	25.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	15-Apr-14	0	20.8	22.4	20.4	19.1	18.2	29.3
PAPA007	15-Apr-14	1	22.1	23.3	22.0	20.4	18.8	29.5
PAPA007	15-Apr-14	2	24.8	25.0	23.5	21.5	20.4	47.0
PAPA007	15-Apr-14	3	23.5	24.9	23.1	21.9	20.3	30.3
PAPA007	15-Apr-14	4	24.0	25.4	23.5	22.4	20.9	29.8
PAPA007	15-Apr-14	5	24.0	25.5	23.2	21.9	20.4	34.9
PAPA007	15-Apr-14	6	32.9	31.8	27.1	25.5	23.8	59.7
PAPA007	15-Apr-14	7	33.4	33.4	27.4	25.8	24.1	54.0
PAPA007	15-Apr-14	8	42.3	33.6	28.2	26.1	22.7	66.7
PAPA007	15-Apr-14	9	27.9	30.5	25.5	22.9	20.5	39.5
PAPA007	15-Apr-14	10	39.3	30.7	23.7	21.6	20.2	68.3
PAPA007	15-Apr-14	11	28.8	29.1	23.6	21.3	19.8	57.1
PAPA007	15-Apr-14	12	40.0	31.9	25.0	21.3	18.6	65.9
PAPA007	15-Apr-14	13	40.6	44.6	37.5	24.0	20.7	55.5
PAPA007	15-Apr-14	14	43.7	47.3	41.0	35.4	28.8	58.9
PAPA007	15-Apr-14	15	43.6	47.1	41.2	35.5	29.6	59.6
PAPA007	15-Apr-14	16	42.5	45.8	40.2	34.5	28.9	55.3
PAPA007	15-Apr-14	17	44.4	47.9	41.6	35.1	29.7	60.6
PAPA007	15-Apr-14	18	45.5	49.1	42.6	36.9	32.0	59.2
PAPA007	15-Apr-14	19	35.3	39.1	30.7	26.0	21.4	52.1
PAPA007	15-Apr-14	20	34.7	37.7	31.7	27.1	22.7	53.3
PAPA007	15-Apr-14	21	33.5	35.6	30.9	27.9	25.3	48.6
PAPA007	15-Apr-14	22	32.5	35.9	28.7	25.2	21.6	47.5
PAPA007	15-Apr-14	23	29.6	32.4	27.9	24.5	20.9	41.7
PAPA007	16-Apr-14	0	29.1	31.7	27.8	25.0	22.7	39.5
PAPA007	16-Apr-14	1	27.9	30.1	26.9	25.0	22.5	43.3
PAPA007	16-Apr-14	2	29.1	32.3	27.0	24.7	22.3	41.5
PAPA007	16-Apr-14	3	28.4	30.6	27.4	24.4	21.9	42.4
PAPA007	16-Apr-14	4	30.7	33.7	29.8	24.7	22.2	39.6
PAPA007	16-Apr-14	5	29.5	32.3	27.7	25.7	23.5	41.3
PAPA007	16-Apr-14	6	31.3	33.2	29.4	26.6	23.7	45.6
PAPA007	16-Apr-14	7	33.9	30.5	27.0	24.8	22.1	57.8
PAPA007	16-Apr-14	8	34.1	33.2	28.3	24.3	20.7	54.8
PAPA007	16-Apr-14	9	36.1	32.0	26.9	23.5	20.2	61.5
PAPA007	16-Apr-14	10	28.6	31.7	26.8	23.2	20.1	39.5
PAPA007	04-Apr-15	13	26.2	29.1	23.5	21.1	19.2	41.3
PAPA007	04-Apr-15	14	40.7	44.2	34.0	25.9	20.8	58.8
PAPA007	04-Apr-15	15	39.6	43.6	34.8	27.9	22.3	56.3
PAPA007	04-Apr-15	16	42.4	44.0	35.1	28.5	22.7	66.5
PAPA007	04-Apr-15	17	45.4	49.2	41.5	34.1	25.6	59.4
PAPA007	04-Apr-15	18	41.6	45.4	37.0	30.7	25.4	56.3
PAPA007	04-Apr-15	19	31.0	33.6	29.1	26.7	22.7	45.8
PAPA007	04-Apr-15	20	38.6	34.5	30.6	28.3	25.3	66.4
PAPA007	04-Apr-15	21	29.5	31.7	28.7	26.6	23.1	37.6
PAPA007	04-Apr-15	22	29.7	32.2	29.0	26.5	22.5	39.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	04-Apr-15	23	31.2	33.4	30.1	28.2	26.2	39.9
PAPA007	05-Apr-15	0	28.5	31.1	28.1	20.7	18.6	38.8
PAPA007	05-Apr-15	1	25.5	26.7	22.8	20.4	18.7	47.9
PAPA007	05-Apr-15	2	24.3	25.9	23.8	22.0	19.8	38.7
PAPA007	05-Apr-15	3	27.0	29.4	26.2	23.9	20.6	33.8
PAPA007	05-Apr-15	4	29.6	31.0	28.9	26.8	23.6	52.0
PAPA007	05-Apr-15	5	31.0	33.9	29.9	27.4	25.4	39.7
PAPA007	05-Apr-15	6	35.9	39.0	34.6	30.0	27.2	48.1
PAPA007	05-Apr-15	7	44.6	39.9	34.4	29.7	25.3	69.9
PAPA007	05-Apr-15	8	34.6	37.4	33.3	30.2	27.5	44.8
PAPA007	05-Apr-15	9	27.4	29.2	25.4	23.4	21.3	44.9
PAPA007	05-Apr-15	10	29.0	31.4	24.8	22.2	20.0	47.0
PAPA007	05-Apr-15	11	31.0	34.2	27.1	22.6	19.5	46.5
PAPA007	05-Apr-15	12	40.4	44.2	33.8	26.5	22.0	57.7
PAPA007	05-Apr-15	13	43.0	46.4	38.3	30.5	24.9	67.8
PAPA007	05-Apr-15	14	42.4	46.2	37.6	29.4	24.1	57.3
PAPA007	05-Apr-15	15	40.7	44.5	35.9	29.1	23.6	59.6
PAPA007	05-Apr-15	16	41.1	44.5	35.3	29.1	24.3	58.2
PAPA007	05-Apr-15	17	36.9	40.8	33.5	28.7	24.0	52.6
PAPA007	05-Apr-15	18	33.8	37.1	30.7	26.7	22.7	52.4
PAPA007	05-Apr-15	19	31.0	34.1	29.4	26.7	23.5	41.2
PAPA007	05-Apr-15	20	29.9	31.9	28.4	26.5	23.6	47.6
PAPA007	05-Apr-15	21	26.6	29.0	25.7	22.0	19.3	41.7
PAPA007	05-Apr-15	22	26.3	27.7	25.8	23.5	21.4	43.0
PAPA007	05-Apr-15	23	26.7	29.2	23.5	20.7	18.7	43.5
PAPA007	06-Apr-15	0	28.0	30.8	26.3	22.7	20.4	41.5
PAPA007	06-Apr-15	1	29.6	30.8	27.9	26.2	24.4	46.9
PAPA007	06-Apr-15	2	28.3	29.3	26.7	25.4	23.0	38.7
PAPA007	06-Apr-15	3	27.6	29.5	26.9	25.0	23.3	38.0
PAPA007	06-Apr-15	4	31.4	34.5	29.7	26.7	24.9	42.5
PAPA007	06-Apr-15	5	32.0	34.5	30.6	28.9	27.3	43.6
PAPA007	06-Apr-15	6	37.7	40.1	37.1	33.4	28.7	52.7
PAPA007	06-Apr-15	7	35.0	37.6	33.8	30.3	26.8	45.7
PAPA007	06-Apr-15	8	40.0	36.2	33.2	31.2	28.4	66.5
PAPA007	06-Apr-15	9	29.8	33.1	25.8	23.6	21.9	45.7
PAPA007	06-Apr-15	10	32.4	34.5	26.8	23.7	20.8	51.4
PAPA007	06-Apr-15	11	41.7	45.6	38.1	31.8	26.2	56.8
PAPA007	06-Apr-15	12	43.7	47.6	40.0	33.2	27.0	55.8
PAPA007	06-Apr-15	13	41.3	45.0	36.6	30.1	24.4	57.5
PAPA007	06-Apr-15	14	40.0	42.8	33.7	29.0	24.3	57.8
PAPA007	06-Apr-15	15	41.2	44.7	36.9	31.7	27.3	58.6
PAPA007	06-Apr-15	16	39.0	42.4	34.6	29.8	23.5	57.9
PAPA007	06-Apr-15	17	38.8	42.2	35.7	31.1	25.6	54.2
PAPA007	06-Apr-15	18	41.7	45.2	38.9	34.0	29.8	54.3
PAPA007	06-Apr-15	19	37.6	40.7	35.5	32.1	28.8	50.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	06-Apr-15	20	40.5	43.8	37.3	33.6	30.1	58.4
PAPA007	06-Apr-15	21	36.1	38.6	35.1	32.5	29.2	45.6
PAPA007	06-Apr-15	22	37.6	40.4	35.4	33.0	29.7	49.7
PAPA007	06-Apr-15	23	39.3	42.4	36.7	33.1	29.3	52.8
PAPA007	07-Apr-15	0	35.6	37.8	34.9	32.4	29.6	44.5
PAPA007	07-Apr-15	1	39.2	43.4	35.3	32.0	29.1	50.3
PAPA007	07-Apr-15	2	34.7	37.3	33.8	30.0	26.3	43.2
PAPA007	07-Apr-15	3	35.3	38.4	33.5	31.1	28.5	47.3
PAPA007	07-Apr-15	4	37.9	40.8	36.8	33.2	28.2	45.8
PAPA007	07-Apr-15	5	35.6	38.6	34.3	31.6	29.4	42.2
PAPA007	07-Apr-15	6	40.8	44.7	38.1	34.0	28.5	51.3
PAPA007	07-Apr-15	7	38.3	41.9	36.5	31.7	29.2	47.6
PAPA007	07-Apr-15	8	36.3	37.5	33.2	28.8	24.0	58.7
PAPA007	07-Apr-15	9	29.1	31.7	26.6	24.6	21.6	43.7
PAPA007	07-Apr-15	10	33.2	32.8	29.2	26.5	24.9	54.6
PAPA007	07-Apr-15	11	33.3	34.6	32.4	30.9	28.9	47.0
PAPA007	07-Apr-15	12	31.4	32.6	30.8	28.9	25.4	46.1
PAPA007	07-Apr-15	13	30.8	30.2	28.1	25.9	23.8	51.2
PAPA007	07-Apr-15	14	28.9	31.3	28.2	24.6	22.3	43.0
PAPA007	07-Apr-15	15	27.6	29.8	25.5	23.6	21.8	41.0
PAPA007	07-Apr-15	16	33.7	33.3	27.4	24.7	22.3	54.2
PAPA007	07-Apr-15	17	36.9	39.6	34.0	30.4	26.6	53.2
PAPA007	07-Apr-15	18	33.0	35.2	32.0	29.6	27.0	47.4
PAPA007	07-Apr-15	19	31.3	33.5	30.1	28.1	25.9	40.8
PAPA007	07-Apr-15	20	36.3	38.6	35.7	32.8	30.7	46.6
PAPA007	07-Apr-15	21	33.3	37.5	29.9	27.6	25.9	42.2
PAPA007	07-Apr-15	22	27.0	28.9	26.5	21.9	19.2	43.5
PAPA007	07-Apr-15	23	27.6	30.2	25.8	23.4	20.2	40.3
PAPA007	08-Apr-15	0	27.7	30.4	25.5	22.8	20.7	42.0
PAPA007	08-Apr-15	1	28.9	31.8	27.4	25.0	21.8	39.8
PAPA007	08-Apr-15	2	28.3	30.3	27.5	25.4	21.8	36.8
PAPA007	08-Apr-15	3	23.6	26.0	22.8	19.7	16.8	32.2
PAPA007	08-Apr-15	4	26.6	29.3	25.3	22.2	20.2	39.0
PAPA007	08-Apr-15	5	27.5	30.3	26.4	22.5	19.1	39.7
PAPA007	08-Apr-15	6	29.0	31.5	27.0	21.7	17.1	47.8
PAPA007	08-Apr-15	7	31.8	32.2	27.5	24.3	20.6	56.3
PAPA007	08-Apr-15	8	31.3	32.2	26.3	22.6	19.1	56.3
PAPA007	08-Apr-15	9	25.7	27.8	24.9	22.6	19.1	39.8
PAPA007	08-Apr-15	10	35.8	30.6	25.5	22.9	20.9	66.0
PAPA007	08-Apr-15	11	23.8	25.5	22.3	19.4	17.6	48.1
PAPA007	08-Apr-15	12	24.1	26.2	23.1	20.6	18.5	38.5
PAPA007	08-Apr-15	13	27.2	29.3	25.7	23.2	21.5	41.2
PAPA007	08-Apr-15	14	31.0	32.7	27.7	24.2	21.6	56.9
PAPA007	08-Apr-15	15	30.5	30.8	27.4	25.3	22.3	51.4
PAPA007	08-Apr-15	16	29.3	31.7	28.3	25.1	22.7	41.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	08-Apr-15	17	30.7	32.5	29.7	27.2	23.9	48.3
PAPA007	08-Apr-15	18	30.9	33.6	29.9	26.7	21.6	44.1
PAPA007	08-Apr-15	19	28.1	31.1	26.2	22.3	20.0	41.4
PAPA007	08-Apr-15	20	31.3	33.9	29.6	26.2	22.4	48.7
PAPA007	08-Apr-15	21	31.6	36.0	28.6	21.8	18.7	41.3
PAPA007	08-Apr-15	22	28.8	32.9	24.5	19.6	18.1	41.1
PAPA007	08-Apr-15	23	33.4	36.8	31.5	28.3	24.3	43.5
PAPA007	09-Apr-15	0	31.3	34.0	29.5	24.7	20.7	43.8
PAPA007	09-Apr-15	1	33.2	36.4	31.3	26.1	21.0	46.3
PAPA007	09-Apr-15	2	35.7	38.9	33.6	30.5	28.0	45.6
PAPA007	09-Apr-15	3	37.6	43.0	22.2	19.6	18.1	50.4
PAPA007	09-Apr-15	4	22.7	23.6	21.3	19.7	17.9	40.1
PAPA007	09-Apr-15	5	30.2	35.6	22.7	20.4	18.8	44.5
PAPA007	09-Apr-15	6	33.9	38.1	30.7	20.3	16.7	57.3
PAPA007	09-Apr-15	7	31.2	35.4	27.1	20.1	16.4	46.0
PAPA007	09-Apr-15	8	31.8	34.0	27.1	23.2	20.1	54.0
PAPA007	09-Apr-15	9	25.3	26.8	20.5	18.6	17.1	41.6
PAPA007	09-Apr-15	10	21.0	23.2	19.7	18.3	16.9	34.9
PAPA007	09-Apr-15	11	27.9	27.8	24.4	22.7	20.6	48.2
PAPA007	09-Apr-15	12	25.5	27.2	25.4	23.2	21.3	31.9
PAPA007	09-Apr-15	13	22.9	24.2	22.2	20.9	20.1	34.9
PAPA007	09-Apr-15	14	34.1	28.4	22.2	20.6	19.1	61.3
PAPA007	09-Apr-15	15	24.5	26.7	22.3	20.2	18.8	40.4
PAPA007	09-Apr-15	16	24.7	26.9	22.5	20.4	18.6	40.1
PAPA007	09-Apr-15	17	28.7	31.5	27.3	21.8	19.2	41.4
PAPA007	09-Apr-15	18	24.7	27.0	24.2	20.4	18.7	37.3
PAPA007	09-Apr-15	19	29.1	33.0	27.3	21.4	19.0	39.9
PAPA007	09-Apr-15	20	34.1	36.6	32.4	28.1	25.5	52.1
PAPA007	09-Apr-15	21	29.8	32.1	29.0	27.4	25.1	38.7
PAPA007	09-Apr-15	22	30.2	32.8	28.9	26.6	24.7	40.5
PAPA007	09-Apr-15	23	28.2	30.3	27.3	25.5	23.2	35.4
PAPA007	10-Apr-15	0	28.6	30.6	28.5	25.1	23.2	36.0
PAPA007	10-Apr-15	1	28.1	29.3	26.7	24.8	22.9	49.5
PAPA007	10-Apr-15	2	30.9	33.8	29.6	28.0	26.6	41.2
PAPA007	10-Apr-15	3	31.4	33.3	30.7	29.0	26.6	40.2
PAPA007	10-Apr-15	4	33.5	35.3	33.2	30.7	28.7	40.9
PAPA007	10-Apr-15	5	33.3	36.5	31.4	29.1	27.1	46.3
PAPA007	10-Apr-15	6	36.0	38.7	34.8	31.9	29.5	49.4
PAPA007	10-Apr-15	7	34.1	36.3	32.9	30.9	28.2	51.8
PAPA007	10-Apr-15	8	33.6	35.1	33.0	31.5	29.1	43.1
PAPA007	10-Apr-15	9	33.3	35.6	32.8	29.2	25.4	52.6
PAPA007	10-Apr-15	10	24.7	26.2	24.4	22.9	20.9	31.3
PAPA007	10-Apr-15	11	27.8	26.7	24.0	22.0	20.2	58.2
PAPA007	10-Apr-15	12	23.9	25.5	22.8	21.2	19.5	41.3
PAPA007	10-Apr-15	13	24.2	25.5	22.9	21.3	19.5	40.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	10-Apr-15	14	27.9	28.2	23.7	21.3	19.6	46.6
PAPA007	10-Apr-15	15	31.2	27.3	23.2	21.1	19.5	59.6
PAPA007	10-Apr-15	16	25.0	25.2	22.1	20.3	18.8	52.2
PAPA007	10-Apr-15	17	26.0	28.1	24.1	20.7	18.8	44.3
PAPA007	10-Apr-15	18	23.4	25.2	22.1	19.9	17.7	38.8
PAPA007	10-Apr-15	19	27.3	29.6	24.7	20.9	18.5	45.0
PAPA007	10-Apr-15	20	31.1	34.1	29.2	25.1	21.3	46.8
PAPA007	10-Apr-15	21	29.1	31.8	27.0	24.0	21.3	48.5
PAPA007	10-Apr-15	22	32.7	36.3	30.3	26.0	22.3	47.1
PAPA007	10-Apr-15	23	27.3	29.4	27.2	22.8	20.3	35.8
PAPA007	11-Apr-15	0	28.6	31.4	27.6	24.8	22.2	35.3
PAPA007	11-Apr-15	1	29.3	31.0	28.7	26.9	24.8	36.2
PAPA007	11-Apr-15	2	31.9	33.7	31.7	28.9	27.1	37.9
PAPA007	11-Apr-15	3	31.9	34.7	30.8	28.5	26.2	39.4
PAPA007	11-Apr-15	4	31.5	34.2	30.4	28.4	26.3	43.2
PAPA007	11-Apr-15	5	35.4	38.7	33.8	30.1	26.8	48.5
PAPA007	11-Apr-15	6	35.1	38.4	33.3	29.8	27.3	51.6
PAPA007	11-Apr-15	7	35.3	37.7	34.1	31.7	28.7	46.8
PAPA007	11-Apr-15	8	33.9	37.3	32.5	28.3	25.5	44.1
PAPA007	11-Apr-15	9	29.3	31.2	28.2	26.0	24.2	43.5
PAPA007	11-Apr-15	10	30.6	31.3	28.1	25.5	23.2	50.3
PAPA007	11-Apr-15	11	31.5	31.2	26.1	23.3	21.6	62.8
PAPA007	11-Apr-15	12	38.1	41.4	32.1	26.4	23.0	56.2
PAPA007	11-Apr-15	13	36.2	39.9	32.2	26.9	23.3	50.0
PAPA007	11-Apr-15	14	37.0	40.3	32.8	26.6	22.3	51.8
PAPA007	11-Apr-15	15	38.8	42.6	34.2	27.3	22.2	56.5
PAPA007	11-Apr-15	16	35.3	38.5	31.5	27.1	22.6	55.6
PAPA007	11-Apr-15	17	37.0	40.5	33.8	28.6	24.4	53.1
PAPA007	11-Apr-15	18	37.2	40.7	33.8	28.4	24.9	53.2
PAPA007	11-Apr-15	19	34.1	37.2	31.5	28.5	25.6	47.8
PAPA007	11-Apr-15	20	31.5	33.4	31.0	28.8	26.5	42.6
PAPA007	11-Apr-15	21	34.2	36.4	33.9	30.6	28.0	40.3
PAPA007	11-Apr-15	22	34.1	36.5	33.4	31.0	28.6	41.1
PAPA007	11-Apr-15	23	32.9	35.5	32.2	29.6	27.5	40.9
PAPA007	12-Apr-15	0	30.9	32.8	30.5	28.9	27.1	35.7
PAPA007	12-Apr-15	1	33.2	34.6	32.3	30.2	28.0	52.9
PAPA007	12-Apr-15	2	31.6	33.5	31.1	28.9	26.6	43.3
PAPA007	12-Apr-15	3	32.2	33.3	30.2	27.9	23.8	57.8
PAPA007	12-Apr-15	4	30.6	33.4	29.4	26.4	23.6	39.3
PAPA007	12-Apr-15	5	32.8	35.7	31.5	28.5	25.6	44.9
PAPA007	12-Apr-15	6	36.4	38.8	35.1	31.4	27.6	50.5
PAPA007	12-Apr-15	7	32.2	34.7	30.8	27.5	24.6	46.2
PAPA007	12-Apr-15	8	33.6	35.9	30.2	26.0	22.4	55.4
PAPA007	02-Apr-16	12	31.0	32.1	26.6	22.1	19.8	50.9
PAPA007	02-Apr-16	13	31.4	32.6	27.7	21.4	19.4	51.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	02-Apr-16	14	32.5	33.7	27.2	21.6	19.1	59.2
PAPA007	02-Apr-16	15	31.2	32.9	28.2	23.6	20.3	54.7
PAPA007	02-Apr-16	16	29.7	32.4	27.5	21.6	19.6	54.3
PAPA007	02-Apr-16	17	28.6	31.8	26.0	21.5	18.6	44.5
PAPA007	02-Apr-16	18	30.0	32.9	27.9	23.1	19.9	45.6
PAPA007	02-Apr-16	19	25.2	27.5	23.7	21.4	19.7	43.4
PAPA007	02-Apr-16	20	29.2	32.7	27.2	22.4	20.3	39.8
PAPA007	02-Apr-16	21	41.0	33.5	28.2	24.9	22.4	70.3
PAPA007	02-Apr-16	22	29.3	32.8	26.9	23.4	21.7	39.7
PAPA007	02-Apr-16	23	27.4	29.6	26.8	22.1	20.8	36.3
PAPA007	03-Apr-16	0	26.2	28.5	24.9	21.5	19.5	40.0
PAPA007	03-Apr-16	1	27.2	30.1	25.8	22.7	21.0	36.0
PAPA007	03-Apr-16	2	52.5	28.0	24.0	21.7	20.3	76.3
PAPA007	03-Apr-16	3	28.6	31.1	25.4	22.5	20.8	50.0
PAPA007	03-Apr-16	4	28.6	32.6	26.7	22.6	20.8	40.0
PAPA007	03-Apr-16	5	29.6	32.0	27.8	25.1	23.4	52.5
PAPA007	03-Apr-16	6	35.1	37.8	34.5	29.7	24.0	45.0
PAPA007	03-Apr-16	7	36.2	38.8	34.6	30.3	23.9	55.9
PAPA007	03-Apr-16	8	38.6	40.2	34.6	26.4	21.9	57.6
PAPA007	03-Apr-16	9	30.9	33.2	26.0	22.7	18.9	54.6
PAPA007	03-Apr-16	10	26.7	28.3	24.6	21.6	19.6	44.2
PAPA007	03-Apr-16	11	33.7	30.8	26.2	22.3	19.1	59.7
PAPA007	03-Apr-16	12	32.0	33.4	27.2	22.6	19.7	55.6
PAPA007	03-Apr-16	13	32.9	34.2	28.0	21.8	18.7	54.9
PAPA007	03-Apr-16	14	32.3	35.1	29.3	23.9	20.5	54.9
PAPA007	03-Apr-16	15	30.8	33.7	27.4	22.5	19.5	46.3
PAPA007	03-Apr-16	16	30.9	34.0	28.1	21.9	18.6	50.0
PAPA007	03-Apr-16	17	29.3	31.6	25.5	20.7	17.9	48.4
PAPA007	03-Apr-16	18	23.8	27.1	21.8	18.0	16.8	38.3
PAPA007	03-Apr-16	19	27.6	31.8	23.1	19.2	17.4	43.3
PAPA007	03-Apr-16	20	29.9	33.6	25.5	19.8	17.5	47.0
PAPA007	03-Apr-16	21	27.9	30.6	27.0	22.7	19.2	34.5
PAPA007	03-Apr-16	22	28.0	30.3	27.2	24.5	22.9	37.0
PAPA007	03-Apr-16	23	29.2	31.5	28.3	25.4	22.2	38.3
PAPA007	04-Apr-16	0	27.5	29.9	26.3	23.8	22.3	37.7
PAPA007	04-Apr-16	1	27.3	30.3	26.3	23.5	20.7	32.8
PAPA007	04-Apr-16	2	32.4	29.3	26.6	24.6	22.6	61.7
PAPA007	04-Apr-16	3	28.8	30.7	28.2	26.5	24.1	35.9
PAPA007	04-Apr-16	4	28.8	30.5	28.0	23.9	21.3	50.3
PAPA007	04-Apr-16	5	31.3	33.9	30.2	26.9	25.0	42.6
PAPA007	04-Apr-16	6	38.9	40.7	37.4	34.0	29.0	57.7
PAPA007	04-Apr-16	7	37.6	39.8	36.9	33.9	29.3	48.0
PAPA007	04-Apr-16	8	38.0	40.3	36.6	31.9	27.3	49.8
PAPA007	04-Apr-16	9	34.1	31.3	28.0	25.7	23.4	64.2
PAPA007	04-Apr-16	10	28.9	31.5	27.4	25.1	22.7	39.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	04-Apr-16	11	34.4	33.3	27.6	23.9	21.8	62.2
PAPA007	04-Apr-16	12	30.5	30.1	26.7	23.8	20.7	58.7
PAPA007	04-Apr-16	13	33.3	35.0	29.0	25.2	22.2	57.9
PAPA007	04-Apr-16	14	34.2	37.4	30.9	26.4	23.4	51.0
PAPA007	04-Apr-16	15	33.5	36.8	30.7	26.8	22.8	48.4
PAPA007	04-Apr-16	16	41.2	44.9	34.2	26.8	22.8	59.0
PAPA007	04-Apr-16	17	27.9	30.7	26.6	23.4	20.6	42.4
PAPA007	04-Apr-16	18	37.7	38.7	28.7	24.4	21.7	63.1
PAPA007	04-Apr-16	19	32.2	34.6	31.2	28.8	25.8	46.5
PAPA007	04-Apr-16	20	30.1	32.2	28.9	27.0	24.6	44.1
PAPA007	04-Apr-16	21	29.1	30.7	28.7	27.1	24.5	36.1
PAPA007	04-Apr-16	22	41.1	32.4	28.4	26.3	24.5	66.0
PAPA007	04-Apr-16	23	31.0	33.1	29.6	26.5	24.7	46.6
PAPA007	05-Apr-16	0	31.5	34.3	30.2	25.0	21.0	47.5
PAPA007	05-Apr-16	1	29.8	32.1	28.2	25.1	22.1	45.5
PAPA007	05-Apr-16	2	27.7	30.8	25.9	23.5	21.5	36.7
PAPA007	05-Apr-16	3	29.1	31.9	27.8	24.8	22.7	39.9
PAPA007	05-Apr-16	4	26.5	30.1	23.6	21.4	20.0	40.0
PAPA007	05-Apr-16	5	28.5	31.8	26.1	22.8	20.9	42.6
PAPA007	05-Apr-16	6	33.0	35.5	31.4	24.7	22.0	53.1
PAPA007	05-Apr-16	7	34.0	36.9	33.0	28.9	23.8	44.8
PAPA007	05-Apr-16	8	32.7	36.2	30.6	25.9	20.8	44.8
PAPA007	05-Apr-16	9	37.0	40.4	33.1	28.3	24.5	53.1
PAPA007	05-Apr-16	10	40.4	43.9	36.4	31.2	26.5	56.0
PAPA007	05-Apr-16	11	42.1	45.4	38.3	32.0	27.2	60.0
PAPA007	05-Apr-16	12	44.5	48.2	40.2	33.8	28.2	63.3
PAPA007	05-Apr-16	13	43.2	46.5	38.8	32.6	27.4	62.5
PAPA007	05-Apr-16	14	41.9	45.2	37.7	31.5	25.0	58.9
PAPA007	05-Apr-16	15	42.6	46.5	38.9	32.3	27.8	58.9
PAPA007	05-Apr-16	16	43.0	46.7	39.5	32.8	28.1	59.2
PAPA007	05-Apr-16	17	43.0	46.7	39.7	33.2	26.6	58.2
PAPA007	05-Apr-16	18	42.9	46.3	38.8	32.6	28.3	60.5
PAPA007	05-Apr-16	19	38.8	42.3	33.8	27.5	23.6	55.4
PAPA007	05-Apr-16	20	30.5	33.1	29.0	25.3	23.3	47.6
PAPA007	05-Apr-16	21	31.0	33.9	28.9	25.8	23.4	47.8
PAPA007	05-Apr-16	22	29.4	32.9	26.0	22.8	21.2	43.4
PAPA007	05-Apr-16	23	28.4	31.5	27.8	22.2	20.5	36.0
PAPA007	06-Apr-16	0	26.4	29.7	24.7	23.5	22.2	34.3
PAPA007	06-Apr-16	1	28.2	31.7	25.7	22.3	20.5	36.8
PAPA007	06-Apr-16	2	27.2	30.3	24.8	22.1	20.3	42.1
PAPA007	06-Apr-16	3	25.5	27.4	24.1	22.7	21.5	35.9
PAPA007	06-Apr-16	4	25.2	26.5	23.9	22.8	21.1	42.3
PAPA007	06-Apr-16	5	28.4	30.8	26.8	24.0	22.4	51.5
PAPA007	06-Apr-16	6	34.2	36.8	33.6	29.0	24.6	45.3
PAPA007	06-Apr-16	7	32.8	35.2	31.9	28.9	25.5	41.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	06-Apr-16	8	33.8	34.9	30.8	28.4	25.2	54.3
PAPA007	06-Apr-16	9	36.5	37.1	31.8	28.7	25.7	60.5
PAPA007	06-Apr-16	10	34.8	38.0	31.6	27.5	23.4	54.9
PAPA007	06-Apr-16	11	36.9	36.5	30.5	26.7	23.0	62.1
PAPA007	06-Apr-16	12	38.4	39.1	31.8	27.4	23.4	61.9
PAPA007	06-Apr-16	13	38.4	40.8	33.0	28.2	22.9	59.7
PAPA007	06-Apr-16	14	41.0	44.4	36.7	31.1	25.8	57.5
PAPA007	06-Apr-16	15	39.2	42.6	35.3	29.9	25.6	56.2
PAPA007	06-Apr-16	16	40.2	43.8	36.1	29.6	25.3	56.6
PAPA007	06-Apr-16	17	37.8	41.3	33.8	27.9	22.3	57.1
PAPA007	06-Apr-16	18	34.9	38.1	31.6	26.6	22.8	52.0
PAPA007	06-Apr-16	19	29.5	33.0	27.4	21.9	19.6	44.5
PAPA007	06-Apr-16	20	26.7	29.5	23.4	21.3	19.4	51.5
PAPA007	06-Apr-16	21	26.1	29.0	24.6	22.3	20.3	36.7
PAPA007	06-Apr-16	22	27.3	30.5	25.7	23.9	22.4	34.0
PAPA007	06-Apr-16	23	30.1	33.0	28.2	25.7	23.9	40.9
PAPA007	07-Apr-16	0	33.8	36.6	32.3	28.7	27.3	44.5
PAPA007	07-Apr-16	1	30.3	33.0	29.2	27.2	24.8	37.4
PAPA007	07-Apr-16	2	27.6	29.9	26.0	23.6	22.5	38.0
PAPA007	07-Apr-16	3	32.0	36.0	29.5	26.5	24.7	47.4
PAPA007	07-Apr-16	4	27.9	30.9	26.7	23.5	21.5	37.0
PAPA007	07-Apr-16	5	35.7	31.2	26.3	22.8	21.5	61.2
PAPA007	07-Apr-16	6	43.6	37.4	34.2	31.0	26.6	66.6
PAPA007	07-Apr-16	7	35.6	38.3	34.7	30.6	25.8	45.7
PAPA007	07-Apr-16	8	33.0	35.9	31.1	27.8	24.4	51.9
PAPA007	07-Apr-16	9	36.6	38.8	32.5	28.5	25.0	58.1
PAPA007	07-Apr-16	10	38.6	42.0	36.0	31.2	26.3	52.5
PAPA007	07-Apr-16	11	38.2	41.4	34.9	30.3	25.4	54.0
PAPA007	07-Apr-16	12	36.2	39.6	32.8	27.3	23.3	55.0
PAPA007	07-Apr-16	13	36.0	37.7	30.5	25.4	21.6	62.7
PAPA007	07-Apr-16	14	35.0	38.4	30.4	25.0	21.0	51.5
PAPA007	07-Apr-16	15	33.9	37.2	30.8	25.8	21.5	48.9
PAPA007	07-Apr-16	16	37.3	40.9	34.1	28.6	20.7	52.3
PAPA007	07-Apr-16	17	35.6	39.0	32.3	27.0	21.9	51.9
PAPA007	07-Apr-16	18	31.7	35.1	28.0	22.6	18.4	50.3
PAPA007	07-Apr-16	19	27.0	30.4	24.1	20.7	17.9	40.2
PAPA007	07-Apr-16	20	28.3	30.0	25.7	22.2	18.9	51.3
PAPA007	07-Apr-16	21	25.5	28.1	24.4	20.9	18.5	37.6
PAPA007	07-Apr-16	22	24.6	26.8	23.6	20.0	17.9	33.8
PAPA007	07-Apr-16	23	24.9	27.8	23.2	21.1	19.9	32.0
PAPA007	08-Apr-16	0	29.3	32.5	27.7	24.5	22.4	37.7
PAPA007	08-Apr-16	1	27.4	31.1	24.7	23.1	21.7	34.3
PAPA007	08-Apr-16	2	25.8	28.1	24.8	22.5	21.3	32.9
PAPA007	08-Apr-16	3	27.7	29.6	26.5	25.0	23.9	38.7
PAPA007	08-Apr-16	4	29.7	32.0	28.9	25.2	22.1	38.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	08-Apr-16	5	33.2	36.1	31.7	27.9	24.7	43.7
PAPA007	08-Apr-16	6	34.6	36.8	34.1	31.2	26.7	44.5
PAPA007	08-Apr-16	7	35.1	37.2	34.3	30.9	25.7	50.9
PAPA007	08-Apr-16	8	32.3	33.1	29.8	26.6	23.2	57.3
PAPA007	08-Apr-16	9	23.2	25.4	21.3	18.7	17.3	43.3
PAPA007	08-Apr-16	10	25.3	25.1	21.5	19.6	18.4	44.4
PAPA007	08-Apr-16	11	24.5	26.5	23.0	20.7	19.0	43.5
PAPA007	08-Apr-16	12	26.6	27.6	23.5	21.1	19.1	47.5
PAPA007	08-Apr-16	13	26.9	28.5	23.7	20.9	19.2	47.1
PAPA007	08-Apr-16	14	32.2	30.2	23.4	20.8	18.7	56.2
PAPA007	08-Apr-16	15	26.9	29.0	23.3	20.5	18.6	49.5
PAPA007	08-Apr-16	16	26.9	29.5	23.9	20.7	18.9	46.5
PAPA007	08-Apr-16	17	28.8	28.4	22.8	19.5	17.7	59.7
PAPA007	08-Apr-16	18	23.0	25.5	21.2	18.9	17.2	37.1
PAPA007	08-Apr-16	19	28.5	32.9	23.4	20.5	18.0	47.8
PAPA007	08-Apr-16	20	24.4	27.3	22.6	20.4	17.8	36.2
PAPA007	08-Apr-16	21	29.2	32.2	26.3	22.6	20.4	45.3
PAPA007	08-Apr-16	22	29.4	32.1	28.0	25.7	23.7	42.5
PAPA007	08-Apr-16	23	29.4	31.9	28.4	25.8	23.4	43.5
PAPA007	09-Apr-16	0	31.0	34.6	29.1	26.6	24.9	42.2
PAPA007	09-Apr-16	1	29.0	31.0	28.5	26.0	23.4	38.1
PAPA007	09-Apr-16	2	32.1	33.6	31.1	29.2	27.2	49.4
PAPA007	09-Apr-16	3	32.0	34.1	31.1	29.4	27.3	42.8
PAPA007	09-Apr-16	4	31.1	34.4	29.9	27.3	25.0	39.9
PAPA007	09-Apr-16	5	31.4	33.7	30.0	28.3	26.3	45.3
PAPA007	09-Apr-16	6	34.1	36.4	33.3	29.3	26.2	52.6
PAPA007	09-Apr-16	7	37.5	38.6	33.3	30.8	27.6	60.9
PAPA007	09-Apr-16	8	34.2	36.3	33.0	28.7	25.0	52.8
PAPA007	09-Apr-16	9	27.5	29.1	26.1	23.1	21.0	48.3
PAPA007	09-Apr-16	10	25.4	28.4	23.0	19.8	18.2	45.4
PAPA007	09-Apr-16	11	28.8	29.1	22.4	19.4	18.0	51.7
PAPA007	09-Apr-16	12	39.3	29.5	24.4	20.6	18.0	64.5
PAPA007	09-Apr-16	13	31.5	30.8	23.9	20.7	18.5	54.1
PAPA007	09-Apr-16	14	31.5	34.8	26.1	20.4	18.5	49.4
PAPA007	09-Apr-16	15	32.6	35.4	28.3	23.4	20.9	52.6
PAPA007	09-Apr-16	16	30.7	32.4	25.0	21.5	18.8	53.7
PAPA007	09-Apr-16	17	30.5	33.4	27.5	20.7	18.0	50.7
PAPA007	09-Apr-16	18	28.6	30.0	22.6	19.9	18.1	54.4
PAPA007	09-Apr-16	19	28.7	32.6	26.3	22.1	20.2	43.0
PAPA007	09-Apr-16	20	28.5	32.4	25.9	20.4	19.0	41.5
PAPA007	09-Apr-16	21	30.1	33.4	28.4	24.3	22.7	36.9
PAPA007	09-Apr-16	22	30.0	33.4	27.8	24.2	22.7	40.4
PAPA007	09-Apr-16	23	30.2	33.5	28.2	23.7	20.0	41.4
PAPA007	10-Apr-16	0	26.8	28.4	24.2	22.7	20.5	45.6
PAPA007	10-Apr-16	1	29.8	33.3	24.3	23.0	21.6	42.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA007	10-Apr-16	2	28.3	32.8	24.9	21.7	20.1	39.5
PAPA007	10-Apr-16	3	28.0	31.8	25.6	22.2	19.6	37.5
PAPA007	10-Apr-16	4	28.9	32.1	26.7	22.3	20.5	47.1
PAPA007	10-Apr-16	5	26.3	29.4	24.7	20.7	18.8	37.8
PAPA007	10-Apr-16	6	33.1	35.4	32.1	28.1	25.7	53.3
PAPA007	10-Apr-16	7	32.8	35.4	32.1	28.5	25.0	42.3
PAPA007	10-Apr-16	8	33.0	35.2	28.5	25.0	19.9	54.4
PAPA007	10-Apr-16	9	34.5	36.3	29.2	22.3	19.4	60.5
PAPA007	10-Apr-16	10	33.1	35.1	31.1	28.6	26.3	50.5
PAPA007	10-Apr-16	11	36.9	41.0	33.4	25.3	22.0	50.8
PAPA007	10-Apr-16	12	33.1	28.6	23.1	20.9	18.9	61.1
PAPA007	10-Apr-16	13	27.2	25.7	23.5	21.7	19.5	48.2
PAPA007	10-Apr-16	14	27.2	28.2	25.2	23.1	20.0	44.0
PAPA007	10-Apr-16	15	33.2	31.5	25.5	22.8	17.6	54.6
PAPA007	10-Apr-16	16	32.7	36.1	23.4	19.2	17.8	54.3
PAPA007	10-Apr-16	17	41.5	46.3	30.6	23.4	20.8	56.6
PAPA007	10-Apr-16	18	38.2	39.0	26.5	23.4	21.2	58.0
PAPA007	10-Apr-16	19	28.9	31.0	27.1	24.1	21.3	45.1
PAPA007	10-Apr-16	20	30.1	32.0	28.2	25.8	23.0	48.1
PAPA007	10-Apr-16	21	28.2	30.5	27.1	24.4	21.5	43.7
PAPA007	10-Apr-16	22	28.1	30.3	27.2	24.4	22.3	40.5
PAPA007	10-Apr-16	23	27.3	30.2	25.4	22.7	20.6	37.5
PAPA007	11-Apr-16	0	26.9	29.4	25.7	23.5	21.2	34.8
PAPA007	11-Apr-16	1	25.8	27.8	25.0	23.5	21.9	33.2
PAPA007	11-Apr-16	2	27.5	30.3	26.1	23.6	21.6	36.4
PAPA007	11-Apr-16	3	26.1	29.5	23.9	21.3	19.2	34.7
PAPA007	11-Apr-16	4	25.3	26.7	24.7	22.0	20.0	46.2
PAPA007	11-Apr-16	5	26.5	29.3	24.9	21.8	19.7	39.5
PAPA007	11-Apr-16	6	33.6	36.9	32.2	26.7	22.6	45.5
PAPA007	11-Apr-16	7	33.5	36.4	32.5	28.1	24.0	42.5
PAPA008	10-Apr-13	11	28.5	28.7	26.5	25.1	23.7	47.9
PAPA008	10-Apr-13	12	38.4	29.3	26.5	25.0	23.4	64.5
PAPA008	10-Apr-13	13	27.0	29.0	26.3	24.6	22.4	34.6
PAPA008	10-Apr-13	14	28.7	30.3	28.1	26.7	25.0	38.6
PAPA008	10-Apr-13	15	28.2	30.3	27.0	25.2	22.8	38.2
PAPA008	10-Apr-13	16	30.8	34.3	27.8	25.2	23.1	43.9
PAPA008	10-Apr-13	17	33.6	36.7	31.2	27.0	24.2	47.4
PAPA008	10-Apr-13	18	38.3	41.6	36.3	31.2	26.5	49.6
PAPA008	10-Apr-13	19	37.7	41.2	35.7	30.6	26.3	51.0
PAPA008	10-Apr-13	20	36.7	40.1	34.6	29.7	25.7	49.9
PAPA008	10-Apr-13	21	26.3	28.4	25.4	23.2	21.4	36.7
PAPA008	10-Apr-13	22	26.2	28.2	25.0	23.3	21.4	38.6
PAPA008	10-Apr-13	23	24.0	25.7	22.9	21.7	20.3	35.2
PAPA008	11-Apr-13	0	23.1	24.4	22.6	21.4	19.9	30.5
PAPA008	11-Apr-13	1	24.6	26.3	24.2	22.3	20.6	30.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	11-Apr-13	2	27.9	29.1	26.2	24.0	22.0	46.0
PAPA008	11-Apr-13	3	26.0	27.2	25.3	23.9	22.3	36.2
PAPA008	11-Apr-13	4	24.3	26.5	23.3	21.6	20.5	32.0
PAPA008	11-Apr-13	5	24.3	26.1	23.6	22.0	20.5	34.8
PAPA008	11-Apr-13	6	26.5	26.9	24.5	22.6	21.3	51.5
PAPA008	11-Apr-13	7	27.2	28.9	25.8	23.7	21.2	43.8
PAPA008	11-Apr-13	8	29.8	32.4	28.7	26.1	23.2	41.4
PAPA008	11-Apr-13	9	32.3	34.8	29.9	26.3	23.0	50.9
PAPA008	11-Apr-13	10	35.5	38.9	33.5	28.6	24.1	47.1
PAPA008	11-Apr-13	11	36.7	40.4	34.4	28.8	22.3	49.5
PAPA008	11-Apr-13	12	35.9	39.5	33.3	27.9	22.7	47.8
PAPA008	11-Apr-13	13	36.1	39.7	33.5	26.9	23.0	49.8
PAPA008	11-Apr-13	14	34.7	38.1	31.8	26.0	20.5	52.6
PAPA008	11-Apr-13	15	34.3	38.0	31.1	25.8	21.5	47.6
PAPA008	11-Apr-13	16	35.9	39.4	33.5	27.5	22.3	49.0
PAPA008	11-Apr-13	17	36.3	39.7	34.1	28.6	22.9	47.6
PAPA008	11-Apr-13	18	33.6	37.4	31.3	24.6	21.2	44.8
PAPA008	11-Apr-13	19	32.6	35.8	30.4	25.6	22.4	51.7
PAPA008	11-Apr-13	20	28.5	31.4	25.9	22.9	21.5	47.1
PAPA008	11-Apr-13	21	25.5	28.0	24.1	22.3	20.9	42.9
PAPA008	11-Apr-13	22	26.1	29.0	24.4	22.9	21.2	36.7
PAPA008	11-Apr-13	23	24.4	25.9	24.0	22.8	21.3	31.5
PAPA008	12-Apr-13	0	24.2	25.6	22.3	20.7	19.7	36.5
PAPA008	12-Apr-13	1	23.9	25.4	23.0	21.4	20.4	34.5
PAPA008	12-Apr-13	2	22.5	24.1	21.6	20.7	19.5	32.8
PAPA008	12-Apr-13	3	23.0	24.4	22.6	20.8	19.5	33.8
PAPA008	12-Apr-13	4	23.0	24.8	22.3	20.5	18.8	34.7
PAPA008	12-Apr-13	5	24.6	26.3	24.0	21.9	20.2	36.7
PAPA008	12-Apr-13	6	27.3	29.9	25.9	24.0	22.3	38.7
PAPA008	12-Apr-13	7	27.4	29.6	26.3	24.4	21.6	42.2
PAPA008	12-Apr-13	8	28.6	27.9	22.5	20.8	19.2	53.6
PAPA008	12-Apr-13	9	27.5	28.5	23.0	20.6	18.9	46.3
PAPA008	12-Apr-13	10	30.2	33.1	28.1	23.8	20.9	46.9
PAPA008	12-Apr-13	11	28.9	32.3	26.2	21.7	19.2	44.4
PAPA008	12-Apr-13	12	27.8	31.3	24.8	20.3	18.0	41.1
PAPA008	24-Apr-14	17	25.6	29.0	22.7	19.5	17.5	40.0
PAPA008	24-Apr-14	18	19.9	22.2	18.2	16.9	15.8	35.9
PAPA008	24-Apr-14	19	28.2	26.5	18.7	17.4	16.2	51.7
PAPA008	24-Apr-14	20	32.6	37.1	21.7	19.1	17.2	48.4
PAPA008	24-Apr-14	21	25.6	27.0	23.0	20.5	18.0	45.1
PAPA008	24-Apr-14	22	23.8	26.2	22.6	20.9	19.6	35.7
PAPA008	24-Apr-14	23	23.1	24.5	22.8	21.6	20.5	28.8
PAPA008	25-Apr-14	0	23.8	25.1	21.2	20.0	18.7	38.2
PAPA008	25-Apr-14	1	23.5	22.4	19.9	18.8	18.0	44.3
PAPA008	25-Apr-14	2	19.4	20.0	19.3	18.6	17.9	29.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	25-Apr-14	3	22.0	24.0	21.8	19.2	18.3	27.5
PAPA008	25-Apr-14	4	24.1	26.1	23.4	20.5	19.1	34.2
PAPA008	25-Apr-14	5	38.0	43.0	29.9	22.1	19.7	50.7
PAPA008	25-Apr-14	6	28.0	27.0	23.7	21.6	18.9	46.3
PAPA008	25-Apr-14	7	29.3	31.1	28.4	26.3	23.3	42.1
PAPA008	25-Apr-14	8	30.4	32.4	29.2	26.3	24.1	48.9
PAPA008	25-Apr-14	9	26.1	27.9	24.6	22.7	20.1	50.2
PAPA008	25-Apr-14	10	23.0	24.2	21.8	19.2	17.9	39.9
PAPA008	25-Apr-14	11	25.7	28.6	21.3	18.9	17.1	42.6
PAPA008	25-Apr-14	12	29.8	29.4	21.0	18.4	17.0	50.7
PAPA008	25-Apr-14	13	30.0	29.9	22.9	19.2	17.6	50.1
PAPA008	25-Apr-14	14	22.6	25.4	21.0	17.7	16.4	36.9
PAPA008	25-Apr-14	15	28.8	32.1	24.8	20.5	17.5	47.0
PAPA008	25-Apr-14	16	21.7	24.7	18.5	16.5	15.7	35.2
PAPA008	25-Apr-14	17	18.8	21.3	17.5	15.9	15.4	29.6
PAPA008	25-Apr-14	18	23.1	21.5	17.5	16.4	15.5	42.2
PAPA008	25-Apr-14	19	26.7	24.7	20.6	18.6	17.1	53.0
PAPA008	25-Apr-14	20	31.1	35.2	22.1	18.7	17.0	51.1
PAPA008	25-Apr-14	21	26.2	29.3	24.3	19.8	16.7	36.9
PAPA008	25-Apr-14	22	29.5	34.3	24.4	19.8	16.2	41.1
PAPA008	25-Apr-14	23	31.5	33.9	30.8	28.4	26.3	38.5
PAPA008	26-Apr-14	0	32.1	34.7	30.7	27.8	25.5	42.0
PAPA008	26-Apr-14	1	35.4	38.4	33.2	30.1	25.8	48.9
PAPA008	26-Apr-14	2	30.3	32.7	29.1	26.7	24.3	40.0
PAPA008	26-Apr-14	3	29.8	32.5	28.0	25.8	23.8	42.7
PAPA008	26-Apr-14	4	29.2	31.2	28.8	26.5	24.2	35.5
PAPA008	26-Apr-14	5	39.8	44.3	35.0	28.7	26.8	50.4
PAPA008	26-Apr-14	6	35.2	39.4	27.5	24.8	22.5	49.2
PAPA008	26-Apr-14	7	25.9	28.1	24.2	22.4	20.5	40.3
PAPA008	26-Apr-14	8	28.1	28.7	23.3	21.1	19.2	51.3
PAPA008	26-Apr-14	9	31.8	35.1	27.5	23.8	20.2	54.1
PAPA008	26-Apr-14	10	25.9	28.5	23.1	19.6	17.9	46.9
PAPA008	26-Apr-14	11	26.2	28.6	24.5	20.6	18.8	43.2
PAPA008	26-Apr-14	12	24.4	26.1	21.8	18.9	17.3	41.4
PAPA008	26-Apr-14	13	33.3	37.1	30.0	22.3	17.1	47.4
PAPA008	26-Apr-14	14	33.4	35.1	26.7	20.1	17.7	57.8
PAPA008	26-Apr-14	15	29.6	33.1	25.5	20.2	17.1	45.5
PAPA008	26-Apr-14	16	41.1	44.9	38.2	31.4	24.2	54.5
PAPA008	26-Apr-14	17	32.8	36.7	29.5	22.6	18.1	47.7
PAPA008	26-Apr-14	18	22.6	25.2	20.4	18.2	16.0	37.0
PAPA008	26-Apr-14	19	27.7	30.8	25.5	21.8	18.0	40.5
PAPA008	26-Apr-14	20	33.6	37.2	30.1	26.3	23.4	47.4
PAPA008	26-Apr-14	21	26.1	27.8	25.2	23.7	22.1	35.7
PAPA008	26-Apr-14	22	26.3	27.8	24.5	22.4	21.1	41.8
PAPA008	26-Apr-14	23	24.1	26.0	23.4	21.8	20.3	34.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	27-Apr-14	0	22.1	23.3	21.4	20.3	18.6	34.3
PAPA008	27-Apr-14	1	24.1	26.4	22.8	20.9	19.1	39.2
PAPA008	27-Apr-14	2	27.6	30.4	25.3	22.5	20.1	45.5
PAPA008	27-Apr-14	3	28.1	31.0	26.0	22.9	20.3	42.8
PAPA008	27-Apr-14	4	29.2	32.5	26.5	23.1	21.0	43.6
PAPA008	27-Apr-14	5	28.9	31.5	27.5	24.5	21.7	40.8
PAPA008	27-Apr-14	6	26.8	29.3	25.6	23.5	21.6	38.2
PAPA008	27-Apr-14	7	28.1	31.0	26.3	23.5	21.4	41.3
PAPA008	27-Apr-14	8	32.5	36.0	29.7	25.7	22.6	44.3
PAPA008	27-Apr-14	9	35.2	38.9	32.2	26.8	23.0	51.7
PAPA008	27-Apr-14	10	39.7	43.3	37.3	32.2	25.8	52.4
PAPA008	27-Apr-14	11	39.5	43.0	37.2	31.6	26.5	51.2
PAPA008	27-Apr-14	12	40.4	44.1	37.4	31.7	23.9	55.3
PAPA008	27-Apr-14	13	40.8	44.4	38.3	32.8	25.8	54.3
PAPA008	27-Apr-14	14	42.8	46.1	40.7	34.9	28.5	56.6
PAPA008	27-Apr-14	15	40.7	44.3	38.4	32.7	25.6	53.2
PAPA008	27-Apr-14	16	42.0	45.5	39.4	33.5	26.0	55.7
PAPA008	27-Apr-14	17	41.5	45.2	39.0	32.1	25.2	54.1
PAPA008	27-Apr-14	18	38.5	42.1	35.4	29.5	24.4	52.8
PAPA008	27-Apr-14	19	30.4	33.7	26.6	22.1	18.4	46.1
PAPA008	27-Apr-14	20	23.6	26.2	22.1	19.5	17.6	39.5
PAPA008	27-Apr-14	21	25.5	28.4	23.0	20.8	18.6	39.5
PAPA008	27-Apr-14	22	23.9	24.5	21.5	20.3	19.1	40.3
PAPA008	27-Apr-14	23	23.8	24.8	21.5	20.5	19.4	39.5
PAPA008	28-Apr-14	0	21.9	22.9	21.6	20.6	19.2	32.3
PAPA008	28-Apr-14	1	22.8	24.2	22.6	21.4	19.5	28.3
PAPA008	28-Apr-14	2	23.7	25.4	23.2	22.0	20.5	33.0
PAPA008	28-Apr-14	3	23.9	25.3	23.3	22.0	20.3	33.2
PAPA008	28-Apr-14	4	24.1	25.4	23.6	22.2	20.7	35.9
PAPA008	28-Apr-14	5	29.3	31.8	24.9	22.5	20.3	43.9
PAPA008	28-Apr-14	6	27.1	29.5	25.7	23.6	21.4	40.9
PAPA008	28-Apr-14	7	31.8	33.8	28.6	25.1	22.0	49.0
PAPA008	28-Apr-14	8	37.6	41.1	34.7	29.2	24.0	52.0
PAPA008	28-Apr-14	9	42.0	45.6	39.6	34.0	27.5	54.5
PAPA008	28-Apr-14	10	45.3	48.6	43.3	37.7	31.8	58.0
PAPA008	28-Apr-14	11	45.2	48.7	42.7	37.0	29.3	58.3
PAPA008	28-Apr-14	12	44.6	48.2	41.9	35.6	29.5	59.0
PAPA008	28-Apr-14	13	43.5	47.2	40.7	35.0	27.9	58.6
PAPA008	28-Apr-14	14	43.5	47.2	40.5	34.3	25.4	58.3
PAPA008	28-Apr-14	15	43.8	47.1	41.0	34.6	28.7	60.0
PAPA008	28-Apr-14	16	45.1	48.5	42.0	35.7	29.0	60.3
PAPA008	28-Apr-14	17	45.8	49.4	43.7	38.0	29.7	58.5
PAPA008	28-Apr-14	18	44.7	48.3	42.5	37.2	31.1	59.3
PAPA008	12-Apr-15	11	33.6	36.4	30.3	26.2	22.3	54.6
PAPA008	12-Apr-15	12	34.5	33.3	28.7	25.4	22.7	63.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	12-Apr-15	13	31.3	34.0	29.0	26.0	22.5	47.2
PAPA008	12-Apr-15	14	31.1	33.1	28.3	25.5	22.0	49.6
PAPA008	12-Apr-15	15	32.6	35.3	29.9	26.2	22.8	48.4
PAPA008	12-Apr-15	16	34.8	37.8	31.4	27.8	24.3	50.1
PAPA008	12-Apr-15	17	33.9	36.8	31.9	28.2	24.5	46.4
PAPA008	12-Apr-15	18	31.5	34.3	29.9	26.2	22.3	43.0
PAPA008	12-Apr-15	19	31.7	34.4	30.6	27.4	22.3	40.7
PAPA008	12-Apr-15	20	33.9	35.8	33.5	31.5	28.1	43.3
PAPA008	12-Apr-15	21	32.1	33.8	31.9	29.6	26.1	39.2
PAPA008	12-Apr-15	22	31.1	33.0	30.5	28.5	25.3	40.7
PAPA008	12-Apr-15	23	29.8	31.3	29.5	27.8	25.3	34.7
PAPA008	13-Apr-15	0	30.5	32.1	30.1	28.5	26.6	37.9
PAPA008	13-Apr-15	1	30.3	31.7	29.9	28.2	25.8	39.3
PAPA008	13-Apr-15	2	30.9	34.4	29.2	25.8	24.3	37.6
PAPA008	13-Apr-15	3	34.4	36.6	33.2	31.2	28.5	47.4
PAPA008	13-Apr-15	4	32.3	34.7	32.1	26.9	25.4	38.2
PAPA008	13-Apr-15	5	36.5	40.5	33.2	31.1	29.7	49.4
PAPA008	13-Apr-15	6	34.9	37.3	33.3	30.4	28.5	48.0
PAPA008	13-Apr-15	7	36.3	39.7	32.8	30.3	27.8	55.6
PAPA008	13-Apr-15	8	31.2	34.3	28.6	25.3	22.9	54.1
PAPA008	13-Apr-15	9	35.2	28.9	25.3	23.7	21.8	63.8
PAPA008	13-Apr-15	10	26.7	26.3	24.2	22.7	20.9	49.8
PAPA008	13-Apr-15	11	23.9	25.1	22.7	21.4	20.3	42.8
PAPA008	13-Apr-15	12	25.6	26.8	23.0	21.2	19.5	51.8
PAPA008	13-Apr-15	13	28.7	26.7	22.7	21.0	19.4	55.1
PAPA008	13-Apr-15	14	24.4	26.3	22.9	21.2	19.4	45.4
PAPA008	13-Apr-15	15	27.1	28.6	24.3	22.0	20.2	44.5
PAPA008	13-Apr-15	16	28.2	30.4	25.5	22.6	20.4	48.1
PAPA008	13-Apr-15	17	29.1	31.7	27.4	24.2	20.7	49.4
PAPA008	13-Apr-15	18	33.5	31.0	27.4	24.8	21.2	58.8
PAPA008	13-Apr-15	19	29.3	31.3	28.7	26.1	23.0	38.1
PAPA008	13-Apr-15	20	32.8	34.6	31.4	26.7	22.9	46.6
PAPA008	13-Apr-15	21	33.5	36.2	32.8	30.2	26.9	42.5
PAPA008	13-Apr-15	22	32.4	34.6	30.9	27.6	25.7	41.4
PAPA008	13-Apr-15	23	29.4	30.8	28.9	27.9	26.5	41.5
PAPA008	14-Apr-15	0	32.8	34.2	32.6	30.7	27.5	46.3
PAPA008	14-Apr-15	1	30.8	33.2	30.1	26.4	23.6	41.1
PAPA008	14-Apr-15	2	26.9	29.4	26.2	23.6	21.9	32.9
PAPA008	14-Apr-15	3	30.4	31.7	30.1	28.6	26.2	41.7
PAPA008	14-Apr-15	4	29.8	31.4	29.1	27.5	25.5	43.4
PAPA008	14-Apr-15	5	34.7	38.3	32.3	28.9	26.3	48.2
PAPA008	14-Apr-15	6	34.4	36.9	32.8	30.4	27.8	47.4
PAPA008	14-Apr-15	7	34.8	36.9	32.9	30.6	28.1	50.6
PAPA008	14-Apr-15	8	35.4	36.1	31.7	29.7	27.2	61.2
PAPA008	14-Apr-15	9	34.0	35.8	32.4	30.3	27.3	52.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	14-Apr-15	10	34.2	37.1	31.3	27.1	23.0	51.9
PAPA008	13-Apr-16	10	52.4	37.8	26.1	23.5	20.7	76.7
PAPA008	13-Apr-16	11	36.7	37.8	27.2	24.2	20.8	62.1
PAPA008	13-Apr-16	12	33.7	36.5	32.2	27.6	24.6	53.8
PAPA008	13-Apr-16	13	32.0	34.8	29.5	27.3	23.9	50.4
PAPA008	13-Apr-16	14	31.5	34.6	29.5	26.5	23.8	41.1
PAPA008	13-Apr-16	15	34.8	38.8	29.3	26.1	23.5	52.6
PAPA008	13-Apr-16	16	33.0	32.5	28.4	25.6	23.0	52.9
PAPA008	13-Apr-16	17	35.3	35.6	31.5	27.7	24.4	59.4
PAPA008	13-Apr-16	18	31.4	31.5	28.0	26.0	23.7	56.5
PAPA008	13-Apr-16	19	35.0	34.4	28.7	26.1	21.1	62.6
PAPA008	13-Apr-16	20	34.0	36.0	33.7	29.3	21.9	44.3
PAPA008	13-Apr-16	21	34.2	36.0	34.0	31.2	29.5	39.8
PAPA008	13-Apr-16	22	32.2	35.2	31.1	28.2	25.3	40.1
PAPA008	13-Apr-16	23	30.8	34.0	29.3	26.5	24.6	41.0
PAPA008	14-Apr-16	0	29.9	31.9	29.1	27.2	25.4	38.8
PAPA008	14-Apr-16	1	28.0	29.8	27.5	25.9	24.7	38.8
PAPA008	14-Apr-16	2	30.2	32.5	29.3	27.0	24.9	38.7
PAPA008	14-Apr-16	3	30.6	32.4	30.0	28.3	26.2	37.3
PAPA008	14-Apr-16	4	32.4	35.0	31.2	28.9	26.5	40.8
PAPA008	14-Apr-16	5	34.2	35.9	31.8	29.6	26.8	47.9
PAPA008	14-Apr-16	6	38.3	42.7	33.3	29.7	27.2	51.1
PAPA008	14-Apr-16	7	39.1	39.9	34.2	29.9	26.2	65.6
PAPA008	14-Apr-16	8	34.1	34.9	30.2	28.0	26.1	57.6
PAPA008	14-Apr-16	9	36.6	37.4	31.9	28.9	25.1	58.2
PAPA008	14-Apr-16	10	35.7	37.2	33.7	31.4	27.9	51.6
PAPA008	14-Apr-16	11	32.1	34.3	29.9	27.2	24.0	52.3
PAPA008	14-Apr-16	12	48.6	46.5	39.7	34.8	27.0	68.6
PAPA008	14-Apr-16	13	40.4	43.1	38.3	34.9	31.5	59.1
PAPA008	14-Apr-16	14	38.6	41.8	36.7	33.2	29.3	51.3
PAPA008	14-Apr-16	15	35.3	37.8	34.3	31.4	27.6	46.3
PAPA008	14-Apr-16	16	34.7	37.3	33.6	30.4	25.5	47.2
PAPA008	14-Apr-16	17	33.7	36.2	32.7	29.6	25.5	45.2
PAPA008	14-Apr-16	18	31.6	34.6	29.9	26.1	23.1	44.1
PAPA008	14-Apr-16	19	44.0	37.3	34.1	30.6	27.0	67.0
PAPA008	14-Apr-16	20	36.0	38.9	34.4	29.6	26.6	47.7
PAPA008	14-Apr-16	21	34.2	36.3	33.9	30.7	28.5	40.7
PAPA008	14-Apr-16	22	35.3	38.3	33.7	31.2	27.9	46.4
PAPA008	14-Apr-16	23	34.0	35.4	33.9	32.0	29.5	38.5
PAPA008	15-Apr-16	0	29.5	31.3	29.4	26.5	25.1	37.6
PAPA008	15-Apr-16	1	31.2	33.3	30.6	28.9	25.8	36.9
PAPA008	15-Apr-16	2	36.5	39.6	35.2	31.2	27.0	43.6
PAPA008	15-Apr-16	3	35.3	37.0	34.4	32.8	30.8	43.6
PAPA008	15-Apr-16	4	35.0	37.3	34.3	29.6	26.1	49.0
PAPA008	15-Apr-16	5	35.3	38.4	33.0	31.1	28.7	47.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	15-Apr-16	6	33.4	35.2	33.0	30.0	26.5	43.8
PAPA008	15-Apr-16	7	38.3	38.2	34.5	31.8	29.1	60.1
PAPA008	15-Apr-16	8	33.1	34.9	31.1	28.2	24.3	54.1
PAPA008	15-Apr-16	9	34.8	35.0	30.9	27.9	24.0	59.2
PAPA008	15-Apr-16	10	33.8	35.4	30.9	27.9	24.7	52.3
PAPA008	15-Apr-16	11	37.0	39.2	33.7	30.0	26.3	59.4
PAPA008	15-Apr-16	12	36.6	38.6	33.8	30.4	27.1	56.3
PAPA008	15-Apr-16	13	36.2	39.1	33.9	30.3	26.2	51.7
PAPA008	15-Apr-16	14	36.1	39.5	33.8	30.1	26.3	49.5
PAPA008	15-Apr-16	15	30.5	33.8	28.1	24.6	20.9	44.7
PAPA008	15-Apr-16	16	27.9	30.1	27.1	24.6	21.7	38.7
PAPA008	15-Apr-16	17	32.1	34.7	30.5	27.3	24.5	46.4
PAPA008	15-Apr-16	18	32.0	34.4	30.5	27.4	24.2	49.3
PAPA008	15-Apr-16	19	31.8	34.1	28.8	25.4	22.0	50.9
PAPA008	15-Apr-16	20	32.5	35.0	30.7	28.0	25.6	48.1
PAPA008	15-Apr-16	21	34.3	36.7	33.7	30.5	27.0	41.1
PAPA008	15-Apr-16	22	35.4	36.8	34.8	32.8	30.0	47.3
PAPA008	15-Apr-16	23	35.4	37.1	35.1	33.1	31.0	40.2
PAPA008	16-Apr-16	0	34.4	35.9	34.3	32.3	29.3	38.4
PAPA008	16-Apr-16	1	31.7	34.0	30.6	28.8	26.4	45.2
PAPA008	16-Apr-16	2	34.1	36.4	33.5	30.5	27.0	40.0
PAPA008	16-Apr-16	3	35.4	37.4	34.9	32.9	29.6	42.3
PAPA008	16-Apr-16	4	37.8	40.0	37.2	34.8	32.1	45.9
PAPA008	16-Apr-16	5	38.4	41.3	35.7	33.2	28.9	51.1
PAPA008	16-Apr-16	6	37.4	39.7	36.3	34.0	30.6	50.0
PAPA008	16-Apr-16	7	35.7	37.6	35.4	28.0	24.6	50.9
PAPA008	16-Apr-16	8	30.2	30.5	26.8	23.3	20.5	52.2
PAPA008	16-Apr-16	9	30.1	31.5	25.0	22.4	20.4	48.7
PAPA008	16-Apr-16	10	34.7	31.7	26.3	24.2	21.2	64.8
PAPA008	16-Apr-16	11	29.2	29.8	25.3	23.0	20.4	48.3
PAPA008	16-Apr-16	12	25.1	26.3	23.5	21.1	19.4	44.1
PAPA008	16-Apr-16	13	28.6	29.7	22.7	20.4	19.1	48.0
PAPA008	16-Apr-16	14	27.8	30.9	25.2	22.0	19.5	42.6
PAPA008	16-Apr-16	15	37.3	33.6	27.4	24.5	21.8	69.8
PAPA008	16-Apr-16	16	32.6	35.9	30.3	26.3	22.5	45.5
PAPA008	16-Apr-16	17	35.4	38.9	32.7	28.4	24.9	48.1
PAPA008	16-Apr-16	18	33.7	37.0	31.6	27.7	23.6	47.2
PAPA008	16-Apr-16	19	35.1	38.4	32.8	29.0	26.2	49.1
PAPA008	16-Apr-16	20	36.2	40.1	29.7	27.0	24.3	52.3
PAPA008	16-Apr-16	21	29.3	32.3	27.9	25.0	22.9	37.5
PAPA008	16-Apr-16	22	32.1	34.4	31.4	27.9	21.9	39.9
PAPA008	16-Apr-16	23	32.3	35.2	31.1	27.7	25.1	40.4
PAPA008	17-Apr-16	0	30.7	33.0	30.0	27.1	23.9	38.0
PAPA008	17-Apr-16	1	35.5	38.2	34.4	30.9	27.5	48.1
PAPA008	17-Apr-16	2	33.7	35.7	33.5	30.5	28.2	39.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	17-Apr-16	3	34.7	36.8	33.8	32.2	30.2	43.4
PAPA008	17-Apr-16	4	36.9	40.4	35.3	30.7	28.0	47.1
PAPA008	17-Apr-16	5	37.3	41.1	31.2	28.6	26.2	52.2
PAPA008	17-Apr-16	6	38.4	40.4	33.0	29.7	26.9	54.3
PAPA008	17-Apr-16	7	28.7	31.5	26.9	23.8	21.9	42.8
PAPA008	17-Apr-16	8	28.1	32.2	25.3	21.9	19.6	37.0
PAPA008	17-Apr-16	9	26.6	28.6	23.3	20.7	19.3	44.6
PAPA008	17-Apr-16	10	25.0	24.4	21.5	19.8	18.0	43.7
PAPA008	17-Apr-16	11	25.5	27.2	24.8	23.2	21.4	37.7
PAPA008	17-Apr-16	12	28.3	30.8	26.1	23.8	21.0	46.0
PAPA008	17-Apr-16	13	27.9	30.2	26.9	24.4	21.9	38.8
PAPA008	17-Apr-16	14	29.2	31.6	27.0	24.5	21.5	44.9
PAPA008	17-Apr-16	15	30.5	33.8	28.4	24.9	21.5	41.7
PAPA008	17-Apr-16	16	35.0	36.2	30.1	26.6	22.2	56.8
PAPA008	17-Apr-16	17	26.9	29.1	25.5	22.8	19.5	41.1
PAPA008	17-Apr-16	18	27.9	30.2	26.7	23.7	20.7	40.8
PAPA008	17-Apr-16	19	29.1	31.0	28.5	26.5	23.6	38.5
PAPA008	17-Apr-16	20	35.1	34.3	28.3	25.8	23.3	53.1
PAPA008	17-Apr-16	21	46.7	36.0	32.1	27.8	23.9	75.1
PAPA008	17-Apr-16	22	31.0	34.2	29.6	26.3	23.5	40.2
PAPA008	17-Apr-16	23	33.6	36.9	31.3	28.3	25.3	45.1
PAPA008	18-Apr-16	0	31.4	33.0	30.8	28.8	26.4	41.8
PAPA008	18-Apr-16	1	35.1	37.8	34.9	28.6	26.3	42.0
PAPA008	18-Apr-16	2	35.4	37.1	35.1	32.7	30.5	48.1
PAPA008	18-Apr-16	3	33.7	35.7	33.1	31.5	29.7	39.4
PAPA008	18-Apr-16	4	35.0	36.9	34.6	32.2	30.4	41.4
PAPA008	18-Apr-16	5	38.3	42.6	33.7	29.3	27.7	50.3
PAPA008	18-Apr-16	6	44.0	47.8	41.9	36.5	31.5	51.9
PAPA008	18-Apr-16	7	33.0	36.8	30.5	28.0	25.9	43.6
PAPA008	18-Apr-16	8	29.6	31.5	28.9	25.6	22.9	44.9
PAPA008	18-Apr-16	9	24.9	26.7	23.8	21.5	19.5	38.2
PAPA008	18-Apr-16	10	26.9	26.8	23.0	21.2	19.9	50.5
PAPA008	18-Apr-16	11	25.0	26.2	23.4	21.5	19.0	46.3
PAPA008	18-Apr-16	12	36.3	27.1	23.2	21.5	19.5	63.9
PAPA008	18-Apr-16	13	25.3	26.7	25.1	23.6	21.2	30.6
PAPA008	18-Apr-16	14	32.8	28.4	25.1	23.4	21.9	57.4
PAPA008	18-Apr-16	15	27.9	27.4	25.1	22.4	20.4	50.1
PAPA008	18-Apr-16	16	25.3	27.4	24.6	22.5	20.7	34.0
PAPA008	18-Apr-16	17	27.2	27.7	25.0	23.1	21.4	52.9
PAPA008	18-Apr-16	18	24.7	24.5	22.5	20.8	18.9	44.5
PAPA008	18-Apr-16	19	26.4	28.2	25.9	23.6	20.6	37.1
PAPA008	18-Apr-16	20	31.3	30.9	26.7	25.0	23.4	49.4
PAPA008	18-Apr-16	21	28.2	29.9	27.4	25.9	24.0	39.7
PAPA008	18-Apr-16	22	29.6	31.1	29.1	27.8	26.0	37.3
PAPA008	18-Apr-16	23	30.5	32.8	29.0	26.6	23.8	42.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA008	19-Apr-16	0	25.7	27.3	25.0	23.7	22.1	34.8
PAPA008	19-Apr-16	1	27.7	30.8	25.9	23.0	21.0	35.3
PAPA008	19-Apr-16	2	23.9	26.9	22.5	20.6	18.9	32.6
PAPA008	19-Apr-16	3	22.4	24.5	21.8	20.4	19.1	28.9
PAPA008	19-Apr-16	4	22.9	25.0	21.7	20.3	19.1	44.6
PAPA008	19-Apr-16	5	22.6	22.2	20.6	19.3	18.2	40.7
PAPA008	19-Apr-16	6	24.1	24.6	21.6	20.1	18.7	39.5
PAPA008	19-Apr-16	7	22.1	24.0	20.9	19.6	18.4	32.6
PAPA008	19-Apr-16	8	26.7	26.4	21.3	19.9	18.6	51.5
PAPA008	19-Apr-16	9	41.3	28.8	22.4	20.9	19.3	65.8
PAPA008	19-Apr-16	10	36.4	28.2	23.0	21.4	19.5	63.0
PAPA008	19-Apr-16	11	28.8	29.3	25.0	23.3	21.6	48.6
PAPA008	19-Apr-16	12	32.1	31.3	22.6	20.8	18.9	57.1
PAPA008	19-Apr-16	13	32.3	33.2	23.9	20.8	19.4	52.1
PAPA009	10-Apr-13	12	34.1	25.5	23.5	22.1	20.8	59.0
PAPA009	10-Apr-13	13	25.7	27.1	25.2	23.3	21.7	35.5
PAPA009	10-Apr-13	14	27.8	29.5	27.2	25.9	23.6	40.4
PAPA009	10-Apr-13	15	28.0	30.0	26.9	25.0	22.7	43.1
PAPA009	10-Apr-13	16	28.7	31.4	26.3	24.6	23.5	42.8
PAPA009	10-Apr-13	17	32.1	35.2	29.4	25.7	22.9	46.1
PAPA009	10-Apr-13	18	37.1	40.3	35.3	30.1	26.0	48.7
PAPA009	10-Apr-13	19	35.0	37.8	32.6	28.0	23.9	52.1
PAPA009	10-Apr-13	20	35.1	38.1	33.7	30.3	27.4	45.0
PAPA009	10-Apr-13	21	26.5	29.4	24.7	22.4	20.8	38.7
PAPA009	10-Apr-13	22	26.4	28.6	25.3	23.5	21.6	37.0
PAPA009	10-Apr-13	23	26.0	28.2	24.5	22.2	20.0	39.8
PAPA009	11-Apr-13	0	23.9	25.7	23.5	21.7	20.3	30.3
PAPA009	11-Apr-13	1	29.7	32.6	28.2	25.8	24.2	40.1
PAPA009	11-Apr-13	2	32.7	35.1	31.2	28.3	25.6	49.2
PAPA009	11-Apr-13	3	29.9	32.6	29.1	25.3	20.1	38.8
PAPA009	11-Apr-13	4	25.7	27.9	25.1	22.7	20.4	33.6
PAPA009	11-Apr-13	5	26.3	28.7	25.3	23.1	22.1	32.9
PAPA009	11-Apr-13	6	25.5	26.9	25.3	23.7	22.0	35.6
PAPA009	11-Apr-13	7	27.6	28.9	26.5	24.5	22.1	44.6
PAPA009	11-Apr-13	8	29.9	32.7	28.6	25.5	22.3	40.6
PAPA009	11-Apr-13	9	33.5	36.5	31.3	27.4	24.4	47.6
PAPA009	11-Apr-13	10	35.6	38.8	33.7	29.2	24.3	47.6
PAPA009	11-Apr-13	11	35.3	39.1	32.9	27.9	22.4	50.4
PAPA009	11-Apr-13	12	35.5	39.2	33.2	27.2	21.0	49.5
PAPA009	11-Apr-13	13	35.1	38.5	32.4	27.0	21.6	51.0
PAPA009	11-Apr-13	14	34.1	37.6	31.8	26.3	22.1	47.3
PAPA009	11-Apr-13	15	34.6	37.8	31.9	26.8	21.5	47.7
PAPA009	11-Apr-13	16	36.2	39.8	33.7	27.6	23.8	49.6
PAPA009	11-Apr-13	17	35.5	38.9	33.5	28.8	24.1	48.3
PAPA009	11-Apr-13	18	32.8	36.0	30.8	26.2	22.3	45.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	11-Apr-13	19	31.4	34.5	29.6	26.1	22.1	42.8
PAPA009	11-Apr-13	20	27.6	30.5	25.8	23.6	21.6	40.5
PAPA009	11-Apr-13	21	25.6	27.1	25.2	23.7	22.1	34.2
PAPA009	11-Apr-13	22	26.1	27.9	25.6	23.7	22.1	34.9
PAPA009	11-Apr-13	23	27.3	29.0	26.9	25.1	22.6	36.2
PAPA009	12-Apr-13	0	24.5	27.4	22.6	20.2	18.6	34.8
PAPA009	12-Apr-13	1	20.7	22.6	19.3	18.3	17.2	31.5
PAPA009	12-Apr-13	2	19.5	20.5	19.1	18.4	17.6	28.9
PAPA009	12-Apr-13	3	22.4	25.3	20.6	19.1	18.1	34.0
PAPA009	12-Apr-13	4	24.2	26.3	23.5	21.4	19.4	33.0
PAPA009	12-Apr-13	5	25.5	27.3	25.2	23.4	21.6	30.9
PAPA009	12-Apr-13	6	25.3	26.8	24.8	23.2	21.5	39.8
PAPA009	12-Apr-13	7	26.6	28.3	26.1	24.2	21.8	34.0
PAPA009	12-Apr-13	8	27.5	28.3	23.7	20.5	18.7	46.2
PAPA009	12-Apr-13	9	26.5	28.0	21.9	20.3	18.8	46.2
PAPA009	12-Apr-13	10	28.2	31.4	25.9	22.0	19.9	41.1
PAPA009	12-Apr-13	11	27.1	30.0	24.4	21.3	19.6	40.7
PAPA009	12-Apr-13	12	26.7	30.0	23.0	19.7	18.2	48.4
PAPA009	12-Apr-13	13	30.4	32.9	26.2	21.6	18.4	54.2
PAPA009	20-Apr-14	11	24.0	27.0	21.2	18.2	16.3	40.1
PAPA009	20-Apr-14	12	30.7	31.4	22.9	19.6	17.6	53.3
PAPA009	20-Apr-14	13	27.4	30.9	22.9	19.8	18.1	45.7
PAPA009	20-Apr-14	14	39.4	38.3	28.2	21.0	18.3	62.5
PAPA009	20-Apr-14	15	30.7	34.2	25.9	19.6	16.7	48.6
PAPA009	20-Apr-14	16	32.3	35.9	29.1	22.7	18.2	48.1
PAPA009	20-Apr-14	17	32.1	35.6	28.5	22.6	18.6	47.4
PAPA009	20-Apr-14	18	28.5	31.9	26.0	21.1	16.3	40.7
PAPA009	20-Apr-14	19	25.6	29.0	21.4	18.6	16.8	41.0
PAPA009	20-Apr-14	20	24.3	27.5	21.2	19.0	17.0	37.1
PAPA009	20-Apr-14	21	22.4	24.4	21.7	18.7	17.3	33.7
PAPA009	20-Apr-14	22	20.7	21.9	20.2	19.1	17.9	29.5
PAPA009	20-Apr-14	23	20.6	21.9	20.5	19.0	17.8	24.0
PAPA009	21-Apr-14	0	23.0	24.5	22.9	21.1	19.1	26.9
PAPA009	21-Apr-14	1	21.0	22.3	20.7	19.4	18.3	27.1
PAPA009	21-Apr-14	2	21.2	23.0	20.7	19.5	18.4	25.4
PAPA009	21-Apr-14	3	22.4	24.8	21.0	19.5	17.6	33.2
PAPA009	21-Apr-14	4	27.4	30.8	24.9	20.9	19.5	40.4
PAPA009	21-Apr-14	5	33.4	36.2	30.9	28.5	26.0	46.7
PAPA009	21-Apr-14	6	31.0	34.8	28.7	25.6	23.5	42.8
PAPA009	21-Apr-14	7	26.3	28.1	25.6	23.7	20.5	34.5
PAPA009	21-Apr-14	8	24.3	27.1	22.7	19.0	17.0	37.8
PAPA009	21-Apr-14	9	18.5	19.8	17.8	16.8	15.7	30.2
PAPA009	21-Apr-14	10	20.1	20.5	18.6	17.7	16.8	39.8
PAPA009	21-Apr-14	11	22.3	22.7	18.7	17.5	16.5	46.2
PAPA009	21-Apr-14	12	20.1	21.4	19.1	17.9	16.9	34.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	21-Apr-14	13	30.6	28.2	20.9	19.1	17.7	53.7
PAPA009	21-Apr-14	14	22.6	24.6	21.0	19.2	17.6	37.3
PAPA009	21-Apr-14	15	24.0	26.6	21.7	18.9	17.3	41.2
PAPA009	21-Apr-14	16	29.0	32.8	22.4	18.6	17.0	46.5
PAPA009	21-Apr-14	17	22.5	26.0	18.5	16.4	15.6	39.2
PAPA009	21-Apr-14	18	20.4	23.1	18.3	16.9	15.9	32.6
PAPA009	21-Apr-14	19	20.3	22.7	17.9	16.1	15.2	35.2
PAPA009	21-Apr-14	20	27.5	30.2	25.4	21.3	15.9	41.0
PAPA009	21-Apr-14	21	24.9	26.4	24.1	22.8	21.1	35.8
PAPA009	21-Apr-14	22	23.6	25.5	23.0	21.1	19.5	31.6
PAPA009	21-Apr-14	23	24.6	26.5	24.5	21.6	20.0	31.1
PAPA009	22-Apr-14	0	26.2	27.9	25.8	24.0	22.0	32.6
PAPA009	22-Apr-14	1	27.9	30.8	26.7	24.0	21.9	35.7
PAPA009	22-Apr-14	2	29.4	31.3	28.9	26.4	22.2	36.6
PAPA009	22-Apr-14	3	31.0	33.7	30.1	26.5	22.3	38.0
PAPA009	22-Apr-14	4	30.5	33.0	29.6	27.8	25.9	38.1
PAPA009	22-Apr-14	5	29.3	30.7	28.5	27.0	24.8	39.9
PAPA009	22-Apr-14	6	30.1	32.6	28.3	27.0	25.6	41.5
PAPA009	22-Apr-14	7	28.2	29.5	27.9	26.6	25.2	34.8
PAPA009	22-Apr-14	8	29.6	31.9	28.6	27.0	25.2	40.7
PAPA009	22-Apr-14	9	33.2	34.0	30.4	28.6	27.0	53.1
PAPA009	22-Apr-14	10	28.5	30.0	26.3	23.9	22.3	45.4
PAPA009	22-Apr-14	11	27.6	30.0	25.7	24.0	20.8	42.2
PAPA009	22-Apr-14	12	39.1	42.9	31.4	24.4	21.5	55.3
PAPA009	22-Apr-14	13	37.6	40.9	33.7	28.0	24.2	56.5
PAPA009	22-Apr-14	14	29.7	33.8	25.9	20.6	18.4	42.7
PAPA009	22-Apr-14	15	26.9	29.9	24.3	20.7	19.1	42.1
PAPA009	22-Apr-14	16	43.9	45.2	32.4	24.9	21.2	65.4
PAPA009	22-Apr-14	17	37.2	40.8	33.5	26.9	22.0	53.9
PAPA009	22-Apr-14	18	37.5	41.4	32.5	24.4	19.5	54.8
PAPA009	22-Apr-14	19	35.6	39.6	28.7	25.9	21.3	51.1
PAPA009	22-Apr-14	20	45.4	48.8	39.6	33.3	27.3	60.7
PAPA009	22-Apr-14	21	38.9	42.1	35.7	31.6	28.6	58.5
PAPA009	22-Apr-14	22	39.2	42.8	35.4	29.1	25.4	55.2
PAPA009	22-Apr-14	23	31.9	35.4	29.4	25.4	23.2	46.0
PAPA009	04-Apr-15	12	23.1	24.7	20.9	19.6	18.5	40.3
PAPA009	04-Apr-15	13	29.2	29.4	21.6	19.4	17.9	56.3
PAPA009	04-Apr-15	14	38.4	41.5	32.8	23.9	20.5	59.2
PAPA009	04-Apr-15	15	39.9	43.7	36.6	29.7	23.2	53.7
PAPA009	04-Apr-15	16	42.7	46.6	39.3	31.3	24.0	56.2
PAPA009	04-Apr-15	17	44.7	48.1	41.8	35.5	28.2	56.9
PAPA009	04-Apr-15	18	42.6	46.7	39.4	31.3	25.2	54.8
PAPA009	04-Apr-15	19	31.6	35.4	27.2	24.1	21.7	46.7
PAPA009	04-Apr-15	20	27.6	29.4	25.6	23.6	22.1	41.2
PAPA009	04-Apr-15	21	26.5	27.8	25.8	24.3	22.7	37.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	04-Apr-15	22	24.7	26.3	24.3	23.0	22.1	37.9
PAPA009	04-Apr-15	23	27.3	29.9	24.9	23.3	21.6	40.3
PAPA009	05-Apr-15	0	28.7	31.6	28.1	23.8	22.2	37.8
PAPA009	05-Apr-15	1	25.8	27.5	25.4	23.5	21.0	36.4
PAPA009	05-Apr-15	2	27.2	28.2	25.4	23.5	21.2	49.1
PAPA009	05-Apr-15	3	25.0	26.9	24.7	22.6	21.0	36.5
PAPA009	05-Apr-15	4	26.0	27.8	25.6	24.0	21.9	35.4
PAPA009	05-Apr-15	5	28.6	29.8	27.0	25.7	24.2	51.6
PAPA009	05-Apr-15	6	33.4	35.6	31.8	28.2	24.9	46.3
PAPA009	05-Apr-15	7	32.6	34.9	30.9	29.1	27.1	53.1
PAPA009	05-Apr-15	8	32.1	34.6	31.3	28.8	26.5	40.4
PAPA009	05-Apr-15	9	31.6	33.5	29.4	26.7	24.5	56.0
PAPA009	05-Apr-15	10	35.3	29.3	24.2	21.3	19.3	57.6
PAPA009	05-Apr-15	11	29.5	32.6	25.2	21.3	18.6	46.6
PAPA009	05-Apr-15	12	41.6	45.0	35.1	27.7	20.6	66.2
PAPA009	05-Apr-15	13	42.8	46.7	39.2	32.2	26.2	59.7
PAPA009	05-Apr-15	14	38.7	42.7	34.2	27.1	21.6	52.7
PAPA009	05-Apr-15	15	41.4	45.2	37.5	31.0	24.9	58.2
PAPA009	05-Apr-15	16	40.5	44.2	36.8	29.1	21.9	55.1
PAPA009	05-Apr-15	17	37.3	41.2	33.9	27.0	20.8	54.1
PAPA009	05-Apr-15	18	34.4	37.7	30.7	25.0	21.0	50.9
PAPA009	05-Apr-15	19	24.6	26.1	23.1	21.5	18.6	42.8
PAPA009	05-Apr-15	20	27.9	30.2	26.8	22.4	19.2	40.9
PAPA009	05-Apr-15	21	24.5	26.1	24.0	22.7	21.1	29.4
PAPA009	05-Apr-15	22	26.1	28.4	25.1	23.3	21.9	36.4
PAPA009	05-Apr-15	23	26.9	28.8	26.2	23.1	20.9	40.1
PAPA009	06-Apr-15	0	29.4	32.0	28.3	25.5	23.6	39.6
PAPA009	06-Apr-15	1	30.9	32.5	30.4	28.9	26.9	39.9
PAPA009	06-Apr-15	2	29.6	30.7	29.4	28.3	27.0	37.6
PAPA009	06-Apr-15	3	31.4	33.0	30.5	28.9	26.5	40.4
PAPA009	06-Apr-15	4	30.2	32.2	29.3	27.3	25.6	42.5
PAPA009	06-Apr-15	5	30.5	33.1	28.6	27.0	25.3	41.7
PAPA009	06-Apr-15	6	35.2	36.8	31.3	27.4	25.2	59.3
PAPA009	06-Apr-15	7	31.7	34.1	30.9	28.8	25.5	39.0
PAPA009	06-Apr-15	8	32.0	34.0	31.5	29.0	25.9	40.9
PAPA009	06-Apr-15	9	32.6	34.7	31.1	28.2	25.9	54.1
PAPA009	06-Apr-15	10	31.8	35.2	26.5	23.7	21.2	50.9
PAPA009	06-Apr-15	11	40.9	44.6	37.4	30.4	25.3	55.9
PAPA009	06-Apr-15	12	40.6	44.4	37.5	30.1	23.8	52.8
PAPA009	06-Apr-15	13	41.1	45.0	37.7	28.6	23.3	56.7
PAPA009	06-Apr-15	14	41.6	45.5	37.1	30.4	25.6	58.8
PAPA009	06-Apr-15	15	41.0	44.8	37.2	29.9	23.8	56.1
PAPA009	06-Apr-15	16	40.3	44.3	36.9	29.4	24.1	53.6
PAPA009	06-Apr-15	17	41.7	45.5	39.0	32.3	23.9	54.9
PAPA009	06-Apr-15	18	45.2	48.8	42.2	36.0	27.9	57.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	06-Apr-15	19	42.4	46.2	38.7	32.3	26.7	58.0
PAPA009	06-Apr-15	20	43.8	47.6	40.6	34.9	30.0	58.8
PAPA009	06-Apr-15	21	37.2	40.2	34.5	31.4	28.2	52.4
PAPA009	06-Apr-15	22	31.3	33.2	30.7	29.1	27.4	38.7
PAPA009	06-Apr-15	23	29.1	31.0	28.5	26.2	23.4	36.8
PAPA009	07-Apr-15	0	27.7	29.4	27.0	24.9	22.5	36.4
PAPA009	07-Apr-15	1	25.9	27.7	25.2	23.4	21.6	38.4
PAPA009	07-Apr-15	2	27.1	28.2	25.5	23.6	21.5	40.5
PAPA009	07-Apr-15	3	28.3	30.1	27.1	25.2	23.3	39.7
PAPA009	07-Apr-15	4	30.7	32.9	30.1	27.8	25.7	37.0
PAPA009	07-Apr-15	5	30.5	33.4	28.0	25.1	23.1	44.3
PAPA009	07-Apr-15	6	33.3	36.3	31.8	27.9	24.3	46.7
PAPA009	07-Apr-15	7	33.5	36.1	32.5	29.7	27.8	42.3
PAPA009	07-Apr-15	8	34.1	34.5	31.8	29.6	27.4	51.0
PAPA009	07-Apr-15	9	29.6	32.2	28.8	25.1	21.5	41.2
PAPA009	07-Apr-15	10	36.0	33.2	28.8	23.8	21.1	56.0
PAPA009	07-Apr-15	11	32.7	35.3	31.9	27.1	23.3	47.7
PAPA009	07-Apr-15	12	30.2	31.4	27.6	24.4	21.2	50.0
PAPA009	07-Apr-15	13	29.3	26.1	22.7	21.5	20.3	56.5
PAPA009	07-Apr-15	14	24.2	26.0	23.5	22.1	20.2	41.5
PAPA009	07-Apr-15	15	32.8	28.7	23.8	21.8	20.1	65.2
PAPA009	07-Apr-15	16	33.3	36.1	26.8	23.0	20.9	50.0
PAPA009	07-Apr-15	17	36.8	39.9	34.2	31.1	28.4	51.3
PAPA009	07-Apr-15	18	31.5	34.0	30.4	27.4	24.6	43.6
PAPA009	07-Apr-15	19	31.2	33.2	30.4	28.5	24.8	43.3
PAPA009	07-Apr-15	20	31.4	33.0	30.7	29.1	27.8	45.9
PAPA009	07-Apr-15	21	30.1	31.7	29.7	28.5	26.6	35.5
PAPA009	07-Apr-15	22	28.6	30.4	27.0	23.6	20.3	45.5
PAPA009	07-Apr-15	23	27.5	30.0	25.8	22.6	19.2	43.3
PAPA009	08-Apr-15	0	28.2	30.9	27.6	21.6	18.6	35.4
PAPA009	08-Apr-15	1	28.1	30.1	27.7	25.4	22.1	34.2
PAPA009	08-Apr-15	2	28.5	30.7	27.8	24.6	21.7	37.3
PAPA009	08-Apr-15	3	21.7	24.2	20.7	16.8	15.4	29.8
PAPA009	08-Apr-15	4	28.3	29.5	25.8	23.8	21.7	50.3
PAPA009	08-Apr-15	5	27.7	29.3	25.9	23.9	21.8	48.8
PAPA009	08-Apr-15	6	23.3	26.0	21.8	18.2	16.1	37.7
PAPA009	08-Apr-15	7	25.5	27.1	22.8	20.4	18.1	39.9
PAPA009	08-Apr-15	8	25.4	26.6	23.4	21.8	20.0	42.3
PAPA009	08-Apr-15	9	25.6	26.4	23.4	21.7	19.1	51.1
PAPA009	08-Apr-15	10	24.4	25.2	21.6	19.0	16.3	42.0
PAPA009	08-Apr-15	11	24.3	26.7	21.9	19.2	17.0	39.9
PAPA009	08-Apr-15	12	22.4	24.0	20.2	17.9	16.3	44.3
PAPA009	08-Apr-15	13	27.4	28.9	24.9	23.5	21.7	43.6
PAPA009	08-Apr-15	14	32.9	36.2	30.5	24.2	20.7	44.8
PAPA009	08-Apr-15	15	27.7	30.6	26.2	23.2	21.4	36.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	08-Apr-15	16	28.2	31.5	26.5	23.8	21.3	36.3
PAPA009	08-Apr-15	17	30.7	33.4	28.5	25.2	22.8	44.5
PAPA009	08-Apr-15	18	29.1	31.6	26.7	23.3	20.4	54.5
PAPA009	08-Apr-15	19	29.3	32.3	27.6	23.2	20.5	41.7
PAPA009	08-Apr-15	20	29.9	32.2	28.5	25.8	22.6	48.4
PAPA009	08-Apr-15	21	30.6	33.6	28.7	25.4	22.1	42.9
PAPA009	08-Apr-15	22	27.6	30.8	23.5	20.7	19.1	41.7
PAPA009	08-Apr-15	23	26.1	27.9	25.3	23.5	21.3	42.8
PAPA009	09-Apr-15	0	25.5	26.7	24.2	22.4	20.1	39.2
PAPA009	09-Apr-15	1	27.4	29.6	26.7	25.0	22.8	33.7
PAPA009	09-Apr-15	2	29.1	30.8	28.4	26.6	24.8	39.2
PAPA009	09-Apr-15	3	28.2	30.9	27.3	24.4	22.8	38.0
PAPA009	09-Apr-15	4	28.4	30.9	27.7	24.9	22.2	34.9
PAPA009	09-Apr-15	5	31.5	35.7	28.2	19.5	17.0	42.3
PAPA009	09-Apr-15	6	33.1	36.5	31.0	20.0	17.0	54.5
PAPA009	09-Apr-15	7	34.4	36.5	32.1	25.7	16.7	56.7
PAPA009	09-Apr-15	8	32.5	36.2	29.8	24.1	21.2	49.2
PAPA009	09-Apr-15	9	27.5	31.4	22.1	20.1	18.4	43.0
PAPA009	09-Apr-15	10	21.5	23.4	21.1	18.9	17.7	33.6
PAPA009	09-Apr-15	11	26.5	27.3	23.6	22.3	19.5	45.3
PAPA009	09-Apr-15	12	23.6	25.4	22.4	20.5	19.5	46.1
PAPA009	09-Apr-15	13	21.4	23.1	20.6	19.1	18.2	39.2
PAPA009	09-Apr-15	14	33.7	26.4	20.9	19.5	17.6	60.2
PAPA009	09-Apr-15	15	24.9	24.6	21.1	19.8	18.8	46.5
PAPA009	09-Apr-15	16	25.7	26.9	21.5	19.7	18.5	44.5
PAPA009	09-Apr-15	17	21.1	23.4	19.7	18.4	17.1	33.8
PAPA009	09-Apr-15	18	27.2	30.9	25.2	20.4	17.3	38.6
PAPA009	09-Apr-15	19	32.1	34.4	31.5	27.8	25.8	46.7
PAPA009	09-Apr-15	20	38.7	42.1	37.2	30.8	28.5	52.3
PAPA009	09-Apr-15	21	31.1	33.1	30.6	28.9	26.2	36.9
PAPA009	09-Apr-15	22	31.5	32.9	31.0	29.8	27.2	41.1
PAPA009	09-Apr-15	23	27.3	29.1	25.2	21.8	20.0	40.0
PAPA009	10-Apr-15	0	26.9	30.2	24.5	21.6	19.5	40.0
PAPA009	10-Apr-15	1	26.3	28.4	24.2	22.9	21.6	48.5
PAPA009	10-Apr-15	2	28.2	30.9	27.2	23.7	22.4	36.1
PAPA009	10-Apr-15	3	31.2	33.5	30.1	28.6	26.0	39.2
PAPA009	10-Apr-15	4	31.7	34.2	30.8	28.8	27.2	38.3
PAPA009	10-Apr-15	5	35.3	38.0	34.5	30.5	28.7	43.6
PAPA009	10-Apr-15	6	33.8	36.2	32.0	30.4	28.9	52.1
PAPA009	10-Apr-15	7	32.7	34.1	31.6	29.8	28.0	52.8
PAPA009	10-Apr-15	8	33.3	35.7	32.2	30.6	28.7	42.2
PAPA009	10-Apr-15	9	31.2	31.3	27.8	19.7	17.2	49.9
PAPA009	10-Apr-15	10	23.2	24.7	22.2	18.8	17.7	46.0
PAPA009	10-Apr-15	11	31.7	25.8	23.0	21.4	20.4	60.4
PAPA009	10-Apr-15	12	23.7	25.8	22.2	20.6	19.2	39.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	10-Apr-15	13	36.2	26.2	22.3	21.0	19.6	59.4
PAPA009	10-Apr-15	14	24.7	26.4	22.8	21.3	19.8	37.7
PAPA009	10-Apr-15	15	31.6	27.0	23.5	21.9	19.9	64.7
PAPA009	10-Apr-15	16	23.2	25.1	22.1	20.7	19.4	37.4
PAPA009	10-Apr-15	17	22.8	25.1	20.9	19.1	17.4	39.6
PAPA009	10-Apr-15	18	20.6	21.5	18.4	17.5	16.7	37.2
PAPA009	10-Apr-15	19	25.2	27.2	22.9	20.1	17.2	43.2
PAPA009	10-Apr-15	20	31.0	34.7	26.4	23.0	20.0	47.9
PAPA009	10-Apr-15	21	23.1	23.8	22.3	20.0	18.1	48.1
PAPA009	10-Apr-15	22	22.7	24.1	22.6	20.5	17.7	26.9
PAPA009	10-Apr-15	23	24.1	25.7	24.0	21.9	19.6	29.1
PAPA009	11-Apr-15	0	25.1	26.5	24.9	23.1	20.3	31.6
PAPA009	11-Apr-15	1	23.4	24.5	23.1	22.2	20.5	28.8
PAPA009	11-Apr-15	2	28.7	32.3	25.5	23.8	21.8	41.6
PAPA009	11-Apr-15	3	34.2	36.9	33.2	30.1	27.0	46.9
PAPA009	11-Apr-15	4	31.3	33.9	30.5	27.1	24.4	38.9
PAPA009	11-Apr-15	5	33.6	37.5	30.3	27.8	25.4	43.9
PAPA009	11-Apr-15	6	37.6	40.1	35.4	30.5	27.4	52.5
PAPA009	11-Apr-15	7	32.5	34.5	31.7	29.3	27.8	44.8
PAPA009	11-Apr-15	8	34.5	36.0	34.1	32.5	29.8	42.5
PAPA009	11-Apr-15	9	33.8	34.9	32.3	30.4	28.7	52.0
PAPA009	11-Apr-15	10	32.4	33.9	30.9	27.1	24.3	55.3
PAPA009	11-Apr-15	11	42.4	29.2	23.5	22.0	20.4	73.2
PAPA009	11-Apr-15	12	36.8	40.0	32.3	25.7	21.5	54.9
PAPA009	11-Apr-15	13	39.6	43.2	36.9	30.8	24.7	52.1
PAPA009	11-Apr-15	14	40.7	44.3	38.3	32.1	25.8	55.3
PAPA009	11-Apr-15	15	39.8	43.5	36.2	30.0	25.4	54.8
PAPA009	11-Apr-15	16	37.9	41.4	34.9	29.3	23.9	54.5
PAPA009	11-Apr-15	17	38.9	42.6	36.3	30.0	24.6	50.7
PAPA009	11-Apr-15	18	38.6	42.3	36.1	29.8	25.3	56.8
PAPA009	11-Apr-15	19	36.9	40.4	34.0	27.3	23.9	52.9
PAPA009	11-Apr-15	20	36.4	39.0	35.3	32.6	29.6	47.2
PAPA009	11-Apr-15	21	34.1	35.8	33.5	31.3	28.8	42.7
PAPA009	11-Apr-15	22	33.6	35.3	32.9	31.3	29.6	42.4
PAPA009	11-Apr-15	23	35.3	38.3	33.7	30.5	28.8	42.8
PAPA009	12-Apr-15	0	31.6	33.0	31.3	30.0	28.1	38.2
PAPA009	12-Apr-15	1	31.1	32.7	30.7	29.1	27.2	37.7
PAPA009	12-Apr-15	2	32.1	34.5	31.2	28.6	24.2	41.9
PAPA009	12-Apr-15	3	27.7	29.7	27.1	24.8	22.5	35.2
PAPA009	12-Apr-15	4	28.5	30.3	27.6	25.1	22.4	39.3
PAPA009	12-Apr-15	5	34.4	37.8	31.4	26.8	24.7	45.8
PAPA009	12-Apr-15	6	36.8	39.2	35.2	31.0	26.2	61.4
PAPA009	12-Apr-15	7	34.8	37.9	32.7	29.0	25.7	53.1
PAPA009	12-Apr-15	8	34.3	37.4	31.5	27.0	23.0	49.6
PAPA009	12-Apr-15	9	43.7	47.6	39.7	32.1	25.4	61.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	12-Apr-15	10	42.4	46.0	38.0	31.2	24.0	60.1
PAPA009	13-Apr-16	0	30.2	31.5	29.9	28.8	27.4	35.7
PAPA009	13-Apr-16	1	29.8	31.6	29.4	27.5	26.2	36.8
PAPA009	13-Apr-16	2	31.1	32.9	30.7	29.0	27.2	40.3
PAPA009	13-Apr-16	3	30.2	31.8	29.9	28.1	25.9	35.0
PAPA009	13-Apr-16	4	33.3	36.0	32.1	30.1	28.2	42.4
PAPA009	13-Apr-16	5	36.3	39.1	34.0	30.5	27.8	48.8
PAPA009	13-Apr-16	6	36.8	39.9	33.9	31.4	28.3	48.4
PAPA009	13-Apr-16	7	37.4	39.2	36.2	32.6	30.4	52.4
PAPA009	13-Apr-16	8	38.7	39.7	36.4	34.1	32.4	59.2
PAPA009	13-Apr-16	9	39.8	38.5	34.3	24.3	21.8	66.5
PAPA009	13-Apr-16	10	31.3	27.5	23.3	21.7	20.1	63.0
PAPA009	13-Apr-16	11	36.0	41.3	23.9	21.1	19.1	53.5
PAPA009	13-Apr-16	12	36.1	39.5	33.5	29.4	25.7	50.7
PAPA009	13-Apr-16	13	32.3	35.1	28.2	24.5	20.8	59.6
PAPA009	13-Apr-16	14	30.0	32.8	26.8	22.4	20.4	56.7
PAPA009	13-Apr-16	15	30.3	33.3	28.2	22.5	19.9	50.4
PAPA009	13-Apr-16	16	31.7	31.6	25.2	21.0	19.0	54.6
PAPA009	13-Apr-16	17	29.1	31.8	27.1	23.8	20.0	46.6
PAPA009	13-Apr-16	18	30.6	33.0	29.7	26.8	23.2	44.5
PAPA009	13-Apr-16	19	29.6	31.9	28.8	26.3	24.2	37.9
PAPA009	13-Apr-16	20	31.6	34.7	30.4	25.2	21.5	45.1
PAPA009	13-Apr-16	21	27.6	30.6	25.5	24.1	22.2	39.5
PAPA009	13-Apr-16	22	27.8	26.4	24.7	22.7	20.2	56.6
PAPA009	13-Apr-16	23	29.4	31.5	29.1	25.7	23.0	37.8
PAPA009	14-Apr-16	0	32.5	34.4	32.2	29.5	27.7	43.1
PAPA009	14-Apr-16	1	31.7	33.3	31.2	29.5	27.1	38.6
PAPA009	14-Apr-16	2	33.4	35.2	32.9	31.3	28.6	43.7
PAPA009	14-Apr-16	3	33.0	34.6	32.7	31.3	29.4	40.0
PAPA009	14-Apr-16	4	34.8	36.9	34.0	31.7	28.9	44.9
PAPA009	14-Apr-16	5	35.2	37.4	34.2	31.8	30.0	45.2
PAPA009	14-Apr-16	6	37.0	39.8	34.8	32.2	28.6	48.7
PAPA009	14-Apr-16	7	36.5	38.8	35.8	33.3	30.1	45.0
PAPA009	14-Apr-16	8	41.3	36.9	33.3	31.1	29.0	67.6
PAPA009	14-Apr-16	9	39.2	39.5	34.0	31.6	28.4	54.9
PAPA009	14-Apr-16	10	35.6	36.6	34.4	31.8	28.7	58.7
PAPA009	14-Apr-16	11	34.1	36.1	31.9	29.2	26.5	54.7
PAPA009	14-Apr-16	12	42.6	46.0	40.2	35.8	27.8	54.7
PAPA009	14-Apr-16	13	43.8	47.3	41.3	36.6	30.8	57.9
PAPA009	14-Apr-16	14	43.2	46.8	40.3	34.8	28.8	58.4
PAPA009	14-Apr-16	15	36.8	40.0	34.2	29.9	25.7	50.6
PAPA009	14-Apr-16	16	35.4	38.6	33.2	29.3	25.4	47.9
PAPA009	14-Apr-16	17	35.8	39.2	33.4	29.1	24.6	48.9
PAPA009	14-Apr-16	18	31.5	34.5	29.1	25.2	22.3	47.2
PAPA009	14-Apr-16	19	33.8	35.9	31.9	28.8	26.5	49.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	14-Apr-16	20	34.6	36.6	33.8	31.2	26.7	44.2
PAPA009	14-Apr-16	21	30.9	32.8	29.8	28.0	25.6	46.8
PAPA009	14-Apr-16	22	32.2	35.0	29.3	26.8	23.9	47.6
PAPA009	14-Apr-16	23	29.2	31.6	28.3	26.5	23.4	37.2
PAPA009	15-Apr-16	0	23.4	24.9	23.0	21.5	19.8	30.4
PAPA009	15-Apr-16	1	25.1	27.0	24.7	22.5	20.6	30.0
PAPA009	15-Apr-16	2	28.2	30.2	27.9	24.7	22.0	35.5
PAPA009	15-Apr-16	3	30.1	31.7	29.8	28.4	26.4	34.7
PAPA009	15-Apr-16	4	30.6	32.5	29.8	27.3	23.9	44.0
PAPA009	15-Apr-16	5	34.0	37.0	31.9	29.1	25.6	45.5
PAPA009	15-Apr-16	6	34.6	37.7	31.8	27.4	24.4	47.7
PAPA009	15-Apr-16	7	36.7	34.3	31.3	28.8	26.8	65.6
PAPA009	15-Apr-16	8	32.6	34.9	31.2	26.4	21.4	50.9
PAPA009	15-Apr-16	9	36.3	38.3	32.4	27.1	21.6	57.9
PAPA009	15-Apr-16	10	44.5	39.1	32.9	27.1	22.1	69.2
PAPA009	15-Apr-16	11	42.7	42.9	35.8	30.2	22.9	68.1
PAPA009	15-Apr-16	12	42.5	42.7	35.6	29.2	24.6	67.3
PAPA009	15-Apr-16	13	39.9	43.7	36.2	29.3	23.3	56.1
PAPA009	15-Apr-16	14	38.4	41.8	34.3	27.2	23.0	57.2
PAPA009	15-Apr-16	15	32.0	34.2	29.5	24.4	21.7	48.1
PAPA009	15-Apr-16	16	25.3	28.2	22.7	19.9	18.2	40.4
PAPA009	15-Apr-16	17	42.5	39.3	30.2	23.1	19.8	63.5
PAPA009	15-Apr-16	18	32.4	35.3	28.1	23.2	19.4	54.7
PAPA009	15-Apr-16	19	30.4	29.3	23.9	20.5	16.2	55.8
PAPA009	15-Apr-16	20	29.0	32.0	24.6	21.0	17.8	49.9
PAPA009	15-Apr-16	21	32.7	35.8	31.4	26.8	22.4	42.9
PAPA009	15-Apr-16	22	30.4	32.3	27.0	24.2	21.2	50.6
PAPA009	15-Apr-16	23	24.7	26.2	24.1	22.6	20.1	37.2
PAPA009	16-Apr-16	0	24.9	26.7	24.4	22.3	20.8	32.7
PAPA009	16-Apr-16	1	28.4	30.6	25.1	22.3	20.7	45.9
PAPA009	16-Apr-16	2	27.1	28.8	26.5	25.2	23.5	32.3
PAPA009	16-Apr-16	3	27.6	29.1	27.3	25.5	23.3	34.2
PAPA009	16-Apr-16	4	29.6	31.1	29.3	27.7	25.4	35.8
PAPA009	16-Apr-16	5	32.8	36.6	29.8	27.3	25.3	44.6
PAPA009	16-Apr-16	6	50.6	41.3	36.9	32.0	26.1	72.5
PAPA009	16-Apr-16	7	43.6	41.7	34.4	29.6	25.8	71.7
PAPA009	16-Apr-16	8	30.9	33.3	24.4	19.6	18.1	48.8
PAPA009	16-Apr-16	9	46.3	23.3	20.2	19.3	18.2	70.0
PAPA009	16-Apr-16	10	25.5	24.3	20.4	19.3	18.0	51.7
PAPA009	16-Apr-16	11	47.4	21.7	19.8	18.9	17.9	74.0
PAPA009	16-Apr-16	12	40.1	40.5	21.4	19.0	17.3	64.0
PAPA009	16-Apr-16	13	36.0	28.4	20.5	19.2	17.8	63.1
PAPA009	16-Apr-16	14	28.7	32.6	23.5	19.7	17.7	45.8
PAPA009	16-Apr-16	15	32.5	34.2	26.1	22.2	20.2	58.0
PAPA009	16-Apr-16	16	34.4	38.3	30.5	22.8	19.3	50.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	16-Apr-16	17	35.9	39.5	32.9	26.4	20.6	52.2
PAPA009	16-Apr-16	18	35.0	38.7	31.2	24.5	20.1	51.5
PAPA009	16-Apr-16	19	37.0	40.4	33.5	27.2	20.2	52.4
PAPA009	16-Apr-16	20	33.5	36.4	31.7	26.8	22.2	52.1
PAPA009	16-Apr-16	21	32.9	36.7	30.5	24.2	20.1	45.3
PAPA009	16-Apr-16	22	32.5	36.5	28.4	22.4	17.1	52.1
PAPA009	16-Apr-16	23	32.1	36.4	27.1	23.4	20.1	46.2
PAPA009	17-Apr-16	0	32.2	37.0	26.0	23.1	20.9	46.1
PAPA009	17-Apr-16	1	34.6	38.3	31.7	27.4	25.0	46.5
PAPA009	17-Apr-16	2	36.2	38.4	35.5	32.6	29.1	44.4
PAPA009	17-Apr-16	3	35.9	38.3	35.2	32.7	30.1	42.1
PAPA009	17-Apr-16	4	39.7	42.5	38.2	34.1	30.8	48.9
PAPA009	17-Apr-16	5	36.7	39.1	35.3	32.4	29.8	46.9
PAPA009	17-Apr-16	6	39.9	42.1	38.1	33.1	25.1	54.3
PAPA009	17-Apr-16	7	31.6	33.5	26.9	23.3	18.9	48.2
PAPA009	17-Apr-16	8	24.3	27.7	22.2	19.7	17.8	34.4
PAPA009	17-Apr-16	9	28.6	31.2	24.8	19.5	18.2	50.7
PAPA009	17-Apr-16	10	21.7	23.7	20.4	18.6	17.3	39.0
PAPA009	17-Apr-16	11	25.5	27.6	25.1	22.4	20.5	33.8
PAPA009	17-Apr-16	12	27.6	31.4	21.1	18.6	17.0	44.5
PAPA009	17-Apr-16	13	39.4	31.8	25.0	19.6	17.2	67.0
PAPA009	17-Apr-16	14	29.6	32.8	25.3	20.8	17.7	50.3
PAPA009	17-Apr-16	15	30.2	34.0	26.8	21.2	17.9	45.8
PAPA009	17-Apr-16	16	33.3	36.1	29.1	24.3	20.8	52.3
PAPA009	17-Apr-16	17	27.5	30.9	23.3	19.9	17.7	43.0
PAPA009	17-Apr-16	18	26.7	30.3	23.6	20.2	18.4	39.8
PAPA009	17-Apr-16	19	29.4	32.4	26.7	23.1	18.5	45.3
PAPA009	17-Apr-16	20	32.1	35.7	27.8	22.7	18.3	48.2
PAPA009	17-Apr-16	21	44.2	33.0	24.6	20.9	17.6	69.3
PAPA009	17-Apr-16	22	26.1	28.2	22.8	19.3	17.7	43.7
PAPA009	17-Apr-16	23	36.9	39.9	35.3	31.4	26.8	50.1
PAPA009	18-Apr-16	0	35.7	38.2	34.7	31.9	29.1	43.3
PAPA009	18-Apr-16	1	36.9	39.8	36.0	31.8	29.0	44.7
PAPA009	18-Apr-16	2	34.1	37.5	32.3	29.1	26.2	42.9
PAPA009	18-Apr-16	3	30.8	32.9	29.9	28.3	26.4	39.4
PAPA009	18-Apr-16	4	34.4	37.0	33.6	29.5	27.7	41.5
PAPA009	18-Apr-16	5	35.3	38.2	32.9	29.6	27.6	52.8
PAPA009	18-Apr-16	6	42.1	44.9	41.1	37.5	31.9	49.8
PAPA009	18-Apr-16	7	40.2	44.7	35.5	31.4	28.4	51.4
PAPA009	18-Apr-16	8	31.2	32.8	30.7	28.0	23.8	43.1
PAPA009	18-Apr-16	9	26.0	28.2	24.6	21.8	20.0	40.5
PAPA009	18-Apr-16	10	27.4	29.8	23.9	21.9	20.4	43.8
PAPA009	18-Apr-16	11	25.3	28.4	22.1	20.2	19.1	36.3
PAPA009	18-Apr-16	12	23.1	23.7	21.7	20.4	19.2	39.6
PAPA009	18-Apr-16	13	27.1	29.0	26.2	24.3	21.0	46.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA009	18-Apr-16	14	23.1	24.1	21.5	20.5	19.7	34.9
PAPA009	18-Apr-16	15	28.8	30.8	26.3	21.5	19.6	47.3
PAPA009	18-Apr-16	16	23.8	26.3	21.7	20.3	18.9	42.9
PAPA009	18-Apr-16	17	23.1	24.9	21.1	19.9	18.9	40.0
PAPA009	18-Apr-16	18	24.4	25.1	21.3	19.4	18.4	44.8
PAPA009	18-Apr-16	19	31.2	34.5	28.9	23.4	19.1	43.7
PAPA009	18-Apr-16	20	31.5	34.2	30.4	26.7	23.0	43.3
PAPA009	18-Apr-16	21	32.4	34.4	29.5	26.6	23.4	50.0
PAPA009	18-Apr-16	22	32.8	35.8	31.2	27.8	25.3	43.1
PAPA009	18-Apr-16	23	35.4	38.1	34.5	31.1	28.2	43.8
PAPA009	19-Apr-16	0	31.4	33.5	30.6	28.4	26.4	38.2
PAPA009	19-Apr-16	1	34.0	37.7	31.1	26.5	23.7	45.8
PAPA009	19-Apr-16	2	29.8	32.9	27.7	24.8	22.1	41.2
PAPA009	19-Apr-16	3	24.9	26.5	24.6	22.8	20.3	30.8
PAPA009	19-Apr-16	4	28.4	30.6	27.9	25.3	22.9	36.6
PAPA009	19-Apr-16	5	26.9	29.4	25.8	24.1	21.4	34.4
PAPA009	19-Apr-16	6	27.3	28.3	24.8	23.1	21.7	51.9
PAPA009	19-Apr-16	7	24.2	26.8	22.7	20.7	18.5	35.4
PAPA009	19-Apr-16	8	26.2	28.6	22.3	20.3	18.1	46.4
PAPA009	19-Apr-16	9	30.2	28.4	22.0	20.1	18.1	52.8
PAPA009	19-Apr-16	10	26.5	25.7	21.6	19.9	18.6	53.5
PAPA009	19-Apr-16	11	40.9	27.4	24.1	21.9	20.2	69.3
PAPA009	19-Apr-16	12	30.6	31.0	23.6	22.2	19.4	51.7
PAPA010	10-Apr-13	13	25.6	27.0	25.1	23.5	21.5	36.0
PAPA010	10-Apr-13	14	28.3	29.8	27.8	26.4	24.2	38.4
PAPA010	10-Apr-13	15	28.2	29.8	27.4	25.7	24.1	40.9
PAPA010	10-Apr-13	16	29.2	32.1	27.0	25.0	22.4	41.5
PAPA010	10-Apr-13	17	31.8	34.9	29.0	25.6	22.8	50.0
PAPA010	10-Apr-13	18	37.1	40.4	35.0	30.3	26.0	49.7
PAPA010	10-Apr-13	19	34.6	37.1	31.3	27.7	25.1	53.8
PAPA010	10-Apr-13	20	34.8	38.0	32.6	28.7	25.4	48.9
PAPA010	10-Apr-13	21	28.4	31.6	25.7	23.8	22.1	42.4
PAPA010	10-Apr-13	22	27.3	29.2	26.4	24.7	22.7	36.6
PAPA010	10-Apr-13	23	26.3	28.0	24.5	22.7	20.8	39.4
PAPA010	11-Apr-13	0	24.6	26.4	24.0	22.9	20.9	33.4
PAPA010	11-Apr-13	1	30.9	33.6	29.6	26.3	24.5	40.1
PAPA010	11-Apr-13	2	33.4	36.2	30.0	27.0	24.9	50.0
PAPA010	11-Apr-13	3	33.2	36.8	31.3	26.1	23.5	42.0
PAPA010	11-Apr-13	4	25.7	27.1	25.0	23.4	21.2	36.2
PAPA010	11-Apr-13	5	30.3	32.1	29.9	27.8	25.5	37.4
PAPA010	11-Apr-13	6	31.9	34.6	30.7	28.3	26.1	40.1
PAPA010	11-Apr-13	7	27.9	29.6	26.8	25.2	22.9	43.4
PAPA010	11-Apr-13	8	31.1	34.1	29.1	25.6	22.8	44.3
PAPA010	11-Apr-13	9	35.1	38.6	32.5	27.8	24.1	48.5
PAPA010	11-Apr-13	10	36.0	39.4	33.7	29.0	24.4	49.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	11-Apr-13	11	36.6	40.3	33.7	28.0	23.4	51.6
PAPA010	11-Apr-13	12	37.5	41.3	34.9	29.4	24.0	49.9
PAPA010	11-Apr-13	13	36.1	39.7	33.1	28.0	23.3	50.0
PAPA010	11-Apr-13	14	35.8	39.3	32.8	27.3	23.1	50.8
PAPA010	11-Apr-13	15	35.6	39.0	32.8	27.9	22.6	50.4
PAPA010	11-Apr-13	16	37.8	41.5	34.9	29.4	24.8	50.6
PAPA010	11-Apr-13	17	37.1	40.7	34.7	29.8	24.0	51.7
PAPA010	11-Apr-13	18	35.2	38.4	33.1	28.6	24.5	50.0
PAPA010	11-Apr-13	19	31.3	34.7	28.5	24.9	22.5	44.5
PAPA010	11-Apr-13	20	27.5	29.9	25.8	24.2	22.7	41.3
PAPA010	11-Apr-13	21	28.2	30.3	27.6	25.4	23.2	35.6
PAPA010	11-Apr-13	22	27.8	29.7	27.3	25.4	23.7	35.2
PAPA010	11-Apr-13	23	27.5	29.1	27.1	25.7	23.9	33.7
PAPA010	12-Apr-13	0	24.5	26.8	22.8	20.8	19.5	36.7
PAPA010	12-Apr-13	1	23.3	25.9	21.9	20.0	18.9	34.4
PAPA010	12-Apr-13	2	24.1	26.8	23.0	21.2	19.7	30.5
PAPA010	12-Apr-13	3	20.9	22.7	20.3	19.0	18.1	30.4
PAPA010	12-Apr-13	4	26.0	28.6	25.0	22.5	20.4	34.2
PAPA010	12-Apr-13	5	24.9	26.6	24.3	22.9	21.5	34.4
PAPA010	12-Apr-13	6	26.7	27.8	25.5	24.0	22.6	39.3
PAPA010	12-Apr-13	7	27.1	28.9	26.5	24.9	23.3	38.5
PAPA010	12-Apr-13	8	28.3	28.9	24.1	20.6	19.0	46.0
PAPA010	12-Apr-13	9	27.0	28.7	22.6	20.7	19.4	46.0
PAPA010	12-Apr-13	10	32.1	33.2	26.8	22.3	20.1	60.3
PAPA010	12-Apr-13	11	27.2	30.3	24.6	21.5	19.8	45.1
PAPA010	12-Apr-13	12	27.4	30.5	23.8	20.9	19.1	43.2
PAPA010	12-Apr-13	13	30.0	33.0	26.6	22.3	19.9	52.0
PAPA010	20-Apr-14	12	37.6	34.3	27.5	23.6	20.5	62.2
PAPA010	20-Apr-14	13	30.9	34.3	27.7	23.8	20.7	45.4
PAPA010	20-Apr-14	14	32.5	36.0	27.8	23.4	20.0	50.4
PAPA010	20-Apr-14	15	32.0	35.8	27.7	22.8	19.0	45.4
PAPA010	20-Apr-14	16	31.7	35.3	27.5	21.6	19.0	49.2
PAPA010	20-Apr-14	17	28.6	32.0	25.4	21.4	18.6	43.1
PAPA010	20-Apr-14	18	26.0	29.2	23.3	19.7	17.4	43.9
PAPA010	20-Apr-14	19	23.7	26.1	19.7	18.0	16.8	40.5
PAPA010	20-Apr-14	20	24.3	27.1	21.6	19.4	17.6	37.3
PAPA010	20-Apr-14	21	23.0	25.1	22.4	19.7	18.6	31.7
PAPA010	20-Apr-14	22	21.7	23.2	21.4	20.1	18.7	28.0
PAPA010	20-Apr-14	23	23.8	26.0	23.0	21.3	19.5	30.1
PAPA010	21-Apr-14	0	24.0	26.4	23.2	22.0	20.6	30.4
PAPA010	21-Apr-14	1	24.2	26.1	23.7	21.8	19.2	29.3
PAPA010	21-Apr-14	2	23.5	25.5	23.1	19.6	18.4	32.7
PAPA010	21-Apr-14	3	26.4	28.9	25.1	22.8	20.6	34.6
PAPA010	21-Apr-14	4	27.7	30.4	26.2	23.5	20.7	38.9
PAPA010	21-Apr-14	5	34.4	37.9	32.7	28.7	25.6	43.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	21-Apr-14	6	31.0	34.0	29.6	27.5	25.2	40.4
PAPA010	21-Apr-14	7	30.4	33.1	29.4	27.1	24.8	36.9
PAPA010	21-Apr-14	8	31.4	36.5	28.2	24.6	21.7	39.2
PAPA010	21-Apr-14	9	34.0	37.3	32.6	27.3	22.0	42.8
PAPA010	21-Apr-14	10	32.0	35.7	30.0	24.6	20.4	40.9
PAPA010	21-Apr-14	11	33.4	37.1	31.2	25.3	20.2	51.2
PAPA010	21-Apr-14	12	33.9	37.7	31.7	25.5	20.7	44.6
PAPA010	21-Apr-14	13	34.2	37.5	32.6	27.1	21.6	41.7
PAPA010	21-Apr-14	14	33.4	36.7	30.3	25.0	21.2	51.1
PAPA010	21-Apr-14	15	28.4	31.2	24.8	21.2	18.9	46.7
PAPA010	21-Apr-14	16	30.2	34.0	25.5	21.4	19.3	47.2
PAPA010	21-Apr-14	17	24.8	27.6	21.0	18.9	17.8	39.7
PAPA010	21-Apr-14	18	23.5	26.2	21.7	19.7	18.3	35.8
PAPA010	21-Apr-14	19	24.2	26.7	22.2	19.6	17.9	40.0
PAPA010	21-Apr-14	20	29.9	32.9	29.0	21.8	17.9	38.8
PAPA010	21-Apr-14	21	29.1	30.9	28.7	26.8	24.2	36.5
PAPA010	21-Apr-14	22	29.1	32.1	28.1	24.8	22.2	35.5
PAPA010	21-Apr-14	23	30.3	32.8	29.8	26.6	24.2	35.4
PAPA010	22-Apr-14	0	31.3	32.8	31.1	29.4	26.4	35.5
PAPA010	22-Apr-14	1	31.6	33.4	31.0	29.2	26.7	38.2
PAPA010	22-Apr-14	2	32.9	35.0	32.6	29.5	25.4	39.6
PAPA010	22-Apr-14	3	34.3	37.1	33.5	28.6	25.4	42.8
PAPA010	22-Apr-14	4	31.6	34.5	30.3	28.4	26.3	39.8
PAPA010	22-Apr-14	5	31.2	33.1	30.9	28.3	26.3	39.6
PAPA010	22-Apr-14	6	31.4	32.7	31.0	29.9	28.0	42.8
PAPA010	22-Apr-14	7	32.2	34.0	31.8	29.9	26.9	37.8
PAPA010	22-Apr-14	8	33.0	35.5	32.2	28.4	26.4	42.7
PAPA010	22-Apr-14	9	31.6	33.3	30.0	28.5	25.7	47.1
PAPA010	22-Apr-14	10	33.9	37.1	31.3	27.2	25.0	58.1
PAPA010	22-Apr-14	11	35.4	38.3	34.4	30.2	26.0	43.9
PAPA010	22-Apr-14	12	39.4	42.4	36.8	31.8	26.8	54.5
PAPA010	22-Apr-14	13	39.6	43.2	36.0	29.8	25.6	55.3
PAPA010	22-Apr-14	14	30.9	34.2	28.7	23.4	21.1	47.3
PAPA010	22-Apr-14	15	33.6	35.6	27.4	23.4	21.5	55.7
PAPA010	22-Apr-14	16	42.8	43.8	32.1	26.3	23.4	61.5
PAPA010	22-Apr-14	17	36.4	40.0	33.3	27.9	23.4	53.7
PAPA010	22-Apr-14	18	38.1	40.5	31.8	25.0	21.0	58.2
PAPA010	22-Apr-14	19	35.5	38.7	31.6	27.9	23.2	53.4
PAPA010	22-Apr-14	21	39.5	42.9	37.2	33.5	30.8	51.8
PAPA010	22-Apr-14	22	39.9	43.5	37.0	31.2	25.8	56.5
PAPA010	22-Apr-14	23	33.0	35.7	30.7	28.0	24.6	50.2
PAPA010	23-Apr-14	0	33.6	37.2	30.8	25.2	21.4	47.0
PAPA010	23-Apr-14	1	25.8	28.7	23.4	20.8	18.8	39.0
PAPA010	23-Apr-14	2	22.5	24.1	22.0	20.6	19.0	30.1
PAPA010	23-Apr-14	3	26.2	28.3	25.4	23.1	20.7	33.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	23-Apr-14	4	30.0	32.3	28.7	26.2	23.1	44.0
PAPA010	23-Apr-14	5	33.0	36.5	29.4	26.2	23.7	49.0
PAPA010	23-Apr-14	6	24.7	26.3	24.0	22.4	20.3	37.3
PAPA010	23-Apr-14	7	27.9	29.8	26.9	24.7	22.6	39.4
PAPA010	23-Apr-14	8	28.8	31.8	27.2	23.5	19.9	41.8
PAPA010	23-Apr-14	9	30.7	33.8	25.9	21.9	19.3	47.5
PAPA010	23-Apr-14	10	32.3	36.0	28.7	23.2	19.7	47.2
PAPA010	23-Apr-14	11	37.1	41.0	32.3	25.4	20.2	51.8
PAPA010	23-Apr-14	12	37.2	41.0	32.8	25.2	20.9	52.3
PAPA010	23-Apr-14	13	37.9	41.8	34.4	27.6	23.3	50.7
PAPA010	23-Apr-14	14	40.0	43.9	36.2	29.4	23.6	55.9
PAPA010	23-Apr-14	15	42.4	46.1	39.6	33.2	27.4	56.4
PAPA010	23-Apr-14	16	41.0	44.5	37.6	31.3	24.2	59.3
PAPA010	23-Apr-14	17	39.4	43.3	36.1	29.6	23.9	52.6
PAPA010	23-Apr-14	18	34.4	38.1	31.7	26.2	21.8	47.8
PAPA010	23-Apr-14	19	34.7	37.9	31.3	27.3	22.3	50.8
PAPA010	23-Apr-14	20	31.4	34.0	30.4	26.8	23.2	45.5
PAPA010	23-Apr-14	21	31.6	34.4	30.6	27.2	24.6	38.3
PAPA010	23-Apr-14	22	32.1	35.3	30.7	26.8	23.7	38.7
PAPA010	23-Apr-14	23	31.2	32.8	29.5	26.1	23.9	47.0
PAPA010	24-Apr-14	0	28.9	31.2	28.1	25.4	22.1	41.6
PAPA010	24-Apr-14	1	33.6	36.6	32.4	28.3	22.6	38.7
PAPA010	24-Apr-14	2	32.9	36.6	31.1	25.8	21.8	39.0
PAPA010	24-Apr-14	3	32.2	35.8	30.4	26.3	23.7	38.2
PAPA010	24-Apr-14	4	31.8	34.9	30.4	27.1	25.1	39.1
PAPA010	24-Apr-14	5	33.1	36.1	31.6	27.5	24.1	45.3
PAPA010	24-Apr-14	6	33.5	36.1	32.5	29.7	27.1	40.8
PAPA010	24-Apr-14	7	33.9	36.6	33.5	29.3	26.3	39.9
PAPA010	24-Apr-14	8	33.5	36.3	32.8	28.2	24.6	39.4
PAPA010	24-Apr-14	9	33.4	36.1	31.5	27.2	22.9	51.1
PAPA010	24-Apr-14	10	34.0	35.8	29.9	25.6	21.6	57.9
PAPA010	24-Apr-14	11	30.6	33.8	28.7	25.4	21.7	41.9
PAPA010	24-Apr-14	12	33.2	36.1	30.8	27.3	24.4	53.8
PAPA010	24-Apr-14	13	39.8	36.6	31.1	27.5	23.7	70.4
PAPA010	24-Apr-14	14	36.0	39.5	32.8	27.9	23.7	51.8
PAPA010	12-Apr-15	11	33.2	36.9	28.8	24.2	21.4	47.4
PAPA010	12-Apr-15	12	35.7	32.0	25.1	22.5	20.5	63.8
PAPA010	12-Apr-15	13	34.7	31.4	23.5	21.5	19.8	61.5
PAPA010	12-Apr-15	14	41.3	34.6	26.3	22.3	20.2	71.3
PAPA010	12-Apr-15	15	38.0	35.9	25.8	22.0	19.7	60.8
PAPA010	12-Apr-15	16	34.7	37.6	29.1	23.1	19.2	61.2
PAPA010	12-Apr-15	17	32.7	36.2	28.0	22.5	19.0	51.6
PAPA010	12-Apr-15	18	30.3	33.7	27.0	22.4	19.4	45.8
PAPA010	12-Apr-15	19	27.9	29.1	22.5	20.2	18.5	53.7
PAPA010	12-Apr-15	20	32.5	25.5	23.5	22.2	20.1	55.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	12-Apr-15	21	26.8	26.5	24.0	22.7	21.2	48.9
PAPA010	12-Apr-15	22	26.4	28.3	25.9	24.0	22.1	35.3
PAPA010	12-Apr-15	23	26.3	28.3	25.6	23.7	21.4	36.9
PAPA010	13-Apr-15	0	23.8	25.8	23.4	21.4	20.1	29.3
PAPA010	13-Apr-15	1	24.8	25.6	23.4	22.2	20.5	38.1
PAPA010	13-Apr-15	2	22.0	23.7	21.5	20.2	19.0	33.8
PAPA010	13-Apr-15	3	26.7	25.2	23.5	20.5	19.2	47.0
PAPA010	13-Apr-15	4	22.3	24.0	21.7	20.6	19.3	31.7
PAPA010	13-Apr-15	5	26.1	29.2	24.0	20.7	19.3	40.4
PAPA010	13-Apr-15	6	34.0	33.0	28.6	25.3	22.2	58.5
PAPA010	13-Apr-15	7	35.6	32.4	29.7	27.9	25.2	61.9
PAPA010	13-Apr-15	8	36.9	30.5	25.4	22.7	20.5	61.8
PAPA010	13-Apr-15	9	27.2	23.8	21.1	19.6	18.2	49.0
PAPA010	13-Apr-15	10	24.2	23.3	21.0	20.0	18.5	43.3
PAPA010	13-Apr-15	11	24.6	25.9	23.7	21.9	20.1	41.7
PAPA010	13-Apr-15	12	35.6	28.2	23.9	22.4	20.0	63.8
PAPA010	13-Apr-15	13	37.7	31.0	24.2	21.9	20.0	64.3
PAPA010	13-Apr-15	14	24.1	25.9	22.7	21.0	19.3	41.2
PAPA010	13-Apr-15	15	27.1	27.5	23.0	21.1	19.2	54.6
PAPA010	13-Apr-15	16	28.0	30.8	24.5	22.1	20.2	44.9
PAPA010	13-Apr-15	17	37.0	33.2	27.0	23.1	19.8	63.9
PAPA010	13-Apr-15	18	25.9	28.4	24.1	21.4	19.3	40.2
PAPA010	13-Apr-15	19	28.0	28.3	24.4	21.0	18.3	51.0
PAPA010	13-Apr-15	20	35.7	35.6	30.0	25.5	21.1	61.2
PAPA010	13-Apr-15	21	32.1	33.7	31.8	29.9	27.3	37.1
PAPA010	13-Apr-15	22	29.4	31.9	28.2	26.6	23.9	37.8
PAPA010	13-Apr-15	23	33.2	35.0	32.9	31.0	29.0	38.6
PAPA010	14-Apr-15	0	34.6	37.0	33.7	31.6	28.9	41.8
PAPA010	14-Apr-15	1	31.4	34.1	30.3	28.3	25.2	38.9
PAPA010	14-Apr-15	2	29.8	31.2	29.6	28.1	26.5	34.2
PAPA010	14-Apr-15	3	34.3	36.6	34.1	30.2	28.3	41.2
PAPA010	14-Apr-15	4	35.3	37.7	34.7	32.2	29.5	42.6
PAPA010	14-Apr-15	5	37.5	39.3	37.2	34.8	32.5	48.4
PAPA010	14-Apr-15	6	39.2	40.0	37.3	34.8	32.5	58.5
PAPA010	14-Apr-15	7	37.9	39.7	36.6	35.0	32.9	53.6
PAPA010	14-Apr-15	8	40.8	41.3	37.9	35.6	33.2	63.6
PAPA010	14-Apr-15	9	45.3	42.7	37.6	32.9	28.7	69.3
PAPA010	14-Apr-15	10	42.6	39.0	31.5	27.2	23.9	64.7
PAPA010	12-Apr-16	14	33.0	35.7	26.1	20.2	18.9	52.6
PAPA010	12-Apr-16	15	39.4	27.8	20.8	19.2	18.3	60.7
PAPA010	12-Apr-16	16	26.9	27.8	22.1	20.5	19.2	52.2
PAPA010	12-Apr-16	17	25.6	26.0	20.8	18.9	17.8	52.5
PAPA010	12-Apr-16	18	24.0	24.0	19.6	18.4	17.4	50.5
PAPA010	12-Apr-16	19	33.8	27.7	19.6	18.0	17.1	56.3
PAPA010	12-Apr-16	20	30.2	30.9	25.4	21.6	18.1	56.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	12-Apr-16	21	26.7	28.8	25.8	24.1	22.1	36.0
PAPA010	12-Apr-16	22	25.3	25.5	24.1	22.9	21.5	44.3
PAPA010	12-Apr-16	23	24.9	26.0	24.5	23.6	22.6	32.1
PAPA010	13-Apr-16	0	27.5	29.0	27.2	25.7	24.2	35.1
PAPA010	13-Apr-16	1	27.3	29.1	26.7	25.4	24.1	34.1
PAPA010	13-Apr-16	2	30.6	33.4	29.9	26.6	24.7	36.7
PAPA010	13-Apr-16	3	32.0	34.3	31.4	29.4	27.3	38.9
PAPA010	13-Apr-16	4	32.4	34.1	32.0	30.0	28.0	38.6
PAPA010	13-Apr-16	5	34.4	36.2	33.8	31.7	29.6	45.5
PAPA010	13-Apr-16	6	36.7	39.1	35.9	33.8	31.3	47.7
PAPA010	13-Apr-16	7	33.9	35.7	33.4	31.4	29.4	44.5
PAPA010	13-Apr-16	8	34.2	35.1	32.2	30.8	29.2	53.2
PAPA010	13-Apr-16	9	51.0	37.2	30.7	22.6	21.1	70.5
PAPA010	13-Apr-16	10	27.7	27.6	23.0	21.2	19.5	48.6
PAPA010	13-Apr-16	11	37.2	37.5	24.5	21.3	19.8	53.1
PAPA010	13-Apr-16	12	34.8	38.1	31.8	28.1	23.0	51.3
PAPA010	13-Apr-16	13	38.0	34.1	26.8	22.5	20.3	63.7
PAPA010	13-Apr-16	14	29.4	29.6	23.5	20.6	19.1	51.4
PAPA010	13-Apr-16	15	28.3	30.5	25.5	21.7	19.5	45.4
PAPA010	13-Apr-16	16	30.0	31.7	24.3	20.0	18.4	52.3
PAPA010	13-Apr-16	17	34.3	30.3	25.1	21.4	18.2	60.4
PAPA010	13-Apr-16	18	32.9	32.3	26.4	23.6	21.4	52.0
PAPA010	13-Apr-16	19	28.7	30.9	27.1	24.6	22.1	41.3
PAPA010	13-Apr-16	20	33.5	37.7	25.5	21.0	18.9	46.9
PAPA010	13-Apr-16	21	23.5	25.1	21.5	20.3	19.3	38.4
PAPA010	13-Apr-16	22	24.0	26.2	23.3	20.4	19.1	33.2
PAPA010	13-Apr-16	23	29.8	32.1	29.3	26.8	23.5	38.5
PAPA010	14-Apr-16	0	31.3	33.0	30.6	28.5	25.9	40.9
PAPA010	14-Apr-16	1	31.4	33.3	30.8	29.1	27.1	38.9
PAPA010	14-Apr-16	2	31.8	33.5	31.4	29.6	27.2	41.0
PAPA010	14-Apr-16	3	32.6	34.2	32.2	30.5	28.9	39.1
PAPA010	14-Apr-16	4	33.6	35.3	33.1	30.6	28.0	47.8
PAPA010	14-Apr-16	5	31.9	33.5	31.4	30.0	28.3	38.2
PAPA010	14-Apr-16	6	33.4	35.5	32.7	30.3	27.4	44.6
PAPA010	14-Apr-16	7	34.6	36.9	34.1	30.0	27.0	42.3
PAPA010	14-Apr-16	8	32.6	34.5	31.8	29.4	25.6	46.7
PAPA010	14-Apr-16	9	34.3	34.5	31.4	29.5	27.1	57.6
PAPA010	14-Apr-16	10	36.5	35.8	32.9	30.4	28.2	59.8
PAPA010	14-Apr-16	11	33.0	36.0	30.8	27.7	23.7	46.1
PAPA010	14-Apr-16	12	42.6	46.4	38.6	32.4	24.2	57.2
PAPA010	14-Apr-16	13	40.6	43.8	38.0	33.6	28.8	59.3
PAPA010	14-Apr-16	14	38.9	42.5	35.9	30.7	26.8	52.9
PAPA010	14-Apr-16	15	33.0	36.0	30.3	26.2	23.5	48.3
PAPA010	14-Apr-16	16	31.8	34.7	29.0	25.8	23.1	49.5
PAPA010	14-Apr-16	17	32.1	35.4	28.4	24.8	21.8	47.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	14-Apr-16	18	30.4	33.2	27.1	23.4	20.1	47.6
PAPA010	14-Apr-16	19	32.8	34.7	29.2	26.4	23.9	53.1
PAPA010	14-Apr-16	20	33.3	35.3	32.2	30.0	27.9	46.9
PAPA010	14-Apr-16	21	29.0	32.5	26.8	24.8	23.0	41.5
PAPA010	14-Apr-16	22	28.8	28.4	24.7	23.0	20.9	49.1
PAPA010	14-Apr-16	23	24.3	26.8	23.4	21.6	20.3	34.7
PAPA010	15-Apr-16	0	20.9	22.1	20.5	19.5	18.0	28.7
PAPA010	15-Apr-16	1	22.5	24.1	22.2	20.8	19.8	27.8
PAPA010	15-Apr-16	2	26.9	29.1	26.6	22.9	20.9	34.4
PAPA010	15-Apr-16	3	27.1	29.1	26.7	24.0	22.4	34.8
PAPA010	15-Apr-16	4	29.0	30.7	28.5	26.3	24.0	37.5
PAPA010	15-Apr-16	5	28.9	30.5	27.5	26.0	24.6	43.3
PAPA010	15-Apr-16	6	33.3	36.9	31.7	24.5	22.4	40.2
PAPA010	15-Apr-16	7	29.1	31.0	27.3	25.8	23.7	47.6
PAPA010	15-Apr-16	8	30.3	32.7	27.6	23.2	20.0	52.5
PAPA010	15-Apr-16	9	34.6	35.8	27.1	22.5	19.9	60.4
PAPA010	15-Apr-16	10	43.1	39.2	29.8	23.6	20.3	72.2
PAPA010	15-Apr-16	11	40.0	39.1	31.4	25.3	20.9	69.5
PAPA010	15-Apr-16	12	38.6	39.9	31.7	25.0	21.6	63.7
PAPA010	15-Apr-16	13	36.6	39.7	31.3	25.0	21.5	61.0
PAPA010	15-Apr-16	14	33.3	36.7	29.6	24.2	20.1	50.1
PAPA010	15-Apr-16	15	29.2	30.9	27.3	23.9	20.1	47.1
PAPA010	15-Apr-16	16	24.4	27.3	20.8	18.6	17.7	40.4
PAPA010	15-Apr-16	17	31.6	35.8	23.9	19.3	18.2	48.9
PAPA010	15-Apr-16	18	27.4	30.7	23.2	20.0	18.8	47.3
PAPA010	15-Apr-16	19	27.2	25.1	20.6	18.8	17.6	48.6
PAPA010	15-Apr-16	20	24.0	25.7	19.6	17.5	16.6	47.4
PAPA010	15-Apr-16	21	27.0	29.3	25.9	22.5	19.8	38.8
PAPA010	15-Apr-16	22	28.9	29.0	24.0	21.7	19.3	49.9
PAPA010	15-Apr-16	23	23.0	24.7	21.2	20.2	18.8	37.5
PAPA010	16-Apr-16	0	21.3	22.6	21.0	20.0	18.8	26.7
PAPA010	16-Apr-16	1	27.6	29.9	23.8	20.7	19.3	46.0
PAPA010	16-Apr-16	2	24.1	26.4	23.1	21.1	19.5	34.6
PAPA010	16-Apr-16	3	24.8	26.3	24.5	23.0	21.1	33.0
PAPA010	16-Apr-16	4	27.7	29.6	27.2	25.0	22.8	35.2
PAPA010	16-Apr-16	5	29.6	32.8	27.5	24.5	22.7	41.9
PAPA010	16-Apr-16	6	30.8	33.2	28.8	26.0	22.7	52.8
PAPA010	16-Apr-16	7	28.4	31.2	26.3	22.5	19.8	41.3
PAPA010	16-Apr-16	8	27.7	25.8	21.3	18.8	17.9	52.7
PAPA010	16-Apr-16	9	21.2	22.1	19.4	18.7	17.9	41.5
PAPA010	16-Apr-16	10	23.8	24.5	19.4	18.6	17.9	43.2
PAPA010	16-Apr-16	11	21.2	21.4	19.3	18.4	17.8	46.9
PAPA010	16-Apr-16	12	31.9	21.1	18.8	18.1	17.5	59.1
PAPA010	16-Apr-16	13	25.2	22.5	18.8	18.3	17.6	57.8
PAPA010	16-Apr-16	14	41.3	31.8	20.7	19.0	18.2	64.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	16-Apr-16	15	27.7	31.0	23.2	20.3	18.7	48.8
PAPA010	16-Apr-16	16	32.1	34.5	25.5	20.8	18.8	53.4
PAPA010	16-Apr-16	17	31.6	34.7	27.3	22.5	19.3	52.1
PAPA010	16-Apr-16	18	30.7	34.1	26.5	21.4	18.6	47.9
PAPA010	16-Apr-16	19	30.1	33.5	26.8	22.4	19.2	44.1
PAPA010	16-Apr-16	20	26.6	28.8	23.4	21.3	19.3	47.8
PAPA010	16-Apr-16	21	21.2	22.7	20.5	19.2	18.0	29.8
PAPA010	16-Apr-16	22	20.8	22.2	19.2	17.6	16.8	34.5
PAPA010	16-Apr-16	23	20.5	21.8	19.8	18.4	17.0	34.8
PAPA010	17-Apr-16	0	22.7	24.8	22.0	19.8	18.5	30.6
PAPA010	17-Apr-16	1	28.5	32.0	26.7	22.1	19.3	39.5
PAPA010	17-Apr-16	2	32.5	34.6	31.8	29.6	27.6	41.9
PAPA010	17-Apr-16	3	35.1	37.9	33.3	31.5	29.4	46.1
PAPA010	17-Apr-16	4	39.1	42.1	37.3	31.7	28.0	51.9
PAPA010	17-Apr-16	5	32.8	34.8	31.8	29.8	26.8	44.8
PAPA010	17-Apr-16	6	33.3	36.5	31.9	27.7	25.7	46.0
PAPA010	17-Apr-16	7	28.7	32.3	26.7	22.8	18.8	38.6
PAPA010	17-Apr-16	8	26.2	30.0	24.0	18.9	17.3	35.8
PAPA010	17-Apr-16	9	27.8	29.1	23.2	20.4	17.8	49.9
PAPA010	17-Apr-16	10	24.9	27.4	19.7	18.5	17.4	48.1
PAPA010	17-Apr-16	11	37.4	28.4	22.5	20.8	18.6	58.9
PAPA010	17-Apr-16	12	37.0	29.4	19.8	18.0	16.9	63.5
PAPA010	17-Apr-16	13	28.6	28.8	22.1	18.9	17.4	54.4
PAPA010	17-Apr-16	14	28.5	28.5	21.5	19.0	17.3	56.3
PAPA010	17-Apr-16	15	28.2	32.1	23.6	19.7	17.8	43.3
PAPA010	17-Apr-16	16	32.2	32.9	25.0	21.5	18.7	54.6
PAPA010	17-Apr-16	17	24.5	27.3	20.5	18.4	17.5	42.8
PAPA010	17-Apr-16	18	22.5	25.4	20.3	18.4	17.5	34.7
PAPA010	17-Apr-16	19	23.9	26.8	20.9	18.9	17.4	38.9
PAPA010	17-Apr-16	20	22.5	24.6	19.6	18.2	16.9	43.7
PAPA010	17-Apr-16	21	46.9	28.8	18.3	17.0	16.3	74.2
PAPA010	17-Apr-16	22	25.3	27.7	21.3	18.4	17.2	40.3
PAPA010	17-Apr-16	23	34.0	37.3	31.6	28.3	24.8	47.4
PAPA010	18-Apr-16	0	32.3	34.6	31.4	29.5	26.8	42.8
PAPA010	18-Apr-16	1	33.8	36.2	33.2	30.0	27.2	39.4
PAPA010	18-Apr-16	2	33.0	35.3	32.3	28.7	25.9	43.2
PAPA010	18-Apr-16	3	33.3	35.9	32.8	28.3	25.4	39.5
PAPA010	18-Apr-16	4	34.0	35.9	33.8	30.9	27.2	39.1
PAPA010	18-Apr-16	5	33.6	35.6	33.0	31.2	27.9	41.9
PAPA010	18-Apr-16	6	40.8	43.3	40.1	34.4	30.9	58.7
PAPA010	18-Apr-16	7	34.0	37.4	32.0	29.2	26.9	43.2
PAPA010	18-Apr-16	8	29.2	29.7	27.1	24.2	21.9	52.3
PAPA010	18-Apr-16	9	24.2	26.3	23.0	21.1	19.2	39.8
PAPA010	18-Apr-16	10	27.7	27.1	22.7	20.7	19.4	53.0
PAPA010	18-Apr-16	11	23.6	25.0	22.0	19.9	18.8	45.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA010	18-Apr-16	12	32.6	23.5	20.5	19.5	18.8	59.1
PAPA010	18-Apr-16	13	24.7	25.0	23.1	21.7	19.5	47.5
PAPA010	18-Apr-16	14	25.8	21.2	19.5	19.0	18.4	57.3
PAPA010	18-Apr-16	15	25.9	26.3	22.5	19.8	18.8	51.0
PAPA010	18-Apr-16	16	24.3	24.9	20.5	19.5	18.6	47.6
PAPA010	18-Apr-16	17	21.3	22.4	19.8	19.0	18.1	36.8
PAPA010	18-Apr-16	18	22.8	23.1	19.9	18.9	18.0	42.2
PAPA010	18-Apr-16	19	27.2	30.4	24.4	20.5	18.1	40.2
PAPA010	18-Apr-16	20	30.8	30.2	27.3	25.3	22.7	61.8
PAPA010	18-Apr-16	21	32.4	31.2	27.7	24.2	20.8	55.1
PAPA010	18-Apr-16	22	29.7	31.7	29.1	27.2	25.6	36.2
PAPA010	18-Apr-16	23	29.3	31.6	28.4	26.0	23.5	38.9
PAPA010	19-Apr-16	0	27.6	29.3	27.1	25.4	23.2	35.2
PAPA010	19-Apr-16	1	24.6	25.8	24.2	23.1	22.1	35.9
PAPA010	19-Apr-16	2	22.7	23.8	22.1	20.6	19.2	36.2
PAPA010	19-Apr-16	3	21.4	22.4	21.1	20.1	19.0	27.2
PAPA010	19-Apr-16	4	24.8	26.8	24.3	22.0	20.6	33.1
PAPA010	19-Apr-16	5	24.5	26.1	24.2	22.2	20.2	34.4
PAPA010	19-Apr-16	6	23.6	25.0	23.2	21.3	19.0	36.9
PAPA010	19-Apr-16	7	22.2	24.0	20.7	19.3	18.1	43.4
PAPA010	19-Apr-16	8	26.9	28.6	22.1	19.0	18.0	49.5
PAPA010	19-Apr-16	9	25.0	27.7	21.1	19.4	18.4	42.6
PAPA010	19-Apr-16	10	26.5	29.9	22.9	20.0	18.6	47.0
PAPA010	19-Apr-16	11	38.3	27.9	23.3	21.3	19.3	65.3
PAPA010	19-Apr-16	12	29.9	31.3	23.3	21.5	19.4	47.9
PAPA011	12-Apr-13	10	26.7	29.7	24.4	20.7	17.8	40.6
PAPA011	12-Apr-13	11	23.7	26.3	20.3	17.7	16.6	42.8
PAPA011	12-Apr-13	12	29.0	29.6	21.5	17.7	16.5	50.5
PAPA011	12-Apr-13	13	30.5	34.2	27.5	21.0	16.8	42.5
PAPA011	12-Apr-13	14	23.3	26.6	20.1	17.2	16.5	37.3
PAPA011	12-Apr-13	15	26.1	29.5	22.8	17.8	16.6	43.1
PAPA011	12-Apr-13	16	28.7	31.8	24.9	18.2	16.1	46.1
PAPA011	12-Apr-13	17	26.5	29.0	23.0	18.3	16.0	51.3
PAPA011	12-Apr-13	18	23.9	27.2	21.1	17.2	15.5	39.2
PAPA011	12-Apr-13	19	21.8	24.2	17.4	15.8	15.1	38.7
PAPA011	12-Apr-13	20	24.3	24.0	18.2	16.0	14.9	50.3
PAPA011	12-Apr-13	21	18.7	20.6	18.2	16.5	15.3	31.5
PAPA011	12-Apr-13	22	18.1	19.7	17.7	16.4	15.2	24.6
PAPA011	12-Apr-13	23	18.1	19.6	17.6	16.0	15.1	28.7
PAPA011	13-Apr-13	0	17.0	18.0	16.8	16.0	15.3	22.5
PAPA011	13-Apr-13	1	19.7	21.5	19.1	17.5	16.0	32.2
PAPA011	13-Apr-13	2	18.1	19.4	17.8	16.8	16.0	25.5
PAPA011	13-Apr-13	3	17.8	18.9	17.5	16.7	16.0	24.1
PAPA011	13-Apr-13	4	18.6	19.8	18.0	17.0	15.8	37.8
PAPA011	13-Apr-13	5	26.1	30.6	22.3	17.7	16.0	37.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	13-Apr-13	6	31.5	34.9	27.9	21.0	18.0	44.1
PAPA011	13-Apr-13	7	24.4	27.4	21.0	18.7	17.3	39.5
PAPA011	13-Apr-13	8	26.7	27.9	19.8	18.5	17.7	48.9
PAPA011	13-Apr-13	9	28.1	28.1	21.0	18.7	17.1	49.5
PAPA011	13-Apr-13	10	33.6	34.7	29.1	24.7	19.4	57.4
PAPA011	13-Apr-13	11	34.2	37.5	31.4	26.0	21.7	51.6
PAPA011	13-Apr-13	12	35.2	38.7	32.8	27.5	20.6	50.6
PAPA011	13-Apr-13	13	40.1	43.4	37.9	32.7	25.2	54.7
PAPA011	13-Apr-13	14	36.7	40.3	34.4	29.2	23.9	49.2
PAPA011	13-Apr-13	15	37.8	41.1	35.3	30.0	25.5	51.0
PAPA011	13-Apr-13	16	31.8	35.2	28.1	23.1	20.2	48.8
PAPA011	13-Apr-13	17	25.9	27.0	20.1	17.8	16.7	46.8
PAPA011	13-Apr-13	18	30.2	29.3	23.9	21.0	17.6	54.2
PAPA011	13-Apr-13	19	26.0	26.2	22.1	19.0	16.6	47.2
PAPA011	13-Apr-13	20	28.1	30.6	24.5	19.7	16.9	50.5
PAPA011	13-Apr-13	21	32.0	35.4	28.1	23.7	20.9	50.9
PAPA011	13-Apr-13	22	28.7	31.4	24.9	20.9	18.2	46.2
PAPA011	13-Apr-13	23	30.5	34.1	27.8	20.2	18.1	44.0
PAPA011	14-Apr-13	0	23.4	25.6	22.0	19.5	17.2	39.0
PAPA011	14-Apr-13	1	23.3	25.5	21.6	18.5	16.7	38.6
PAPA011	14-Apr-13	2	24.0	27.0	21.8	19.3	17.0	36.9
PAPA011	14-Apr-13	3	26.9	29.8	24.8	21.9	19.3	41.8
PAPA011	14-Apr-13	4	28.5	31.6	26.2	23.2	20.4	42.7
PAPA011	14-Apr-13	5	26.8	30.3	24.4	21.2	18.8	40.0
PAPA011	14-Apr-13	6	25.3	29.7	22.1	18.8	17.2	39.4
PAPA011	14-Apr-13	7	24.7	27.7	22.3	19.7	16.8	39.3
PAPA011	14-Apr-13	8	27.6	30.7	24.7	21.5	18.9	43.8
PAPA011	10-Apr-14	14	35.4	36.7	28.6	21.1	16.9	59.2
PAPA011	10-Apr-14	15	55.5	37.9	26.4	19.3	16.8	75.9
PAPA011	10-Apr-14	16	31.6	33.3	25.9	19.8	16.7	60.4
PAPA011	10-Apr-14	17	32.7	32.1	25.5	20.4	16.5	59.6
PAPA011	10-Apr-14	18	45.0	31.4	23.9	19.4	16.9	66.4
PAPA011	10-Apr-14	19	32.3	29.1	19.6	15.9	15.1	53.4
PAPA011	10-Apr-14	20	21.5	21.2	16.3	15.4	15.0	48.7
PAPA011	10-Apr-14	21	17.7	18.5	16.5	15.7	15.1	33.5
PAPA011	10-Apr-14	22	24.3	19.7	17.5	15.6	15.1	47.1
PAPA011	10-Apr-14	23	19.3	20.3	18.4	17.5	16.8	37.1
PAPA011	11-Apr-14	0	25.9	21.2	17.7	17.0	16.2	45.7
PAPA011	11-Apr-14	1	17.4	18.1	17.2	16.2	15.7	35.0
PAPA011	11-Apr-14	2	20.1	17.8	17.0	16.5	16.1	40.6
PAPA011	11-Apr-14	3	31.2	36.4	17.6	16.8	16.1	45.4
PAPA011	11-Apr-14	4	19.6	17.7	16.7	15.9	15.3	40.7
PAPA011	11-Apr-14	5	26.3	29.7	18.3	16.5	15.8	44.1
PAPA011	11-Apr-14	6	34.7	38.6	29.1	21.5	18.1	50.5
PAPA011	11-Apr-14	7	36.3	39.4	24.0	20.0	18.1	53.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	04-Apr-15	10	36.9	25.7	20.7	17.9	16.6	68.5
PAPA011	04-Apr-15	11	45.6	28.2	19.9	17.0	15.9	70.6
PAPA011	04-Apr-15	12	42.1	30.1	18.2	16.2	15.8	63.0
PAPA011	04-Apr-15	13	42.0	31.1	20.0	16.7	16.0	66.9
PAPA011	04-Apr-15	14	45.1	45.2	36.9	25.0	16.8	67.5
PAPA011	04-Apr-15	15	41.6	44.2	34.9	24.9	17.9	64.3
PAPA011	04-Apr-15	16	41.4	44.6	35.8	27.4	18.4	64.6
PAPA011	04-Apr-15	17	45.9	49.7	43.2	36.2	24.7	61.2
PAPA011	04-Apr-15	18	40.0	44.1	36.2	28.3	21.3	54.1
PAPA011	04-Apr-15	19	27.7	30.3	21.5	16.7	15.3	46.5
PAPA011	04-Apr-15	20	33.1	20.5	17.0	15.8	15.2	57.7
PAPA011	04-Apr-15	21	19.3	20.8	16.0	15.4	15.0	33.7
PAPA011	04-Apr-15	22	18.4	19.2	17.0	15.9	15.3	39.7
PAPA011	04-Apr-15	23	18.6	20.5	18.1	16.4	15.4	24.1
PAPA011	05-Apr-15	0	17.7	19.6	16.9	16.0	15.4	27.8
PAPA011	05-Apr-15	1	19.2	21.7	17.9	15.6	15.0	30.3
PAPA011	05-Apr-15	2	17.5	19.9	15.7	15.1	14.9	32.4
PAPA011	05-Apr-15	3	20.4	23.2	19.7	15.6	14.9	30.2
PAPA011	05-Apr-15	4	23.7	26.0	22.9	20.9	19.7	32.2
PAPA011	05-Apr-15	5	22.6	25.4	21.2	18.8	17.4	36.7
PAPA011	05-Apr-15	6	28.4	30.0	25.7	20.1	17.6	44.2
PAPA011	05-Apr-15	7	46.5	37.6	25.9	22.9	19.7	67.9
PAPA011	05-Apr-15	8	36.3	28.5	22.7	20.5	18.6	68.4
PAPA011	05-Apr-15	9	22.5	25.2	21.1	18.1	16.1	33.3
PAPA011	05-Apr-15	10	33.6	32.8	23.8	18.7	16.7	55.9
PAPA011	05-Apr-15	11	32.2	35.7	26.6	18.4	16.2	49.4
PAPA011	05-Apr-15	12	41.2	45.5	36.4	24.8	17.2	54.8
PAPA011	05-Apr-15	13	48.0	48.3	40.9	31.5	19.3	74.1
PAPA011	05-Apr-15	14	42.9	46.7	39.3	30.5	20.2	57.8
PAPA011	05-Apr-15	15	40.6	44.2	34.6	25.4	18.7	61.6
PAPA011	05-Apr-15	16	40.6	44.3	36.0	27.8	20.1	56.5
PAPA011	05-Apr-15	17	39.1	42.4	34.6	25.7	18.8	60.6
PAPA011	05-Apr-15	18	31.3	34.9	26.8	19.9	16.8	47.3
PAPA011	05-Apr-15	19	19.5	21.7	16.7	15.8	15.4	39.8
PAPA011	05-Apr-15	20	22.2	22.4	19.1	17.7	16.4	47.6
PAPA011	05-Apr-15	21	19.0	20.1	17.9	16.3	15.8	32.6
PAPA011	05-Apr-15	22	18.4	18.2	16.1	15.6	15.2	33.8
PAPA011	05-Apr-15	23	16.1	16.8	15.9	15.4	15.0	21.8
PAPA011	06-Apr-15	0	19.2	20.4	18.9	17.9	16.1	26.3
PAPA011	06-Apr-15	1	18.4	19.7	17.5	16.5	15.7	34.0
PAPA011	06-Apr-15	2	16.1	16.2	15.4	14.9	14.7	29.8
PAPA011	06-Apr-15	3	15.5	15.4	14.9	14.8	14.6	25.7
PAPA011	06-Apr-15	4	16.1	17.5	15.6	14.8	14.6	28.8
PAPA011	06-Apr-15	5	19.6	22.9	17.7	16.0	15.2	30.4
PAPA011	06-Apr-15	6	25.0	28.2	22.3	18.9	15.6	39.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	06-Apr-15	7	31.1	28.5	22.1	18.5	16.1	57.4
PAPA011	06-Apr-15	8	29.2	28.0	21.7	18.1	15.9	58.6
PAPA011	06-Apr-15	9	23.1	24.1	17.5	16.3	15.4	47.5
PAPA011	06-Apr-15	10	28.6	30.5	19.3	17.0	16.1	51.2
PAPA011	06-Apr-15	11	43.3	47.1	38.7	27.5	17.1	65.1
PAPA011	06-Apr-15	12	44.8	48.7	41.4	34.3	26.1	59.2
PAPA011	06-Apr-15	13	42.6	46.4	39.3	30.9	21.6	56.7
PAPA011	06-Apr-15	14	43.8	47.7	40.5	31.4	20.1	58.9
PAPA011	06-Apr-15	15	39.7	43.6	35.8	28.0	20.0	54.3
PAPA011	06-Apr-15	16	39.9	43.8	36.0	27.3	17.2	55.1
PAPA011	06-Apr-15	17	39.6	43.4	36.3	28.3	18.4	53.2
PAPA011	06-Apr-15	18	39.6	43.4	35.7	27.7	21.4	57.7
PAPA011	06-Apr-15	19	37.5	41.1	34.9	28.9	21.8	49.3
PAPA011	06-Apr-15	20	36.1	39.6	33.2	29.0	25.3	50.4
PAPA011	06-Apr-15	21	27.3	30.0	23.8	20.5	18.3	43.1
PAPA011	06-Apr-15	22	23.3	23.8	20.2	18.9	17.5	40.1
PAPA011	06-Apr-15	23	19.8	21.6	19.1	17.6	16.4	31.5
PAPA011	07-Apr-15	0	18.1	19.9	17.6	16.3	15.7	24.2
PAPA011	07-Apr-15	1	20.9	23.4	19.7	17.9	16.6	29.9
PAPA011	07-Apr-15	2	22.5	24.5	21.8	20.2	18.7	29.3
PAPA011	07-Apr-15	3	21.4	22.5	21.2	20.1	19.0	36.0
PAPA011	07-Apr-15	4	22.5	23.7	22.3	21.3	20.2	27.2
PAPA011	07-Apr-15	5	25.6	26.8	24.0	22.6	21.1	39.7
PAPA011	07-Apr-15	6	27.9	28.7	26.2	24.4	22.0	50.8
PAPA011	07-Apr-15	7	23.5	24.9	21.8	19.8	17.7	38.4
PAPA011	07-Apr-15	8	27.6	24.5	21.5	19.7	18.1	48.3
PAPA011	07-Apr-15	9	36.4	27.4	21.7	19.1	17.8	63.1
PAPA011	07-Apr-15	10	34.6	30.4	25.5	21.3	18.2	56.6
PAPA011	07-Apr-15	11	32.5	33.1	30.3	27.8	25.7	54.0
PAPA011	07-Apr-15	12	33.0	33.2	30.3	27.3	22.1	56.8
PAPA011	07-Apr-15	13	43.3	27.4	22.8	21.1	19.7	68.4
PAPA011	07-Apr-15	14	28.0	23.7	20.9	18.9	17.6	54.1
PAPA011	07-Apr-15	15	24.5	24.7	19.4	17.2	16.4	47.9
PAPA011	07-Apr-15	16	33.8	36.8	18.9	16.7	16.2	52.5
PAPA011	07-Apr-15	17	31.4	34.0	29.4	25.8	23.1	48.4
PAPA011	07-Apr-15	18	28.3	30.3	26.9	24.3	21.9	44.8
PAPA011	07-Apr-15	19	32.9	29.1	25.1	22.1	19.9	60.5
PAPA011	07-Apr-15	20	30.9	28.5	26.2	24.5	22.4	55.7
PAPA011	07-Apr-15	21	25.7	28.3	24.5	22.7	21.3	34.4
PAPA011	07-Apr-15	22	23.2	23.6	17.4	15.3	15.0	44.6
PAPA011	07-Apr-15	23	21.9	21.4	16.9	15.7	15.1	40.5
PAPA011	08-Apr-15	0	21.3	23.6	20.3	17.9	16.1	32.0
PAPA011	08-Apr-15	1	21.4	23.5	20.4	18.1	16.6	34.6
PAPA011	08-Apr-15	2	21.9	24.2	21.0	19.0	17.1	30.0
PAPA011	08-Apr-15	3	23.0	26.4	21.2	17.5	15.9	34.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	08-Apr-15	4	17.5	18.8	16.8	15.9	15.4	29.1
PAPA011	08-Apr-15	5	23.6	26.6	22.2	19.5	17.5	29.6
PAPA011	08-Apr-15	6	37.5	28.4	25.8	21.5	17.6	62.6
PAPA011	08-Apr-15	7	25.6	26.6	22.3	19.7	16.9	39.7
PAPA011	08-Apr-15	8	25.4	26.2	22.4	20.2	18.6	44.4
PAPA011	08-Apr-15	9	26.7	29.2	24.2	20.8	18.3	44.8
PAPA011	08-Apr-15	10	41.5	31.4	24.4	19.3	17.5	66.7
PAPA011	08-Apr-15	11	28.0	28.8	23.4	19.8	16.8	48.1
PAPA011	08-Apr-15	12	26.2	28.8	22.1	19.0	16.7	46.7
PAPA011	08-Apr-15	13	29.9	29.0	23.9	20.5	17.2	55.1
PAPA011	08-Apr-15	14	26.4	27.3	22.6	18.7	17.3	57.5
PAPA011	08-Apr-15	15	22.8	24.1	21.1	19.1	17.6	39.5
PAPA011	08-Apr-15	16	33.0	32.5	23.8	21.5	19.3	55.5
PAPA011	08-Apr-15	17	26.3	27.9	22.6	19.8	18.1	43.4
PAPA011	08-Apr-15	18	23.8	24.9	19.3	17.2	16.1	43.8
PAPA011	08-Apr-15	19	23.8	25.4	21.4	19.8	17.8	40.0
PAPA011	08-Apr-15	20	22.1	24.0	20.5	19.2	18.0	34.8
PAPA011	08-Apr-15	21	22.9	24.6	21.6	19.4	17.7	37.5
PAPA011	08-Apr-15	22	24.1	24.2	20.1	18.6	17.8	40.4
PAPA011	08-Apr-15	23	22.3	24.1	20.5	18.8	17.7	36.8
PAPA011	09-Apr-15	0	23.2	24.2	21.2	19.8	18.4	39.5
PAPA011	09-Apr-15	1	22.5	24.8	19.4	17.5	16.6	36.9
PAPA011	09-Apr-15	2	19.2	20.3	18.5	17.4	16.4	29.9
PAPA011	09-Apr-15	3	18.8	20.3	18.2	16.9	16.1	31.2
PAPA011	09-Apr-15	4	19.1	20.6	18.9	17.2	15.8	25.1
PAPA011	09-Apr-15	5	21.2	23.4	20.5	18.0	16.6	30.3
PAPA011	09-Apr-15	6	23.0	25.2	21.1	18.1	16.2	46.5
PAPA011	09-Apr-15	7	23.5	22.9	17.3	15.7	15.1	52.4
PAPA011	09-Apr-15	8	24.8	26.1	22.0	19.8	18.0	44.6
PAPA011	09-Apr-15	9	29.8	27.8	21.9	19.4	17.5	52.6
PAPA011	09-Apr-15	10	29.9	25.6	20.5	18.6	17.0	55.0
PAPA011	09-Apr-15	11	35.3	24.5	19.1	17.2	16.4	62.8
PAPA011	09-Apr-15	12	20.0	18.3	16.9	16.4	16.0	44.6
PAPA011	09-Apr-15	13	25.4	20.0	16.6	16.0	15.7	57.4
PAPA011	09-Apr-15	14	30.8	30.3	18.2	16.6	15.9	52.8
PAPA011	09-Apr-15	15	26.4	28.8	18.1	16.5	15.9	48.5
PAPA011	09-Apr-15	16	23.2	24.9	19.7	17.6	16.5	38.3
PAPA011	09-Apr-15	17	27.0	29.3	19.8	16.2	15.7	48.4
PAPA011	09-Apr-15	18	27.5	31.3	23.6	15.5	15.1	42.0
PAPA011	09-Apr-15	19	36.3	26.7	22.6	15.5	15.2	62.0
PAPA011	09-Apr-15	20	29.2	32.7	27.4	22.6	18.2	39.5
PAPA011	09-Apr-15	21	24.6	26.9	23.4	19.7	18.4	34.7
PAPA011	09-Apr-15	22	18.8	21.0	17.7	15.8	15.3	30.7
PAPA011	09-Apr-15	23	20.5	21.5	18.1	15.4	15.1	35.5
PAPA011	10-Apr-15	0	21.4	24.1	20.2	18.1	17.1	29.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	10-Apr-15	1	22.0	23.4	21.8	20.1	18.9	32.5
PAPA011	10-Apr-15	2	24.8	26.5	24.6	22.3	20.5	30.2
PAPA011	10-Apr-15	3	28.8	31.6	27.8	24.9	23.2	34.5
PAPA011	10-Apr-15	4	30.3	32.5	29.4	27.8	26.1	39.5
PAPA011	10-Apr-15	5	29.2	31.2	28.7	26.5	23.2	36.1
PAPA011	10-Apr-15	6	37.7	29.4	27.2	25.3	22.8	63.9
PAPA011	10-Apr-15	7	28.1	27.7	24.0	22.3	20.9	50.1
PAPA011	10-Apr-15	8	26.9	28.5	25.2	22.8	21.0	42.6
PAPA011	10-Apr-15	9	29.9	27.5	25.4	23.7	22.2	50.2
PAPA011	10-Apr-15	10	39.0	30.6	26.6	21.5	18.4	68.8
PAPA011	10-Apr-15	11	47.8	26.6	19.1	17.7	16.6	76.2
PAPA011	10-Apr-15	12	40.7	36.7	19.6	16.9	16.1	67.9
PAPA011	10-Apr-15	13	25.4	25.0	18.0	17.0	16.4	44.4
PAPA011	10-Apr-15	14	49.9	44.0	23.4	17.7	16.8	73.7
PAPA011	10-Apr-15	15	37.0	37.8	19.3	17.2	16.4	64.2
PAPA011	10-Apr-15	16	20.0	20.8	17.3	16.2	15.9	41.2
PAPA011	10-Apr-15	17	33.3	22.6	16.7	16.0	15.6	56.8
PAPA011	10-Apr-15	18	33.3	21.4	16.0	15.4	15.2	59.6
PAPA011	10-Apr-15	19	28.1	29.0	17.9	15.6	15.1	47.1
PAPA011	10-Apr-15	20	23.9	26.4	18.7	15.7	15.2	46.7
PAPA011	10-Apr-15	21	16.9	18.4	16.2	15.7	15.3	27.3
PAPA011	10-Apr-15	22	18.3	18.8	17.5	16.6	15.9	44.7
PAPA011	10-Apr-15	23	21.6	23.5	21.2	19.0	17.1	27.1
PAPA011	11-Apr-15	0	20.5	23.3	19.1	16.2	15.5	27.6
PAPA011	11-Apr-15	1	18.5	19.9	18.3	16.7	16.0	29.6
PAPA011	11-Apr-15	2	17.1	18.5	16.6	16.1	15.6	22.3
PAPA011	11-Apr-15	3	22.5	24.8	21.2	19.0	17.0	32.8
PAPA011	11-Apr-15	4	21.6	24.4	20.3	17.6	15.6	31.7
PAPA011	11-Apr-15	5	24.5	28.0	21.3	17.9	16.5	39.6
PAPA011	11-Apr-15	6	41.4	46.3	30.7	23.1	18.0	59.7
PAPA011	11-Apr-15	7	39.2	43.7	25.0	21.0	19.1	58.9
PAPA011	11-Apr-15	8	54.3	32.5	21.7	19.8	17.5	78.8
PAPA011	11-Apr-16	12	27.1	26.0	20.0	16.2	15.5	53.9
PAPA011	11-Apr-16	13	32.2	25.0	16.9	15.8	15.3	55.2
PAPA011	11-Apr-16	14	29.8	33.2	18.5	16.0	15.6	47.9
PAPA011	11-Apr-16	15	28.1	31.1	22.5	16.7	15.2	47.4
PAPA011	11-Apr-16	16	21.2	23.0	16.5	15.6	15.1	41.4
PAPA011	11-Apr-16	17	23.8	26.1	18.3	15.7	15.0	45.7
PAPA011	11-Apr-16	18	23.3	25.9	18.1	15.4	14.8	43.4
PAPA011	11-Apr-16	19	45.5	49.0	25.2	14.8	14.5	73.6
PAPA011	11-Apr-16	20	24.6	25.2	20.7	18.4	16.4	51.9
PAPA011	11-Apr-16	21	20.8	22.5	18.9	17.5	15.9	33.2
PAPA011	11-Apr-16	22	19.0	20.0	17.7	16.3	15.2	35.7
PAPA011	11-Apr-16	23	17.1	18.0	16.5	15.6	14.8	27.5
PAPA011	12-Apr-16	0	18.5	20.5	17.7	15.8	15.2	29.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	12-Apr-16	1	19.6	20.7	18.7	17.2	15.8	31.2
PAPA011	12-Apr-16	2	20.0	22.4	18.1	17.2	16.1	33.2
PAPA011	12-Apr-16	3	22.2	25.2	20.7	18.5	17.2	30.9
PAPA011	12-Apr-16	4	22.5	24.0	22.1	20.9	20.0	30.5
PAPA011	12-Apr-16	5	25.4	28.5	23.6	21.2	19.7	45.0
PAPA011	12-Apr-16	6	37.5	33.7	30.2	27.1	24.4	60.0
PAPA011	12-Apr-16	7	26.0	27.6	25.1	23.6	21.6	48.5
PAPA011	12-Apr-16	8	30.4	31.0	26.9	24.5	22.5	57.6
PAPA011	12-Apr-16	9	28.2	31.6	24.7	22.0	19.3	44.2
PAPA011	12-Apr-16	10	31.6	28.9	19.9	16.9	15.8	61.4
PAPA011	12-Apr-16	11	27.2	25.7	19.5	17.9	15.6	50.3
PAPA011	12-Apr-16	12	29.3	29.3	19.0	16.2	15.5	56.2
PAPA011	12-Apr-16	13	30.1	34.0	20.5	17.1	15.9	47.9
PAPA011	12-Apr-16	14	30.0	33.2	20.4	16.3	15.4	47.3
PAPA011	12-Apr-16	15	28.1	31.6	22.4	16.4	15.4	43.5
PAPA011	12-Apr-16	16	28.8	32.6	24.1	18.2	15.3	44.0
PAPA011	12-Apr-16	17	21.0	20.2	15.9	15.3	15.1	40.4
PAPA011	12-Apr-16	18	17.5	18.1	16.1	14.9	14.6	38.4
PAPA011	12-Apr-16	19	22.7	24.2	15.9	15.0	14.6	43.4
PAPA011	12-Apr-16	20	23.0	25.0	19.8	17.0	15.5	41.2
PAPA011	12-Apr-16	21	21.3	23.0	19.1	17.1	15.9	35.9
PAPA011	12-Apr-16	22	19.7	21.6	19.1	17.5	16.0	27.5
PAPA011	12-Apr-16	23	23.1	25.1	22.4	20.3	18.6	33.1
PAPA011	13-Apr-16	0	21.8	23.2	21.6	19.9	18.5	29.8
PAPA011	13-Apr-16	1	21.9	23.5	21.5	19.5	18.2	34.9
PAPA011	13-Apr-16	2	22.3	25.4	21.0	18.2	17.1	27.7
PAPA011	13-Apr-16	3	17.0	18.0	16.8	16.0	15.5	22.0
PAPA011	13-Apr-16	4	22.2	26.5	18.7	16.2	15.4	29.8
PAPA011	13-Apr-16	5	25.3	27.8	24.4	21.4	18.6	33.4
PAPA011	13-Apr-16	6	30.2	29.0	25.9	23.2	20.1	60.6
PAPA011	13-Apr-16	7	29.1	28.8	25.0	21.5	19.4	48.2
PAPA011	13-Apr-16	8	32.9	37.3	25.5	20.7	18.0	55.1
PAPA011	13-Apr-16	9	27.6	26.8	21.5	18.6	17.0	51.1
PAPA011	13-Apr-16	10	25.2	26.5	20.6	17.8	16.2	49.7
PAPA011	13-Apr-16	11	32.7	35.0	22.5	17.6	15.8	54.4
PAPA011	13-Apr-16	12	31.8	35.7	27.4	21.6	16.2	47.6
PAPA011	13-Apr-16	13	24.6	27.8	20.6	17.7	16.0	39.5
PAPA011	13-Apr-16	14	25.3	25.6	19.6	16.4	15.4	47.7
PAPA011	13-Apr-16	15	25.7	25.4	20.0	17.8	15.4	50.6
PAPA011	13-Apr-16	16	31.7	31.5	22.1	16.1	15.3	52.6
PAPA011	13-Apr-16	17	27.4	30.8	25.3	19.7	17.8	41.4
PAPA011	13-Apr-16	18	19.8	21.6	17.9	16.3	15.6	46.7
PAPA011	13-Apr-16	19	18.6	20.2	16.7	15.6	15.1	34.6
PAPA011	13-Apr-16	20	24.6	28.3	19.7	17.1	15.8	40.1
PAPA011	13-Apr-16	21	19.6	18.5	16.7	15.3	14.9	36.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	13-Apr-16	22	23.6	26.5	19.4	17.1	15.7	36.7
PAPA011	13-Apr-16	23	31.6	35.2	30.6	21.5	18.7	39.4
PAPA011	14-Apr-16	0	23.6	23.3	20.2	16.7	15.5	42.9
PAPA011	14-Apr-16	1	21.8	21.2	17.6	16.3	15.3	38.3
PAPA011	14-Apr-16	2	20.6	22.7	20.0	17.9	15.5	27.7
PAPA011	14-Apr-16	3	17.6	19.1	17.3	15.9	15.2	24.7
PAPA011	14-Apr-16	4	24.2	27.1	22.8	18.0	16.3	40.1
PAPA011	14-Apr-16	5	22.8	25.3	21.5	19.2	17.8	33.0
PAPA011	14-Apr-16	6	31.4	27.5	23.8	21.0	17.5	65.7
PAPA011	14-Apr-16	7	27.4	29.9	24.6	21.5	19.1	45.6
PAPA011	14-Apr-16	8	30.5	33.0	29.7	27.4	23.7	38.5
PAPA011	14-Apr-16	9	32.4	34.6	31.1	28.3	25.1	55.2
PAPA011	14-Apr-16	10	40.5	40.9	34.6	30.7	27.1	63.8
PAPA011	14-Apr-16	11	39.6	43.1	36.7	31.5	26.4	53.5
PAPA011	14-Apr-16	12	43.6	47.2	40.2	33.8	28.6	61.9
PAPA011	14-Apr-16	13	39.7	43.0	36.9	32.5	28.2	55.5
PAPA011	14-Apr-16	14	36.2	40.0	33.1	28.4	22.7	51.2
PAPA011	14-Apr-16	15	36.4	39.8	34.0	29.0	23.7	48.5
PAPA011	14-Apr-16	16	31.5	34.9	27.1	21.9	19.0	48.7
PAPA011	14-Apr-16	17	32.2	29.4	21.8	19.1	17.6	56.4
PAPA011	14-Apr-16	18	26.9	30.6	21.8	17.7	16.1	42.4
PAPA011	14-Apr-16	19	24.4	26.1	20.5	18.1	16.7	41.2
PAPA011	14-Apr-16	20	25.0	25.4	20.5	18.3	16.6	42.1
PAPA011	14-Apr-16	21	23.0	24.2	19.5	17.3	15.8	40.0
PAPA011	14-Apr-16	22	22.3	22.7	18.0	16.9	16.0	42.3
PAPA011	14-Apr-16	23	20.9	22.6	18.3	16.9	15.8	38.5
PAPA011	15-Apr-16	0	20.8	22.9	19.8	18.3	16.9	31.4
PAPA011	15-Apr-16	1	20.2	21.2	19.5	18.2	16.7	33.6
PAPA011	15-Apr-16	2	20.1	21.7	19.7	18.4	17.1	28.4
PAPA011	15-Apr-16	3	22.0	24.4	20.8	19.5	18.0	30.5
PAPA011	15-Apr-16	4	20.4	22.0	19.9	18.4	17.0	30.5
PAPA011	15-Apr-16	5	24.0	25.9	22.0	19.2	17.1	39.1
PAPA011	15-Apr-16	6	23.2	25.7	21.6	18.9	17.1	44.3
PAPA011	15-Apr-16	7	25.6	25.5	22.5	20.5	18.1	50.0
PAPA011	15-Apr-16	8	38.9	28.5	22.6	19.3	16.6	66.9
PAPA011	15-Apr-16	9	29.4	32.6	26.0	21.1	17.5	48.4
PAPA011	15-Apr-16	10	31.1	34.0	27.0	21.8	17.6	52.6
PAPA011	15-Apr-16	11	36.2	38.5	31.1	25.3	19.4	60.4
PAPA011	15-Apr-16	12	36.3	39.8	32.1	25.7	20.8	52.6
PAPA011	15-Apr-16	13	38.8	42.3	34.7	28.1	20.8	56.0
PAPA011	15-Apr-16	14	39.4	43.0	35.7	28.7	21.2	54.7
PAPA011	15-Apr-16	15	38.4	42.2	34.3	25.1	18.5	55.6
PAPA011	15-Apr-16	16	32.5	36.2	26.0	20.1	17.4	51.9
PAPA011	15-Apr-16	17	29.7	33.4	23.5	17.7	16.0	46.8
PAPA011	15-Apr-16	18	32.6	36.8	28.0	17.2	15.8	46.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	15-Apr-16	19	32.2	36.1	28.0	19.4	14.6	49.0
PAPA011	15-Apr-16	20	34.6	30.0	23.9	16.2	14.6	66.3
PAPA011	15-Apr-16	21	29.8	32.7	27.4	24.4	21.6	45.4
PAPA011	15-Apr-16	22	30.9	33.9	28.0	24.7	21.3	49.7
PAPA011	15-Apr-16	23	24.9	27.3	24.2	21.1	18.8	32.8
PAPA011	16-Apr-16	0	26.8	28.8	26.4	24.4	22.0	33.0
PAPA011	16-Apr-16	1	31.0	32.9	29.2	26.2	23.8	46.2
PAPA011	16-Apr-16	2	32.0	33.7	31.3	29.6	27.7	42.8
PAPA011	16-Apr-16	3	29.3	32.0	28.2	24.7	23.2	38.0
PAPA011	16-Apr-16	4	28.2	30.3	27.8	24.3	22.0	36.2
PAPA011	16-Apr-16	5	28.9	30.9	28.6	25.3	20.2	39.9
PAPA011	16-Apr-16	6	35.3	37.6	34.6	32.0	28.4	42.5
PAPA011	16-Apr-16	7	34.1	36.8	33.0	29.6	27.4	42.8
PAPA011	16-Apr-16	8	34.9	37.9	33.6	29.1	24.8	44.8
PAPA011	16-Apr-16	9	23.3	27.2	19.8	17.2	16.1	36.4
PAPA011	16-Apr-16	10	20.0	20.7	17.3	16.5	15.8	37.3
PAPA011	16-Apr-16	11	26.2	20.3	17.3	16.7	16.1	55.6
PAPA011	16-Apr-16	12	24.2	19.2	17.6	16.9	16.2	51.5
PAPA011	16-Apr-16	13	24.9	26.5	18.8	17.5	16.5	43.5
PAPA011	16-Apr-16	14	33.4	32.3	22.3	17.7	16.4	57.5
PAPA011	16-Apr-16	15	29.0	32.9	24.8	19.0	17.0	42.4
PAPA011	16-Apr-16	16	33.5	37.2	29.8	22.4	18.1	49.8
PAPA011	16-Apr-16	17	35.6	39.2	33.3	27.7	19.2	46.5
PAPA011	16-Apr-16	18	32.9	36.2	30.5	25.2	20.7	46.6
PAPA011	16-Apr-16	19	29.6	33.3	26.1	20.7	17.7	45.8
PAPA011	16-Apr-16	20	22.6	24.7	21.0	19.0	17.3	36.8
PAPA011	16-Apr-16	21	21.5	23.9	20.2	18.1	16.4	35.8
PAPA011	16-Apr-16	22	19.1	18.8	16.6	15.7	15.0	35.0
PAPA011	16-Apr-16	23	19.2	20.8	19.0	16.9	15.4	26.6
PAPA011	17-Apr-16	0	21.8	23.4	21.2	19.8	17.3	32.1
PAPA011	17-Apr-16	1	25.0	26.5	24.6	22.9	21.4	33.6
PAPA011	17-Apr-16	2	25.8	27.8	25.1	22.0	20.3	38.0
PAPA011	17-Apr-16	3	24.5	26.0	24.1	22.7	20.4	35.2
PAPA011	17-Apr-16	4	22.4	23.9	21.8	19.8	18.3	34.7
PAPA011	17-Apr-16	5	23.8	27.0	22.0	19.7	17.5	32.2
PAPA011	17-Apr-16	6	26.5	28.7	25.9	23.0	18.3	40.7
PAPA011	17-Apr-16	7	25.0	27.3	24.1	21.9	18.9	36.2
PAPA011	17-Apr-16	8	27.0	28.6	26.4	24.2	21.6	44.0
PAPA011	17-Apr-16	9	25.6	27.8	23.9	19.2	17.2	51.6
PAPA011	17-Apr-16	10	28.6	19.8	18.1	17.1	16.3	59.9
PAPA011	17-Apr-16	11	18.7	19.2	17.5	16.6	15.8	33.7
PAPA011	17-Apr-16	12	25.0	28.6	19.1	15.8	15.1	45.4
PAPA011	17-Apr-16	13	24.9	28.4	22.6	18.3	15.7	37.3
PAPA011	17-Apr-16	14	28.2	31.2	24.5	19.6	16.7	44.1
PAPA011	17-Apr-16	15	30.2	33.7	27.5	21.7	17.6	44.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA011	17-Apr-16	16	34.7	38.2	32.4	26.3	20.6	49.3
PAPA011	17-Apr-16	17	30.4	33.9	28.0	23.1	18.9	43.9
PAPA011	17-Apr-16	18	29.2	33.1	26.4	21.0	17.4	42.5
PAPA011	17-Apr-16	19	22.4	25.4	20.6	17.6	15.3	34.7
PAPA011	17-Apr-16	20	21.3	23.0	18.8	16.3	15.2	37.9
PAPA011	17-Apr-16	21	43.4	28.0	17.2	16.1	15.3	68.2
PAPA011	17-Apr-16	22	20.2	21.6	17.5	16.5	15.8	40.4
PAPA011	17-Apr-16	23	24.4	26.6	23.7	18.0	16.5	39.3
PAPA011	18-Apr-16	0	24.9	28.1	23.6	19.5	17.6	35.0
PAPA011	18-Apr-16	1	24.4	26.9	23.5	19.7	17.7	35.3
PAPA011	18-Apr-16	2	24.8	27.9	23.5	20.9	18.3	32.5
PAPA011	18-Apr-16	3	25.8	28.1	24.7	21.6	18.4	36.7
PAPA011	18-Apr-16	4	25.9	28.2	24.9	22.7	20.2	36.3
PAPA011	18-Apr-16	5	27.0	30.3	25.4	22.0	19.8	35.7
PAPA011	18-Apr-16	6	27.3	27.7	23.7	21.8	20.2	58.7
PAPA011	18-Apr-16	7	29.0	31.0	27.8	25.6	23.5	41.9
PAPA011	18-Apr-16	8	29.0	28.9	25.9	20.4	18.9	52.5
PAPA011	18-Apr-16	9	23.6	24.8	20.9	18.7	17.3	44.6
PAPA011	18-Apr-16	10	23.8	24.8	19.5	17.3	16.4	43.9
PAPA011	18-Apr-16	11	18.4	19.2	17.0	16.3	15.5	42.6
PAPA011	18-Apr-16	12	20.4	21.7	16.9	16.0	15.4	40.3
PAPA011	18-Apr-16	13	18.7	20.1	16.8	16.2	15.7	32.9
PAPA011	18-Apr-16	14	30.5	23.1	16.1	15.7	15.2	52.6
PAPA011	18-Apr-16	15	33.7	22.9	16.4	15.8	15.3	63.5
PAPA012	12-Apr-13	12	28.6	31.9	24.6	19.6	17.1	47.5
PAPA012	12-Apr-13	13	30.7	34.4	26.7	19.9	17.0	46.5
PAPA012	12-Apr-13	14	26.1	29.8	22.4	18.4	16.9	40.3
PAPA012	12-Apr-13	15	27.8	31.9	23.9	18.5	16.7	41.2
PAPA012	12-Apr-13	16	30.3	33.3	25.2	19.5	16.6	51.2
PAPA012	12-Apr-13	17	26.9	30.3	23.1	17.5	15.6	41.6
PAPA012	12-Apr-13	18	24.3	27.8	19.7	16.2	14.7	42.0
PAPA012	12-Apr-13	19	22.3	25.3	17.2	15.4	14.6	39.1
PAPA012	12-Apr-13	20	20.9	22.7	18.0	16.3	15.4	35.2
PAPA012	12-Apr-13	21	18.5	20.2	17.8	16.3	15.2	25.9
PAPA012	12-Apr-13	22	18.1	19.0	17.7	16.4	15.2	35.6
PAPA012	12-Apr-13	23	18.1	19.3	17.9	16.0	15.1	30.1
PAPA012	13-Apr-13	0	19.5	21.3	18.5	17.0	16.0	33.9
PAPA012	13-Apr-13	1	21.6	22.9	20.9	19.6	18.4	38.7
PAPA012	13-Apr-13	2	18.9	19.9	18.6	17.8	16.7	29.2
PAPA012	13-Apr-13	3	19.4	20.3	19.1	18.1	16.7	31.1
PAPA012	13-Apr-13	4	20.7	21.8	19.5	17.6	16.1	42.0
PAPA012	13-Apr-13	5	23.4	27.0	20.4	18.7	17.3	39.4
PAPA012	13-Apr-13	6	28.1	30.4	26.5	23.0	19.9	41.0
PAPA012	13-Apr-13	7	27.3	28.6	25.0	22.8	21.0	45.0
PAPA012	13-Apr-13	8	28.6	30.3	23.9	21.5	19.8	48.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	13-Apr-13	9	24.9	25.8	21.7	19.8	17.4	50.6
PAPA012	13-Apr-13	10	37.3	33.9	27.1	21.4	17.6	65.5
PAPA012	13-Apr-13	11	33.1	36.7	29.8	23.7	19.8	47.0
PAPA012	13-Apr-13	12	35.7	39.6	32.5	25.6	20.6	49.0
PAPA012	13-Apr-13	13	40.2	44.0	36.7	30.4	22.9	53.2
PAPA012	13-Apr-13	14	39.9	43.6	37.1	31.3	24.1	54.5
PAPA012	13-Apr-13	15	40.3	43.6	36.2	29.5	24.0	57.0
PAPA012	13-Apr-13	16	34.1	37.6	31.0	25.3	21.5	48.2
PAPA012	13-Apr-13	17	25.5	28.2	21.1	18.6	17.0	47.0
PAPA012	13-Apr-13	18	29.7	28.7	24.0	20.9	18.4	49.8
PAPA012	13-Apr-13	19	24.7	26.4	22.0	19.9	17.4	41.7
PAPA012	13-Apr-13	20	24.3	27.3	21.3	19.4	18.1	38.2
PAPA012	13-Apr-13	21	32.2	35.8	28.2	23.1	18.9	46.7
PAPA012	13-Apr-13	22	29.3	32.8	26.1	22.0	19.2	43.1
PAPA012	13-Apr-13	23	25.8	28.8	23.3	20.7	18.5	38.9
PAPA012	14-Apr-13	0	23.7	25.7	22.8	20.9	18.8	36.0
PAPA012	14-Apr-13	1	25.2	26.8	22.3	20.2	18.7	44.2
PAPA012	14-Apr-13	2	25.8	28.8	23.8	21.6	19.7	39.7
PAPA012	14-Apr-13	3	25.8	28.3	23.3	21.2	19.3	40.5
PAPA012	14-Apr-13	4	25.6	28.3	23.1	21.2	19.6	41.9
PAPA012	14-Apr-13	5	24.8	27.3	23.1	21.3	19.6	44.0
PAPA012	14-Apr-13	6	26.8	29.5	25.7	22.3	19.2	38.8
PAPA012	14-Apr-13	7	28.4	28.7	23.6	20.6	18.0	59.5
PAPA012	14-Apr-13	8	28.5	32.1	25.0	21.6	19.0	43.4
PAPA012	14-Apr-13	9	33.2	37.1	30.2	23.4	18.0	46.0
PAPA012	11-Apr-14	17	38.3	39.1	32.1	25.3	18.5	66.3
PAPA012	11-Apr-14	18	42.7	36.5	29.3	22.7	17.9	68.8
PAPA012	11-Apr-14	19	29.4	33.0	24.3	18.0	15.6	47.7
PAPA012	11-Apr-14	20	17.8	18.4	16.3	15.6	14.9	36.0
PAPA012	11-Apr-14	21	20.7	23.0	19.7	17.3	16.2	32.3
PAPA012	11-Apr-14	22	22.2	23.2	20.5	17.7	16.5	37.5
PAPA012	11-Apr-14	23	19.2	20.6	18.8	17.5	16.1	26.3
PAPA012	12-Apr-14	0	18.2	19.4	17.9	16.9	16.1	24.9
PAPA012	12-Apr-14	1	20.5	23.7	17.7	16.1	15.2	34.7
PAPA012	12-Apr-14	2	20.5	23.3	17.8	15.5	14.8	33.6
PAPA012	12-Apr-14	3	20.9	22.9	19.3	17.5	16.4	33.1
PAPA012	12-Apr-14	4	21.9	23.8	21.1	18.5	16.9	34.1
PAPA012	12-Apr-14	5	24.4	27.2	23.2	19.3	17.9	39.9
PAPA012	12-Apr-14	6	41.3	31.6	24.4	21.5	19.5	71.6
PAPA012	12-Apr-14	7	33.4	29.2	22.5	18.9	16.9	63.3
PAPA012	12-Apr-14	8	29.3	29.9	24.3	21.5	17.2	51.0
PAPA012	12-Apr-14	9	39.6	29.0	17.3	15.8	15.3	64.2
PAPA012	12-Apr-14	10	30.7	26.7	16.1	15.3	14.9	54.3
PAPA012	12-Apr-14	11	23.9	21.4	17.1	15.7	15.3	45.9
PAPA012	12-Apr-14	12	33.6	25.1	17.9	15.9	15.2	56.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	12-Apr-14	13	36.0	31.5	22.8	18.1	15.9	59.8
PAPA012	12-Apr-14	14	34.5	38.1	29.3	19.9	15.4	49.2
PAPA012	12-Apr-14	15	34.1	37.9	28.5	20.7	16.9	49.5
PAPA012	12-Apr-14	16	34.0	37.8	30.0	23.4	17.9	47.1
PAPA012	12-Apr-14	17	26.2	29.5	23.0	18.4	16.1	42.0
PAPA012	12-Apr-14	18	20.6	23.6	18.1	16.1	15.3	33.3
PAPA012	12-Apr-14	19	20.7	22.1	16.5	15.3	14.7	38.2
PAPA012	12-Apr-14	20	22.9	18.5	15.8	15.1	14.6	45.1
PAPA012	12-Apr-14	21	21.2	22.8	15.7	14.9	14.5	40.4
PAPA012	12-Apr-14	22	15.2	15.9	15.1	14.6	14.2	18.8
PAPA012	12-Apr-14	23	23.9	22.4	18.7	16.2	14.7	44.0
PAPA012	13-Apr-14	0	22.4	24.9	21.7	18.1	16.7	29.7
PAPA012	13-Apr-14	1	24.5	26.1	24.4	22.5	20.5	31.1
PAPA012	13-Apr-14	2	25.4	27.0	25.1	23.0	20.9	36.7
PAPA012	13-Apr-14	3	32.8	36.0	29.4	25.3	20.6	47.6
PAPA012	13-Apr-14	4	28.7	31.8	26.2	22.9	20.8	44.5
PAPA012	13-Apr-14	5	28.5	31.4	26.3	22.7	20.1	42.3
PAPA012	13-Apr-14	6	25.9	28.5	24.0	21.7	18.0	39.0
PAPA012	13-Apr-14	7	25.4	27.3	24.3	22.2	19.9	41.3
PAPA012	13-Apr-14	8	29.6	30.6	21.4	17.2	15.9	49.8
PAPA012	13-Apr-14	9	27.5	31.0	24.6	18.4	16.3	47.9
PAPA012	13-Apr-14	10	27.3	28.1	18.8	17.0	15.8	49.6
PAPA012	13-Apr-14	11	22.2	21.9	18.4	16.5	15.2	42.3
PAPA012	13-Apr-14	12	27.3	25.0	18.4	16.6	15.7	47.9
PAPA012	13-Apr-14	13	26.7	26.7	21.4	19.1	16.4	44.3
PAPA012	13-Apr-14	14	29.9	25.9	20.2	18.0	16.4	51.7
PAPA012	13-Apr-14	15	21.5	25.6	18.1	16.3	15.6	37.9
PAPA012	13-Apr-14	16	21.9	21.0	16.2	14.9	14.5	53.7
PAPA012	13-Apr-14	17	21.4	20.9	15.9	14.7	14.2	41.7
PAPA012	13-Apr-14	18	24.5	22.4	16.2	14.9	14.4	46.6
PAPA012	13-Apr-14	19	24.3	23.8	19.7	17.8	16.2	44.2
PAPA012	13-Apr-14	20	28.3	27.9	16.8	14.9	14.3	46.5
PAPA012	13-Apr-14	21	23.0	21.5	18.0	16.6	15.7	41.2
PAPA012	13-Apr-14	22	35.6	23.5	17.1	15.8	15.2	61.3
PAPA012	13-Apr-14	23	23.8	21.0	17.3	16.3	15.4	43.0
PAPA012	14-Apr-14	0	28.1	18.6	16.8	15.8	14.9	50.6
PAPA012	14-Apr-14	1	21.9	17.4	15.9	15.2	14.4	55.2
PAPA012	14-Apr-14	2	18.6	16.8	15.4	15.0	14.6	39.5
PAPA012	14-Apr-14	3	16.8	16.2	15.3	14.7	14.2	34.4
PAPA012	14-Apr-14	4	16.1	17.0	15.7	15.1	14.5	22.4
PAPA012	14-Apr-14	5	16.9	17.8	16.7	15.9	15.3	20.7
PAPA012	14-Apr-14	6	17.2	18.2	17.0	16.2	15.2	20.3
PAPA012	14-Apr-14	7	22.1	18.7	17.4	16.5	15.1	51.4
PAPA012	14-Apr-14	8	18.6	18.7	16.9	15.9	15.0	38.7
PAPA012	14-Apr-14	9	19.2	18.4	17.0	16.2	15.4	39.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	14-Apr-14	10	17.5	18.6	17.3	16.4	15.6	24.7
PAPA012	14-Apr-14	11	19.1	20.1	18.3	17.3	16.1	40.6
PAPA012	14-Apr-14	12	25.8	24.7	20.6	19.1	17.4	44.3
PAPA012	04-Apr-15	11	36.1	24.8	19.1	17.4	16.5	58.6
PAPA012	04-Apr-15	12	35.0	22.9	17.3	16.3	15.6	64.0
PAPA012	04-Apr-15	13	25.5	29.0	18.6	16.6	15.5	43.2
PAPA012	04-Apr-15	14	40.3	42.6	34.1	22.5	15.6	60.5
PAPA012	04-Apr-15	15	38.4	41.7	33.6	24.9	17.7	58.8
PAPA012	04-Apr-15	16	39.1	42.5	34.9	26.8	18.0	60.8
PAPA012	04-Apr-15	17	45.8	49.5	42.7	35.1	21.9	60.5
PAPA012	04-Apr-15	18	40.1	44.0	35.8	28.0	20.1	55.3
PAPA012	04-Apr-15	19	29.8	33.8	24.4	17.3	14.8	44.9
PAPA012	04-Apr-15	20	24.6	27.7	22.3	17.7	15.4	38.0
PAPA012	04-Apr-15	21	21.7	24.2	16.7	15.3	14.8	39.1
PAPA012	04-Apr-15	22	18.5	20.0	16.8	15.6	14.9	37.9
PAPA012	04-Apr-15	23	22.4	25.1	19.3	16.5	15.2	38.8
PAPA012	05-Apr-15	0	18.9	19.8	17.8	16.6	15.7	41.3
PAPA012	05-Apr-15	1	21.2	22.4	16.7	16.0	15.3	50.2
PAPA012	05-Apr-15	2	24.0	22.9	19.8	18.2	16.0	44.7
PAPA012	05-Apr-15	3	24.2	25.8	22.3	17.4	15.2	44.1
PAPA012	05-Apr-15	4	27.8	26.2	23.2	21.9	20.2	49.4
PAPA012	05-Apr-15	5	29.0	31.9	25.4	23.2	21.0	49.5
PAPA012	05-Apr-15	6	31.6	34.0	30.2	27.2	23.0	50.9
PAPA012	05-Apr-15	7	30.1	33.5	28.4	26.0	22.9	39.7
PAPA012	05-Apr-15	8	27.6	31.1	23.4	20.9	19.0	43.4
PAPA012	05-Apr-15	9	36.0	26.8	21.6	19.4	17.3	63.4
PAPA012	05-Apr-15	10	34.9	30.4	22.7	18.6	16.5	58.8
PAPA012	05-Apr-15	11	30.4	34.3	24.0	17.5	15.9	48.6
PAPA012	05-Apr-15	12	42.6	43.2	33.4	24.4	17.8	63.3
PAPA012	05-Apr-15	13	42.0	45.7	38.5	30.7	19.5	56.6
PAPA012	05-Apr-15	14	42.9	46.5	38.7	31.5	23.3	60.1
PAPA012	05-Apr-15	15	47.2	45.8	36.2	25.8	18.4	69.5
PAPA012	05-Apr-15	16	41.1	44.9	36.5	28.5	20.0	56.2
PAPA012	05-Apr-15	17	38.3	42.2	34.8	27.9	18.7	52.4
PAPA012	05-Apr-15	18	32.6	36.2	28.7	21.9	17.2	48.6
PAPA012	05-Apr-15	19	24.7	25.9	18.6	15.9	15.0	55.3
PAPA012	05-Apr-15	20	25.9	28.8	23.2	20.3	18.6	42.8
PAPA012	05-Apr-15	21	19.6	20.3	18.6	16.6	15.8	34.2
PAPA012	05-Apr-15	22	18.6	19.2	17.4	16.2	15.5	35.5
PAPA012	05-Apr-15	23	18.6	20.7	17.1	15.4	14.8	30.5
PAPA012	06-Apr-15	0	24.2	26.0	23.8	21.7	19.2	31.6
PAPA012	06-Apr-15	1	21.8	23.5	21.2	19.7	18.3	30.4
PAPA012	06-Apr-15	2	20.7	22.0	17.9	16.7	15.3	35.9
PAPA012	06-Apr-15	3	19.9	19.8	16.1	15.1	14.4	38.9
PAPA012	06-Apr-15	4	16.3	17.1	15.7	15.0	14.4	32.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	06-Apr-15	5	27.5	31.7	22.7	16.0	14.8	43.9
PAPA012	06-Apr-15	6	32.4	35.9	28.2	21.6	16.7	47.6
PAPA012	06-Apr-15	7	30.5	34.8	25.4	19.8	16.1	50.3
PAPA012	06-Apr-15	8	30.1	34.5	22.8	18.8	16.6	47.9
PAPA012	06-Apr-15	9	23.4	25.6	19.9	16.2	15.3	47.2
PAPA012	06-Apr-15	10	30.3	33.3	20.5	16.6	15.8	49.5
PAPA012	06-Apr-15	11	42.0	45.2	36.7	26.6	18.6	64.3
PAPA012	06-Apr-15	12	42.5	46.2	39.5	31.8	22.6	58.5
PAPA012	06-Apr-15	13	43.4	45.8	37.4	28.9	19.3	66.3
PAPA012	06-Apr-15	14	40.9	44.9	36.6	26.8	17.6	56.1
PAPA012	06-Apr-15	15	42.0	44.4	35.7	27.8	19.7	61.7
PAPA012	06-Apr-15	16	39.7	43.7	35.9	27.2	17.0	54.4
PAPA012	06-Apr-15	17	40.5	44.4	36.7	28.6	19.7	54.4
PAPA012	06-Apr-15	18	41.9	45.6	38.5	30.9	21.8	55.3
PAPA012	06-Apr-15	19	41.7	45.4	38.8	32.3	23.3	55.6
PAPA012	06-Apr-15	20	42.3	46.1	39.4	33.0	24.1	56.3
PAPA012	06-Apr-15	21	29.6	32.7	27.7	23.9	20.9	42.8
PAPA012	06-Apr-15	22	25.4	28.3	23.2	21.2	19.1	40.1
PAPA012	06-Apr-15	23	25.3	28.5	22.8	20.4	18.6	39.8
PAPA012	07-Apr-15	0	21.9	24.1	20.2	18.0	16.9	35.8
PAPA012	07-Apr-15	1	22.2	24.6	20.7	19.0	17.7	37.5
PAPA012	07-Apr-15	2	25.2	27.3	24.2	22.2	20.6	35.6
PAPA012	07-Apr-15	3	28.5	30.6	28.1	25.6	22.9	36.8
PAPA012	07-Apr-15	4	29.3	31.8	28.7	25.3	22.6	36.9
PAPA012	07-Apr-15	5	31.5	33.7	29.3	26.2	23.7	45.9
PAPA012	07-Apr-15	6	32.8	35.0	30.3	26.6	23.3	61.3
PAPA012	07-Apr-15	7	32.5	35.3	28.8	22.6	19.9	54.5
PAPA012	07-Apr-15	8	31.1	34.5	25.6	22.6	20.0	50.5
PAPA012	07-Apr-15	9	35.2	27.2	22.4	19.1	18.0	63.3
PAPA012	07-Apr-15	10	35.2	29.8	25.6	22.2	20.5	56.4
PAPA012	07-Apr-15	11	30.7	33.1	30.0	27.4	24.4	39.5
PAPA012	07-Apr-15	12	39.9	34.0	29.8	27.2	23.7	61.7
PAPA012	07-Apr-15	13	28.7	27.5	23.8	21.5	18.9	54.7
PAPA012	07-Apr-15	14	23.0	25.2	20.3	18.9	17.5	36.0
PAPA012	07-Apr-15	15	22.7	22.3	19.2	17.3	16.3	42.3
PAPA012	07-Apr-15	16	32.2	31.9	18.9	16.9	16.2	51.2
PAPA012	07-Apr-15	17	35.1	38.7	31.4	26.9	22.7	49.5
PAPA012	07-Apr-15	18	28.6	31.1	26.9	24.2	21.2	42.5
PAPA012	07-Apr-15	19	26.8	28.5	25.8	23.8	22.1	40.0
PAPA012	07-Apr-15	20	27.5	29.6	26.4	24.4	22.3	40.2
PAPA012	07-Apr-15	21	23.9	25.7	23.3	21.9	19.4	30.9
PAPA012	07-Apr-15	22	23.1	22.5	18.8	17.1	16.1	42.8
PAPA012	07-Apr-15	23	23.9	25.8	21.4	18.3	16.3	40.6
PAPA012	08-Apr-15	0	23.3	25.4	22.7	19.5	16.5	36.6
PAPA012	08-Apr-15	1	23.6	25.6	21.8	19.2	17.6	44.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	08-Apr-15	2	23.0	25.3	22.4	19.2	16.0	32.4
PAPA012	08-Apr-15	3	22.1	24.5	21.1	18.7	17.2	33.2
PAPA012	08-Apr-15	4	17.6	19.0	16.6	15.8	15.2	27.5
PAPA012	08-Apr-15	5	26.2	29.1	25.3	20.6	16.4	34.0
PAPA012	08-Apr-15	6	31.2	33.7	29.3	24.9	19.5	45.8
PAPA012	08-Apr-15	7	30.1	32.4	26.9	24.1	19.5	54.9
PAPA012	08-Apr-15	8	27.4	30.1	25.4	23.0	20.9	46.7
PAPA012	08-Apr-15	9	26.7	29.0	25.7	23.3	21.2	37.3
PAPA012	08-Apr-15	10	34.2	29.5	25.1	21.5	18.9	67.3
PAPA012	08-Apr-15	11	24.2	27.1	22.9	18.3	16.9	38.3
PAPA012	08-Apr-15	12	23.1	25.6	21.9	19.2	17.2	35.6
PAPA012	08-Apr-15	13	41.0	29.9	23.9	19.8	17.9	69.0
PAPA012	08-Apr-15	14	29.9	33.4	25.6	22.1	19.6	47.1
PAPA012	08-Apr-15	15	26.8	28.6	25.1	23.0	20.7	48.7
PAPA012	08-Apr-15	16	30.1	31.3	27.0	24.7	21.5	56.5
PAPA012	08-Apr-15	17	28.0	30.3	27.2	22.6	19.6	42.8
PAPA012	08-Apr-15	18	25.3	26.8	22.1	19.5	17.3	40.4
PAPA012	08-Apr-15	19	25.2	27.0	23.0	21.5	19.6	40.9
PAPA012	08-Apr-15	20	25.2	27.2	23.7	21.8	20.0	38.1
PAPA012	08-Apr-15	21	24.9	27.3	23.6	21.0	19.0	35.8
PAPA012	08-Apr-15	22	25.8	28.3	22.9	20.4	18.6	39.0
PAPA012	08-Apr-15	23	24.4	26.6	22.9	21.5	19.9	37.9
PAPA012	09-Apr-15	0	24.5	24.7	22.3	20.6	18.8	44.2
PAPA012	09-Apr-15	1	25.8	29.5	22.4	17.4	16.3	38.2
PAPA012	09-Apr-15	2	23.6	26.3	22.3	18.5	17.0	35.6
PAPA012	09-Apr-15	3	22.3	24.1	21.6	19.9	18.5	30.0
PAPA012	09-Apr-15	4	22.0	23.6	21.6	19.9	18.4	30.8
PAPA012	09-Apr-15	5	23.8	27.0	21.7	19.1	17.6	38.4
PAPA012	09-Apr-15	6	34.3	36.8	26.1	18.3	15.9	51.1
PAPA012	09-Apr-15	7	27.0	31.6	19.5	16.1	14.8	42.6
PAPA012	09-Apr-15	8	32.3	32.2	24.1	19.4	16.7	55.3
PAPA012	09-Apr-15	9	30.8	32.4	20.9	17.7	16.2	51.3
PAPA012	09-Apr-15	10	22.8	23.0	19.9	17.8	16.8	49.5
PAPA012	09-Apr-15	11	30.2	24.5	20.4	18.7	17.5	60.1
PAPA012	09-Apr-15	12	20.6	22.0	20.1	18.7	17.6	30.8
PAPA012	09-Apr-15	13	18.2	19.1	17.8	17.0	16.3	36.6
PAPA012	09-Apr-15	14	25.4	26.2	18.4	17.5	16.7	51.4
PAPA012	09-Apr-15	15	22.8	24.1	18.6	17.3	16.5	42.7
PAPA012	09-Apr-15	16	22.0	24.6	18.8	17.4	16.6	38.3
PAPA012	09-Apr-15	17	27.7	30.4	19.1	16.8	15.9	47.4
PAPA012	09-Apr-15	18	19.6	22.7	17.1	15.6	14.8	35.0
PAPA012	09-Apr-15	19	25.0	27.6	24.6	18.2	15.7	34.0
PAPA012	09-Apr-15	20	31.9	35.3	29.7	25.1	20.6	44.3
PAPA012	09-Apr-15	21	26.6	29.8	25.4	22.6	20.5	34.0
PAPA012	09-Apr-15	22	20.9	23.2	19.3	17.4	16.3	35.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	09-Apr-15	23	22.2	21.4	19.1	17.8	16.6	38.8
PAPA012	10-Apr-15	0	21.9	23.5	21.2	19.1	17.5	32.5
PAPA012	10-Apr-15	1	22.4	25.9	21.0	19.2	18.0	35.4
PAPA012	10-Apr-15	2	25.0	26.2	24.9	23.5	21.9	29.1
PAPA012	10-Apr-15	3	28.0	30.3	26.8	24.4	22.3	37.3
PAPA012	10-Apr-15	4	28.5	30.0	28.2	26.6	24.6	33.5
PAPA012	10-Apr-15	5	31.9	34.5	29.3	27.4	25.3	46.5
PAPA012	10-Apr-15	6	32.2	35.2	30.8	27.7	24.5	47.3
PAPA012	10-Apr-15	7	30.0	33.2	27.9	25.7	24.2	45.2
PAPA012	10-Apr-15	8	31.7	33.0	28.9	26.2	23.7	53.3
PAPA012	10-Apr-15	9	43.5	35.3	31.0	26.2	24.3	78.1
PAPA012	10-Apr-15	10	40.3	28.0	22.6	18.9	17.4	63.0
PAPA012	10-Apr-15	11	37.8	21.7	17.9	16.7	15.9	60.7
PAPA012	10-Apr-15	12	23.5	25.2	18.2	16.7	16.0	41.9
PAPA012	10-Apr-15	13	22.0	23.3	18.1	16.9	16.0	44.9
PAPA012	10-Apr-15	14	24.2	25.9	18.7	17.3	16.6	46.1
PAPA012	10-Apr-15	15	42.6	24.0	18.1	16.9	16.2	65.5
PAPA012	10-Apr-15	16	42.5	24.2	17.4	16.0	15.4	66.4
PAPA012	10-Apr-15	17	23.0	22.0	16.5	15.6	15.3	45.7
PAPA012	10-Apr-15	18	20.1	18.2	15.5	15.0	14.7	44.8
PAPA012	10-Apr-15	19	21.3	20.4	15.8	15.2	14.8	41.4
PAPA012	10-Apr-15	20	27.1	29.9	21.8	17.9	15.4	49.1
PAPA012	10-Apr-15	21	16.9	18.0	16.8	15.4	14.8	27.9
PAPA012	10-Apr-15	22	17.0	18.1	16.6	15.7	15.1	21.2
PAPA012	10-Apr-15	23	22.7	25.4	22.2	18.5	17.2	28.4
PAPA012	11-Apr-15	0	21.5	23.3	21.3	18.5	17.2	25.8
PAPA012	11-Apr-15	1	18.4	19.9	18.2	16.9	16.3	27.9
PAPA012	11-Apr-15	2	24.5	27.9	22.3	19.1	17.3	37.8
PAPA012	11-Apr-15	3	23.4	24.8	22.1	20.4	17.6	43.2
PAPA012	11-Apr-15	4	21.8	24.4	20.3	18.3	16.6	36.4
PAPA012	11-Apr-15	5	29.6	33.9	22.5	19.8	17.9	51.8
PAPA012	11-Apr-15	6	31.9	35.5	26.3	21.8	18.1	49.2
PAPA012	11-Apr-15	7	37.2	35.4	27.2	23.6	20.9	58.8
PAPA012	11-Apr-15	8	31.7	28.7	24.3	21.2	18.8	59.7
PAPA012	11-Apr-15	9	48.2	35.3	23.8	21.1	18.8	73.9
PAPA012	11-Apr-15	10	27.7	24.2	20.3	18.3	17.1	53.1
PAPA012	11-Apr-15	11	38.3	34.2	21.2	17.5	16.2	66.0
PAPA012	11-Apr-15	12	35.5	39.9	28.2	20.5	17.3	51.1
PAPA012	11-Apr-15	13	36.7	39.1	29.5	22.5	17.0	58.4
PAPA012	11-Apr-15	14	42.0	40.8	32.0	24.6	18.6	73.1
PAPA012	11-Apr-15	15	37.4	41.1	33.3	26.0	17.9	54.4
PAPA012	11-Apr-15	16	37.1	40.9	33.1	26.8	21.1	52.6
PAPA012	11-Apr-15	17	36.7	40.5	33.3	26.5	21.1	50.5
PAPA012	11-Apr-15	18	37.8	41.4	34.8	28.7	22.9	55.5
PAPA012	11-Apr-15	19	33.3	37.1	29.3	25.4	20.1	48.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	11-Apr-15	20	28.1	31.7	25.3	20.6	18.8	38.6
PAPA012	11-Apr-15	21	23.3	24.8	22.9	21.4	19.4	30.1
PAPA012	11-Apr-15	22	24.0	25.7	23.7	21.2	19.4	33.0
PAPA012	11-Apr-15	23	23.7	26.4	22.6	19.8	17.7	31.0
PAPA012	12-Apr-15	0	20.8	22.9	19.9	18.5	17.6	27.4
PAPA012	12-Apr-15	1	20.4	22.3	19.8	18.1	16.1	30.6
PAPA012	12-Apr-15	2	19.5	21.8	17.8	16.4	15.6	33.5
PAPA012	12-Apr-15	3	18.0	19.2	17.7	16.7	15.7	29.3
PAPA012	12-Apr-15	4	22.2	25.5	20.0	16.0	14.9	34.5
PAPA012	12-Apr-15	5	30.5	32.4	23.2	19.3	17.6	50.6
PAPA012	12-Apr-15	6	32.2	34.1	28.2	22.5	18.6	58.2
PAPA012	12-Apr-15	7	27.8	31.1	25.4	21.6	18.9	44.9
PAPA012	02-Apr-16	10	34.1	31.5	27.3	23.7	20.6	61.6
PAPA012	02-Apr-16	11	24.4	24.4	20.9	18.9	16.8	53.1
PAPA012	02-Apr-16	12	34.0	28.0	19.9	17.9	16.6	59.5
PAPA012	02-Apr-16	13	28.5	27.1	20.1	18.4	17.3	56.4
PAPA012	02-Apr-16	14	26.1	29.4	21.2	18.6	17.3	43.1
PAPA012	02-Apr-16	15	26.4	29.8	21.8	18.5	16.7	43.2
PAPA012	02-Apr-16	16	27.4	30.0	21.5	17.5	16.3	51.6
PAPA012	02-Apr-16	17	32.3	36.5	27.5	20.1	16.9	49.5
PAPA012	02-Apr-16	18	29.7	33.6	26.6	21.3	17.9	42.6
PAPA012	02-Apr-16	19	26.6	30.2	23.7	20.0	16.6	40.8
PAPA012	02-Apr-16	20	28.4	31.1	25.1	18.2	15.8	48.1
PAPA012	02-Apr-16	21	20.2	21.2	17.0	16.1	15.4	36.2
PAPA012	02-Apr-16	22	21.0	22.0	20.0	18.1	17.0	35.3
PAPA012	02-Apr-16	23	22.3	23.6	22.2	20.5	18.5	29.9
PAPA012	03-Apr-16	0	24.6	25.7	23.3	21.0	19.3	40.2
PAPA012	03-Apr-16	1	26.5	28.1	25.8	24.2	22.2	39.6
PAPA012	03-Apr-16	2	27.9	30.4	26.5	24.6	22.8	38.7
PAPA012	03-Apr-16	3	26.0	27.7	25.2	22.8	20.9	38.2
PAPA012	03-Apr-16	4	25.7	27.9	24.5	22.3	20.2	37.5
PAPA012	03-Apr-16	5	31.6	34.7	29.4	26.0	23.7	48.3
PAPA012	03-Apr-16	6	42.3	43.8	37.0	32.5	27.1	62.2
PAPA012	03-Apr-16	7	42.4	44.7	34.9	28.7	22.9	54.0
PAPA012	03-Apr-16	8	35.3	33.6	28.0	25.2	22.2	58.0
PAPA012	03-Apr-16	9	26.9	27.3	23.9	22.0	19.5	49.5
PAPA012	03-Apr-16	10	27.5	26.4	22.6	20.8	19.3	55.2
PAPA012	03-Apr-16	11	26.2	28.3	22.2	19.2	16.9	54.1
PAPA012	03-Apr-16	12	29.3	33.1	23.2	18.6	16.9	48.8
PAPA012	03-Apr-16	13	35.7	39.7	30.4	19.2	16.4	56.4
PAPA012	03-Apr-16	14	33.8	37.8	29.5	21.4	17.2	47.3
PAPA012	03-Apr-16	15	34.0	37.9	30.3	23.1	17.2	48.3
PAPA012	03-Apr-16	16	32.0	35.7	27.5	19.3	16.6	46.2
PAPA012	03-Apr-16	17	31.4	35.1	27.8	21.5	17.1	45.2
PAPA012	03-Apr-16	18	25.2	28.8	21.0	17.6	15.5	40.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	03-Apr-16	19	33.9	31.2	19.3	16.9	15.5	52.5
PAPA012	03-Apr-16	20	37.8	37.6	26.6	17.8	15.9	53.2
PAPA012	03-Apr-16	21	22.6	24.3	17.9	16.5	15.4	51.7
PAPA012	03-Apr-16	22	28.2	31.0	26.2	20.6	16.4	43.3
PAPA012	03-Apr-16	23	23.6	25.6	22.3	20.1	18.6	37.9
PAPA012	04-Apr-16	0	24.1	25.6	23.0	21.4	20.0	34.4
PAPA012	04-Apr-16	1	22.5	23.9	22.2	20.9	19.6	27.4
PAPA012	04-Apr-16	2	23.6	25.9	22.9	21.1	19.6	36.1
PAPA012	04-Apr-16	3	27.9	30.2	26.9	25.6	24.3	35.2
PAPA012	04-Apr-16	4	26.6	28.4	26.2	24.5	22.8	31.4
PAPA012	04-Apr-16	5	34.1	35.9	30.3	26.1	23.6	49.6
PAPA012	04-Apr-16	6	38.4	41.4	34.6	27.5	25.3	52.5
PAPA012	04-Apr-16	7	29.0	29.6	26.1	24.5	22.6	54.3
PAPA012	04-Apr-16	8	36.0	37.8	28.8	24.4	20.3	60.9
PAPA012	04-Apr-16	9	30.8	32.9	24.1	18.3	17.0	56.6
PAPA012	04-Apr-16	10	24.3	24.7	20.0	18.3	17.0	48.8
PAPA012	04-Apr-16	11	26.6	28.3	20.0	18.1	17.2	47.6
PAPA012	04-Apr-16	12	30.1	33.8	24.1	18.7	16.8	49.1
PAPA012	04-Apr-16	13	30.8	34.0	27.2	21.3	18.3	47.8
PAPA012	04-Apr-16	14	33.6	37.3	28.6	22.9	19.0	53.8
PAPA012	04-Apr-16	15	33.6	37.7	29.9	23.2	19.0	46.6
PAPA012	04-Apr-16	16	41.9	46.4	34.3	25.2	19.1	59.9
PAPA012	04-Apr-16	17	27.2	28.9	22.7	18.7	16.3	51.7
PAPA012	04-Apr-16	18	37.6	41.1	29.0	21.2	17.3	55.4
PAPA012	04-Apr-16	19	31.1	34.3	29.0	25.3	22.4	43.2
PAPA012	04-Apr-16	20	32.5	33.5	28.2	25.1	22.9	51.8
PAPA012	04-Apr-16	21	23.0	25.3	22.4	19.7	18.6	28.7
PAPA012	04-Apr-16	22	20.6	21.2	19.8	18.7	17.8	33.5
PAPA012	04-Apr-16	23	29.5	30.8	22.3	18.2	15.8	48.1
PAPA012	05-Apr-16	0	21.0	22.8	19.9	17.5	15.3	36.5
PAPA012	05-Apr-16	1	24.6	27.7	22.4	19.1	17.5	38.3
PAPA012	05-Apr-16	2	20.8	20.3	18.6	17.4	16.5	50.0
PAPA012	05-Apr-16	3	23.6	26.5	20.1	17.7	16.6	43.4
PAPA012	05-Apr-16	4	29.4	33.1	23.7	19.2	17.4	44.9
PAPA012	05-Apr-16	5	33.0	37.1	28.0	21.7	18.7	48.6
PAPA012	05-Apr-16	6	38.3	41.1	33.1	27.6	20.5	51.7
PAPA012	05-Apr-16	7	33.1	36.6	30.5	25.4	19.5	44.6
PAPA012	05-Apr-16	8	30.8	35.1	26.8	21.8	18.6	43.2
PAPA012	05-Apr-16	9	40.2	44.0	37.5	31.1	24.2	54.7
PAPA012	05-Apr-16	10	43.5	47.3	40.7	33.9	27.2	58.1
PAPA012	05-Apr-16	11	44.4	47.6	40.8	33.8	27.0	61.5
PAPA012	05-Apr-16	12	45.2	48.9	42.3	35.2	25.1	59.4
PAPA012	05-Apr-16	13	42.9	46.6	39.8	32.7	25.5	57.6
PAPA012	05-Apr-16	14	44.1	48.0	40.9	33.4	24.8	58.3
PAPA012	05-Apr-16	15	45.6	49.5	42.5	34.8	24.9	58.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	05-Apr-16	16	45.4	49.0	42.6	35.5	26.9	59.1
PAPA012	05-Apr-16	17	45.9	49.7	43.0	36.0	25.3	58.8
PAPA012	05-Apr-16	18	44.4	47.2	40.7	34.2	25.8	65.0
PAPA012	05-Apr-16	19	36.8	40.5	33.3	26.9	21.6	52.2
PAPA012	05-Apr-16	20	30.2	32.2	26.9	23.1	20.5	47.6
PAPA012	05-Apr-16	21	23.6	25.7	22.4	20.9	19.0	34.2
PAPA012	05-Apr-16	22	25.8	26.2	22.1	20.4	18.8	44.1
PAPA012	05-Apr-16	23	23.6	25.5	22.3	19.9	18.1	36.8
PAPA012	06-Apr-16	0	23.3	25.3	22.5	20.9	19.6	34.9
PAPA012	06-Apr-16	1	23.0	24.1	22.9	21.5	20.0	33.0
PAPA012	06-Apr-16	2	23.3	24.6	22.1	19.8	18.7	37.9
PAPA012	06-Apr-16	3	23.6	25.1	23.4	21.5	19.9	32.3
PAPA012	06-Apr-16	4	24.4	25.7	24.0	22.7	20.8	39.2
PAPA012	06-Apr-16	5	27.6	30.4	25.2	23.0	20.6	41.9
PAPA012	06-Apr-16	6	37.9	41.6	34.6	30.4	25.4	48.8
PAPA012	06-Apr-16	7	36.9	37.8	31.0	27.2	24.3	57.4
PAPA012	06-Apr-16	8	29.6	30.7	27.8	26.2	24.7	49.4
PAPA012	06-Apr-16	9	29.8	32.2	27.4	24.3	21.6	47.2
PAPA012	06-Apr-16	10	34.0	37.0	31.3	26.7	22.2	54.3
PAPA012	06-Apr-16	11	36.1	37.7	30.6	24.3	20.6	66.8
PAPA012	06-Apr-16	12	38.0	40.4	33.4	27.3	22.4	58.7
PAPA012	06-Apr-16	13	39.1	43.0	35.3	28.1	21.1	56.7
PAPA012	06-Apr-16	14	43.9	47.8	40.5	33.4	24.8	60.7
PAPA012	06-Apr-16	15	45.5	49.1	42.4	35.3	25.2	60.7
PAPA012	06-Apr-16	16	48.5	52.2	45.7	37.7	27.0	62.1
PAPA012	06-Apr-16	17	38.7	42.3	35.7	29.4	22.8	51.6
PAPA012	06-Apr-16	18	43.2	47.2	40.0	32.8	26.2	55.7
PAPA012	06-Apr-16	19	34.6	38.5	31.2	24.0	19.7	48.0
PAPA012	06-Apr-16	20	30.6	31.1	22.6	19.1	17.4	49.7
PAPA012	06-Apr-16	21	21.3	22.7	21.0	19.1	17.4	31.6
PAPA012	06-Apr-16	22	20.6	21.9	20.2	18.7	17.3	29.8
PAPA012	06-Apr-16	23	20.9	21.9	20.3	19.3	18.1	30.1
PAPA012	07-Apr-16	0	23.3	24.7	22.9	21.6	19.9	30.9
PAPA012	07-Apr-16	1	22.1	23.1	21.9	20.9	19.3	26.9
PAPA012	07-Apr-16	2	21.3	23.3	20.4	18.6	17.3	33.7
PAPA012	07-Apr-16	3	22.9	24.2	21.2	18.9	17.1	37.8
PAPA012	07-Apr-16	4	24.3	25.7	23.6	22.1	20.1	38.4
PAPA012	07-Apr-16	5	31.1	34.3	29.1	24.4	21.4	48.1
PAPA012	07-Apr-16	6	36.8	40.0	34.9	30.2	23.0	50.6
PAPA012	07-Apr-16	7	33.6	37.5	30.5	25.7	23.0	46.3
PAPA012	07-Apr-16	8	29.5	31.7	27.4	25.1	23.1	52.5
PAPA012	07-Apr-16	9	31.7	33.4	27.9	23.6	18.4	49.4
PAPA012	07-Apr-16	10	39.3	43.0	36.3	30.5	22.6	51.8
PAPA012	07-Apr-16	11	38.9	42.3	36.8	30.6	24.7	51.3
PAPA012	07-Apr-16	12	39.1	43.0	36.1	29.6	22.5	52.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	07-Apr-16	13	36.9	40.6	33.0	25.5	19.4	51.1
PAPA012	07-Apr-16	14	38.9	42.7	34.0	25.6	18.3	54.8
PAPA012	07-Apr-16	15	35.6	39.4	31.5	24.1	18.7	50.3
PAPA012	07-Apr-16	16	39.1	43.0	35.7	27.4	20.0	51.8
PAPA012	07-Apr-16	17	40.7	44.4	38.1	31.8	21.9	55.1
PAPA012	07-Apr-16	18	37.2	40.8	34.2	26.9	19.2	51.1
PAPA012	07-Apr-16	19	31.6	35.2	28.7	23.8	20.1	45.6
PAPA012	07-Apr-16	20	29.1	31.5	27.1	23.8	20.6	43.3
PAPA012	07-Apr-16	21	26.4	28.4	25.9	23.9	20.7	35.6
PAPA012	07-Apr-16	22	26.2	28.3	25.7	23.7	21.4	37.3
PAPA012	07-Apr-16	23	26.3	29.7	24.8	20.3	18.3	32.2
PAPA012	08-Apr-16	0	29.5	32.6	28.4	23.2	21.2	40.6
PAPA012	08-Apr-16	1	23.9	25.6	23.6	21.7	19.9	28.8
PAPA012	08-Apr-16	2	24.6	25.8	24.2	23.0	20.8	38.6
PAPA012	08-Apr-16	3	24.2	25.5	23.9	22.8	21.3	28.4
PAPA012	08-Apr-16	4	24.5	25.7	24.2	23.2	21.6	29.6
PAPA012	08-Apr-16	5	32.3	35.6	25.9	23.7	22.6	51.2
PAPA012	08-Apr-16	6	37.6	40.7	32.0	25.6	21.7	51.7
PAPA012	08-Apr-16	7	34.1	37.4	30.5	25.5	22.4	53.8
PAPA012	08-Apr-16	8	30.1	32.2	27.7	25.6	23.3	54.2
PAPA012	08-Apr-16	9	34.9	26.2	18.4	16.7	15.8	59.8
PAPA012	08-Apr-16	10	17.8	19.1	16.9	16.3	15.8	28.6
PAPA012	08-Apr-16	11	23.1	26.1	20.1	17.3	15.9	37.7
PAPA012	08-Apr-16	12	24.3	26.0	20.4	18.1	16.7	52.3
PAPA012	08-Apr-16	13	27.7	28.2	20.8	18.4	17.2	49.2
PAPA012	08-Apr-16	14	26.1	29.6	21.7	18.3	16.7	43.0
PAPA012	08-Apr-16	15	27.7	31.7	23.2	18.9	16.8	42.3
PAPA012	08-Apr-16	16	25.8	29.5	22.0	18.3	16.7	39.5
PAPA012	08-Apr-16	17	37.9	35.1	21.7	17.9	16.0	58.4
PAPA012	08-Apr-16	18	19.0	21.0	17.8	16.2	15.3	29.3
PAPA012	08-Apr-16	19	18.6	20.9	17.1	15.5	14.8	31.1
PAPA012	08-Apr-16	20	28.7	33.5	23.0	16.9	14.8	42.2
PAPA012	08-Apr-16	21	24.4	19.1	16.9	15.4	14.8	53.5
PAPA012	08-Apr-16	22	19.6	21.1	19.0	17.8	16.9	26.9
PAPA012	08-Apr-16	23	19.3	20.5	18.8	17.7	16.3	30.8
PAPA012	09-Apr-16	0	18.6	19.8	18.1	17.3	16.5	30.9
PAPA012	09-Apr-16	1	25.3	27.2	25.0	22.4	19.8	31.4
PAPA012	09-Apr-16	2	25.9	27.3	25.7	24.3	22.7	35.4
PAPA012	09-Apr-16	3	25.7	26.9	25.5	24.2	22.4	34.2
PAPA012	09-Apr-16	4	25.5	26.1	24.3	22.6	20.4	39.9
PAPA012	09-Apr-16	5	32.0	36.2	25.9	21.3	19.8	50.8
PAPA012	09-Apr-16	6	36.8	40.1	33.7	28.3	23.1	54.8
PAPA012	09-Apr-16	7	31.5	34.9	29.0	25.1	22.4	49.7
PAPA012	09-Apr-16	8	27.0	28.0	25.3	23.5	21.5	52.4
PAPA012	09-Apr-16	9	25.4	26.7	23.9	20.8	17.6	43.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	09-Apr-16	10	28.4	26.8	21.1	19.2	17.6	57.5
PAPA012	09-Apr-16	11	25.9	28.0	20.5	17.1	16.0	44.2
PAPA012	09-Apr-16	12	24.1	26.6	18.8	16.7	16.0	46.3
PAPA012	09-Apr-16	13	27.1	30.6	20.5	16.2	15.4	44.5
PAPA012	09-Apr-16	14	36.6	39.7	26.3	18.3	15.7	54.4
PAPA012	09-Apr-16	15	29.0	32.8	24.8	20.1	18.0	43.1
PAPA012	09-Apr-16	16	22.2	23.7	19.5	17.4	15.9	38.2
PAPA012	09-Apr-16	17	29.5	33.1	22.2	17.5	15.9	47.6
PAPA012	09-Apr-16	18	29.0	32.9	24.2	18.5	15.9	43.6
PAPA012	09-Apr-16	19	26.3	29.1	24.5	18.8	16.2	41.3
PAPA012	09-Apr-16	20	26.6	30.0	22.3	17.1	15.7	46.2
PAPA012	09-Apr-16	21	21.0	22.6	19.0	16.1	15.1	35.7
PAPA012	09-Apr-16	22	25.0	27.1	23.1	19.6	16.1	38.1
PAPA012	09-Apr-16	23	17.8	19.2	17.3	15.8	15.0	26.9
PAPA012	10-Apr-16	0	20.8	22.2	20.7	18.5	17.0	25.4
PAPA012	10-Apr-16	1	22.0	23.4	21.9	20.1	18.2	28.8
PAPA012	10-Apr-16	2	22.7	24.8	22.3	18.1	16.3	33.2
PAPA012	10-Apr-16	3	28.1	30.2	27.5	25.0	23.1	36.9
PAPA012	10-Apr-16	4	26.5	28.2	26.1	24.3	22.1	33.9
PAPA012	10-Apr-16	5	30.3	31.8	28.4	25.5	22.9	48.6
PAPA012	10-Apr-16	6	36.1	39.5	33.2	29.3	25.7	47.4
PAPA012	10-Apr-16	7	35.5	39.1	30.6	26.0	22.6	55.1
PAPA012	10-Apr-16	8	46.4	34.4	27.5	23.0	18.6	70.1
PAPA012	10-Apr-16	9	31.8	35.5	28.5	24.4	19.2	47.6
PAPA012	10-Apr-16	10	33.3	36.3	30.7	26.5	23.3	48.8
PAPA012	10-Apr-16	11	35.3	38.3	27.5	21.5	17.2	54.3
PAPA012	10-Apr-16	12	28.4	29.6	20.4	18.1	16.7	54.2
PAPA012	10-Apr-16	13	21.2	22.2	17.4	16.4	15.7	39.4
PAPA012	10-Apr-16	14	24.0	22.6	18.0	16.3	15.6	50.8
PAPA012	10-Apr-16	15	25.3	29.2	19.8	16.9	16.0	42.7
PAPA012	10-Apr-16	16	29.9	29.2	20.4	16.8	15.7	49.1
PAPA012	10-Apr-16	17	27.4	28.4	20.1	17.4	16.6	48.9
PAPA012	10-Apr-16	18	39.5	45.6	26.8	17.9	16.4	57.4
PAPA012	10-Apr-16	19	30.2	32.7	27.7	23.2	19.6	50.2
PAPA012	10-Apr-16	20	28.3	29.8	26.2	24.3	22.5	55.1
PAPA012	10-Apr-16	21	27.5	29.0	27.1	25.3	23.2	39.6
PAPA012	10-Apr-16	22	28.8	30.9	27.9	25.7	23.6	41.4
PAPA012	10-Apr-16	23	27.5	29.1	27.1	25.5	23.9	38.3
PAPA012	11-Apr-16	0	26.8	28.8	26.6	23.4	21.2	34.4
PAPA012	11-Apr-16	1	24.7	26.7	24.0	21.8	19.5	32.9
PAPA012	11-Apr-16	2	31.8	35.2	29.8	26.4	23.5	42.4
PAPA012	11-Apr-16	3	29.5	32.4	27.7	23.7	21.3	40.2
PAPA012	11-Apr-16	4	22.3	23.9	21.8	19.7	17.5	29.2
PAPA012	11-Apr-16	5	30.2	33.9	25.0	22.3	20.5	47.6
PAPA012	11-Apr-16	6	37.0	40.3	32.4	26.5	21.8	56.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA012	11-Apr-16	7	33.0	36.0	29.8	25.8	21.0	54.8
PAPA012	11-Apr-16	8	34.7	37.6	30.7	25.4	20.2	60.9
PAPA012	11-Apr-16	9	28.6	33.1	23.8	21.1	19.4	44.9
PAPA013	12-Apr-13	13	33.4	37.0	29.4	24.0	19.6	47.0
PAPA013	12-Apr-13	14	31.2	34.6	28.5	24.7	21.3	45.4
PAPA013	12-Apr-13	15	29.2	32.5	25.3	21.8	18.6	44.7
PAPA013	12-Apr-13	16	34.4	36.1	28.9	22.4	18.6	57.1
PAPA013	12-Apr-13	17	28.0	31.7	25.0	20.6	18.2	41.0
PAPA013	12-Apr-13	18	28.9	32.6	25.7	20.1	17.4	43.1
PAPA013	12-Apr-13	19	24.5	27.1	22.2	19.6	17.5	38.2
PAPA013	12-Apr-13	20	28.1	30.2	27.0	24.3	21.1	47.1
PAPA013	12-Apr-13	21	27.9	29.4	27.4	25.7	23.2	35.2
PAPA013	12-Apr-13	22	28.7	30.2	28.5	26.8	24.4	33.4
PAPA013	12-Apr-13	23	27.2	29.8	26.7	23.0	21.4	35.5
PAPA013	13-Apr-13	0	28.3	30.6	28.0	24.3	21.5	34.1
PAPA013	13-Apr-13	1	29.2	31.1	29.2	25.0	22.0	34.9
PAPA013	13-Apr-13	2	31.7	33.5	31.3	29.5	27.3	39.1
PAPA013	13-Apr-13	3	32.2	34.2	31.6	29.4	26.5	38.9
PAPA013	13-Apr-13	4	33.6	35.6	33.1	30.5	27.4	39.8
PAPA013	13-Apr-13	5	28.7	32.3	27.2	22.5	18.4	38.7
PAPA013	13-Apr-13	6	26.4	25.3	22.7	20.3	17.7	53.6
PAPA013	13-Apr-13	7	28.3	27.0	25.2	21.9	20.1	50.1
PAPA013	13-Apr-13	8	47.7	29.6	25.7	24.3	22.7	75.0
PAPA013	13-Apr-13	9	28.1	30.9	26.4	23.1	20.3	43.7
PAPA013	13-Apr-13	10	37.6	41.1	34.9	29.8	24.0	51.5
PAPA013	13-Apr-13	11	37.8	41.6	35.1	29.5	24.8	49.0
PAPA013	13-Apr-13	12	38.8	42.5	36.3	30.3	24.5	51.7
PAPA013	13-Apr-13	13	39.7	43.3	36.6	30.7	25.3	53.7
PAPA013	13-Apr-13	14	42.9	46.6	40.1	34.0	27.5	56.3
PAPA013	13-Apr-13	15	44.4	47.9	41.8	35.8	29.2	56.2
PAPA013	13-Apr-13	16	37.9	41.6	32.8	26.4	21.6	54.3
PAPA013	13-Apr-13	17	30.1	33.1	24.4	20.2	18.5	48.6
PAPA013	13-Apr-13	18	28.3	30.5	24.1	20.9	18.9	44.4
PAPA013	13-Apr-13	19	27.1	29.9	25.0	22.7	20.6	39.8
PAPA013	13-Apr-13	20	28.1	30.6	26.1	23.1	20.6	40.9
PAPA013	13-Apr-13	21	35.5	38.9	32.3	27.5	23.4	53.8
PAPA013	13-Apr-13	22	33.1	36.5	30.1	25.8	22.6	47.4
PAPA013	13-Apr-13	23	30.3	33.9	27.5	23.1	19.4	45.5
PAPA013	14-Apr-13	0	22.7	24.6	21.4	20.0	18.5	36.7
PAPA013	14-Apr-13	1	22.3	24.1	20.6	18.2	16.7	36.9
PAPA013	14-Apr-13	2	22.6	25.4	20.3	18.1	17.2	36.8
PAPA013	14-Apr-13	3	27.8	31.1	25.2	21.8	19.2	41.6
PAPA013	14-Apr-13	4	24.9	27.8	21.8	19.9	18.7	42.2
PAPA013	14-Apr-13	5	21.1	22.4	20.6	19.4	17.8	36.8
PAPA013	14-Apr-13	6	23.1	25.3	22.2	20.3	18.4	32.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	14-Apr-13	7	33.6	24.5	21.9	20.5	19.1	63.1
PAPA013	14-Apr-13	8	31.1	34.9	27.3	22.1	19.8	44.5
PAPA013	14-Apr-13	9	36.5	40.1	33.4	27.1	21.1	50.5
PAPA013	14-Apr-13	10	37.7	41.3	35.0	28.7	21.4	51.6
PAPA013	11-Apr-14	18	36.7	40.1	33.8	28.3	23.5	59.9
PAPA013	11-Apr-14	19	31.8	35.4	29.0	24.6	20.3	46.8
PAPA013	11-Apr-14	20	29.4	31.9	28.8	25.4	21.1	35.4
PAPA013	11-Apr-14	21	22.0	24.6	19.9	17.7	16.6	39.4
PAPA013	11-Apr-14	22	23.0	22.3	19.8	18.3	16.8	41.5
PAPA013	11-Apr-14	23	24.9	27.9	23.3	20.1	18.0	34.0
PAPA013	12-Apr-14	0	29.1	32.2	27.6	24.4	22.2	35.8
PAPA013	12-Apr-14	1	27.1	29.0	26.7	24.7	22.7	38.2
PAPA013	12-Apr-14	2	29.7	32.5	28.8	25.8	20.8	36.1
PAPA013	12-Apr-14	3	26.5	30.1	23.2	19.0	16.7	37.8
PAPA013	12-Apr-14	4	23.0	27.5	18.8	17.7	16.7	32.5
PAPA013	12-Apr-14	5	28.1	30.4	27.0	23.8	20.2	40.5
PAPA013	12-Apr-14	6	29.8	30.8	27.4	24.7	20.5	47.2
PAPA013	12-Apr-14	7	44.8	35.3	28.9	26.0	23.6	70.9
PAPA013	12-Apr-14	8	33.0	31.0	26.8	24.5	22.4	60.5
PAPA013	12-Apr-14	9	29.5	27.8	20.1	17.4	15.8	53.6
PAPA013	12-Apr-14	10	30.3	24.8	17.7	16.8	15.7	54.7
PAPA013	12-Apr-14	11	21.4	22.3	19.5	17.9	16.7	45.6
PAPA013	12-Apr-14	12	23.3	26.1	20.9	18.7	16.8	37.8
PAPA013	12-Apr-14	13	31.8	35.4	26.8	21.6	17.9	47.9
PAPA013	12-Apr-14	14	36.3	39.7	32.3	25.5	20.4	52.7
PAPA013	12-Apr-14	15	36.5	40.2	33.1	26.2	19.0	52.6
PAPA013	12-Apr-14	16	34.8	38.1	31.4	25.5	20.2	56.5
PAPA013	12-Apr-14	17	26.9	30.6	24.0	18.0	15.2	42.4
PAPA013	12-Apr-14	18	21.7	25.1	18.9	15.6	14.5	33.4
PAPA013	12-Apr-14	19	21.0	22.7	15.8	14.8	14.3	40.4
PAPA013	12-Apr-14	20	22.5	24.1	17.7	16.1	15.2	40.5
PAPA013	12-Apr-14	21	26.9	30.6	24.5	16.9	15.8	38.7
PAPA013	12-Apr-14	22	27.6	30.4	27.0	23.7	21.1	34.5
PAPA013	12-Apr-14	23	30.8	32.7	29.5	26.8	22.9	45.3
PAPA013	13-Apr-14	0	29.3	31.4	28.5	26.2	24.2	42.5
PAPA013	13-Apr-14	1	29.5	31.2	28.6	27.2	25.3	38.5
PAPA013	13-Apr-14	2	31.1	33.3	30.2	27.4	24.5	43.3
PAPA013	13-Apr-14	3	35.5	39.3	31.8	27.4	24.6	50.5
PAPA013	13-Apr-14	4	29.1	31.3	27.8	26.1	23.8	40.5
PAPA013	13-Apr-14	5	29.3	31.8	28.0	25.8	24.2	41.2
PAPA013	13-Apr-14	6	29.3	32.0	27.6	25.2	22.5	44.5
PAPA013	13-Apr-14	7	42.1	30.1	25.7	24.2	21.2	64.8
PAPA013	13-Apr-14	8	34.4	37.7	24.8	19.3	17.0	51.6
PAPA013	13-Apr-14	9	27.6	27.3	22.8	20.0	17.7	48.1
PAPA013	13-Apr-14	10	26.6	28.7	21.1	18.4	16.7	48.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	13-Apr-14	11	35.6	24.8	20.2	18.3	16.7	65.8
PAPA013	13-Apr-14	12	26.8	27.5	23.0	20.0	18.3	43.8
PAPA013	13-Apr-14	13	25.3	27.1	19.1	18.0	16.6	42.9
PAPA013	13-Apr-14	14	27.3	26.1	19.5	17.3	16.3	46.7
PAPA013	13-Apr-14	15	21.9	24.2	20.1	18.0	16.2	36.7
PAPA013	13-Apr-14	16	23.3	24.4	19.9	17.5	15.9	39.9
PAPA013	13-Apr-14	17	27.9	26.5	20.5	17.3	15.1	50.3
PAPA013	13-Apr-14	18	23.1	23.4	18.2	16.5	15.1	41.2
PAPA013	13-Apr-14	19	22.4	24.8	20.4	18.2	16.6	35.9
PAPA013	13-Apr-14	20	32.0	28.8	21.6	17.3	14.9	52.9
PAPA013	13-Apr-14	21	23.0	22.8	19.6	17.9	16.4	45.4
PAPA013	13-Apr-14	22	39.4	26.2	21.4	19.2	17.3	65.1
PAPA013	13-Apr-14	23	28.7	31.0	25.4	21.8	19.0	45.8
PAPA013	14-Apr-14	0	28.5	30.0	26.9	24.5	22.0	44.8
PAPA013	14-Apr-14	1	26.5	28.7	25.7	23.4	20.4	35.6
PAPA013	14-Apr-14	2	26.9	29.0	26.1	24.2	21.4	35.1
PAPA013	14-Apr-14	3	27.2	29.0	25.9	23.7	21.3	38.5
PAPA013	14-Apr-14	4	29.4	32.0	28.0	25.5	23.4	40.7
PAPA013	14-Apr-14	5	25.1	28.0	24.5	19.1	17.3	33.6
PAPA013	14-Apr-14	6	22.1	23.3	20.8	19.1	17.3	48.0
PAPA013	14-Apr-14	7	24.4	25.6	22.9	17.9	15.7	51.4
PAPA013	14-Apr-14	8	19.0	18.3	16.7	16.0	15.2	37.6
PAPA013	14-Apr-14	9	18.3	18.2	16.6	16.0	15.2	36.7
PAPA013	14-Apr-14	10	17.5	18.4	17.1	16.5	15.7	34.1
PAPA013	14-Apr-14	11	19.6	20.7	19.0	18.0	17.1	33.2
PAPA013	14-Apr-14	12	41.5	25.3	21.8	20.5	18.6	66.4
PAPA013	14-Apr-14	13	25.8	26.0	23.5	21.8	20.5	51.1
PAPA013	10-Apr-15	18	25.1	23.1	20.1	18.7	16.7	53.6
PAPA013	10-Apr-15	19	26.0	28.2	21.8	19.3	17.8	46.0
PAPA013	10-Apr-15	20	27.6	30.4	25.2	22.3	19.3	41.8
PAPA013	10-Apr-15	21	22.9	25.2	22.1	20.1	18.3	29.0
PAPA013	10-Apr-15	22	20.9	22.6	20.6	18.6	16.7	25.0
PAPA013	10-Apr-15	23	27.5	30.1	26.6	23.6	20.1	32.2
PAPA013	11-Apr-15	0	32.5	35.0	31.8	28.3	25.5	38.4
PAPA013	11-Apr-15	1	31.8	33.4	31.4	29.3	26.9	38.5
PAPA013	11-Apr-15	2	35.0	38.1	33.6	29.8	24.7	42.9
PAPA013	11-Apr-15	3	37.5	39.7	37.0	34.2	29.6	45.3
PAPA013	11-Apr-15	4	38.1	41.3	36.7	34.0	31.0	46.9
PAPA013	11-Apr-15	5	37.7	39.5	37.2	34.9	31.9	44.6
PAPA013	11-Apr-15	6	35.3	38.8	33.4	30.9	29.0	42.5
PAPA013	11-Apr-15	7	35.8	36.7	34.5	32.5	30.4	55.8
PAPA013	11-Apr-15	8	34.6	35.5	32.0	25.6	23.1	61.1
PAPA013	11-Apr-15	9	32.3	31.0	27.1	24.8	22.6	53.0
PAPA013	11-Apr-15	10	30.6	27.9	25.8	24.6	23.2	57.8
PAPA013	11-Apr-15	11	33.8	32.6	26.3	23.7	20.9	58.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	11-Apr-15	12	35.2	38.5	31.3	26.4	21.5	51.5
PAPA013	11-Apr-15	13	38.8	42.7	35.5	29.3	23.0	52.2
PAPA013	11-Apr-15	14	36.9	40.2	33.7	27.9	23.5	52.6
PAPA013	11-Apr-15	15	36.7	40.4	32.9	27.1	21.9	52.2
PAPA013	11-Apr-15	16	35.3	38.6	32.1	27.5	23.0	50.8
PAPA013	11-Apr-15	17	34.9	38.1	32.2	27.4	23.6	55.5
PAPA013	11-Apr-15	18	38.2	41.8	35.1	30.0	24.5	53.8
PAPA013	11-Apr-15	19	33.5	37.2	29.8	24.9	20.3	47.5
PAPA013	11-Apr-15	20	30.7	33.6	29.6	25.6	22.4	41.2
PAPA013	11-Apr-15	21	30.3	33.0	29.5	25.2	22.5	37.8
PAPA013	11-Apr-15	22	30.7	32.5	30.2	27.8	23.9	39.0
PAPA013	11-Apr-15	23	27.8	31.3	25.3	22.8	21.4	40.2
PAPA013	12-Apr-15	0	31.1	34.4	29.7	26.3	22.8	39.5
PAPA013	12-Apr-15	1	30.0	33.2	28.3	25.8	24.1	38.2
PAPA013	12-Apr-15	2	28.5	31.8	27.6	19.9	17.0	36.8
PAPA013	12-Apr-15	3	25.3	28.3	23.6	18.5	17.1	38.0
PAPA013	12-Apr-15	4	26.0	29.5	23.3	20.9	18.4	38.5
PAPA013	12-Apr-15	5	30.0	32.5	29.5	25.5	19.8	38.1
PAPA013	12-Apr-15	6	25.9	29.0	24.0	20.8	17.6	38.9
PAPA013	12-Apr-15	7	29.0	28.8	23.0	20.2	17.6	54.6
PAPA013	12-Apr-15	8	30.1	32.2	25.1	21.5	19.6	47.0
PAPA013	12-Apr-15	9	33.1	36.5	30.1	24.4	20.3	48.2
PAPA013	12-Apr-15	10	36.4	35.0	27.7	22.4	18.7	63.9
PAPA013	12-Apr-15	11	28.0	31.1	24.0	21.3	19.3	46.7
PAPA013	12-Apr-15	12	25.9	28.3	23.6	21.4	19.4	46.9
PAPA013	12-Apr-15	13	28.3	30.0	22.9	20.6	18.9	56.4
PAPA013	12-Apr-15	14	25.7	28.0	22.2	20.3	18.8	43.3
PAPA013	12-Apr-15	15	29.8	33.2	25.5	21.6	19.5	47.7
PAPA013	12-Apr-15	16	30.2	33.8	26.5	21.6	19.4	46.7
PAPA013	12-Apr-15	17	30.3	33.8	27.0	22.0	18.6	46.9
PAPA013	12-Apr-15	18	29.2	32.7	26.1	21.5	18.2	42.7
PAPA013	12-Apr-15	19	24.3	26.3	21.7	18.9	17.0	40.7
PAPA013	12-Apr-15	20	21.4	22.5	20.5	18.9	17.4	39.7
PAPA013	12-Apr-15	21	25.8	28.0	25.3	22.8	20.3	31.6
PAPA013	12-Apr-15	22	25.4	28.3	24.2	21.3	19.9	33.7
PAPA013	12-Apr-15	23	27.4	29.0	27.0	24.7	23.2	34.7
PAPA013	13-Apr-15	0	28.5	31.3	27.5	25.3	23.6	34.4
PAPA013	13-Apr-15	1	28.4	30.0	27.7	25.5	22.8	39.1
PAPA013	13-Apr-15	2	26.1	27.6	25.7	23.9	22.4	32.5
PAPA013	13-Apr-15	3	25.9	26.2	23.3	21.3	20.1	44.9
PAPA013	13-Apr-15	4	29.1	31.9	28.6	23.5	21.7	34.8
PAPA013	13-Apr-15	5	29.8	31.6	29.4	27.6	24.6	37.6
PAPA013	13-Apr-15	6	33.6	35.7	32.7	30.0	28.1	51.2
PAPA013	13-Apr-15	7	36.3	38.4	35.5	33.6	31.6	45.7
PAPA013	13-Apr-15	8	34.2	37.3	32.3	25.9	23.3	50.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	13-Apr-15	9	27.6	25.5	21.9	20.2	18.8	48.8
PAPA013	13-Apr-15	10	22.9	24.1	22.4	21.4	20.0	34.9
PAPA013	13-Apr-15	11	24.0	25.3	23.5	22.0	20.3	40.5
PAPA013	13-Apr-15	12	26.4	28.2	24.4	22.8	21.1	47.2
PAPA013	13-Apr-15	13	26.7	27.6	24.1	22.5	20.7	51.4
PAPA013	13-Apr-15	14	26.1	28.3	24.4	22.5	20.1	39.3
PAPA013	13-Apr-15	15	27.7	30.5	24.7	22.2	20.2	45.7
PAPA013	13-Apr-15	16	30.6	33.8	27.0	23.9	20.9	48.2
PAPA013	13-Apr-15	17	31.3	34.6	28.2	23.8	19.3	46.2
PAPA013	13-Apr-15	18	26.7	30.0	23.4	19.3	17.5	41.5
PAPA013	13-Apr-15	19	24.3	28.1	21.5	19.1	17.4	37.1
PAPA013	13-Apr-15	20	29.4	32.5	28.3	21.7	18.5	40.1
PAPA013	13-Apr-15	21	30.4	33.6	28.5	24.9	22.0	39.1
PAPA013	13-Apr-15	22	31.6	34.0	30.7	28.8	27.2	38.7
PAPA013	13-Apr-15	23	31.4	33.6	30.5	28.9	27.7	37.1
PAPA013	14-Apr-15	0	36.2	38.6	35.6	32.1	29.5	42.9
PAPA013	14-Apr-15	1	34.0	36.1	33.6	30.7	28.0	40.0
PAPA013	14-Apr-15	2	33.2	35.0	32.9	30.6	28.3	39.5
PAPA013	14-Apr-15	3	35.2	36.9	35.0	32.8	29.6	41.1
PAPA013	14-Apr-15	4	35.8	37.8	35.3	33.3	31.4	41.6
PAPA013	14-Apr-15	5	37.1	38.7	36.9	34.8	32.3	41.6
PAPA013	14-Apr-15	6	36.8	38.8	36.4	34.4	31.6	42.5
PAPA013	14-Apr-15	7	37.7	40.2	36.9	34.2	31.8	45.8
PAPA013	14-Apr-15	8	35.3	37.5	34.5	32.0	28.8	47.1
PAPA013	14-Apr-15	9	34.9	37.6	33.3	30.5	26.8	47.6
PAPA013	14-Apr-15	10	38.9	42.6	34.9	29.1	25.1	53.1
PAPA013	14-Apr-15	11	45.2	48.5	40.9	34.3	29.5	62.0
PAPA013	14-Apr-15	12	43.6	47.4	39.5	32.5	26.9	62.9
PAPA013	14-Apr-15	13	46.6	50.1	42.4	34.6	27.0	63.7
PAPA013	14-Apr-15	14	46.0	49.8	42.1	35.0	26.6	61.8
PAPA013	14-Apr-15	15	44.4	47.5	38.8	31.1	22.9	62.5
PAPA013	14-Apr-15	16	46.6	49.4	39.2	30.9	25.8	67.0
PAPA013	14-Apr-15	17	42.5	46.6	37.5	28.2	24.4	59.7
PAPA013	02-Apr-16	11	30.8	30.7	27.1	24.9	21.9	51.3
PAPA013	02-Apr-16	12	35.9	33.0	28.4	26.1	23.6	69.0
PAPA013	02-Apr-16	13	31.5	33.8	29.4	27.0	23.9	49.8
PAPA013	02-Apr-16	14	31.7	34.4	30.4	27.0	22.7	45.0
PAPA013	02-Apr-16	15	31.6	34.2	29.5	26.4	22.9	45.2
PAPA013	02-Apr-16	16	29.3	32.5	27.6	24.5	21.6	39.9
PAPA013	02-Apr-16	17	28.8	31.5	27.3	24.5	21.7	43.9
PAPA013	02-Apr-16	18	28.8	31.2	27.6	25.2	21.8	41.8
PAPA013	02-Apr-16	19	31.8	34.9	30.2	26.6	22.6	42.1
PAPA013	02-Apr-16	20	39.7	44.0	36.6	33.3	29.4	50.0
PAPA013	02-Apr-16	21	41.8	45.0	41.3	34.0	30.4	47.5
PAPA013	02-Apr-16	22	38.1	40.2	37.0	33.0	26.7	49.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	02-Apr-16	23	37.7	39.8	37.2	35.0	30.0	44.5
PAPA013	03-Apr-16	0	36.8	39.9	35.5	30.9	27.7	45.8
PAPA013	03-Apr-16	1	39.2	41.3	39.1	35.5	32.7	44.8
PAPA013	03-Apr-16	2	39.5	41.8	38.8	36.4	33.0	44.6
PAPA013	03-Apr-16	3	39.6	42.0	38.9	36.2	32.9	45.7
PAPA013	03-Apr-16	4	39.6	41.8	39.2	36.4	33.9	45.6
PAPA013	03-Apr-16	5	39.5	42.1	38.8	35.5	32.9	44.3
PAPA013	03-Apr-16	6	39.1	40.5	39.1	37.0	34.7	47.8
PAPA013	03-Apr-16	7	37.9	40.3	37.1	34.8	32.6	45.5
PAPA013	03-Apr-16	8	31.6	35.1	28.3	24.7	22.2	49.9
PAPA013	03-Apr-16	9	25.3	26.6	23.6	22.0	20.0	43.1
PAPA013	03-Apr-16	10	27.3	27.8	24.8	22.9	20.4	54.1
PAPA013	03-Apr-16	11	28.7	30.3	26.3	24.0	21.0	53.0
PAPA013	03-Apr-16	12	27.9	30.5	26.8	24.3	21.8	38.4
PAPA013	03-Apr-16	13	32.9	33.8	28.0	23.9	20.4	57.9
PAPA013	03-Apr-16	14	28.1	30.9	26.2	23.2	20.9	44.2
PAPA013	03-Apr-16	15	30.8	33.7	27.6	24.2	20.7	47.7
PAPA013	03-Apr-16	16	27.4	30.3	25.5	22.8	19.7	41.6
PAPA013	03-Apr-16	17	26.2	28.4	24.1	22.0	19.8	42.6
PAPA013	03-Apr-16	18	23.9	25.5	22.1	20.6	18.6	40.8
PAPA013	03-Apr-16	19	24.9	25.0	22.3	20.7	18.5	43.2
PAPA013	03-Apr-16	20	28.7	31.8	28.2	21.8	20.2	35.1
PAPA013	03-Apr-16	21	34.9	39.4	28.2	24.2	22.4	43.8
PAPA013	03-Apr-16	22	34.5	38.7	30.2	26.4	23.1	45.1
PAPA013	03-Apr-16	23	27.9	30.7	26.7	24.0	21.3	36.5
PAPA013	04-Apr-16	0	28.1	29.5	27.9	26.2	24.7	31.9
PAPA013	04-Apr-16	1	28.7	29.7	28.6	27.5	25.4	31.7
PAPA013	04-Apr-16	2	30.5	33.2	29.5	27.6	25.6	38.8
PAPA013	04-Apr-16	3	36.9	39.8	35.5	33.1	30.8	44.3
PAPA013	04-Apr-16	4	38.7	40.3	38.5	35.6	31.5	43.5
PAPA013	04-Apr-16	5	40.5	43.4	40.5	32.9	30.2	46.6
PAPA013	04-Apr-16	6	41.9	45.3	40.1	36.3	34.2	53.4
PAPA013	04-Apr-16	7	42.9	44.6	42.0	38.7	36.7	60.1
PAPA013	04-Apr-16	8	40.8	43.8	40.1	34.1	29.4	50.0
PAPA013	04-Apr-16	9	28.4	30.9	26.9	25.3	23.3	44.8
PAPA013	04-Apr-16	10	29.5	30.0	26.2	24.7	23.2	50.1
PAPA013	04-Apr-16	11	28.8	30.5	26.3	24.3	22.5	46.4
PAPA013	04-Apr-16	12	31.0	31.1	27.2	24.8	22.4	52.2
PAPA013	04-Apr-16	13	33.0	35.7	31.3	28.3	25.0	47.6
PAPA013	04-Apr-16	14	36.1	39.0	33.3	29.2	25.4	51.4
PAPA013	04-Apr-16	15	36.1	39.2	33.3	29.1	25.2	49.7
PAPA013	04-Apr-16	16	43.3	47.2	37.2	31.7	26.8	59.7
PAPA013	04-Apr-16	17	34.9	37.6	33.6	29.9	26.2	47.9
PAPA013	04-Apr-16	18	36.9	39.6	35.1	32.0	26.0	50.7
PAPA013	04-Apr-16	19	30.4	32.4	29.3	27.4	24.7	43.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	04-Apr-16	20	30.9	32.5	30.4	28.9	26.8	41.8
PAPA013	04-Apr-16	21	28.9	30.5	28.5	26.8	24.6	37.0
PAPA013	04-Apr-16	22	33.8	36.6	33.6	27.9	25.8	40.4
PAPA013	04-Apr-16	23	34.9	37.2	34.7	30.3	26.2	41.1
PAPA013	05-Apr-16	0	35.1	37.7	34.7	24.5	19.7	42.2
PAPA013	05-Apr-16	1	28.7	33.2	24.2	21.5	19.3	40.9
PAPA013	05-Apr-16	2	34.3	38.1	32.4	23.5	20.6	43.5
PAPA013	05-Apr-16	3	29.1	31.8	28.1	24.5	19.8	37.4
PAPA013	05-Apr-16	4	29.1	32.0	28.0	22.3	19.6	39.5
PAPA013	05-Apr-16	5	26.9	29.1	26.1	23.7	20.9	41.3
PAPA013	05-Apr-16	6	29.4	31.3	28.6	26.4	22.3	42.7
PAPA013	05-Apr-16	7	27.6	30.4	26.5	23.0	20.2	38.3
PAPA013	05-Apr-16	8	26.9	29.3	25.6	22.2	19.5	43.2
PAPA013	05-Apr-16	9	34.7	38.5	31.5	25.4	20.1	48.7
PAPA013	05-Apr-16	10	40.5	44.2	37.6	30.9	25.3	55.7
PAPA013	05-Apr-16	11	39.8	43.1	36.8	30.7	22.5	55.1
PAPA013	05-Apr-16	12	42.4	46.2	39.4	33.9	28.1	55.0
PAPA013	05-Apr-16	13	38.7	42.6	35.5	29.2	23.7	51.5
PAPA013	05-Apr-16	14	38.4	42.1	35.2	29.5	25.0	51.8
PAPA013	05-Apr-16	15	38.2	41.7	35.2	29.5	23.9	53.1
PAPA013	05-Apr-16	16	41.7	45.4	39.2	33.0	26.4	55.9
PAPA013	05-Apr-16	17	41.5	45.2	39.3	33.4	27.7	53.8
PAPA013	05-Apr-16	18	41.1	44.4	38.2	32.9	28.4	60.3
PAPA013	05-Apr-16	19	37.3	41.2	33.8	27.8	23.0	50.2
PAPA013	05-Apr-16	20	27.2	29.8	24.7	21.6	19.7	43.9
PAPA013	05-Apr-16	21	23.5	25.5	22.7	21.3	19.7	33.7
PAPA013	05-Apr-16	22	25.5	26.6	22.8	20.0	17.7	41.7
PAPA013	05-Apr-16	23	25.2	28.9	22.0	19.6	18.1	34.8
PAPA013	06-Apr-16	0	28.8	32.9	26.7	23.6	20.5	38.2
PAPA013	06-Apr-16	1	24.8	27.9	23.0	20.6	18.4	37.5
PAPA013	06-Apr-16	2	28.5	31.6	27.2	22.5	20.8	36.7
PAPA013	06-Apr-16	3	26.4	27.8	26.2	24.5	22.2	35.0
PAPA013	06-Apr-16	4	31.1	33.7	30.0	26.6	22.5	39.6
PAPA013	11-Apr-16	10	30.8	34.6	25.9	23.5	22.3	53.1
PAPA013	11-Apr-16	11	26.0	25.0	23.5	22.3	20.9	46.4
PAPA013	11-Apr-16	12	31.7	34.7	29.2	22.2	20.0	54.4
PAPA013	11-Apr-16	13	25.8	30.5	22.3	20.8	19.4	36.3
PAPA013	11-Apr-16	14	24.7	26.4	22.8	21.5	20.3	40.8
PAPA013	11-Apr-16	15	29.8	31.9	26.9	23.3	20.2	56.3
PAPA013	11-Apr-16	16	23.5	25.2	21.6	20.4	19.2	38.7
PAPA013	11-Apr-16	17	25.7	27.9	23.4	21.2	19.5	42.5
PAPA013	11-Apr-16	18	27.4	29.9	25.4	22.7	20.8	41.8
PAPA013	11-Apr-16	19	33.0	37.2	28.9	24.1	20.8	52.0
PAPA013	11-Apr-16	20	33.8	37.1	31.9	29.1	25.0	43.2
PAPA013	11-Apr-16	21	39.7	43.6	36.7	30.4	28.5	51.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	11-Apr-16	22	30.0	33.3	28.8	22.8	21.2	36.3
PAPA013	11-Apr-16	23	28.0	29.5	27.8	24.5	21.2	36.0
PAPA013	12-Apr-16	0	37.7	41.4	36.6	27.1	23.9	47.9
PAPA013	12-Apr-16	1	34.9	38.1	33.3	28.7	26.6	42.9
PAPA013	12-Apr-16	2	30.8	33.9	29.6	25.1	22.6	37.5
PAPA013	12-Apr-16	3	32.2	35.7	30.7	25.9	24.4	43.9
PAPA013	12-Apr-16	4	33.3	36.1	32.7	29.1	26.0	38.6
PAPA013	12-Apr-16	5	37.6	40.0	36.7	34.0	30.8	46.7
PAPA013	12-Apr-16	6	47.0	50.1	46.4	37.1	30.2	55.2
PAPA013	12-Apr-16	7	35.7	37.8	35.4	31.9	29.5	45.9
PAPA013	12-Apr-16	8	50.5	37.6	33.4	31.3	28.8	75.5
PAPA013	12-Apr-16	9	31.6	34.7	27.8	24.3	21.5	50.8
PAPA013	12-Apr-16	10	28.4	30.3	25.7	23.9	21.9	47.9
PAPA013	12-Apr-16	11	34.3	36.1	31.9	24.6	20.5	58.8
PAPA013	12-Apr-16	12	31.6	30.9	23.9	21.5	19.6	53.0
PAPA013	12-Apr-16	13	34.0	36.4	30.5	23.0	20.9	56.4
PAPA013	12-Apr-16	14	33.0	35.9	25.3	21.5	19.5	56.0
PAPA013	12-Apr-16	15	29.1	32.4	26.3	24.1	22.0	42.3
PAPA013	12-Apr-16	16	33.0	35.6	31.7	27.1	20.3	50.8
PAPA013	12-Apr-16	17	25.4	26.3	23.3	21.4	20.0	45.0
PAPA013	12-Apr-16	18	32.0	30.9	28.0	23.7	20.6	60.0
PAPA013	12-Apr-16	19	27.1	31.1	23.7	20.5	18.3	42.7
PAPA013	12-Apr-16	20	33.4	38.6	28.8	23.6	20.2	43.8
PAPA013	12-Apr-16	21	36.0	39.2	34.1	28.9	25.2	47.2
PAPA013	12-Apr-16	22	26.6	29.9	24.9	23.4	22.3	35.0
PAPA013	12-Apr-16	23	31.8	35.2	29.1	25.7	23.8	41.0
PAPA013	13-Apr-16	0	30.2	32.0	29.9	28.0	26.8	34.3
PAPA013	13-Apr-16	1	29.9	31.7	29.5	28.1	25.6	35.8
PAPA013	13-Apr-16	2	34.7	37.3	33.4	30.3	28.9	47.3
PAPA013	13-Apr-16	3	35.0	37.8	33.6	30.5	28.2	44.4
PAPA013	13-Apr-16	4	40.7	43.9	38.9	34.1	31.6	50.5
PAPA013	13-Apr-16	5	40.9	43.8	39.7	37.4	35.7	47.9
PAPA013	13-Apr-16	6	44.5	40.6	37.6	34.8	33.0	70.2
PAPA013	13-Apr-16	7	44.4	47.0	40.3	35.6	31.6	65.9
PAPA013	13-Apr-16	8	38.0	37.6	33.6	30.4	27.8	60.6
PAPA013	13-Apr-16	9	37.1	40.7	33.8	25.1	22.8	52.3
PAPA013	13-Apr-16	10	36.2	39.2	34.4	29.0	24.2	52.7
PAPA013	13-Apr-16	11	34.8	38.9	30.9	25.4	23.0	48.7
PAPA013	13-Apr-16	12	40.8	37.0	32.5	27.6	23.8	66.4
PAPA013	13-Apr-16	13	31.1	33.9	30.1	25.9	22.7	41.9
PAPA013	13-Apr-16	14	32.3	32.5	24.9	22.4	20.2	56.6
PAPA013	13-Apr-16	15	33.9	37.2	31.8	27.2	22.5	46.1
PAPA013	13-Apr-16	16	33.1	30.0	25.5	22.9	20.7	59.2
PAPA013	13-Apr-16	17	25.8	27.3	25.1	22.8	20.6	42.1
PAPA013	13-Apr-16	18	25.8	27.2	25.6	22.6	20.4	41.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA013	13-Apr-16	19	24.6	25.5	23.2	21.4	19.3	51.9
PAPA013	13-Apr-16	20	27.0	30.4	24.3	21.9	20.4	38.2
PAPA013	13-Apr-16	21	28.4	31.2	27.3	24.7	22.4	37.4
PAPA013	13-Apr-16	22	33.6	37.2	32.3	24.7	22.4	43.6
PAPA013	13-Apr-16	23	37.0	41.1	31.6	29.3	27.7	50.4
PAPA013	14-Apr-16	0	34.2	37.0	32.9	30.2	27.7	42.4
PAPA013	14-Apr-16	1	34.7	37.6	33.1	30.0	27.1	46.5
PAPA013	14-Apr-16	2	41.6	44.3	40.4	37.1	33.2	52.1
PAPA013	14-Apr-16	3	36.5	38.8	35.8	32.7	28.8	45.2
PAPA013	14-Apr-16	4	40.5	44.0	38.2	33.2	30.5	54.0
PAPA013	14-Apr-16	5	37.3	39.8	35.5	32.2	29.1	48.6
PAPA013	14-Apr-16	6	34.7	37.2	31.7	28.5	26.2	51.1
PAPA013	14-Apr-16	7	32.6	35.1	30.9	29.1	26.4	52.2
PAPA013	14-Apr-16	8	31.1	32.5	29.9	28.2	26.7	49.4
PAPA013	14-Apr-16	9	32.1	34.8	30.6	28.1	25.2	45.0
PAPA013	14-Apr-16	10	41.6	37.2	32.7	30.6	28.3	69.0
PAPA013	14-Apr-16	11	39.1	42.1	37.5	33.9	29.6	50.5
PAPA013	14-Apr-16	12	43.7	45.0	39.9	35.2	32.7	72.2
PAPA013	14-Apr-16	13	38.2	40.8	36.9	33.6	29.9	51.0
PAPA013	14-Apr-16	14	34.1	37.3	31.9	27.7	25.2	46.5
PAPA013	14-Apr-16	15	31.7	34.1	30.2	27.8	23.7	48.5
PAPA013	14-Apr-16	16	29.5	32.5	27.3	23.8	20.4	45.8
PAPA013	14-Apr-16	17	31.3	32.4	29.1	26.8	23.1	52.1
PAPA013	14-Apr-16	18	31.5	35.8	27.0	23.3	21.5	44.0
PAPA013	14-Apr-16	19	35.7	39.3	33.2	26.8	23.3	47.6
PAPA013	14-Apr-16	20	37.1	40.4	34.9	27.3	25.2	53.6
PAPA013	14-Apr-16	21	37.3	41.5	34.6	25.9	22.6	45.5
PAPA013	14-Apr-16	22	34.0	39.0	28.0	24.8	22.9	45.5
PAPA013	14-Apr-16	23	32.5	36.2	31.0	23.3	21.2	40.0
PAPA014	18-Apr-13	12	31.5	35.1	28.9	24.2	20.4	47.3
PAPA014	18-Apr-13	13	33.6	36.9	31.2	26.7	22.6	47.8
PAPA014	18-Apr-13	14	36.0	39.5	33.5	28.8	24.6	49.3
PAPA014	18-Apr-13	15	37.4	40.8	35.0	29.3	25.3	49.9
PAPA014	18-Apr-13	16	39.2	41.4	35.9	30.2	24.8	59.5
PAPA014	18-Apr-13	17	37.0	40.1	34.8	29.8	24.2	51.9
PAPA014	18-Apr-13	18	38.6	42.0	36.5	32.2	26.9	50.9
PAPA014	18-Apr-13	19	40.2	43.3	38.7	34.8	30.4	52.6
PAPA014	18-Apr-13	20	36.1	39.2	34.2	29.7	27.0	49.7
PAPA014	18-Apr-13	21	33.6	36.8	31.4	29.0	26.8	44.2
PAPA014	18-Apr-13	22	34.9	39.0	31.0	28.7	25.0	44.7
PAPA014	18-Apr-13	23	29.8	31.8	29.1	27.2	24.7	38.7
PAPA014	19-Apr-13	0	30.4	31.7	30.2	29.0	26.4	34.5
PAPA014	19-Apr-13	1	31.4	33.0	31.1	29.5	27.3	36.3
PAPA014	19-Apr-13	2	30.7	32.0	30.5	29.0	26.5	36.4
PAPA014	19-Apr-13	3	29.0	30.0	28.9	27.7	25.9	36.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	19-Apr-13	4	30.8	33.3	29.7	27.2	25.6	38.3
PAPA014	19-Apr-13	5	31.9	33.6	30.5	28.9	27.5	46.7
PAPA014	19-Apr-13	6	31.1	32.3	30.8	29.5	27.6	37.8
PAPA014	19-Apr-13	7	31.5	34.4	30.2	28.8	27.3	37.9
PAPA014	19-Apr-13	8	32.2	34.1	29.6	25.5	23.2	50.8
PAPA014	19-Apr-13	9	27.9	28.7	25.8	23.9	21.8	48.7
PAPA014	19-Apr-13	10	26.4	28.4	25.4	23.1	20.7	39.5
PAPA014	19-Apr-13	11	30.4	33.3	26.9	23.3	21.3	47.0
PAPA014	19-Apr-13	12	30.5	34.1	27.4	23.5	20.7	44.2
PAPA014	19-Apr-13	13	37.1	39.2	33.1	28.3	23.6	58.3
PAPA014	19-Apr-13	14	32.2	35.4	30.4	26.0	22.6	43.2
PAPA014	19-Apr-13	15	33.3	35.9	29.6	25.0	20.9	55.0
PAPA014	19-Apr-13	16	30.8	34.3	28.2	23.9	21.1	44.7
PAPA014	19-Apr-13	17	27.9	30.7	25.9	22.9	20.5	39.8
PAPA014	19-Apr-13	18	26.7	29.3	24.9	22.3	19.9	37.4
PAPA014	19-Apr-13	19	25.2	26.4	24.0	22.2	20.0	41.3
PAPA014	19-Apr-13	20	28.0	29.6	27.9	24.0	21.6	38.0
PAPA014	19-Apr-13	21	29.1	30.8	29.2	25.1	22.6	35.2
PAPA014	19-Apr-13	22	32.4	36.5	29.4	25.6	23.7	42.9
PAPA014	19-Apr-13	23	26.7	29.3	25.4	23.3	21.2	35.4
PAPA014	20-Apr-13	0	27.1	30.4	25.0	22.4	19.8	36.4
PAPA014	20-Apr-13	1	31.7	35.6	30.2	26.9	24.9	38.9
PAPA014	20-Apr-13	2	33.9	36.7	33.0	28.9	26.8	41.6
PAPA014	20-Apr-13	3	36.3	37.8	36.0	34.5	32.6	42.4
PAPA014	20-Apr-13	4	37.4	39.2	36.8	35.5	33.9	43.1
PAPA014	20-Apr-13	5	36.0	37.9	35.6	34.0	31.7	41.3
PAPA014	20-Apr-13	6	31.1	32.5	30.9	29.6	27.8	34.5
PAPA014	20-Apr-13	7	30.9	33.7	29.3	27.2	23.1	43.7
PAPA014	20-Apr-13	8	30.9	32.4	28.0	24.1	21.9	45.8
PAPA014	20-Apr-13	9	26.4	29.0	24.8	22.6	20.8	37.7
PAPA014	20-Apr-13	10	28.6	31.6	26.3	23.5	21.2	42.8
PAPA014	20-Apr-13	11	31.0	34.4	28.6	24.3	22.0	46.0
PAPA014	20-Apr-13	12	34.6	38.0	30.7	24.3	21.0	49.2
PAPA014	20-Apr-13	13	30.2	33.6	27.4	23.0	20.9	44.5
PAPA014	20-Apr-13	14	33.3	36.9	30.3	24.8	20.9	47.1
PAPA014	20-Apr-13	15	37.2	41.5	31.9	24.9	21.6	52.5
PAPA014	20-Apr-13	16	36.8	40.2	34.7	28.9	22.7	49.5
PAPA014	20-Apr-13	17	41.4	45.1	37.6	31.8	23.6	55.0
PAPA014	20-Apr-13	18	35.4	38.9	33.2	27.8	23.6	47.4
PAPA014	20-Apr-13	19	30.2	33.6	28.4	24.5	22.2	41.2
PAPA014	20-Apr-13	20	29.9	30.6	28.9	24.5	22.3	51.5
PAPA014	20-Apr-13	21	29.1	30.6	28.7	27.1	25.6	38.5
PAPA014	20-Apr-13	22	31.2	33.7	30.0	27.0	25.4	40.7
PAPA014	20-Apr-13	23	30.2	32.2	29.6	27.8	25.7	38.1
PAPA014	21-Apr-13	0	29.7	30.7	29.5	28.5	26.6	33.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	21-Apr-13	1	29.0	30.2	28.9	27.3	25.0	32.4
PAPA014	21-Apr-13	2	27.8	29.4	27.5	25.8	23.7	35.8
PAPA014	21-Apr-13	3	28.7	29.7	28.6	27.4	26.0	32.6
PAPA014	21-Apr-13	4	28.8	30.1	28.7	27.3	26.0	33.4
PAPA014	21-Apr-13	5	33.0	35.3	32.6	29.7	27.0	38.0
PAPA014	21-Apr-13	6	33.2	35.9	31.5	29.8	28.1	43.6
PAPA014	21-Apr-13	7	31.3	33.9	30.2	28.4	26.8	39.3
PAPA014	21-Apr-13	8	31.1	31.8	25.0	23.1	21.0	52.4
PAPA014	21-Apr-13	9	24.3	25.5	23.3	21.6	19.8	35.4
PAPA014	21-Apr-13	10	32.3	24.5	21.9	20.6	19.0	58.0
PAPA014	21-Apr-13	11	24.2	25.0	22.4	21.0	19.6	43.4
PAPA014	21-Apr-13	12	32.4	27.8	24.2	21.4	19.8	56.8
PAPA014	21-Apr-13	13	32.8	35.5	24.8	21.7	19.9	57.2
PAPA014	21-Apr-13	14	33.3	36.6	30.7	24.6	19.8	47.1
PAPA014	14-Apr-14	13	23.2	23.3	22.6	22.1	21.3	36.2
PAPA014	14-Apr-14	14	25.3	25.6	24.1	23.3	22.4	42.1
PAPA014	14-Apr-14	15	24.8	25.6	24.3	22.8	21.6	35.7
PAPA014	14-Apr-14	16	30.2	27.2	24.2	23.0	21.9	53.8
PAPA014	14-Apr-14	17	24.2	25.4	23.6	22.7	21.9	36.6
PAPA014	14-Apr-14	18	31.2	29.6	25.1	23.3	21.8	50.6
PAPA014	14-Apr-14	19	29.8	33.3	28.5	24.8	23.3	35.4
PAPA014	14-Apr-14	20	32.7	34.3	32.2	30.1	28.2	42.7
PAPA014	14-Apr-14	21	29.7	31.6	29.2	27.6	26.0	41.2
PAPA014	14-Apr-14	22	30.5	32.5	29.9	28.5	27.3	36.9
PAPA014	14-Apr-14	23	32.1	34.0	31.6	30.0	26.9	37.8
PAPA014	15-Apr-14	0	31.6	34.1	30.7	27.2	25.8	39.7
PAPA014	15-Apr-14	1	29.6	31.5	29.2	27.0	25.7	37.4
PAPA014	15-Apr-14	2	28.2	29.5	28.0	26.6	25.6	32.1
PAPA014	15-Apr-14	3	31.1	33.3	30.3	26.8	25.1	41.3
PAPA014	15-Apr-14	4	34.9	36.5	34.5	32.9	28.0	40.4
PAPA014	15-Apr-14	5	35.6	38.5	34.6	31.4	29.3	43.4
PAPA014	15-Apr-14	6	31.4	33.2	30.7	29.0	27.2	44.0
PAPA014	15-Apr-14	7	35.7	38.3	35.0	31.7	28.5	43.6
PAPA014	15-Apr-14	8	32.1	34.7	31.0	28.6	27.3	43.4
PAPA014	15-Apr-14	9	28.4	30.1	27.7	25.0	23.3	41.5
PAPA014	15-Apr-14	10	25.0	26.9	25.2	21.5	21.0	30.4
PAPA014	15-Apr-14	11	22.6	23.7	22.0	21.4	21.0	34.0
PAPA014	15-Apr-14	12	24.2	26.1	22.9	21.9	21.3	38.7
PAPA014	15-Apr-14	13	40.7	45.8	23.4	22.1	21.3	59.2
PAPA014	15-Apr-14	14	48.0	51.3	46.6	40.1	32.3	60.0
PAPA014	15-Apr-14	15	48.1	51.8	46.0	37.4	29.3	63.7
PAPA014	15-Apr-14	16	49.3	52.8	46.9	38.8	31.2	65.2
PAPA014	15-Apr-14	17	47.0	50.4	45.4	38.3	31.6	61.6
PAPA014	15-Apr-14	18	44.6	48.5	39.7	32.8	27.2	62.1
PAPA014	15-Apr-14	19	48.3	51.9	45.7	32.4	24.3	63.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	15-Apr-14	20	43.9	48.4	38.5	29.4	25.5	59.7
PAPA014	15-Apr-14	21	43.4	47.8	38.5	31.2	27.1	56.6
PAPA014	15-Apr-14	22	30.1	31.6	28.2	25.7	23.8	48.4
PAPA014	15-Apr-14	23	28.5	29.4	27.5	26.1	24.2	42.7
PAPA014	16-Apr-14	0	27.7	28.8	27.5	26.4	25.1	32.5
PAPA014	16-Apr-14	1	27.6	28.9	27.3	26.1	24.7	33.8
PAPA014	16-Apr-14	2	28.4	29.9	28.0	26.4	24.5	39.4
PAPA014	16-Apr-14	3	29.1	30.3	28.9	27.3	24.9	37.3
PAPA014	16-Apr-14	4	29.0	30.2	28.8	27.7	26.3	34.6
PAPA014	16-Apr-14	5	29.7	31.0	29.2	27.9	25.8	43.0
PAPA014	16-Apr-14	6	30.3	31.7	30.1	28.7	27.3	35.4
PAPA014	16-Apr-14	7	32.2	35.0	31.1	28.3	26.6	41.7
PAPA014	10-Apr-15	14	41.2	37.6	24.0	19.8	18.1	63.6
PAPA014	10-Apr-15	15	37.8	34.2	21.7	19.3	17.3	63.2
PAPA014	10-Apr-15	16	24.5	26.8	21.5	19.5	17.7	47.1
PAPA014	10-Apr-15	17	29.4	27.0	21.7	19.6	17.9	53.3
PAPA014	10-Apr-15	18	22.6	24.6	22.2	19.9	17.6	31.3
PAPA014	10-Apr-15	19	32.2	34.9	30.6	24.3	20.3	54.1
PAPA014	10-Apr-15	20	29.4	31.3	28.5	26.5	24.5	42.2
PAPA014	10-Apr-15	21	27.5	29.8	26.9	24.7	23.4	36.6
PAPA014	10-Apr-15	22	27.7	30.1	26.5	25.0	23.4	35.6
PAPA014	10-Apr-15	23	29.5	32.1	28.6	24.9	22.5	39.1
PAPA014	11-Apr-15	0	28.6	31.6	27.0	23.1	21.0	39.4
PAPA014	11-Apr-15	1	33.3	36.0	32.0	29.2	26.2	42.1
PAPA014	11-Apr-15	2	31.7	34.8	30.7	26.8	24.6	45.9
PAPA014	11-Apr-15	3	28.5	31.6	26.7	24.8	23.2	37.2
PAPA014	11-Apr-15	4	55.0	60.7	32.0	23.6	22.2	64.9
PAPA014	11-Apr-15	7	39.7	36.5	30.4	27.5	25.3	67.6
PAPA014	11-Apr-15	8	28.0	30.4	26.4	24.8	22.5	45.3
PAPA014	11-Apr-15	9	32.6	31.5	25.0	22.9	20.6	58.3
PAPA014	11-Apr-15	10	31.9	25.5	21.9	20.2	18.7	55.6
PAPA014	11-Apr-15	11	32.8	27.5	22.4	19.7	17.4	54.5
PAPA014	11-Apr-15	12	34.4	38.6	28.0	20.4	18.0	50.4
PAPA014	11-Apr-15	13	43.0	46.5	40.7	34.6	27.6	56.3
PAPA014	11-Apr-15	14	42.8	46.5	40.2	33.4	23.3	56.5
PAPA014	11-Apr-15	15	45.3	48.6	43.4	37.3	31.5	60.2
PAPA014	11-Apr-15	16	45.2	48.9	42.4	35.8	29.2	62.0
PAPA014	11-Apr-15	17	39.0	43.0	36.2	28.3	20.9	53.8
PAPA014	11-Apr-15	18	38.0	41.2	34.8	29.9	24.9	57.1
PAPA014	11-Apr-15	19	35.7	32.6	28.0	25.9	23.1	66.2
PAPA014	11-Apr-15	20	34.2	33.9	28.8	25.8	23.0	55.4
PAPA014	11-Apr-15	21	33.6	36.4	32.6	28.7	25.7	42.3
PAPA014	11-Apr-15	22	37.6	39.9	36.8	34.3	29.2	46.3
PAPA014	11-Apr-15	23	33.6	37.6	27.9	22.5	20.7	47.1
PAPA014	12-Apr-15	0	28.4	27.4	24.3	22.6	21.1	54.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	12-Apr-15	1	21.0	23.0	20.2	18.3	17.0	34.1
PAPA014	12-Apr-15	2	25.4	27.2	24.4	22.4	20.2	43.0
PAPA014	12-Apr-15	3	25.6	28.5	23.8	21.8	19.7	37.7
PAPA014	12-Apr-15	4	30.1	33.7	24.6	22.2	20.4	51.8
PAPA014	12-Apr-15	7	25.0	26.6	24.4	22.4	19.8	37.5
PAPA014	12-Apr-15	8	26.0	28.2	22.7	20.9	18.6	51.0
PAPA014	12-Apr-15	9	31.0	32.5	26.9	23.2	20.6	50.5
PAPA014	12-Apr-15	10	41.6	27.6	23.0	21.0	19.3	64.6
PAPA014	12-Apr-15	11	26.6	27.6	23.2	21.2	19.1	47.9
PAPA014	12-Apr-15	12	29.5	32.9	24.8	20.9	19.0	44.6
PAPA014	12-Apr-15	13	29.1	32.4	25.6	21.7	19.7	44.8
PAPA014	12-Apr-15	14	33.8	36.4	27.8	22.8	19.6	57.5
PAPA014	12-Apr-15	15	32.9	36.1	29.6	24.5	20.1	56.7
PAPA014	12-Apr-15	16	35.7	36.6	28.5	23.2	20.4	61.0
PAPA014	12-Apr-15	17	33.5	37.0	30.2	24.3	21.0	51.2
PAPA014	12-Apr-15	18	33.1	36.8	29.5	24.9	21.9	47.8
PAPA014	12-Apr-15	19	26.7	28.5	25.4	23.6	21.2	42.6
PAPA014	12-Apr-15	20	32.0	33.2	30.3	26.0	24.3	51.0
PAPA014	12-Apr-15	21	30.9	32.9	30.4	28.4	26.2	36.7
PAPA014	12-Apr-15	22	33.7	35.6	33.1	31.1	28.1	43.5
PAPA014	12-Apr-15	23	31.5	33.5	30.9	28.4	26.0	39.9
PAPA014	13-Apr-15	0	27.5	28.9	26.9	25.7	24.0	37.2
PAPA014	13-Apr-15	1	27.5	29.1	27.2	25.4	23.2	32.4
PAPA014	13-Apr-15	2	33.5	35.9	32.7	29.8	26.6	42.3
PAPA014	13-Apr-15	3	32.4	35.7	30.1	27.2	25.3	43.8
PAPA014	13-Apr-15	4	54.2	60.2	29.2	26.4	25.0	64.4
PAPA014	13-Apr-15	7	33.0	33.4	29.9	27.5	25.0	48.1
PAPA014	13-Apr-15	8	32.7	31.3	27.6	24.7	21.1	63.5
PAPA014	13-Apr-15	9	41.3	29.6	23.7	20.2	18.5	63.8
PAPA014	13-Apr-15	10	21.1	22.6	20.5	19.3	18.2	31.1
PAPA014	13-Apr-15	11	23.9	23.6	20.1	18.7	17.5	52.7
PAPA014	01-Apr-16	16	41.6	29.7	23.3	20.7	19.1	70.8
PAPA014	01-Apr-16	17	24.6	26.6	23.5	21.1	18.9	38.8
PAPA014	01-Apr-16	18	24.3	26.1	23.5	21.7	19.2	33.6
PAPA014	01-Apr-16	19	26.4	27.5	25.6	23.4	19.8	40.7
PAPA014	01-Apr-16	20	30.1	32.1	28.0	26.1	24.6	41.5
PAPA014	01-Apr-16	21	31.1	33.4	30.2	28.4	26.3	38.5
PAPA014	01-Apr-16	22	33.4	35.6	32.9	30.1	28.6	40.9
PAPA014	01-Apr-16	23	33.8	36.2	33.0	30.5	28.5	41.1
PAPA014	02-Apr-16	0	30.2	31.3	29.9	29.1	28.0	34.9
PAPA014	02-Apr-16	1	31.1	33.3	30.4	29.0	27.1	36.6
PAPA014	02-Apr-16	2	31.1	32.6	31.0	28.6	27.3	35.4
PAPA014	02-Apr-16	3	30.8	32.8	30.1	28.0	26.7	36.8
PAPA014	02-Apr-16	4	29.4	31.4	28.4	27.0	25.8	37.9
PAPA014	02-Apr-16	5	33.6	35.7	33.2	30.8	28.9	38.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	02-Apr-16	6	32.6	33.9	31.8	30.3	28.5	43.8
PAPA014	02-Apr-16	7	46.8	39.2	34.5	31.7	28.3	67.4
PAPA014	02-Apr-16	8	40.6	29.9	28.0	27.1	25.9	66.2
PAPA014	02-Apr-16	9	44.5	29.2	26.6	24.2	22.9	66.5
PAPA014	02-Apr-16	10	32.6	28.1	24.2	22.8	21.2	58.1
PAPA014	02-Apr-16	11	43.3	24.2	21.9	20.2	18.7	65.0
PAPA014	02-Apr-16	12	26.5	30.3	22.1	19.5	18.5	42.6
PAPA014	02-Apr-16	13	28.9	31.9	24.2	20.2	18.8	51.3
PAPA014	02-Apr-16	14	28.3	31.9	25.2	20.9	18.9	41.4
PAPA014	02-Apr-16	15	36.3	33.2	25.7	22.0	18.8	60.6
PAPA014	02-Apr-16	16	30.2	33.5	27.9	23.6	19.8	43.8
PAPA014	02-Apr-16	17	29.9	32.2	27.0	23.4	21.0	51.7
PAPA014	02-Apr-16	18	30.4	33.1	27.4	24.3	20.7	47.0
PAPA014	02-Apr-16	19	28.0	30.6	26.3	24.0	21.9	45.4
PAPA014	02-Apr-16	20	29.0	30.7	28.5	27.0	25.5	37.0
PAPA014	02-Apr-16	21	27.2	28.5	26.0	25.2	24.0	40.1
PAPA014	02-Apr-16	22	29.8	31.5	29.5	27.5	25.7	37.9
PAPA014	02-Apr-16	23	28.0	29.7	27.5	26.0	25.0	34.6
PAPA014	03-Apr-16	0	30.7	32.0	30.5	29.2	27.6	39.4
PAPA014	03-Apr-16	1	30.6	32.7	29.6	28.1	26.8	38.8
PAPA014	03-Apr-16	2	30.7	32.8	29.8	28.0	25.6	39.0
PAPA014	03-Apr-16	3	29.5	30.5	28.7	27.2	25.4	48.7
PAPA014	03-Apr-16	4	31.5	34.1	30.2	27.8	26.3	41.6
PAPA014	03-Apr-16	5	34.6	38.2	32.0	29.2	27.1	46.8
PAPA014	03-Apr-16	6	33.0	35.9	31.1	28.3	25.7	43.8
PAPA014	03-Apr-16	7	52.1	38.6	31.5	28.6	26.9	69.3
PAPA014	03-Apr-16	8	38.8	34.2	27.4	24.6	22.7	58.5
PAPA014	03-Apr-16	9	31.8	31.2	25.5	24.0	22.2	48.7
PAPA014	03-Apr-16	10	33.1	26.4	22.7	21.0	19.6	54.9
PAPA014	03-Apr-16	11	36.0	31.6	22.4	20.4	19.0	58.9
PAPA014	03-Apr-16	12	43.1	35.2	27.2	23.1	20.6	66.3
PAPA014	03-Apr-16	13	35.7	33.7	27.1	23.2	20.2	59.3
PAPA014	03-Apr-16	14	29.9	32.3	25.5	21.5	19.6	52.6
PAPA014	03-Apr-16	15	35.7	30.9	24.9	21.0	19.1	65.5
PAPA014	03-Apr-16	16	27.2	29.9	25.2	22.9	20.0	39.1
PAPA014	03-Apr-16	17	28.5	30.7	27.0	24.5	22.1	46.2
PAPA014	03-Apr-16	18	28.8	30.7	28.3	26.7	24.3	37.1
PAPA014	03-Apr-16	19	29.6	31.4	29.0	27.4	25.9	41.1
PAPA014	03-Apr-16	20	33.6	33.2	30.7	28.4	26.4	58.8
PAPA014	03-Apr-16	21	29.4	31.8	28.6	24.8	20.8	41.4
PAPA014	03-Apr-16	22	34.5	36.8	33.6	31.2	28.6	45.2
PAPA014	03-Apr-16	23	34.2	36.7	33.5	30.4	28.2	42.4
PAPA014	04-Apr-16	0	36.2	38.5	35.4	33.2	31.0	44.7
PAPA014	04-Apr-16	1	33.2	35.6	32.5	29.8	27.7	41.9
PAPA014	04-Apr-16	2	31.9	34.2	30.9	29.0	27.6	40.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	04-Apr-16	3	33.4	36.4	30.9	28.3	26.9	43.6
PAPA014	04-Apr-16	4	30.4	32.1	29.4	28.3	26.9	40.2
PAPA014	04-Apr-16	5	30.4	33.1	29.2	27.0	24.9	38.8
PAPA014	04-Apr-16	6	37.1	37.4	29.9	27.8	26.3	58.6
PAPA014	04-Apr-16	7	41.3	37.7	34.0	31.4	28.8	64.7
PAPA014	04-Apr-16	8	32.0	33.8	29.8	27.9	23.9	45.4
PAPA014	04-Apr-16	9	34.0	28.8	24.8	23.1	21.8	56.1
PAPA014	04-Apr-16	10	36.1	25.5	23.1	21.6	20.2	59.8
PAPA014	04-Apr-16	11	39.2	26.3	22.0	20.5	18.3	59.9
PAPA014	04-Apr-16	12	36.5	32.2	22.9	19.8	18.3	60.2
PAPA014	04-Apr-16	13	35.9	39.6	31.6	23.1	18.7	53.3
PAPA014	04-Apr-16	14	43.4	48.1	38.4	22.4	18.1	57.0
PAPA014	04-Apr-16	15	32.0	35.4	27.6	22.0	18.6	52.2
PAPA014	04-Apr-16	16	57.7	40.4	25.1	19.9	17.4	90.5
PAPA014	04-Apr-16	17	32.6	36.5	24.1	18.5	17.5	52.8
PAPA014	04-Apr-16	18	38.7	43.2	32.5	25.4	20.1	52.8
PAPA014	04-Apr-16	19	31.5	34.3	30.7	25.8	22.2	41.6
PAPA014	04-Apr-16	20	33.9	36.1	32.8	30.6	27.4	54.8
PAPA014	04-Apr-16	21	32.9	35.1	32.2	30.2	28.0	40.6
PAPA014	04-Apr-16	22	32.9	35.2	32.1	29.6	27.5	40.3
PAPA014	04-Apr-16	23	28.2	31.8	25.5	20.8	18.2	39.6
PAPA014	05-Apr-16	0	32.4	35.2	27.7	23.8	18.0	49.5
PAPA014	05-Apr-16	1	32.4	35.7	27.3	24.7	20.6	49.7
PAPA014	05-Apr-16	2	26.1	28.8	24.0	22.1	20.2	41.6
PAPA014	05-Apr-16	3	29.5	31.8	28.8	24.9	22.1	47.1
PAPA014	05-Apr-16	4	29.3	31.5	28.5	26.5	24.4	38.0
PAPA014	05-Apr-16	5	28.6	30.4	28.2	26.6	24.0	35.3
PAPA014	05-Apr-16	6	29.5	29.5	26.3	24.2	22.3	49.3
PAPA014	05-Apr-16	7	29.0	29.1	26.9	24.6	22.4	48.5
PAPA014	05-Apr-16	8	41.4	35.4	27.5	23.7	21.3	68.3
PAPA014	05-Apr-16	9	41.5	44.9	39.5	34.0	25.8	55.4
PAPA014	05-Apr-16	10	40.7	43.6	37.5	31.3	25.4	59.8
PAPA014	05-Apr-16	11	41.1	44.7	39.0	33.2	26.3	53.6
PAPA014	05-Apr-16	12	42.9	46.4	40.1	33.2	27.7	56.3
PAPA014	05-Apr-16	13	43.2	44.4	37.9	31.9	24.8	64.0
PAPA014	05-Apr-16	14	38.1	41.6	35.7	29.4	24.9	53.7
PAPA014	05-Apr-16	15	42.0	45.9	39.3	31.3	24.9	55.5
PAPA014	05-Apr-16	16	42.5	46.0	40.5	35.1	28.6	53.6
PAPA014	05-Apr-16	17	41.2	44.4	39.4	33.8	27.9	53.8
PAPA014	05-Apr-16	18	39.2	42.6	37.0	31.3	26.4	52.1
PAPA014	05-Apr-16	19	33.6	37.3	30.3	23.2	20.6	49.1
PAPA014	05-Apr-16	20	27.3	30.0	25.9	23.4	21.6	39.7
PAPA014	05-Apr-16	21	25.2	26.6	24.6	23.5	22.1	34.4
PAPA014	05-Apr-16	22	27.1	28.5	26.5	25.3	23.8	36.2
PAPA014	05-Apr-16	23	28.1	29.8	27.6	26.0	24.2	34.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	06-Apr-16	0	28.8	30.1	28.7	26.9	25.1	33.6
PAPA014	06-Apr-16	1	28.8	30.4	28.3	27.0	25.0	35.2
PAPA014	06-Apr-16	2	33.1	36.2	32.0	26.7	25.3	45.5
PAPA014	06-Apr-16	3	31.2	33.6	30.4	28.5	25.8	38.5
PAPA014	06-Apr-16	4	26.9	28.2	26.6	25.5	23.8	30.4
PAPA014	06-Apr-16	5	31.0	33.1	30.5	27.5	25.5	37.3
PAPA014	06-Apr-16	6	38.4	35.1	30.4	28.6	27.0	59.5
PAPA014	06-Apr-16	7	41.1	33.4	29.6	28.0	26.3	64.1
PAPA014	06-Apr-16	8	32.0	35.1	29.3	26.6	24.2	45.4
PAPA014	06-Apr-16	9	39.9	32.6	28.2	25.9	23.3	68.9
PAPA014	06-Apr-16	10	27.9	30.0	26.2	24.3	22.0	43.1
PAPA014	06-Apr-16	11	36.4	33.5	26.6	23.4	21.3	59.8
PAPA014	06-Apr-16	12	36.0	39.5	32.8	27.3	23.3	50.6
PAPA014	06-Apr-16	13	40.8	44.3	38.7	32.8	26.6	55.5
PAPA014	06-Apr-16	14	42.6	46.2	40.4	34.8	29.2	53.8
PAPA014	06-Apr-16	15	41.5	45.2	39.0	32.8	25.4	55.6
PAPA014	06-Apr-16	16	38.3	42.6	34.0	27.9	24.2	50.8
PAPA014	06-Apr-16	17	37.7	41.0	36.0	30.8	25.7	47.7
PAPA014	06-Apr-16	18	38.7	42.3	36.6	29.2	23.2	50.0
PAPA014	06-Apr-16	19	31.5	35.0	28.8	25.5	23.2	44.2
PAPA014	06-Apr-16	20	29.6	28.7	27.0	25.2	24.0	51.4
PAPA014	06-Apr-16	21	28.5	31.4	26.8	24.2	22.4	37.3
PAPA014	06-Apr-16	22	26.6	28.6	25.5	24.7	23.5	36.3
PAPA014	06-Apr-16	23	24.9	25.9	24.7	23.5	22.1	33.3
PAPA014	07-Apr-16	0	26.8	28.7	26.1	24.9	23.0	32.1
PAPA014	07-Apr-16	1	25.4	26.4	25.2	24.1	22.7	30.5
PAPA014	07-Apr-16	2	29.2	31.5	28.1	26.4	24.7	38.0
PAPA014	07-Apr-16	3	33.5	35.5	33.0	30.8	28.4	42.3
PAPA014	07-Apr-16	4	34.7	36.7	34.1	32.2	29.7	41.7
PAPA014	07-Apr-16	5	33.9	35.8	33.4	31.6	29.2	40.2
PAPA014	07-Apr-16	6	49.6	48.4	35.9	32.0	28.7	70.5
PAPA014	07-Apr-16	7	51.1	42.4	31.3	27.5	25.1	71.8
PAPA014	07-Apr-16	8	35.7	35.3	29.6	26.6	24.8	55.3
PAPA014	07-Apr-16	9	37.9	40.3	34.7	30.6	27.4	57.0
PAPA014	07-Apr-16	10	41.1	43.3	35.6	30.5	26.3	64.0
PAPA014	07-Apr-16	11	38.0	37.6	29.9	26.0	23.0	54.4
PAPA014	07-Apr-16	12	45.4	39.9	31.3	26.8	22.8	65.8
PAPA014	07-Apr-16	13	37.3	38.7	31.8	26.7	23.6	57.9
PAPA014	07-Apr-16	14	40.4	35.5	29.5	25.3	22.2	68.0
PAPA014	07-Apr-16	15	33.2	35.3	29.0	24.8	21.2	56.1
PAPA014	07-Apr-16	16	33.4	35.2	29.0	25.4	22.0	53.0
PAPA014	07-Apr-16	17	32.3	35.5	30.1	26.3	23.0	45.7
PAPA014	07-Apr-16	18	33.2	36.3	31.2	28.2	25.3	44.2
PAPA014	07-Apr-16	19	31.2	33.2	30.5	28.5	25.9	43.0
PAPA014	07-Apr-16	20	33.8	35.7	33.2	31.3	29.1	41.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	07-Apr-16	21	31.7	35.0	30.0	27.5	25.8	41.9
PAPA014	07-Apr-16	22	29.8	32.2	28.9	26.9	24.3	39.4
PAPA014	07-Apr-16	23	26.8	28.5	26.4	24.7	22.3	40.8
PAPA014	08-Apr-16	0	28.7	30.3	27.6	25.3	24.0	50.2
PAPA014	08-Apr-16	1	26.8	29.2	25.6	23.9	22.5	36.1
PAPA014	08-Apr-16	2	32.0	34.0	31.1	29.0	27.2	42.8
PAPA014	08-Apr-16	3	30.8	33.0	30.2	27.8	25.9	39.1
PAPA014	08-Apr-16	4	31.2	33.5	30.7	25.6	22.9	39.1
PAPA014	08-Apr-16	5	28.4	28.9	24.7	23.9	22.9	47.5
PAPA014	08-Apr-16	6	49.8	47.8	34.0	29.9	26.6	69.2
PAPA014	08-Apr-16	7	52.8	57.9	34.4	28.8	25.7	76.3
PAPA014	08-Apr-16	8	37.1	32.5	27.9	25.9	23.9	61.8
PAPA014	08-Apr-16	9	39.6	29.1	25.5	24.3	23.0	60.2
PAPA014	08-Apr-16	10	46.3	50.7	22.5	20.2	18.8	64.4
PAPA014	08-Apr-16	11	38.4	23.0	20.6	19.3	18.4	64.7
PAPA014	08-Apr-16	12	43.3	39.4	21.1	19.5	18.4	67.3
PAPA014	08-Apr-16	13	30.6	28.6	22.0	19.6	18.5	52.7
PAPA014	08-Apr-16	14	27.3	27.0	21.6	19.4	18.1	50.6
PAPA014	08-Apr-16	15	26.3	27.9	22.4	19.7	18.3	49.2
PAPA014	08-Apr-16	16	24.8	26.0	22.3	20.0	18.5	44.1
PAPA014	08-Apr-16	17	25.5	25.8	22.8	19.9	18.1	50.5
PAPA014	08-Apr-16	18	23.2	24.2	22.4	21.1	19.4	37.4
PAPA014	08-Apr-16	19	24.8	26.5	24.0	22.4	20.5	34.1
PAPA014	08-Apr-16	20	26.3	27.0	24.1	23.0	21.6	43.1
PAPA014	08-Apr-16	21	27.5	28.8	27.2	25.9	24.4	39.9
PAPA014	08-Apr-16	22	29.2	30.5	28.9	27.6	26.0	34.2
PAPA014	08-Apr-16	23	29.7	31.2	29.3	27.7	26.2	41.5
PAPA014	09-Apr-16	0	28.4	29.7	28.2	26.9	25.2	36.6
PAPA014	09-Apr-16	1	29.0	30.5	28.6	27.1	26.0	38.5
PAPA014	09-Apr-16	2	28.3	29.8	28.1	26.6	25.5	36.3
PAPA014	09-Apr-16	3	29.7	30.8	29.5	28.2	26.6	39.7
PAPA014	09-Apr-16	4	30.0	31.3	29.5	28.3	26.7	41.2
PAPA014	09-Apr-16	5	33.4	35.5	32.0	29.6	27.2	45.9
PAPA014	09-Apr-16	6	37.3	38.5	33.3	30.7	28.3	56.7
PAPA014	09-Apr-16	7	34.1	36.3	32.6	28.5	26.6	53.1
PAPA014	09-Apr-16	8	42.4	27.8	24.8	23.8	22.3	65.2
PAPA014	09-Apr-16	9	47.8	29.9	24.5	22.9	20.6	66.9
PAPA014	09-Apr-16	10	42.9	36.7	23.0	21.1	19.2	63.8
PAPA014	09-Apr-16	11	38.9	33.1	23.5	20.8	19.1	63.0
PAPA014	09-Apr-16	12	27.3	30.6	23.0	19.8	18.4	42.9
PAPA014	09-Apr-16	13	39.5	35.2	26.6	22.0	19.4	63.6
PAPA014	09-Apr-16	14	30.2	33.0	26.0	21.7	19.4	47.5
PAPA014	09-Apr-16	15	30.0	33.3	26.4	22.4	19.6	50.5
PAPA014	09-Apr-16	16	31.3	34.4	27.1	22.7	19.4	52.3
PAPA014	09-Apr-16	17	27.0	29.9	24.7	22.7	21.2	41.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA014	09-Apr-16	18	30.8	31.2	25.1	22.3	20.1	54.0
PAPA014	09-Apr-16	19	28.7	31.6	25.9	23.5	20.7	46.7
PAPA014	09-Apr-16	20	25.8	27.2	23.8	21.7	19.9	42.1
PAPA014	09-Apr-16	21	24.2	25.5	23.6	22.6	21.7	34.7
PAPA014	09-Apr-16	22	29.3	31.1	26.4	24.6	22.8	46.9
PAPA014	09-Apr-16	23	24.2	25.5	23.7	22.7	21.5	32.9
PAPA014	10-Apr-16	0	29.8	33.5	27.4	22.9	20.6	42.0
PAPA014	10-Apr-16	1	31.4	33.6	30.7	28.4	26.6	38.4
PAPA014	10-Apr-16	2	33.2	35.9	32.3	28.7	26.5	40.7
PAPA014	10-Apr-16	3	30.0	32.4	29.2	26.8	24.9	37.8
PAPA014	10-Apr-16	4	29.4	32.6	27.9	26.2	24.3	37.1
PAPA014	10-Apr-16	5	27.3	28.5	27.2	25.9	23.6	30.8
PAPA014	10-Apr-16	6	34.0	37.8	31.4	27.1	24.8	45.4
PAPA014	10-Apr-16	7	47.2	37.0	29.3	26.4	24.1	71.0
PAPA014	10-Apr-16	8	40.0	36.3	28.3	24.6	19.5	61.5
PAPA014	10-Apr-16	9	33.7	38.5	28.4	25.3	23.2	47.4
PAPA014	10-Apr-16	10	37.7	39.2	27.7	24.4	22.7	60.7
PAPA014	10-Apr-16	11	35.0	30.7	25.6	23.7	21.4	61.8
PAPA014	10-Apr-16	12	43.9	40.9	22.9	21.1	19.2	67.0
PAPA014	10-Apr-16	13	23.3	23.8	20.9	19.2	18.2	44.8
PAPA014	10-Apr-16	14	28.2	27.9	22.6	20.4	18.8	57.0
PAPA014	10-Apr-16	15	36.3	31.9	23.6	20.7	18.8	60.2
PAPA014	10-Apr-16	16	32.9	28.8	21.9	19.8	18.4	65.7
PAPA014	10-Apr-16	17	32.7	36.2	30.0	25.4	21.2	46.7
PAPA014	10-Apr-16	18	30.9	32.1	27.8	24.6	22.2	54.7
PAPA014	10-Apr-16	19	29.9	33.1	27.8	24.2	21.8	48.4
PAPA014	10-Apr-16	20	28.8	31.1	27.3	25.5	23.8	51.5
PAPA014	10-Apr-16	21	27.1	28.8	26.7	24.8	22.6	34.8
PAPA014	10-Apr-16	22	26.2	27.7	25.7	24.4	22.7	36.2
PAPA014	10-Apr-16	23	29.8	32.1	29.3	26.2	23.2	37.1
PAPA014	11-Apr-16	0	28.9	31.0	28.2	26.5	24.9	35.6
PAPA014	11-Apr-16	1	26.4	28.6	25.5	24.1	22.6	36.7
PAPA014	11-Apr-16	2	29.7	31.6	29.1	27.4	25.3	37.3
PAPA014	11-Apr-16	3	29.4	31.5	28.9	26.4	25.0	35.7
PAPA014	11-Apr-16	4	28.1	30.3	27.8	25.1	23.5	34.2
PAPA014	11-Apr-16	5	30.7	30.0	26.8	24.8	23.6	48.7
PAPA014	11-Apr-16	6	49.1	44.3	33.4	26.6	24.1	66.7
PAPA014	11-Apr-16	7	41.3	38.9	34.1	27.5	24.2	60.4
PAPA014	11-Apr-16	8	48.4	54.2	23.9	22.4	20.9	62.2
PAPA014	11-Apr-16	9	43.9	42.4	21.3	19.5	18.4	61.1
PAPA014	11-Apr-16	10	29.6	26.9	20.9	19.5	18.5	53.2
PAPA014	11-Apr-16	11	23.1	23.5	21.3	20.0	18.6	43.1
PAPA014	11-Apr-16	12	25.9	27.4	21.7	19.8	17.9	54.6
PAPA014	11-Apr-16	13	24.5	26.4	21.8	19.5	18.5	43.0
PAPA014	11-Apr-16	14	32.9	37.4	24.0	20.1	18.5	47.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	21-Apr-13	12	23.9	24.8	19.0	17.2	16.1	49.3
PAPA015	21-Apr-13	13	29.6	31.3	21.4	16.8	15.9	51.9
PAPA015	21-Apr-13	14	32.2	34.9	25.0	17.8	16.1	53.6
PAPA015	21-Apr-13	15	32.4	35.5	26.7	19.6	16.2	51.9
PAPA015	21-Apr-13	16	32.3	36.0	27.7	20.5	16.2	49.3
PAPA015	21-Apr-13	17	36.4	40.3	31.4	21.5	15.9	52.2
PAPA015	21-Apr-13	18	36.2	40.4	28.9	18.7	15.7	55.6
PAPA015	21-Apr-13	19	27.5	31.5	21.5	16.8	15.3	44.7
PAPA015	21-Apr-13	20	26.5	30.3	21.7	17.1	14.7	41.4
PAPA015	21-Apr-13	21	18.9	19.2	15.2	14.4	14.1	38.4
PAPA015	21-Apr-13	22	19.6	19.2	15.9	14.7	14.1	38.5
PAPA015	21-Apr-13	23	21.5	17.5	15.5	14.7	14.2	41.7
PAPA015	22-Apr-13	0	14.7	15.3	14.7	14.1	13.9	21.9
PAPA015	22-Apr-13	1	24.7	27.3	17.0	15.6	14.4	44.1
PAPA015	22-Apr-13	2	26.3	29.6	17.2	14.7	14.4	48.6
PAPA015	22-Apr-13	3	23.4	26.9	21.2	16.2	15.4	35.5
PAPA015	22-Apr-13	4	24.5	26.2	24.0	21.6	17.6	42.2
PAPA015	22-Apr-13	5	24.4	27.0	22.8	20.0	17.0	36.8
PAPA015	22-Apr-13	6	19.7	22.4	18.0	16.2	15.0	34.6
PAPA015	22-Apr-13	7	24.0	22.6	17.3	14.9	14.6	46.6
PAPA015	22-Apr-13	8	29.6	33.3	24.3	18.5	15.8	47.1
PAPA015	22-Apr-13	9	25.5	29.3	20.5	16.6	15.1	40.3
PAPA015	22-Apr-13	10	22.2	24.8	18.3	16.1	15.4	43.1
PAPA015	22-Apr-13	11	38.4	43.5	31.1	23.0	18.4	50.9
PAPA015	22-Apr-13	12	31.4	34.7	28.8	24.2	20.1	44.5
PAPA015	22-Apr-13	13	30.3	33.7	27.7	23.6	20.3	43.7
PAPA015	22-Apr-13	14	29.3	32.8	27.1	22.3	18.2	41.7
PAPA015	22-Apr-13	15	30.2	33.6	27.0	21.7	17.6	46.2
PAPA015	22-Apr-13	16	24.3	28.1	21.3	17.6	15.6	36.4
PAPA015	22-Apr-13	17	28.4	27.2	17.2	15.7	15.0	49.9
PAPA015	22-Apr-13	18	18.5	20.3	16.5	15.5	15.0	33.3
PAPA015	22-Apr-13	19	19.6	20.8	18.8	16.7	16.0	34.7
PAPA015	22-Apr-13	20	23.6	23.0	17.2	15.5	15.0	42.0
PAPA015	22-Apr-13	21	19.5	21.3	15.2	14.4	14.1	35.7
PAPA015	22-Apr-13	22	21.3	19.8	15.8	15.1	14.4	41.4
PAPA015	22-Apr-13	23	17.3	16.5	15.4	14.9	14.6	32.7
PAPA015	23-Apr-13	0	23.8	19.1	15.9	15.0	14.6	44.6
PAPA015	23-Apr-13	1	18.9	17.3	15.8	15.0	14.5	36.5
PAPA015	23-Apr-13	2	16.6	17.9	16.1	15.1	13.9	26.3
PAPA015	23-Apr-13	3	14.7	15.7	14.5	14.0	13.8	20.2
PAPA015	23-Apr-13	4	28.0	18.9	14.2	13.9	13.8	50.0
PAPA015	23-Apr-13	5	15.9	17.3	15.0	14.3	13.9	27.2
PAPA015	23-Apr-13	6	15.2	15.8	14.5	14.1	13.8	33.7
PAPA015	23-Apr-13	7	17.0	18.7	15.4	14.5	14.0	30.7
PAPA015	23-Apr-13	8	17.2	18.1	16.1	15.5	14.9	30.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	23-Apr-13	9	18.4	20.3	17.0	16.0	15.4	33.6
PAPA015	23-Apr-13	10	24.7	28.9	16.4	15.3	14.9	45.1
PAPA015	23-Apr-13	11	19.5	21.8	17.5	16.0	15.3	36.6
PAPA015	23-Apr-13	12	29.4	20.9	17.8	15.4	14.9	49.9
PAPA015	10-Apr-14	12	32.1	36.0	27.4	19.4	15.9	50.0
PAPA015	10-Apr-14	13	32.6	36.5	27.1	20.1	15.2	51.1
PAPA015	10-Apr-14	14	31.8	35.9	26.8	20.3	16.2	49.2
PAPA015	10-Apr-14	15	34.4	37.9	30.1	20.0	15.6	53.5
PAPA015	10-Apr-14	16	36.2	39.7	32.8	26.0	19.8	54.2
PAPA015	10-Apr-14	17	31.5	35.3	26.9	20.6	16.4	47.0
PAPA015	10-Apr-14	18	30.1	33.6	26.8	21.4	16.5	47.0
PAPA015	10-Apr-14	19	21.6	24.6	15.8	14.2	13.8	42.7
PAPA015	10-Apr-14	20	16.4	16.7	14.5	14.1	13.8	40.8
PAPA015	10-Apr-14	21	20.7	15.6	14.1	13.8	13.6	42.7
PAPA015	10-Apr-14	22	28.2	21.5	15.6	13.9	13.7	52.3
PAPA015	10-Apr-14	23	20.6	22.0	20.5	18.8	17.1	29.0
PAPA015	11-Apr-14	0	20.5	21.9	20.2	18.6	17.1	24.2
PAPA015	11-Apr-14	1	20.9	22.8	20.4	18.3	16.8	25.3
PAPA015	11-Apr-14	2	18.1	19.9	18.0	15.2	14.4	21.5
PAPA015	11-Apr-14	3	17.8	19.5	17.4	15.8	15.0	22.8
PAPA015	11-Apr-14	4	18.2	19.5	18.0	16.7	15.7	24.4
PAPA015	11-Apr-14	5	20.4	21.9	19.5	18.2	16.7	39.0
PAPA015	11-Apr-14	6	36.2	26.9	21.4	19.1	17.5	59.8
PAPA015	11-Apr-14	7	24.1	26.6	21.3	19.4	17.7	38.3
PAPA015	11-Apr-14	8	24.0	27.0	20.2	18.2	16.7	37.7
PAPA015	11-Apr-14	9	32.8	32.2	22.1	18.7	17.1	56.2
PAPA015	11-Apr-14	10	20.2	21.4	17.7	16.2	15.5	39.8
PAPA015	11-Apr-14	11	33.3	23.4	17.2	15.9	15.1	62.0
PAPA015	11-Apr-14	12	34.9	30.8	20.0	15.9	15.2	59.0
PAPA015	11-Apr-14	13	30.8	34.2	24.8	17.6	15.5	50.0
PAPA015	11-Apr-14	14	33.3	36.8	27.9	19.4	15.9	51.9
PAPA015	11-Apr-14	15	36.7	40.0	32.4	25.0	18.0	56.4
PAPA015	11-Apr-14	16	37.6	41.3	33.6	27.6	20.5	51.5
PAPA015	11-Apr-14	17	37.4	41.0	34.8	28.6	22.5	49.9
PAPA015	11-Apr-14	18	35.2	38.7	32.8	26.7	19.2	46.9
PAPA015	11-Apr-14	19	33.1	34.5	22.5	14.6	13.8	57.5
PAPA015	11-Apr-14	20	14.8	15.3	14.5	13.9	13.7	24.0
PAPA015	11-Apr-14	21	18.2	15.9	14.7	13.9	13.6	38.4
PAPA015	11-Apr-14	22	16.7	17.5	14.1	13.8	13.5	39.6
PAPA015	11-Apr-14	23	15.2	15.7	14.1	13.8	13.6	33.8
PAPA015	12-Apr-14	0	15.7	16.5	14.2	13.8	13.5	38.0
PAPA015	12-Apr-14	1	21.7	17.8	14.5	13.8	13.6	42.4
PAPA015	12-Apr-14	2	18.6	15.2	13.9	13.7	13.5	40.8
PAPA015	12-Apr-14	3	17.1	17.7	16.5	14.5	13.7	37.5
PAPA015	12-Apr-14	4	18.5	19.4	18.3	17.2	16.2	24.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	12-Apr-14	5	21.9	23.4	19.2	17.2	15.8	41.8
PAPA015	12-Apr-14	6	25.1	26.6	20.9	18.3	16.2	46.8
PAPA015	12-Apr-14	7	24.4	28.9	18.9	16.9	15.3	37.4
PAPA015	11-Apr-15	12	33.2	37.5	26.8	18.2	16.2	47.2
PAPA015	11-Apr-15	13	39.9	43.9	36.5	28.2	18.4	53.4
PAPA015	11-Apr-15	14	38.2	41.9	33.4	26.0	19.6	54.7
PAPA015	11-Apr-15	15	40.4	44.3	36.7	28.4	21.7	53.5
PAPA015	11-Apr-15	16	41.1	45.1	37.3	29.2	20.9	57.8
PAPA015	11-Apr-15	17	44.7	48.4	40.9	32.4	22.7	60.1
PAPA015	11-Apr-15	18	37.2	40.8	32.5	24.8	19.4	55.0
PAPA015	11-Apr-15	19	28.8	32.0	25.8	20.8	17.4	43.7
PAPA015	11-Apr-15	20	27.6	31.9	22.1	17.2	16.1	44.5
PAPA015	11-Apr-15	21	20.5	23.0	18.0	16.1	15.4	38.1
PAPA015	11-Apr-15	22	16.7	17.4	16.0	15.5	15.2	32.7
PAPA015	11-Apr-15	23	20.6	18.5	16.3	15.6	15.2	39.4
PAPA015	12-Apr-15	0	16.5	17.2	15.6	15.0	14.8	31.3
PAPA015	12-Apr-15	1	16.6	18.0	15.7	15.1	14.8	28.6
PAPA015	12-Apr-15	2	16.7	17.7	16.0	15.1	14.9	28.6
PAPA015	12-Apr-15	3	21.7	24.7	16.3	15.0	14.8	37.7
PAPA015	12-Apr-15	4	26.6	29.4	18.8	15.7	14.9	43.4
PAPA015	12-Apr-15	5	28.0	31.7	23.0	17.5	14.9	43.7
PAPA015	12-Apr-15	6	22.1	25.4	19.1	15.3	14.9	37.5
PAPA015	12-Apr-15	7	29.2	23.2	17.3	15.7	15.2	59.7
PAPA015	12-Apr-15	8	27.8	29.5	22.4	18.1	16.2	51.7
PAPA015	12-Apr-15	9	41.0	35.3	27.1	20.9	17.5	70.4
PAPA015	12-Apr-15	10	27.4	30.8	22.4	17.5	16.0	44.0
PAPA015	12-Apr-15	11	26.6	28.1	19.4	17.0	16.2	52.1
PAPA015	12-Apr-15	12	35.2	31.7	21.5	17.1	16.4	58.3
PAPA015	12-Apr-15	13	29.0	32.5	22.5	16.9	16.2	48.8
PAPA015	12-Apr-15	14	32.6	35.6	26.3	19.6	16.8	49.9
PAPA015	12-Apr-15	15	32.9	36.5	28.6	21.4	17.2	50.8
PAPA015	12-Apr-15	16	32.9	36.7	28.0	20.3	16.9	51.0
PAPA015	12-Apr-15	17	31.8	35.9	27.1	19.7	15.9	46.4
PAPA015	12-Apr-15	18	29.4	32.8	24.4	18.6	16.0	52.7
PAPA015	12-Apr-15	19	21.3	24.2	18.4	16.1	15.4	36.7
PAPA015	12-Apr-15	20	22.5	25.8	18.7	16.0	15.2	37.8
PAPA015	12-Apr-15	21	20.0	22.3	17.0	15.5	15.0	36.0
PAPA015	12-Apr-15	22	15.5	16.1	15.1	14.9	14.7	28.4
PAPA015	12-Apr-15	23	20.3	19.8	14.9	14.8	14.6	37.7
PAPA015	13-Apr-15	0	14.9	15.1	14.9	14.8	14.7	19.5
PAPA015	13-Apr-15	1	15.1	15.4	14.9	14.8	14.6	21.2
PAPA015	13-Apr-15	2	15.5	16.0	15.3	15.1	14.9	20.8
PAPA015	13-Apr-15	3	15.7	16.4	15.5	15.2	15.0	21.6
PAPA015	13-Apr-15	4	19.3	21.6	18.6	15.9	15.3	29.8
PAPA015	13-Apr-15	5	26.5	26.2	21.9	17.7	16.0	47.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	13-Apr-15	6	28.1	26.3	22.9	20.3	16.9	47.6
PAPA015	13-Apr-15	7	28.8	25.0	23.3	22.1	20.7	59.5
PAPA015	13-Apr-15	8	32.3	29.1	24.9	21.1	17.5	54.1
PAPA015	13-Apr-15	9	24.0	21.9	19.1	16.9	15.8	46.3
PAPA015	13-Apr-15	10	22.0	24.2	20.9	19.1	17.7	37.9
PAPA015	13-Apr-15	11	20.8	22.6	18.1	16.5	15.9	40.7
PAPA015	13-Apr-15	12	21.1	24.1	17.6	16.3	15.9	37.1
PAPA015	13-Apr-15	13	25.1	27.4	19.0	16.8	16.3	41.6
PAPA015	11-Apr-16	13	23.7	24.3	17.9	16.9	16.3	50.0
PAPA015	11-Apr-16	14	33.9	34.6	25.1	16.8	16.3	60.2
PAPA015	11-Apr-16	15	34.3	32.8	22.8	18.0	16.8	55.9
PAPA015	11-Apr-16	16	20.6	21.7	17.4	16.4	15.9	39.3
PAPA015	11-Apr-16	17	25.8	27.3	18.1	15.8	15.6	45.4
PAPA015	11-Apr-16	18	40.1	34.7	18.7	15.9	15.4	59.2
PAPA015	11-Apr-16	19	40.5	41.1	17.3	16.0	15.5	70.0
PAPA015	11-Apr-16	20	20.7	22.3	18.0	15.4	15.2	38.4
PAPA015	11-Apr-16	21	20.2	19.3	15.8	15.4	15.2	38.4
PAPA015	11-Apr-16	22	24.5	19.4	17.1	16.2	15.8	48.6
PAPA015	11-Apr-16	23	19.7	17.3	15.9	15.5	15.2	40.0
PAPA015	12-Apr-16	0	24.6	23.5	19.5	15.7	15.2	43.1
PAPA015	12-Apr-16	1	21.3	22.1	18.7	17.5	16.4	42.4
PAPA015	12-Apr-16	2	23.5	25.5	20.8	17.2	16.1	36.6
PAPA015	12-Apr-16	3	20.3	22.2	19.1	17.7	16.8	33.7
PAPA015	12-Apr-16	4	23.5	25.9	22.7	21.2	20.0	31.6
PAPA015	12-Apr-16	5	23.5	25.7	21.6	19.0	17.1	38.3
PAPA015	12-Apr-16	6	28.2	30.9	26.9	22.5	18.7	41.7
PAPA015	12-Apr-16	7	28.2	28.2	25.1	22.6	19.4	56.2
PAPA015	12-Apr-16	8	28.4	30.2	26.6	23.4	20.9	51.5
PAPA015	12-Apr-16	9	33.0	27.6	21.5	19.1	17.5	57.8
PAPA015	12-Apr-16	10	31.1	26.8	18.4	16.9	16.2	53.0
PAPA015	12-Apr-16	11	35.5	22.0	17.5	16.7	16.2	61.3
PAPA015	12-Apr-16	12	28.5	27.7	18.4	16.6	16.0	51.2
PAPA015	12-Apr-16	13	38.7	36.9	20.2	16.9	16.0	60.1
PAPA015	12-Apr-16	14	25.6	26.9	18.3	16.8	16.3	44.6
PAPA015	12-Apr-16	15	27.0	28.9	19.8	16.7	16.0	44.8
PAPA015	12-Apr-16	16	22.5	25.0	19.4	16.7	16.2	38.5
PAPA015	12-Apr-16	17	21.4	22.5	17.1	16.4	16.1	39.6
PAPA015	12-Apr-16	18	18.9	20.9	17.0	16.1	15.4	34.5
PAPA015	12-Apr-16	19	24.6	25.7	17.0	15.5	15.2	46.2
PAPA015	12-Apr-16	20	22.3	25.3	17.7	16.4	15.9	46.0
PAPA015	12-Apr-16	21	21.0	23.9	17.6	16.6	15.9	35.3
PAPA015	12-Apr-16	22	17.1	17.9	16.8	16.2	15.7	28.6
PAPA015	12-Apr-16	23	17.3	18.4	16.9	16.2	15.7	26.0
PAPA015	13-Apr-16	0	20.5	24.0	18.4	16.0	15.5	26.9
PAPA015	13-Apr-16	1	21.1	23.3	20.2	18.9	17.8	28.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	13-Apr-16	2	21.1	22.9	20.6	19.1	17.0	25.6
PAPA015	13-Apr-16	3	23.9	26.3	23.0	20.9	19.7	30.9
PAPA015	13-Apr-16	4	23.2	26.0	21.9	19.8	18.3	38.9
PAPA015	13-Apr-16	5	35.5	26.8	22.6	20.5	18.0	63.7
PAPA015	13-Apr-16	6	25.7	27.8	23.2	20.3	16.4	40.5
PAPA015	13-Apr-16	7	42.2	29.0	21.5	17.9	16.3	69.0
PAPA015	13-Apr-16	8	41.0	42.7	25.9	23.3	18.4	60.6
PAPA015	13-Apr-16	9	35.1	27.1	21.9	18.8	17.1	62.6
PAPA015	13-Apr-16	10	37.5	25.1	18.5	17.1	16.3	63.7
PAPA015	13-Apr-16	11	37.8	41.4	32.9	16.3	15.8	59.4
PAPA015	13-Apr-16	12	44.1	49.4	36.7	21.3	18.0	57.1
PAPA015	13-Apr-16	13	28.6	26.8	18.2	17.0	16.3	55.7
PAPA015	13-Apr-16	14	26.2	28.3	19.1	16.6	16.0	45.0
PAPA015	13-Apr-16	15	29.7	31.3	23.7	20.0	17.7	47.9
PAPA015	13-Apr-16	16	29.6	31.5	24.3	19.9	16.9	57.1
PAPA015	13-Apr-16	17	26.9	30.8	20.8	16.6	16.0	41.6
PAPA015	13-Apr-16	18	23.4	24.6	18.0	16.4	15.8	42.8
PAPA015	13-Apr-16	19	20.9	22.9	17.5	15.9	15.6	38.4
PAPA015	13-Apr-16	20	24.0	27.4	18.6	16.3	15.6	39.4
PAPA015	13-Apr-16	21	20.5	23.4	18.7	17.1	16.1	30.8
PAPA015	13-Apr-16	22	20.4	23.5	16.4	15.6	15.3	37.4
PAPA015	13-Apr-16	23	25.2	29.9	19.7	16.3	15.6	39.9
PAPA015	14-Apr-16	0	23.9	26.5	20.6	18.7	17.0	39.7
PAPA015	14-Apr-16	1	26.4	27.8	20.6	17.9	16.7	45.6
PAPA015	14-Apr-16	2	17.0	18.9	16.0	15.4	15.2	25.8
PAPA015	14-Apr-16	3	15.6	15.8	15.5	15.4	15.3	19.1
PAPA015	14-Apr-16	4	16.6	17.4	15.9	15.6	15.4	26.4
PAPA015	14-Apr-16	5	21.7	25.0	17.1	16.1	15.8	37.8
PAPA015	14-Apr-16	6	26.2	30.0	19.8	17.2	15.8	41.0
PAPA015	14-Apr-16	7	33.5	27.9	20.9	17.4	16.4	54.7
PAPA015	14-Apr-16	8	26.0	26.7	22.7	20.1	18.4	55.2
PAPA015	14-Apr-16	9	37.7	28.1	23.9	21.6	19.7	63.0
PAPA015	14-Apr-16	10	39.4	35.0	27.6	22.9	20.3	63.5
PAPA015	14-Apr-16	11	38.3	41.3	33.7	28.0	23.0	56.6
PAPA015	14-Apr-16	12	40.6	44.1	34.0	28.4	25.0	61.4
PAPA015	14-Apr-16	13	34.8	38.2	32.2	26.9	22.9	49.2
PAPA015	14-Apr-16	14	30.9	34.6	27.8	23.3	21.2	43.8
PAPA015	14-Apr-16	15	33.0	36.1	30.5	26.2	23.0	47.6
PAPA015	14-Apr-16	16	30.5	32.8	24.1	19.9	18.0	50.7
PAPA015	14-Apr-16	17	34.2	26.9	21.2	19.7	17.6	58.6
PAPA015	14-Apr-16	18	31.9	35.7	28.3	20.4	17.9	48.5
PAPA015	14-Apr-16	19	47.2	24.4	18.0	16.4	15.6	72.3
PAPA015	14-Apr-16	20	27.8	27.8	21.7	16.7	15.5	56.0
PAPA015	14-Apr-16	21	20.3	22.0	18.5	16.6	16.1	37.8
PAPA015	14-Apr-16	22	24.3	20.4	17.7	16.5	16.0	45.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	14-Apr-16	23	19.2	19.4	17.1	16.3	15.8	35.4
PAPA015	15-Apr-16	0	25.5	28.5	23.8	17.9	16.6	42.8
PAPA015	15-Apr-16	1	24.4	27.2	23.3	20.3	18.6	35.6
PAPA015	15-Apr-16	2	17.8	19.3	17.4	16.1	15.6	23.3
PAPA015	15-Apr-16	3	19.4	21.2	19.0	17.4	15.5	25.7
PAPA015	15-Apr-16	4	16.9	17.5	16.2	15.8	15.4	31.8
PAPA015	15-Apr-16	5	18.8	18.8	16.2	15.6	15.1	35.7
PAPA015	15-Apr-16	6	34.5	26.3	20.2	17.1	15.2	57.8
PAPA015	15-Apr-16	7	38.8	29.6	22.7	20.0	17.4	63.7
PAPA015	15-Apr-16	8	36.6	28.6	22.0	18.4	16.7	61.6
PAPA015	15-Apr-16	9	40.8	34.2	25.5	20.4	17.4	65.7
PAPA015	15-Apr-16	10	33.7	36.1	29.5	24.1	19.8	61.0
PAPA015	15-Apr-16	11	39.8	42.2	34.9	28.7	23.3	62.1
PAPA015	15-Apr-16	12	38.3	41.7	34.8	29.0	23.9	56.5
PAPA015	15-Apr-16	13	40.2	43.1	34.6	27.9	22.7	59.8
PAPA015	15-Apr-16	14	40.9	44.6	37.5	30.4	23.4	55.0
PAPA015	15-Apr-16	15	41.2	44.9	37.9	31.4	23.7	58.3
PAPA015	15-Apr-16	16	38.2	41.9	34.3	27.6	22.7	53.2
PAPA015	15-Apr-16	17	38.2	41.9	35.2	28.5	22.7	51.7
PAPA015	15-Apr-16	18	37.0	40.4	33.7	28.1	23.1	55.3
PAPA015	15-Apr-16	19	32.8	36.3	29.6	23.3	18.4	49.3
PAPA015	15-Apr-16	20	29.9	33.0	27.9	24.9	22.3	42.2
PAPA015	15-Apr-16	21	29.8	32.4	28.5	25.7	23.2	42.2
PAPA015	15-Apr-16	22	32.2	31.4	28.5	26.2	23.6	55.1
PAPA015	15-Apr-16	23	30.4	32.4	29.6	27.6	25.2	42.0
PAPA015	16-Apr-16	0	30.0	31.8	29.4	27.3	25.1	39.0
PAPA015	16-Apr-16	1	30.8	33.0	29.8	27.1	25.0	43.5
PAPA015	16-Apr-16	2	27.2	29.1	26.5	24.8	22.8	37.4
PAPA015	16-Apr-16	3	26.5	28.3	25.9	24.1	22.3	36.2
PAPA015	16-Apr-16	4	29.3	32.0	27.7	24.4	22.3	42.9
PAPA015	16-Apr-16	5	30.7	32.6	30.1	28.1	25.4	39.5
PAPA015	16-Apr-16	6	43.0	32.5	28.9	26.7	24.4	68.7
PAPA015	16-Apr-16	7	30.7	31.2	27.5	25.5	23.0	57.9
PAPA015	16-Apr-16	8	34.3	34.6	29.1	25.7	21.6	57.6
PAPA015	16-Apr-16	9	25.3	28.2	22.6	18.4	16.6	42.9
PAPA015	16-Apr-16	10	34.8	23.3	18.0	16.7	16.3	60.1
PAPA015	16-Apr-16	11	18.6	19.9	17.3	16.7	16.4	38.1
PAPA015	16-Apr-16	12	20.6	22.7	18.8	17.6	16.8	40.1
PAPA015	16-Apr-16	13	28.3	31.4	22.2	18.4	17.0	44.6
PAPA015	16-Apr-16	14	30.0	33.9	24.6	19.9	17.5	48.6
PAPA015	16-Apr-16	15	35.6	39.3	31.8	24.1	18.9	51.1
PAPA015	16-Apr-16	16	39.7	43.6	36.7	30.0	23.5	53.8
PAPA015	16-Apr-16	17	40.8	44.6	37.5	30.1	21.9	55.2
PAPA015	16-Apr-16	18	37.4	41.2	34.3	28.0	21.9	50.1
PAPA015	16-Apr-16	19	30.6	34.5	23.7	20.2	18.2	45.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA015	16-Apr-16	20	28.8	27.7	24.8	22.6	20.5	49.3
PAPA015	16-Apr-16	21	24.3	26.1	24.0	21.1	18.7	32.9
PAPA015	16-Apr-16	22	23.1	24.8	22.3	20.7	18.1	37.0
PAPA015	16-Apr-16	23	23.8	25.4	23.4	22.0	20.5	30.8
PAPA015	17-Apr-16	0	26.0	28.4	25.0	22.8	20.2	33.2
PAPA015	17-Apr-16	1	26.2	29.8	23.8	18.5	16.3	36.8
PAPA015	17-Apr-16	2	20.6	23.4	19.2	17.5	16.2	31.2
PAPA015	17-Apr-16	3	19.5	21.7	18.6	17.2	16.5	32.4
PAPA015	17-Apr-16	4	27.0	30.1	25.9	21.8	18.4	35.3
PAPA015	17-Apr-16	5	28.6	30.7	28.0	25.5	22.3	41.2
PAPA015	17-Apr-16	6	29.1	31.4	27.9	24.8	22.4	43.5
PAPA015	17-Apr-16	7	40.4	31.4	28.1	25.1	22.1	64.4
PAPA015	17-Apr-16	8	27.6	29.1	27.1	25.4	22.6	46.7
PAPA015	17-Apr-16	9	23.4	26.6	20.9	17.0	16.2	41.4
PAPA015	17-Apr-16	10	32.1	20.7	17.4	16.7	16.2	56.5
PAPA015	17-Apr-16	11	24.4	21.7	17.9	16.7	16.1	57.1
PAPA015	17-Apr-16	12	29.9	32.2	21.4	16.6	16.0	54.5
PAPA015	17-Apr-16	13	29.3	32.2	25.4	20.0	17.1	54.0
PAPA015	17-Apr-16	14	23.6	26.2	19.3	16.1	15.5	40.3
PAPA015	17-Apr-16	15	27.2	30.8	23.5	19.0	16.7	43.3
PAPA015	17-Apr-16	16	30.1	33.3	27.1	21.8	17.8	49.9
PAPA015	17-Apr-16	17	32.5	36.1	29.0	23.4	19.4	47.5
PAPA015	17-Apr-16	18	28.3	31.7	25.7	20.5	17.1	41.7
PAPA015	17-Apr-16	19	23.4	26.1	20.9	18.2	16.6	37.5
PAPA015	17-Apr-16	20	20.7	22.1	18.2	16.1	15.6	37.3
PAPA015	17-Apr-16	21	46.1	23.1	17.4	16.3	15.9	72.1
PAPA015	17-Apr-16	22	20.4	22.7	18.4	16.8	16.3	30.8
PAPA015	17-Apr-16	23	22.2	24.9	18.6	15.9	15.6	35.3
PAPA015	18-Apr-16	0	27.1	30.2	26.5	16.9	15.4	40.3
PAPA015	18-Apr-16	1	28.2	30.5	27.4	25.3	22.0	36.0
PAPA015	18-Apr-16	2	21.3	23.8	20.4	18.4	17.5	31.9
PAPA015	18-Apr-16	3	18.9	21.0	18.7	16.1	15.7	26.4
PAPA015	18-Apr-16	4	17.6	19.5	16.9	15.9	15.6	33.2
PAPA015	18-Apr-16	5	20.7	21.7	17.6	16.5	15.9	38.0
PAPA015	18-Apr-16	6	20.2	22.4	18.7	17.2	16.2	39.5
PAPA015	18-Apr-16	7	34.2	22.8	18.7	16.7	15.8	61.6
PAPA015	18-Apr-16	8	34.2	23.3	19.2	17.2	16.2	59.3
PAPA015	18-Apr-16	9	33.4	25.7	19.9	18.0	16.9	56.5
PAPA015	18-Apr-16	10	23.0	20.7	17.1	16.6	16.3	41.8
PAPA015	18-Apr-16	11	20.0	20.6	16.7	16.1	15.9	42.5
PAPA015	18-Apr-16	12	26.0	22.5	16.8	16.2	15.9	50.3
PAPA015	18-Apr-16	13	21.8	22.5	17.1	16.5	16.2	40.2
PAPA015	18-Apr-16	14	21.8	21.3	17.0	16.5	16.3	44.5
PAPA015	18-Apr-16	15	28.4	23.8	16.9	16.4	16.1	54.2
PAPA015	18-Apr-16	16	27.9	28.1	16.8	16.4	16.2	52.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	15-Apr-13	11	25.1	24.1	16.2	15.5	15.2	43.5
PAPA016	15-Apr-13	12	27.6	29.9	21.7	16.6	15.7	45.1
PAPA016	15-Apr-13	13	32.2	35.6	21.1	16.4	15.5	54.7
PAPA016	15-Apr-13	14	29.7	33.3	26.8	20.5	16.3	43.4
PAPA016	15-Apr-13	15	29.8	33.5	26.9	20.2	16.4	42.2
PAPA016	15-Apr-13	16	32.8	36.9	29.0	21.4	17.3	46.1
PAPA016	15-Apr-13	17	34.3	37.1	29.0	20.8	16.4	53.6
PAPA016	15-Apr-13	18	33.2	37.4	29.3	18.9	16.1	48.9
PAPA016	15-Apr-13	19	34.1	37.9	29.6	23.2	18.2	48.9
PAPA016	15-Apr-13	20	26.0	29.3	23.7	20.5	18.8	40.6
PAPA016	15-Apr-13	21	28.7	31.8	26.1	23.7	21.4	42.3
PAPA016	15-Apr-13	22	25.7	29.3	22.4	19.0	17.1	38.5
PAPA016	15-Apr-13	23	26.4	29.9	22.6	19.4	17.5	40.4
PAPA016	16-Apr-13	0	18.7	20.5	18.0	16.7	15.7	27.0
PAPA016	16-Apr-13	1	32.3	22.5	20.4	18.5	17.2	57.3
PAPA016	16-Apr-13	2	23.7	25.7	23.3	20.3	18.6	31.6
PAPA016	16-Apr-13	3	26.5	28.5	25.9	23.9	22.0	35.1
PAPA016	16-Apr-13	4	29.4	31.6	28.6	26.8	24.2	38.1
PAPA016	16-Apr-13	5	27.6	29.8	26.4	24.8	22.4	41.4
PAPA016	16-Apr-13	6	25.8	27.0	25.3	23.8	22.0	45.3
PAPA016	16-Apr-13	7	24.0	25.4	23.7	22.0	20.0	34.2
PAPA016	16-Apr-13	8	27.2	28.4	25.5	24.2	22.3	41.6
PAPA016	16-Apr-13	9	27.8	29.5	26.1	24.3	22.1	41.8
PAPA016	16-Apr-13	10	27.5	29.7	26.5	24.4	22.0	39.4
PAPA016	16-Apr-13	11	22.9	24.8	22.5	19.6	17.5	30.5
PAPA016	16-Apr-13	12	24.1	26.0	17.5	16.0	15.4	43.9
PAPA016	16-Apr-13	13	23.0	24.2	17.1	15.9	15.3	43.6
PAPA016	16-Apr-13	14	21.9	22.6	17.7	16.8	16.0	42.0
PAPA016	16-Apr-13	15	25.3	29.2	20.8	17.6	16.0	39.1
PAPA016	16-Apr-13	16	25.1	28.4	21.9	17.9	16.5	39.7
PAPA016	16-Apr-13	17	22.6	24.7	18.1	16.3	15.7	44.7
PAPA016	16-Apr-13	18	20.8	20.7	16.0	15.3	14.9	41.2
PAPA016	16-Apr-13	19	21.1	22.5	16.2	15.2	14.8	40.0
PAPA016	16-Apr-13	20	18.2	19.5	15.7	14.8	14.5	39.3
PAPA016	16-Apr-13	21	18.3	20.2	15.1	14.5	14.3	33.6
PAPA016	16-Apr-13	22	17.9	20.0	16.6	15.2	14.7	27.9
PAPA016	16-Apr-13	23	20.1	22.5	17.9	15.3	14.7	33.8
PAPA016	17-Apr-13	0	21.4	23.8	20.0	18.5	17.2	32.7
PAPA016	17-Apr-13	1	22.1	24.5	20.5	18.4	16.6	34.0
PAPA016	17-Apr-13	2	17.4	18.8	17.1	15.5	14.9	22.9
PAPA016	17-Apr-13	3	24.6	16.6	15.1	14.7	14.4	45.3
PAPA016	17-Apr-13	4	17.8	15.1	14.6	14.4	14.3	35.4
PAPA016	17-Apr-13	5	17.6	19.8	16.2	14.7	14.3	38.2
PAPA016	17-Apr-13	6	24.0	24.8	20.1	17.7	15.7	44.2
PAPA016	17-Apr-13	7	26.9	29.7	25.3	21.7	18.6	41.1

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	17-Apr-13	8	32.4	35.8	30.5	24.6	20.3	43.3
PAPA016	24-Apr-14	19	21.5	20.6	16.6	15.8	15.3	42.5
PAPA016	24-Apr-14	20	21.7	22.1	17.5	15.5	15.2	40.7
PAPA016	24-Apr-14	21	25.4	23.3	16.7	15.5	14.9	48.8
PAPA016	24-Apr-14	22	19.0	18.9	16.8	16.1	15.6	34.4
PAPA016	24-Apr-14	23	17.8	19.2	17.3	15.8	15.5	30.7
PAPA016	25-Apr-14	0	17.3	18.4	16.9	16.0	15.4	32.9
PAPA016	25-Apr-14	1	19.8	21.3	18.1	16.5	15.5	32.1
PAPA016	25-Apr-14	2	19.9	20.9	19.3	17.9	16.7	43.6
PAPA016	25-Apr-14	3	18.6	19.6	18.4	17.5	16.8	27.1
PAPA016	25-Apr-14	4	18.8	20.4	18.6	16.3	15.1	32.1
PAPA016	25-Apr-14	5	20.1	19.4	17.2	15.8	15.2	41.3
PAPA016	25-Apr-14	6	23.1	25.3	22.3	19.7	18.4	29.6
PAPA016	25-Apr-14	7	30.1	27.2	25.1	23.2	21.8	52.2
PAPA016	25-Apr-14	8	30.6	33.8	29.2	25.6	23.0	43.4
PAPA016	25-Apr-14	9	31.1	34.1	29.5	25.2	22.1	41.9
PAPA016	25-Apr-14	10	26.6	27.7	24.9	21.9	19.6	45.6
PAPA016	25-Apr-14	11	22.3	24.1	19.7	18.6	17.5	38.2
PAPA016	25-Apr-14	12	24.9	27.9	19.9	17.8	17.0	45.2
PAPA016	25-Apr-14	13	25.1	27.8	19.0	17.1	16.4	41.1
PAPA016	25-Apr-14	14	25.0	27.4	20.2	18.2	16.4	43.8
PAPA016	25-Apr-14	15	28.1	29.4	19.8	17.5	16.7	47.4
PAPA016	25-Apr-14	16	27.4	30.5	21.9	16.9	15.6	48.3
PAPA016	25-Apr-14	17	24.6	27.2	19.3	15.8	15.4	40.6
PAPA016	25-Apr-14	18	26.1	25.7	21.2	17.8	16.9	46.6
PAPA016	25-Apr-14	19	24.9	27.4	23.1	19.4	17.8	41.7
PAPA016	25-Apr-14	20	25.0	26.7	24.0	21.7	19.8	38.2
PAPA016	25-Apr-14	21	21.4	24.5	19.3	16.5	15.7	35.6
PAPA016	25-Apr-14	22	27.4	31.5	22.8	17.5	16.6	42.8
PAPA016	25-Apr-14	23	32.8	36.5	30.0	25.1	21.8	46.0
PAPA016	26-Apr-14	0	36.8	40.2	34.7	29.8	24.7	49.0
PAPA016	26-Apr-14	1	31.7	35.0	29.1	23.7	19.9	50.2
PAPA016	26-Apr-14	2	25.3	28.1	22.2	19.8	17.9	44.4
PAPA016	26-Apr-14	3	22.0	24.3	19.8	17.9	16.5	38.3
PAPA016	26-Apr-14	4	22.9	25.3	21.6	18.7	16.8	35.8
PAPA016	26-Apr-14	5	26.4	26.5	22.2	20.5	18.8	43.4
PAPA016	26-Apr-14	6	23.7	24.0	21.0	19.0	17.4	46.7
PAPA016	26-Apr-14	7	24.3	27.3	21.6	19.6	17.8	45.1
PAPA016	26-Apr-14	8	27.6	29.6	22.9	20.6	18.4	45.2
PAPA016	26-Apr-14	9	26.5	28.5	24.8	22.2	19.1	40.5
PAPA016	26-Apr-14	10	39.6	43.7	36.3	20.6	17.5	53.5
PAPA016	26-Apr-14	11	33.3	36.9	30.0	23.5	19.7	48.5
PAPA016	26-Apr-14	12	25.6	27.3	21.3	18.9	17.9	44.4
PAPA016	26-Apr-14	13	65.0	60.0	27.7	18.4	16.5	91.5
PAPA016	26-Apr-14	14	51.8	39.6	27.9	24.8	21.4	81.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	26-Apr-14	15	28.7	29.2	26.4	24.7	23.0	55.0
PAPA016	26-Apr-14	16	41.6	35.9	27.9	24.2	19.9	73.2
PAPA016	26-Apr-14	17	62.6	44.1	26.6	21.6	18.6	92.8
PAPA016	26-Apr-14	18	24.5	27.7	21.1	17.8	16.2	40.3
PAPA016	26-Apr-14	19	26.0	28.7	24.0	19.6	16.6	38.1
PAPA016	26-Apr-14	20	32.9	27.4	20.6	17.1	15.8	57.2
PAPA016	26-Apr-14	21	21.8	23.6	18.2	16.4	15.1	37.1
PAPA016	26-Apr-14	22	21.9	23.9	18.2	16.0	15.3	36.6
PAPA016	26-Apr-14	23	17.6	19.4	16.0	15.1	14.8	30.6
PAPA016	27-Apr-14	0	19.6	15.7	15.0	14.8	14.7	40.7
PAPA016	27-Apr-14	1	23.3	27.0	19.9	16.4	15.2	35.6
PAPA016	27-Apr-14	2	21.7	24.2	20.6	17.6	16.0	32.8
PAPA016	27-Apr-14	3	19.2	21.5	18.3	16.0	15.1	30.2
PAPA016	27-Apr-14	4	18.0	19.6	17.3	16.2	15.5	28.0
PAPA016	27-Apr-14	6	18.8	20.6	17.6	16.1	15.3	33.3
PAPA016	27-Apr-14	7	18.1	19.6	17.5	16.4	15.6	30.6
PAPA016	27-Apr-14	8	21.9	23.2	18.6	17.2	16.0	45.9
PAPA016	27-Apr-14	9	26.4	28.3	21.9	18.7	16.2	43.4
PAPA016	27-Apr-14	10	27.3	30.0	23.8	20.1	18.0	43.7
PAPA016	27-Apr-14	11	39.9	43.2	36.6	30.4	24.9	53.6
PAPA016	27-Apr-14	12	40.9	43.8	38.4	33.1	28.0	57.5
PAPA016	27-Apr-14	13	42.7	46.2	40.6	34.7	28.2	55.6
PAPA016	27-Apr-14	14	41.7	45.1	39.4	33.0	27.5	53.9
PAPA016	27-Apr-14	15	43.5	46.9	41.5	36.2	29.5	55.7
PAPA016	27-Apr-14	16	40.4	43.9	38.0	31.8	25.2	51.8
PAPA016	27-Apr-14	17	39.5	40.0	33.0	26.9	20.1	59.3
PAPA016	27-Apr-14	18	32.9	36.6	30.2	24.2	18.8	44.8
PAPA016	27-Apr-14	19	25.3	28.1	21.5	17.5	15.6	45.7
PAPA016	27-Apr-14	20	25.8	28.3	19.7	15.7	15.1	44.7
PAPA016	27-Apr-14	21	26.9	27.8	20.9	15.6	14.9	49.2
PAPA016	27-Apr-14	22	24.9	23.4	17.2	15.4	14.8	46.1
PAPA016	27-Apr-14	23	21.3	20.6	16.2	15.2	14.8	40.0
PAPA016	28-Apr-14	0	20.5	22.8	18.5	16.3	14.9	35.5
PAPA016	28-Apr-14	1	22.3	25.4	19.5	16.5	15.6	37.6
PAPA016	28-Apr-14	2	19.2	21.3	17.8	16.3	15.2	31.5
PAPA016	28-Apr-14	3	20.3	22.8	18.0	15.7	15.1	35.8
PAPA016	28-Apr-14	4	20.9	23.3	18.8	16.5	15.4	35.3
PAPA016	28-Apr-14	5	28.9	32.5	25.5	18.8	15.8	43.2
PAPA016	28-Apr-14	6	28.1	31.8	25.2	20.7	17.6	40.7
PAPA016	28-Apr-14	7	30.9	34.2	28.3	23.0	18.3	47.1
PAPA016	28-Apr-14	8	35.3	38.8	33.2	27.9	22.1	47.5
PAPA016	28-Apr-14	9	43.2	46.3	41.4	36.1	28.3	55.7
PAPA016	28-Apr-14	10	44.2	47.5	42.3	37.2	31.0	55.4
PAPA016	28-Apr-14	11	44.3	47.8	42.4	37.2	30.6	55.5
PAPA016	28-Apr-14	12	44.2	47.7	42.3	36.5	29.5	55.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	28-Apr-14	13	44.6	48.3	42.3	35.4	26.5	56.8
PAPA016	28-Apr-14	14	42.9	46.7	38.8	30.5	23.5	57.2
PAPA016	28-Apr-14	15	43.5	47.0	41.7	34.5	24.4	54.2
PAPA016	28-Apr-14	16	44.9	48.7	42.4	35.2	25.8	57.7
PAPA016	28-Apr-14	17	43.9	47.3	42.0	36.6	29.8	55.2
PAPA016	28-Apr-14	18	45.4	48.7	43.9	38.9	33.2	56.6
PAPA016	28-Apr-14	19	40.6	43.9	38.8	33.6	27.2	52.5
PAPA016	28-Apr-14	20	31.6	35.4	24.5	20.0	17.4	49.8
PAPA016	28-Apr-14	21	26.3	29.9	23.4	19.4	17.3	40.9
PAPA016	28-Apr-14	22	28.0	31.0	25.0	20.8	17.1	41.5
PAPA016	28-Apr-14	23	25.7	28.8	23.4	20.5	18.6	38.7
PAPA016	29-Apr-14	0	28.2	25.1	21.2	19.6	17.7	49.7
PAPA016	29-Apr-14	1	29.4	32.3	27.6	24.0	20.0	44.9
PAPA016	29-Apr-14	2	28.5	31.3	26.7	24.0	20.7	40.0
PAPA016	29-Apr-14	3	26.6	28.9	24.6	22.4	20.2	42.5
PAPA016	29-Apr-14	4	26.1	27.7	22.9	20.6	18.4	41.4
PAPA016	29-Apr-14	5	29.9	33.3	27.5	24.2	21.6	41.3
PAPA016	29-Apr-14	6	31.5	33.0	27.4	24.3	21.4	49.8
PAPA016	29-Apr-14	7	42.6	40.2	33.9	27.8	23.2	70.5
PAPA016	03-Apr-15	10	36.5	32.0	21.1	16.0	15.2	60.2
PAPA016	03-Apr-15	11	32.0	30.4	21.7	17.1	15.9	54.0
PAPA016	03-Apr-15	12	29.4	31.4	21.5	16.8	15.7	52.7
PAPA016	03-Apr-15	13	27.7	29.9	18.8	16.3	15.6	50.3
PAPA016	03-Apr-15	14	24.4	27.2	18.6	16.3	15.5	43.1
PAPA016	03-Apr-15	15	26.2	29.0	19.4	16.5	15.8	45.9
PAPA016	03-Apr-15	16	26.2	29.4	18.0	16.0	15.4	42.3
PAPA016	03-Apr-15	17	24.5	23.2	16.8	15.7	15.3	44.4
PAPA016	03-Apr-15	18	24.8	26.8	16.4	15.4	15.0	42.4
PAPA016	03-Apr-15	19	20.8	24.5	17.7	15.3	14.8	32.0
PAPA016	03-Apr-15	20	26.1	30.2	22.5	16.2	14.5	41.2
PAPA016	03-Apr-15	21	19.1	21.6	16.0	14.7	14.3	33.2
PAPA016	03-Apr-15	22	19.6	21.4	15.4	14.5	14.2	34.6
PAPA016	03-Apr-15	23	18.7	21.7	15.3	14.3	14.1	32.2
PAPA016	04-Apr-15	0	17.4	20.3	15.2	14.3	14.1	34.2
PAPA016	04-Apr-15	1	19.2	21.8	16.0	15.0	14.2	36.8
PAPA016	04-Apr-15	2	17.4	18.3	16.7	15.7	14.9	36.9
PAPA016	04-Apr-15	3	16.9	18.5	16.2	15.2	14.7	28.1
PAPA016	04-Apr-15	4	21.6	24.9	18.8	16.3	15.4	38.7
PAPA016	04-Apr-15	5	20.7	23.8	18.8	17.6	16.7	33.4
PAPA016	04-Apr-15	6	30.5	33.6	29.7	23.4	18.4	37.8
PAPA016	04-Apr-15	7	29.8	32.0	27.3	21.0	17.4	49.8
PAPA016	04-Apr-15	8	28.4	29.0	22.9	19.7	17.2	50.9
PAPA016	04-Apr-15	9	23.5	24.9	19.9	18.4	17.0	39.2
PAPA016	04-Apr-15	10	34.1	27.1	18.6	16.6	15.7	60.1
PAPA016	04-Apr-15	11	33.0	28.7	21.2	17.5	16.2	57.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	04-Apr-15	12	26.5	27.4	20.9	17.7	16.4	47.7
PAPA016	04-Apr-15	13	30.4	28.5	17.9	16.6	15.7	61.6
PAPA016	04-Apr-15	14	25.5	29.0	18.9	16.4	15.7	41.3
PAPA016	04-Apr-15	15	42.0	46.0	35.1	18.9	16.4	61.9
PAPA016	04-Apr-15	16	42.9	46.1	38.5	30.6	22.7	60.1
PAPA016	04-Apr-15	17	44.9	48.5	42.2	35.3	25.6	57.2
PAPA016	04-Apr-15	18	38.1	39.6	31.3	21.9	15.2	63.8
PAPA016	04-Apr-15	19	20.8	24.3	16.8	15.4	14.6	36.0
PAPA016	04-Apr-15	20	27.1	30.9	20.1	15.2	14.6	44.6
PAPA016	04-Apr-15	21	22.2	24.2	15.2	14.4	14.3	36.5
PAPA016	04-Apr-15	22	23.2	18.7	15.1	14.4	14.2	45.8
PAPA016	04-Apr-15	23	17.2	17.6	15.6	14.4	14.2	32.8
PAPA016	05-Apr-15	0	26.1	30.4	23.2	17.6	15.2	38.7
PAPA016	05-Apr-15	1	18.8	21.1	16.7	15.7	15.2	40.4
PAPA016	05-Apr-15	2	20.3	21.8	19.8	18.3	17.1	27.9
PAPA016	05-Apr-15	3	26.0	28.7	24.9	21.8	19.1	33.9
PAPA016	05-Apr-15	4	24.2	26.6	22.7	21.1	19.7	35.4
PAPA016	05-Apr-15	5	27.5	30.8	25.9	21.9	19.8	37.1
PAPA016	05-Apr-15	6	31.5	34.3	30.4	24.9	21.4	51.4
PAPA016	05-Apr-15	7	31.2	34.5	29.3	25.7	23.0	42.1
PAPA016	05-Apr-15	8	26.3	26.1	23.1	20.8	18.7	43.2
PAPA016	05-Apr-15	9	27.0	25.8	20.5	18.0	16.2	54.6
PAPA016	05-Apr-15	10	21.9	25.1	17.6	16.3	15.6	35.8
PAPA016	05-Apr-15	11	25.5	26.4	18.6	16.5	15.7	46.1
PAPA016	05-Apr-15	12	34.2	37.6	27.4	19.4	16.5	56.2
PAPA016	05-Apr-15	13	40.8	44.5	36.5	25.7	19.0	58.2
PAPA016	05-Apr-15	14	42.8	46.7	37.0	27.5	18.6	60.4
PAPA016	05-Apr-15	15	39.3	43.0	35.3	27.7	19.1	55.2
PAPA016	05-Apr-15	16	39.2	42.9	35.7	28.0	19.8	56.6
PAPA016	05-Apr-15	17	37.6	41.4	34.3	28.0	19.8	52.0
PAPA016	05-Apr-15	18	33.5	36.8	26.1	18.3	15.9	50.3
PAPA016	05-Apr-15	19	24.3	28.4	18.6	17.0	16.0	37.8
PAPA016	05-Apr-15	20	22.4	25.6	19.3	17.5	16.4	36.0
PAPA016	05-Apr-15	21	21.4	20.6	18.2	16.0	15.2	41.4
PAPA016	05-Apr-15	22	27.0	23.2	15.6	15.0	14.8	48.5
PAPA016	05-Apr-15	23	19.6	19.1	16.2	15.6	15.1	36.8
PAPA016	06-Apr-15	0	24.8	25.4	20.6	17.0	16.0	46.6
PAPA016	06-Apr-15	1	24.8	26.3	24.4	22.9	21.3	33.4
PAPA016	06-Apr-15	2	27.4	29.4	26.9	24.9	22.6	34.4
PAPA016	06-Apr-15	3	22.8	25.5	21.6	19.3	17.7	39.5
PAPA016	06-Apr-15	4	22.2	24.4	20.9	18.4	17.1	33.8
PAPA016	06-Apr-15	5	26.9	30.9	24.1	18.2	16.3	38.8
PAPA016	06-Apr-15	6	31.6	34.2	29.9	23.8	18.0	46.2
PAPA016	06-Apr-15	7	30.3	33.2	28.5	21.9	16.9	43.0
PAPA016	06-Apr-15	8	28.8	30.8	26.1	22.3	18.8	53.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	06-Apr-15	9	32.8	28.6	21.8	20.2	18.9	53.1
PAPA016	06-Apr-15	10	24.1	24.3	20.2	17.8	16.8	48.4
PAPA016	06-Apr-15	11	26.3	25.7	19.0	17.4	16.4	45.2
PAPA016	06-Apr-15	12	27.5	30.7	21.0	17.6	16.4	44.5
PAPA016	06-Apr-15	13	36.2	38.7	27.6	19.1	16.7	55.3
PAPA016	06-Apr-15	14	42.8	46.4	39.1	32.4	21.8	59.3
PAPA016	06-Apr-15	15	42.3	46.1	38.5	29.3	22.4	58.9
PAPA016	06-Apr-15	16	42.4	46.3	39.3	32.1	24.2	57.0
PAPA016	06-Apr-15	17	40.1	43.7	37.4	30.3	21.4	53.2
PAPA016	06-Apr-15	18	37.3	41.2	33.6	26.5	21.4	50.7
PAPA016	06-Apr-15	19	35.4	38.2	32.7	27.8	20.8	52.8
PAPA016	06-Apr-15	20	33.4	36.9	31.3	24.9	19.3	46.6
PAPA016	06-Apr-15	21	24.6	27.8	21.6	18.9	17.1	40.3
PAPA016	06-Apr-15	22	25.9	29.5	22.8	16.5	15.3	40.5
PAPA016	06-Apr-15	23	17.0	18.2	15.3	14.6	14.4	29.2
PAPA016	07-Apr-15	0	21.8	26.8	15.3	14.5	14.2	37.9
PAPA016	07-Apr-15	1	24.5	28.8	20.8	15.8	14.7	34.6
PAPA016	07-Apr-15	2	22.8	26.2	20.3	17.0	15.3	34.9
PAPA016	07-Apr-15	3	25.0	28.5	23.1	19.4	17.3	33.6
PAPA016	07-Apr-15	4	23.7	25.7	19.7	17.7	16.6	40.0
PAPA016	07-Apr-15	5	21.6	24.3	20.0	17.6	16.2	32.4
PAPA016	07-Apr-15	6	27.9	30.9	26.4	20.8	18.4	45.2
PAPA016	07-Apr-15	7	23.5	25.9	21.1	19.1	17.6	40.8
PAPA016	07-Apr-15	8	25.7	28.3	23.6	21.1	19.0	41.1
PAPA016	07-Apr-15	9	27.1	29.1	24.0	21.5	19.4	47.9
PAPA016	07-Apr-15	10	25.4	25.4	20.2	16.9	15.8	46.7
PAPA016	07-Apr-15	11	26.0	26.0	19.8	17.0	15.6	48.2
PAPA016	07-Apr-15	12	28.6	31.3	27.7	23.3	20.7	38.5
PAPA016	07-Apr-15	13	24.8	28.1	22.2	20.1	18.7	38.0
PAPA016	07-Apr-15	14	27.4	30.3	20.8	18.2	17.4	44.6
PAPA016	07-Apr-15	15	29.8	31.2	23.0	18.6	16.9	50.4
PAPA016	07-Apr-15	16	32.0	35.6	25.7	19.3	17.0	50.6
PAPA016	07-Apr-15	17	32.9	35.6	26.8	23.0	18.9	52.9
PAPA016	07-Apr-15	18	32.2	33.4	27.0	24.5	22.6	52.1
PAPA016	07-Apr-15	19	29.4	30.6	24.6	20.1	17.8	48.2
PAPA016	07-Apr-15	20	28.2	27.8	20.3	17.5	16.0	49.2
PAPA016	07-Apr-15	21	20.8	23.3	18.6	16.8	15.8	33.7
PAPA016	07-Apr-15	22	22.5	25.3	20.8	18.1	16.7	33.7
PAPA016	07-Apr-15	23	21.6	23.2	21.3	19.5	18.1	32.7
PAPA016	08-Apr-15	0	22.0	23.2	21.4	19.4	18.0	35.2
PAPA016	08-Apr-15	1	22.8	24.3	21.2	18.7	17.1	39.4
PAPA016	08-Apr-15	2	19.0	20.2	18.4	17.4	16.5	38.1
PAPA016	08-Apr-15	3	23.1	20.6	18.7	17.4	16.5	47.1
PAPA016	08-Apr-15	4	32.4	22.0	17.3	16.3	15.6	58.6
PAPA016	08-Apr-15	5	24.4	29.1	18.3	16.0	15.2	43.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	08-Apr-15	6	28.9	32.3	27.8	19.9	16.4	38.9
PAPA016	08-Apr-15	7	29.2	32.2	28.1	21.4	16.5	40.8
PAPA016	08-Apr-15	8	29.4	33.7	24.8	20.6	18.8	43.1
PAPA016	08-Apr-15	9	26.4	28.5	23.9	17.3	16.1	51.0
PAPA016	08-Apr-15	10	30.5	30.1	17.3	16.1	14.9	51.9
PAPA016	08-Apr-15	11	25.8	24.1	16.4	15.2	14.9	54.7
PAPA016	08-Apr-15	12	25.0	26.7	17.9	15.4	14.9	44.9
PAPA016	08-Apr-15	13	27.9	30.8	24.0	18.8	15.9	44.1
PAPA016	08-Apr-15	14	29.3	32.7	26.5	21.6	18.7	46.0
PAPA016	08-Apr-15	15	31.8	35.2	29.6	25.0	20.2	45.8
PAPA016	08-Apr-15	16	33.6	37.0	31.0	25.2	19.5	48.0
PAPA016	08-Apr-15	17	35.9	39.3	30.7	25.4	20.5	52.1
PAPA016	08-Apr-15	18	23.0	25.6	21.8	19.1	16.8	35.7
PAPA016	08-Apr-15	19	27.4	30.4	23.0	19.7	17.3	44.2
PAPA016	08-Apr-15	20	33.5	37.3	29.4	22.4	18.2	48.7
PAPA016	08-Apr-15	21	24.3	26.5	19.3	15.4	14.5	43.8
PAPA016	08-Apr-15	22	17.9	19.8	16.6	15.4	14.5	31.0
PAPA016	08-Apr-15	23	21.1	25.2	16.5	15.5	15.1	35.2
PAPA016	09-Apr-15	0	24.5	28.5	22.2	18.6	16.3	37.6
PAPA016	09-Apr-15	1	27.6	29.6	24.1	20.4	17.5	47.2
PAPA016	09-Apr-15	2	21.3	23.8	20.5	17.8	16.8	27.7
PAPA016	09-Apr-15	3	22.9	24.7	22.4	20.9	19.5	28.7
PAPA016	09-Apr-15	4	25.0	26.9	24.6	22.5	20.5	29.3
PAPA016	09-Apr-15	5	23.2	27.1	20.3	17.8	15.3	35.6
PAPA016	09-Apr-15	6	27.8	30.6	26.1	21.3	18.1	42.4
PAPA016	09-Apr-15	7	28.3	31.4	26.4	20.4	17.3	48.4
PAPA016	09-Apr-15	8	28.4	28.5	19.8	18.2	17.2	52.0
PAPA016	09-Apr-15	9	30.6	26.8	21.5	18.1	16.2	52.9
PAPA016	09-Apr-15	10	29.1	26.1	15.9	15.1	14.9	52.0
PAPA016	09-Apr-15	11	28.0	28.2	17.4	15.5	15.1	53.2
PAPA016	09-Apr-15	12	24.6	28.2	18.6	16.3	15.7	42.0
PAPA016	09-Apr-15	13	25.5	26.7	17.0	15.9	15.6	44.0
PAPA016	09-Apr-15	14	29.2	27.6	18.1	16.2	15.6	53.2
PAPA016	09-Apr-15	15	31.2	29.4	19.1	16.0	15.4	55.0
PAPA016	09-Apr-15	16	51.7	33.1	22.9	16.5	15.7	85.3
PAPA016	09-Apr-15	17	24.9	26.5	16.2	15.5	15.0	46.0
PAPA016	09-Apr-15	18	24.6	27.2	19.0	15.0	14.6	41.8
PAPA016	09-Apr-15	19	27.1	26.6	21.3	17.5	15.5	54.0
PAPA016	09-Apr-15	20	29.6	30.5	22.3	17.3	14.7	49.3
PAPA016	09-Apr-15	21	17.5	19.6	15.9	15.0	14.7	30.9
PAPA016	09-Apr-15	22	25.6	22.9	15.1	14.7	14.4	47.3
PAPA016	09-Apr-15	23	21.8	24.9	16.3	14.6	14.4	35.4
PAPA016	10-Apr-15	0	19.4	21.9	18.6	16.6	15.8	26.5
PAPA016	10-Apr-15	1	19.3	20.7	18.9	17.4	16.2	26.4
PAPA016	10-Apr-15	2	19.8	21.8	19.3	17.5	16.4	24.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	10-Apr-15	3	19.7	21.8	18.9	17.6	16.6	28.6
PAPA016	10-Apr-15	4	20.8	22.5	20.5	18.9	17.4	29.4
PAPA016	10-Apr-15	5	24.7	28.2	22.3	18.8	17.3	42.1
PAPA016	10-Apr-15	6	29.4	31.7	28.6	25.5	22.2	39.0
PAPA016	10-Apr-15	7	28.7	31.4	27.7	24.6	21.4	40.0
PAPA016	10-Apr-15	8	27.1	28.1	25.0	22.5	20.0	52.9
PAPA016	01-Apr-16	10	30.8	33.5	27.0	21.8	17.9	49.8
PAPA016	01-Apr-16	11	37.6	35.0	27.8	23.6	20.6	64.5
PAPA016	01-Apr-16	12	31.5	31.6	24.8	20.4	17.3	55.2
PAPA016	01-Apr-16	13	26.7	30.0	23.0	19.3	17.6	44.7
PAPA016	01-Apr-16	14	38.0	34.8	24.4	19.4	17.7	61.1
PAPA016	01-Apr-16	15	38.6	34.5	26.5	20.8	17.0	62.6
PAPA016	01-Apr-16	16	32.0	35.1	27.3	20.8	17.4	54.8
PAPA016	01-Apr-16	17	29.8	33.3	26.8	22.0	17.0	46.1
PAPA016	01-Apr-16	18	29.4	32.8	27.1	22.9	19.9	44.5
PAPA016	01-Apr-16	19	26.3	28.9	23.1	19.5	17.1	41.8
PAPA016	01-Apr-16	20	29.1	33.4	24.5	18.2	15.4	41.2
PAPA016	01-Apr-16	21	23.4	26.4	20.3	17.5	15.7	38.5
PAPA016	01-Apr-16	22	20.1	23.0	18.5	15.7	14.9	32.3
PAPA016	01-Apr-16	23	22.9	24.0	19.6	17.6	15.3	42.2
PAPA016	02-Apr-16	0	21.7	21.0	17.5	16.1	15.3	41.3
PAPA016	02-Apr-16	1	16.6	17.4	16.4	15.7	15.2	24.0
PAPA016	02-Apr-16	2	17.3	18.6	16.8	15.9	15.4	24.3
PAPA016	02-Apr-16	3	17.6	18.7	16.9	16.1	15.5	27.2
PAPA016	02-Apr-16	4	16.9	18.0	16.5	15.7	15.3	24.7
PAPA016	02-Apr-16	5	24.1	26.5	18.8	16.6	15.7	44.9
PAPA016	02-Apr-16	6	36.5	39.1	34.9	28.0	19.0	62.4
PAPA016	02-Apr-16	7	37.2	38.3	33.6	27.3	20.5	57.3
PAPA016	02-Apr-16	8	33.7	37.4	30.8	24.8	20.1	50.0
PAPA016	02-Apr-16	9	29.9	33.0	26.4	23.2	20.2	46.1
PAPA016	02-Apr-16	10	42.4	31.6	24.0	20.7	18.7	67.0
PAPA016	02-Apr-16	11	22.7	24.6	19.7	17.8	16.3	42.6
PAPA016	02-Apr-16	12	28.2	31.4	23.4	17.3	16.0	49.1
PAPA016	02-Apr-16	13	38.6	33.4	25.2	19.7	16.8	68.3
PAPA016	02-Apr-16	14	31.0	34.7	27.2	20.4	17.0	45.6
PAPA016	02-Apr-16	15	32.9	36.2	29.5	23.5	19.1	53.6
PAPA016	02-Apr-16	16	37.3	36.9	30.1	24.0	18.5	62.0
PAPA016	02-Apr-16	17	33.2	36.8	30.2	24.4	19.2	47.8
PAPA016	02-Apr-16	18	31.4	35.0	28.9	24.4	21.1	43.5
PAPA016	02-Apr-16	19	27.9	32.4	22.2	16.5	15.2	42.8
PAPA016	02-Apr-16	20	24.7	28.8	20.2	16.1	14.9	38.3
PAPA016	02-Apr-16	21	19.8	22.4	17.1	15.5	14.9	39.2
PAPA016	02-Apr-16	22	19.7	22.0	16.4	15.2	14.8	36.5
PAPA016	02-Apr-16	23	18.0	19.8	15.9	15.0	14.6	33.8
PAPA016	03-Apr-16	0	15.5	16.3	15.2	14.9	14.6	21.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	03-Apr-16	1	15.9	16.7	15.3	14.9	14.6	25.5
PAPA016	03-Apr-16	2	16.9	18.5	16.2	15.0	14.6	26.2
PAPA016	03-Apr-16	3	19.1	19.6	16.1	15.1	14.7	42.4
PAPA016	03-Apr-16	4	16.1	16.4	15.2	14.9	14.7	28.8
PAPA016	03-Apr-16	5	25.2	29.4	16.5	15.2	14.8	40.6
PAPA016	03-Apr-16	6	35.7	38.4	34.4	27.8	17.2	59.0
PAPA016	03-Apr-16	7	35.2	38.6	33.8	26.1	17.3	44.2
PAPA016	03-Apr-16	8	29.4	32.9	23.1	19.2	16.6	47.2
PAPA016	03-Apr-16	9	32.8	30.0	21.5	18.2	17.0	53.4
PAPA016	03-Apr-16	10	21.8	23.2	18.4	17.1	16.2	38.0
PAPA016	03-Apr-16	11	37.4	36.5	23.3	18.8	16.6	61.7
PAPA016	03-Apr-16	12	36.1	39.7	33.4	27.5	22.3	49.4
PAPA016	03-Apr-16	13	32.8	36.4	29.9	23.8	17.1	47.3
PAPA016	03-Apr-16	14	30.1	33.7	26.3	19.7	16.5	47.6
PAPA016	03-Apr-16	15	27.5	31.1	24.1	19.1	16.2	41.5
PAPA016	03-Apr-16	16	29.5	33.3	25.1	17.8	15.4	44.4
PAPA016	03-Apr-16	17	26.5	28.6	22.6	19.2	16.2	47.6
PAPA016	03-Apr-16	18	22.0	25.1	19.4	16.6	15.4	37.1
PAPA016	03-Apr-16	19	23.9	26.9	19.8	16.2	15.3	45.2
PAPA016	03-Apr-16	20	29.1	33.5	24.8	15.6	14.9	43.5
PAPA016	03-Apr-16	21	31.6	35.3	27.1	15.6	14.8	49.6
PAPA016	03-Apr-16	22	25.3	28.6	18.8	16.1	15.3	45.6
PAPA016	03-Apr-16	23	27.2	24.8	19.0	17.0	15.8	50.0
PAPA016	04-Apr-16	0	18.8	19.6	16.4	15.0	14.8	32.6
PAPA016	04-Apr-16	1	15.4	16.0	15.2	14.9	14.7	19.5
PAPA016	04-Apr-16	2	17.8	18.6	16.2	15.2	14.9	38.9
PAPA016	04-Apr-16	3	20.7	20.3	18.6	16.9	15.9	38.9
PAPA016	04-Apr-16	4	18.5	19.5	18.0	16.7	16.0	34.0
PAPA016	04-Apr-16	5	27.1	32.1	20.8	18.6	17.6	39.6
PAPA016	04-Apr-16	6	48.4	38.8	34.4	28.8	21.0	72.4
PAPA016	04-Apr-16	7	31.1	34.6	28.8	22.8	18.9	44.7
PAPA016	04-Apr-16	8	40.2	34.8	27.3	23.0	19.7	64.8
PAPA016	04-Apr-16	9	45.1	27.1	22.2	20.4	18.6	74.5
PAPA016	04-Apr-16	10	21.4	22.8	18.4	17.3	16.5	40.0
PAPA016	04-Apr-16	11	34.0	30.6	20.2	17.2	16.4	57.1
PAPA016	04-Apr-16	12	26.2	29.2	20.8	17.7	16.5	48.7
PAPA016	04-Apr-16	13	35.7	40.1	29.0	21.0	17.4	51.3
PAPA016	04-Apr-16	14	38.3	42.5	33.8	21.5	17.3	52.3
PAPA016	04-Apr-16	15	31.0	33.7	24.9	18.8	16.2	54.6
PAPA016	04-Apr-16	16	34.9	36.0	25.7	21.3	17.9	61.5
PAPA016	04-Apr-16	17	31.8	34.9	25.1	18.8	16.8	49.3
PAPA016	04-Apr-16	18	42.6	46.3	35.6	24.8	21.7	60.0
PAPA016	04-Apr-16	19	28.1	30.8	25.7	22.9	20.6	45.3
PAPA016	04-Apr-16	20	28.2	32.8	22.9	16.9	15.7	43.2
PAPA016	04-Apr-16	21	29.3	22.0	17.1	15.6	15.2	61.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	04-Apr-16	22	19.7	19.4	16.3	15.5	15.2	40.0
PAPA016	04-Apr-16	23	19.8	22.2	18.4	15.9	15.0	31.0
PAPA016	05-Apr-16	0	32.3	36.0	25.8	18.8	15.9	50.3
PAPA016	05-Apr-16	1	33.9	37.2	24.1	15.5	15.0	55.2
PAPA016	05-Apr-16	2	27.5	31.2	19.6	16.3	14.8	46.0
PAPA016	05-Apr-16	3	25.8	29.3	22.3	17.9	15.3	42.7
PAPA016	05-Apr-16	4	28.5	31.4	24.8	20.2	16.8	46.6
PAPA016	05-Apr-16	5	27.0	31.1	21.3	17.3	15.6	42.9
PAPA016	05-Apr-16	6	35.2	38.0	34.0	29.2	22.5	48.9
PAPA016	05-Apr-16	7	30.9	34.2	29.4	23.7	18.3	43.1
PAPA016	05-Apr-16	8	30.7	34.1	28.3	23.2	18.2	44.7
PAPA016	05-Apr-16	9	35.5	38.8	33.3	27.3	20.9	47.4
PAPA016	05-Apr-16	10	42.0	45.7	39.4	33.1	25.9	56.3
PAPA016	05-Apr-16	11	46.3	50.2	43.0	36.2	28.1	60.2
PAPA016	05-Apr-16	12	45.7	49.6	42.9	35.9	28.1	59.9
PAPA016	05-Apr-16	13	46.0	46.9	40.1	33.8	26.0	71.3
PAPA016	05-Apr-16	14	44.0	47.6	41.5	35.2	26.8	56.5
PAPA016	05-Apr-16	15	46.1	49.8	43.2	36.7	27.8	60.2
PAPA016	05-Apr-16	16	44.8	48.4	42.2	36.5	29.9	58.9
PAPA016	05-Apr-16	17	43.8	47.0	41.3	35.4	28.9	56.9
PAPA016	05-Apr-16	18	39.8	43.3	36.9	31.2	25.4	56.3
PAPA016	05-Apr-16	19	34.8	38.5	31.2	22.9	18.5	49.3
PAPA016	05-Apr-16	20	25.4	28.9	22.5	18.0	15.5	42.1
PAPA016	05-Apr-16	21	24.0	27.3	21.0	16.6	15.1	41.5
PAPA016	05-Apr-16	22	25.0	27.7	21.9	18.7	16.6	38.8
PAPA016	05-Apr-16	23	20.6	23.9	18.9	15.0	14.5	32.4
PAPA016	06-Apr-16	0	16.3	17.1	15.0	14.4	14.2	33.0
PAPA016	06-Apr-16	1	15.1	15.7	14.8	14.5	14.2	27.0
PAPA016	06-Apr-16	2	18.2	20.0	15.8	14.8	14.5	35.1
PAPA016	06-Apr-16	3	21.5	24.6	18.4	15.3	14.8	40.7
PAPA016	06-Apr-16	4	20.0	22.7	18.3	15.6	14.8	31.5
PAPA016	06-Apr-16	5	26.3	30.2	22.2	18.6	16.5	44.2
PAPA016	06-Apr-16	6	34.8	37.5	34.0	29.6	22.5	45.8
PAPA016	06-Apr-16	7	37.5	40.1	34.9	29.9	25.3	59.4
PAPA016	06-Apr-16	8	33.9	37.2	31.5	26.9	22.4	47.6
PAPA016	06-Apr-16	9	35.4	38.7	33.2	28.0	22.3	51.5
PAPA016	06-Apr-16	10	34.8	38.0	32.8	27.6	22.0	48.5
PAPA016	06-Apr-16	11	41.2	44.7	37.8	31.9	25.9	57.2
PAPA016	06-Apr-16	12	41.8	45.4	38.6	30.8	21.4	56.2
PAPA016	06-Apr-16	13	41.8	45.4	38.9	32.2	25.2	56.1
PAPA016	06-Apr-16	14	45.7	49.4	43.1	36.5	29.0	58.3
PAPA016	06-Apr-16	15	45.8	47.8	39.9	32.7	25.7	66.4
PAPA016	06-Apr-16	16	44.1	47.5	41.7	36.2	28.6	61.2
PAPA016	06-Apr-16	17	46.5	50.1	44.5	39.0	34.1	58.3
PAPA016	06-Apr-16	18	41.4	44.9	38.2	29.5	23.0	56.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	06-Apr-16	19	35.0	39.1	31.4	19.8	16.2	48.5
PAPA016	06-Apr-16	20	28.4	32.3	24.8	17.1	15.5	45.2
PAPA016	06-Apr-16	21	43.3	21.0	17.2	15.4	14.8	72.1
PAPA016	06-Apr-16	22	16.7	17.9	15.8	14.9	14.5	33.8
PAPA016	06-Apr-16	23	16.3	16.2	15.1	14.6	14.4	29.4
PAPA016	07-Apr-16	0	15.6	16.5	15.3	14.7	14.4	21.3
PAPA016	07-Apr-16	1	15.7	17.3	14.9	14.5	14.3	25.7
PAPA016	07-Apr-16	2	15.9	17.1	15.0	14.6	14.3	29.0
PAPA016	07-Apr-16	3	15.8	16.4	15.0	14.7	14.5	28.1
PAPA016	07-Apr-16	4	16.1	17.1	15.2	14.8	14.4	30.3
PAPA016	07-Apr-16	5	29.4	34.2	22.4	15.7	14.6	41.3
PAPA016	07-Apr-16	6	35.5	38.3	34.6	29.6	22.2	47.4
PAPA016	07-Apr-16	7	36.2	39.1	34.4	28.1	17.5	47.3
PAPA016	07-Apr-16	8	32.9	36.1	28.4	24.1	20.1	45.8
PAPA016	07-Apr-16	9	44.6	43.3	35.7	30.0	22.6	68.0
PAPA016	07-Apr-16	10	38.4	41.7	35.5	29.2	22.9	53.8
PAPA016	07-Apr-16	11	37.3	39.0	33.1	27.4	22.3	58.0
PAPA016	07-Apr-16	12	35.3	38.5	32.0	26.5	20.6	59.9
PAPA016	07-Apr-16	13	36.4	40.2	33.2	26.7	22.0	51.8
PAPA016	07-Apr-16	14	37.8	41.4	35.2	28.8	18.1	53.4
PAPA016	07-Apr-16	15	39.2	42.8	36.0	29.3	22.9	54.3
PAPA016	07-Apr-16	16	35.5	39.0	32.1	26.0	20.0	50.7
PAPA016	07-Apr-16	17	35.6	39.1	32.5	26.8	21.9	50.4
PAPA016	07-Apr-16	18	36.8	40.2	34.0	28.5	21.8	51.4
PAPA016	07-Apr-16	19	34.2	37.9	30.5	23.5	20.1	49.6
PAPA016	07-Apr-16	20	32.2	35.3	30.4	26.1	19.9	45.5
PAPA016	07-Apr-16	21	24.2	27.4	20.2	17.2	15.7	40.9
PAPA016	07-Apr-16	22	19.6	21.7	16.7	15.6	14.9	36.6
PAPA016	07-Apr-16	23	18.7	20.2	18.1	16.5	15.7	29.3
PAPA016	08-Apr-16	0	18.7	19.9	18.4	17.3	16.2	27.5
PAPA016	08-Apr-16	1	18.1	19.3	17.7	16.9	15.4	23.1
PAPA016	08-Apr-16	2	17.4	19.1	16.6	15.6	15.1	26.9
PAPA016	08-Apr-16	3	21.0	22.3	17.7	16.4	15.4	35.5
PAPA016	08-Apr-16	4	24.1	28.4	19.8	17.9	16.6	40.4
PAPA016	08-Apr-16	5	31.2	35.3	29.0	19.4	17.2	42.5
PAPA016	08-Apr-16	6	33.4	37.0	31.6	20.4	16.5	49.1
PAPA016	08-Apr-16	7	30.5	34.3	28.8	19.9	16.5	40.3
PAPA016	08-Apr-16	8	27.8	31.5	24.0	21.2	19.4	44.5
PAPA016	08-Apr-16	9	31.6	26.5	19.8	18.1	17.1	51.8
PAPA016	08-Apr-16	10	27.6	20.6	17.8	16.7	16.1	48.3
PAPA016	08-Apr-16	11	19.0	21.4	17.4	16.3	15.8	30.5
PAPA016	08-Apr-16	12	22.8	25.7	18.6	16.6	15.9	39.7
PAPA016	08-Apr-16	13	33.1	28.5	19.3	16.8	16.0	59.5
PAPA016	08-Apr-16	14	23.5	26.9	20.3	16.7	15.9	36.6
PAPA016	08-Apr-16	15	23.4	24.9	18.1	16.5	15.9	49.7

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	08-Apr-16	16	26.1	29.2	20.6	17.0	16.1	48.7
PAPA016	08-Apr-16	17	29.8	30.0	19.8	16.2	15.5	53.4
PAPA016	08-Apr-16	18	37.9	24.1	17.1	15.5	15.0	64.5
PAPA016	08-Apr-16	19	15.9	16.3	15.3	15.0	14.8	29.4
PAPA016	08-Apr-16	20	26.9	29.1	23.8	16.6	14.8	47.1
PAPA016	08-Apr-16	21	19.6	22.1	17.2	15.1	14.7	32.7
PAPA016	08-Apr-16	22	20.2	23.2	18.1	17.0	16.3	37.6
PAPA016	08-Apr-16	23	23.1	26.0	20.7	19.1	17.9	36.5
PAPA016	09-Apr-16	0	21.8	24.1	20.6	19.1	18.1	33.8
PAPA016	09-Apr-16	1	20.5	22.7	19.6	18.2	17.4	27.7
PAPA016	09-Apr-16	2	21.2	22.8	20.3	18.9	17.5	34.4
PAPA016	09-Apr-16	3	19.6	21.0	19.3	18.4	17.7	26.8
PAPA016	09-Apr-16	4	23.6	27.2	20.1	18.1	17.2	42.1
PAPA016	09-Apr-16	5	30.7	34.7	28.7	19.9	17.7	39.4
PAPA016	09-Apr-16	6	33.8	36.4	33.2	28.8	21.5	40.9
PAPA016	09-Apr-16	7	32.4	35.9	30.8	24.6	19.4	42.7
PAPA016	09-Apr-16	8	29.2	32.0	22.3	18.3	16.7	49.0
PAPA016	09-Apr-16	9	45.9	35.4	24.4	20.2	17.3	70.6
PAPA016	09-Apr-16	10	26.0	29.0	20.5	17.9	16.1	43.3
PAPA016	09-Apr-16	11	48.7	37.2	24.9	18.2	15.8	71.6
PAPA016	09-Apr-16	12	32.1	34.4	24.8	18.0	16.0	49.5
PAPA016	09-Apr-16	13	32.0	35.0	25.1	18.4	16.3	50.0
PAPA016	09-Apr-16	14	31.4	35.1	27.5	18.1	16.4	49.4
PAPA016	09-Apr-16	15	35.0	38.6	31.1	23.6	17.7	51.0
PAPA016	09-Apr-16	16	37.6	37.0	30.2	23.2	18.0	62.1
PAPA016	09-Apr-16	17	33.9	37.2	31.1	24.8	19.2	49.8
PAPA016	09-Apr-16	18	34.0	37.7	30.1	23.4	19.0	47.9
PAPA016	09-Apr-16	19	32.1	35.7	27.9	20.9	17.6	49.8
PAPA016	09-Apr-16	20	28.2	31.9	26.6	20.2	15.3	37.0
PAPA016	09-Apr-16	21	24.2	25.2	16.3	15.4	14.8	43.1
PAPA016	09-Apr-16	22	29.2	23.8	17.2	15.1	14.7	51.1
PAPA016	09-Apr-16	23	22.8	25.3	16.9	15.3	14.6	41.0
PAPA016	10-Apr-16	0	27.2	25.3	16.7	15.1	14.6	49.8
PAPA016	10-Apr-16	1	16.8	17.0	15.4	14.9	14.7	32.8
PAPA016	10-Apr-16	2	17.4	18.8	16.4	15.4	14.7	30.6
PAPA016	10-Apr-16	3	18.2	19.1	15.5	15.1	14.8	40.5
PAPA016	10-Apr-16	4	22.8	27.3	16.4	15.2	14.8	37.6
PAPA016	10-Apr-16	5	26.5	31.2	19.6	15.4	15.0	43.4
PAPA016	10-Apr-16	6	36.1	36.6	32.6	27.7	17.4	57.0
PAPA016	10-Apr-16	7	34.2	37.1	32.1	24.7	16.0	54.4
PAPA016	10-Apr-16	8	39.6	35.7	22.2	18.5	15.8	65.3
PAPA016	10-Apr-16	9	29.8	32.8	28.5	24.0	20.8	40.0
PAPA016	10-Apr-16	10	23.0	25.7	18.7	17.0	15.9	41.1
PAPA016	10-Apr-16	11	24.7	24.5	17.4	16.2	15.6	47.3
PAPA016	10-Apr-16	12	23.9	24.2	17.1	15.8	15.3	41.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA016	10-Apr-16	13	22.3	22.8	16.6	15.4	15.1	47.9
PAPA016	10-Apr-16	14	26.8	26.1	18.0	15.9	15.3	47.3
PAPA016	10-Apr-16	15	27.1	30.9	22.2	15.9	15.3	44.2
PAPA016	10-Apr-16	16	35.1	38.6	30.2	23.3	18.4	52.6
PAPA016	10-Apr-16	17	33.3	36.9	30.2	24.0	17.6	51.5
PAPA016	10-Apr-16	18	31.3	35.0	27.6	19.9	16.3	46.6
PAPA016	10-Apr-16	19	34.7	31.7	22.0	17.3	15.2	63.4
PAPA016	10-Apr-16	20	28.7	31.0	25.4	19.8	17.1	47.4
PAPA016	10-Apr-16	21	35.2	29.4	21.0	18.6	17.3	54.0
PAPA016	10-Apr-16	22	42.1	48.2	26.5	22.3	20.2	57.3
PAPA016	10-Apr-16	23	23.2	24.7	22.2	20.4	18.9	37.2
PAPA016	11-Apr-16	0	21.5	22.7	21.2	20.0	18.8	28.7
PAPA016	11-Apr-16	1	19.6	20.9	19.4	18.1	16.9	25.5
PAPA016	11-Apr-16	2	17.9	19.7	17.2	15.9	15.4	31.7
PAPA016	11-Apr-16	3	18.8	20.5	18.1	16.6	15.8	27.6
PAPA016	11-Apr-16	4	16.4	16.6	15.9	15.4	15.0	29.8
PAPA016	11-Apr-16	5	30.4	35.0	22.8	15.2	14.7	52.4
PAPA016	11-Apr-16	6	37.7	42.3	34.8	28.5	18.5	49.0
PAPA016	11-Apr-16	7	37.0	41.0	33.6	23.2	16.7	60.4
PAPA016	11-Apr-16	8	33.2	37.1	28.0	17.8	15.5	47.4
PAPA016	11-Apr-16	9	25.3	25.1	17.4	16.2	15.6	45.1
PAPA016	11-Apr-16	10	26.0	27.5	19.8	17.3	16.2	45.3
PAPA016	11-Apr-16	11	25.5	29.0	18.7	16.9	16.2	43.4
PAPA016	11-Apr-16	12	24.6	28.6	19.3	17.0	16.1	39.9
PAPA016	11-Apr-16	13	21.8	23.4	18.2	16.6	15.9	42.7
PAPA016	11-Apr-16	14	26.1	29.1	19.3	16.1	15.6	45.2
PAPA016	11-Apr-16	15	27.3	30.6	23.2	18.9	16.7	44.0
PAPA016	11-Apr-16	16	25.2	29.3	18.9	16.3	15.6	41.9
PAPA017	15-Apr-13	12	27.9	30.4	23.9	21.0	18.9	43.7
PAPA017	15-Apr-13	13	34.3	33.9	25.3	22.0	19.8	58.2
PAPA017	15-Apr-13	14	28.0	30.9	25.7	22.9	20.9	44.0
PAPA017	15-Apr-13	15	29.0	32.0	26.4	23.1	19.9	42.1
PAPA017	15-Apr-13	16	30.5	33.8	27.6	23.9	20.7	45.4
PAPA017	15-Apr-13	17	34.6	35.5	27.8	24.6	21.4	56.7
PAPA017	15-Apr-13	18	33.5	36.7	30.9	27.3	24.4	47.7
PAPA017	15-Apr-13	19	34.1	37.2	31.8	28.4	24.9	49.4
PAPA017	15-Apr-13	20	28.8	30.3	28.1	26.4	23.5	50.4
PAPA017	15-Apr-13	21	31.5	32.7	30.5	28.3	22.8	47.7
PAPA017	15-Apr-13	22	30.5	32.3	30.3	27.4	25.2	36.2
PAPA017	15-Apr-13	23	26.4	27.9	26.1	24.2	21.3	33.4
PAPA017	16-Apr-13	0	25.2	27.1	24.9	22.8	20.8	29.9
PAPA017	16-Apr-13	1	30.8	30.3	27.4	24.9	22.6	53.6
PAPA017	16-Apr-13	2	26.5	29.0	25.6	22.8	18.4	37.5
PAPA017	16-Apr-13	3	27.9	29.8	27.5	25.7	23.4	34.1
PAPA017	16-Apr-13	4	34.3	37.5	32.3	29.9	27.1	46.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	16-Apr-13	5	35.1	36.5	33.4	31.6	28.4	54.3
PAPA017	16-Apr-13	6	34.3	36.4	33.3	31.4	27.0	45.2
PAPA017	16-Apr-13	7	26.2	28.5	25.5	22.8	20.8	39.8
PAPA017	16-Apr-13	8	28.6	29.0	25.9	23.7	20.9	47.0
PAPA017	16-Apr-13	9	30.1	32.7	29.2	25.1	22.9	40.7
PAPA017	16-Apr-13	10	28.1	31.3	24.4	21.9	19.7	52.4
PAPA017	16-Apr-13	11	21.7	23.1	21.3	20.3	19.2	27.5
PAPA017	16-Apr-13	12	25.6	28.1	23.4	19.9	18.0	43.6
PAPA017	16-Apr-13	13	23.1	25.0	22.1	20.5	19.0	34.3
PAPA017	16-Apr-13	14	25.1	25.5	23.1	21.6	19.4	44.1
PAPA017	16-Apr-13	15	25.2	27.9	22.1	20.6	19.4	39.8
PAPA017	16-Apr-13	16	24.6	27.1	23.1	21.2	19.5	37.2
PAPA017	16-Apr-13	17	23.4	25.0	22.9	21.1	19.3	38.3
PAPA017	16-Apr-13	18	22.4	24.4	21.7	19.6	18.1	33.2
PAPA017	16-Apr-13	19	24.7	26.5	22.7	20.6	18.7	39.1
PAPA017	16-Apr-13	20	25.8	27.5	25.1	22.3	18.9	36.7
PAPA017	16-Apr-13	21	23.9	26.0	23.5	19.5	17.6	34.3
PAPA017	16-Apr-13	22	19.8	22.1	19.0	17.7	16.4	26.4
PAPA017	16-Apr-13	23	24.9	27.9	23.7	20.0	18.3	36.0
PAPA017	17-Apr-13	0	25.6	27.6	24.5	22.4	20.3	37.0
PAPA017	17-Apr-13	1	23.4	25.1	23.1	20.9	19.3	32.4
PAPA017	17-Apr-13	2	21.6	22.9	21.6	19.7	18.1	28.0
PAPA017	17-Apr-13	3	25.8	27.9	19.7	18.2	17.4	42.6
PAPA017	17-Apr-13	4	19.9	19.4	16.8	15.8	15.2	38.0
PAPA017	17-Apr-13	5	22.4	25.6	21.2	15.9	15.2	40.7
PAPA017	17-Apr-13	6	30.2	29.7	26.1	22.3	17.5	50.1
PAPA017	17-Apr-13	7	24.4	26.5	23.5	20.9	18.5	40.8
PAPA017	17-Apr-13	8	26.8	30.1	24.8	20.9	18.6	38.7
PAPA017	17-Apr-13	9	25.7	28.7	23.7	20.5	17.8	40.8
PAPA017	08-Apr-14	10	27.5	27.6	23.8	21.7	19.9	56.6
PAPA017	08-Apr-14	11	23.5	25.1	21.5	19.7	17.9	44.9
PAPA017	08-Apr-14	12	25.7	27.0	22.3	20.2	18.4	44.2
PAPA017	08-Apr-14	13	23.2	25.4	21.8	20.3	19.0	41.8
PAPA017	08-Apr-14	14	25.1	27.6	22.0	20.2	18.8	40.0
PAPA017	16-Apr-14	10	27.7	30.7	23.6	19.5	17.4	42.8
PAPA017	16-Apr-14	11	31.3	28.3	21.8	18.7	16.7	51.1
PAPA017	16-Apr-14	12	28.1	31.3	24.7	20.4	17.9	41.7
PAPA017	16-Apr-14	13	37.6	36.2	28.8	23.8	19.4	62.5
PAPA017	16-Apr-14	14	31.8	35.3	28.8	23.2	20.0	46.9
PAPA017	16-Apr-14	15	29.5	33.0	25.9	21.8	19.2	47.0
PAPA017	16-Apr-14	16	29.7	33.2	26.3	21.5	18.3	43.6
PAPA017	16-Apr-14	17	26.6	29.7	23.9	20.0	17.9	39.8
PAPA017	16-Apr-14	18	24.7	27.7	21.2	18.4	16.9	38.6
PAPA017	16-Apr-14	19	26.1	27.0	18.1	16.3	15.2	45.4
PAPA017	16-Apr-14	20	28.4	27.4	22.2	20.5	18.2	49.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	16-Apr-14	21	25.6	26.3	23.1	21.7	19.9	42.1
PAPA017	16-Apr-14	22	28.6	30.6	28.1	25.5	21.8	35.8
PAPA017	16-Apr-14	23	30.3	32.7	29.8	26.8	24.4	38.1
PAPA017	17-Apr-14	0	27.7	29.5	27.3	25.4	23.5	31.2
PAPA017	17-Apr-14	1	29.4	30.8	29.4	26.8	24.4	34.6
PAPA017	17-Apr-14	2	31.7	33.6	31.4	29.4	27.7	36.3
PAPA017	17-Apr-14	3	32.9	35.4	31.8	29.9	28.1	40.4
PAPA017	17-Apr-14	4	32.3	35.0	30.8	28.5	26.3	45.3
PAPA017	17-Apr-14	5	34.2	36.0	33.7	31.9	29.5	41.3
PAPA017	17-Apr-14	6	35.1	36.0	33.2	31.1	28.9	55.9
PAPA017	17-Apr-14	7	36.8	37.0	34.8	33.2	31.5	59.0
PAPA017	17-Apr-14	8	35.5	37.8	34.9	31.8	28.6	47.7
PAPA017	17-Apr-14	9	30.8	32.7	28.3	25.9	22.9	47.5
PAPA017	17-Apr-14	10	29.1	28.8	26.2	24.5	22.4	51.3
PAPA017	17-Apr-14	11	44.9	27.5	22.8	21.2	19.6	68.0
PAPA017	17-Apr-14	12	36.1	30.8	22.4	20.7	19.2	61.8
PAPA017	17-Apr-14	13	30.5	28.7	23.9	21.4	19.8	58.2
PAPA017	17-Apr-14	14	26.0	27.3	22.6	20.6	18.9	43.9
PAPA017	17-Apr-14	15	24.3	26.1	22.8	20.1	18.6	36.6
PAPA017	17-Apr-14	16	29.9	29.8	26.5	24.1	21.2	54.9
PAPA017	17-Apr-14	17	37.4	30.3	24.2	22.0	19.3	64.0
PAPA017	17-Apr-14	18	32.0	31.3	24.5	22.1	19.3	51.5
PAPA017	17-Apr-14	19	33.4	32.3	28.0	24.4	22.0	53.8
PAPA017	17-Apr-14	20	30.2	32.1	29.5	28.0	26.1	37.9
PAPA017	17-Apr-14	21	31.8	33.8	30.0	28.2	26.7	45.2
PAPA017	17-Apr-14	22	30.2	31.7	29.6	27.9	26.2	38.2
PAPA017	17-Apr-14	23	33.7	35.3	33.5	31.8	28.2	38.5
PAPA017	18-Apr-14	0	35.2	36.8	34.9	33.1	30.9	40.7
PAPA017	18-Apr-14	1	34.2	36.6	33.4	31.7	30.0	40.9
PAPA017	18-Apr-14	2	35.4	37.0	35.1	33.3	31.3	45.8
PAPA017	18-Apr-14	3	36.1	38.5	35.1	33.5	32.0	43.4
PAPA017	18-Apr-14	4	35.8	38.0	34.9	32.7	31.1	42.7
PAPA017	18-Apr-14	5	35.3	36.6	35.0	33.7	31.6	42.6
PAPA017	18-Apr-14	6	37.7	39.7	36.9	34.4	32.1	53.3
PAPA017	18-Apr-14	7	35.5	37.3	35.1	33.3	29.9	43.9
PAPA017	18-Apr-14	8	36.9	37.9	35.2	32.6	28.5	56.9
PAPA017	18-Apr-14	9	32.9	33.0	29.1	26.6	23.7	52.9
PAPA017	18-Apr-14	10	31.9	34.5	28.0	25.3	23.3	50.7
PAPA017	18-Apr-14	11	29.8	31.8	26.6	23.4	20.6	50.2
PAPA017	18-Apr-14	12	41.6	45.7	37.7	23.9	19.7	55.3
PAPA017	18-Apr-14	13	36.2	40.1	32.1	24.3	20.3	51.0
PAPA017	18-Apr-14	14	29.9	33.2	26.4	22.1	19.7	48.0
PAPA017	18-Apr-14	15	24.0	25.9	20.7	19.0	17.6	41.6
PAPA017	03-Apr-15	10	30.1	29.4	22.3	19.3	18.3	53.2
PAPA017	03-Apr-15	11	29.0	28.0	21.5	19.5	18.4	52.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	03-Apr-15	12	29.3	31.7	22.3	19.4	18.2	47.5
PAPA017	03-Apr-15	13	24.6	26.7	20.9	19.2	18.1	41.2
PAPA017	03-Apr-15	14	23.0	26.1	20.6	18.8	17.9	35.5
PAPA017	03-Apr-15	15	26.2	28.3	20.5	19.0	18.2	46.0
PAPA017	03-Apr-15	16	23.9	28.2	19.5	18.3	17.5	38.3
PAPA017	03-Apr-15	17	23.5	26.6	19.2	18.1	17.4	42.5
PAPA017	03-Apr-15	18	27.1	28.4	20.2	18.2	17.1	47.6
PAPA017	03-Apr-15	19	23.5	25.4	22.6	20.3	18.4	44.9
PAPA017	03-Apr-15	20	29.3	30.9	28.7	26.7	24.6	38.9
PAPA017	03-Apr-15	21	26.1	27.7	25.8	23.9	22.0	32.7
PAPA017	03-Apr-15	22	25.4	27.8	24.2	22.5	20.3	35.1
PAPA017	03-Apr-15	23	21.6	23.3	21.3	19.4	17.8	26.1
PAPA017	04-Apr-15	0	23.9	25.3	22.6	19.7	17.9	44.2
PAPA017	04-Apr-15	1	27.6	29.3	27.7	23.6	19.8	34.8
PAPA017	04-Apr-15	2	30.5	32.1	30.3	28.3	25.7	37.3
PAPA017	04-Apr-15	3	33.5	35.3	33.3	29.9	28.0	39.1
PAPA017	04-Apr-15	4	32.1	34.9	31.0	29.1	28.0	40.3
PAPA017	04-Apr-15	5	31.6	33.7	31.0	29.3	27.3	38.1
PAPA017	04-Apr-15	6	35.3	37.3	34.9	32.6	30.3	42.5
PAPA017	04-Apr-15	7	34.7	36.3	34.1	32.3	29.8	46.0
PAPA017	04-Apr-15	8	42.7	36.3	28.4	22.7	20.3	69.8
PAPA017	04-Apr-15	9	32.1	34.2	24.1	21.8	20.2	60.2
PAPA017	04-Apr-15	10	40.3	36.4	23.2	21.5	19.7	61.9
PAPA017	04-Apr-15	11	26.1	27.1	24.3	22.6	20.5	46.1
PAPA017	04-Apr-15	12	24.4	26.1	23.8	22.1	20.8	31.2
PAPA017	04-Apr-15	13	23.8	25.7	22.7	20.6	18.9	43.7
PAPA017	04-Apr-15	14	25.3	26.8	20.0	18.4	17.3	48.6
PAPA017	04-Apr-15	15	41.2	45.3	36.9	18.3	17.5	54.4
PAPA017	04-Apr-15	16	41.6	45.1	38.8	32.0	23.4	54.2
PAPA017	04-Apr-15	17	42.1	46.2	38.2	29.3	21.5	55.6
PAPA017	04-Apr-15	18	38.9	42.9	35.1	26.4	20.9	53.9
PAPA017	04-Apr-15	19	31.5	35.9	25.9	16.8	15.6	46.1
PAPA017	04-Apr-15	20	24.1	24.6	19.7	18.0	15.7	48.5
PAPA017	04-Apr-15	21	20.9	23.3	18.3	17.4	16.4	34.6
PAPA017	04-Apr-15	22	22.1	22.4	19.9	18.5	17.1	45.5
PAPA017	04-Apr-15	23	22.3	25.5	20.3	18.3	17.0	32.6
PAPA017	05-Apr-15	0	32.0	33.9	31.9	26.8	24.2	40.6
PAPA017	05-Apr-15	1	32.8	34.9	32.3	30.6	28.9	38.2
PAPA017	05-Apr-15	2	38.8	40.8	38.5	35.4	32.5	44.4
PAPA017	05-Apr-15	3	30.3	34.5	25.6	22.3	20.8	40.6
PAPA017	05-Apr-15	4	26.8	29.1	25.0	23.1	21.7	40.5
PAPA017	05-Apr-15	5	28.0	30.5	26.0	24.7	22.8	39.2
PAPA017	05-Apr-15	6	35.0	37.9	30.6	26.0	23.5	50.7
PAPA017	05-Apr-15	7	35.7	39.1	31.1	27.8	25.4	53.1
PAPA017	05-Apr-15	8	41.8	37.5	27.8	24.1	22.1	59.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	05-Apr-15	9	42.2	33.1	26.3	22.5	20.1	68.5
PAPA017	05-Apr-15	10	30.2	33.9	24.2	21.7	19.6	47.0
PAPA017	05-Apr-15	11	30.9	33.4	22.7	20.1	18.6	57.3
PAPA017	05-Apr-15	12	30.8	33.2	24.7	20.6	18.6	50.7
PAPA017	05-Apr-15	13	53.2	51.6	39.7	32.0	22.5	74.7
PAPA017	05-Apr-15	14	43.6	47.5	40.5	32.6	25.4	57.7
PAPA017	05-Apr-15	15	44.0	47.8	40.7	33.3	25.6	56.9
PAPA017	05-Apr-15	16	42.8	46.5	39.7	32.1	21.4	57.8
PAPA017	05-Apr-15	17	38.1	41.9	34.1	25.8	19.9	53.8
PAPA017	05-Apr-15	18	34.6	39.0	29.0	19.8	17.5	48.4
PAPA017	05-Apr-15	19	26.5	29.1	25.4	22.5	20.2	39.0
PAPA017	05-Apr-15	20	28.4	29.9	28.0	26.5	24.4	40.1
PAPA017	05-Apr-15	21	30.3	32.4	29.5	27.7	24.8	37.5
PAPA017	05-Apr-15	22	31.1	32.2	30.3	27.9	26.0	45.4
PAPA017	05-Apr-15	23	32.6	35.1	32.1	28.6	26.2	40.9
PAPA017	06-Apr-15	0	37.1	40.7	33.7	29.7	26.7	50.8
PAPA017	06-Apr-15	1	35.6	39.4	31.4	29.2	27.3	47.4
PAPA017	06-Apr-15	2	28.8	31.8	27.9	24.4	22.5	36.5
PAPA017	06-Apr-15	3	28.8	30.6	28.5	25.7	22.9	35.0
PAPA017	06-Apr-15	4	31.8	34.7	30.6	28.8	27.1	40.1
PAPA017	06-Apr-15	5	30.1	32.6	29.3	25.6	22.8	39.2
PAPA017	06-Apr-15	6	31.9	34.4	29.5	25.0	22.5	45.6
PAPA017	06-Apr-15	7	32.5	35.9	30.5	25.9	22.3	45.4
PAPA017	06-Apr-15	8	32.9	32.5	24.4	20.9	18.9	60.8
PAPA017	06-Apr-15	9	32.9	31.1	23.4	21.8	20.3	55.6
PAPA017	06-Apr-15	10	25.5	26.3	23.6	21.2	19.3	40.9
PAPA017	06-Apr-15	11	44.3	48.6	22.9	20.7	19.3	61.7
PAPA017	06-Apr-15	12	53.5	33.9	25.7	20.9	18.8	78.4
PAPA017	06-Apr-15	13	37.7	41.7	32.4	23.0	19.2	55.8
PAPA017	06-Apr-15	14	38.5	42.6	34.8	27.9	19.7	51.3
PAPA017	06-Apr-15	15	41.0	45.0	37.4	28.6	21.7	55.0
PAPA017	06-Apr-15	16	43.4	47.2	40.6	33.0	23.2	55.5
PAPA017	06-Apr-15	17	39.4	43.2	36.1	29.1	23.2	53.4
PAPA017	06-Apr-15	18	36.7	40.4	32.9	26.6	22.1	54.4
PAPA017	06-Apr-15	19	33.2	36.6	31.2	26.1	21.4	46.7
PAPA017	06-Apr-15	20	31.0	34.2	28.5	24.5	22.4	44.8
PAPA017	06-Apr-15	21	26.3	28.9	24.9	22.0	19.6	39.7
PAPA017	06-Apr-15	22	24.4	26.5	23.7	21.7	19.6	33.7
PAPA017	06-Apr-15	23	23.6	25.5	23.0	21.2	19.2	29.6
PAPA017	07-Apr-15	0	24.4	26.6	23.6	21.5	19.6	32.2
PAPA017	07-Apr-15	1	28.3	31.3	26.9	24.5	22.2	36.3
PAPA017	07-Apr-15	2	28.1	30.3	27.5	24.6	22.5	36.9
PAPA017	07-Apr-15	3	29.0	31.0	28.8	26.0	22.8	34.7
PAPA017	07-Apr-15	4	29.8	32.6	28.8	25.8	22.7	37.2
PAPA017	07-Apr-15	5	29.0	32.2	27.4	24.3	20.8	45.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	07-Apr-15	6	33.7	35.0	27.8	23.7	20.5	54.0
PAPA017	07-Apr-15	7	31.3	32.5	25.0	20.2	18.1	51.2
PAPA017	07-Apr-15	8	27.5	31.2	23.5	20.8	18.5	44.0
PAPA017	07-Apr-15	9	30.5	34.0	25.8	23.5	21.3	45.4
PAPA017	07-Apr-15	10	49.3	29.3	24.3	23.0	21.7	78.4
PAPA017	07-Apr-15	11	29.4	29.4	26.3	24.4	21.7	48.0
PAPA017	07-Apr-15	12	29.3	30.9	27.9	25.9	24.2	49.3
PAPA017	07-Apr-15	13	28.3	29.8	26.5	24.2	21.6	45.2
PAPA017	07-Apr-15	14	35.7	33.0	22.5	20.6	19.3	64.4
PAPA017	07-Apr-15	15	40.7	30.6	22.1	19.6	18.5	68.5
PAPA017	07-Apr-15	16	41.1	34.1	24.8	20.6	18.1	69.3
PAPA017	07-Apr-15	17	34.6	38.2	30.4	25.4	22.2	51.4
PAPA017	07-Apr-15	18	29.3	28.3	25.0	22.7	20.8	50.0
PAPA017	07-Apr-15	19	33.1	36.3	31.5	26.2	23.3	44.0
PAPA017	07-Apr-15	20	36.8	39.5	34.4	31.8	28.5	51.0
PAPA017	07-Apr-15	21	34.3	36.6	34.0	30.2	25.7	42.5
PAPA017	07-Apr-15	22	34.4	36.1	34.3	32.0	29.0	39.5
PAPA017	07-Apr-15	23	34.6	36.1	34.4	32.5	30.1	39.5
PAPA017	08-Apr-15	0	32.4	34.2	32.1	29.9	27.8	40.8
PAPA017	08-Apr-15	1	30.3	32.4	29.8	27.7	26.0	35.5
PAPA017	08-Apr-15	2	28.2	29.8	27.8	26.5	25.2	33.6
PAPA017	08-Apr-15	3	27.5	29.2	27.3	25.1	23.0	31.5
PAPA017	08-Apr-15	4	30.5	33.0	30.1	25.8	23.7	38.9
PAPA017	08-Apr-15	5	27.6	30.3	26.2	24.7	22.9	35.3
PAPA017	08-Apr-15	6	34.2	37.0	33.4	28.3	24.7	42.6
PAPA017	08-Apr-15	7	35.0	37.4	34.2	32.3	30.6	42.9
PAPA017	08-Apr-15	8	33.0	35.4	30.5	22.9	20.2	60.1
PAPA017	08-Apr-15	9	42.8	32.7	24.5	21.5	19.7	64.4
PAPA017	08-Apr-15	10	37.8	35.9	21.7	19.0	17.7	56.7
PAPA017	08-Apr-15	11	21.8	22.9	18.8	17.9	17.2	39.9
PAPA017	08-Apr-15	12	23.5	26.3	20.0	18.1	17.0	42.9
PAPA017	08-Apr-15	13	25.7	29.1	22.3	19.2	17.4	38.9
PAPA017	08-Apr-15	14	27.5	30.6	24.7	21.5	19.1	41.6
PAPA017	08-Apr-15	15	30.0	33.7	27.5	22.3	18.3	45.9
PAPA017	08-Apr-15	16	32.6	35.9	30.8	25.6	21.5	44.6
PAPA017	08-Apr-15	17	33.8	37.1	30.3	23.4	19.7	48.6
PAPA017	08-Apr-15	18	27.4	30.7	25.3	20.9	18.6	41.1
PAPA017	08-Apr-15	19	26.0	29.3	23.5	21.5	19.7	40.0
PAPA017	08-Apr-15	20	30.8	34.1	28.1	24.4	21.2	45.0
PAPA017	08-Apr-15	21	28.2	30.7	27.1	25.0	22.1	38.1
PAPA017	08-Apr-15	22	24.4	27.2	23.3	19.6	17.9	32.0
PAPA017	08-Apr-15	23	25.8	27.6	25.3	23.0	20.0	33.8
PAPA017	09-Apr-15	0	25.6	28.1	24.1	22.1	20.7	37.8
PAPA017	09-Apr-15	1	31.3	33.2	30.3	28.2	25.3	44.0
PAPA017	09-Apr-15	2	31.7	34.0	31.2	28.6	27.0	37.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	09-Apr-15	3	30.3	34.6	27.8	22.1	19.9	40.0
PAPA017	09-Apr-15	4	25.5	27.2	25.1	22.7	20.0	33.7
PAPA017	09-Apr-15	5	28.6	32.0	27.5	21.5	18.9	36.2
PAPA017	09-Apr-15	6	32.1	34.9	30.7	27.8	24.0	43.6
PAPA017	09-Apr-15	7	34.4	37.3	32.6	30.0	25.8	47.8
PAPA017	09-Apr-15	8	28.9	32.1	26.4	23.4	21.3	42.8
PAPA017	09-Apr-15	9	26.6	29.5	23.6	21.8	20.1	41.4
PAPA017	09-Apr-15	10	29.5	27.0	22.8	21.0	19.5	53.4
PAPA017	09-Apr-15	11	29.0	29.3	23.5	21.3	19.5	48.3
PAPA017	09-Apr-15	12	28.0	28.1	24.3	22.5	21.0	46.3
PAPA017	09-Apr-15	13	24.9	25.3	22.5	20.9	19.3	43.7
PAPA017	09-Apr-15	14	27.6	28.2	23.8	22.1	20.2	52.6
PAPA017	09-Apr-15	15	27.5	27.4	23.7	22.1	20.8	45.2
PAPA017	09-Apr-15	16	38.0	30.4	22.6	21.1	19.0	65.5
PAPA017	09-Apr-15	17	23.9	25.1	21.0	19.3	18.3	40.3
PAPA017	09-Apr-15	18	22.8	24.7	21.0	18.4	17.2	39.9
PAPA017	09-Apr-15	19	21.2	23.4	18.8	17.8	16.9	37.8
PAPA017	09-Apr-15	20	27.8	28.4	23.6	21.1	19.0	48.2
PAPA017	09-Apr-15	21	24.9	26.5	24.7	22.8	21.1	29.4
PAPA017	09-Apr-15	22	27.0	28.3	25.9	25.0	22.9	40.3
PAPA017	09-Apr-15	23	25.8	27.0	25.3	22.3	20.0	36.3
PAPA017	10-Apr-15	0	27.1	30.3	25.8	21.8	20.3	46.3
PAPA017	10-Apr-15	1	28.4	31.9	27.6	21.0	18.8	34.4
PAPA017	10-Apr-15	2	21.3	23.1	20.4	19.0	17.5	27.7
PAPA017	10-Apr-15	3	24.7	26.9	23.9	21.0	19.4	33.2
PAPA017	10-Apr-15	4	23.9	25.2	23.8	22.6	21.3	27.6
PAPA017	10-Apr-15	5	27.4	30.1	26.4	22.7	20.6	34.8
PAPA017	10-Apr-15	6	31.3	34.0	30.4	27.4	25.4	39.0
PAPA017	10-Apr-15	7	33.5	35.9	31.5	29.4	26.6	48.2
PAPA017	10-Apr-15	8	34.7	33.8	30.2	27.1	22.8	60.1
PAPA017	10-Apr-15	9	26.1	28.2	24.3	22.7	20.4	41.1
PAPA017	10-Apr-15	10	23.9	25.3	22.8	21.2	19.8	42.1
PAPA017	10-Apr-15	11	61.8	45.3	22.2	19.9	18.7	81.0
PAPA017	10-Apr-15	12	46.3	40.5	23.8	20.3	19.1	69.8
PAPA017	10-Apr-15	13	47.2	35.4	20.6	19.2	18.2	70.7
PAPA017	10-Apr-15	14	31.3	29.8	20.5	19.6	18.8	54.8
PAPA017	10-Apr-15	15	26.4	25.3	19.8	18.9	17.9	46.6
PAPA017	10-Apr-15	16	24.6	24.8	21.0	19.3	18.3	48.8
PAPA017	10-Apr-15	17	24.3	23.7	20.0	18.5	17.7	45.4
PAPA017	10-Apr-15	18	22.7	22.6	19.8	18.7	17.7	52.8
PAPA017	10-Apr-15	19	22.9	24.5	20.6	19.1	17.8	37.7
PAPA017	10-Apr-15	20	26.4	26.5	23.8	21.8	19.4	48.0
PAPA017	10-Apr-15	21	25.3	27.2	24.7	22.7	20.7	31.1
PAPA017	10-Apr-15	22	23.1	24.7	22.8	21.5	19.6	28.2
PAPA017	10-Apr-15	23	27.8	31.5	25.1	22.4	20.4	36.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	11-Apr-15	0	31.2	33.3	30.6	27.0	24.4	38.4
PAPA017	11-Apr-15	1	32.3	33.8	31.7	30.0	28.5	40.5
PAPA017	11-Apr-15	2	32.6	34.3	32.4	30.3	28.9	36.6
PAPA017	11-Apr-15	3	31.2	33.3	30.9	27.9	26.5	38.6
PAPA017	11-Apr-15	4	32.6	35.3	31.8	28.3	26.9	40.4
PAPA017	11-Apr-15	5	28.5	29.9	27.2	23.8	21.2	50.3
PAPA017	11-Apr-15	6	34.2	37.5	31.8	27.8	24.2	46.4
PAPA017	11-Apr-15	7	33.8	36.7	31.6	26.9	23.9	45.9
PAPA017	11-Apr-15	8	47.5	50.6	30.5	23.9	21.3	65.6
PAPA017	11-Apr-15	9	40.7	36.5	25.1	23.0	21.1	63.1
PAPA017	11-Apr-15	10	31.6	30.4	22.3	20.7	19.4	53.9
PAPA017	11-Apr-15	11	53.3	34.8	25.8	21.9	19.4	78.7
PAPA017	01-Apr-16	11	35.5	34.0	27.6	24.6	21.7	59.0
PAPA017	01-Apr-16	12	25.6	28.3	22.7	20.0	18.4	42.7
PAPA017	01-Apr-16	13	26.4	29.3	23.2	19.5	18.2	40.6
PAPA017	01-Apr-16	14	32.7	33.7	25.7	20.7	18.0	51.8
PAPA017	01-Apr-16	15	38.5	35.0	24.8	18.3	17.1	60.7
PAPA017	01-Apr-16	16	42.5	32.2	25.7	20.1	17.4	68.6
PAPA017	01-Apr-16	17	24.5	27.9	21.9	18.4	17.0	37.9
PAPA017	01-Apr-16	18	26.5	29.5	24.0	20.2	18.0	46.7
PAPA017	01-Apr-16	19	23.2	24.9	20.2	17.9	16.7	38.6
PAPA017	01-Apr-16	20	24.7	27.0	23.3	20.5	17.4	38.4
PAPA017	01-Apr-16	21	26.9	30.2	24.6	22.0	18.9	41.4
PAPA017	01-Apr-16	22	24.9	27.6	24.2	20.0	18.6	31.7
PAPA017	01-Apr-16	23	27.1	28.4	26.2	24.1	21.5	40.4
PAPA017	02-Apr-16	0	25.8	26.9	25.1	23.7	22.5	40.5
PAPA017	02-Apr-16	1	25.1	26.2	24.9	23.9	22.2	28.8
PAPA017	02-Apr-16	2	24.1	25.2	23.9	22.8	21.7	28.7
PAPA017	02-Apr-16	3	23.9	25.4	23.7	22.2	21.0	27.1
PAPA017	02-Apr-16	4	21.6	22.7	21.5	20.2	19.1	28.2
PAPA017	02-Apr-16	5	25.9	27.4	25.4	23.6	21.9	35.8
PAPA017	02-Apr-16	6	27.6	30.0	26.8	24.9	22.8	33.7
PAPA017	02-Apr-16	7	38.1	30.1	27.1	25.4	23.4	61.5
PAPA017	02-Apr-16	8	29.0	28.0	23.5	20.9	19.1	48.2
PAPA017	02-Apr-16	9	25.4	27.7	23.1	20.6	18.6	44.3
PAPA017	02-Apr-16	10	27.8	27.6	20.4	18.8	17.7	51.8
PAPA017	02-Apr-16	11	29.6	22.7	19.3	17.7	16.6	56.3
PAPA017	02-Apr-16	12	24.8	26.9	20.7	17.2	16.3	43.6
PAPA017	02-Apr-16	13	40.8	35.3	23.9	18.8	16.7	63.3
PAPA017	02-Apr-16	14	28.2	31.9	24.0	18.4	16.4	44.8
PAPA017	02-Apr-16	15	37.5	35.5	29.3	22.9	17.7	63.4
PAPA017	02-Apr-16	16	30.2	33.1	27.6	22.6	18.8	46.0
PAPA017	02-Apr-16	17	29.6	33.2	27.1	22.3	17.8	40.9
PAPA017	02-Apr-16	18	28.6	31.7	27.0	22.8	18.3	39.7
PAPA017	02-Apr-16	19	34.5	29.1	21.4	17.2	16.2	57.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	02-Apr-16	20	29.3	26.2	20.9	18.5	16.4	60.5
PAPA017	02-Apr-16	21	20.5	23.3	18.3	15.8	15.1	33.2
PAPA017	02-Apr-16	22	20.1	19.8	17.2	15.8	15.2	42.0
PAPA017	02-Apr-16	23	17.3	18.6	16.8	15.8	15.3	26.4
PAPA017	03-Apr-16	0	19.9	22.0	19.2	18.1	17.0	25.4
PAPA017	03-Apr-16	1	21.9	23.5	21.7	19.6	17.9	27.4
PAPA017	03-Apr-16	2	23.1	25.0	22.7	20.8	18.4	28.0
PAPA017	03-Apr-16	3	22.0	23.6	21.8	19.6	18.6	28.8
PAPA017	03-Apr-16	4	19.6	21.1	19.5	17.4	16.3	27.5
PAPA017	03-Apr-16	5	22.1	24.3	21.2	18.6	16.9	33.7
PAPA017	03-Apr-16	6	26.3	29.6	23.6	21.1	18.8	37.0
PAPA017	03-Apr-16	7	26.9	28.9	24.7	21.8	18.4	49.4
PAPA017	03-Apr-16	8	24.6	25.5	19.8	17.4	16.4	48.8
PAPA017	03-Apr-16	9	36.4	33.0	18.9	17.2	16.5	58.3
PAPA017	03-Apr-16	10	22.9	24.4	19.4	17.5	16.7	46.3
PAPA017	03-Apr-16	11	31.0	32.6	21.8	18.1	16.8	53.4
PAPA017	03-Apr-16	12	30.6	34.2	26.9	21.6	17.3	43.4
PAPA017	03-Apr-16	13	31.1	34.8	27.4	21.8	17.8	49.1
PAPA017	03-Apr-16	14	27.3	30.7	23.5	18.5	16.7	43.4
PAPA017	03-Apr-16	15	26.7	30.4	23.4	18.4	16.4	39.8
PAPA017	03-Apr-16	16	26.1	30.1	21.3	17.5	16.2	41.6
PAPA017	03-Apr-16	17	24.0	26.6	22.0	19.1	17.5	40.7
PAPA017	03-Apr-16	18	20.4	22.7	19.4	17.3	16.1	31.6
PAPA017	03-Apr-16	19	22.1	24.6	20.4	17.5	16.2	36.0
PAPA017	03-Apr-16	20	22.3	24.5	20.8	19.5	18.1	34.3
PAPA017	03-Apr-16	21	28.8	32.9	24.5	19.8	17.6	42.9
PAPA017	03-Apr-16	22	29.9	34.1	24.4	18.8	17.1	45.2
PAPA017	03-Apr-16	23	27.2	24.8	22.1	19.5	17.7	50.8
PAPA017	04-Apr-16	0	25.5	27.5	24.8	22.6	20.1	36.6
PAPA017	04-Apr-16	1	22.8	24.3	22.6	20.8	19.8	26.4
PAPA017	04-Apr-16	2	22.2	24.3	21.1	19.5	18.3	37.0
PAPA017	04-Apr-16	3	24.7	26.2	24.4	23.0	21.5	33.1
PAPA017	04-Apr-16	4	23.2	24.5	22.9	21.6	20.5	28.6
PAPA017	04-Apr-16	5	24.2	25.3	23.6	21.9	20.7	39.4
PAPA017	04-Apr-16	6	37.8	31.1	24.7	23.1	21.9	63.5
PAPA017	04-Apr-16	7	28.2	28.9	26.0	23.8	21.8	46.1
PAPA017	04-Apr-16	8	39.8	32.8	27.1	23.0	20.7	63.7
PAPA017	04-Apr-16	9	22.9	25.5	20.0	17.7	16.8	39.9
PAPA017	04-Apr-16	10	21.2	20.5	18.6	17.5	16.6	44.5
PAPA017	04-Apr-16	11	23.1	25.8	19.3	17.8	16.8	41.8
PAPA017	04-Apr-16	12	26.0	29.2	21.4	18.0	16.8	46.0
PAPA017	04-Apr-16	13	33.1	37.0	27.9	21.3	17.1	47.4
PAPA017	04-Apr-16	14	31.3	35.5	25.5	18.0	16.6	45.8
PAPA017	04-Apr-16	15	30.1	33.7	23.6	18.7	16.2	47.3
PAPA017	04-Apr-16	16	36.7	34.8	26.3	18.3	15.9	64.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	04-Apr-16	17	30.6	34.0	25.9	16.3	15.3	48.2
PAPA017	04-Apr-16	18	35.8	39.9	30.0	23.2	17.7	52.1
PAPA017	04-Apr-16	19	28.3	31.4	26.5	22.9	19.9	49.3
PAPA017	04-Apr-16	20	24.3	26.7	23.0	21.0	19.1	39.1
PAPA017	04-Apr-16	21	24.7	25.5	22.8	20.3	19.0	40.9
PAPA017	04-Apr-16	22	23.5	24.7	23.1	21.7	19.8	31.8
PAPA017	04-Apr-16	23	24.4	26.9	23.0	18.6	16.6	33.2
PAPA017	05-Apr-16	0	23.4	26.3	21.1	17.1	15.7	39.4
PAPA017	05-Apr-16	1	26.5	26.0	19.9	16.9	15.5	47.2
PAPA017	05-Apr-16	2	28.4	32.0	22.3	17.3	15.9	47.9
PAPA017	05-Apr-16	3	21.0	23.1	20.2	18.6	17.1	29.8
PAPA017	05-Apr-16	4	21.3	23.3	20.0	18.3	16.8	34.4
PAPA017	05-Apr-16	5	22.1	24.4	20.1	18.0	16.5	35.9
PAPA017	05-Apr-16	6	27.7	28.5	23.1	20.4	17.9	52.3
PAPA017	05-Apr-16	7	25.8	29.3	22.4	18.7	16.4	40.8
PAPA017	05-Apr-16	8	34.5	34.9	26.0	18.7	16.6	56.7
PAPA017	05-Apr-16	9	37.9	41.6	32.2	25.8	21.8	53.3
PAPA017	05-Apr-16	10	37.1	40.5	34.7	28.3	21.4	50.5
PAPA017	05-Apr-16	11	42.4	46.1	40.3	34.0	22.9	55.5
PAPA017	05-Apr-16	12	42.0	45.7	39.6	33.5	26.2	55.5
PAPA017	05-Apr-16	13	42.3	44.2	37.7	31.0	23.8	65.4
PAPA017	05-Apr-16	14	40.0	43.5	37.8	31.7	23.6	51.9
PAPA017	05-Apr-16	15	43.1	46.6	41.1	34.4	26.1	55.9
PAPA017	05-Apr-16	16	41.8	45.4	40.0	34.1	26.6	52.7
PAPA017	05-Apr-16	17	40.7	44.4	38.5	31.6	23.0	55.3
PAPA017	05-Apr-16	18	35.7	39.0	33.2	27.1	22.4	48.6
PAPA017	05-Apr-16	19	33.0	35.4	29.2	23.8	20.1	52.5
PAPA017	05-Apr-16	20	24.2	27.4	21.1	17.8	15.9	42.2
PAPA017	05-Apr-16	21	20.8	21.5	19.0	17.5	16.3	37.9
PAPA017	05-Apr-16	22	24.6	27.0	23.0	20.8	18.6	43.2
PAPA017	05-Apr-16	23	22.9	25.0	22.2	20.1	18.1	30.4
PAPA017	06-Apr-16	0	20.7	22.8	19.3	17.8	16.7	31.4
PAPA017	06-Apr-16	1	19.4	20.9	18.7	17.3	16.4	30.0
PAPA017	06-Apr-16	2	24.6	26.1	22.7	20.5	18.5	41.5
PAPA017	06-Apr-16	3	22.7	25.6	21.4	18.0	16.6	31.7
PAPA017	06-Apr-16	4	24.1	27.3	22.5	18.5	17.2	32.9
PAPA017	06-Apr-16	5	24.3	26.6	23.1	21.2	19.2	33.8
PAPA017	06-Apr-16	6	29.4	32.7	26.3	23.9	20.8	43.3
PAPA017	06-Apr-16	7	31.5	34.4	28.1	25.2	21.9	46.2
PAPA017	06-Apr-16	8	36.0	34.1	28.0	24.9	22.2	61.0
PAPA017	06-Apr-16	9	29.7	32.5	27.1	23.4	20.5	49.9
PAPA017	06-Apr-16	10	31.8	30.3	25.3	22.2	19.1	59.7
PAPA017	06-Apr-16	11	36.8	33.9	26.5	22.4	19.2	70.5
PAPA017	06-Apr-16	12	32.5	36.2	29.8	22.5	18.7	45.3
PAPA017	06-Apr-16	13	40.4	44.4	36.8	29.8	24.0	53.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	06-Apr-16	14	42.8	46.4	40.6	34.7	27.9	54.7
PAPA017	06-Apr-16	15	40.5	44.1	37.8	31.6	23.9	55.7
PAPA017	06-Apr-16	16	39.9	43.7	37.0	30.9	22.4	52.7
PAPA017	06-Apr-16	17	40.7	44.0	37.2	31.2	25.9	59.2
PAPA017	06-Apr-16	18	31.5	35.5	28.7	20.7	18.2	42.9
PAPA017	06-Apr-16	19	27.0	30.7	23.8	19.9	17.6	42.8
PAPA017	06-Apr-16	20	24.5	27.1	22.8	20.0	17.3	43.0
PAPA017	06-Apr-16	21	18.6	19.5	17.0	15.7	15.2	33.4
PAPA017	06-Apr-16	22	18.1	19.1	16.6	15.1	14.8	41.2
PAPA017	06-Apr-16	23	18.5	17.9	16.4	15.5	15.0	34.1
PAPA017	07-Apr-16	0	19.9	21.7	19.5	17.4	16.2	25.1
PAPA017	07-Apr-16	1	21.2	23.8	20.2	17.7	16.2	28.9
PAPA017	07-Apr-16	2	17.1	18.2	16.7	16.1	15.4	30.5
PAPA017	07-Apr-16	3	19.7	21.2	19.0	17.8	16.1	27.7
PAPA017	07-Apr-16	4	19.8	19.8	18.3	17.2	16.0	39.6
PAPA017	07-Apr-16	5	21.9	24.6	18.7	17.3	16.4	37.2
PAPA017	07-Apr-16	6	53.5	42.4	24.7	21.1	18.8	70.6
PAPA017	07-Apr-16	7	38.1	37.2	25.2	21.7	18.3	66.0
PAPA017	07-Apr-16	8	30.4	30.9	25.2	22.4	19.8	47.9
PAPA017	07-Apr-16	9	36.8	37.0	31.7	26.8	22.7	58.2
PAPA017	07-Apr-16	10	45.4	38.2	31.9	26.3	21.9	67.1
PAPA017	07-Apr-16	11	34.7	37.0	30.5	25.7	20.8	52.9
PAPA017	07-Apr-16	12	33.3	35.5	30.3	25.7	22.2	56.4
PAPA017	07-Apr-16	13	36.6	39.2	33.1	27.3	22.4	58.3
PAPA017	07-Apr-16	14	36.9	40.6	34.7	28.4	22.3	51.1
PAPA017	07-Apr-16	15	33.3	36.9	30.4	24.5	19.9	44.9
PAPA017	07-Apr-16	16	32.0	35.7	29.1	23.0	18.5	46.7
PAPA017	07-Apr-16	17	33.5	37.1	31.2	25.2	20.8	50.1
PAPA017	07-Apr-16	18	35.5	39.2	33.2	27.2	21.4	46.5
PAPA017	07-Apr-16	19	31.6	34.8	29.2	25.9	21.9	44.7
PAPA017	07-Apr-16	20	29.1	31.3	27.8	25.8	23.4	40.7
PAPA017	07-Apr-16	21	26.9	29.2	26.0	24.0	22.2	33.8
PAPA017	07-Apr-16	22	23.2	24.6	22.5	20.6	19.2	36.9
PAPA017	07-Apr-16	23	24.4	26.9	23.4	19.2	18.1	33.0
PAPA017	08-Apr-16	0	23.4	25.7	23.0	18.8	17.6	30.3
PAPA017	08-Apr-16	1	21.9	24.7	20.6	18.4	17.3	27.2
PAPA017	08-Apr-16	2	25.4	26.5	25.3	24.0	22.1	28.1
PAPA017	08-Apr-16	3	25.1	26.5	24.7	23.6	21.8	29.5
PAPA017	08-Apr-16	4	22.3	25.0	21.2	17.1	15.8	28.0
PAPA017	08-Apr-16	5	25.4	26.8	23.0	20.1	17.3	46.8
PAPA017	08-Apr-16	6	37.9	42.2	30.5	23.5	19.2	53.4
PAPA017	08-Apr-16	7	39.5	41.5	29.4	22.5	19.1	64.0
PAPA017	08-Apr-16	8	33.1	31.2	24.0	20.6	18.3	54.6
PAPA017	08-Apr-16	9	39.5	25.6	19.8	17.8	16.7	60.2
PAPA017	08-Apr-16	10	24.9	20.1	17.9	16.9	16.2	51.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	08-Apr-16	11	27.6	20.3	18.1	17.2	16.4	52.5
PAPA017	08-Apr-16	12	22.7	23.8	19.1	17.4	16.5	41.5
PAPA017	08-Apr-16	13	31.4	28.0	19.6	18.1	17.0	56.1
PAPA017	08-Apr-16	14	22.5	25.1	19.6	17.6	16.6	39.8
PAPA017	08-Apr-16	15	22.9	25.7	19.1	17.5	16.6	42.0
PAPA017	08-Apr-16	16	24.3	26.2	20.3	17.7	16.5	46.3
PAPA017	08-Apr-16	17	24.6	26.3	19.9	17.6	16.4	47.4
PAPA017	08-Apr-16	18	27.2	23.1	18.2	17.1	16.1	52.5
PAPA017	08-Apr-16	19	19.6	21.2	19.4	17.5	16.3	24.2
PAPA017	08-Apr-16	20	25.7	26.1	21.5	20.1	19.0	44.0
PAPA017	08-Apr-16	21	23.1	24.2	22.2	20.1	18.7	45.4
PAPA017	08-Apr-16	22	24.5	25.5	24.2	23.0	21.2	40.7
PAPA017	08-Apr-16	23	26.2	27.7	25.5	24.3	22.9	39.0
PAPA017	09-Apr-16	0	24.5	25.7	24.1	22.9	20.9	40.9
PAPA017	09-Apr-16	1	23.9	25.0	23.6	22.4	20.3	40.4
PAPA017	09-Apr-16	2	23.6	24.0	23.2	22.4	21.1	45.6
PAPA017	09-Apr-16	3	23.1	24.2	22.9	21.6	20.4	35.6
PAPA017	09-Apr-16	4	23.1	24.1	22.8	21.8	20.7	34.2
PAPA017	09-Apr-16	5	24.9	26.9	23.8	21.8	20.4	42.8
PAPA017	09-Apr-16	6	27.0	28.7	26.4	24.8	22.6	37.6
PAPA017	09-Apr-16	7	39.4	31.3	26.5	24.3	22.0	67.9
PAPA017	09-Apr-16	8	23.7	25.4	18.7	16.9	15.9	43.5
PAPA017	09-Apr-16	9	22.3	23.7	18.9	17.3	16.3	41.7
PAPA017	09-Apr-16	10	28.9	28.7	20.0	17.4	16.4	52.2
PAPA017	09-Apr-16	11	30.8	30.7	22.4	18.2	16.4	57.8
PAPA017	09-Apr-16	12	28.1	32.0	24.3	19.0	16.3	43.9
PAPA017	09-Apr-16	13	33.1	35.1	26.7	19.3	16.7	52.7
PAPA017	09-Apr-16	14	31.1	34.4	27.7	21.5	17.6	50.2
PAPA017	09-Apr-16	15	30.5	33.8	26.6	20.5	17.3	50.1
PAPA017	09-Apr-16	16	31.5	35.4	28.6	22.8	18.4	43.4
PAPA017	09-Apr-16	17	28.4	31.4	24.5	19.1	16.4	53.3
PAPA017	09-Apr-16	18	29.8	31.5	25.1	21.0	17.1	48.0
PAPA017	09-Apr-16	19	27.6	30.8	25.0	21.0	18.4	40.9
PAPA017	09-Apr-16	20	23.8	25.5	21.5	18.9	17.0	46.9
PAPA017	09-Apr-16	21	24.1	28.2	18.2	16.0	15.3	40.2
PAPA017	09-Apr-16	22	26.8	24.5	16.3	15.6	15.1	48.0
PAPA017	09-Apr-16	23	26.4	30.8	22.8	18.4	15.8	42.9
PAPA017	10-Apr-16	0	29.4	32.0	26.6	22.2	19.4	46.6
PAPA017	10-Apr-16	1	22.5	24.9	21.6	19.1	17.5	30.9
PAPA017	10-Apr-16	2	21.9	23.6	21.2	19.5	17.7	32.3
PAPA017	10-Apr-16	3	22.0	23.9	21.5	19.0	17.2	34.4
PAPA017	10-Apr-16	4	21.6	22.8	20.9	19.3	17.8	41.2
PAPA017	10-Apr-16	5	24.2	26.8	23.4	19.3	17.5	38.7
PAPA017	10-Apr-16	6	47.0	28.0	24.7	22.2	19.1	69.3
PAPA017	10-Apr-16	7	27.5	27.9	23.6	21.2	18.7	49.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA017	10-Apr-16	8	24.3	26.1	21.2	18.6	17.1	41.4
PAPA017	10-Apr-16	9	37.6	41.8	35.7	27.8	23.5	46.3
PAPA017	10-Apr-16	10	21.8	25.3	19.1	17.0	16.2	36.6
PAPA017	10-Apr-16	11	30.0	27.4	18.6	17.4	16.4	55.8
PAPA017	10-Apr-16	12	25.2	24.5	17.0	16.1	15.6	52.0
PAPA017	10-Apr-16	13	21.3	23.4	16.9	15.9	15.5	37.9
PAPA017	10-Apr-16	14	26.8	30.2	20.7	18.7	16.3	45.6
PAPA017	10-Apr-16	15	33.1	31.1	21.2	18.1	16.8	61.1
PAPA017	10-Apr-16	16	30.1	33.5	25.7	21.0	17.0	47.0
PAPA017	10-Apr-16	17	31.5	35.3	28.5	22.6	19.0	45.7
PAPA017	10-Apr-16	18	27.5	31.1	25.0	20.5	16.7	40.4
PAPA017	10-Apr-16	19	25.9	28.1	22.6	19.5	16.8	43.7
PAPA017	10-Apr-16	20	25.5	27.5	24.0	21.9	20.2	40.4
PAPA017	10-Apr-16	21	25.9	27.7	25.1	23.2	21.5	39.7
PAPA017	10-Apr-16	22	23.8	25.2	23.2	21.9	20.4	34.6
PAPA017	10-Apr-16	23	23.3	24.6	22.9	21.7	20.0	34.0
PAPA017	11-Apr-16	0	22.3	23.5	22.0	20.8	19.4	27.6
PAPA017	11-Apr-16	1	21.0	22.3	20.8	19.1	17.3	25.8
PAPA017	11-Apr-16	2	19.9	20.9	19.8	18.6	17.0	24.1
PAPA017	11-Apr-16	3	21.8	23.3	21.4	19.8	18.4	30.6
PAPA017	11-Apr-16	4	21.9	23.0	21.8	20.4	18.8	26.0
PAPA017	11-Apr-16	5	24.7	22.9	20.7	19.8	18.2	54.9
PAPA017	11-Apr-16	6	23.3	25.7	21.5	18.3	16.2	49.5
PAPA017	11-Apr-16	7	27.8	26.8	23.2	20.3	18.2	54.2
PAPA017	11-Apr-16	8	33.3	24.6	19.3	17.2	16.2	56.9
PAPA017	11-Apr-16	9	34.7	23.9	18.1	16.9	16.1	64.2
PAPA017	11-Apr-16	10	22.8	21.9	19.1	17.8	16.8	44.4
PAPA017	11-Apr-16	11	21.4	22.2	18.9	17.6	16.8	38.8
PAPA017	11-Apr-16	12	21.5	24.5	17.7	16.8	16.0	37.5
PAPA017	11-Apr-16	13	20.0	22.2	17.3	16.5	15.6	42.6
PAPA017	11-Apr-16	14	30.3	35.0	23.2	17.8	16.7	51.1
PAPA017	11-Apr-16	15	26.3	28.9	23.3	20.3	17.6	44.9
PAPA018	15-Apr-13	12	27.8	31.6	21.2	17.9	16.4	44.4
PAPA018	15-Apr-13	13	35.8	33.8	24.7	18.8	16.5	59.1
PAPA018	15-Apr-13	14	28.0	31.6	23.9	19.4	17.1	45.2
PAPA018	15-Apr-13	15	30.4	34.2	26.4	20.5	17.7	48.8
PAPA018	15-Apr-13	16	29.9	33.6	26.6	21.0	17.3	42.6
PAPA018	15-Apr-13	17	33.4	37.2	27.2	21.4	17.7	49.8
PAPA018	15-Apr-13	18	36.9	40.7	34.1	28.1	22.0	49.3
PAPA018	15-Apr-13	19	33.6	37.2	30.4	24.4	17.9	47.7
PAPA018	15-Apr-13	20	24.6	27.6	22.0	19.8	17.8	37.0
PAPA018	15-Apr-13	21	35.9	27.9	24.9	20.5	17.7	61.4
PAPA018	15-Apr-13	22	26.7	29.1	25.9	23.8	21.7	35.9
PAPA018	15-Apr-13	23	25.5	27.8	24.6	22.4	20.3	40.0
PAPA018	16-Apr-13	0	25.0	28.9	22.8	18.6	16.2	32.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	16-Apr-13	1	27.9	29.5	26.5	24.5	21.6	47.6
PAPA018	16-Apr-13	2	29.0	30.9	28.7	26.4	24.3	34.6
PAPA018	16-Apr-13	3	32.0	33.6	31.6	29.9	25.2	40.6
PAPA018	16-Apr-13	4	36.6	40.0	34.0	31.3	29.5	48.5
PAPA018	16-Apr-13	5	35.9	39.4	33.0	31.1	28.9	50.7
PAPA018	16-Apr-13	6	35.9	38.7	33.7	31.0	26.8	49.2
PAPA018	16-Apr-13	7	27.1	29.7	26.0	21.8	19.9	37.0
PAPA018	16-Apr-13	8	28.2	29.3	23.7	21.2	19.5	46.5
PAPA018	16-Apr-13	9	29.0	31.9	25.3	19.4	17.4	50.1
PAPA018	16-Apr-13	10	25.1	28.3	22.6	20.1	18.6	37.5
PAPA018	16-Apr-13	11	21.7	23.4	20.8	19.6	18.0	34.6
PAPA018	16-Apr-13	12	27.7	30.8	26.0	20.7	18.7	41.4
PAPA018	16-Apr-13	13	22.6	24.7	21.5	19.8	18.1	34.1
PAPA018	16-Apr-13	14	25.2	27.7	22.9	20.0	18.7	42.2
PAPA018	16-Apr-13	15	30.8	28.6	20.6	19.0	17.3	56.7
PAPA018	16-Apr-13	16	22.4	25.4	19.6	18.0	16.9	42.2
PAPA018	16-Apr-13	17	23.0	26.5	20.9	17.8	16.8	32.4
PAPA018	16-Apr-13	18	22.8	26.1	17.5	16.2	15.3	39.8
PAPA018	16-Apr-13	19	20.8	22.9	17.8	15.8	15.1	34.1
PAPA018	16-Apr-13	20	22.0	24.1	20.2	16.9	15.6	36.4
PAPA018	16-Apr-13	21	19.8	22.4	18.6	15.4	14.5	31.1
PAPA018	16-Apr-13	22	18.2	20.2	17.0	16.1	15.2	27.5
PAPA018	16-Apr-13	23	24.5	27.6	24.1	16.0	14.8	31.7
PAPA018	17-Apr-13	0	27.7	31.3	25.5	21.7	19.0	35.7
PAPA018	17-Apr-13	1	28.4	30.9	27.4	25.5	23.6	37.5
PAPA018	17-Apr-13	2	28.5	31.1	27.7	24.5	22.4	36.7
PAPA018	17-Apr-13	3	24.2	25.2	22.8	20.6	19.0	40.6
PAPA018	17-Apr-13	4	20.9	20.9	16.8	15.2	14.9	40.5
PAPA018	17-Apr-13	5	17.9	21.5	15.9	14.9	14.4	25.6
PAPA018	17-Apr-13	6	27.4	30.6	26.1	21.6	19.6	36.5
PAPA018	17-Apr-13	7	33.2	36.9	30.4	24.6	19.2	45.3
PAPA018	17-Apr-13	8	23.2	25.9	21.2	18.9	16.7	35.3
PAPA018	17-Apr-13	9	24.6	27.5	23.2	20.0	17.7	35.4
PAPA018	17-Apr-13	10	27.6	31.0	23.9	19.5	17.4	42.2
PAPA018	08-Apr-14	11	23.2	24.9	19.9	17.7	16.2	43.1
PAPA018	08-Apr-14	12	27.6	28.8	21.5	18.1	16.7	51.3
PAPA018	08-Apr-14	13	24.7	28.0	20.8	17.9	16.0	43.6
PAPA018	08-Apr-14	14	28.3	32.2	24.0	18.7	16.6	45.0
PAPA018	08-Apr-14	15	26.7	30.3	22.6	17.3	15.9	43.3
PAPA018	08-Apr-14	16	29.3	30.9	23.5	18.7	15.9	47.9
PAPA018	08-Apr-14	17	28.2	31.3	22.4	17.4	15.6	45.0
PAPA018	08-Apr-14	18	26.4	24.3	16.8	15.4	14.7	47.0
PAPA018	08-Apr-14	19	29.7	28.7	22.1	18.2	16.7	50.2
PAPA018	08-Apr-14	20	33.4	30.0	16.7	15.6	14.8	62.8
PAPA018	08-Apr-14	21	24.5	24.8	21.1	16.0	14.9	45.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	08-Apr-14	22	18.0	20.8	16.1	14.9	14.1	22.7
PAPA018	08-Apr-14	23	17.2	19.1	16.9	15.1	13.9	20.8
PAPA018	09-Apr-14	0	14.8	15.3	14.6	14.1	13.8	30.0
PAPA018	09-Apr-14	1	14.5	15.1	14.3	13.8	13.5	22.4
PAPA018	09-Apr-14	2	14.3	14.7	14.2	13.9	13.6	19.3
PAPA018	09-Apr-14	3	14.4	15.0	14.1	13.8	13.6	22.3
PAPA018	09-Apr-14	4	14.3	14.6	14.2	14.0	13.8	17.4
PAPA018	09-Apr-14	5	16.6	18.7	15.1	14.5	14.0	28.9
PAPA018	09-Apr-14	6	29.8	33.4	26.9	20.9	17.0	42.4
PAPA018	09-Apr-14	7	30.8	34.2	27.5	22.7	18.5	56.1
PAPA018	09-Apr-14	8	36.5	34.2	23.2	19.5	18.0	62.2
PAPA018	09-Apr-14	9	53.9	38.8	20.5	18.1	15.9	73.1
PAPA018	09-Apr-14	10	26.7	27.6	19.2	16.5	15.3	51.0
PAPA018	09-Apr-14	11	26.3	28.5	20.3	17.2	15.4	46.8
PAPA018	09-Apr-14	12	32.3	35.5	28.2	21.7	17.3	51.2
PAPA018	09-Apr-14	13	31.0	34.7	26.9	20.5	17.5	48.0
PAPA018	09-Apr-14	14	35.7	39.5	32.1	25.5	19.5	49.5
PAPA018	09-Apr-14	15	35.7	39.4	32.3	25.3	19.0	49.9
PAPA018	09-Apr-14	16	33.9	37.6	29.9	23.6	18.6	48.8
PAPA018	09-Apr-14	17	31.8	35.4	28.3	22.5	17.2	46.1
PAPA018	09-Apr-14	18	35.9	38.8	30.9	24.8	17.4	56.2
PAPA018	09-Apr-14	19	24.9	26.7	18.2	14.7	14.0	45.5
PAPA018	09-Apr-14	20	26.6	30.0	21.1	17.7	15.9	42.5
PAPA018	09-Apr-14	21	20.0	19.6	16.3	14.9	14.4	38.4
PAPA018	09-Apr-14	22	25.1	26.7	16.8	15.3	14.3	46.3
PAPA018	09-Apr-14	23	17.3	18.8	16.9	15.7	15.0	22.4
PAPA018	10-Apr-14	0	26.7	30.0	21.6	16.0	14.5	44.6
PAPA018	10-Apr-14	1	21.4	23.6	18.8	16.2	14.9	37.9
PAPA018	10-Apr-14	2	16.1	17.3	15.9	15.2	14.6	20.2
PAPA018	10-Apr-14	3	17.1	18.3	16.3	15.5	14.7	26.9
PAPA018	10-Apr-14	4	18.4	20.1	16.9	14.9	14.2	32.9
PAPA018	10-Apr-14	5	18.0	19.0	17.1	15.5	14.8	34.2
PAPA018	10-Apr-14	6	28.0	31.9	24.2	18.6	15.8	45.1
PAPA018	10-Apr-14	7	45.9	39.0	25.0	18.7	15.6	66.6
PAPA018	10-Apr-14	8	37.2	30.9	22.3	19.2	16.9	64.5
PAPA018	03-Apr-15	16	23.6	26.3	18.3	15.4	14.9	47.3
PAPA018	03-Apr-15	17	34.6	26.3	17.4	15.1	14.8	61.8
PAPA018	03-Apr-15	18	24.5	27.2	18.6	15.5	14.7	42.7
PAPA018	03-Apr-15	19	20.7	23.7	17.4	15.3	14.5	40.4
PAPA018	03-Apr-15	20	24.4	28.4	17.5	14.8	14.3	39.4
PAPA018	03-Apr-15	21	16.9	17.3	15.1	14.4	14.1	31.6
PAPA018	03-Apr-15	22	19.7	20.5	14.7	14.3	14.1	37.6
PAPA018	03-Apr-15	23	15.9	15.4	14.6	14.3	14.0	34.0
PAPA018	04-Apr-15	0	23.8	27.8	15.5	14.7	14.4	40.8
PAPA018	04-Apr-15	1	27.0	31.0	15.6	14.7	14.3	42.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	04-Apr-15	2	24.1	23.3	15.5	14.5	14.2	43.5
PAPA018	04-Apr-15	3	23.7	27.8	19.4	15.4	14.7	39.7
PAPA018	04-Apr-15	4	27.2	31.1	19.8	17.9	15.7	42.1
PAPA018	04-Apr-15	5	19.5	21.2	19.3	16.6	15.5	32.2
PAPA018	04-Apr-15	6	31.2	36.1	24.2	19.9	16.9	45.7
PAPA018	04-Apr-15	7	32.9	35.2	26.8	23.5	19.8	50.6
PAPA018	04-Apr-15	8	53.6	42.0	29.9	20.5	16.2	73.5
PAPA018	04-Apr-15	9	36.0	26.6	19.5	16.6	15.4	55.6
PAPA018	04-Apr-15	10	31.0	29.3	19.5	16.9	15.7	53.7
PAPA018	04-Apr-15	11	42.3	32.8	22.2	17.8	15.5	72.2
PAPA018	04-Apr-15	12	29.7	27.8	18.6	16.4	15.4	54.4
PAPA018	04-Apr-15	13	45.9	28.7	18.9	16.3	15.7	71.4
PAPA018	04-Apr-15	14	35.5	38.1	27.2	17.2	15.6	56.5
PAPA018	04-Apr-15	15	38.7	42.2	33.6	26.1	18.6	54.9
PAPA018	04-Apr-15	16	38.9	43.0	34.5	26.0	19.1	55.0
PAPA018	04-Apr-15	17	38.4	41.9	34.5	26.3	20.5	55.3
PAPA018	04-Apr-15	18	38.8	42.7	35.4	29.1	24.5	53.4
PAPA018	04-Apr-15	19	31.6	35.0	26.4	19.7	16.4	51.5
PAPA018	04-Apr-15	20	21.9	23.8	16.8	14.2	14.0	47.3
PAPA018	04-Apr-15	21	19.7	21.6	14.2	14.1	14.0	39.5
PAPA018	04-Apr-15	22	16.1	15.6	14.3	14.2	14.0	30.7
PAPA018	04-Apr-15	23	15.0	15.6	14.5	14.3	14.1	29.9
PAPA018	05-Apr-15	0	18.1	20.1	17.1	14.5	14.2	31.6
PAPA018	05-Apr-15	1	21.9	24.3	21.4	18.3	16.6	31.1
PAPA018	05-Apr-15	2	24.5	26.6	23.9	21.8	19.2	30.4
PAPA018	05-Apr-15	3	22.1	24.3	21.2	19.3	17.3	30.4
PAPA018	05-Apr-15	4	20.4	21.4	19.9	18.6	17.2	31.6
PAPA018	05-Apr-15	5	26.5	26.9	22.3	20.3	18.3	48.8
PAPA018	05-Apr-15	6	34.1	37.8	30.6	25.8	21.3	45.2
PAPA018	05-Apr-15	7	35.3	38.7	31.4	26.2	21.6	49.0
PAPA018	05-Apr-15	8	28.9	32.1	25.2	20.9	16.7	50.7
PAPA018	05-Apr-15	9	28.6	33.0	21.4	17.4	15.9	46.2
PAPA018	05-Apr-15	10	27.1	30.3	20.0	16.5	15.3	45.9
PAPA018	05-Apr-15	11	26.7	29.7	20.3	17.0	15.8	48.6
PAPA018	05-Apr-15	12	32.2	34.9	25.1	18.8	16.4	56.4
PAPA018	05-Apr-15	13	40.4	44.3	36.6	29.7	23.1	54.7
PAPA018	05-Apr-15	14	38.5	42.2	34.0	26.3	19.3	58.5
PAPA018	05-Apr-15	15	42.3	46.3	38.5	31.9	25.8	55.9
PAPA018	05-Apr-15	16	41.4	45.1	36.9	30.3	24.0	56.6
PAPA018	05-Apr-15	17	38.6	41.8	33.1	26.2	20.5	57.5
PAPA018	05-Apr-15	18	32.9	36.2	26.8	20.1	16.0	56.8
PAPA018	05-Apr-15	19	24.9	26.3	20.7	18.5	16.8	44.7
PAPA018	05-Apr-15	20	22.6	24.9	21.0	19.1	17.7	33.0
PAPA018	05-Apr-15	21	18.6	19.0	17.6	16.8	16.1	34.4
PAPA018	05-Apr-15	22	21.9	20.2	17.7	16.8	16.0	40.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	05-Apr-15	23	21.9	24.4	20.7	18.0	16.7	36.2
PAPA018	06-Apr-15	0	26.4	27.0	24.0	21.8	19.3	45.8
PAPA018	06-Apr-15	1	25.7	27.7	25.3	23.2	21.0	31.8
PAPA018	06-Apr-15	2	22.6	24.2	22.0	20.7	19.0	32.6
PAPA018	06-Apr-15	3	18.8	21.7	16.9	15.4	14.8	32.0
PAPA018	06-Apr-15	4	17.7	20.2	15.9	14.9	14.5	28.1
PAPA018	06-Apr-15	5	23.6	25.3	19.5	16.0	14.7	40.9
PAPA018	06-Apr-15	6	33.8	38.0	29.9	23.9	17.7	49.1
PAPA018	06-Apr-15	7	34.1	37.5	32.3	23.7	15.8	50.0
PAPA018	06-Apr-15	8	34.5	33.2	23.5	19.4	16.4	66.2
PAPA018	06-Apr-15	9	27.7	28.7	22.7	19.3	17.9	47.1
PAPA018	06-Apr-15	10	24.9	23.5	18.1	16.7	16.1	49.8
PAPA018	06-Apr-15	11	31.1	32.6	23.2	17.5	16.0	53.5
PAPA018	06-Apr-15	12	25.1	28.3	21.2	17.3	15.5	41.4
PAPA018	06-Apr-15	13	37.1	40.8	32.8	24.9	15.7	51.7
PAPA018	06-Apr-15	14	36.7	40.5	32.6	22.7	17.7	52.8
PAPA018	06-Apr-15	15	36.8	40.5	31.7	24.6	20.2	53.8
PAPA018	06-Apr-15	16	40.1	43.6	36.1	29.8	25.6	55.7
PAPA018	06-Apr-15	17	37.8	41.5	34.4	28.0	23.5	50.7
PAPA018	06-Apr-15	18	36.2	39.9	32.8	26.3	21.4	51.4
PAPA018	06-Apr-15	19	34.6	38.2	31.4	26.2	21.9	48.1
PAPA018	06-Apr-15	20	31.2	34.5	28.2	24.3	20.8	47.1
PAPA018	06-Apr-15	21	22.5	24.5	21.2	19.3	17.8	36.6
PAPA018	06-Apr-15	22	23.9	26.3	22.9	19.2	17.4	36.6
PAPA018	06-Apr-15	23	19.5	21.0	19.1	17.6	16.5	27.1
PAPA018	07-Apr-15	0	23.0	26.4	21.1	17.9	16.4	35.3
PAPA018	07-Apr-15	1	27.0	28.4	26.8	25.4	23.9	36.4
PAPA018	07-Apr-15	2	27.8	29.5	27.5	25.8	22.7	32.4
PAPA018	07-Apr-15	3	26.5	28.8	25.8	23.4	21.9	34.4
PAPA018	07-Apr-15	4	25.7	27.9	25.2	22.4	21.1	31.0
PAPA018	07-Apr-15	5	25.3	27.6	24.7	22.0	20.0	35.0
PAPA018	07-Apr-15	6	27.4	29.2	25.8	23.1	18.4	43.8
PAPA018	07-Apr-15	7	28.8	27.7	19.9	16.5	15.3	48.2
PAPA018	07-Apr-15	8	26.6	23.2	17.1	15.9	15.1	54.4
PAPA018	07-Apr-15	9	22.6	24.3	18.3	16.7	15.6	43.2
PAPA018	07-Apr-15	10	28.4	24.5	17.5	16.3	15.5	48.5
PAPA018	07-Apr-15	11	27.2	24.3	21.4	18.8	16.6	47.1
PAPA018	07-Apr-15	12	26.5	26.4	23.4	21.8	20.1	53.8
PAPA018	07-Apr-15	13	22.6	23.3	19.1	18.1	17.0	41.5
PAPA018	07-Apr-15	14	27.6	30.2	19.7	17.6	16.5	46.2
PAPA018	07-Apr-15	15	25.0	26.2	18.7	16.8	16.2	44.2
PAPA018	07-Apr-15	16	39.9	35.7	24.0	16.4	15.8	64.6
PAPA018	07-Apr-15	17	30.5	33.5	27.4	23.6	20.5	46.7
PAPA018	07-Apr-15	18	28.3	29.0	22.7	18.4	15.9	47.4
PAPA018	07-Apr-15	19	25.5	27.7	21.1	17.7	16.2	45.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	07-Apr-15	20	29.0	25.3	21.4	19.3	17.6	52.2
PAPA018	07-Apr-15	21	22.9	21.1	18.9	17.2	16.2	42.2
PAPA018	07-Apr-15	22	20.8	22.1	19.9	18.4	17.3	32.9
PAPA018	07-Apr-15	23	23.8	25.3	23.7	20.9	19.0	30.6
PAPA018	08-Apr-15	0	25.2	25.9	22.4	19.7	18.5	42.9
PAPA018	08-Apr-15	1	22.2	24.6	21.6	17.7	16.1	31.9
PAPA018	08-Apr-15	2	21.1	23.2	20.7	18.0	16.5	30.8
PAPA018	08-Apr-15	3	17.5	18.4	17.3	16.6	15.9	22.9
PAPA018	08-Apr-15	4	19.5	21.6	18.4	17.0	15.9	31.9
PAPA018	08-Apr-15	5	21.0	22.5	19.2	17.4	15.8	36.5
PAPA018	08-Apr-15	6	26.4	29.0	25.1	19.6	16.4	41.6
PAPA018	08-Apr-15	7	29.3	32.6	27.4	23.1	19.9	41.6
PAPA018	08-Apr-15	8	28.4	30.9	27.4	24.2	20.6	38.1
PAPA018	08-Apr-15	9	30.6	28.8	22.8	18.5	16.0	49.8
PAPA018	08-Apr-15	10	27.8	31.4	21.1	16.5	15.0	44.6
PAPA018	08-Apr-15	11	17.9	19.8	15.9	15.1	14.8	35.7
PAPA018	08-Apr-15	12	29.1	21.8	16.6	15.2	14.9	59.5
PAPA018	08-Apr-15	13	25.8	28.6	20.8	16.4	15.1	49.9
PAPA018	08-Apr-15	14	26.7	30.0	22.8	18.1	15.8	42.2
PAPA018	08-Apr-15	15	27.7	31.1	23.0	17.4	15.2	44.9
PAPA018	08-Apr-15	16	31.4	35.2	27.5	21.5	17.2	46.4
PAPA018	08-Apr-15	17	35.7	39.7	29.2	20.3	18.0	50.1
PAPA018	08-Apr-15	18	26.6	29.5	23.8	21.7	19.2	41.2
PAPA018	08-Apr-15	19	24.5	27.1	22.1	20.7	18.9	39.9
PAPA018	08-Apr-15	20	26.9	29.9	23.7	21.7	19.5	40.5
PAPA018	08-Apr-15	21	24.8	26.0	22.9	21.0	19.4	41.8
PAPA018	08-Apr-15	22	20.8	22.7	20.4	17.7	15.6	26.4
PAPA018	08-Apr-15	23	21.9	23.4	21.4	19.7	17.9	31.1
PAPA018	09-Apr-15	0	24.9	25.4	22.3	20.0	18.8	43.5
PAPA018	09-Apr-15	1	26.0	28.7	24.5	22.1	19.6	36.6
PAPA018	09-Apr-15	2	23.1	25.0	22.5	20.7	18.6	29.7
PAPA018	09-Apr-15	3	24.1	27.0	23.0	19.5	17.3	31.4
PAPA018	09-Apr-15	4	19.2	21.7	17.9	16.3	15.0	30.5
PAPA018	09-Apr-15	5	21.8	22.5	19.6	17.4	16.5	51.4
PAPA018	09-Apr-15	6	27.8	31.2	25.8	22.5	19.4	39.0
PAPA018	09-Apr-15	7	25.2	27.9	23.9	20.7	16.6	37.0
PAPA018	09-Apr-15	8	34.9	26.2	19.1	15.8	14.8	69.8
PAPA018	09-Apr-15	9	24.2	21.0	16.1	14.9	14.5	53.3
PAPA018	09-Apr-15	10	19.3	21.5	16.7	15.5	14.8	35.4
PAPA018	09-Apr-15	11	27.5	27.8	16.8	15.7	15.1	52.4
PAPA018	09-Apr-15	12	21.6	24.1	18.2	16.2	15.6	39.4
PAPA018	09-Apr-15	13	21.4	24.3	17.6	16.4	15.7	37.7
PAPA018	09-Apr-15	14	28.9	31.1	20.0	16.4	15.4	50.2
PAPA018	09-Apr-15	15	22.7	25.6	18.3	15.8	15.1	41.3
PAPA018	09-Apr-15	16	24.8	28.1	20.2	16.3	14.8	42.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	09-Apr-15	17	21.9	25.0	19.9	18.1	16.2	34.4
PAPA018	09-Apr-15	18	21.5	23.4	19.5	17.3	15.4	40.9
PAPA018	09-Apr-15	19	22.9	26.1	20.0	16.2	15.2	39.5
PAPA018	09-Apr-15	20	24.5	23.3	17.1	15.2	14.7	45.8
PAPA018	09-Apr-15	21	16.9	18.0	16.6	15.7	14.9	22.9
PAPA018	09-Apr-15	22	20.4	20.6	16.1	15.3	14.9	37.6
PAPA018	09-Apr-15	23	20.3	19.4	15.1	14.5	14.3	37.7
PAPA018	10-Apr-15	0	17.8	19.2	17.8	15.3	14.5	21.7
PAPA018	10-Apr-15	1	21.7	23.2	21.4	19.8	18.1	26.3
PAPA018	10-Apr-15	2	19.6	21.6	18.9	17.3	16.4	29.5
PAPA018	10-Apr-15	3	19.7	20.9	16.7	15.6	15.1	35.7
PAPA018	10-Apr-15	4	17.2	19.2	16.3	15.3	14.9	23.0
PAPA018	10-Apr-15	5	20.9	23.4	19.5	17.2	15.8	32.4
PAPA018	10-Apr-15	6	28.4	31.7	24.4	20.4	17.6	45.4
PAPA018	10-Apr-15	7	28.0	29.9	24.3	21.4	18.8	43.4
PAPA018	10-Apr-15	8	36.1	30.8	24.6	22.0	19.6	52.4
PAPA018	10-Apr-15	9	39.5	38.8	24.7	23.0	21.4	60.9
PAPA018	10-Apr-15	10	38.2	31.9	23.2	17.5	15.8	58.6
PAPA018	10-Apr-15	11	26.8	23.9	17.7	16.1	15.5	48.3
PAPA018	01-Apr-16	14	27.6	29.4	23.0	17.9	16.2	56.1
PAPA018	01-Apr-16	15	27.5	28.9	22.6	18.7	16.5	48.1
PAPA018	01-Apr-16	16	26.3	28.0	20.3	17.0	15.8	48.3
PAPA018	01-Apr-16	17	21.9	23.7	18.8	16.4	15.9	48.1
PAPA018	01-Apr-16	18	20.6	23.4	18.7	16.5	15.4	32.2
PAPA018	01-Apr-16	19	23.9	26.4	17.4	15.9	15.3	41.4
PAPA018	01-Apr-16	20	20.7	23.5	17.8	16.3	15.3	37.8
PAPA018	01-Apr-16	21	19.9	21.9	19.3	17.5	16.5	30.5
PAPA018	01-Apr-16	22	21.6	22.6	21.5	20.5	19.0	25.5
PAPA018	01-Apr-16	23	22.7	23.8	22.3	20.7	19.1	33.8
PAPA018	02-Apr-16	0	23.0	25.2	22.3	20.3	18.6	30.6
PAPA018	02-Apr-16	1	19.7	21.4	19.1	18.2	17.0	24.3
PAPA018	02-Apr-16	2	19.9	21.9	19.3	17.8	16.7	24.7
PAPA018	02-Apr-16	3	20.2	22.0	19.7	18.3	17.0	24.1
PAPA018	02-Apr-16	4	18.3	19.2	18.1	16.8	15.7	32.9
PAPA018	02-Apr-16	5	21.3	23.4	19.2	17.4	16.1	38.4
PAPA018	02-Apr-16	6	33.2	30.6	24.5	18.8	16.5	54.8
PAPA018	02-Apr-16	7	42.9	37.6	26.0	22.4	19.0	65.9
PAPA018	02-Apr-16	8	33.8	32.1	23.1	20.9	19.3	53.3
PAPA018	02-Apr-16	9	32.4	27.5	22.1	20.6	19.3	53.0
PAPA018	02-Apr-16	10	28.7	27.3	20.6	18.5	17.3	50.0
PAPA018	02-Apr-16	11	24.8	20.4	17.5	16.5	15.7	52.9
PAPA018	02-Apr-16	12	31.7	29.4	20.4	16.5	15.7	58.2
PAPA018	02-Apr-16	13	27.5	30.3	20.5	16.7	15.9	45.3
PAPA018	02-Apr-16	14	25.7	29.0	22.7	17.5	15.7	43.5
PAPA018	02-Apr-16	15	30.9	30.9	22.8	17.4	16.1	58.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	02-Apr-16	16	27.9	31.2	25.3	20.5	17.2	44.1
PAPA018	02-Apr-16	17	27.7	30.9	25.0	20.7	17.0	43.8
PAPA018	02-Apr-16	18	35.8	32.1	26.2	22.4	18.4	63.6
PAPA018	02-Apr-16	19	25.0	28.8	21.4	16.2	15.1	41.6
PAPA018	02-Apr-16	20	18.1	20.2	15.4	14.7	14.5	36.0
PAPA018	02-Apr-16	21	18.6	17.8	15.1	14.8	14.6	37.3
PAPA018	02-Apr-16	22	18.9	17.4	15.8	15.1	14.8	38.0
PAPA018	02-Apr-16	23	15.2	15.4	14.8	14.7	14.5	29.8
PAPA018	03-Apr-16	0	18.2	17.2	15.3	14.7	14.5	46.9
PAPA018	03-Apr-16	1	19.6	21.3	18.9	17.1	16.1	31.8
PAPA018	03-Apr-16	2	21.2	23.1	20.9	18.6	17.3	26.9
PAPA018	03-Apr-16	3	19.1	20.3	18.5	16.3	15.4	29.4
PAPA018	03-Apr-16	4	18.3	19.5	18.0	17.0	16.2	28.2
PAPA018	03-Apr-16	5	20.7	23.6	18.2	16.8	16.0	36.6
PAPA018	03-Apr-16	6	33.2	30.1	25.3	20.1	17.6	52.5
PAPA018	03-Apr-16	7	32.0	35.3	26.6	22.1	18.0	45.2
PAPA018	03-Apr-16	8	36.8	31.4	22.7	18.2	16.8	54.4
PAPA018	03-Apr-16	9	33.1	33.5	18.9	17.2	16.5	52.8
PAPA018	03-Apr-16	10	38.2	23.2	18.8	17.4	16.3	60.6
PAPA018	03-Apr-16	11	29.4	28.6	18.6	16.6	16.0	52.8
PAPA018	03-Apr-16	12	32.1	33.1	25.6	20.4	16.9	53.8
PAPA018	03-Apr-16	13	30.0	32.5	25.2	20.1	16.2	47.4
PAPA018	03-Apr-16	14	29.2	31.0	22.5	17.3	15.9	50.9
PAPA018	03-Apr-16	15	25.7	28.8	22.3	18.3	16.5	44.1
PAPA018	03-Apr-16	16	26.8	30.2	23.3	17.6	15.8	41.7
PAPA018	03-Apr-16	17	24.0	28.0	18.6	16.0	15.4	39.2
PAPA018	03-Apr-16	18	18.5	20.9	16.8	15.4	15.0	30.6
PAPA018	03-Apr-16	19	21.1	20.7	16.2	15.2	14.9	37.3
PAPA018	03-Apr-16	20	23.6	21.2	17.4	16.1	15.6	47.6
PAPA018	03-Apr-16	21	21.5	25.1	18.8	15.4	14.9	39.0
PAPA018	03-Apr-16	22	26.0	29.6	19.8	16.5	15.1	42.0
PAPA018	03-Apr-16	23	22.3	20.3	18.0	16.4	14.9	41.8
PAPA018	04-Apr-16	0	20.5	21.0	18.6	16.9	15.8	34.9
PAPA018	04-Apr-16	1	17.6	20.5	16.1	15.4	15.1	24.4
PAPA018	04-Apr-16	2	23.0	24.7	22.9	20.3	18.9	28.1
PAPA018	04-Apr-16	3	22.5	23.5	22.3	21.4	20.4	29.0
PAPA018	04-Apr-16	4	20.7	22.9	20.1	18.4	17.3	24.7
PAPA018	04-Apr-16	5	23.5	26.8	21.2	19.2	17.4	35.3
PAPA018	04-Apr-16	6	41.5	37.0	27.3	23.9	20.9	64.4
PAPA018	04-Apr-16	7	33.6	37.1	27.2	24.2	21.1	47.7
PAPA018	04-Apr-16	8	40.1	37.6	26.2	23.6	21.2	59.9
PAPA018	04-Apr-16	9	38.0	28.3	21.4	19.4	17.8	57.6
PAPA018	04-Apr-16	10	22.2	20.4	17.1	16.0	15.6	44.9
PAPA018	04-Apr-16	11	23.8	25.4	18.6	16.4	15.7	44.0
PAPA018	04-Apr-16	12	30.1	29.6	20.6	16.8	15.8	51.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	04-Apr-16	13	30.7	34.9	26.7	20.1	16.5	43.7
PAPA018	04-Apr-16	14	38.7	41.7	32.4	18.9	15.7	62.7
PAPA018	04-Apr-16	15	27.7	30.3	22.2	17.5	16.0	45.3
PAPA018	04-Apr-16	16	50.7	33.7	22.7	17.7	15.7	83.7
PAPA018	04-Apr-16	17	28.5	31.7	21.7	17.0	15.7	47.2
PAPA018	04-Apr-16	18	34.7	38.8	28.4	18.9	17.3	51.0
PAPA018	04-Apr-16	19	23.2	26.1	20.9	18.2	16.8	38.4
PAPA018	04-Apr-16	20	26.1	23.8	20.3	15.7	14.9	58.5
PAPA018	04-Apr-16	21	19.0	18.5	16.2	15.7	15.2	36.1
PAPA018	04-Apr-16	22	17.4	19.2	16.7	15.1	14.9	27.4
PAPA018	04-Apr-16	23	17.8	19.4	17.6	15.1	14.7	26.1
PAPA018	05-Apr-16	0	27.7	28.3	19.5	16.2	14.8	47.3
PAPA018	05-Apr-16	1	30.7	34.1	18.4	15.0	14.6	52.1
PAPA018	05-Apr-16	2	24.7	28.0	17.9	16.1	15.3	41.0
PAPA018	05-Apr-16	3	21.1	23.5	16.2	15.1	14.8	40.6
PAPA018	05-Apr-16	4	22.3	22.9	16.7	15.9	15.4	44.1
PAPA018	05-Apr-16	5	17.9	20.3	16.1	15.6	15.1	36.6
PAPA018	05-Apr-16	6	29.2	28.9	23.4	18.2	15.8	50.0
PAPA018	05-Apr-16	7	24.3	27.5	21.9	17.3	15.6	41.6
PAPA018	05-Apr-16	8	34.9	32.7	24.4	18.9	15.5	57.2
PAPA018	05-Apr-16	9	37.3	40.6	34.7	29.1	24.5	51.9
PAPA018	05-Apr-16	10	36.8	40.5	33.9	27.6	20.5	54.3
PAPA018	05-Apr-16	11	39.1	42.9	35.7	28.9	23.6	54.4
PAPA018	05-Apr-16	12	41.0	44.6	37.9	31.0	21.2	55.7
PAPA018	05-Apr-16	13	38.5	42.2	35.7	29.9	24.2	50.9
PAPA018	05-Apr-16	14	38.8	42.4	35.6	28.9	22.9	53.6
PAPA018	05-Apr-16	15	40.3	44.0	37.6	30.7	24.0	55.5
PAPA018	05-Apr-16	16	41.2	44.7	38.7	33.5	26.1	55.7
PAPA018	05-Apr-16	17	38.5	42.0	35.5	30.0	22.8	51.6
PAPA018	05-Apr-16	18	36.4	40.0	33.4	27.5	22.9	50.3
PAPA018	05-Apr-16	19	31.5	33.9	26.8	18.9	16.6	50.1
PAPA018	05-Apr-16	20	21.1	23.7	19.6	17.6	16.2	36.8
PAPA018	05-Apr-16	21	19.3	19.4	17.7	16.9	16.1	34.5
PAPA018	05-Apr-16	22	21.1	23.3	19.6	17.8	16.7	34.9
PAPA018	05-Apr-16	23	19.4	20.2	16.8	16.0	15.0	33.4
PAPA018	06-Apr-16	0	18.1	19.0	17.6	16.7	15.7	28.6
PAPA018	06-Apr-16	1	16.3	17.7	15.8	15.1	14.8	19.5
PAPA018	06-Apr-16	2	24.4	18.4	16.6	15.7	15.1	48.7
PAPA018	06-Apr-16	3	18.1	19.1	18.0	17.1	16.1	21.5
PAPA018	06-Apr-16	4	20.0	21.2	20.0	18.2	16.0	24.2
PAPA018	06-Apr-16	5	19.7	19.5	17.9	17.2	16.4	44.6
PAPA018	06-Apr-16	6	30.3	31.9	25.6	21.6	18.2	47.0
PAPA018	06-Apr-16	7	34.3	37.3	25.6	22.8	19.6	50.8
PAPA018	06-Apr-16	8	34.4	29.7	25.2	23.3	20.9	58.3
PAPA018	06-Apr-16	9	33.3	33.8	26.9	23.5	21.5	53.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	06-Apr-16	10	31.5	29.3	24.6	22.1	20.0	56.1
PAPA018	06-Apr-16	11	27.9	30.9	24.4	21.3	19.2	48.9
PAPA018	06-Apr-16	12	34.2	36.5	28.6	23.3	19.9	56.2
PAPA018	06-Apr-16	13	35.7	39.1	33.1	27.4	21.9	49.4
PAPA018	06-Apr-16	14	40.1	43.7	37.1	31.3	24.3	54.9
PAPA018	06-Apr-16	15	37.7	41.5	35.0	28.8	23.2	50.1
PAPA018	06-Apr-16	16	35.9	39.8	32.1	25.1	19.9	50.1
PAPA018	06-Apr-16	17	34.9	38.6	32.2	26.3	22.2	46.6
PAPA018	06-Apr-16	18	33.3	36.7	30.9	21.3	16.9	49.1
PAPA018	06-Apr-16	19	28.3	31.9	24.8	18.3	16.2	42.3
PAPA018	06-Apr-16	20	25.7	23.3	18.5	16.7	15.7	57.6
PAPA018	06-Apr-16	21	16.3	17.0	16.0	15.3	14.8	27.0
PAPA018	06-Apr-16	22	15.1	15.5	14.8	14.7	14.4	21.8
PAPA018	06-Apr-16	23	16.8	17.8	15.3	14.8	14.5	30.6
PAPA018	07-Apr-16	0	16.1	18.0	15.3	14.7	14.5	20.4
PAPA018	07-Apr-16	1	16.2	17.2	16.0	15.0	14.7	25.5
PAPA018	07-Apr-16	2	15.6	16.0	15.5	15.0	14.6	25.3
PAPA018	07-Apr-16	3	15.3	15.8	15.0	14.8	14.6	26.6
PAPA018	07-Apr-16	4	15.5	16.0	15.4	15.0	14.7	23.6
PAPA018	07-Apr-16	5	19.0	23.0	15.3	14.9	14.6	33.6
PAPA018	07-Apr-16	6	31.5	30.5	25.9	21.5	16.3	47.8
PAPA018	07-Apr-16	7	35.1	33.5	25.0	20.1	18.0	50.5
PAPA018	07-Apr-16	8	32.9	30.8	21.8	18.9	17.2	52.9
PAPA018	07-Apr-16	9	40.8	38.4	31.4	25.3	20.7	67.6
PAPA018	07-Apr-16	10	39.5	41.8	35.4	30.1	24.4	59.3
PAPA018	07-Apr-16	11	32.4	35.6	29.7	25.5	21.1	46.3
PAPA018	07-Apr-16	12	33.6	35.8	30.5	26.5	22.8	52.3
PAPA018	07-Apr-16	13	32.2	35.6	29.4	24.4	20.1	44.9
PAPA018	07-Apr-16	14	31.9	35.5	28.1	22.7	18.0	49.1
PAPA018	07-Apr-16	15	31.1	34.6	27.9	22.5	17.8	47.5
PAPA018	07-Apr-16	16	32.0	35.8	28.6	22.8	18.3	46.8
PAPA018	07-Apr-16	17	29.8	33.3	26.4	21.1	18.0	46.1
PAPA018	07-Apr-16	18	31.6	35.2	28.3	23.2	19.4	45.8
PAPA018	07-Apr-16	19	27.7	30.8	24.8	21.9	19.1	41.3
PAPA018	07-Apr-16	20	26.4	28.8	24.6	21.8	19.5	41.8
PAPA018	07-Apr-16	21	21.7	23.0	21.4	20.1	18.7	31.2
PAPA018	07-Apr-16	22	19.8	20.5	18.4	15.6	14.7	34.0
PAPA018	07-Apr-16	23	18.6	20.6	17.9	15.1	14.7	33.7
PAPA018	08-Apr-16	0	20.8	22.4	19.6	16.9	15.4	36.4
PAPA018	08-Apr-16	1	16.0	16.6	15.7	15.3	14.9	33.1
PAPA018	08-Apr-16	2	17.0	18.1	16.9	15.8	15.3	21.8
PAPA018	08-Apr-16	3	19.5	20.8	19.1	18.2	17.1	25.2
PAPA018	08-Apr-16	4	19.7	21.4	19.4	17.0	16.4	26.1
PAPA018	08-Apr-16	5	20.5	24.8	16.9	15.7	15.1	34.5
PAPA018	08-Apr-16	6	28.0	30.5	26.2	21.7	18.1	43.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	08-Apr-16	7	27.4	30.6	24.8	19.8	17.3	41.9
PAPA018	08-Apr-16	8	33.3	27.8	21.2	19.0	17.0	55.4
PAPA018	08-Apr-16	9	29.8	23.1	18.8	17.0	16.2	54.9
PAPA018	08-Apr-16	10	24.8	20.4	17.0	16.3	15.8	50.4
PAPA018	08-Apr-16	11	29.7	19.9	16.5	15.9	15.4	55.1
PAPA018	08-Apr-16	12	21.5	21.5	17.3	16.1	15.7	49.6
PAPA018	08-Apr-16	13	32.9	27.3	19.1	16.5	15.8	55.7
PAPA018	08-Apr-16	14	23.6	24.9	18.1	16.4	16.0	42.9
PAPA018	08-Apr-16	15	31.5	28.4	20.3	16.4	15.8	62.4
PAPA018	08-Apr-16	16	27.4	26.8	19.6	16.2	15.5	55.7
PAPA018	08-Apr-16	17	23.8	24.6	16.9	15.6	15.2	46.7
PAPA018	08-Apr-16	18	24.9	19.1	15.6	15.1	14.8	51.8
PAPA018	08-Apr-16	19	24.1	27.6	19.2	15.1	14.8	39.4
PAPA018	08-Apr-16	20	22.8	22.9	16.5	15.5	14.9	42.9
PAPA018	08-Apr-16	21	17.6	18.8	17.4	16.3	15.6	25.7
PAPA018	08-Apr-16	22	18.4	19.5	18.2	17.3	16.4	23.0
PAPA018	08-Apr-16	23	19.7	21.0	19.2	18.2	17.4	26.4
PAPA018	09-Apr-16	0	21.2	22.2	21.0	20.1	18.9	29.1
PAPA018	09-Apr-16	1	22.0	24.2	21.7	18.2	17.3	33.7
PAPA018	09-Apr-16	2	18.3	19.4	17.9	17.1	16.2	27.8
PAPA018	09-Apr-16	3	19.6	21.6	18.7	17.9	17.0	25.6
PAPA018	09-Apr-16	4	20.8	22.4	20.1	16.2	15.4	32.3
PAPA018	09-Apr-16	5	19.9	23.7	15.9	15.2	14.7	33.3
PAPA018	09-Apr-16	6	29.3	32.4	27.9	23.8	17.8	44.7
PAPA018	09-Apr-16	7	27.5	29.0	24.5	20.0	15.7	46.3
PAPA018	09-Apr-16	8	32.4	24.3	17.5	16.3	15.6	55.1
PAPA018	09-Apr-16	9	21.5	20.7	17.1	16.2	15.6	46.1
PAPA018	09-Apr-16	10	32.1	32.5	17.8	16.2	15.6	55.4
PAPA018	09-Apr-16	11	30.3	28.8	20.3	16.8	15.9	55.1
PAPA018	09-Apr-16	12	35.9	31.4	22.1	17.1	15.7	63.2
PAPA018	09-Apr-16	13	32.8	34.3	25.7	18.7	16.2	52.1
PAPA018	09-Apr-16	14	31.0	33.6	24.4	18.1	15.8	55.5
PAPA018	09-Apr-16	15	29.5	33.3	25.6	19.2	16.7	43.8
PAPA018	09-Apr-16	16	28.7	32.3	25.4	20.2	16.9	42.7
PAPA018	09-Apr-16	17	26.5	30.3	23.0	18.2	15.9	41.6
PAPA018	09-Apr-16	18	28.5	29.3	21.7	17.7	16.1	48.3
PAPA018	09-Apr-16	19	24.2	27.1	20.8	17.4	15.7	44.4
PAPA018	09-Apr-16	20	26.6	21.1	18.6	16.4	15.1	60.1
PAPA018	09-Apr-16	21	19.4	21.3	17.4	15.7	15.0	37.3
PAPA018	09-Apr-16	22	27.6	26.2	16.2	14.9	14.7	49.9
PAPA018	09-Apr-16	23	20.1	21.6	19.2	16.8	15.7	32.7
PAPA018	10-Apr-16	0	22.8	21.6	19.2	17.5	16.2	44.4
PAPA018	10-Apr-16	1	20.1	21.3	19.8	18.5	16.8	26.3
PAPA018	10-Apr-16	2	19.1	21.1	18.6	16.8	15.9	27.0
PAPA018	10-Apr-16	3	19.0	20.1	19.0	17.7	16.5	24.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA018	10-Apr-16	4	18.3	19.4	17.8	17.0	16.2	30.5
PAPA018	10-Apr-16	5	20.8	22.7	19.8	18.5	17.3	35.4
PAPA018	10-Apr-16	6	27.0	30.3	24.2	21.5	18.3	46.6
PAPA018	10-Apr-16	7	23.5	25.1	22.6	20.8	19.1	38.5
PAPA018	10-Apr-16	8	25.2	27.3	22.9	20.6	18.7	38.9
PAPA018	10-Apr-16	9	35.3	41.0	27.1	22.5	18.9	49.3
PAPA018	10-Apr-16	10	28.0	31.3	20.0	16.0	15.0	43.8
PAPA018	10-Apr-16	11	39.3	25.3	17.0	15.6	15.1	66.3
PAPA018	10-Apr-16	12	24.3	23.8	16.0	15.3	15.1	46.3
PAPA018	10-Apr-16	13	27.0	22.1	16.4	15.5	15.2	49.1
PAPA018	10-Apr-16	14	31.5	36.8	22.2	18.1	16.4	46.7
PAPA018	10-Apr-16	15	27.1	29.8	20.2	17.8	16.8	49.8
PAPA018	10-Apr-16	16	42.7	41.5	19.3	16.3	15.4	62.0
PAPA018	10-Apr-16	17	30.0	33.6	25.9	19.6	15.6	45.7
PAPA018	10-Apr-16	18	26.9	30.1	23.8	19.3	16.4	44.4
PAPA018	10-Apr-16	19	30.0	27.7	21.0	18.0	16.0	59.0
PAPA018	10-Apr-16	20	25.4	27.4	24.3	21.9	17.5	38.5
PAPA018	10-Apr-16	21	24.5	26.2	24.2	22.3	20.1	32.7
PAPA018	10-Apr-16	22	25.0	26.9	24.6	22.0	19.4	33.5
PAPA018	10-Apr-16	23	24.9	26.8	24.2	22.5	20.1	31.9
PAPA018	11-Apr-16	0	24.3	26.0	23.7	22.0	20.4	31.6
PAPA018	11-Apr-16	1	19.9	22.0	19.0	17.3	16.3	27.3
PAPA018	11-Apr-16	2	17.6	18.4	17.2	16.5	15.7	29.5
PAPA018	11-Apr-16	3	18.2	18.8	17.4	16.6	15.7	32.2
PAPA018	11-Apr-16	4	16.1	16.8	15.9	15.4	14.9	23.2
PAPA018	11-Apr-16	5	28.0	28.3	17.1	15.5	14.8	46.1
PAPA018	11-Apr-16	6	30.4	31.9	25.2	20.1	15.5	48.4
PAPA018	11-Apr-16	7	25.5	28.5	23.0	18.1	16.3	42.5
PAPA018	11-Apr-16	8	22.4	24.6	19.3	17.4	16.2	41.2
PAPA018	11-Apr-16	9	37.3	34.6	17.9	16.4	15.8	59.9
PAPA018	11-Apr-16	10	26.0	27.2	18.4	17.2	16.0	47.6
PAPA018	11-Apr-16	11	23.1	25.4	17.6	16.3	15.6	44.5
PAPA018	11-Apr-16	12	22.6	24.0	17.4	16.1	15.5	40.6
PAPA018	11-Apr-16	13	25.1	24.5	17.6	16.3	15.8	57.0
PAPA018	11-Apr-16	14	26.7	30.4	22.5	15.6	15.3	42.4
PAPA018	11-Apr-16	15	25.6	27.3	22.4	18.7	17.1	44.9
PAPA019	15-Apr-13	13	33.9	30.8	23.2	17.6	15.7	55.9
PAPA019	15-Apr-13	14	28.4	32.2	23.9	18.0	16.2	43.1
PAPA019	15-Apr-13	15	31.2	34.9	26.5	19.5	16.4	47.1
PAPA019	15-Apr-13	16	31.7	35.7	28.0	20.4	16.3	47.1
PAPA019	15-Apr-13	17	34.4	38.3	27.7	19.9	16.6	51.8
PAPA019	15-Apr-13	18	37.0	40.8	33.7	27.7	22.2	53.1
PAPA019	15-Apr-13	19	33.8	37.9	29.7	21.8	17.6	48.4
PAPA019	15-Apr-13	20	26.8	29.3	21.8	19.0	17.2	53.8
PAPA019	15-Apr-13	21	36.0	26.4	19.9	17.4	16.2	61.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	15-Apr-13	22	19.5	21.8	17.7	15.3	14.7	35.4
PAPA019	15-Apr-13	23	19.1	21.6	18.5	15.4	14.9	29.3
PAPA019	16-Apr-13	0	20.5	22.3	19.3	17.5	15.1	36.1
PAPA019	16-Apr-13	1	23.2	24.5	22.3	20.8	18.7	37.9
PAPA019	16-Apr-13	2	23.9	25.4	23.3	22.1	20.6	38.2
PAPA019	16-Apr-13	3	27.3	29.2	26.7	25.0	23.4	34.5
PAPA019	16-Apr-13	4	28.3	29.7	28.0	26.5	24.9	36.6
PAPA019	16-Apr-13	5	27.6	29.5	26.8	25.5	23.3	43.1
PAPA019	16-Apr-13	6	27.6	29.4	26.8	25.2	22.6	37.7
PAPA019	16-Apr-13	7	23.0	24.9	22.6	20.2	18.8	29.7
PAPA019	16-Apr-13	8	25.2	25.0	21.0	19.3	17.5	43.7
PAPA019	16-Apr-13	9	23.6	26.7	21.6	17.8	16.8	37.0
PAPA019	16-Apr-13	10	23.9	27.0	21.9	18.9	17.2	36.5
PAPA019	16-Apr-13	11	18.9	20.5	17.9	16.8	15.9	36.1
PAPA019	16-Apr-13	12	22.2	24.7	19.2	16.6	15.5	42.0
PAPA019	16-Apr-13	13	22.2	24.4	19.1	17.3	16.0	42.8
PAPA019	16-Apr-13	14	21.3	23.2	18.8	17.2	16.3	39.6
PAPA019	16-Apr-13	15	28.3	29.7	18.4	16.3	15.5	52.2
PAPA019	16-Apr-13	16	21.4	24.6	18.1	16.7	15.6	35.8
PAPA019	16-Apr-13	17	26.8	30.2	24.7	21.1	18.1	38.0
PAPA019	16-Apr-13	18	20.0	23.1	18.4	16.6	15.7	29.6
PAPA019	16-Apr-13	19	20.0	22.2	18.9	16.7	15.9	32.5
PAPA019	16-Apr-13	20	21.2	23.0	17.6	15.9	14.9	37.0
PAPA019	16-Apr-13	21	23.4	26.0	22.0	18.3	16.0	37.0
PAPA019	16-Apr-13	22	18.4	20.1	17.1	15.6	14.9	28.9
PAPA019	16-Apr-13	23	20.8	22.7	20.3	18.0	15.8	28.6
PAPA019	17-Apr-13	0	25.5	28.9	23.6	18.3	16.7	37.4
PAPA019	17-Apr-13	1	31.8	35.3	29.4	25.3	22.8	42.5
PAPA019	17-Apr-13	2	25.4	26.8	25.1	23.8	21.6	33.5
PAPA019	17-Apr-13	3	31.6	35.3	28.9	26.0	23.0	43.1
PAPA019	17-Apr-13	4	29.2	30.4	27.8	24.7	19.2	44.4
PAPA019	17-Apr-13	5	26.2	22.5	19.9	18.0	16.2	60.1
PAPA019	17-Apr-13	6	24.0	25.4	23.7	22.4	20.6	30.9
PAPA019	17-Apr-13	7	27.4	30.0	26.1	22.3	18.5	39.3
PAPA019	17-Apr-13	8	22.2	23.9	19.6	17.5	15.6	36.8
PAPA019	17-Apr-13	9	23.1	26.1	21.3	18.2	16.5	38.5
PAPA019	17-Apr-13	10	25.5	28.2	20.8	17.4	16.1	41.0
PAPA019	08-Apr-14	12	26.3	27.5	19.5	17.3	16.1	46.0
PAPA019	08-Apr-14	13	33.9	26.2	18.9	16.6	15.8	59.3
PAPA019	08-Apr-14	14	30.1	30.6	22.7	17.9	16.2	52.4
PAPA019	08-Apr-14	15	25.4	29.0	20.5	17.0	15.8	41.8
PAPA019	08-Apr-14	16	27.5	30.5	22.8	18.0	15.9	44.9
PAPA019	08-Apr-14	17	30.4	27.9	19.8	16.5	15.4	55.0
PAPA019	08-Apr-14	18	29.0	20.9	16.3	15.6	15.3	52.7
PAPA019	08-Apr-14	19	25.4	21.5	16.2	15.6	15.1	47.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	08-Apr-14	20	16.7	18.3	15.9	15.0	14.8	28.0
PAPA019	08-Apr-14	21	23.9	19.8	16.5	15.5	14.9	40.9
PAPA019	08-Apr-14	22	15.2	15.7	15.0	14.7	14.6	18.8
PAPA019	08-Apr-14	23	15.6	16.4	15.4	14.9	14.6	19.3
PAPA019	09-Apr-14	0	16.7	15.2	14.8	14.7	14.5	38.7
PAPA019	09-Apr-14	1	15.0	15.0	14.8	14.7	14.5	27.2
PAPA019	09-Apr-14	2	14.9	15.4	14.8	14.6	14.5	19.4
PAPA019	09-Apr-14	3	15.5	15.7	15.0	14.7	14.5	23.9
PAPA019	09-Apr-14	4	15.0	15.1	14.9	14.8	14.6	17.8
PAPA019	09-Apr-14	5	16.2	17.4	15.7	15.1	14.9	30.1
PAPA019	09-Apr-14	6	32.7	34.8	19.2	17.2	15.9	47.9
PAPA019	09-Apr-14	7	35.9	32.7	21.9	18.3	16.5	56.1
PAPA019	09-Apr-14	8	35.1	32.5	18.2	16.8	16.1	53.6
PAPA019	09-Apr-14	9	29.1	22.2	18.3	17.1	16.3	52.2
PAPA019	09-Apr-14	10	36.7	25.6	19.7	17.6	16.5	60.1
PAPA019	09-Apr-14	11	28.9	32.5	20.8	17.8	16.4	45.4
PAPA019	09-Apr-14	12	37.0	40.7	32.0	23.3	17.9	52.2
PAPA019	09-Apr-14	13	33.1	36.6	28.1	21.8	17.3	50.4
PAPA019	09-Apr-14	14	36.2	40.1	32.8	25.5	19.8	51.1
PAPA019	09-Apr-14	15	36.5	40.6	32.7	23.8	18.1	51.0
PAPA019	09-Apr-14	16	33.5	37.3	30.3	23.4	18.2	47.9
PAPA019	09-Apr-14	17	35.7	39.5	32.7	25.5	19.2	50.4
PAPA019	09-Apr-14	18	34.7	38.2	29.6	22.6	17.5	54.9
PAPA019	09-Apr-14	19	23.2	26.6	18.3	15.7	15.1	38.4
PAPA019	09-Apr-14	20	21.6	23.0	17.7	16.0	15.3	37.6
PAPA019	09-Apr-14	21	18.4	17.6	15.1	14.9	14.7	37.0
PAPA019	09-Apr-14	22	27.1	27.0	15.3	14.9	14.8	51.9
PAPA019	09-Apr-14	23	16.7	17.6	16.6	15.2	14.9	26.7
PAPA019	10-Apr-14	0	33.6	37.9	27.7	17.5	15.4	48.3
PAPA019	10-Apr-14	1	27.7	31.5	21.2	18.0	15.3	44.9
PAPA019	10-Apr-14	2	17.6	19.2	17.0	15.8	15.0	28.7
PAPA019	10-Apr-14	3	17.0	16.9	15.4	14.8	14.7	33.6
PAPA019	10-Apr-14	4	16.4	16.9	15.6	14.9	14.7	28.5
PAPA019	10-Apr-14	5	28.3	17.7	15.3	14.9	14.7	54.5
PAPA019	10-Apr-14	6	29.2	30.4	22.2	18.2	16.1	50.4
PAPA019	10-Apr-14	7	41.7	29.1	21.7	17.5	15.7	67.3
PAPA019	10-Apr-14	8	29.7	26.8	18.8	17.4	16.4	52.0
PAPA019	10-Apr-14	9	34.8	33.3	18.8	17.1	16.2	55.3
PAPA019	03-Apr-15	17	22.2	25.7	18.4	14.9	14.3	37.0
PAPA019	03-Apr-15	18	24.3	25.8	20.0	16.2	14.5	47.5
PAPA019	03-Apr-15	19	21.5	24.9	17.1	14.4	13.8	35.8
PAPA019	03-Apr-15	20	28.4	32.0	24.7	15.4	13.5	45.1
PAPA019	03-Apr-15	21	22.9	27.4	16.4	13.8	13.5	38.3
PAPA019	03-Apr-15	22	27.2	29.9	23.6	15.9	13.5	56.2
PAPA019	03-Apr-15	23	22.9	26.4	17.6	13.6	13.4	38.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	04-Apr-15	0	16.4	18.6	13.9	13.6	13.5	35.0
PAPA019	04-Apr-15	1	16.4	14.6	13.7	13.5	13.4	40.9
PAPA019	04-Apr-15	2	14.8	14.8	14.1	13.6	13.4	30.4
PAPA019	04-Apr-15	3	15.3	17.3	14.5	14.0	13.7	20.3
PAPA019	04-Apr-15	4	16.0	16.5	15.0	14.5	14.0	34.9
PAPA019	04-Apr-15	5	15.8	16.8	15.7	14.5	14.1	21.6
PAPA019	04-Apr-15	6	29.4	32.9	28.0	18.4	14.3	39.6
PAPA019	04-Apr-15	7	32.0	34.1	28.5	21.4	16.9	51.2
PAPA019	04-Apr-15	8	26.0	27.8	20.4	17.0	15.3	48.4
PAPA019	04-Apr-15	9	20.6	21.5	18.3	16.4	15.3	46.2
PAPA019	04-Apr-15	10	32.5	28.0	17.9	15.9	15.0	57.3
PAPA019	04-Apr-15	11	36.0	25.0	19.2	16.3	15.0	71.3
PAPA019	04-Apr-15	12	22.7	21.5	17.0	15.5	14.6	50.4
PAPA019	04-Apr-15	13	23.5	24.3	17.6	15.3	14.8	53.1
PAPA019	04-Apr-15	14	32.9	36.6	23.3	16.0	14.7	53.8
PAPA019	04-Apr-15	15	38.3	41.9	34.5	26.9	20.0	54.3
PAPA019	04-Apr-15	16	38.5	42.4	35.4	28.7	20.5	52.1
PAPA019	04-Apr-15	17	37.4	40.9	33.8	26.2	19.5	56.0
PAPA019	04-Apr-15	18	41.5	45.1	38.1	32.0	25.8	57.2
PAPA019	04-Apr-15	19	35.0	38.7	28.8	20.4	15.3	51.5
PAPA019	04-Apr-15	20	24.6	28.0	19.5	14.2	13.6	46.2
PAPA019	04-Apr-15	21	20.7	21.8	13.7	13.6	13.4	38.3
PAPA019	04-Apr-15	22	15.3	15.7	13.8	13.6	13.5	30.8
PAPA019	04-Apr-15	23	15.0	16.5	14.0	13.6	13.4	23.9
PAPA019	05-Apr-15	0	16.4	15.7	14.6	13.8	13.6	34.1
PAPA019	05-Apr-15	1	17.8	19.8	16.4	15.1	14.4	35.2
PAPA019	05-Apr-15	2	19.1	19.9	18.2	17.0	15.9	36.4
PAPA019	05-Apr-15	3	25.3	29.7	19.2	17.0	16.0	41.2
PAPA019	05-Apr-15	4	22.9	25.9	20.3	16.9	15.6	40.9
PAPA019	05-Apr-15	5	30.7	34.5	28.7	21.5	15.5	40.2
PAPA019	05-Apr-15	6	34.1	36.6	32.9	28.6	21.0	48.2
PAPA019	05-Apr-15	7	30.9	33.6	28.5	24.0	18.8	47.1
PAPA019	05-Apr-15	8	32.1	31.4	19.9	17.2	16.1	60.6
PAPA019	05-Apr-15	9	29.1	26.2	18.5	16.4	15.4	49.8
PAPA019	05-Apr-15	10	27.4	27.8	18.2	15.7	14.7	52.3
PAPA019	05-Apr-15	11	23.5	25.9	18.3	15.9	14.7	43.9
PAPA019	05-Apr-15	12	30.8	32.7	23.6	17.7	15.0	50.5
PAPA019	05-Apr-15	13	40.9	44.5	36.7	27.8	20.6	58.1
PAPA019	05-Apr-15	14	38.8	42.6	34.8	26.4	19.9	57.6
PAPA019	05-Apr-15	15	43.1	46.7	39.6	32.3	22.9	59.7
PAPA019	05-Apr-15	16	43.8	47.6	39.7	32.4	24.7	59.0
PAPA019	05-Apr-15	17	39.3	42.8	35.6	28.1	21.1	55.4
PAPA019	05-Apr-15	18	30.3	33.8	26.5	19.5	15.3	48.2
PAPA019	05-Apr-15	19	23.9	26.5	20.3	16.8	15.2	46.8
PAPA019	05-Apr-15	20	24.2	28.1	21.2	16.4	15.0	38.9

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	05-Apr-15	21	16.1	16.6	15.3	14.6	14.2	26.9
PAPA019	05-Apr-15	22	19.1	18.6	15.4	14.6	14.2	35.1
PAPA019	05-Apr-15	23	17.0	18.4	16.2	15.4	14.6	27.8
PAPA019	06-Apr-15	0	26.3	29.5	21.0	18.0	16.0	46.3
PAPA019	06-Apr-15	1	26.6	30.3	24.1	19.6	16.9	38.8
PAPA019	06-Apr-15	2	23.1	24.5	19.5	17.9	16.5	39.8
PAPA019	06-Apr-15	3	24.8	28.8	19.4	15.8	14.0	40.4
PAPA019	06-Apr-15	4	20.6	24.0	16.1	14.3	13.7	40.0
PAPA019	06-Apr-15	5	27.9	31.7	25.2	16.5	13.7	41.5
PAPA019	06-Apr-15	6	33.3	36.8	31.3	24.6	17.6	49.0
PAPA019	06-Apr-15	7	28.8	32.3	25.2	20.3	16.1	46.1
PAPA019	06-Apr-15	8	26.6	30.0	21.3	17.9	16.2	43.2
PAPA019	06-Apr-15	9	25.6	24.5	20.2	18.2	16.6	44.8
PAPA019	06-Apr-15	10	22.5	21.0	16.8	15.9	15.3	47.2
PAPA019	06-Apr-15	11	21.7	24.5	18.5	16.3	15.2	41.3
PAPA019	06-Apr-15	12	29.8	30.7	22.4	16.6	14.9	60.9
PAPA019	06-Apr-15	13	37.1	41.2	32.6	23.3	16.4	54.1
PAPA019	06-Apr-15	14	38.0	41.8	34.1	27.6	20.3	54.2
PAPA019	06-Apr-15	15	37.7	41.5	33.3	25.7	18.5	53.2
PAPA019	06-Apr-15	16	40.9	44.3	38.2	32.5	25.4	55.4
PAPA019	06-Apr-15	17	39.9	43.6	36.9	30.1	23.7	53.4
PAPA019	06-Apr-15	18	38.3	42.1	35.4	29.2	23.1	53.2
PAPA019	06-Apr-15	19	37.5	41.1	34.8	28.3	23.1	54.0
PAPA019	06-Apr-15	20	36.8	40.6	33.4	26.1	20.1	51.2
PAPA019	06-Apr-15	21	24.2	27.4	20.3	18.1	16.8	38.7
PAPA019	06-Apr-15	22	21.7	23.7	19.8	16.7	15.3	36.6
PAPA019	06-Apr-15	23	17.3	19.4	15.7	14.7	14.3	29.8
PAPA019	07-Apr-15	0	18.2	20.6	17.1	14.8	14.1	29.4
PAPA019	07-Apr-15	1	22.7	23.8	22.4	21.3	19.8	34.7
PAPA019	07-Apr-15	2	24.0	25.9	23.4	21.7	20.2	34.0
PAPA019	07-Apr-15	3	21.8	23.1	21.5	20.1	18.4	28.2
PAPA019	07-Apr-15	4	21.9	23.0	21.6	20.5	19.2	35.0
PAPA019	07-Apr-15	5	25.6	29.1	22.6	20.7	19.1	38.0
PAPA019	07-Apr-15	6	35.8	40.6	31.6	26.2	17.8	49.1
PAPA019	07-Apr-15	7	29.9	34.8	18.0	14.9	14.3	45.6
PAPA019	07-Apr-15	8	53.3	49.6	17.0	14.8	14.2	68.9
PAPA019	07-Apr-15	9	21.1	23.3	16.9	15.5	14.5	37.3
PAPA019	07-Apr-15	10	30.6	24.8	17.6	15.5	14.8	54.3
PAPA019	07-Apr-15	11	26.8	23.6	20.4	18.7	16.7	47.6
PAPA019	07-Apr-15	12	23.9	25.5	22.2	20.2	17.9	46.1
PAPA019	07-Apr-15	13	22.2	22.9	18.9	17.5	16.5	41.6
PAPA019	07-Apr-15	14	26.9	28.0	18.7	16.8	15.8	46.7
PAPA019	07-Apr-15	15	24.3	25.7	18.0	15.9	15.0	43.8
PAPA019	07-Apr-15	16	39.3	39.0	23.3	16.1	14.9	64.3
PAPA019	07-Apr-15	17	31.3	34.7	27.9	23.8	20.9	49.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	07-Apr-15	18	30.9	30.4	21.0	18.2	15.5	52.2
PAPA019	07-Apr-15	19	25.1	26.1	18.3	16.5	15.4	46.3
PAPA019	07-Apr-15	20	29.0	27.9	20.9	17.3	15.7	50.4
PAPA019	07-Apr-15	21	23.7	18.3	15.6	14.5	14.1	45.9
PAPA019	07-Apr-15	22	18.0	17.3	15.0	14.4	14.0	34.7
PAPA019	07-Apr-15	23	19.5	20.0	18.5	17.3	16.1	33.7
PAPA019	08-Apr-15	0	23.5	21.6	18.8	17.3	15.9	44.4
PAPA019	08-Apr-15	1	18.4	20.5	17.8	15.7	15.1	26.5
PAPA019	08-Apr-15	2	17.2	18.5	16.8	15.2	14.2	26.3
PAPA019	08-Apr-15	3	18.6	20.4	17.8	16.2	15.3	35.8
PAPA019	08-Apr-15	4	16.7	16.6	15.2	14.5	14.1	35.2
PAPA019	08-Apr-15	5	21.5	25.2	17.4	15.1	14.0	34.0
PAPA019	08-Apr-15	6	29.4	32.5	28.3	22.5	14.2	44.6
PAPA019	08-Apr-15	7	28.7	31.7	24.9	20.0	16.6	51.1
PAPA019	08-Apr-15	8	27.9	30.0	23.0	21.1	18.8	50.3
PAPA019	08-Apr-15	9	27.6	26.6	20.4	18.2	16.0	53.0
PAPA019	08-Apr-15	10	25.8	29.4	18.3	15.8	14.4	44.9
PAPA019	08-Apr-15	11	19.4	19.9	15.3	14.3	14.0	43.6
PAPA019	08-Apr-15	12	20.9	22.5	16.3	14.6	14.3	46.1
PAPA019	08-Apr-15	13	25.3	29.0	19.2	15.2	14.6	47.5
PAPA019	08-Apr-15	14	28.2	32.1	24.6	18.2	14.7	41.6
PAPA019	08-Apr-15	15	26.2	29.7	21.5	15.3	14.1	44.1
PAPA019	08-Apr-15	16	31.5	34.2	27.0	20.3	15.3	54.1
PAPA019	08-Apr-15	17	39.5	44.1	32.1	21.8	17.2	55.3
PAPA019	08-Apr-15	18	29.8	34.7	21.0	18.0	16.5	44.9
PAPA019	08-Apr-15	19	22.4	26.0	18.3	16.3	15.3	36.5
PAPA019	08-Apr-15	20	26.0	29.6	22.8	17.8	15.7	43.9
PAPA019	08-Apr-15	21	23.8	24.8	20.4	17.7	15.4	39.5
PAPA019	08-Apr-15	22	18.4	20.2	17.9	15.9	15.0	29.2
PAPA019	08-Apr-15	23	19.4	20.2	18.3	17.3	16.1	35.6
PAPA019	09-Apr-15	0	24.3	20.6	18.8	17.3	16.3	44.0
PAPA019	09-Apr-15	1	22.9	24.7	18.6	16.4	15.4	40.4
PAPA019	09-Apr-15	2	17.4	18.6	17.2	16.2	15.6	22.4
PAPA019	09-Apr-15	3	19.0	21.7	15.9	14.9	14.4	32.3
PAPA019	09-Apr-15	4	20.0	23.6	16.6	15.1	14.2	35.2
PAPA019	09-Apr-15	5	19.2	19.4	16.9	15.5	14.7	43.9
PAPA019	09-Apr-15	6	28.8	32.2	27.0	21.5	16.0	40.3
PAPA019	09-Apr-15	7	35.1	40.1	28.7	20.4	16.5	58.7
PAPA019	09-Apr-15	8	22.7	24.6	18.2	15.3	14.0	40.9
PAPA019	09-Apr-15	9	31.0	24.2	16.3	14.7	14.0	56.1
PAPA019	09-Apr-15	10	27.9	21.3	15.5	14.4	14.1	61.6
PAPA019	09-Apr-15	11	32.3	30.5	17.5	14.9	14.4	56.9
PAPA019	09-Apr-15	12	19.6	22.6	16.5	14.8	14.2	36.0
PAPA019	09-Apr-15	13	32.8	22.6	16.5	14.8	14.4	64.3
PAPA019	09-Apr-15	14	30.9	33.9	18.5	15.3	14.6	55.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	09-Apr-15	15	34.1	23.9	16.8	14.8	14.3	61.7
PAPA019	09-Apr-15	16	24.0	27.2	20.1	15.7	14.1	38.0
PAPA019	09-Apr-15	17	22.5	25.3	21.1	18.3	17.1	37.3
PAPA019	09-Apr-15	18	20.7	22.2	17.0	15.4	14.6	43.9
PAPA019	09-Apr-15	19	28.7	33.0	23.2	15.7	14.3	42.8
PAPA019	09-Apr-15	20	25.0	25.2	18.9	15.1	14.0	45.5
PAPA019	09-Apr-15	21	19.3	14.9	14.1	13.8	13.6	47.5
PAPA019	09-Apr-15	22	18.4	18.0	14.3	13.7	13.6	34.6
PAPA019	09-Apr-15	23	19.1	18.4	14.6	13.9	13.6	36.4
PAPA019	10-Apr-15	0	16.0	17.6	15.6	14.3	13.7	20.3
PAPA019	10-Apr-15	1	16.7	17.9	16.4	15.6	15.1	21.0
PAPA019	10-Apr-15	2	17.9	19.6	17.5	16.2	15.3	22.7
PAPA019	10-Apr-15	3	23.2	26.2	21.1	15.5	14.4	38.1
PAPA019	10-Apr-15	4	17.3	17.4	14.7	14.2	13.7	32.6
PAPA019	10-Apr-15	5	25.2	29.4	21.8	14.9	13.8	37.4
PAPA019	10-Apr-15	6	27.8	31.3	25.4	19.8	16.3	47.7
PAPA019	10-Apr-15	7	28.9	28.1	23.4	19.6	16.0	48.2
PAPA019	10-Apr-15	8	27.4	27.7	22.4	20.2	18.4	56.1
PAPA019	10-Apr-15	9	31.8	26.5	20.4	18.3	16.9	55.9
PAPA019	10-Apr-15	10	35.6	24.6	19.3	16.9	15.1	70.0
PAPA019	10-Apr-15	11	47.0	29.1	17.7	15.2	14.3	72.9
PAPA019	01-Apr-16	15	22.0	25.3	20.1	16.9	15.5	35.1
PAPA019	01-Apr-16	16	24.2	27.0	20.1	16.9	15.5	41.8
PAPA019	01-Apr-16	17	21.5	24.4	19.3	16.2	15.1	42.5
PAPA019	01-Apr-16	18	22.4	24.3	19.7	16.8	15.6	43.2
PAPA019	01-Apr-16	19	24.0	24.8	16.0	14.9	14.6	42.6
PAPA019	01-Apr-16	20	20.3	23.5	15.9	15.0	14.4	40.7
PAPA019	01-Apr-16	21	17.1	16.7	15.5	15.0	14.7	40.1
PAPA019	01-Apr-16	22	17.9	18.9	17.7	16.7	15.7	24.6
PAPA019	01-Apr-16	23	20.6	22.3	19.8	17.8	16.3	30.6
PAPA019	02-Apr-16	0	25.8	22.2	19.5	18.0	16.8	52.8
PAPA019	02-Apr-16	1	19.7	21.6	18.8	17.3	16.3	28.5
PAPA019	02-Apr-16	2	19.2	20.6	18.1	17.1	16.2	28.5
PAPA019	02-Apr-16	3	17.2	18.3	17.1	16.2	15.5	20.3
PAPA019	02-Apr-16	4	17.2	18.4	16.8	15.2	14.8	28.3
PAPA019	02-Apr-16	5	22.8	26.8	18.3	16.1	14.7	34.0
PAPA019	02-Apr-16	6	29.0	31.8	28.2	23.8	18.1	36.3
PAPA019	02-Apr-16	7	37.9	33.4	27.3	22.7	19.3	58.4
PAPA019	02-Apr-16	8	26.4	29.3	21.7	19.6	18.2	51.7
PAPA019	02-Apr-16	9	23.1	24.6	19.7	17.8	16.8	40.9
PAPA019	02-Apr-16	10	30.9	25.7	19.2	17.7	16.6	53.5
PAPA019	02-Apr-16	11	21.0	20.8	17.7	16.2	15.3	44.3
PAPA019	02-Apr-16	12	30.5	29.7	19.7	15.9	15.2	50.9
PAPA019	02-Apr-16	13	30.1	29.1	18.5	16.0	15.3	56.5
PAPA019	02-Apr-16	14	24.2	27.3	21.1	16.9	15.2	42.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	02-Apr-16	15	31.8	32.0	23.8	18.8	15.7	55.1
PAPA019	02-Apr-16	16	28.8	31.5	25.2	20.1	15.9	47.9
PAPA019	02-Apr-16	17	26.8	30.4	24.9	19.6	17.1	37.3
PAPA019	02-Apr-16	18	35.8	31.2	26.5	23.1	19.2	62.7
PAPA019	02-Apr-16	19	25.8	29.0	24.0	20.1	17.4	38.7
PAPA019	02-Apr-16	20	22.0	25.5	18.2	14.7	14.3	37.2
PAPA019	02-Apr-16	21	21.2	18.1	14.5	14.3	14.2	43.0
PAPA019	02-Apr-16	22	17.1	16.8	14.7	14.5	14.3	33.0
PAPA019	02-Apr-16	23	14.6	14.8	14.5	14.4	14.2	21.3
PAPA019	03-Apr-16	0	15.2	16.1	14.6	14.4	14.2	25.8
PAPA019	03-Apr-16	1	17.5	17.3	16.0	15.3	14.7	35.0
PAPA019	03-Apr-16	2	16.3	17.1	16.2	15.3	14.7	20.6
PAPA019	03-Apr-16	3	17.4	17.0	15.2	14.6	14.3	31.8
PAPA019	03-Apr-16	4	15.2	15.8	15.0	14.6	14.3	21.4
PAPA019	03-Apr-16	5	19.8	23.6	15.0	14.5	14.3	35.9
PAPA019	03-Apr-16	6	28.8	32.2	27.2	17.9	15.1	41.4
PAPA019	03-Apr-16	7	29.6	32.6	27.7	20.3	16.2	44.6
PAPA019	03-Apr-16	8	21.8	22.5	18.5	16.7	15.7	43.5
PAPA019	03-Apr-16	9	25.1	26.5	18.2	16.9	15.9	44.2
PAPA019	03-Apr-16	10	23.0	22.0	18.3	17.0	16.3	46.0
PAPA019	03-Apr-16	11	30.1	26.2	19.8	17.0	15.7	53.1
PAPA019	03-Apr-16	12	29.9	33.2	26.3	19.7	16.6	48.4
PAPA019	03-Apr-16	13	31.1	34.8	27.7	22.0	17.8	46.7
PAPA019	03-Apr-16	14	29.8	31.8	24.0	17.8	15.4	58.4
PAPA019	03-Apr-16	15	25.3	28.9	22.5	16.8	15.7	44.5
PAPA019	03-Apr-16	16	26.2	29.3	22.8	17.5	15.2	41.9
PAPA019	03-Apr-16	17	25.3	27.2	19.9	16.8	15.4	44.9
PAPA019	03-Apr-16	18	18.9	21.5	17.2	15.2	14.7	34.1
PAPA019	03-Apr-16	19	25.6	25.2	15.2	14.7	14.5	49.1
PAPA019	03-Apr-16	20	25.9	25.9	17.3	14.6	14.4	53.8
PAPA019	03-Apr-16	21	21.6	26.1	17.2	14.6	14.3	37.2
PAPA019	03-Apr-16	22	24.4	28.3	20.7	15.0	14.6	37.4
PAPA019	03-Apr-16	23	19.9	19.9	15.4	14.7	14.4	42.2
PAPA019	04-Apr-16	0	19.9	16.6	14.9	14.7	14.5	40.3
PAPA019	04-Apr-16	1	15.0	15.4	14.9	14.6	14.4	19.6
PAPA019	04-Apr-16	2	18.4	20.3	18.1	15.5	14.9	24.0
PAPA019	04-Apr-16	3	17.3	18.5	16.7	16.1	15.5	35.9
PAPA019	04-Apr-16	4	17.3	17.8	16.9	15.7	15.2	35.0
PAPA019	04-Apr-16	5	23.5	24.5	19.2	16.9	16.2	44.9
PAPA019	04-Apr-16	6	53.0	36.9	30.7	25.7	19.6	76.0
PAPA019	04-Apr-16	7	30.6	33.4	29.6	25.6	20.6	42.1
PAPA019	04-Apr-16	8	33.9	34.3	25.0	20.5	18.2	53.0
PAPA019	04-Apr-16	9	23.8	23.2	19.5	17.0	16.0	53.1
PAPA019	04-Apr-16	10	21.9	20.7	16.9	15.9	15.3	48.2
PAPA019	04-Apr-16	11	33.5	27.9	19.9	16.9	15.7	63.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	04-Apr-16	12	26.7	29.8	22.5	17.8	15.8	44.9
PAPA019	04-Apr-16	13	33.4	37.1	29.7	22.1	16.3	48.5
PAPA019	04-Apr-16	14	40.5	45.3	33.9	20.2	16.5	53.8
PAPA019	04-Apr-16	15	27.8	30.1	23.6	18.4	15.7	47.8
PAPA019	04-Apr-16	16	57.3	39.7	21.3	16.7	15.3	89.3
PAPA019	04-Apr-16	17	27.4	29.3	20.3	16.6	15.1	52.3
PAPA019	04-Apr-16	18	37.1	41.7	27.9	19.8	16.0	51.2
PAPA019	04-Apr-16	19	26.5	28.1	23.1	18.5	16.0	53.3
PAPA019	04-Apr-16	20	25.1	27.7	22.3	15.1	14.5	51.7
PAPA019	04-Apr-16	21	17.8	17.8	15.1	14.8	14.5	31.4
PAPA019	04-Apr-16	22	18.3	16.6	15.0	14.7	14.4	48.1
PAPA019	04-Apr-16	23	33.9	15.8	15.0	14.7	14.5	57.5
PAPA019	05-Apr-16	0	29.3	33.6	18.3	15.0	14.7	44.9
PAPA019	05-Apr-16	1	27.2	31.5	15.7	14.6	14.4	44.2
PAPA019	05-Apr-16	2	23.6	27.1	20.2	15.2	14.6	38.2
PAPA019	05-Apr-16	3	16.5	17.8	15.9	14.7	14.5	31.2
PAPA019	05-Apr-16	4	18.9	21.5	16.7	15.1	14.7	33.2
PAPA019	05-Apr-16	5	21.7	26.5	15.4	14.9	14.6	39.5
PAPA019	05-Apr-16	6	33.3	35.9	31.4	26.8	18.8	50.7
PAPA019	05-Apr-16	7	30.0	32.9	28.6	24.1	17.3	43.6
PAPA019	05-Apr-16	8	34.4	34.8	29.7	24.5	18.7	60.0
PAPA019	05-Apr-16	9	35.9	39.1	33.7	28.9	24.6	51.2
PAPA019	05-Apr-16	10	40.3	43.7	38.1	32.7	27.7	52.4
PAPA019	05-Apr-16	11	41.4	45.0	39.1	31.7	24.5	56.5
PAPA019	05-Apr-16	12	40.3	42.7	37.3	32.5	25.6	68.8
PAPA019	05-Apr-16	13	38.7	42.2	36.8	30.2	22.9	49.2
PAPA019	05-Apr-16	14	38.0	41.7	35.9	28.2	21.1	49.7
PAPA019	05-Apr-16	15	40.6	44.0	37.7	31.7	23.6	57.9
PAPA019	05-Apr-16	16	41.3	44.8	39.1	33.5	29.3	54.8
PAPA019	05-Apr-16	17	38.7	42.2	36.9	31.0	24.4	49.3
PAPA019	05-Apr-16	18	38.1	40.8	35.1	29.7	23.3	60.0
PAPA019	05-Apr-16	19	32.2	35.4	29.8	23.4	18.3	47.9
PAPA019	05-Apr-16	20	26.1	28.8	25.0	21.4	18.6	39.6
PAPA019	05-Apr-16	21	22.4	25.9	20.5	16.5	15.4	32.8
PAPA019	05-Apr-16	22	16.5	17.6	16.2	15.1	14.6	23.8
PAPA019	05-Apr-16	23	18.7	16.4	15.3	14.7	14.5	35.2
PAPA019	06-Apr-16	0	17.4	17.3	16.0	15.0	14.5	34.6
PAPA019	06-Apr-16	1	16.8	17.8	16.6	15.6	15.0	24.1
PAPA019	06-Apr-16	2	43.9	17.4	15.7	15.1	14.8	69.0
PAPA019	06-Apr-16	3	16.5	17.4	16.2	15.6	14.9	22.8
PAPA019	06-Apr-16	4	18.3	19.4	18.1	17.1	16.4	22.9
PAPA019	06-Apr-16	5	20.8	22.2	18.8	17.6	16.7	42.7
PAPA019	06-Apr-16	6	31.2	33.9	30.1	25.7	20.6	44.1
PAPA019	06-Apr-16	7	31.4	33.5	29.4	25.2	19.1	42.3
PAPA019	06-Apr-16	8	32.8	29.1	24.2	22.5	20.9	58.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	06-Apr-16	9	34.6	28.4	24.1	22.1	20.6	59.4
PAPA019	06-Apr-16	10	25.5	26.0	23.0	21.0	19.0	53.3
PAPA019	06-Apr-16	11	25.6	28.8	23.5	20.6	18.8	36.8
PAPA019	06-Apr-16	12	32.7	32.6	25.9	22.5	20.3	62.0
PAPA019	06-Apr-16	13	35.0	38.8	32.4	25.3	19.3	48.5
PAPA019	06-Apr-16	14	40.0	43.4	37.8	30.2	21.4	55.7
PAPA019	06-Apr-16	15	39.6	43.2	37.4	30.7	23.3	50.7
PAPA019	06-Apr-16	16	40.1	43.7	37.7	30.4	23.9	51.9
PAPA019	06-Apr-16	17	34.8	38.1	32.4	27.7	22.1	49.1
PAPA019	06-Apr-16	18	35.8	39.4	33.7	27.0	21.7	47.8
PAPA019	06-Apr-16	19	28.1	32.0	25.4	16.9	15.3	40.6
PAPA019	06-Apr-16	20	24.3	27.9	20.8	16.4	15.1	38.9
PAPA019	06-Apr-16	21	17.2	18.4	16.0	15.1	14.7	34.6
PAPA019	06-Apr-16	22	15.6	16.7	15.3	14.7	14.4	20.3
PAPA019	06-Apr-16	23	16.2	16.7	15.4	14.7	14.4	29.3
PAPA019	07-Apr-16	0	16.2	17.3	15.8	14.7	14.4	31.6
PAPA019	07-Apr-16	1	16.8	18.4	16.4	15.5	15.0	21.4
PAPA019	07-Apr-16	2	15.9	16.1	15.2	14.7	14.5	29.8
PAPA019	07-Apr-16	3	15.6	15.5	14.9	14.6	14.3	29.8
PAPA019	07-Apr-16	4	14.7	14.9	14.6	14.4	14.3	25.4
PAPA019	07-Apr-16	5	26.2	31.3	16.4	14.5	14.3	41.6
PAPA019	07-Apr-16	6	31.8	34.3	31.3	27.5	19.7	39.0
PAPA019	07-Apr-16	7	30.5	33.2	29.3	24.1	18.8	45.2
PAPA019	07-Apr-16	8	37.6	31.8	26.1	22.3	18.8	59.5
PAPA019	07-Apr-16	9	32.8	34.3	27.8	23.6	19.6	55.1
PAPA019	07-Apr-16	10	37.5	38.2	33.1	27.7	24.5	58.5
PAPA019	07-Apr-16	11	33.4	34.2	28.9	24.9	21.5	55.1
PAPA019	07-Apr-16	12	30.5	33.4	28.4	24.1	20.7	53.2
PAPA019	07-Apr-16	13	32.7	34.7	27.9	23.7	19.6	53.4
PAPA019	07-Apr-16	14	30.1	33.9	27.8	23.1	19.0	40.9
PAPA019	07-Apr-16	15	29.4	33.3	26.0	20.4	17.6	41.9
PAPA019	07-Apr-16	16	29.1	32.5	26.6	21.9	18.5	42.5
PAPA019	07-Apr-16	17	30.8	30.4	25.0	20.3	16.8	61.9
PAPA019	07-Apr-16	18	32.5	35.9	30.1	25.6	21.0	44.3
PAPA019	07-Apr-16	19	28.9	31.9	26.9	23.8	20.1	41.1
PAPA019	07-Apr-16	20	25.8	28.8	24.2	18.8	16.5	39.0
PAPA019	07-Apr-16	21	31.0	20.4	18.4	17.2	16.2	59.3
PAPA019	07-Apr-16	22	17.7	18.0	15.2	14.5	14.3	34.5
PAPA019	07-Apr-16	23	16.3	16.0	15.4	14.7	14.4	38.0
PAPA019	08-Apr-16	0	19.1	16.7	15.7	15.3	15.0	38.6
PAPA019	08-Apr-16	1	15.7	16.2	15.6	15.2	14.9	23.1
PAPA019	08-Apr-16	2	15.6	16.2	15.6	15.0	14.7	19.8
PAPA019	08-Apr-16	3	15.2	15.6	15.2	14.8	14.5	20.9
PAPA019	08-Apr-16	4	15.6	15.8	15.1	14.8	14.4	38.3
PAPA019	08-Apr-16	5	25.9	31.2	14.9	14.6	14.4	46.5

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	08-Apr-16	6	31.6	34.0	31.0	27.2	20.0	41.2
PAPA019	08-Apr-16	7	32.6	35.6	28.2	20.5	16.5	54.2
PAPA019	08-Apr-16	8	30.7	26.0	19.4	17.2	16.0	55.9
PAPA019	08-Apr-16	9	32.4	22.4	19.4	17.7	16.1	56.5
PAPA019	08-Apr-16	10	25.3	22.0	19.5	17.6	16.0	52.1
PAPA019	08-Apr-16	11	29.5	22.7	17.4	16.1	15.3	54.9
PAPA019	08-Apr-16	12	22.3	24.4	18.5	16.4	15.6	43.9
PAPA019	08-Apr-16	13	26.4	28.4	20.1	16.9	15.6	47.8
PAPA019	08-Apr-16	14	28.2	28.3	19.2	16.4	15.5	49.2
PAPA019	08-Apr-16	15	28.7	30.3	20.9	16.5	15.5	54.1
PAPA019	08-Apr-16	16	24.7	28.1	20.1	16.3	15.0	44.0
PAPA019	08-Apr-16	17	24.1	27.1	17.8	15.6	14.8	47.0
PAPA019	08-Apr-16	18	17.1	18.4	15.6	14.9	14.6	31.4
PAPA019	08-Apr-16	19	34.5	20.6	16.0	14.7	14.4	59.5
PAPA019	08-Apr-16	20	25.5	28.8	19.3	15.2	14.3	40.7
PAPA019	08-Apr-16	21	34.8	16.5	15.4	14.9	14.5	63.2
PAPA019	08-Apr-16	22	15.7	16.1	15.2	14.8	14.5	24.3
PAPA019	08-Apr-16	23	18.9	18.4	16.9	15.7	15.2	46.5
PAPA019	09-Apr-16	0	32.5	19.6	18.3	17.3	16.1	59.4
PAPA019	09-Apr-16	1	42.4	23.3	18.5	16.9	15.6	68.1
PAPA019	09-Apr-16	2	17.9	18.6	17.4	16.7	16.2	26.2
PAPA019	09-Apr-16	3	20.1	18.7	17.6	16.3	15.5	47.3
PAPA019	09-Apr-16	4	19.9	16.4	15.3	14.6	14.4	46.5
PAPA019	09-Apr-16	5	38.5	33.9	15.7	14.6	14.4	56.2
PAPA019	09-Apr-16	6	43.3	48.4	30.5	26.1	20.8	58.5
PAPA019	09-Apr-16	7	27.9	31.0	26.1	22.0	16.5	45.7
PAPA019	09-Apr-16	8	33.2	28.8	21.0	16.6	15.7	62.1
PAPA019	09-Apr-16	9	25.5	20.9	16.9	16.0	15.5	51.0
PAPA019	09-Apr-16	10	31.4	31.1	18.6	15.9	15.3	54.6
PAPA019	09-Apr-16	11	25.2	26.6	20.0	16.7	15.5	46.7
PAPA019	09-Apr-16	12	28.6	28.4	21.3	17.6	15.8	55.5
PAPA019	09-Apr-16	13	29.6	30.5	23.1	17.2	15.3	52.2
PAPA019	09-Apr-16	14	27.5	29.3	21.0	15.8	15.0	47.2
PAPA019	09-Apr-16	15	30.5	33.3	26.0	19.4	15.4	51.7
PAPA019	09-Apr-16	16	30.5	32.5	26.4	20.6	17.0	52.7
PAPA019	09-Apr-16	17	24.8	27.9	21.6	18.4	16.2	41.5
PAPA019	09-Apr-16	18	30.1	31.9	24.4	19.5	16.8	53.7
PAPA019	09-Apr-16	19	27.4	30.9	25.1	20.0	16.7	38.7
PAPA019	09-Apr-16	20	25.0	28.2	22.6	18.3	16.4	41.4
PAPA019	09-Apr-16	21	18.1	20.0	16.9	15.6	14.8	33.8
PAPA019	09-Apr-16	22	26.8	25.5	15.0	14.6	14.4	46.2
PAPA019	09-Apr-16	23	18.1	18.5	15.4	14.6	14.3	36.6
PAPA019	10-Apr-16	0	20.6	20.1	17.6	16.0	14.7	39.5
PAPA019	10-Apr-16	1	17.1	18.6	16.7	15.8	15.2	27.9
PAPA019	10-Apr-16	2	16.1	17.6	15.6	14.9	14.7	20.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA019	10-Apr-16	3	15.8	16.5	15.5	14.9	14.7	21.5
PAPA019	10-Apr-16	4	16.1	17.5	15.3	14.8	14.5	25.5
PAPA019	10-Apr-16	5	22.6	26.4	16.3	15.6	14.9	38.4
PAPA019	10-Apr-16	6	29.8	32.2	29.0	25.5	20.0	44.0
PAPA019	10-Apr-16	7	26.9	29.6	24.9	20.6	17.5	44.0
PAPA019	10-Apr-16	8	27.2	30.5	24.5	20.5	16.6	39.7
PAPA019	10-Apr-16	9	33.1	39.2	26.4	21.4	17.7	45.6
PAPA019	10-Apr-16	10	31.0	36.3	20.2	15.3	14.8	51.4
PAPA019	10-Apr-16	11	29.6	24.6	15.6	15.0	14.7	54.0
PAPA019	10-Apr-16	12	25.3	25.2	15.8	15.1	14.8	49.9
PAPA019	10-Apr-16	13	24.0	20.0	15.9	15.2	14.9	48.8
PAPA019	10-Apr-16	14	24.4	24.0	17.6	15.8	15.1	47.2
PAPA019	10-Apr-16	15	26.7	30.0	20.9	18.4	16.2	44.7
PAPA019	10-Apr-16	16	25.6	23.2	18.2	16.3	15.0	52.0
PAPA019	10-Apr-16	17	29.3	33.0	26.1	19.4	15.1	42.6
PAPA019	10-Apr-16	18	26.8	29.8	25.0	21.2	18.3	41.0
PAPA019	10-Apr-16	19	26.9	30.5	22.9	17.6	15.2	42.0
PAPA019	10-Apr-16	20	25.0	27.7	21.6	19.3	17.0	44.5
PAPA019	10-Apr-16	21	22.1	24.1	21.1	19.2	17.2	32.7
PAPA019	10-Apr-16	22	21.9	23.8	20.5	19.2	17.9	34.3
PAPA019	10-Apr-16	23	22.3	24.0	21.7	19.6	17.9	30.0
PAPA019	11-Apr-16	0	24.1	26.3	23.5	21.1	19.2	32.3
PAPA019	11-Apr-16	1	17.7	19.8	16.9	15.2	14.8	25.2
PAPA019	11-Apr-16	2	17.4	19.4	15.2	14.9	14.6	29.9
PAPA019	11-Apr-16	3	17.8	15.2	14.7	14.5	14.4	37.1
PAPA019	11-Apr-16	4	14.7	15.0	14.7	14.5	14.3	17.6
PAPA019	11-Apr-16	5	22.1	24.2	15.4	14.6	14.4	43.5
PAPA019	11-Apr-16	6	29.8	32.7	28.6	24.3	17.7	48.8
PAPA019	11-Apr-16	7	31.6	34.4	28.6	23.0	17.2	49.1
PAPA019	11-Apr-16	8	23.1	26.8	19.7	16.8	15.6	37.4
PAPA019	11-Apr-16	9	28.7	23.9	17.7	16.2	15.2	51.0
PAPA019	11-Apr-16	10	22.9	22.2	18.2	16.9	16.1	44.5
PAPA019	11-Apr-16	11	22.2	20.7	17.4	16.2	15.4	53.4
PAPA019	11-Apr-16	12	24.9	26.1	17.6	16.1	15.3	51.6
PAPA019	11-Apr-16	13	23.1	24.1	17.8	16.0	15.4	52.5
PAPA019	11-Apr-16	14	29.1	32.7	26.4	17.0	15.4	47.2
PAPA019	11-Apr-16	15	25.5	27.5	21.0	17.3	15.6	48.2
PAPA021	10-Apr-15	11	80.2	29.8	18.8	17.2	16.4	94.0
PAPA021	10-Apr-15	12	38.5	35.1	22.2	18.0	16.5	62.9
PAPA021	10-Apr-15	13	28.9	23.3	18.3	17.1	16.3	53.3
PAPA021	10-Apr-15	14	23.6	25.2	18.3	17.3	16.4	41.3
PAPA021	10-Apr-15	15	26.5	24.2	17.7	16.5	16.0	51.5
PAPA021	10-Apr-15	16	22.9	23.8	18.4	17.2	16.4	43.3
PAPA021	10-Apr-15	17	23.1	23.0	16.5	15.9	15.5	43.6
PAPA021	10-Apr-15	18	24.8	20.7	16.1	15.6	15.1	57.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA021	10-Apr-15	19	22.8	23.8	17.2	15.4	14.9	46.1
PAPA021	10-Apr-15	20	21.8	22.7	17.4	15.8	15.0	41.5
PAPA021	10-Apr-15	21	18.1	19.3	16.3	15.4	14.6	28.6
PAPA021	10-Apr-15	22	17.5	18.2	16.5	15.6	14.9	29.2
PAPA021	10-Apr-15	23	22.4	25.9	18.9	15.4	14.6	29.8
PAPA021	11-Apr-15	0	21.5	23.8	20.5	16.6	15.1	40.0
PAPA021	11-Apr-15	1	23.0	24.2	22.6	21.5	19.9	32.6
PAPA021	11-Apr-15	2	24.0	25.7	24.0	20.8	18.1	33.0
PAPA021	11-Apr-15	3	25.5	27.7	25.3	21.7	18.5	32.1
PAPA021	11-Apr-15	4	23.0	25.5	22.0	19.6	18.1	30.3
PAPA021	11-Apr-15	5	18.8	20.8	18.2	16.7	15.6	27.4
PAPA021	11-Apr-15	6	19.7	21.2	19.0	17.4	16.0	33.8
PAPA021	11-Apr-15	7	22.3	24.3	20.4	17.3	16.1	37.5
PAPA021	11-Apr-15	8	46.4	34.2	23.1	20.1	18.1	69.1
PAPA021	11-Apr-15	9	47.9	32.8	20.4	18.0	16.7	74.8
PAPA021	11-Apr-15	10	32.4	27.6	19.9	17.8	16.5	55.0
PAPA021	11-Apr-15	11	27.0	30.1	22.3	18.2	16.6	45.5
PAPA021	11-Apr-15	12	37.1	38.4	27.8	20.3	17.4	62.1
PAPA021	01-Apr-16	12	36.2	28.3	23.0	19.5	17.4	67.3
PAPA021	01-Apr-16	13	28.5	31.6	24.3	19.2	17.1	48.9
PAPA021	01-Apr-16	14	30.5	33.6	27.1	22.2	18.3	45.4
PAPA021	01-Apr-16	15	30.9	32.5	24.4	18.4	16.2	50.8
PAPA021	01-Apr-16	16	33.8	32.6	24.5	19.2	16.4	58.0
PAPA021	01-Apr-16	17	25.1	28.3	23.3	18.2	15.4	37.5
PAPA021	01-Apr-16	18	25.8	29.1	24.1	20.0	15.8	36.0
PAPA021	01-Apr-16	19	22.6	22.4	16.7	14.6	14.0	40.6
PAPA021	01-Apr-16	20	21.8	24.1	18.3	15.4	14.6	40.1
PAPA021	01-Apr-16	21	18.8	20.9	18.0	15.9	14.7	29.6
PAPA021	01-Apr-16	22	18.4	20.4	17.6	15.8	14.9	29.9
PAPA021	01-Apr-16	23	22.9	23.3	20.6	16.4	14.7	41.8
PAPA021	02-Apr-16	0	22.2	23.3	20.8	19.1	18.0	36.4
PAPA021	02-Apr-16	1	20.3	22.0	19.7	18.5	17.6	24.4
PAPA021	02-Apr-16	2	18.8	19.8	18.7	17.8	16.6	26.2
PAPA021	02-Apr-16	3	17.6	18.3	17.4	16.8	16.1	28.3
PAPA021	02-Apr-16	4	17.4	18.4	16.4	15.7	15.1	27.4
PAPA021	02-Apr-16	5	21.7	25.5	18.9	16.9	15.0	31.9
PAPA021	02-Apr-16	6	27.3	30.0	26.3	20.9	17.2	43.5
PAPA021	02-Apr-16	7	29.7	28.7	24.1	20.8	17.5	49.2
PAPA021	02-Apr-16	8	22.7	24.9	21.0	19.0	16.9	42.7
PAPA021	02-Apr-16	9	24.5	26.8	21.9	19.8	18.3	37.2
PAPA021	02-Apr-16	10	41.1	29.6	21.1	19.2	17.6	65.6
PAPA021	02-Apr-16	11	26.5	22.8	19.1	16.7	15.2	56.3
PAPA021	02-Apr-16	12	36.6	25.7	19.6	16.1	15.1	69.1
PAPA021	02-Apr-16	13	28.3	30.5	23.7	18.2	15.4	49.2
PAPA021	02-Apr-16	14	28.3	32.4	24.3	17.4	15.4	41.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA021	02-Apr-16	15	32.0	35.5	29.5	24.2	18.7	45.1
PAPA021	02-Apr-16	16	30.6	33.8	28.2	23.2	17.7	46.3
PAPA021	02-Apr-16	17	31.8	32.7	27.0	22.5	17.6	60.9
PAPA021	02-Apr-16	18	28.1	31.2	26.5	22.4	18.8	40.4
PAPA021	02-Apr-16	19	23.6	27.5	19.7	16.3	15.0	36.6
PAPA021	02-Apr-16	20	20.5	23.3	17.3	14.3	13.9	35.0
PAPA021	02-Apr-16	21	15.7	16.8	14.3	13.8	13.6	30.5
PAPA021	02-Apr-16	22	18.7	16.2	14.2	13.9	13.7	38.2
PAPA021	02-Apr-16	23	15.0	15.5	14.3	13.8	13.7	27.1
PAPA021	03-Apr-16	0	16.9	19.0	15.8	14.4	14.0	33.8
PAPA021	03-Apr-16	1	17.7	19.6	16.8	15.6	15.0	35.6
PAPA021	03-Apr-16	2	17.3	18.4	16.5	15.4	14.6	33.5
PAPA021	03-Apr-16	3	17.8	18.1	16.2	15.1	14.5	35.6
PAPA021	03-Apr-16	4	15.9	15.9	14.9	14.4	13.9	36.0
PAPA021	03-Apr-16	5	17.2	19.2	16.3	15.2	14.4	30.4
PAPA021	03-Apr-16	6	30.8	30.2	22.8	18.7	15.6	57.3
PAPA021	03-Apr-16	7	26.7	28.5	23.8	19.4	16.5	45.9
PAPA021	03-Apr-16	8	41.8	27.2	18.6	16.3	15.3	67.8
PAPA021	03-Apr-16	9	34.2	29.5	18.5	16.6	15.3	57.2
PAPA021	03-Apr-16	10	21.1	22.7	18.1	16.7	15.6	43.0
PAPA021	03-Apr-16	11	41.9	33.3	22.4	17.9	15.8	65.8
PAPA021	03-Apr-16	12	30.3	33.8	27.7	21.6	17.3	42.7
PAPA021	03-Apr-16	13	30.1	33.6	27.8	21.7	16.7	42.2
PAPA021	03-Apr-16	14	27.4	30.7	22.6	17.8	15.6	43.7
PAPA021	03-Apr-16	15	26.6	29.9	23.3	18.0	15.6	42.0
PAPA021	03-Apr-16	16	25.8	29.6	21.1	16.1	14.6	41.8
PAPA021	03-Apr-16	17	24.6	27.3	21.4	17.8	15.5	40.2
PAPA021	03-Apr-16	18	19.4	21.7	17.7	15.2	14.3	39.0
PAPA021	03-Apr-16	19	20.8	22.1	17.2	15.2	14.5	38.7
PAPA021	03-Apr-16	20	20.9	24.3	18.0	14.7	14.3	33.2
PAPA021	03-Apr-16	21	24.7	29.1	20.9	15.1	14.6	39.5
PAPA021	03-Apr-16	22	26.6	30.8	19.1	15.4	14.8	42.0
PAPA021	03-Apr-16	23	26.9	23.7	18.1	15.9	15.0	51.6
PAPA021	04-Apr-16	0	20.5	21.9	18.6	16.6	14.9	34.5
PAPA021	04-Apr-16	1	17.8	19.4	16.2	15.2	14.5	37.1
PAPA021	04-Apr-16	2	17.4	18.6	16.3	15.5	14.9	34.8
PAPA021	04-Apr-16	3	21.3	22.6	20.3	18.9	17.9	33.4
PAPA021	04-Apr-16	4	26.6	21.9	20.0	18.3	16.8	54.0
PAPA021	04-Apr-16	5	35.0	24.2	20.4	17.7	16.2	62.6
PAPA021	04-Apr-16	6	35.5	35.2	25.6	22.5	19.8	54.5
PAPA021	04-Apr-16	7	29.0	29.9	26.9	23.7	19.3	46.5
PAPA021	04-Apr-16	8	37.2	32.5	24.0	21.8	19.2	65.8
PAPA021	04-Apr-16	9	22.4	24.1	20.5	18.4	16.8	35.8
PAPA021	04-Apr-16	10	21.6	22.3	17.5	16.3	15.6	39.6
PAPA021	04-Apr-16	11	25.1	28.7	20.0	16.4	15.6	42.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA021	04-Apr-16	12	28.5	32.7	23.2	17.2	15.6	43.2
PAPA021	04-Apr-16	13	35.6	39.3	29.7	20.9	16.3	52.5
PAPA021	04-Apr-16	14	30.5	34.5	25.0	17.6	15.5	46.2
PAPA021	04-Apr-16	15	30.4	33.3	23.4	17.4	15.4	49.7
PAPA021	04-Apr-16	16	34.9	34.0	25.8	17.5	15.4	61.3
PAPA021	04-Apr-16	17	30.0	33.9	24.0	15.1	14.5	47.6
PAPA021	04-Apr-16	18	34.7	39.0	30.2	23.4	19.9	51.1
PAPA021	12-Apr-16	14	34.0	36.8	28.6	22.6	19.9	54.2
PAPA021	12-Apr-16	15	26.9	27.6	22.8	20.5	19.1	46.7
PAPA021	12-Apr-16	16	26.5	28.7	24.4	22.4	20.8	43.4
PAPA021	12-Apr-16	17	25.1	28.5	21.6	19.5	17.8	43.2
PAPA021	12-Apr-16	18	21.5	23.0	20.6	18.9	17.0	36.3
PAPA021	12-Apr-16	19	23.4	24.7	18.5	17.2	16.1	38.6
PAPA021	12-Apr-16	20	31.0	34.4	27.7	23.8	19.6	50.7
PAPA021	12-Apr-16	21	31.0	33.4	29.9	26.5	24.5	47.3
PAPA021	12-Apr-16	22	29.2	31.3	28.1	26.5	24.8	44.0
PAPA021	12-Apr-16	23	28.7	30.0	28.5	27.3	25.0	35.0
PAPA022	11-Apr-15	17	38.5	41.9	36.1	30.8	26.0	51.6
PAPA022	11-Apr-15	18	40.5	43.9	37.7	29.1	24.1	54.4
PAPA022	11-Apr-15	19	32.8	35.5	30.7	27.4	24.2	49.5
PAPA022	11-Apr-15	20	33.0	35.0	32.1	29.7	27.5	44.2
PAPA022	11-Apr-15	21	34.0	36.3	33.2	30.6	28.0	41.7
PAPA022	11-Apr-15	22	30.2	33.0	28.6	26.0	24.8	41.7
PAPA022	11-Apr-15	23	27.9	30.3	27.2	24.6	23.0	33.7
PAPA022	12-Apr-15	0	33.3	36.7	31.2	28.8	26.3	43.2
PAPA022	12-Apr-15	1	34.1	36.9	33.1	29.3	26.2	41.5
PAPA022	12-Apr-15	2	33.9	36.5	32.5	29.8	26.7	43.8
PAPA022	12-Apr-15	3	30.3	32.2	29.7	27.8	24.9	37.6
PAPA022	12-Apr-15	4	52.6	59.2	36.2	31.6	27.2	64.7
PAPA022	12-Apr-15	5	56.3	60.8	51.9	36.2	30.2	64.5
PAPA022	12-Apr-15	6	34.3	36.7	33.3	30.3	25.7	46.0
PAPA022	12-Apr-15	7	31.5	34.2	30.1	27.6	25.3	43.5
PAPA022	12-Apr-15	8	28.6	31.4	27.2	24.5	21.7	38.8
PAPA022	12-Apr-15	9	33.5	36.6	30.8	26.6	23.3	48.9
PAPA022	12-Apr-15	10	33.9	36.5	29.7	25.1	21.5	60.1
PAPA022	12-Apr-15	11	28.9	32.3	26.2	23.3	20.7	41.6
PAPA022	12-Apr-15	12	29.7	32.7	26.9	23.7	21.3	46.3
PAPA022	12-Apr-15	13	41.7	37.6	27.3	23.1	21.2	65.2
PAPA022	12-Apr-15	14	28.3	31.3	25.6	22.4	20.5	42.8
PAPA022	12-Apr-15	15	31.9	35.5	28.9	23.7	20.8	47.7
PAPA022	12-Apr-15	16	33.9	37.3	30.1	24.9	22.4	50.3
PAPA022	12-Apr-15	17	32.4	36.0	29.5	24.9	21.5	47.2
PAPA022	12-Apr-15	18	31.6	34.8	28.7	24.4	20.3	46.9
PAPA022	12-Apr-15	19	29.2	29.8	25.5	22.7	20.4	49.8
PAPA022	12-Apr-15	20	27.9	30.2	27.1	24.5	21.8	36.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA022	12-Apr-15	21	31.9	33.9	30.0	26.0	23.2	48.9
PAPA022	12-Apr-15	22	27.3	29.5	26.7	24.4	22.4	35.9
PAPA022	12-Apr-15	23	27.7	28.8	27.1	25.7	23.7	37.4
PAPA022	13-Apr-15	0	26.5	28.1	26.1	24.8	23.3	32.7
PAPA022	13-Apr-15	1	25.3	26.6	25.0	23.9	22.5	30.6
PAPA022	13-Apr-15	2	27.7	29.6	27.1	25.8	24.3	33.4
PAPA022	13-Apr-15	3	32.3	35.4	31.3	27.3	24.9	39.4
PAPA022	13-Apr-15	4	55.4	60.9	31.6	25.4	23.3	65.4
PAPA022	13-Apr-15	5	56.7	61.2	52.1	34.4	27.7	65.2
PAPA022	13-Apr-15	6	34.1	36.5	32.0	29.5	27.3	49.2
PAPA022	13-Apr-15	7	32.6	34.5	31.8	29.8	28.2	49.0
PAPA022	13-Apr-15	8	34.7	34.8	31.6	27.8	25.0	55.2
PAPA022	13-Apr-15	9	27.8	28.5	25.1	22.6	21.2	44.6
PAPA022	13-Apr-15	10	24.0	25.5	23.7	22.2	20.9	35.9
PAPA022	13-Apr-15	11	33.9	26.1	23.0	21.6	20.1	58.3
PAPA022	13-Apr-15	12	25.3	26.4	22.8	21.3	20.1	41.8
PAPA022	13-Apr-15	13	25.0	25.9	22.8	21.1	20.1	51.9
PAPA022	13-Apr-15	14	25.3	27.2	24.5	22.0	20.0	41.0
PAPA022	13-Apr-15	15	26.2	28.3	24.5	22.5	20.4	41.2
PAPA022	13-Apr-15	16	31.3	35.5	26.6	22.8	20.7	45.2
PAPA022	13-Apr-16	0	25.3	26.1	24.4	22.4	20.3	44.5
PAPA022	13-Apr-16	1	25.7	26.6	24.8	23.2	21.6	43.3
PAPA022	13-Apr-16	2	27.0	27.8	26.1	24.6	21.9	43.1
PAPA022	13-Apr-16	3	27.9	29.2	27.3	25.8	24.2	44.0
PAPA022	13-Apr-16	4	26.5	28.2	25.9	24.4	22.8	37.2
PAPA022	13-Apr-16	5	29.8	31.5	29.1	26.2	24.3	41.1
PAPA022	13-Apr-16	6	37.5	39.1	33.6	30.1	27.9	54.0
PAPA022	13-Apr-16	7	31.8	33.4	30.7	29.0	26.5	44.8
PAPA022	13-Apr-16	8	34.6	37.7	32.2	30.5	28.9	47.4
PAPA022	13-Apr-16	9	32.7	34.7	31.3	27.3	25.1	55.2
PAPA022	13-Apr-16	10	26.2	27.8	24.7	22.6	20.6	44.0
PAPA022	13-Apr-16	11	31.2	33.7	25.5	23.0	20.1	45.6
PAPA022	13-Apr-16	12	34.8	38.5	31.9	25.0	22.9	48.1
PAPA022	13-Apr-16	13	27.7	29.7	25.3	22.9	21.1	43.5
PAPA022	13-Apr-16	14	27.0	27.0	24.1	22.2	20.6	47.8
PAPA022	13-Apr-16	15	26.6	28.4	25.1	22.8	20.3	41.4
PAPA022	13-Apr-16	16	32.6	33.1	27.8	25.0	21.3	52.3
PAPA022	13-Apr-16	17	29.9	31.9	28.6	26.3	24.4	46.4
PAPA022	13-Apr-16	18	26.8	29.4	25.8	22.7	20.4	37.0
PAPA022	13-Apr-16	19	25.7	27.3	24.4	22.6	20.4	40.1
PAPA022	13-Apr-16	20	27.2	28.7	25.1	22.9	21.1	43.0
PAPA022	13-Apr-16	21	25.5	27.9	23.3	20.3	18.5	40.6
PAPA022	13-Apr-16	22	27.1	30.1	26.0	21.4	20.0	38.8
PAPA022	13-Apr-16	23	30.6	33.3	29.6	26.1	21.9	44.3
PAPA022	14-Apr-16	0	33.1	36.1	31.8	27.7	24.1	45.2

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA022	14-Apr-16	1	32.3	35.1	30.1	27.0	22.7	47.8
PAPA022	14-Apr-16	2	29.7	32.3	28.7	25.9	23.7	37.7
PAPA022	14-Apr-16	3	33.3	36.1	32.2	29.4	26.3	46.6
PAPA022	14-Apr-16	4	32.0	34.0	31.3	28.9	26.5	47.0
PAPA022	14-Apr-16	5	33.1	35.5	32.3	29.3	26.4	44.0
PAPA022	14-Apr-16	6	34.3	35.2	33.0	31.3	29.4	56.6
PAPA022	14-Apr-16	7	34.9	37.3	33.8	31.4	29.0	49.2
PAPA022	14-Apr-16	8	32.2	34.6	31.3	28.0	25.1	49.4
PAPA022	14-Apr-16	9	33.1	35.6	31.6	28.8	26.1	45.6
PAPA022	14-Apr-16	10	35.1	38.3	33.1	30.0	27.8	48.2
PAPA022	14-Apr-16	11	37.2	40.4	34.4	31.0	27.5	56.2
PAPA022	14-Apr-16	12	44.6	48.3	39.8	32.4	29.3	59.8
PAPA022	14-Apr-16	13	35.1	37.5	33.6	30.9	28.0	47.5
PAPA022	14-Apr-16	14	33.9	36.9	31.5	28.5	25.0	47.0
PAPA022	14-Apr-16	15	33.8	36.7	32.3	28.0	25.0	47.5
PAPA022	14-Apr-16	16	32.2	35.0	27.9	24.9	23.0	50.3
PAPA022	14-Apr-16	17	32.3	34.3	26.0	23.9	21.9	52.9
PAPA022	14-Apr-16	18	29.4	32.8	25.3	21.6	20.1	46.9
PAPA022	14-Apr-16	19	29.5	31.2	28.1	26.1	24.6	48.7
PAPA022	14-Apr-16	20	27.7	29.8	26.0	22.1	20.3	44.8
PAPA022	14-Apr-16	21	25.3	26.5	23.5	21.1	18.8	43.2
PAPA022	14-Apr-16	22	28.2	27.6	24.7	22.9	21.2	45.0
PAPA022	14-Apr-16	23	27.5	28.3	25.4	23.4	20.8	48.6
PAPA022	15-Apr-16	0	25.7	27.7	25.0	22.2	19.0	38.1
PAPA022	15-Apr-16	1	24.6	26.1	23.5	21.2	19.3	45.6
PAPA022	15-Apr-16	2	27.4	27.7	26.2	24.5	22.7	46.6
PAPA022	15-Apr-16	3	28.1	30.5	26.6	24.3	22.1	43.6
PAPA022	15-Apr-16	4	26.6	29.1	25.6	22.7	20.4	40.2
PAPA022	15-Apr-16	5	29.5	30.5	26.4	21.3	18.3	47.8
PAPA022	15-Apr-16	6	27.2	29.1	25.9	24.4	22.6	41.8
PAPA022	15-Apr-16	7	27.5	29.1	26.4	23.8	21.7	44.2
PAPA022	15-Apr-16	8	26.7	29.2	25.1	21.5	18.6	45.2
PAPA022	15-Apr-16	9	30.3	33.7	27.5	23.2	19.7	45.0
PAPA022	15-Apr-16	10	30.9	34.5	27.5	22.8	19.1	45.7
PAPA022	15-Apr-16	11	34.6	38.0	31.5	25.9	21.6	50.1
PAPA022	15-Apr-16	12	38.4	42.2	34.8	27.5	21.9	54.1
PAPA022	15-Apr-16	13	39.3	43.0	36.2	29.8	21.9	55.2
PAPA022	15-Apr-16	14	38.0	41.6	34.4	27.5	21.7	52.4
PAPA022	15-Apr-16	15	37.2	41.1	32.9	24.3	19.5	51.5
PAPA022	15-Apr-16	16	27.0	30.0	23.7	20.5	17.7	42.7
PAPA022	15-Apr-16	17	27.4	29.4	23.0	20.4	18.3	46.7
PAPA022	15-Apr-16	18	34.9	38.3	30.6	23.4	18.5	49.6
PAPA022	15-Apr-16	19	26.6	30.1	20.2	16.6	15.1	43.4
PAPA022	15-Apr-16	20	24.7	27.7	21.9	18.2	15.2	40.8
PAPA022	15-Apr-16	21	24.8	26.8	23.2	20.5	18.6	42.3

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA022	15-Apr-16	22	35.4	26.2	20.9	19.1	17.3	64.0
PAPA022	15-Apr-16	23	23.0	23.6	21.2	18.8	17.2	40.0
PAPA022	16-Apr-16	0	22.9	22.9	20.4	18.4	17.0	40.6
PAPA022	16-Apr-16	1	25.6	25.6	23.0	20.8	18.7	43.8
PAPA022	16-Apr-16	2	23.3	24.6	22.0	20.3	18.8	38.2
PAPA022	16-Apr-16	3	23.5	24.2	21.9	20.3	18.9	41.3
PAPA022	16-Apr-16	4	23.6	24.5	21.9	20.6	19.2	41.0
PAPA022	16-Apr-16	5	27.0	29.2	24.7	22.0	20.4	40.2
PAPA022	16-Apr-16	6	27.4	29.4	24.7	22.6	20.4	44.9
PAPA022	16-Apr-16	7	27.0	27.9	25.8	24.3	22.9	47.2
PAPA022	16-Apr-16	8	26.7	28.6	24.6	22.1	20.2	45.5
PAPA022	16-Apr-16	9	21.8	23.9	19.6	17.1	16.2	48.8
PAPA022	16-Apr-16	10	20.7	23.0	18.3	17.3	16.4	36.6
PAPA022	16-Apr-16	11	19.3	20.7	17.9	17.0	16.4	40.1
PAPA022	16-Apr-16	12	20.1	21.9	18.8	17.6	16.7	32.4
PAPA022	16-Apr-16	13	30.6	32.1	21.3	18.3	16.3	59.9
PAPA022	16-Apr-16	14	30.4	33.8	25.8	19.7	17.2	47.1
PAPA022	16-Apr-16	15	35.9	39.6	32.4	25.2	20.2	50.1
PAPA022	16-Apr-16	16	36.5	40.4	33.0	26.8	21.2	49.6
PAPA022	16-Apr-16	17	38.4	42.2	34.9	28.7	23.7	53.7
PAPA022	16-Apr-16	18	38.6	42.3	35.0	29.2	24.2	54.6
PAPA022	16-Apr-16	19	34.7	38.0	30.5	25.7	22.1	53.0
PAPA022	16-Apr-16	20	30.0	30.0	25.2	22.4	20.8	60.9
PAPA022	16-Apr-16	21	31.1	34.4	27.3	23.6	20.8	47.9
PAPA022	16-Apr-16	22	33.0	36.5	28.7	23.9	20.5	50.5
PAPA022	16-Apr-16	23	24.0	25.6	21.6	18.8	16.3	48.6
PAPA022	17-Apr-16	0	21.7	23.4	20.3	18.4	16.7	35.1
PAPA022	17-Apr-16	1	21.4	23.0	20.9	19.1	17.3	34.4
PAPA022	17-Apr-16	2	22.9	24.0	22.2	20.6	18.9	37.9
PAPA022	17-Apr-16	3	30.3	32.9	28.9	24.5	22.3	45.3
PAPA022	17-Apr-16	4	28.9	29.9	26.4	23.9	22.3	52.7
PAPA022	17-Apr-16	5	27.3	29.6	25.2	22.5	19.8	45.2
PAPA022	17-Apr-16	6	25.0	27.4	23.4	19.9	16.9	43.8
PAPA022	17-Apr-16	7	23.1	25.6	22.0	19.3	16.1	33.4
PAPA022	17-Apr-16	8	26.6	26.8	23.8	21.5	19.3	54.7
PAPA022	17-Apr-16	9	24.8	28.9	20.8	18.0	16.5	36.9
PAPA022	17-Apr-16	10	24.0	27.7	21.1	17.5	16.2	35.8
PAPA022	17-Apr-16	11	25.9	24.8	19.1	17.1	15.4	58.1
PAPA022	17-Apr-16	12	31.1	34.4	27.5	21.8	16.8	49.8
PAPA022	17-Apr-16	13	29.0	32.9	25.3	20.6	17.5	42.5
PAPA022	17-Apr-16	14	29.8	33.4	25.8	20.5	17.4	45.5
PAPA022	17-Apr-16	15	30.7	34.3	27.3	22.7	18.2	44.8
PAPA022	17-Apr-16	16	35.5	39.1	31.3	25.1	19.9	55.3
PAPA022	17-Apr-16	17	33.8	37.4	29.8	24.2	19.1	51.1
PAPA022	17-Apr-16	18	28.9	32.5	25.6	20.4	16.8	44.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA022	17-Apr-16	19	22.5	24.9	18.3	15.8	15.0	46.3
PAPA022	17-Apr-16	20	22.2	22.0	16.9	15.0	14.3	40.7
PAPA022	17-Apr-16	21	41.3	24.2	17.7	15.3	14.5	66.1
PAPA022	17-Apr-16	22	17.0	17.9	16.4	15.3	14.7	34.0
PAPA022	17-Apr-16	23	24.7	27.6	22.0	18.5	16.1	43.6
PAPA022	18-Apr-16	0	30.6	31.5	28.3	26.2	24.0	52.2
PAPA022	18-Apr-16	1	30.7	31.9	29.8	27.9	25.6	51.2
PAPA022	18-Apr-16	2	32.0	34.2	31.2	28.5	26.2	47.4
PAPA022	18-Apr-16	3	31.0	32.4	30.6	28.9	26.5	41.8
PAPA022	18-Apr-16	4	30.5	31.8	29.8	27.6	26.2	48.8
PAPA022	18-Apr-16	5	26.7	28.4	25.4	23.5	21.4	40.7
PAPA022	18-Apr-16	6	26.4	26.8	24.5	22.5	20.1	44.2
PAPA022	18-Apr-16	7	23.9	24.7	22.8	21.4	19.5	40.1
PAPA022	18-Apr-16	8	22.4	24.3	21.2	19.3	17.8	37.2
PAPA022	18-Apr-16	9	22.8	24.5	21.3	19.8	17.9	38.4
PAPA022	18-Apr-16	10	23.9	26.0	21.4	20.0	18.6	39.7
PAPA022	18-Apr-16	11	20.3	21.5	19.9	19.0	17.7	28.8
PAPA022	18-Apr-16	12	21.2	23.1	20.0	18.6	17.3	34.6
PAPA022	18-Apr-16	13	33.5	23.1	19.7	18.4	17.5	66.7
PAPA022	18-Apr-16	14	20.9	22.8	19.7	18.1	17.2	33.6
PAPA022	18-Apr-16	15	26.0	25.5	20.6	19.1	17.8	49.9
PAPA022	18-Apr-16	16	23.1	24.4	19.3	17.9	17.0	43.4
PAPA022	18-Apr-16	17	27.0	26.6	20.5	19.1	18.0	44.6
PAPA022	18-Apr-16	18	23.7	26.6	20.4	18.1	16.2	37.6
PAPA022	18-Apr-16	19	22.6	24.4	20.3	17.9	16.8	37.0
PAPA022	18-Apr-16	20	25.5	28.3	22.7	18.4	16.6	39.2
PAPA022	18-Apr-16	21	28.4	29.8	27.3	25.5	23.8	46.1
PAPA022	18-Apr-16	22	27.3	29.1	26.9	24.3	21.8	39.2
PAPA022	18-Apr-16	23	29.2	30.6	29.0	27.6	25.6	35.2
PAPA022	19-Apr-16	0	29.5	32.1	28.3	26.4	24.7	43.9
PAPA023	01-Apr-16	12	28.9	27.9	22.9	19.4	17.0	55.2
PAPA023	01-Apr-16	13	27.4	30.6	24.2	19.7	17.3	49.8
PAPA023	01-Apr-16	14	30.3	33.1	26.5	21.1	17.2	46.4
PAPA023	01-Apr-16	15	33.3	32.0	23.8	18.9	15.9	57.5
PAPA023	01-Apr-16	16	38.3	32.1	24.6	19.1	16.3	63.7
PAPA023	01-Apr-16	17	25.1	28.2	23.1	18.6	15.9	39.0
PAPA023	01-Apr-16	18	26.0	29.1	24.3	20.5	16.8	38.2
PAPA023	01-Apr-16	19	23.5	23.8	16.7	14.9	14.2	41.0
PAPA023	01-Apr-16	20	23.0	23.2	18.9	16.6	15.1	51.9
PAPA023	01-Apr-16	21	20.6	22.9	19.5	17.0	15.3	30.7
PAPA023	01-Apr-16	22	20.0	22.0	19.8	16.9	15.8	27.9
PAPA023	01-Apr-16	23	24.0	25.2	22.2	18.8	16.3	40.7
PAPA023	02-Apr-16	0	23.7	25.0	22.7	21.3	20.0	35.5
PAPA023	02-Apr-16	1	21.7	23.0	21.5	20.4	19.4	24.6
PAPA023	02-Apr-16	2	20.8	22.0	20.6	19.5	18.5	25.6

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA023	02-Apr-16	3	19.9	20.6	19.8	19.1	18.1	22.4
PAPA023	02-Apr-16	4	17.7	18.4	17.6	16.8	15.4	22.4
PAPA023	02-Apr-16	5	21.3	22.7	20.6	19.4	17.6	36.8
PAPA023	02-Apr-16	6	26.2	28.2	22.9	20.8	18.8	41.3
PAPA023	02-Apr-16	7	33.7	26.9	23.6	21.4	19.5	56.4
PAPA023	02-Apr-16	8	23.4	26.0	21.9	19.3	17.4	36.5
PAPA023	02-Apr-16	9	24.7	27.4	22.6	19.9	17.8	38.8
PAPA023	02-Apr-16	10	28.5	28.6	20.9	18.9	17.4	48.5
PAPA023	02-Apr-16	11	20.3	22.5	18.9	16.9	15.5	34.6
PAPA023	02-Apr-16	12	23.5	26.9	19.8	16.5	15.6	38.3
PAPA023	02-Apr-16	13	29.8	30.8	23.9	18.2	15.8	55.6
PAPA023	02-Apr-16	14	26.6	30.2	23.0	17.3	15.8	43.9
PAPA023	02-Apr-16	15	31.9	35.1	29.2	23.9	19.5	45.4
PAPA023	02-Apr-16	16	30.1	33.3	27.6	22.9	17.9	46.1
PAPA023	02-Apr-16	17	28.8	32.2	27.0	21.8	17.6	40.3
PAPA023	02-Apr-16	18	27.5	30.5	26.1	21.9	18.2	39.2
PAPA023	02-Apr-16	19	23.9	27.7	19.1	15.2	14.2	37.5
PAPA023	02-Apr-16	20	20.4	22.7	16.8	14.7	14.2	35.9
PAPA023	02-Apr-16	21	16.2	17.3	15.0	14.0	13.8	30.3
PAPA023	02-Apr-16	22	18.6	16.1	14.6	14.0	13.8	36.2
PAPA023	02-Apr-16	23	15.2	15.9	14.8	14.2	14.0	25.1
PAPA023	03-Apr-16	0	16.8	18.5	16.2	15.0	14.5	23.7
PAPA023	03-Apr-16	1	18.5	19.9	18.0	16.9	15.2	26.1
PAPA023	03-Apr-16	2	19.0	20.9	18.4	16.8	15.5	25.0
PAPA023	03-Apr-16	3	18.0	19.3	17.7	16.3	15.5	25.2
PAPA023	03-Apr-16	4	16.4	17.3	15.9	15.1	14.6	29.3
PAPA023	03-Apr-16	5	20.1	20.6	17.7	16.2	15.2	43.4
PAPA023	03-Apr-16	6	25.8	28.2	20.8	17.3	15.9	46.5
PAPA023	03-Apr-16	7	25.2	27.5	21.7	18.7	15.9	49.5
PAPA023	03-Apr-16	8	21.5	23.8	17.9	16.2	15.2	37.7
PAPA023	03-Apr-16	9	34.5	29.9	18.7	16.6	15.3	57.5
PAPA023	03-Apr-16	10	21.2	22.9	18.4	16.8	15.9	38.1
PAPA023	03-Apr-16	11	30.0	32.1	21.7	17.4	16.0	51.4
PAPA023	03-Apr-16	12	29.9	33.4	27.1	20.9	16.5	42.7
PAPA023	03-Apr-16	13	30.3	33.7	28.0	21.6	16.5	44.2
PAPA023	03-Apr-16	14	27.1	31.1	23.4	17.5	15.7	42.7
PAPA023	03-Apr-16	15	27.0	30.5	23.5	17.2	15.5	46.7
PAPA023	03-Apr-16	16	25.7	29.4	21.8	16.6	15.2	39.8
PAPA023	03-Apr-16	17	23.8	25.9	20.8	17.3	15.6	43.5
PAPA023	03-Apr-16	18	19.1	21.4	18.0	15.4	14.6	34.4
PAPA023	03-Apr-16	19	21.1	22.5	17.4	15.3	14.7	38.0
PAPA023	03-Apr-16	20	21.5	25.1	17.5	16.0	15.0	32.7
PAPA023	03-Apr-16	21	25.1	28.5	21.9	16.5	14.9	44.8
PAPA023	03-Apr-16	22	27.5	31.2	21.1	16.2	14.9	46.1
PAPA023	03-Apr-16	23	26.8	23.3	19.3	17.0	15.3	50.0

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA023	04-Apr-16	0	21.9	23.2	21.1	18.7	17.0	33.1
PAPA023	04-Apr-16	1	17.5	18.8	17.1	16.2	15.6	25.0
PAPA023	04-Apr-16	2	18.9	20.2	18.1	17.1	15.9	35.9
PAPA023	04-Apr-16	3	22.2	23.4	21.4	20.3	18.9	34.0
PAPA023	04-Apr-16	4	22.2	23.6	21.8	20.3	19.1	28.4
PAPA023	04-Apr-16	5	22.4	24.3	21.3	19.1	17.6	42.9
PAPA023	04-Apr-16	6	37.5	34.0	25.4	22.3	20.1	58.4
PAPA023	04-Apr-16	7	29.4	31.5	27.2	23.3	19.5	47.2
PAPA023	04-Apr-16	8	39.7	30.4	24.9	21.7	18.6	66.3
PAPA023	04-Apr-16	9	22.5	24.3	20.1	18.1	16.7	43.3
PAPA023	04-Apr-16	10	20.8	20.3	17.3	16.5	15.8	38.0
PAPA023	04-Apr-16	11	26.1	27.6	19.3	16.5	15.7	48.5
PAPA023	04-Apr-16	12	27.0	30.7	22.2	17.7	15.8	45.6
PAPA023	04-Apr-16	13	33.3	37.1	27.4	20.3	16.4	47.9
PAPA023	04-Apr-16	14	30.0	33.7	25.4	18.0	15.6	46.3
PAPA023	04-Apr-16	15	28.9	31.5	23.0	17.7	16.0	48.8
PAPA023	04-Apr-16	16	35.5	33.4	25.3	17.7	15.3	59.3
PAPA023	04-Apr-16	17	29.4	32.3	24.2	15.5	14.6	49.8
PAPA023	04-Apr-16	18	33.9	37.6	29.8	23.9	18.7	50.1
PAPA023	04-Apr-16	19	26.5	29.5	24.9	21.1	18.1	38.2
PAPA023	04-Apr-16	20	22.1	24.9	20.0	16.0	15.1	34.2
PAPA023	04-Apr-16	21	22.0	20.3	17.6	16.4	15.7	41.2
PAPA023	12-Apr-16	12	30.3	30.7	21.9	19.9	18.2	50.4
PAPA023	12-Apr-16	13	35.0	37.2	23.9	19.3	17.9	59.3
PAPA023	12-Apr-16	14	32.8	29.5	24.2	20.8	19.1	55.8
PAPA023	12-Apr-16	15	26.9	30.0	23.9	20.8	18.9	47.3
PAPA023	12-Apr-16	16	24.8	27.7	22.4	20.2	18.4	41.0
PAPA023	12-Apr-16	17	22.4	24.3	20.5	17.9	16.3	37.2
PAPA023	12-Apr-16	18	20.7	22.0	19.2	17.9	16.7	38.8
PAPA023	12-Apr-16	19	28.4	26.5	21.1	18.0	16.2	55.3
PAPA023	12-Apr-16	20	26.0	28.3	22.3	19.5	18.1	47.5
PAPA023	12-Apr-16	21	26.1	27.6	23.3	21.1	19.6	45.5
PAPA023	12-Apr-16	22	25.2	26.3	23.5	21.3	19.6	44.4
PAPA023	12-Apr-16	23	23.1	24.5	21.8	19.9	18.7	38.9
PAPA024	12-Apr-16	11	23.6	25.6	22.0	19.8	18.2	40.8
PAPA024	12-Apr-16	12	30.1	32.1	21.4	19.4	18.5	48.7
PAPA024	12-Apr-16	13	32.1	31.8	22.8	19.1	17.7	58.7
PAPA024	12-Apr-16	14	34.4	30.1	23.7	19.9	18.6	58.7
PAPA024	12-Apr-16	15	30.5	30.1	22.6	20.2	18.7	57.3
PAPA024	12-Apr-16	16	25.0	27.8	21.4	19.2	18.0	42.1
PAPA024	12-Apr-16	17	21.9	23.2	19.5	17.9	17.0	41.6
PAPA024	12-Apr-16	18	21.4	20.9	18.3	17.3	16.0	45.7
PAPA024	12-Apr-16	19	33.1	25.7	19.0	17.5	16.4	59.5
PAPA024	12-Apr-16	20	27.3	28.7	23.7	21.3	18.6	47.6
PAPA024	12-Apr-16	21	28.2	29.1	25.6	23.4	21.1	52.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA024	12-Apr-16	22	28.2	29.7	25.8	24.2	22.4	48.3
PAPA024	12-Apr-16	23	26.8	27.7	24.9	22.8	21.3	45.7
PAPA024	13-Apr-16	0	28.7	28.3	26.3	24.6	23.3	49.3
PAPA024	13-Apr-16	1	28.6	28.7	26.9	25.5	23.7	48.5
PAPA024	13-Apr-16	2	30.1	31.1	29.0	27.7	26.4	47.8
PAPA024	13-Apr-16	3	29.0	29.7	28.3	27.4	26.0	44.1
PAPA024	13-Apr-16	4	28.9	30.4	27.8	26.6	24.9	43.5
PAPA024	13-Apr-16	5	30.9	32.7	29.9	27.5	24.8	46.9
PAPA024	13-Apr-16	6	39.9	38.0	33.4	30.6	27.2	59.4
PAPA024	13-Apr-16	7	37.7	34.8	31.8	30.3	28.1	65.0
PAPA024	13-Apr-16	8	35.2	36.4	33.2	30.9	28.9	52.9
PAPA024	13-Apr-16	9	31.0	33.9	29.8	25.0	22.9	42.4
PAPA024	13-Apr-16	10	24.3	25.3	22.2	20.5	19.3	47.1
PAPA024	13-Apr-16	11	33.8	36.5	21.8	19.8	18.8	54.1
PAPA024	13-Apr-16	12	35.4	39.5	31.0	26.0	23.7	55.3
PAPA024	13-Apr-16	13	43.0	30.8	24.6	21.9	20.0	72.6
PAPA024	13-Apr-16	14	26.8	26.7	23.2	21.7	20.6	45.2
PAPA024	13-Apr-16	15	25.0	26.1	22.0	19.7	18.0	47.6
PAPA024	13-Apr-16	16	31.5	32.1	28.0	25.3	22.0	50.8
PAPA024	13-Apr-16	17	30.9	32.3	29.6	27.7	25.5	49.0
PAPA024	13-Apr-16	18	26.4	29.1	25.6	21.2	18.9	35.8
PAPA024	13-Apr-16	19	25.9	28.1	24.6	21.4	19.1	40.1
PAPA024	13-Apr-16	20	27.6	29.0	25.7	23.6	20.2	42.1
PAPA024	13-Apr-16	21	26.5	27.8	24.5	21.3	19.6	45.1
PAPA024	13-Apr-16	22	23.9	25.5	22.7	20.4	18.9	41.1
PAPA024	13-Apr-16	23	28.9	32.0	27.9	21.9	19.9	41.8
PAPA024	14-Apr-16	0	30.3	32.6	28.6	25.4	22.4	47.3
PAPA024	14-Apr-16	1	31.6	34.2	29.7	24.6	20.0	45.9
PAPA024	14-Apr-16	2	26.0	28.0	25.5	23.2	19.8	33.4
PAPA024	14-Apr-16	3	30.8	33.6	29.9	27.1	24.3	42.5
PAPA024	14-Apr-16	4	28.5	30.1	28.1	26.3	23.9	36.1
PAPA024	14-Apr-16	5	30.3	32.8	28.9	25.9	23.1	53.3
PAPA024	14-Apr-16	6	32.1	34.0	31.4	28.9	25.8	49.3
PAPA024	14-Apr-16	7	32.8	34.6	32.1	30.1	27.8	48.2
PAPA024	14-Apr-16	8	31.1	33.5	30.3	27.0	23.4	41.9
PAPA024	14-Apr-16	9	32.4	35.3	30.4	27.3	24.9	45.6
PAPA024	14-Apr-16	10	36.4	39.6	33.8	29.8	27.0	52.5
PAPA024	14-Apr-16	11	39.2	42.3	35.5	30.3	25.9	62.3
PAPA024	14-Apr-16	12	44.5	48.5	40.3	33.1	28.7	60.2
PAPA024	14-Apr-16	13	35.2	37.9	33.3	30.5	27.8	49.5
PAPA024	14-Apr-16	14	33.4	36.5	31.3	28.1	25.2	48.9
PAPA024	14-Apr-16	15	34.2	37.0	32.6	27.9	24.2	51.6
PAPA024	14-Apr-16	16	32.5	35.7	28.6	25.7	23.1	48.4
PAPA024	14-Apr-16	17	32.4	34.7	26.3	24.1	21.7	54.1
PAPA024	14-Apr-16	18	31.3	35.1	26.5	22.1	19.7	46.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA024	14-Apr-16	19	29.3	30.4	28.0	26.4	23.8	44.8
PAPA024	14-Apr-16	20	28.0	29.5	25.8	23.3	21.3	49.0
PAPA024	14-Apr-16	21	27.2	27.7	25.1	22.9	21.0	45.3
PAPA024	14-Apr-16	22	30.1	29.4	27.0	24.8	22.5	48.6
PAPA024	14-Apr-16	23	29.1	29.6	26.7	23.7	21.1	50.9
PAPA024	15-Apr-16	0	26.0	28.2	25.1	22.0	19.1	37.8
PAPA024	15-Apr-16	1	24.4	26.7	23.1	20.6	19.3	40.9
PAPA024	15-Apr-16	2	26.9	27.6	24.8	23.4	21.7	46.9
PAPA024	15-Apr-16	3	26.4	27.1	25.0	23.0	21.3	43.8
PAPA024	15-Apr-16	4	26.0	27.8	25.3	22.6	19.8	42.7
PAPA024	15-Apr-16	5	30.1	31.4	28.1	22.7	19.3	47.9
PAPA024	15-Apr-16	6	27.7	29.7	26.1	23.9	21.4	45.5
PAPA024	15-Apr-16	7	32.0	31.3	28.2	24.7	21.6	51.6
PAPA024	15-Apr-16	8	27.9	30.5	25.5	22.5	19.3	42.0
PAPA024	15-Apr-16	9	30.7	34.1	27.6	23.2	20.2	46.3
PAPA024	15-Apr-16	10	35.2	35.0	28.1	23.3	20.4	62.2
PAPA024	15-Apr-16	11	36.4	40.0	32.4	25.9	20.9	51.7
PAPA024	15-Apr-16	12	38.6	42.2	35.4	28.4	21.9	52.9
PAPA024	15-Apr-16	13	39.7	43.3	36.3	29.7	24.1	59.3
PAPA024	15-Apr-16	14	39.2	43.0	35.7	28.1	21.9	53.1
PAPA024	15-Apr-16	15	39.2	43.3	35.8	26.3	18.6	52.9
PAPA024	15-Apr-16	16	28.1	30.9	25.4	21.2	18.6	44.9
PAPA024	15-Apr-16	17	28.4	31.4	23.9	20.9	18.4	47.2
PAPA024	15-Apr-16	18	34.8	38.1	30.2	24.0	20.5	51.2
PAPA024	15-Apr-16	19	30.9	33.7	22.6	17.4	15.6	51.8
PAPA024	15-Apr-16	20	26.4	29.1	23.4	19.4	16.9	43.6
PAPA024	15-Apr-16	21	27.6	28.3	25.1	22.9	21.1	54.1
PAPA024	15-Apr-16	22	33.8	26.8	22.7	21.0	19.3	57.8
PAPA024	15-Apr-16	23	25.6	25.3	23.2	20.7	18.9	45.1
PAPA024	16-Apr-16	0	25.1	25.1	22.4	20.6	19.3	44.2
PAPA024	16-Apr-16	1	28.8	28.8	25.9	23.6	20.9	49.8
PAPA024	16-Apr-16	2	26.0	26.0	24.2	22.8	21.0	44.7
PAPA024	16-Apr-16	3	26.1	26.4	24.6	23.4	22.0	41.9
PAPA024	16-Apr-16	4	25.8	26.0	24.0	22.6	21.1	44.5
PAPA024	16-Apr-16	5	30.2	31.8	27.1	24.3	22.2	48.8
PAPA024	16-Apr-16	6	30.7	32.4	27.5	25.1	22.8	49.9
PAPA024	16-Apr-16	7	31.7	31.1	28.7	26.2	24.6	54.9
PAPA024	16-Apr-16	8	26.8	29.2	25.6	21.9	20.5	48.3
PAPA024	16-Apr-16	9	32.6	23.9	20.1	17.4	16.5	63.8
PAPA024	16-Apr-16	10	22.2	23.1	18.5	17.6	16.8	49.8
PAPA024	16-Apr-16	11	29.4	22.6	18.2	17.1	16.4	54.3
PAPA024	16-Apr-16	12	20.7	22.0	18.7	17.5	16.6	42.5
PAPA024	16-Apr-16	13	30.2	33.6	23.0	18.2	17.0	48.1
PAPA024	16-Apr-16	14	33.8	37.6	28.6	20.8	18.0	49.8
PAPA024	16-Apr-16	15	37.8	41.7	34.1	26.6	20.0	50.4

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA024	16-Apr-16	16	39.8	43.7	36.6	29.3	22.4	53.5
PAPA024	16-Apr-16	17	40.7	44.5	37.9	31.1	24.4	54.2
PAPA024	16-Apr-16	18	40.7	44.6	37.8	31.1	25.3	54.9
PAPA024	16-Apr-16	19	37.5	41.5	33.5	26.3	20.6	50.7
PAPA024	16-Apr-16	20	31.3	33.8	27.4	24.5	20.8	53.9
PAPA024	16-Apr-16	21	28.2	30.9	25.1	22.3	18.9	45.3
PAPA024	16-Apr-16	22	30.2	33.5	25.4	20.9	17.1	47.5
PAPA024	16-Apr-16	23	29.4	33.2	24.9	19.0	16.7	45.4
PAPA024	17-Apr-16	0	23.3	26.0	20.0	17.8	16.8	40.3
PAPA024	17-Apr-16	1	21.1	22.8	19.0	17.3	16.3	41.5
PAPA024	17-Apr-16	2	24.8	25.2	23.1	20.4	18.4	46.7
PAPA024	17-Apr-16	3	29.2	29.7	27.5	25.7	23.2	51.9
PAPA024	17-Apr-16	4	28.4	29.1	26.6	23.8	20.7	49.6
PAPA024	17-Apr-16	5	27.7	29.3	24.7	21.5	19.2	46.0
PAPA024	17-Apr-16	6	26.7	28.8	24.6	20.2	17.2	48.1
PAPA024	17-Apr-16	7	22.3	24.3	20.6	18.8	16.1	36.5
PAPA024	17-Apr-16	8	24.0	25.6	22.0	20.4	18.8	44.9
PAPA024	17-Apr-16	9	22.2	23.6	20.8	19.0	17.2	38.1
PAPA024	17-Apr-16	10	27.9	24.0	19.9	17.6	16.5	61.7
PAPA024	17-Apr-16	11	24.6	28.0	18.3	17.1	15.6	40.6
PAPA024	17-Apr-16	12	33.2	37.2	29.6	22.8	16.9	46.0
PAPA024	17-Apr-16	13	34.5	38.4	31.3	24.2	18.9	46.7
PAPA024	17-Apr-16	14	33.6	37.4	28.9	21.0	17.8	50.5
PAPA024	17-Apr-16	15	33.0	36.7	29.7	23.7	18.6	45.5
PAPA024	17-Apr-16	16	36.4	40.2	32.4	24.7	18.9	53.9
PAPA024	17-Apr-16	17	36.4	40.3	33.0	26.4	21.3	50.9
PAPA024	17-Apr-16	18	32.3	36.2	28.3	21.7	17.2	47.4
PAPA024	17-Apr-16	19	23.7	27.0	19.6	16.3	15.4	39.0
PAPA024	17-Apr-16	20	23.5	25.3	18.1	16.2	15.0	43.8
PAPA024	17-Apr-16	21	42.0	23.4	17.1	15.5	14.8	67.4
PAPA024	17-Apr-16	22	17.0	18.3	16.5	14.9	14.7	28.6
PAPA024	17-Apr-16	23	22.0	24.2	19.6	17.1	15.9	40.4
PAPA024	18-Apr-16	0	32.2	32.9	28.4	26.0	22.8	51.7
PAPA024	18-Apr-16	1	29.6	30.2	27.9	26.4	24.1	48.6
PAPA024	18-Apr-16	2	28.2	29.3	27.3	25.3	23.4	43.0
PAPA024	18-Apr-16	3	28.2	29.3	27.6	25.9	24.4	43.0
PAPA024	18-Apr-16	4	29.1	30.0	27.8	25.4	23.5	49.0
PAPA024	18-Apr-16	5	28.1	28.9	25.7	22.9	21.1	48.0
PAPA024	18-Apr-16	6	26.6	28.4	24.5	20.9	18.1	44.6
PAPA024	18-Apr-16	7	24.4	25.4	22.5	20.0	18.1	41.8
PAPA024	18-Apr-16	8	21.6	23.0	19.8	17.6	16.8	39.0
PAPA024	18-Apr-16	9	22.6	24.8	20.2	18.8	17.7	38.2
PAPA024	18-Apr-16	10	23.1	25.2	19.8	18.7	17.6	40.7
PAPA024	18-Apr-16	11	21.5	22.1	18.8	17.8	16.5	43.7
PAPA024	18-Apr-16	12	20.4	21.8	18.7	17.9	17.1	34.8

SiteName	Date	Hour	Leq	L10	L50	L90	LMin	LMax
PAPA024	18-Apr-16	13	25.4	22.1	18.3	17.6	16.9	53.3
PAPA024	18-Apr-16	14	20.5	22.3	18.9	17.5	16.8	34.0
PAPA024	18-Apr-16	15	26.1	23.7	18.9	17.8	17.1	51.5
PAPA024	18-Apr-16	16	22.3	24.1	18.9	17.7	16.7	40.5
PAPA024	18-Apr-16	17	26.5	26.6	19.8	18.2	17.0	46.7
PAPA024	18-Apr-16	18	23.2	26.2	18.3	17.2	15.9	38.2
PAPA024	18-Apr-16	19	21.3	22.5	19.0	17.4	16.4	37.1
PAPA024	18-Apr-16	20	27.7	28.3	22.0	17.5	16.3	56.8
PAPA024	18-Apr-16	21	27.2	29.2	26.0	23.5	21.6	46.8
PAPA024	18-Apr-16	22	24.7	26.3	24.6	22.0	20.2	32.4
PAPA024	18-Apr-16	23	27.6	29.0	27.1	25.8	24.5	40.2
PAPA024	19-Apr-16	0	27.3	28.6	26.7	25.2	23.0	36.3
PAPA024	19-Apr-16	1	22.7	23.9	22.4	21.2	19.9	28.8
PAPA024	19-Apr-16	2	24.6	26.2	24.2	22.5	20.3	31.5
PAPA024	19-Apr-16	3	24.1	25.7	23.7	22.1	20.6	29.8
PAPA024	19-Apr-16	4	24.0	25.4	23.7	22.4	21.1	28.3
PAPA024	19-Apr-16	5	23.5	25.2	22.7	21.3	19.9	43.4
PAPA024	19-Apr-16	6	22.7	23.8	22.3	21.2	19.7	32.3
PAPA024	19-Apr-16	7	24.7	24.9	22.2	20.8	19.4	41.5
PAPA024	19-Apr-16	8	45.7	27.9	21.8	19.8	18.3	67.1
PAPA024	19-Apr-16	9	22.7	25.2	20.8	19.1	18.0	38.4

Appendix B. Credentials of Authors

The three authors of this report have over 75 years combined experience working in the field of acoustics, sound level measurements, and assessing impacts on wildlife resources. All three were involved in initial measurements National Parks in an effort to determine existing ambient and baseline ambient sound levels in order to assess impacts of anthropogenic sounds on resources. This work involved sound level measurements in remote places with little human activity for long periods of time, and consequently very, very low sound levels. This work required development of new tools and techniques, many of which were pioneered by the authors. In total, these three individuals have collected data at over 250 locations throughout North America.

Skip Ambrose
Clemson University, B.S., 1969
Mr. Ambrose worked for the Fish and Wildlife Service in Alaska for 28 years as head of the Endangered Species Program in Fairbanks, AK. Much of this work involved assessing and protecting listed species from human impacts, including impacts from anthropogenic sounds. In 2001, Mr. Ambrose began working for the National Park Service to development the Acoustic Division of the Natural Sounds Program. The work involved developing new tools and techniques to study sound levels in very remote and very quiet places, and working with acousticians from other federal, state, and private organizations. In 2005, Mr. Ambrose retired from the National Park Service and co-founded Sandhill Company, a consulting firm specializing in avian and acoustic studies. Mr. Ambrose has participated in over 50 sound level measurement studies throughout North America, and has authored over 30 reports on sound level measurements in national parks and other rural and remote locations.

Christine Florian
Northern Arizona University, B.S., 1994.
Beginning in 1993, Ms. Florian worked for the National Park Service in Arizona surveying and studying wildlife resources in northern Arizona parks, primary avian species. In 1997, she began working in Alaska conducting avian and acoustic surveys in national parks in interior Alaska. In 2001, Ms. Florian started working for the National Park Service's new Natural Sounds Program, and participated in equipment and software development for sound level measurements and acoustic studies in National Parks throughout North America. She retired from the National Park Service in 2005 and co-founded Sandhill Company, a consulting firm specializing in avian and acoustic studies. Ms. Florian has participated in over 50 sound level studies throughout North America, and co-authored over 25 reports on this work.

John MacDonald
General Motors Engineering and Management Institute, B.S. Electrical Engineering, 1990
University of Central Florida, Master of Science, Environmental Engineering, 1996
University of Central Florida, Ph.D., Environmental Engineering, 2001
Licensed Professional Engineer; State of Florida; PE# 63038

Dr. MacDonald has been performing engineering tests and analyzing engineering data since 1986 when he worked as an engineer at General Motors in Flint, Michigan. He began performing environmental noise measurements in 1995 and has conducted environmental noise and vibration studies since that time. Dr. MacDonald developed the "Community Noise Model" that was in use at one time in 35 different countries. The CNM was a PC based simulation program that predicted sound levels at residential receivers from common sources of environmental noise such as automobiles, aircraft, rail operations, and point sources of sound such as HVAC, generators, exhaust ports, etc. Dr. MacDonald has conducted long term environmental sound surveys in 40 National Parks and has developed numerous custom software methods to analyze environmental acoustic data. He is a computer modeling expert, a programmer and has developed custom data acquisition systems for his engineering work.