

**U.S. Department of the Interior
Bureau of Land Management
Colorado River Valley Field Office
2300 River Frontage Road
Silt, Colorado 81652**

ENVIRONMENTAL ASSESSMENT

NUMBER

DOI-BLM-CO-N040-2013-0103-EA

CASEFILE NUMBER

Federal Lease COC24099 (split estate).

PROJECT NAME

Proposal to Drill 16 Federal Wells from Proposed GM 11-28 Pad Located on Private Land North of Parachute, Garfield County, Colorado.

PAD LOCATION

GM 11-28 pad: Township 6 South (T6S), Range 96 West (R96W), Section 28, Lot 4, SW $\frac{1}{4}$ NW $\frac{1}{4}$, Sixth Principal Meridian. Pad elevation is 5,600 feet above mean sea level (MSL). The project, located approximately 5 miles northwest of Parachute, Garfield County, Colorado, would be directly accessed from Garfield County Road 215 (CR 215), Parachute Creek Road, along an existing pad access road.

APPLICANT

WPX Energy Rocky Mountain LLC, Attn: Greg Davis, 1001 17th Street, Suite 1200, Denver, CO 80202.


PURPOSE AND NEED FOR THE ACTION

The purpose and need of the Proposed Action is to analyze WPX's proposal to drill an exploratory horizontal well in the Niobrara formation and develop as many as 15 Federal directional wells in the Williams Fork formation from the GM 11-28 pad and develop Federal lease COC24603 to the benefit of the public by producing Federal fluid mineral resources (natural gas, liquid condensate, and associated petroleum hydrocarbons) currently trapped within the target geologic formation.

ALTERNATIVES

Proposed Action

WPX Energy Rocky Mountain LLC ("WPX") proposes to drill and develop 20 new oil and gas wells (of which 16 would be Federal bottomholes) from the proposed GM 11-28 well pad located on private land (Figures 1 and 2). An initial drilling visit is planned in fall 2013 to drill a single Federal horizontal well (GM 701-28-HN1) into the Niobrara formation with subsequent drilling of the remaining 19 directional wells into the Williams Fork formation during a subsequent drilling visit during summer 2014, following the end of the big game winter timing limitation stipulation for that lease (January 1 through March 1).

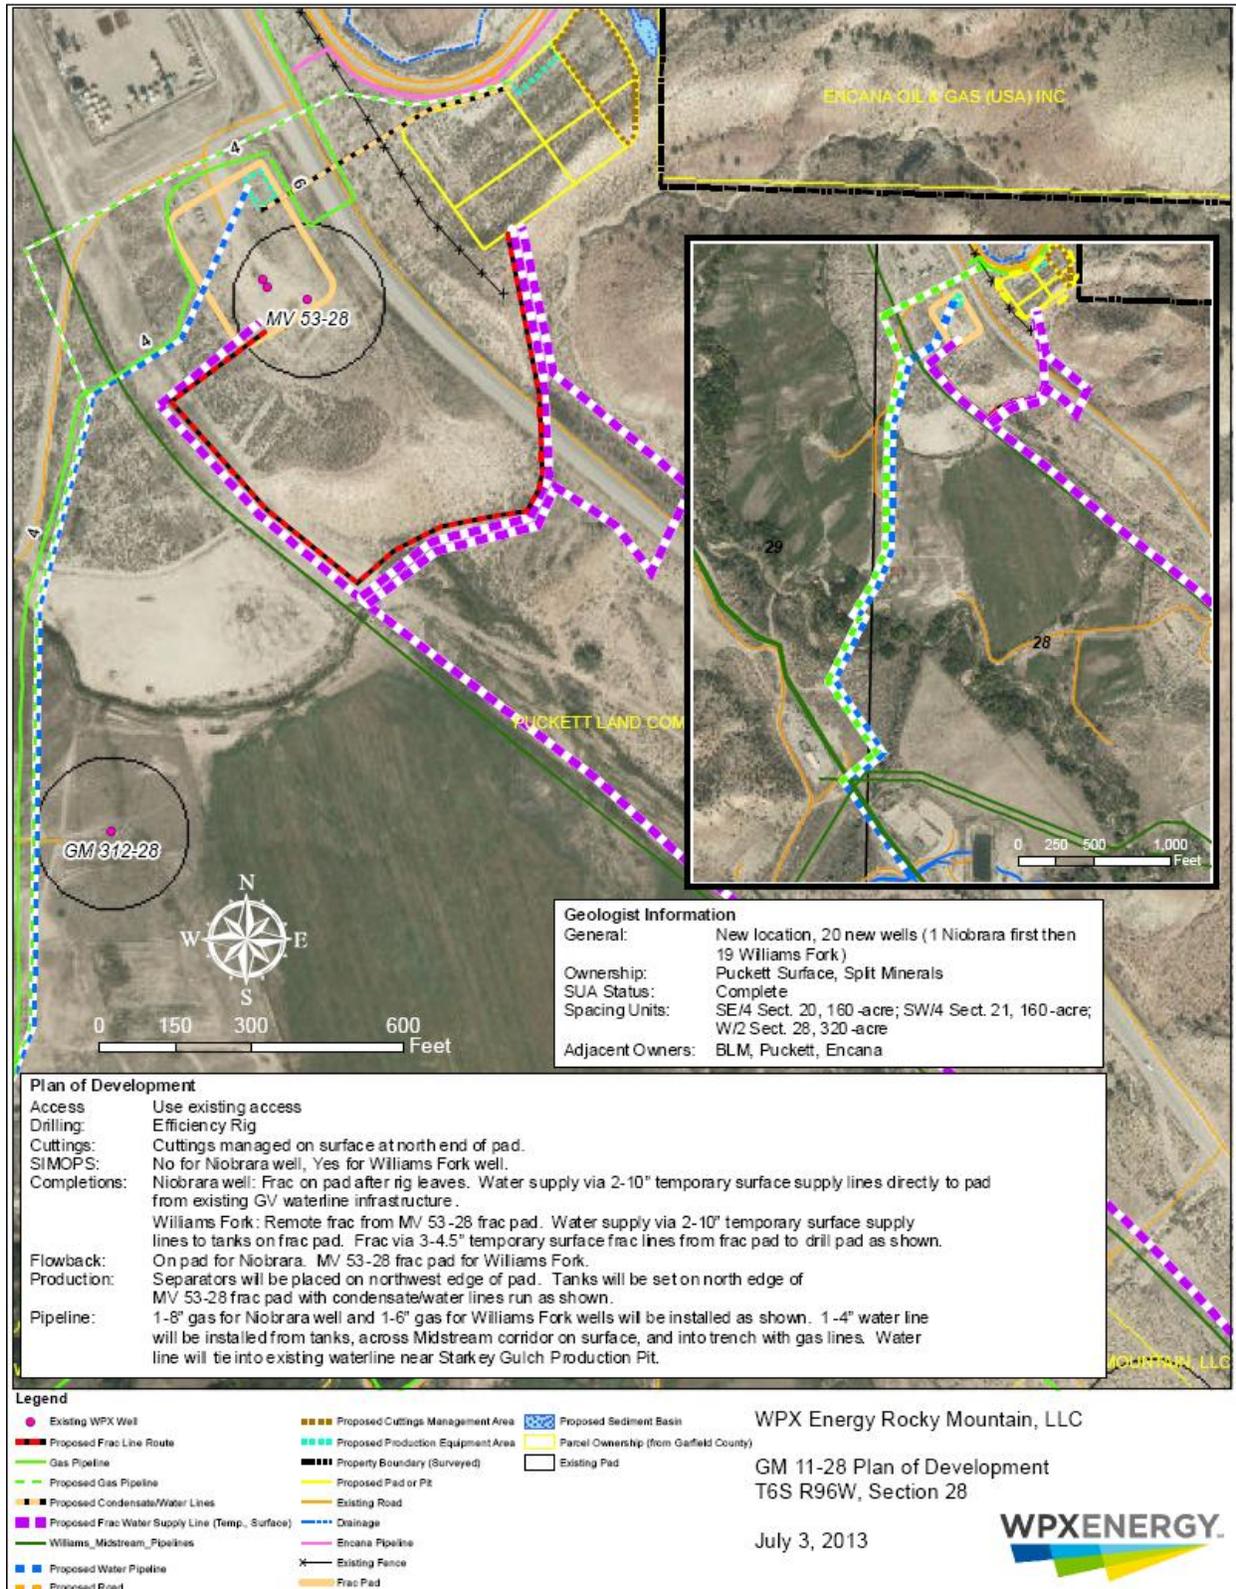

T:\Projects\PIC\GrandValley\13\0627_GM 11-28_POD\GM 11-28 POD.mxd mreybold 7/3/2013 2:53:41 PM

Figure 1. GM 11-28 Plan of Development

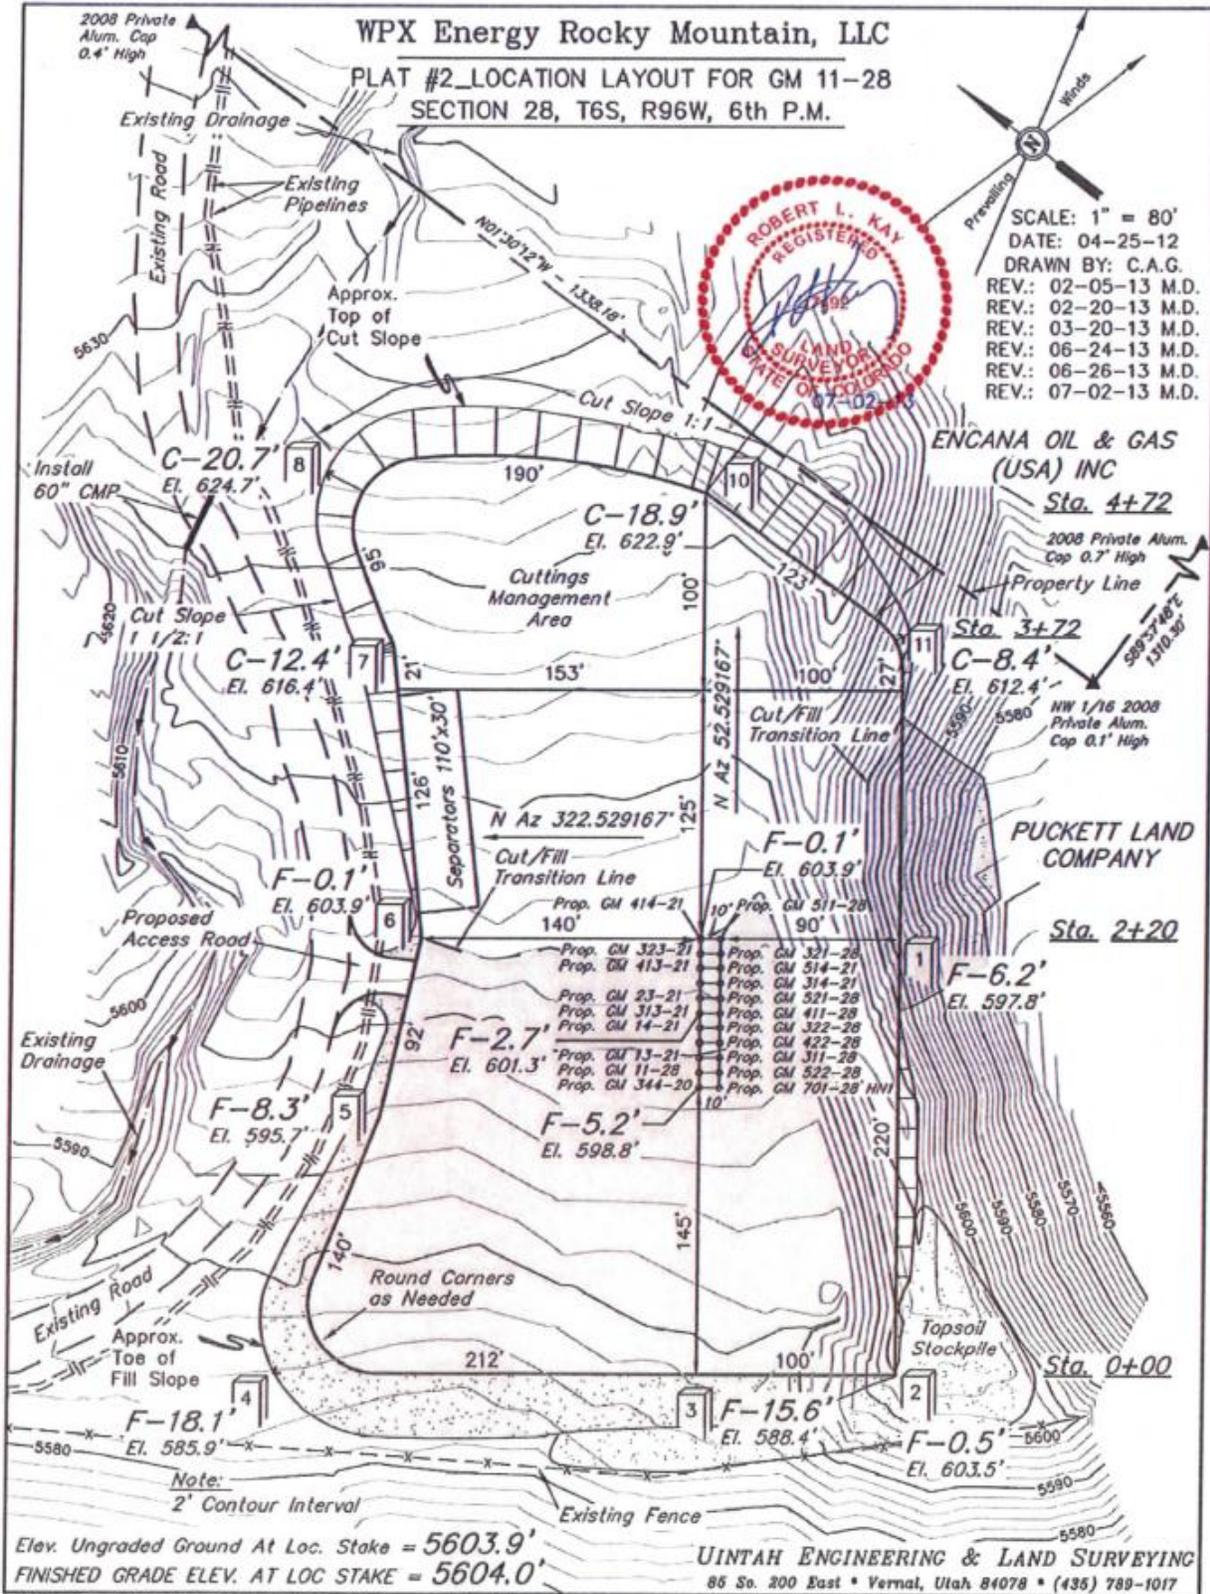


Figure 2. Construction Plat Showing the Proposed GM 11-28 Pad and Existing Access Road.

The Federal wells would be drilled horizontally or directionally, depending on the target formation, into Federal lease COC24099, which underlies steep mountainous terrain. Drilling the Federal bottomholes from the proposed pad, located in proximity to CR 215, is the best opportunity to develop the underlying and nearby Federal mineral estate. The GM 11-28 pad would be constructed on private surface along an existing access road to the Encana C28 well pad on an alluvial fan deposit with an unnamed ephemeral drainage traversing the northern and western flanks of the road and proposed pad. The GM 11-28 pad footprint would be 3.33 acres. The existing MV 53-28 pad located directly west and across CR 215 would serve as the remote location for completions for the planned GM 11-28 wells (Figures 2 and 3). The MV 53-28 pad would be slightly expanded with a disturbance footprint of 1.55 acres to accommodate the well completions support. Planned pipeline upgrades for this project would involve 3.85 acres to bury new natural gas and produced water lines and conduct pipeline boring under CR 215 and Parachute Creek. Project components would result in a total disturbance of 8.73 acres (Table 1).

The GM 11-28 project would involve the following components identified on Figure 1:

- (1) Constructing the proposed pad with maximum cut of 20.7 feet at the northern-most corner and maximum fill of 18.1 feet at the western-most corner resulting in 3.33 acres of initial disturbance and long-term working area disturbance of 1.36 acres (Figure 2, Table 1).
- (2) Drilling one horizontal exploratory Niobrara well (GM 701-28-HN1) during a fall 2013 visit and 15 Federal Williams Fork wells and four fee wells in a follow-up visit in summer 2014 or later,
- (3) Providing water for the drilling process via truck transport along CR 215 and storing cuttings generated from the well boring within the defined cuttings management areas on the pad location (Figure 2).
- (4) For the horizontal Niobrara well, conducting hydraulic fracturing (“fracing”) from the GM 11-28 pad and delivering water for frac operations from the existing Grand Valley water line infrastructure. This would utilize two temporary 10-inch diameter poly surface pipelines (6,600 feet and 7,000 feet in length) installed within existing pipeline corridor that parallels CR 215 and in two separate culverts underneath CR 215.
- (5) For the directional Williams Fork wells, conducting remote fracing operations from the expanded MV 53-28 pad located on the west side of CR 215 and involving 1.55 acres of short-term disturbance and a 0.81-acre long-term working area (Figure 3, Table 1).
- (6) Laying 1,680 feet of temporary 4.5-inch diameter steel surface frac lines between the MV 53-28 and GM 11-28 pads during the second drilling visit to support Williams Fork well completion operations (Figure 1).
- (7) Rerouting the two 10-inch diameter poly surface pipelines (6,300 feet in length) installed within an existing pipeline corridor to the MV 53-28 pad to support remote fracing for the second visit,
- (8) Installing ancillary storage tanks serving the GM 11-28 wells on the nearby MV 53-28 pad, including a bore for fluid production pipelines underneath CR 215 between the two pads.
- (9) Boring a new gas sales pipeline from MV 53-28 pad eastward beneath existing pipelines and CR 215 to the GM 11-28 pad along a length of 690 feet (0.91 acre of short-term disturbance).
- (10) Burying a new 8-inch diameter gas line (4,200 feet) for the Niobrara well, one 6-inch diameter gas line (4,200 feet) for the Williams Fork wells, and one 4-inch production water line (3,600 feet) from the MV 53-28 pad southward. This would require a bore under Parachute Creek, with 2.94 acres of short-term disturbance, to connect with existing pipeline infrastructure (Figure 1).

As shown in Table 1, total surface disturbance (8.73 acres) associated with the GM 11-28 project would occur on private land. After interim reclamation of the two pads and reclamation of temporarily disturbed areas along pipeline routes and bore entry areas, long-term disturbance for the project would be 2.17 acres, including the 1.36 acres for the GM 11-28 pad and 0.81 acres for the MV 53-28 pad.

Table 1. Surface Disturbance Associated with GM 11-28 Project (initial/long-term acres)			
<i>New Disturbance</i>	<i>Private</i>	<i>BLM</i>	<i>Total</i>
GM 11-28 Pad & Road Spur	3.33/1.36	--	3.33/1.36
MV 53-28 Frac Pad	1.10/0.81	--	1.10/0.81
Working Areas for Bores	0.91/0.00	--	0.91/0.00
Buried Gas and Water Pipelines	2.94/0.00	--	2.94/0.00
Subtotal	8.28/2.17	--	8.28/2.17
<i>Existing Disturbance</i>	<i>Private</i>	<i>BLM</i>	<i>Private</i>
MV 53-28 Frac Pad	0.45/0.00*	--	0.45/0.00*
Surface Waterlines	--	--	--
Subtotal	0.45/0.00	--	0.45/0.00
TOTAL DISTURBANCE	8.73/2.17	--	8.73/2.17
¹ Entire working area disturbance for MV 53-28 pad is shown under New Disturbance entry.			

Cuttings generated during drilling of the proposed wells would be dried with shaker systems installed on the drill rig, mixed with inorganic materials to aid in the drying, and deposited within the cuttings management area on the GM 11-28 pad. Prior to interim reclamation, the cuttings would be tested and treated to satisfy COGCC Table 910-1 standards. Cuttings would be covered with a minimum 3-foot-deep during the interim reclamation earthwork.

During pad construction, topsoil would be stripped during the initial earthwork, windrowed where possible around the pad perimeter, and designed to serve as storm water controls for the pad location. The earthwork volumes for both pads are balanced with no excess material stockpiling to occur. The overflow outlet of an existing soil retention pond located east of the proposed GM 11-28 pad would be diverted north to the ephemeral drainage to avoid impacts to the proposed pad.

Two new steel gas sales lines (8-inch diameter for the Niobrara well and 6-inch diameter for the Williams Fork wells) would be bored under CR 215 from an entry point west of the MV 53-28 pad to the GM 11-28 pad to provide the new gas gathering connections for the GM 11-28 wells. Storage tanks serving the new wells would be staged on the MV 53-28 pad requiring additional water and oil production lines to also be bored under CR 215 to the MV 53-28 pad (Figure 1).

New 8-inch and 6-inch gas gathering lines would traverse approximately 4,200 feet from the CR 215 bore entry site south to a connection point with existing gas gathering infrastructure in Section 29 south of the compressor station. These lines would be buried within a 40-foot-wide disturbance corridor (mostly collocated with the planned 4-inch production water line) but would involve an additional pipeline bore underneath Parachute Creek (Figure 1). The 4-inch production water line would be buried for approximately 3600 feet between the MV 53-28 pad and its connection point in Section 29. The water line would be placed through an existing pipeline bore under Parachute Creek and through a new bore under the existing Williams Midstream trunk line southwest of the MV 53-28 pad. Approximately 20% of the 4-inch water line alignment would be in a separate corridor (40 feet wide). The 0.81 acre of disturbance allotment for pipeline bores in Table 1 covers the MV 53-28 bores, the Williams trunk line bore, and the Parachute Creek bore.

Well completion plans would vary depending on the drilling visit. For the single Niobrara well, frac operations would occur on the GM 11-28 pad. Two 10-inch diameter surface poly lines would be

arranged initially to serve Niobrara frac operations on the GM 11-28 pad (for separate lengths of 6,600 feet and 7,000 feet, because they would pass under CR 215 in different existing culverts). The poly water delivery lines would be changed to serve the remote frac operations on the MV 53-28 pad for the Williams Fork wells (with a length of 6,300 feet). Three 4.5-inch diameter steel frac lines would be laid on the surface between the MV 53-28 pad and the GM 11-28 pad to serve the Williams Fork well completion work during the second visit.

The Proposed Action would include well drilling and well completion, production of natural gas and associated liquid condensate, proper handling and disposal of produced water, and interim and final reclamation.

Construction of the pipeline and pad would follow the guidelines established in the BLM Gold Book, *Surface Operating Standards for Oil and Gas Exploration and Development* (USDI and USDA 2007). The existing pad access road would be graveled prior to drilling to ensure all-weather accessibility to the pad site. A road maintenance program would be required during the production phase of the well which includes, but is not limited to blading, ditching, culvert installation and cleanout, weed control, and gravel surfacing where excessive rutting or erosion may occur. Roads would be maintained in a safe and usable condition.

The Proposed Action would be implemented consistent with the Federal oil and gas lease, Federal regulations (43 CFR 3100), and the operational measures included in the Applications for Permit to Drill (APDs). Appendix A lists the specific Surface Use Conditions of Approval (COAs) to be implemented as mitigation measures for this project. The operator would be responsible for continuous inspection and maintenance of the access roads, pads and pipelines.

No Action Alternative

The No Action Alternative would constitute denial of the Federal APDs meaning that none of the proposed 16 Federal wells would be drilled or developed from the GM 11-28 location. However, since the GM 11-28 pad would also support four planned fee wells, the pad construction would occur, the MV 53-28 frac pad expansion would be needed for completion work on the four fee wells, and the installation of the buried and surface pipelines and their associated underground bores would occur to support the four fee wells. The impacts under this alternative would be similar to the Proposed Action but reduced in the sense that the developments would support only four fee wells instead of 20 wells described in the Proposed Action. The surface disturbance estimates presented in the Proposed Action remain unchanged since the pad, road, and pipeline improvements would be implemented.

PLAN CONFORMANCE REVIEW

The Proposed Action and No Action Alternative are subject to and have been reviewed for conformance with the following plan (43 CFR 1610.5, BLM 1617.3):

Name of Plan: The current land use plan is the *Glenwood Springs Resource Management Plan* (RMP), approved in 1984 and revised in 1988 (BLM 1984). Relevant amendments include the *Oil and Gas Plan Amendment to the Glenwood Springs Resource Management Plan* (BLM 1991) and the *Oil & Gas Leasing & Development Record of Decision and Resource Management Plan Amendment* (BLM 1999a).

Decision Language: The 1991 Oil and Gas Plan Amendment (BLM 1991) included the following at page 3: “697,720 acres of BLM-administered mineral estate within the Glenwood Springs Resource Area are open to oil and gas leasing and development, subject to lease terms and (as applicable) lease stipulations” (BLM 1991, page 3). This decision was carried forward unchanged in the 1999 ROD and RMP

amendment at page 15 (BLM 1999b): “In areas being actively developed, the operator must submit a Geographic Area Proposal (GAP) [currently referred to as a Master Development Plan, MDP] that describes a minimum of 2 to 3 years of activity for operator controlled leases within a reasonable geographic area.”

Discussion: The Proposed Action is in conformance with the 1991 and 1999 RMP amendments cited above because the Federal mineral estate proposed for development is open to oil and gas leasing and development, and Federal oil and gas lease COC24099 was duly issued pursuant thereto.

The current project meets GAP exception criteria in the 1999 RMP Amendments based on its relatively small size, use of existing MV 53-28 pad location (for well completions), and its location along existing access roads and pipeline corridors. Therefore, the Proposed Action is in conformance with the current land use plan.

SUMMARY OF LEASE STIPULATIONS

The Federal wells would be directionally drilled from the proposed GM 11-28 pad located on private surface with underlying Federal mineral estate. Table 2 lists the various stipulations shown on Federal oil and gas lease COC24099.

Table 2. COC24099 Lease Stipulations		
<i>Lease Number</i>	<i>Description of Lands</i>	<i>Stipulations</i>
COC24099 (1976)	ALL LANDS within lease	<p><u>Protection of Cultural Resources:</u> Standard requirements for cultural resource inventory, reporting, protections and discovery criteria.</p> <p><u>Surface Protection Measures:</u> Plan of operations required with APD to ensure adequate protection of drainages, water bodies, springs, fish or wildlife habitat, steep slopes or fragile soils.</p> <p><u>Preparation of Environmental Analysis:</u> EA will be prepared to ensure proper protection of surface, natural resources, environment, existing improvements, and timely reclamation of disturbed lands.</p>

AFFECTED ENVIRONMENT AND ENVIRONMENTAL CONSEQUENCES

During its internal scoping process for this Environmental Assessment (EA), pursuant to the National Environmental Policy Act (NEPA), BLM resource specialists identified the following elements of the natural and human environment as present in the project vicinity and potentially affected by the project:

- | | |
|------------------------------------|--|
| Access and Transportation | Soils |
| Air Quality | Special Status Species |
| Cultural Resources | Vegetation |
| Fossil Resources | Visual Resources |
| Geology and Minerals | Wastes – Hazardous and Solid |
| Invasive Non-Native Plants | Water Quality – Surface and Ground |
| Native American Religious Concerns | Wildlife – Aquatic, Migratory Birds, and |
| Noise | Other Terrestrial |
| Socioeconomics | |

Access and Transportation

Affected Environment

The project area is accessible from Parachute, Colorado by traveling northwesterly on CR 215 for approximately 5 miles to the road spur accessing the GM 11-28 pad. The pad is located 0.25 mile east of CR 215 along the existing Encana C28 pad access road. Since the site is on private land, no public access is available although there is no access control gate installed at the County Road junction.

Environmental Consequences

Proposed Action

The existing road accessing the project area would adequately serve the transportation needs of the Proposed Action. Some road resurfacing could be needed depending on the scheduled drilling season. The Proposed Action would result in a substantial increase in truck traffic related to the development of the 16 proposed Federal wells. With the split drilling schedules planned for the development of the wells on this pad, two periods of development with its associated drilling and completion traffic would occur in fall 2013 and again in summer 2014. The largest traffic increase would be during rig-up, drilling, and completion activities. Data indicate that approximately 1,160 truck trips over a 30-day period would be required to support the drilling and completion of each well (Table 3). Once the wells are producing, traffic would dramatically decrease to occasional visits in pickups for monitoring or maintenance activities. Fluids generated during the life of the wells would be stored at the tank facilities staged on the nearby MV 53-28 pad, requiring periodic, if not daily, truck visits to remove stored fluids from the tanks. Each well may have to be recompleted once per year, requiring three to five truck trips per day for approximately 7 days.

Table 3. Traffic Associated with Drilling and Completion Activities		
<i>Vehicle Class</i>	<i>Trips per Well</i>	<i>Portion of Total</i>
16-wheel tractor trailers	88	7.6%
10-wheel trucks	216	18.6%
6-wheel trucks	452	39.0%
Pickup trucks	404	34.8%
Total	1,160	100.0%

Source: BLM 2006. Note: Trips by different vehicle types are not necessarily distributed evenly during the drilling process. Drilling and completion period is approximately 30 days per well.

Degradation of field development roads may occur due to heavy equipment travel and fugitive dust and noise would be created. Mitigation measures (Appendix A) would be required as Conditions of Approval (COAs) to ensure adequate dust abatement and road maintenance occur.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Access or transportation impacts would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Air Quality

Affected Environment

Colorado Ambient Air Quality Standards (CAAQS) and National Ambient Air Quality Standards (NAAQS) are health-based criteria for the maximum acceptable concentrations of air pollutants in areas of public use. Although specific air quality monitoring has not been conducted within the project area, regional air quality monitoring has been conducted in Rifle and elsewhere in Garfield County. Air pollutants measured in the region for which ambient air quality standards exist include carbon monoxide (CO), nitrogen dioxide (NO₂), sulfur dioxide (SO₂), ozone (O₃), particulate matter less than 10 microns (µ) in diameter (PM₁₀), and particulate matter less than 2.5 µ in diameter (PM_{2.5}).

The project area lies within Garfield County, which has been described as an attainment area under CAAQS and NAAQS. An attainment area is an area where ambient air pollution quantities are below (i.e., better than) NAAQS standards. Regional background values are well below established standards, and all areas within the cumulative study area are designated as attainment for all criteria pollutants. The Garfield County Quarterly Monitoring Report summarizing data collected at monitoring sites in Parachute, Silt, Battlement Mesa, and Rifle in January through June 2012 (the most recent posting) confirms continuing attainment of the CAAQS and NAAQS (Garfield County 2012). Federal air quality regulations are enforced by the CDPHE.

Federal air quality regulations adopted and enforced by CDPHE through the Clean Air Act (CAA) Prevention of Significant Deterioration (PSD) Program limit incremental emissions increases of air pollutants from certain sources to specific levels defined by the classification of air quality in an area. Incremental increases in PSD Class I areas are strictly limited, while increases allowed in Class II areas are less strict.

The project area and surrounding areas are classified as PSD Class II, as is Dinosaur National Monument, located approximately 180 miles to the northwest. PSD Class I areas located within 100 miles of the project area are Flat Tops Wilderness (approximately 25 miles north), Maroon Bells – Snowmass Wilderness (approximately 35 miles south), West Elk Wilderness (approximately 60 miles southeast), Black Canyon of the Gunnison National Park (approximately 65 miles south), and Eagles Nest Wilderness (approximately 60 miles east).

Environmental Consequences

Proposed Action

The CDPHE, under CAA delegated authority from the U.S. Environmental Protection Agency (EPA) and in conformance with Colorado's State Implementation Plan (SIP), is the agency with primary responsibility for air quality regulation and enforcement in connection with industrial developments and other air pollution sources in Colorado. Unlike the conceptual "reasonable but conservative" engineering designs used in NEPA analyses, CDPHE air quality preconstruction permitting is based on site-specific, detailed engineering values, which are assessed in CDPHE's review of the permit application.

The Proposed Action would involve the construction of the GM 11-28 pad (with a disturbance footprint of 3.33 acres) to drill, complete, and operate 16 new Federal wells in two drilling visits. Well completion operations would occur on the GM 11-28 pad for the initial Niobrara well drilling in fall 2013. The nearby MV 53-28 pad would be expanded (with a disturbance area of 1.55 acres) and serve as the remote frac location for the remaining 15 wells to be drilled in the second visit in summer 2014. Water for the well drilling would be trucked to the pad. The well fracing operations would be supplied water via

surface delivery lines. Including the water and gas pipeline upgrades planned for this project, the total short term disturbance on private land would be 8.73 acres and the long term disturbance after reclamation would be 2.17 acres (Table 1).

The wells would require approximately 7 to 10 days to drill and 5 to 15 days to complete. Air quality in the project area would decrease during construction of access roads, pads, and pipelines and drilling and completing the wells and would be spread across the 2 year timeframe for the project. Long term air quality benefits of this project include road improvements which would decrease long term dust generation and centralized fluids collection facilities which reduce truck traffic and fugitive emissions.

Pollutants generated during construction activities would include combustion emissions and fugitive dust associated (PM_{10} and $PM_{2.5}$) with earthwork and construction equipment. Once construction activities are complete, air quality impacts associated with construction would cease and impacts would transition to emissions associated with transportation of drilling and completion equipment. Fugitive dust and vehicle emissions from mobilization of equipment necessary for the drilling and completions phase and rigging up the drill rig would occur during the transitions between construction, drilling and completions phases. During drilling and completions work air quality impacts would be caused by emissions from generators and engines to run equipment, onsite and offsite vehicle traffic, and escaped and flared gasses during drilling and flowback phases. Following the completion of these phases, emissions would be greatly reduced to emissions associated with long-term natural gas and condensate production.

The CRVFO analyzes air quality impacts of oil and gas development projects using results of a regional air model prepared by Tetra Tech, Inc. and its subcontractor, URS Corporation, in October 2011. The modeling addressed the cumulative impacts of incremental oil and gas development in the CRVFO by assuming a range of future Federal (BLM and USFS) and private wells and associated facilities such as compressors, storage tanks, and roads. The modeled scenarios also incorporated different levels of mitigation. The “no action” scenario assumed a total of 5,106 future Federal (BLM plus USFS) wells with mitigation sufficient to meet CDPHE and EPA regulations and emissions standards. Other scenarios included as many as 6,640 Federal wells and associated facilities in a “maximum development” scenario in combination with more stringent mitigation to meet or exceed State and Federal regulations and standards. In all scenarios analyzed, impacts to air quality are estimated to be below applicable NAAQS, CAAQS, PSD increments, and visibility and deposition thresholds.

The modeling also estimated cumulative impacts from future Federal plus private wells in the CRVFO, ranging from a total of 12,072 wells in the “no action” scenario to 15,664 wells in the “maximum development” scenario. During the modeling, estimated future emissions from wells in the CRVFO were added to background air quality levels, major stationary sources, and an additional 28,843 future Federal plus private wells outside the CRVFO but within the modeling domain. These additional wells were based on estimated numbers for three other BLM field offices in the modeling domain—White River Field Office (Meeker, Colorado), Little Snake Field Office (Craig, Colorado), and Vernal Field Office (Vernal, Utah). Methods and results of the modeling are presented in an Air Resources Technical Support Document (ARTSD) (BLM 2011), available for viewing at the CRVFO in Silt, Colorado, and on its website.

The air quality model addressed impacts associated with emissions of greenhouse gases (GHGs), “criteria pollutants” (CO, NO_2 , SO_2 , ozone, PM_{10} , and $PM_{2.5}$), hazardous air pollutants (HAPs) including BTEX (benzene, ethylbenzene, toluene, and xylenes), formaldehyde, and n-hexane. The modeling also addressed potential impacts on visibility due to particulates and “photochemical smog” (caused by chemical reactions in the atmosphere) and on lake chemistry of selected pristine lakes due to modeled deposition rates of sulfur and resultant impacts on acid neutralizing capacity of the lake waters. The visibility analysis predicted a slight impact (one day per year with a reduction in visibility of 1deciview or

greater) in the Flat Tops Wilderness and no days with 1 deciview or greater reduction in visibility at all other modeled Class I and II receptors. For the remaining pollutants analyzed, modeled levels of future oil and gas development within the CRVFO would have no or negligible long-term adverse impacts on air quality. Since the Proposed Action is within the scope of the future development modeled, no significant adverse impacts on air quality are anticipated.

The air quality model incorporated assumptions about various development and mitigation scenarios either integrated into WPX's project design or to be applied by the BLM as COAs (Appendix A). These include use of directional drilling to reduce the number of well pads, piping instead of trucking of fluids to a centralized collection facility, flaring instead of venting of natural gas during well completions, self-contained flare units to minimize emissions to the atmosphere, the possible use of a natural gas powered drilling rig and use of closed-loop drilling. Closed-loop drilling minimizes emissions by recycling drilling muds and separating fluids and drill cuttings, thus eliminating open pits containing petroleum fluids. In addition to minimizing emissions associated with drilling and completion activities, these mitigation measures would also significantly reduce fugitive dust and vehicle tailpipe emissions by greatly reducing the volume of truck traffic required to support the operations.

Generation of fugitive dust as a result of construction activities and travel on unpaved access roads would also be reduced by BLM's requirement that the operator apply gravel to a compacted depth of 6 inches on the access road, apply water to the access road during the development phase, and apply a dust suppressant surfactant approved by the BLM throughout the long-term production phase (Appendix A). In addition, construction activities for the well pad, access road, and pipelines would occur between the hours of 7:00 a.m. and 6:00 p.m. each day, a generally more favorable period for atmospheric dispersion due to warmer temperatures and less stable air. Fugitive dust emissions from vehicular traffic during drilling and completion would be further reduced if, as planned under the Proposed Action, these activities are allowed to occur during the winter season, when roads are frozen, snow-covered, or wet.

Emissions of volatile organic compounds (VOCs) such as the BTEX constituents of condensate vary depending on the characteristics of the condensate, the volume produced, and tank operations. Operators are required to control emissions of VOCs from condensate tanks under CDPHE Regulation 7. If deemed necessary by the State, the operator may be required to install a vapor recovery or thermal destruction system to further reduce VOC concentrations.

Ongoing scientific research has identified the potential impacts of "greenhouse gases" (GHGs) and their effects on global atmospheric conditions. These GHGs include carbon dioxide, methane, nitrous oxide, water vapor, and several trace gases. Through complex interactions on a global scale, these GHG emissions are believed by many experts to cause a net warming effect of the atmosphere, primarily by decreasing the amount of heat energy radiated by the Earth back into space.

In 2001, the Intergovernmental Panel on Climate Change (IPCC) predicted that by the year 2100, global average surface temperatures would increase 1.4 to 5.8°C (2.5 to 10.4°F) above 1990 levels. The National Academy of Sciences (NAS) supports these predictions, but has acknowledged that there are uncertainties regarding how climate change may affect different regions. In 2007, the IPCC also concluded that "warming of the climate system is unequivocal" and "most of the observed increase in globally average temperatures since the mid-20th century is very likely due to the observed increase in anthropogenic (man-made) greenhouse gas concentrations" (NAS 2007). Other theories about the effect of GHGs on global climate change exist.

An inventory and assessment of GHG emissions from oil and gas projects in the CRVFO was included in the air quality modeling completed in October 2011. In all of the modeled development scenarios, annual GHG emissions from Federal wells in the CRVFO would be less than 0.5% of

Colorado emissions from natural gas projects in 2008 and 0.0009% of U.S. emissions from natural gas projects in 2005 (EPA 2010). The lack of scientific tools designed to predict climate change on regional or local scales limits the ability to quantify potential future impacts of climate change on the specific area of the Proposed Action. While any oil and gas development project may contribute GHGs to the atmosphere, these contributions would not have a significant effect on a phenomenon occurring at the global scale believed by some to be due to more than a century of human activities.

Based on the information presented in this section, including results of the air quality model prepared for the BLM in October 2011, the Proposed Action is not expected to have significant adverse impacts on air quality.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to air quality would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Cultural Resources

Affected Environment

Section 106 of the National Historic Preservation Act (NHPA) requires Federal agencies to take in to account the effects their actions will have on cultural resources. As a general policy, an agency must consider effects to cultural resources for any undertaking that involves Federal monies, Federal permitting/authorization, or Federal lands.

Six Class III (intensive pedestrian survey) cultural resource inventories (CRVFO# 1285, 1285A, 9483, 5495-3, 1100-7 and 1113-14) have been conducted within the proposed project area for adjacent pads, access roads and/or pipelines. The last of the six inventories (1113-14) was conducted by Grand River Institute specifically for this project and included a 125 acre block inventory centered on the proposed pad, and 17 acres of linear inventory for proposed natural gas line. The cultural inventories and pre-field file searches of the Colorado SHPO database and BLM Colorado River Valley Field Office cultural records identified a new non-eligible segment (5GF2115.2) of the non-eligible Low Cost Ditch (5GF2115) and a previously recorded isolated feature (5GF942). The isolated feature was not relocated, and is believed to have been misplotted initially and is outside the project area. Therefore, no historic properties are located in the immediate project Area of Potential Effect (APE). Eligible or sites potentially eligible for the National Register of Historic Places (NRHP) are referred to in Section 106 of the National Historic Preservation Act as “historic properties.”

Environmental Consequences

Proposed Action

No cultural resources within the Project Area were identified as eligible or potentially eligible for the NRHP. Therefore, the BLM made a determination of “No Historic Properties Affected”. This determination was made in accordance with the 2001 revised regulations [36CFR 800.4(d)(1)] for Section 106 of the National Historic Preservation Act (16U.S.C 470f), the BLM/State Historic Preservation Officer (SHPO) Programmatic Agreement and Colorado Protocol]. As the BLM has determined that the Proposed Action would have no direct impacts to known “historic properties,” no formal consultation was initiated with the SHPO.

Although unlikely, indirect, long-term cumulative damage from increased access and the presence of project personnel could result in a range of impacts to known and undiscovered cultural resources in the vicinity of the project location. These impacts could range from accidental damage or vandalism, illegal collection and excavation.

A standard Education/Discovery COA for cultural resource protection will be attached to the EA. The importance of this COA would be stressed to the operator and its contractors, including informing them of their responsibilities to protect and report any cultural resources encountered during construction operations.

No Action Alternative

The No Action Alternative would constitute denial of the Federal APDs meaning that none of the proposed 16 Federal wells would be drilled or developed from the GM 11-28 location. However, since the GM 11-28 pad would also support four planned fee wells, the pad construction would occur, the MV 53-28 frac pad expansion would be needed for completion work on the four fee wells, and the installation of the buried and surface pipelines and their associated underground bores would occur to support the four fee wells. The surface disturbance estimates presented in the Proposed Action remain unchanged since the pad, road, and pipeline improvements would be implemented. Therefore, the No Action Alternative would not reduce the potential for any accidental damage, vandalism, illegal collection, and excavation on the private lands involved.

Fossil Resources

Affected Environment

The predominant bedrock formations present at or near the surface within the project area are the Shire member of the Wasatch Formation (including the Fort Union Formation or equivalent at its base) and the Anvil Points, Garden Gulch and Parachute Creek members of the Green River Formation. Both formations are overlain by areas of Quaternary gravels and earthflow deposits. Occurring in varying thicknesses, these Quaternary sediments are considered Potential Fossil Yield Classification Class 2, defined as having a low probability of fossil occurrence. Class 2 geologic units are not likely to contain vertebrate or scientifically significant invertebrate fossils.

Both the Wasatch and Green River Formations are considered BLM Condition 4 formations, defined as an area that is known to contain vertebrate fossils or noteworthy occurrences of invertebrate fossils. These types of fossils are known to occur or have been documented, but may vary in occurrence and predictability. The Wasatch Formation is divided into the early Eocene Shire, and the Paleocene age Molina and Atwell Gulch members; while the Eocene aged Green River Formation is divided into the Parachute Creek, Garden Gulch, Douglas Arch, Cow Ridge, and Anvil Points members.

All members of the Wasatch Formation contain vertebrate fossils in varying abundances (Murphy and Daitch 2007). Rocks of the Wasatch Formation are lithologically similar to one another throughout the Piceance Creek Basin as heterogeneous continental fluvial deposits with interfingering channel sandstone beds and overbank deposits consisting of variegated claystone, mudstone, and siltstone beds (Franczyk et al. 1990). Eocene mammals have been found in the lower part of the Shire member.

Fossils historically identified in the Wasatch are archaic mammals—including marsupials, representatives of two extinct orders of early mammals (pantodonts and creodonts), artiodactyls (deer-like even-toed ungulates), ancestral horses and other perissodactyls (odd-toed ungulates), carnivores, and primates—as

well as birds, lizards, turtles, crocodilians, gars and other fishes, freshwater clams, gastropods (snails), and other invertebrates (BLM 1999a).

The Green River Formation consists of fine-grained lacustrine and fluvial-lacustrine rocks that were deposited in the Eocene Lake Uinta. The lake expanded early in its history, during the Long Point transgression (Johnson 1985), to cover much of the Piceance and Uinta Basins. The Green River Formation has yielded hundreds of invertebrate and plant fossils and more than 60 vertebrate taxa have been described from the formation, including crocodiles, boa constrictors, and birds.

Environmental Consequences

Proposed Action

Although mapped as the predominant surface formation of the project area, field inspection revealed the Wasatch exposed only in a few outcrops found on cliff faces and landslide exposures. The thickness of the Quaternary sediments cannot be accurately determined, but construction activities have the potential to adversely affect important fossils that may be present in the underlying Wasatch and Green Formations. The greatest potential for impacts is associated with excavation of shallow bedrock that may be unearthed during well pad and facilities (especially pipeline) construction. In general, alluvium, colluvium, and other unconsolidated sediments are much less likely than bedrock to contain well-preserved fossils.

An examination of the BLM paleontology database indicates that there are is one known fossil discovery site within a 2-mile radius of the project area. The closest known site occurs in Section 29 approximately 5,900 feet south of the proposed pad. Areas covered with vegetation and soil cover do not usually yield fossil resources, but inspections should be conducted for proposed facilities that are located on or within 200 feet of Wasatch or Green River Formation bedrock surface exposures. In the event paleontological resources are encountered, BMPs related to the standard paleontological COA would be recommended (Appendix A).

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to fossil resources would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Geology and Minerals

Affected Environment

The project area is located near the eastern margin of the Colorado Plateau physiographic province (Fenneman 1946), a region characterized by dissected plateaus of strong relief. A broad, asymmetric, southeast-northwest trending structural basin, the Piceance Basin contains stratified sediments ranging in age from Cambrian through middle Tertiary up to 20,000 feet thick. The basin lies between the White River uplift to the northeast, the Gunnison uplift to the south, and the Uncompahgre swell to the west (George 1927, Weiner and Haun 1960). Table 4 lists the geologic formations within the project area.

The predominant bedrock exposures within the proposed development area are the Tertiary Green River and Wasatch Formations. The Green River formation is composed of alternating layers of fine grained sandstones and laminated to massive marlstone. The Green River formation, overlies the Wasatch

Formation, which consists of variegated siltstone, claystone, and sandstones and ranges from 1,000 to 2,500 feet thick. The Wasatch Formation is underlain unconformably by the Mesaverde Group. The Mesaverde Group is composed of mudstones and sandstones with interlayered coal beds and ranges in thickness from about 3,000 to over 7,000 feet. The Mesaverde Group has also been referred to as the Mesaverde Formation, which includes informal subdivisions based on gas productivity characteristics.

Table 4. Geologic Formations within the Project Area				
<i>Map Symbol</i>	<i>Formation Name</i>	<i>Age</i>	<i>Characteristics</i>	<i>Location</i>
Qal	Alluvial and Floodplain Deposits	Holocene	Mud, silt, sand and gravel.	Mantels topography.
Tgp	Green River Formation – Parachute Creek Member	Eocene	Massive to platy marlstone.	Slopes and outcrops.
Tgg	Green River Formation – Garden Gulch Member.	Eocene	Light Gray barren marlstone	Slopes and outcrops.
Tga	Green River Formation – Anvil Points member.	Eocene	Fine-to-coarse grained gray and brown sandstone.	Steep slopes and outcrops.
Tws	Wasatch Formation – Shire member	Paleocene	Variegated claystone.	Steep slopes and outcrops.
Source: Donnell et al. 1986				

The Iles Formation of the Mesaverde Group is the target zone of the proposed drilling program. Comprised of the Williams Fork and Iles Formations, sediments of the Mesaverde Group are marine sandstones transitional to non-marine beds of coal, shale, and sandstone. These sediments were deposited marginal to the great Cretaceous seaway. The oscillating shoreline of this sea, due to the rise and fall of sea level, left behind a complex of transgressive and regressive sedimentary sequences of nearshore and offshore sediments that define the Mesaverde Group.

Production of natural gas and associated liquid condensate is derived from three reservoir intervals in the Wasatch, Williams Fork, and Iles Formations. The latter two make up the Upper Cretaceous Mesaverde Group. The proposed drilling program would target the sandstone sequences of the Upper Williams Fork Formation, which provide most of the natural gas production volumes (Lorenz 1989). The upper portions of the Williams Fork include fluvial point bar, floodplain, and swamp deposits. The Lower Williams Fork Formation includes delta front, distributary channel, strandplain, lacustrine (lake), and palustrine (swamp) environments (Hemborg 2000), while the sandstones and coalbeds of the Iles Formation were deposited in a wave-dominated coastal setting (Johnson 1989, Lorenz 1989). The source rocks are interbedded and thermally mature gas-prone shales, mudstones, siltstones, and coals. The reservoir rocks are the fine to medium-grained Williams Fork sandstones, varying in thickness from less than 10 feet to more than 50 feet (Spencer and Wilson 1988), creating an interbedded relationship between source and reservoir. The trapping mechanism of the gas is both stratigraphic (related to lithology) and diagenetic (related to post-depositional process).

No commercial deposits of coal, oil shale, uranium, precious metals, limestone, sand and gravel, gypsum, or other leasable, locatable, or salable minerals are believed to occur within or beneath the project area.

Environmental Consequences

Proposed Action

If the proposed wells are proven feasible, initial production rates would be expected to be highest during the first few years of production, then decline during the remainder of the economic lives of the wells. Substantial reserves have been known to be trapped within the tight sands of these reservoirs since the late 1950s, but only within the last decade, and particularly within the last few years, has the integrated application of new technologies turned the tight gas sands of the Mesaverde Group into a profitable play (Kuuskraa 1997). Natural fracture detection, advanced log analysis, more rigorous well completions and recompletions, and denser spacing have increased the amount of recoverable gas within these reservoirs.

Natural gas production from the proposed wells would contribute to the draining of hydrocarbon-bearing reservoirs within the Mesaverde Group in this area, an action that would be consistent with BLM objectives for mineral production. Hydraulic fracturing would be utilized to create fractures within the formation to allow gas production from the wells. In recent years, public concern has been voiced regard potential impacts of hydraulic fracturing from “micro-earthquakes” and from contamination of freshwater aquifers. Potential impacts of hydraulic fracturing are addressed in the section on Water Quality-Ground.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to geologic resources would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Invasive Non-Native Plants

Affected Environment

Colorado’s noxious weeds are designated by the Colorado Department of Agriculture, and management of these weeds is regulated under the Colorado Noxious Weed Act, Title 35, Article 5.5. State listed noxious weeds are differentiated into List A species, designated for eradication, List B species, designated for containment to stop continued spread, and List C species, which are too widespread for containment, but whose negative impacts may be reduced by improved integrated weed management.

The project area is located near Parachute Creek at elevations of approximately 5,420 to 5,640 feet. The GM 11-28 pad site would be on an alluvial fan in a salt desert shrub habitat type. The pipelines would cross salt desert shrubland and areas previously disturbed by agriculture and oil and gas development, and bore beneath the riparian plant communities bordering Parachute Creek. Vegetation in the salt desert shrubland areas is dominated by four-winged saltbush (*Atriplex canescens*), greasewood (*Sarcobatus vermiculatus*), rubber rabbitbrush (*Ericameria nauseosa*), shadscale (*Atriplex confertifolia*), and Wyoming big sagebrush (*Artemisia tridentata* ssp. *wyomingensis*). Much of the previously disturbed areas were once irrigated hay fields which have lain fallow for several years. Alfalfa (*Medicago sativa*) and common pasture grasses remain, along with several non-native invasive species. Vegetation in riparian areas along Parachute Creek is dominated by coyote willow (*Salix exigua*).

Botany surveys conducted in June 2013 found eight State List B noxious weeds, bull thistle (*Cirsium vulgare*), Canada thistle (*Cirsium arvense*), hoary cress (*Cardaria draba*), houndstongue (*Cynoglossum officinale*), musk thistle (*Carduus nutans*), perennial pepperweed (*Lepidium latifolium*), Russian knapweed (*Acroptilon repens*), and tamarisk (*Tamarix ramosissima*). In addition, six List C noxious

weed species were found, cheatgrass (*Bromus tectorum*), chicory (*Cichorium intybus*), common burdock (*Arctium minus*), common mullein (*Verbascum thapsus*), field bindweed (*Convolvulus arvensis*), and redstem filaree (*Erodium cicutarium*). Several other non-native plant species with the potential to be invasive or interfere with establishment of native species are present on the site. These include alfalfa curvseed butterwort (*Ceratocephala testiculata*), dandelion (*Taraxacum officinale*), horehound (*Marrubium vulgare*), Russian-thistle (*Salsola tragus*), madwort (*Alyssum* sp.), tall tumble-mustard (*Sisymbrium altissimum*), yellow sweetclover (*Melilotus officinalis*), annual wheatgrass (*Eremopyrum triticeum*), crested wheatgrass (*Agropyron cristatum*), and smooth brome (*Bromus inermis*).

Environmental Consequences

Proposed Action

Under the Proposed Action, a total of 8.73 acres would be disturbed, of which 2.17 acres would remain as long-term working area disturbance. Following construction and well completion, interim reclamation would occur on all areas not needed for ongoing operations. All of this disturbance would occur on private land.

Surface-disturbing activities, such as those proposed for this project, provide a niche for invasion and establishment of non-native plant species particularly when these species are already present in the surrounding area. The mechanisms for this invasion and establishment are multi-fold. Removal of native vegetation removes the competition from native plants for resources, including water and soil nutrients, opening up niches for invasive species (Parendes and Jones 2000). Linear disturbances, such as roads, provide corridors of connected habitat along which invasive plants can easily spread (Gelbard and Belnap 2003). Well pad construction and subsequent well drilling and operations activities, as well as new road construction and installation of pipelines, require construction equipment and motorized vehicles which often transport invasive plant seeds either alone or in mud clods on the vehicle undercarriage or tires and deposit them in disturbed habitats along access roads and at well pad sites (Schmidt 1989, Zwaenepoel et. al. 2006).

Noxious weeds and other invasive species are well-adapted to colonize and dominate in disturbed ground. They generally do not require well-developed soils, can out-compete native species for resources, produce prodigious quantities of seeds, and have seeds which can survive for many years or even decades within the soil. When weeds establish on a site, they can also significantly alter the composition of the soil microbial community of bacteria and fungi, making it increasingly more difficult over time for native species to reestablish on the site (Hierro et. al. 2006, Reinhart and Callaway 2006, Vinton and Goergen 2006, Vogelsang and Bever 2009). Due to the quantity and longevity of weed seeds and the effects of weeds on the soil, once these invasive species have established on a site they can be extremely difficult to eliminate.

The project area has been previously disturbed, and includes an existing well pad and roads. As a result, the potential for noxious weeds and other nonnative invasive species is high. With new project disturbances, the potential for establishment of undesirable plants following construction activities is high. Movement of soil by construction equipment could spread weed seeds throughout the project area, and the total area of disturbed habitat would increase. Vehicles and equipment could also transport new noxious weed species to the site, where they would have disturbed habitats in which to establish.

To mitigate the invasive species risk, the standard weed control COA would be attached to APDs to require periodic monitoring and weed control practices to ensure that noxious weeds are controlled (Appendix A). Establishment of desirable plant species is also crucial in preventing invasive non-native plant species establishment and spread. Therefore, the standard reclamation COAs would also be

attached to APDs to require reclamation seeding and monitoring of seeding results (Appendix A). Because the project would be entirely on private land, the species composition of the seed mix would be at the discretion of the landowner.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts from invasive weed establishment would be minimally reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Native American Religious Concerns

Affected Environment

The Proposed Action is located within an area identified by the Ute Tribes as part of their ancestral homeland. Six Class III cultural resource inventories (see section on Cultural Resources) have been conducted in the project vicinity to determine if any areas were known to be culturally sensitive to Native Americans. No sensitive areas were identified or are currently known in the proposed project area.

Environmental Consequences

Proposed Action

At present, no Native American concerns are known within the project area and none were identified during the inventories. The Ute Tribe of the Uintah and Ouray Bands, one of the primary Native American tribes in this area of the CRVFO, have indicated that they do not wish to be consulted for small projects or projects where no Native American areas of concern have been identified either through survey or past consultations. Therefore, formal consultation with Native American Tribes was not undertaken for the current project.

If new data regarding cultural resources are identified or disclosed, new terms and conditions may have to be negotiated to accommodate their concerns.

Although the Proposed Action would have no direct impacts, increased access and personnel in the vicinity of the proposed project could indirectly impact unknown Native American resources ranging from illegal collection to vandalism.

The National Historic Preservation Act (NHPA) requires that if newly discovered cultural resources are identified during project implementation, work in that area must stop and the agency Authorized Officer notified immediately (36 CFR 800.13). The Native American Graves Protection and Repatriation Act (NAGPRA), requires that if inadvertent discovery of Native American Remains or Objects occurs, activity must cease in the area of discovery, a reasonable effort made to protect the item(s) discovered, and immediate notice made to the agency Authorized Officer, as well as the appropriate Native American group(s) (IV.C.2). Notice may be followed by a 30-day delay (NAGPRA Section 3(d)). Further actions also require compliance under the provisions of NHPA and the Archaeological Resource Protection Act. WPX Energy Rocky Mountain LLC will notify its staff and contractors of the requirement under the NHPA, that work must cease if cultural resources are found during project operations. A standard Education/Discovery COA for the protection of Native American values would be attached to the APDs (Appendix A). The importance of these COAs would be stressed to the operator and its contractors,

including informing them of their responsibilities to protect and report any cultural resources encountered. The proponent and contractors would also be made aware of requirements under the NAGPRA.

No Action Alternative

The No Action Alternative would constitute denial of the Federal APDs meaning that none of the proposed 16 Federal wells would be drilled or developed from the GM 11-28 location. However, since the GM 11-28 pad would also support four planned fee wells, the pad construction would occur, the MV 53-28 frac pad expansion would be needed for completion work on the four fee wells, and the installation of the buried and surface pipelines and their associated underground bores would occur to support the four fee wells. The surface disturbance estimates presented in the Proposed Action remain unchanged since the pad, road, and pipeline improvements would be implemented. Therefore, the No Action Alternative would not reduce the potential for any accidental damage, vandalism, illegal collection and excavation on the private lands involved..

Noise

Affected Environment

The Proposed Action lies 5 miles northwest of Parachute, Colorado directly adjacent to CR 215, a primary oil and gas field access road. The Proposed Action involves constructing the GM 11-28 well pad to drill and complete 20 wells (16 Federal wells), the delivery of drilling water via truck transport, the expansion of the existing MV 53-28 pad to conduct remote frac operations, installation of a surface water line for water delivery during frac operations, and the burying and boring of various pipelines to upgrade natural gas and production water gathering . The Proposed Action would lie within a rural setting characterized by oil and gas development activities. Noise levels in the area are presently created by CR 215 and traffic serving existing wells and ongoing drilling and completion activities within and along the Parachute Creek Valley. The proposed drilling activities would be located approximately 750 feet across CR 215 from the nearest residence

Noise is generally described as unwanted sound, weighted and noise intensity (or loudness) is measured as sound pressure in decibels (dBAs). The decibel scale is logarithmic, not linear, because the range of sound that can be detected by the human ear is so great that it is convenient to compress the scale to encompass all the sounds that need to be measured. Each 20-unit increase on the decibel scale increases the sound loudness by a factor of 10.

Sound levels have been calculated for areas that exhibit typical land uses and population densities. In rural recreational areas, ambient sound levels are expected to be approximately 30 to 40 dBA (EPA 1974, Harris 1991). As a basis for comparison, the noise level would be 60 dBA during a normal conversation between two people standing five feet apart.

Environmental Consequences

Proposed Action

The project would result in increased levels of noise during the construction, drilling, and completion phases. The noise would be most noticeable along the roads used to haul equipment and at the pad location. Drilling activities are subject to noise abatement procedures as defined in the COGCC Rules and Regulations (Aesthetic & Noise Control Regulations). Operations involving pipeline or gas facility installation or maintenance, compressors, the use of a drilling rig, completion rig, workover rig, or hydraulic stimulation are subject to the maximum permissible noise levels for industrial zones. The 2006

revised COGCC noise control rules call for noise levels from oil and gas operations at any well site and/or gas facility to comply with the maximum permissible levels (Table 5) at a distance of 350 feet. Given the remote locations of the proposed project activities, with no reasonably close occupied structure or designated recreational area, the light industrial standard is applicable. The allowable noise level for periodic impulsive or shrill noises is reduced by 5 dBA from the levels shown (COGCC 2008).

Table 5. Noise Standards for Light industrial, Residential/Agriculture/Rural		
<i>Zone</i>	<i>7:00 A.M. to 7:00 P.M</i>	<i>7:00 P.M. to 7:00 A.M</i>
Light Industrial	70 dBA	65 dBA
Residential/Agricultural/Rural	55 dBA	50 dBA

Short-term (7- to 14-day) increases in nearby noise levels would characterize road and well pad construction while the existing cuttings pit is re-opened. Based on the Inverse Square Law of Noise Propagation (Harris 1991) and an typical noise level for construction sites of 65 dBA at 500 feet (Table 6), project-related noise levels would be approximately 59 dBA at a distance of 1,000 feet, approximating active commercial areas (EPA 1974).

Table 6. Noise Levels at Typical Construction Sites and along Access Roads			
<i>Equipment</i>	<i>Noise Level (dBA)</i>		
	<i>50 feet</i>	<i>500 feet</i>	<i>1,000 feet</i>
Air Compressor, Concrete Pump	82	62	56
Backhoe	85	65	59
Bulldozer	89	69	63
Crane	88	68	62
Front End Loader	83	63	57
Heavy Truck	88	68	62
Motor Grader	85	65	59
Road Scraper	87	67	61
Tractor, Vibrator/Roller	80	60	54
Sources: BLM (1999a), La Plata County (2002)			

Traffic noise would also be elevated as a consequence of the Proposed Action. The greatest increase would be along access roads during the drilling and completion phases. Based on the La Plata County data presented in Table 6 approximately 68 dBA of noise (at 500 feet) would be created by each fuel and water truck that travels these roads. Less noise would be created by smaller trucks and passenger vehicles such as pickup trucks and sport utility vehicles. Although the duration of increased noise from this source would be short, it would occur repeatedly during the drilling and completion phases.

Noise impacts would decrease during the production phase but would remain background noise levels. During maintenance and well workover operations, noise levels would temporarily increase above those associated with routine well production.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action.

Noise impacts would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Socioeconomics

Affected Environment

The project area is located entirely within Garfield County, Colorado, with a total county land area of 2,958 square miles (Garfield County 2013a). The county seat is Glenwood Springs; other towns include Carbondale, New Castle, Silt, Rifle, Battlement Mesa, and Parachute. Interstate 70 transects the county east to west with a network of county and private roads servicing the project area.

The population of the county grew by an average of approximately 2.5% per year from 2000 to 2011 but decreased by 2.6% from 2008 to 2011 due to the national economic downturn, resulting in a net increase of 27% from 44,259 to 56,270 residents (CDOLA 2013a). Population growth in Garfield County is expected to nearly double to 109,887 in 2040 (CDOLA 2012). In July 2011, the Garfield County population was 70% urban and 30% rural, with a population density of approximately 19 people per square mile (City Data 2012).

In February 2013, the total estimated civilian labor force was 34,107 with an unemployment rate of 7.8% (CDLE 2013). In the fourth quarter of 2011, the industry groups with the highest percentage of total employment were construction (14.4%), retail trade (13.7%), and Health Care and Social Assistance (13.5%). Table 7 lists the top 10 industries in Garfield County for the fourth quarter of 2011 (CDLE 2013).

Table 7. Selected Industry Sectors for Garfield County		
Rank	Job Sector	Employees
1	Construction (buildings and engineered projects)	2,901
2	Retail Trade	2,782
3	Health Care and Social Assistance	2,732
4	Education Services	2,484
5	Accommodation and Food Services	2,464
6	Mineral Extraction (including mining and oil and gas)	2,426
7	Public Administration	1,717
8	Professional, Scientific, and Technical Services	1,047
9	Administration, Support, Waste Management, and Remediation	874
10	Transportation and Warehousing	782

Personal income in Garfield County has also risen, growing approximately 6% per year from \$1.3 billion in 2000 to \$2.1 billion in 2011. However, personal income dropped by nearly 10% from 2008 to 2011. Annual per capita income has grown in the same period approximately 3% per year, from \$29,081 to \$37,858, but annual per capita income dropped by nearly 11% from 2008 to 2011 (USDOC 2012).

The communities of Parachute, Rifle, Silt, and New Castle are considered to have the most affordable housing, while the communities of Glenwood Springs and Carbondale have the least affordable housing. In March 2012 the cost of living index in Garfield County was 88.6, below the U.S. average of 100 (City Data 2012).

Activities on public land in the vicinity of the project area are primarily ranching/farming, hunting, OHV travel, and the development of oil and gas resources. Hunters contribute to the economy because many require lodging, restaurants, sporting goods, guides and outfitting services, food, fuel, and other associated supplies.

Production of natural gas in Garfield County increased dramatically during recent years, from approximately 70 billion cubic feet (BCF) in 2000 to 700 BCF in 2012 (COGCC 2013a). Approximately 1,286 drilling permits were approved in Garfield County between April 2, 2012 and March 29, 2013 (COGCC 2013b). However, U.S. natural gas prices have dropped in recent years from \$10.79 per thousand cubic feet (MCF) in July 2008 to \$1.89/MCF in April 2012 (USDOE 2013). The U.S. price of natural gas has begun to improve, in December 2012 it was \$3.35/MCF, but has not reached the prices of 2008. Natural gas development activity in Garfield County remains low.

Property tax revenue from oil and gas development is a source of public revenue in Garfield County. In 2012, oil and gas assessed valuation in Garfield County was approximately \$2.8 billion, or about 73% of total property tax assessed value distribution (Garfield County 2013b). The county's largest taxpayers are in the oil and gas industry (Garfield County 2013c).

The Federal government makes Payments in Lieu of Taxes (PILT) to local governments to help offset losses in property taxes due to nontaxable Federal lands within their boundaries (USDI NBC 2013). The PILT distributions are based on acres for all Federal land management agencies. Approximately 60% of all Garfield County lands are Federally owned (Garfield County 2013a). The amount may also be adjusted based on population and as apportioned by Congress. By formula, payments are decreased as other Federal funds, such as mineral royalty payments, increase. PILT amounts to Garfield County over the last five years ranged from \$1,732, 974 in 2008 to \$403,176 in 2012 (USDI NBC 2013).

In addition to PILT distributions, Federal mineral royalties are levied on oil and gas production from Federal mineral leases. Oil and gas lessees pay royalties equal to 12.5% of the wellhead value of oil and gas produced from public land (BLM 2007a). Half the royalty receipts received from production are distributed to the state and county governments, which are then allocated to fund county services, schools, and local communities.

The NEPA process requires a review of the environmental justice issues as established by Executive Order 12898 (February 11, 1994). The order established that each Federal agency identify any "disproportionately high and adverse human health or environment effects of its programs, policies, and activities on minority and low-income populations." The Hispanic/Latino community is the only minority population of note in the project vicinity. In 2010, approximately 28% of the residents of Garfield County identified themselves as Hispanic/Latino, compared to 17% in 2000 (CDOLA 2013b). Statewide, the population of Hispanic/Latino residents grew 41.2% during the same 10-year period (CDOLA 2013c). African-American, American Indian, Asian, and Pacific Islander residents accounted for a combined 1.6% of the Garfield County population in 2010, compared to a statewide level of 7% (CDOLA 2013b).

Environmental Consequences

Proposed Action

The Proposed Action would have minor positive impacts on the local economy of Garfield County through the creation of additional job opportunities in the oil and gas industry and in supporting trades and services. In addition, Garfield County would receive additional tax and royalty revenues. The

Proposed Action could result in negative social impacts including changing the character of the area, reducing scenic quality, increasing dust levels especially during construction, and increasing traffic.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Socioeconomic impacts, positive or negative, would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Soils

Affected Environment

The Proposed Action lies 5 miles northwest of Parachute, Colorado directly adjacent to CR 215, a primary oil and gas field access road. The Proposed Action would occur in the Parachute field on surrounding slopes that are generally west-facing or southwest-facing, at elevations between 5,420 feet and 5,640 feet, and with gradients ranging from less than 5% to greater than 50%. Soils in the project area consist of rock outcroppings and loamy soils derived from basalt, sandstone, and shale (Table 8) (NRCS 2013).

Table 8. Project Area Soils				
<i>Mapping Unit Name</i>	<i>Description</i>	<i>Erosion Hazard</i>	<i>Permeability</i>	<i>Proposed Infrastructure Type</i>
Nihill Channery loam 1-6%	Alluvium derived from sandstone and shale found on valley sides and alluvial fans. Non-saline to slightly saline, well drained. Not prime farmland	Moderate	Moderately rapid	Portions of Buried Pipelines
Nihill Channery loam 6-25%	Alluvium derived from sandstone and shale found on valley sides and alluvial fans. Non-saline to slightly saline, well drained. Not prime farmland	Severe	Moderately rapid	GM 11-28 pad MV 53-28 pad, CR 215 Pipeline Bores
Olney loam, 3-6 %	Alluvium derived from sandstone and shale found on valley sides and alluvial fans. Non-saline, well drained. Prime farmland if irrigated	Moderate	Moderate	Portions of Buried Pipelines
Torriorthents- - Rock Outcrop Complex, very steep 50-80%	Exposed sandstone and shale bedrock and stony basaltic alluvium. Torriorthents are on foothills and mountainsides below the rock outcrop. This complex has limited value for grazing.	Moderate to Severe	Moderate	Existing access road, NE corner of GM 11-28 pad
Torrifluvents, nearly level	Mixed alluvium found along distributaries, rivers, and floodplains. Non-saline, moderately well drained. Not prime farmland	N/A	Moderate	Parachute Creek Pipeline Bore Area

Environmental Consequences

The Proposed Action would involve the construction of the GM 11-28 pad (with a disturbance footprint of 3.33 acres) to drill, complete, and operate 16 new Federal wells in two drilling visits. Well completion operations would occur on the GM 11-28 pad for the initial Niobrara well drilling in fall 2013. The nearby MV 53-28 pad would be expanded (with a disturbance area of 1.55 acres) and serve as the remote frac location for the remaining 15 wells to be drilled in the second visit in summer 2014. Water for the

well drilling would be trucked to the pad. The well fracing operations would be supplied water via surface delivery lines. Including the water and gas pipeline upgrades planned for this project, the total short term disturbance on private land would be 8.73 acres and the long term disturbance after reclamation would be 2.17 acres (Table 1).

All road sections would be maintained and graveled, as needed. The GM 11-28 pad construction would be designed and positioned in the optimal location to take advantage of the topography and avoid disturbances to the drainages and steep slopes. The area generally contains adequate vegetation buffers that would minimize the potential for sediment transport to unnamed ephemeral drainages, Parachute Creek, and the Colorado River. However, construction activities would cause slight increases in local soil loss, loss of soil productivity, and sediment available for transport to surface waters. Potential for such soil loss and transport would increase as a function of slope, feature (pad, road, or pipeline route) to be constructed, and proximity to drainages.

The proposed pads, access roads, and pipeline systems would be located on areas with moderate to severe risk of erosion due to the soil characteristics and its location within alluvial fans. Particular care would be taken during construction and reclamation to ensure that proper design and BMPs, including the COAs listed in Appendix A, are utilized to prevent erosion and slope movement.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to soil resources would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Special Status Species

Federally Listed, Proposed, or Candidate Plant Species

Affected Environment

According to the latest species list from the USFWS, four Federally listed plant species may occur within or be impacted by actions occurring in Garfield County. Table 9 lists these species and summarizes information on their habitat associations, potential for occurrence in the project vicinity based on known geographic range and habitats present, and potential for adverse impacts from the Proposed Action. Four Federally listed plant species have the potential to occur within or adjacent to the project area. These are Parachute penstemon, DeBeque phacelia, Colorado hookless cactus, and Ute lady's tresses. Rare plant surveys were conducted within and adjacent to the proposed project area in June and August 2013. Suitable habitat is present for all four species, but no plants were found (WWE 2013a, 2013b). For two of these species, DeBeque phacelia and Ute lady's tresses, presence or absence could not be definitively determined during the 2013 surveys. DeBeque phacelia is an annual species which does not germinate every year. During the 2013 growing season, DeBeque phacelia exhibited patchy germination at lower elevations similar to the project area elevation. Therefore, the areas of identified suitable and marginally suitable DeBeque phacelia habitat were assumed to be occupied for purposes of effects analysis. Similarly, Ute lady's tresses do not appear aboveground every year and may be missed in a single year survey. Therefore, suitable Ute lady's tresses habitat adjacent to Parachute Creek was assumed to be occupied for purposes of effects analysis. Because of the potential impacts of the project on Federally listed plants, informal consultation with USFWS was requested in August 2013.

Table 9. Potential for Occurrence of Threatened or Endangered Plant Species				
<i>Species and Status</i>	<i>Occurrence</i>	<i>Habitat Association</i>	<i>Range or Habitat in Vicinity?</i>	<i>Potentially Affected?</i>
Parachute penstemon (<i>Penstemon debilis</i>) -- Threatened	Sparsely vegetated, south-facing, steep, white shale talus of the Parachute Creek Member of the Green River Formation; 8,000 to 9,000 feet	Other oil shale endemic species, such as Roan Cliffs blazing-star, Cathedral Bluffs meadow-rue, dragon milkvetch, Piceance bladderpod, and oil shale fescue	Yes	No
DeBeque phacelia (<i>Phacelia submutica</i>) – Threatened	Sparsely vegetated, steep slopes in chocolate-brown, gray, or red clay on Atwell Gulch and Shire Members, Wasatch Formation; 4,700 to 6,200 feet	Desert shrubland with four wing saltbush, shadscale, greasewood, broom snakeweed, bottlebrush squirreltail and Indian ricegrass, grading upward into scattered junipers	Yes	Yes
Colorado hookless cactus (<i>Sclerocactus glaucus</i>) – Threatened	Rocky hills, mesa slopes, and alluvial benches in salt desert shrub communities; often with well-formed microbiotic crusts; can occur in dense cheatgrass 4,500 to 6000 feet	Desert shrubland with shadscale, galleta grass, black sagebrush, Indian ricegrass grading upward into big sagebrush and sagebrush/pinyon-juniper	Yes	No
Ute lady's tresses orchid (<i>Spiranthes diluvialis</i>) – Threatened	Subirrigated alluvial soils along streams and in open meadows in floodplains; 4,500 to 7,200 feet	Box-elders, cottonwoods, willows, scouring rushes, and riparian grasses, sedges, and forbs	Yes	Yes

Environmental Consequences

Proposed Action

DeBeque Phacelia

Suitable and marginal habitats (collectively referred to as “potential habitat”) and individual DeBeque phacelia plants that may occur in those areas could be impacted by construction activities. Although no construction is planned to occur within the identified potential habitat areas, direct impacts as described above may still occur in suitable or marginal habitats located more than 20 meters from existing or proposed disturbance without mitigation measures in place. The suitable habitat site located approximately 25 meters east of the proposed GM 11-28 well pad has the greatest possibility of direct impacts from construction equipment, vehicles, or pedestrian traffic.

Dust levels could be expected to increase above ambient levels in the short term during pad expansion, well drilling, new road construction, and new pipeline installation. Increased dust levels can negatively impact plants by clogging stomatal openings in the leaves, impeding gas exchange and reducing the ability of plants to take in carbon dioxide. Dust on the leaf surface can also effectively reduce light availability at the leaf surface. Light and carbon dioxide are both critical for plants to conduct photosynthesis, and reductions in either can reduce the quantity of carbohydrates plants can produce through photosynthesis, and thereby reduce plant growth and seed production. Dust on leaf surfaces can

also facilitate plant tissue uptake of toxic pollutants (Thompson et al. 1984, Farmer 1993, Sharifi et al. 1997). Dust can also affect snowmelt patterns and resulting hydrology and soil moisture availability, alter soil pH and nutrient availability, and result in plant community composition changes (Angold 1997, Auerbach et al. 1997, Johnston and Johnston 2004, Field et al. 2010, Gieselman 2010).

During flowering years, project related dust could indirectly impact phacelia plants located within 100 meters of the disturbance areas. Project related dust could also have negative effects on suitable habitat locations, particularly if dry or wet chemical deposition associated with construction activities or dust abatement treatments should drift into these habitat areas.

Additional potential indirect impacts associated with noxious weeds and other nonnative invasive species, and from chemical treatment of these species, could also impact DeBeque phacelia plants and habitat areas. DeBeque phacelia plants and habitat may be more vulnerable to these effects due to the limited vegetation and bare soil conditions generally present in these areas. The proposed removal of native vegetation would increase the site vulnerability to invasion and establishment of noxious weeds and other nonnative invasive plant species, particularly where these species are already established.

Ground disturbance combined with vehicle traffic and construction equipment provides both excellent habitat and vectors for invasive species, particularly when these species are already present within the soil seed bank (Schmidt 1989, Parendes and Jones 2000, Gelbard and Belnap 2003, Larson 2003, Zwaenepoel et al. 2006). Nonnative species can negatively impact native plant communities, both directly through competition for resources, and indirectly through alteration of soil microbial communities (Hierro et al. 2006, Klironomos 2002, Reinhart and Callaway 2006, Vogelsang and Bever 2009). Herbicide treatments of noxious weeds can also result in negative effects or mortality to native plants if they are co-occurring or located nearby, particularly in areas subject to strong winds and blowing dust (BLM 2007b). Implementation of standard BLM Conditions of Approval for noxious weeds and temporary reclamation would reduce the risk of noxious weed and invasive species establishment and spread through the combination of treating noxious weeds while also reintroducing native vegetation through seeding of native plant species.

DeBeque phacelia would likely not be vulnerable to potential cumulative effects on pollinators. Based on the current level of knowledge regarding DeBeque phacelia pollination, this species appears to be self-pollinating and not dependent on insect pollinators (Ladyman 2003, USFWS 2013).

Conservation measures, detailed in Section 7 of this document, would be applied to the project area to minimize the risk of these indirect impacts. With implementation of these conservation measures, potential effects to DeBeque phacelia would be insignificant, meaning that "...a person would not be able to meaningfully measure, detect, or evaluate insignificant effects..." (USFWS 2008b).

Ute Lady's-tresses Orchid

The Proposed Action would include ground disturbance for pipeline installation within 30 meters of Parachute Creek, where patches of habitat suitable for Ute ladies'-tresses are present. Installation of the gas sales line would cross Parachute Creek using directional boring methods. Project disturbance at the well pad, frac pad, and along the surface frac lines would not occur near the creek, and runoff from these project sites would not reach Parachute Creek due to storm water controls for County Road 215 and the existing irrigation infrastructure that intervenes.

Surveys did not detect this species in the project area. Suitable habitat areas received an extensive survey and habitat assessment. Some areas along the streambanks are of poor habitat quality due to extensive cut banks, stream-bank hardening with boulders, periodic heavy grazing, and clayey soils. Frequency and

intensity of herbicide use for noxious weeds by the landowner are uncertain, and herbicide application within the riparian area could reduce the potential for Ute lady's-tresses in this area. Given these habitat suitability reducing factors and the distance from known populations, the likelihood that Ute lady's-tresses occurs along Parachute Creek is low, even though only one year of survey was conducted. However, if Ute lady's tresses is present in the area of the pipeline bore, plants could be affected by the same types of impacts described above for DeBeque phacelia (WWE 2013c).

Effects Determinations

Because surveys resulted in no observations of Colorado hookless cactus or Parachute penstemon within or adjacent to the project area, the project would have “**No Effect**” on these species. Based on the presence of suitable habitat for the DeBeque phacelia and Ute lady's-tresses orchid within 100 meters of the project disturbance area, but with the addition of protective mitigations to the COAs for the project (Appendix A), the determination for these species is “**May Affect, Not Likely to Adversely Affect.**”

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to special status species would be minimally reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

BLM Sensitive Plant Species

Affected Environment

BLM sensitive plant species with habitat and/or occurrence records in Garfield County are listed in Table 10, along with summaries of their habitat requirements, potential for occurrence within the project area, and potential to be impacted by the Proposed Action. Species with the potential to occur in the vicinity of the GM 11-28 project area are DeBeque milkvetch, Naturita milkvetch, Piceance bladderpod, Roan Cliffs blazing-star, and Cathedral Bluffs meadowrue. Rare plant surveys were conducted in June and August 2013, and no occurrences of any BLM sensitive plant species were found within or adjacent to the project area (WWE 2013a, 2013b).

Table 10. Potential for Occurrence of BLM Sensitive Plant Species				
<i>Species and Status</i>	<i>Occurrence</i>	<i>Habitat Association</i>	<i>Range or Habitat in Vicinity?</i>	<i>Potentially Affected?</i>
DeBeque milkvetch <i>(Astragalus debequaeus)</i>	Varicolored, fine-textured, seleniferous or saline soils of Wasatch Formation; 5,100 to 6,400 feet	Pinyon-juniper woodlands and desert shrublands	Yes	No
Naturita milkvetch <i>(Astragalus naturitensis)</i>	Sandstone mesas, ledges, crevices and slopes in pinyon/juniper woodlands; 5,000 to 7,000 feet	Pinyon-juniper woodlands	Yes	No
Piceance bladderpod <i>(Lesquerella parviflora)</i>	Shale outcrops of the Green River Formation, on ledges and slopes of canyons in open areas; 6,200 to 8,600 feet	Pinyon-juniper woodlands, shrublands; often with other oil shale endemic species	Yes	No

Table 10. Potential for Occurrence of BLM Sensitive Plant Species				
<i>Species and Status</i>	<i>Occurrence</i>	<i>Habitat Association</i>	<i>Range or Habitat in Vicinity?</i>	<i>Potentially Affected?</i>
Roan Cliffs blazing-star (<i>Mentzelia rhizomata</i>)	Steep, eroding talus slopes of shale, Green River Formation; 5,800-9,000 feet	Pinyon-juniper woodlands, shrublands; often with other oil shale endemic species	Yes	No
Harrington's beardtongue (<i>Penstemon harringtonii</i>)	Flats to hillsides with rocky loam and rocky clay loam soils derived from coarse calcareous parent materials or basalt; 6,200-9,200 feet	Sagebrush shrublands, typically with scattered pinyon-juniper	No	No
Cathedral Bluffs meadow-rue (<i>Thalictrum heliophilum</i>)	Endemic on sparsely vegetated, steep shale talus slopes of the Green River Formation; 6,300-8,800 feet	Pinyon-juniper woodlands and shrublands; often with other oil shale endemics, sometimes with rabbitbrush or snowberry	Yes	No

Environmental Consequences

Proposed Action

Because no occurrences of BLM sensitive plants have been identified within or adjacent to the project area, the project would have no impact on any BLM sensitive plant species.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Because no BLM sensitive plants occur within or adjacent to the project area, the drilling of four wells instead of the 20 wells in the Proposed Action would have no impact on BLM sensitive plants.

Federally Listed, Proposed, or Candidate Animal Species

Affected Environment

Federally listed, proposed, or candidate species potentially occurring within or affected by actions in Garfield County include eight species of vertebrate wildlife. Table 11 lists these species and summarizes information on their distribution, habitat associations, and potential to occur or be adversely affected.

Table 11. Potential for Occurrence of Threatened or Endangered Animal Species				
Species and Status	Distribution in Region	Preferred Habitats	Potentially Present in Vicinity?	Potentially Adversely Affected?
Canada lynx (<i>Lynx canadensis</i>) – Threatened	Dispersed use in in upper montane and subalpine zones of Colorado mountains.	Subalpine spruce-fir forests; also lodgepole pine and aspen to as low as upper montane.	No	No

Yellow-billed cuckoo (<i>Coccyzus americanus</i>) –Candidate	Major rivers and tributaries of western, northwestern, and south-central Colorado.	Large cottonwood stands with tall shrub understory along rivers.	No	No
Mexican spotted owl (<i>Strix occidentalis lucida</i>) – Threatened	No historic occurrence in area; present in southwestern Colorado and southern Front Range.	Rocky cliffs in canyons with closed-canopy coniferous forests.	No	No
Razorback sucker (<i>Xyrauchen texanus</i>) – Endangered	Colorado River and major tributary rivers, including mainstem Colorado River upstream to town of Rifle in CRVFO.	General: Deep, slow runs, pools, and eddies. Spawning: silt to gravel substrates in shallow water and seasonally flooded overbank areas.	Yes	Yes
Colorado pikeminnow (<i>Ptychocheilus lucius</i>) – Endangered			Yes	Yes
Humpback chub (<i>Gila cypha</i>) -- Endangered	Mainstem Colorado River and major tributaries – upstream to Black Rocks near Utah state line.	Rocky runs, riffles, and rapids in swift, deep rivers.	Yes	Yes
Bonytail chub (<i>Gila elegans</i>) – Endangered			Yes	Yes
*Lineage GB cutthroat trout (<i>Oncorhynchus clarki</i> ssp.) – Threatened	Identified in 60 streams in Colorado River basin including CRVFO area.	Clean, cool headwaters streams and ponds isolated from other strains of cutthroat trout.	No	No
*Lineage GB = Relict populations of cutthroat trout indigenous to the Colorado/Gunnison/Dolores River drainages. Currently protected under the ESA pursuant to prior listing of the greenback cutthroat trout (<i>O. c. stomias</i>) pending completion of genetic and morphometric studies and taxonomic reassessment of native cutthroat trout in Colorado.				

Environmental Consequences

Proposed Action

Razorback Sucker, Colorado Pikeminnow, Humpback Chub, and Bonytail Chub. These four species of Federally listed big-river fishes occur within the Colorado River drainage basin near or downstream from the project area. Designated Critical Habitat for the razorback sucker and Colorado pikeminnow includes the Colorado River and its 100-year floodplain west (downstream) from the town of Rifle. This portion of the Colorado River lies a few miles northeast of the project area. The nearest known habitat for the humpback chub and bonytail is within the Colorado River approximately 70 miles downstream from the project area. Occasionally, the bonytail is in Colorado west of Grand Junction, but its range does not extend east from that point. Only one population of humpback chub, at Black Rocks west of Grand Junction, is known to exist in Colorado.

The Canada lynx, Greater sage-grouse, Mexican spotted owl, and western yellow-billed cuckoo are not expected to occur in the project vicinity based on documented occurrences and habitat types present. Therefore, the Proposed Action would have “**No Effect**” on these species.

The endangered Colorado River fishes could potentially be affected by the consumptive use of water taken from the Colorado River basin to support activities associated with the Proposed Action. Depletions in flows in the Colorado River and major tributaries are a major source of impacts to these fishes due to changes in the flow regime that reduce the availability and suitability of spawning sites and habitats needed for survival and growth of the larvae. Principal sources of depletion in the Colorado

River basin include withdrawals for agricultural or industrial uses, withdrawals for municipal water supplies, and evaporative losses from reservoirs. On average, approximately 0.77 acre-feet of Colorado River water is consumed during activities related to each oil and gas well. This is equivalent to 0.04 to approximately 0.04 cubic feet per second (cfs) of water throughout the typical 10-day drilling period for an oil and gas well in the CRVFO area.

In 2008, the BLM prepared a Programmatic Biological Assessment (PBA) addressing water-depleting activities associated with BLM's fluid minerals program in the Colorado River Basin in Colorado. In response to this PBA, the USFWS issued a Programmatic Biological Opinion (PBO) (ES/GJ-6-CO-08-F-0006) on December 19, 2008. The PBO concurred with BLM's effects determination of "**May Affect, Likely to Adversely Affect**" for the Colorado pikeminnow, humpback chub, bonytail chub, or razorback sucker as a result of depletions associated with oil and gas projects. To offset the impacts, the BLM has set up a Recovery Agreement, which includes a one-time fee per well. The estimated depletions from the Proposed Action would be added to the CRVFO tracking log and submitted to the USFWS per the PBA/PBO at the end of the year to account for depletions associated with BLM's fluid mineral program. The calculated mitigation fees are used by the USFWS for mitigation projects and contribute to the recovery of these endangered species through restoration of habitat, propagation, and genetics management, instream flow identification and protection, program management, non-native fish management, research and monitoring, and public education.

Other potential impacts to these species include inflow of sediments from areas of surface disturbance and inflow of chemical pollutants related to oil and gas activities. Construction activities would increase the potential for soil erosion and sedimentation. Although a minor temporary increase in sediment transport to the Colorado River may occur, it is unlikely that the increase would be detectable above current background levels. In any case, the Federally listed, proposed, or candidate fish species associated the Colorado River are adapted to naturally high sediment loads and would not be affected.

In contrast to inflow of sediments, the inflow of chemical pollutants could impact the endangered big-river fishes if concentrations are sufficient to cause acute effects. The potential for adverse impacts would be limited to the Colorado pikeminnow and razorback sucker, the two species known to occur within the CRVFO area. Spills or other releases of chemical pollutants as a result of oil and gas activities are infrequent in the CRVFO area due to the various design requirements imposed by BLM and the State of Colorado. In the event of a spill or accidental release into an ephemeral drainage that could flow to the Colorado River, the operator would be required to implement its Spill Prevention, Control, and Countermeasures (SPCC) plan, including such cleanup and mitigation measures as required by BLM or the State. For these reasons, and because any spills into the Colorado River would be rapidly diluted to levels below that are not deleterious, or even detectable, the potential for adverse impacts from chemical releases is not considered significant.

Based on the above, the BLM has determined that inflow of sediments and chemicals into the Colorado River would have "**No Effect**" on the endangered big river fishes. In the unlikely event of a spill with the potential to affect, or documented occurrence of an effect, the USFWS would initiate discussions with the involved parties to identify appropriate remedies.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to special status species would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

BLM Sensitive Animal Species

Affected Environment

Table 12 lists BLM sensitive vertebrate wildlife species that are known to occur in the region and, if present, could potentially be adversely affected by the Proposed Action. Potential impacts to the species listed are discussed following the table.

Table 12. BLM Sensitive Vertebrate Species Present or Potentially Present in the Project Area		
<i>Common Name</i>	<i>Habitat</i>	<i>Potential for Occurrence</i>
Fringed myotis (<i>Myotis thysanodes</i>)	Roosting: Caves, trees, mines, and buildings. Foraging: Pinyon-juniper, montane conifers, and semi-desert shrubs.	Possible
Townsend's big-eared bat (<i>Corynorhinus townsendii</i>)		
Northern goshawk (<i>Accipiter gentilis</i>)	Montane and subalpine coniferous forests and aspen forests; may move to lower elevation pinyon/juniper woodland in search of prey during winter.	Possible in winter
Bald eagle (<i>Haliaeetus leucocephalus</i>)	Nesting/Roosting: Mature cottonwood forests along rivers. Foraging: Fish and waterfowl along rivers and lakes; may feed on carrion, rabbits, and other foods in winter.	Nests and roosts along Colorado River
Peregrine falcon (<i>Falco peregrinus</i>)	Nesting: Cliffs, usually near a river, large lake, or ocean. Foraging: Waterfowl on rivers and lakes; upland fowl in open grassland or steppe.	Nests on Roan Cliffs
Brewer's sparrow (<i>Spizella breweri</i>)	Extensive stands of sagebrush, primarily Wyoming sagebrush on level or undulating terrain.	Present
Midget faded rattlesnake (<i>Crotalus oreganus concolor</i>)	Cold desert of NW Colorado, SW Wyoming, and NE Utah, primarily in sagebrush with rock outcrops and exposed canyon walls.	Possible – habitat marginal
Great Basin spadefoot (<i>Spea intermontana</i>)	Permanent or seasonal ponds and slow-flowing streams in pinyon-juniper woodlands and semi-desert shrublands.	Unlikely – habitat marginal
Northern leopard frog (<i>Lithobates pipiens</i>)	Clean, perennial waters in slow-flowing streams, wet meadows, marshes, and shallows of clean ponds and lakes.	Possible
Bluehead sucker (<i>Catostomus latipinnis</i>)	Primarily smaller streams with a rock substrate and mid to fast-moving waters; also shallows of larger rivers.	Possible
Flannelmouth sucker (<i>Catostomus discobolus</i>)	Runs, riffles, eddies, and backwaters in large rivers.	Present in Colorado River
Roundtail chub (<i>Gila robusta</i>)	Slow-moving waters adjacent to fast waters in large rivers.	
"Lineage CR" cutthroat trout (<i>Oncorhynchus clarki</i> ssp.)	Headwaters streams and ponds with cool, clear waters isolated from populations of non-native cutthroats and rainbow trout.	Present in Parachute Creek
*Lineage CR = Relict populations of cutthroat trout indigenous to the Yampa/Green River drainages but widely transplanted throughout the state. Managed as a BLM sensitive species pursuant to prior designation of the Colorado River cutthroat trout (<i>O. c. pleuriticus</i>) pending completion of genetic and morphometric studies and taxonomic reassessment of native cutthroat trout in Colorado.		

Environmental Consequences

Proposed Action

Fringed Myotis and Townsend's Big-eared Bat. No caves or other suitable roosting sites occur in the project area. Loss of large trees, potentially also used for roosting, would be negligible. Loss of habitat above which the bats could search for aerial prey would also be minimal, and disturbance due to construction activities would not occur at night when the bats are feeding.

Northern Goshawk. This species is mostly limited to spruce/fir or aspen forests, such as atop the Roan Plateau, Battlement Mesa, and other areas that reach subalpine elevations. However, goshawks may migrate to lower elevation pinyon/juniper or Douglas-fir habitats during winter and therefore could make occasional, transitory use of the project area for winter foraging. Goshawks feed primarily on small birds but also on diurnal small mammals (rabbits, chipmunks, etc.).

Bald Eagle. Although bald eagles nest and roost along the Colorado River just southeast of the project area, the potential for use of the actual project area is moderate. Any such use would most likely be by an individual hunting across large expanses of open upland habitats during winter. The project area would represent a small portion of such potential winter hunting habitat, and the reclaimed grass-forb community would provide better habitat for prey than the current shrubland types.

Peregrine Falcon. Peregrine falcons nest along cliff bands south and north of the project and hunt for waterfowl along the Colorado River or other birds across open terrain. Use of the project area is unlikely, except for infrequent, transitory overflights while traveling between the Colorado River and the cliff bands to the south.

Brewer's Sparrow. Although the habitat is marginal in the project area, the possibility exists of nesting by this species. The 60-day TL to prohibit removal of vegetation during the period May 1 to July 1 (see Appendix A) would avoid or minimize the potential for impacts to nesting Brewer's sparrows. Construction activities outside this period could cause individuals to avoid the disturbance while feeding. However, this impact would be limited in duration at any point along the corridor, and individuals are expected to feed across very large home ranges outside the nesting season, thus minimizing the severity of this potential indirect impact.

Midget Faded Rattlesnake. This small viper is considered a small, pale-colored subspecies of the common and widespread western rattlesnake, although some authorities consider it and another western subspecies, the Great Basin rattlesnake (*C. v. nuntius*) to be genetically distinct species. Although movement patterns of midget faded rattlesnakes are not well known, they are believed to be limited to a few hundred meters from den sites. The limited distribution and small home range make this snake susceptible to impacts from human disturbance (USGS 2007). Threats include direct mortality from vehicles traveling on roads and pads, off-highway vehicle use throughout the landscape, capture by collectors, and livestock grazing. As access increases into previously undeveloped areas, the risk of encounters with humans would increase, resulting in some cases of mortality or collection.

Great Basin Spadefoot. This species is typically found slightly west of the project area, but the area does provide suitable habitat within rocky canyons and broad dry basins. Threats include direct mortality from vehicles traveling on roads within the project area. As more vegetation is cleared predation can increase because of the greater ease of detection by predators.

Northern Leopard Frog. The northern leopard frog is limited to perennial waters, including ponds and slow-flowing perennial streams or persistent portions of intermittent streams. It requires good water

quality and abundant aquatic or shoreline vegetation. The habitat in the project area appears marginally suitable for the species, but no leopard frogs have been reported during fish surveys or other surveys of the stream. Because the project would not involve habitat disturbance near water sources, impacts to this species are not expected.

Flannelmouth Sucker and Roundtail Chub. As with the ecologically similar Colorado River endangered fishes described above, the flannelmouth sucker and roundtail chub are adapted to naturally high sediment loads and therefore would not be affected by increased sediment transport to the Colorado River. Furthermore, protective COAs for water quality would minimize this potential (Appendix A). However, these species are vulnerable to alterations in flow regimes in the Colorado River (including evaporative losses from dams and depletions from withdrawal of water for irrigation or municipal water supplies) that affect the presence of sandbars and seasonally flooded overbank areas needed for reproduction. The amount of depletion in flows associated with this project is not expected to have a significant adverse impact on the survival or reproductive success of these species.

Lineage CR Cutthroat Trout. The presence of a genetically pure strain of native cutthroat trout in Parachute Creek has long been recognized by Colorado Parks and Wildlife (CPW). However, more recent genetics studies have indicated that three distinct strains of native trout historically occupied waters of the Colorado River drainage basin in Colorado (Metcalf et al 2012). One of these, currently referred to as Lineage CR cutthroat trout, is the variety to which the Parachute Creek population has been ascribed. While the initial results of the DNA-based genetic study of native cutthroat in Colorado are reevaluated and potentially as a basis for redefining taxonomic status of the various subspecies or strains, the BLM is managing Lineage CR cutthroats as a sensitive species.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to special status species would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Vegetation

Affected Environment

The project area is located in the Parachute Creek drainage at approximately 5,420 to 5,640 feet elevation. The well pad would be located in salt desert shrubland primarily on an alluvial fan but also crossing a steep arid slope. Vegetation in this area is dominated by shrub species, including four-winged saltbush, greasewood, rubber rabbitbrush, shadscale, and Wyoming big sagebrush. Other common species here include broom snakeweed (*Gutierrezia sarothrae*), dwarf clover (*Trifolium nana*), Patterson's milkvetch (*Astragalus pattersonii*), prickly pear cactus (*Opuntia polyacantha*), purple springparsley (*Cymopterus purpureus*), sand verbena (*Abronia eliptica*), scarlet globemallow (*Sphaeralcea coccinea*), sharpleaf twinpod (*Physaria acutifolia*), wild onion (*Allium* sp.), yellow milkvetch (*Astragalus flavus*), Indian ricegrass (*Achnatherum hymenoides*), and slender wheatgrass (*Elymus trachycaulus*).

Juniper woodlands occur around the pad site, and common species here include Utah juniper (*Juniperus osteosperma*), mountain pepperweed (*Lepidium montanum*), rock goldenrod (*Petroradia pumila*), rough Indian paintbrush (*Castilleja scabrifolia*), Spanish bayonet (*Yucca harrimaniae*), and spiny phlox (*Phlox hoodii*). Mountain shrubs are also thinly scattered across north-facing slopes above the pad site, including mountain-mahogany (*Cercocarpus montanus*) and Utah serviceberry (*Amelanchier utahensis*).

West of the county road, much of the area which the pipeline would cross is within active agricultural fields with a history of irrigated alfalfa and grass hay production. These areas are dominated by hay species, such as alfalfa, crested wheatgrass, and smooth brome. Annual invasive species are also common in these areas.

Riparian vegetation along Parachute Creek is dominated by coyote willow (*Salix exigua*) and noxious weeds, but other species here include narrowleaf cottonwood (*Populus angustifolia*), chokecherry (*Prunus virginiana*), skunkbrush sumac (*Rhus trilobata*), and Woods' rose (*Rosa woodsii*).

Environmental Consequences

Proposed Action

Under the Proposed Action, a total of 8.73 acres of salt desert shrubland and agricultural lands would be disturbed. Of this area, 6.56 acres would undergo interim reclamation, and 2.17 acres would remain as long-term disturbance. Temporary reclamation would consist of seeding in accordance with the reclamation COAs presented in Appendix A. Because the project would be located on private land, the composition of plant species used for reclamation would be at the discretion of the landowner.

Adjacent native vegetation would not be directly impacted, but could be indirectly impacted by increased dust deposition on leaves. Dust levels could be expected to increase above ambient levels in the short term from pad expansion, well drilling, new road construction, and new pipeline installation. Increased dust levels can negatively impact plants by clogging stomatal openings in the leaves, impeding gas exchange and reducing the ability of plants to take in carbon dioxide. Dust on the leaf surface can also effectively reduce light availability at the leaf surface. Light and carbon dioxide are both critical for plants to conduct photosynthesis, and reductions in either can reduce the quantity of carbohydrates plants can produce through photosynthesis, and thereby reduce plant growth and seed production. Dust on leaf surfaces can also facilitate plant tissue uptake of toxic pollutants (Thompson et. al. 1984, Farmer 1993, Sharifi et. al. 1997). Dust can also affect snowmelt patterns and resulting hydrology and soil moisture availability, alter soil pH and nutrient availability, and result in plant community composition changes (Angold 1997, Auerbach et. al. 1997, Johnston and Johnston 2004, Field et. al. 2010, Gieselman 2010).

Additional indirect impacts to adjacent vegetation could occur from noxious weeds and other non-native plants associated with project area disturbances. The proposed removal of native vegetation would increase the site vulnerability to invasion and establishment of noxious weeds and other non-native invasive plant species, particularly with the existing widespread establishment of noxious weeds and other non-native species. Neighboring vegetation would also become more vulnerable to invasion by noxious weeds and other non-native species. Ground disturbance combined with vehicle traffic and construction equipment provides both excellent habitat and vectors for invasive species, particularly when these species are already present within the soil seed bank (Gelbard and Belnap, 2003, Larson 2003, Parendes and Jones 2000, Schmidt 1989, Zaenepoel et. al. 2006). These non-native species can negatively impact native plant communities, both directly through competition for resources, and indirectly through alteration of soil microbial communities (Hierro et. al. 2006, Klironomos 2002, Reinhart and Callaway 2006, Vogelsang and Bever 2009). Herbicide treatments of noxious weeds can also result in negative effects or mortality to native plants if they are co-occurring or located nearby (BLM 2007). Implementation of standard COAs for noxious weeds and temporary reclamation (Appendix A) would reduce the risk of noxious weed and invasive species establishment and spread through the combination of chemically treating noxious weeds while also re-establishing desirable vegetation through interim reclamation.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to vegetation would be minimally reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Visual Resources

Affected Environment

The Proposed Action would occur on private land approximately 5 miles north of the town of Parachute. Federal lease terms regarding visual concerns are not applicable on private land. BLM visual resource management (VRM) objectives do not apply to non-BLM lands and visual values for those lands are only protected by landowner discretion. The BLM can only make recommendations to mitigate impacts to scenic values on non-BLM lands.

The project area consists of steep finger-like ridges extending south and west from the top of the Roan Plateau. The ridges terminate at the eastern edge of CR 215 (Parachute Creek Road). The Proposed Action would occur between CR 215 and the toe of the ridges descending from the Roan Plateau. Two ridges would envelope the well pad to the north and south providing visual screening into the pad location until immediately adjacent to the well pad. Two intermittent streams also parallel the well pad location to the north and south. The slopes surrounding the project location have sparse vegetation with exposed gray/salmon-colored soils. Vegetation consists of salt-desert scrub, arid grasslands, and juniper woodlands. The area is characteristic of lands supporting ranching and oil and gas development activities in the CRVFO area.

Environmental Consequences

Proposed Action

Short-term visual impacts due to pad construction and well drilling and completion activities would occur within in the project area. Construction of the well pad would create contrast within the landscape by removing existing vegetation, exposing bare ground, and creating distinct lines and forms in the landscape. There would also be an increase in the presence of drilling rigs, heavy equipment (e.g. dozers, graders, trackhoes), and vehicular traffic with an increase in dust and light pollution. Long-term impacts of the Proposed Action would consist of an increase in the departure from the native characteristics of the visual character within the landscape where new the pad, facilities, and pipeline are constructed. The visibility of new areas of surface disturbance and production equipment would increase the existing visual contrasts associated with human modification already present in the area.

Figure 4 is a view westward toward CR 215 and the Parachute Creek Valley from the southeastern corner of the proposed well pad. The linear ridgeline in the lower left portion of the photograph would become the southern edge of the pad. An 8-foot cut would be made at the location where the photo was taken, and a 0.5-foot fill would be placed at the opposite end of the ridge, adjacent to CR 215. The western end of the ridge would remain intact and would provide visual screening of the pad from the south. The salmon-colored ridge in the midground at the right edge of the photo would provide visual screening from the north. The Proposed Action would be visible to viewers traveling along CR 215 for only a brief period when adjacent to the pad.



Figure 4. View to West to CR 215 and Parachute Creek Valley from Proposed GM 11-28 Pad.

To provide the drilling platform for the 20 wells, the pad would be constructed within the confines of the adjacent topography and drainages resulting in a total surface disturbance of 3.33 acres. The existing access road serving the Encana C28 pad remains adequate, but a spur road would be constructed from this access road to proposed pad. Completions would be conducted remotely on the existing MV 53-28 pad located across CR 215 from the proposed GM 11-28 pad location. Pipeline upgrades to support the project would include gas and production water pipelines that would be bored under CR 215 and Parachute Creek. Ancillary storage tanks serving the GM 11-28 pad would be located on the expanded MV 53-28 pad, reducing the overall amount of production equipment that would be visible on the GM 11-28 pad.

Under the Proposed Action, a total of 8.73 acres of surface disturbance would occur, of which 6.56 would undergo interim reclamation, and 2.17 acres would remain as long-term surface disturbance. Since the pad occurs entirely on private land, the standard Best Management Practices (BMPs) related to reclamation, facility paint colors, and screening the production facilities from view would mitigate the visual impacts of the project.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Consequently, visual impacts under this alternative would be similar to the Proposed Action, although reduced somewhat by the smaller amount of production-related facilities on the GM 11-28 pad.

Wastes, Hazardous or Solid

Affected Environment

The affected environment for hazardous materials includes air, water, soil, and biological resources that may potentially be affected by an accidental release of hazardous materials during transportation to and from the project area, storage, and use in construction and operations. Sensitive areas for hazardous materials releases include areas adjacent to water bodies, above aquifers, and areas where humans or wildlife would be directly impacted.

BLM Instruction Memoranda numbers WO-93-344 and CO-97-023 require that all National Environmental Policy Act documents list and describe any hazardous and/or extremely hazardous

materials that would be produced, used, stored, transported, or disposed of as a result of a proposed project. The Glenwood Springs Resource Area, Oil & Gas Leasing & Development, Draft Supplemental Environmental Impact Statement (June 1998), Appendix L, Hazardous Substance Management Plan, contains a comprehensive list of materials that are commonly used for oil and gas projects. It also includes a description of the common industry practices for use of these materials and disposal of the waste products. These practices are dictated by various Federal and State laws and regulations, and the BLM standard lease terms and stipulations that would accompany any authorization resulting from this analysis. The most pertinent of the Federal laws dealing with hazardous materials are as follows:

- The Oil Pollution Act (Public Law 101-380, August 18, 1990) prohibits discharge of pollutants into Waters of the U.S., which by definition would include any tributary, including any dry wash that eventually connects with the Colorado River.
- The Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) (Public Law 96-510 of 1980) provides for liability, compensation, cleanup, and emergency response for hazardous substances released into the environment. It also provides national, regional, and local contingency plans. Applicable emergency operations plans in place include the National Contingency Plan (40 CFR 300, required by section 105 of CERCLA), the Region VIII Regional Contingency Plan, the Colorado River Sub-Area Contingency Plan (these three are Environmental Protection Agency produced plans), the Mesa County Emergency Operations Plan (developed by the Mesa County Office of Emergency Management), and the BLM Grand Junction Field Office Hazardous Materials Contingency Plan.
- The Resource Conservation and Recovery Act (RCRA) (Public Law 94-580, October 21, 1976) regulates the use of hazardous substances and disposal of hazardous wastes. Note: While oil and gas lessees are exempt from RCRA, right-of-way holders are not. RCRA strictly regulates the management and disposal of hazardous wastes.

Emergency response to hazardous materials or petroleum products on BLM lands are handled through the BLM Grand Junction Field Office contingency plan. BLM would have access to regional resources if justified by the nature of an incident.

Environmental Consequences

Proposed Action

Pollutants potentially spilled or otherwise accidentally released during the construction phase of the project would include diesel fuel, hydraulic fluid, and lubricants associated with the operation of heavy equipment. These materials would be used during construction of the pads, roads, and pipelines and for refueling and maintaining the vehicles and equipment. Potentially harmful substances used in the construction and operation phases would be kept onsite in limited quantities and trucked to and from the site as required. No hazardous substance, as defined by 40 CFR 355 would be used, produced, stored, transported, or disposed of in amounts above threshold quantities. Waste generated by construction activities would not be exempt from hazardous waste regulations under the oil and gas exploration and production exemption of RCRA. Exempt wastes include those associated with well production and transmission of natural gas through the gathering lines and the natural gas itself.

With the exception of produced hydrocarbons, ethylene glycol (antifreeze), lubricants, and amine compounds, chemicals subject to reporting under Title III of the Superfund Amendments and Reauthorization Act in quantities of 10,000 pounds or more would not be used, produced, stored, transported, or disposed of during construction or operation of the facilities. None of the chemicals used

in construction meets the criteria for an acutely hazardous material/substance or the quantities criteria per BLM Instruction Memorandum No. 93-344. In addition, no extremely hazardous substance, as defined in 40 CFR 355, would be produced, used, stored, transported, or disposed of during construction or operation of the facilities in amounts above threshold permissible quantities.

Solid waste (human waste, garbage, etc.) would be generated during construction activities and, to a larger extent, during drilling and completion operations since the workforce would increase during those activities. Trailers housing workers would be outfitted with self-contained sewage collection system; regular trash collection would occur throughout the drilling and well completion process.

Because of the use or production of solid and hazardous wastes, the potential exists for accidental contamination of surface water or groundwater. While uncommon, an accident could occur that would result in a release of one or more of these materials directly or indirectly into surface waters or in a way that poses a potential for transport to groundwater. For example, improper casing and cementing of the boreholes could result in the contamination of groundwater resources. Releases are also possible from tanks used for storage on the pads, from haul trucks used to transport materials to and from the pads, or from pipelines. Storage tanks on the pad are required to be placed within an area of secondary containment equal to 110% of the volume of the enclosed tanks.

In the event of any release of a hazardous substance to the environment in reportable quantities, the responsible party is required to implement a Spill Prevention, Control, and Countermeasures (SPCC) Plan and is liable for cleanup and monetary damages. Depending on the scope of the accident, any of the above referenced contingency plans would be activated to provide emergency response. At a minimum, the BLM Grand Junction Field Office contingency plan would apply. These laws, regulations, standard lease stipulations, and contingency plans and emergency response resources are expected to adequately mitigate any potential hazardous or solid waste issues associated with the Proposed Action.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to wastes, hazardous or solid, would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Water Quality – Surface and Ground

Surface Water

Affected Environment

The Proposed Action lies 5 miles northwest of Parachute, Colorado, directly adjacent to CR 215, a primary oil and gas field access road. Table 13 presents water quality data for a U.S. Geological Survey (USGS) sampling site on Parachute Creek relatively near the project location.

The State of Colorado's *Stream Classifications and Water Quality Standards* (CDPHE, Water Quality Control Commission [WQCC] Regulation No. 37) (CDPHE 2007) the mainstem Parachute Creek, including all tributaries and wetlands, from confluence of the west and east forks to the confluence with the Colorado River are within segment 11h. The following is a brief description of segments 11h.

- Segment 11h – This segment has been classified aquatic life cold 2, recreation P, and agriculture. Aquatic life cold 2 indicates that this water course is not capable of sustaining a wide variety of

cold or warm water biota due to habitat, flows, or uncorrectable water quality conditions. Recreation class P refers to waters that have the potential to be used for primary contact recreation. This segment is suitable or intended to become suitable for agricultural purposes that include irrigation and livestock use.

All streams within segment 11h are not on the State of Colorado’s 303(d) List of Impaired Waters and Monitoring and Evaluation List (CDPHE, WQCC Regulation No. 93) (CDPHE 2010). The Colorado River which Parachute Creek flows to is currently considered impaired due to naturally high levels of selenium. Colorado’s Monitoring and Evaluation List identifies water bodies where there is reason to suspect water quality problems, but uncertainty also exists regarding one or more factors. Parachute Creek is not on the State of Colorado’s Monitoring and Evaluation List (CDPHE 2010).

Table 13. Selected Water Quality Data for a Location near the Project Area		
<i>Parameter</i>	<i>Parachute Creek near Parachute, CO USGS Site #09093000</i>	
	<i>7/29/1981</i>	<i>5/09/1980</i>
Instantaneous discharge (cfs)	4.4	420
Temperature, water (°C)	12.5	NA
Field pH (standard units)	9.2	8.3
Specific conductance (µS/cm/cm at 25°C)	913	460
Total Dissolved Solids (mg/L)	576	400
Hardness as CaCO ₃ (mg/L)	340	200
Chloride (mg/L)	22	4.6
Selenium (µg/L)	2	1
Dissolved oxygen (mg/L)	7.8	10
Note: NA = data not available Source: USGS 2007		

Sediment is a pollutant of concern for the Colorado River Basin (CDPHE, WQCC Regulation No. 94). The closest downstream sediment measuring station on the Colorado River is USGS station 9093700 near De Beque, Colorado. For the period of 1974 to 1976 the mean sediment yield was 1,818 tons per day and varied between 8 and 41,300 tons per day. The median value for the same period was 267 tons per day (USGS 2007).

Environmental Consequences

Proposed Action

The Proposed Action would involve the construction of the GM 11-28 pad (with a disturbance footprint of 3.33 acres) to drill, complete, and operate 16 new Federal wells in two drilling visits. Well completion operations would occur on the GM 11-28 pad for the initial Niobrara well drilling in fall 2013. The nearby MV 53-28 pad would be expanded (with a disturbance area of 1.55 acres) and serve as the remote frac location for the remaining 15 wells to be drilled in the second visit in summer 2014. Water for the well drilling would be trucked to the pad. The well fracing operations would be supplied water via surface delivery lines. The Proposed Action includes boring a pipeline under CR 215 and Parachute Creek. Including the water and gas pipeline upgrades planned for this project, the total short term

disturbance on private land would be 8.73 acres and the long term disturbance after reclamation would be 2.17 acres (Table 1).

Direct impacts to the unnamed ephemeral drainages of Parachute Creek and the Colorado River would occur but be minimized by many design features of the pad expansions, access road improvements, cuttings storage placements, and buried or surface pipeline installations. All road sections would be maintained and graveled, as needed. The pad expansions would be designed and positioned in the optimal location to take advantage of the topography and avoid disturbances to the drainages and steep slopes. In addition, direct impacts to Parachute Creek would be minimized by boring the pipelines under the creek.

Potential impacts to surface water associated with the Proposed Action occur from surface-disturbing activities, traffic, waste management, and the use, storage and transportation of fluids (i.e., chemicals, condensate, and produced water). Surface-disturbing activities associated with well and facility pads, roads, and pipelines cause loss of vegetation cover, soil compaction and displacement, increased volume and velocity of runoff, and increased sedimentation and salinity in surface waters. Impacts can be minimized by implementing stormwater management BMPs, stockpiling topsoil, controlling erosion, and rehabilitating disturbed surfaces quickly. Long-term soil protection could be achieved by continued road and pad maintenance to reduce erosion, remediation of contaminated soils, and minimizing the size of the long-term pad footprints through interim reclamation measures. As proposed, these measures would include limiting cut slope steepness, step-cutting, crowning road surfaces, installing culverts and drainage systems, and applying gravel to all upgraded BLM roads in the project area to a compacted thickness of 6 inches (Appendix A).

Oil and gas waste management practices have the potential to contaminate soils and surface water. Contamination of soils could cause long-term reduction in site productivity resulting in increased erosion and potential sediment and contaminant delivery to nearby waterways during runoff. Use, storage, and transportation of fluids such as produced water, hydraulic fracturing fluids, and condensate have the possibility of spills that could migrate to surface or groundwater. Elements of the Proposed Action are designed to mitigate risks to surface waters associated with the release and migration of drilling fluids, produced water, and condensate. A closed-loop drilling system would be implemented which recycles drilling fluids; cuttings would be dried through the use of a shaker system, decontaminated to COGCC standards and be stacked against the cutslope on the pad. A traditional reserve pit would not be constructed. Completions may be conducted either onsite or remotely and fluids may be stored in surface containment or a pit.

In addition to individual containment measures, the entire pad would be bermed to contain an accidental release on the pad. In the event of an accidental release, produced water and condensate would be confined for cleanup in a containment area and would not migrate to surrounding soils or surface waters. Pipelines associated with the transport of these liquids would be pressure tested to detect leakage prior to use. Implementation of the standard COAs for mitigating impacts to surface waters (Appendix A) would minimize risks of adverse impacts associated with construction and ongoing production activities.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to water quality would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Waters of the U.S.

Affected Environment

Waters of the U.S. located in the project vicinity include Parachute Creek and an unnamed ephemeral tributary to the Colorado River. Section 404 of the Clean Water Act requires a Department of the Army permit from the U.S. Army Corps of Engineers (USACE) prior to discharging dredged or fill material into waters of the U.S. as defined by 33 CFR Part 328.

The pipeline would be bored under Parachute Creek.

Environmental Consequences

Proposed Action

Impacts to waters of the U.S., the rerouting of the drainages and any upgrades to the road and pipeline crossings of drainages within the project would be authorized by the USACE. A COA listed in Appendix A required that the operator obtain a formal jurisdictional determination by USACE prior to any construction that could affect waters of the U.S. and verification that the impacts do not require a permit.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to waters of the U.S would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Groundwater

Affected Environment

The Lower Piceance Basin contains both alluvial and bedrock aquifers (Colorado Geological Survey 2003). Unconsolidated alluvial aquifers are the most productive aquifers in the region (USEPA 2004) and are defined as narrow, thin deposits of sand and gravel formed primarily along stream courses, in this case, along the Colorado River and its tributaries. Alluvial well depths are generally less than 200 feet and water levels typically range between 100 to 150 feet. Well yield is dependent upon the intended use of the well, well construction design, sediment type and saturated thickness. Domestic use wells are limited to 15 gallons per minute (gpm) administratively, while municipal wells are designed and constructed for maximum potential yield.

The principal bedrock aquifers of the Piceance Basin are the Uinta Formation and the Parachute Creek Member of the Green River Formation, and are defined as the upper and lower Piceance Basin aquifer systems. The Uinta Formation consists of discontinuous layers of sandstone, siltstone, and marlstone and is less permeable than the hydrologically connected upper Parachute Creek Member (Robson and Saulnier 1981). The uppermost Uinta Formation also contains a shallow, perched aquifer that is separate from the upper aquifer unit (Cole et al. 1995). The upper Piceance Basin aquifer is underlain by the Mahogany confining unit, and correlates with the Mahogany Zone, the principal oil shale unit of the Piceance Basin. The Mahogany Zone separates the upper aquifer from the lower. The lower aquifer consists of the fractured marlstone of the lower part of the Parachute Creek Member. The thickness of the upper and lower aquifer units average 700 and 900 feet, respectively (CGS 2003). Both upper and lower

aquifer systems are found within the surrounding cliffs of the project area, but no water wells are completed within either the upper or lower bedrock aquifers units as described above. Beneath these two aquifer systems is a confining unit consisting of the Wasatch Formation and the lower two members of the overlying Green River Formation. Some fresh-water wells are completed in localized water-bearing intervals within this unit. Below the Wasatch Formation is the Cretaceous-aged Mesaverde aquifer. The depth to the top of this aquifer beneath the project area is more than 5,000 feet below ground surface (bgs), far too deep for economic development. The Mesaverde aquifer is of regional importance, but does not provide recharge into the fresh water system within the shallower groundwater system of the area.

Water quality of the upper Piceance Basin aquifer unit is relatively good, ranging in Total Dissolved Solid (TDS) levels from 500 to 1,000 milligrams per liter (mg/L). In the lower unit, TDS concentrations increase from 1,000 to 10,000 mg/L along basin flow paths. Waters with TDS values in excess of 1,000 mg/L are generally unsuitable for potable supply. Water suitable for drinking has a Federal secondary standard set at 500 mg/L or less (USEPA 2006). The quality of the water in the Mesaverde aquifer is highly variable, with concentrations of dissolved solids ranging from less than 1,000 mg/L in many of the basin-margin areas to more than 10,000 mg/L in the central part of the Piceance Basin (USEPA 2004). In general, areas of the aquifer that are recharged by infiltration from precipitation or surface water sources contain relatively fresh water. However, water quality in the Piceance Basin is generally poor overall due to the presence of nahcolite deposits and salt beds throughout the basin. Only very shallow waters such as those from the surficial Wasatch Formation are used for drinking water (USEPA 2004).

According to the CDWR database, there is a cluster of monitoring wells located within a 0.5-mile radius of the proposed well site. The wells located approximately 2,500 feet south of the proposed well site, have an average depth of 60 feet.

Environmental Consequences

Proposed Action

Potential impacts to groundwater resources from the proposed development would include contamination of the groundwater with produced water, drilling mud, and petroleum constituents. Hydraulic fracturing would be incorporated to create additional pathways to facilitate gas production. Agents called “proppants” used to prop open the fractures are mixed with both fresh water and produced water. These typically include sand, aluminum, glass, or plastic beads, with less than 1% of other compounds such as corrosion-, friction-, and scale-inhibitors (EnerMax Inc. 2007). Fracing techniques are used to create secondary porosity fractures, held open by proppants, allowing the otherwise trapped gas to migrate up the borehole for production.

Hydraulic fracturing would be conducted at 5,000 feet or more bgs. Drilling scenarios are developed to prevent fluids and produced hydrocarbons from migrating upward into fresh water zones. Also see the discussion of hydraulic fracturing on groundwater resources in the section of this EA on Geology and Minerals. Geologic and engineering reviews are conducted to ensure that the cementing and casing programs are adequate to protect all downhole resources. With proper construction practices, drilling practices, and BMPs, no significant adverse impact to groundwater aquifers is anticipated to result from the project (see Downhole COAs in Appendix A).

Potential Impacts of Hydraulic Fracturing During Oil and Gas Well Completions

For decades, oil and gas companies and independent geophysicists have used state of the art equipment to monitor microseismic activity—defined as a “faint” or “very slight” tremor—during hydraulic fracturing to optimize well completions and to gather information about fracture dimensions and propagation

(Warpinski 2009). These data give an indication about the magnitude of seismic activity associated with hydraulic fracturing, dimensions of resultant fractures in geologic formations, and probability for induced fractures to extend into nearby aquifers, if present. Research indicates that microseismic activity created by hydraulic fracturing occurs at Richter magnitude 1 or less (Warpinski and Zimmer 2012). In comparison, a magnitude 3 earthquake is the threshold that can be felt at the ground surface. The Richter magnitude scale is base-10 logarithmic, meaning that a magnitude 1 tremor is 1/100th the amplitude of a magnitude 3 tremor. The National Academy of Sciences reviewed more than 100,000 oil and gas wells and waste water disposal wells around the world and concluded that “incidences of felt induced seismicity appear to be very rare,” with only one such documented occurrence (NAS 2012).

The dimensions of induced fractures have been measured with field monitoring equipment (including microseismic “listeners”) and in laboratory tests and have been compared to three-dimensional (3D) hydraulic fracture models. Researchers have successfully validated these models for fracturing in “tight gas” reservoirs including those in the Piceance Basin. Results of the analyses show that fractures resulting from completions of oil and gas wells can be predicted (Zhai and Sharma 2005, Green et al. 2009, Palisch et al. 2012) and that the length of fractures in relation to depth of the well can be estimated.

Hydraulically induced fracture orientation in relation to the wellbore depends upon the downhole environment (i.e., rock mechanics, minimum and maximum principle stress directions, rock physical properties, etc.) and the wellbore trajectory. In vertical or normal directional wells such as in the Mesaverde formation—the predominant hydrocarbon-producing formation in the CRVFO area—fracture growth is primarily lateral or outward from the wellbore, with minimal secondary fractures extending at some angle away from the lateral fractures. In horizontal wells such as being used to develop deep marine shales, fracture growth from the wellbore is mainly determined by the orientation of the wellbore in relation to the principal stresses of the rock. Fracture growth toward the surface is limited by barriers such as variations in stress and lithology, as is also the case in vertical and normal directional wells. In some horizontal wells, fracture growth is similar to that in vertical or normal directional wells due to wellbore trajectory along the maximum principal stress direction. Analysis of data from thousands of wells indicates fracture extent (length) of less than 350 feet in the vast majority of cases, with outliers of 1,000 to 2,000 feet (Maxwell 2011, Davies et al. 2012). The extreme outlier lengths are associated with fractures in thick deposits of lithologically uniform marine shales.

The potential height of hydraulically induced fractures in horizontal drilling is reduced in layered sediments in which a propagating fracture encounters a change in rock type or a bedding plane within a formation or a contact between formations. When these features are encountered, the fracture either terminates or to a lesser extent reorients along the generally horizontal bedding plane or formation contact instead of continuing upward across it. In the CRVFO area, natural gas production is primarily from vertically stacked, lenticular tight sands of the Mesaverde formation using vertical and directional wells. These tight-sand lenses are a few tens of feet thick or less. More recently, advances in horizontal drilling technology have allowed enhanced development of deeper marine shales such as the Niobrara formation. These tight-shale deposits are a few hundreds to thousands of feet thick in the CRVFO area compared to many hundreds or thousands of feet in some other gas-producing regions. The thickness of hydrocarbon-bearing strata in this area limits the vertical growth of primary and secondary fractures resulting from hydraulic stimulation.

Based on a review of available information on microseismic monitoring and fracture dimensions, Fisher and Warpinski (2011) concluded that fractures from deep horizontal wells are not a threat to propagate across the long distances (thousands of feet) needed to reach fresh-water aquifers much closer to the surface. This conclusion applies to the CRVFO area, and is also applicable to much shallower potable groundwater sources consisting of unconsolidated alluvium (streambed deposits) associated with the

Colorado River and major tributaries. In general, alluvial water wells in the CRVFO extend to depths of less than 200 feet, with few in the range of 400 feet. Typical water levels in these wells range from 50 to 100 feet deep. Impacts to water quality of these shallow fresh-water wells is highly improbable as a result of hydraulic fracturing, which occurs at depths of 5,000 to 11,000 feet below ground surface.

In addition to vertical separation of several thousand feet between the upper extent of fractures and fresh-water aquifers are requirements by the BLM and COGCC for proper casing and cementing of wellbores to isolate the aquifers penetrated by a wellbore. BLM requires that surface casing be set from 800 to 1,500 feet deep, based on a geological review of the formations, aquifers, and groundwater. Cement is then pumped into the space between the casing and surrounding rock to prevent fluids from moving up the wellbore and casing annulus and coming in contact with shallow rock layers, including fresh-water aquifers. BLM petroleum engineers review well and cement design and final drilling and cementing logs to ensure that the cement has been properly placed. When penetration of groundwater and freshwater aquifers is anticipated, BLM inspectors may witness the cementing of surface casing and subsequent pressure testing to ensure that the annular space between the casing and borehole wall is properly sealed.

No single list of chemicals currently used in hydraulic fracturing exists for western Colorado, and the exact combinations and ratios used by operators are considered proprietary. However, the general types of compounds and relative amounts used are well known and relatively consistent (Table 14). Since fracture jobs are tailored to the downhole environment and companies are aware of the concerns involving hydraulic fracturing, the chemicals listed in Table 14 may or may not be used, and the information is provided solely as general information.

Table 14. Constituents of Typical Hydraulic Fracturing Operations in Tight Gas Formations

<i>Additive Type*</i>	<i>Typical Example*</i>	<i>Percent by Volume**</i>	<i>Function*</i>	<i>Common Use of Example Compound</i>
Acid	Hydrochloric acid	0.123	Dissolves mineral cement in rocks and initiates cracks	Swimming pool chemical and cleaner
Biocide	Glutaraldehyde	0.001	Eliminates bacteria in the water that produce corrosive or poisonous by-products	Disinfectant; sterilizer for medical and dental equipment
Breaker	Ammonium persulfate	0.010	Allows delayed breakdown of the gel	Used in hair coloring, as a disinfectant, and in manufacture of household plastics
Clay stabilizer	Potassium chloride	0.060	Creates a brine carrier fluid that prohibits fluid interaction with formation clays	Used in low-sodium table salt substitutes, medicines, and IV fluids
Corrosion inhibitor	Formic acid	0.002	Prevents corrosion of the well casing	Used as preservative in livestock feed; used as lime remover in toilet bowl cleaners
Crosslinker	Borate salts	0.007	Maintains fluid viscosity as temperature increases	Used in laundry detergents, hand soaps, and cosmetics
Friction reducer	Polyacrylamide	0.088	“Slicks” the water to minimize friction	Used as a flocculant in water treatment and manufacture of paper
Gelling agent	Guar gum	0.056	Thickens the water to help suspend the sand propping agent	Used as a thickener, binder, or stabilizer in foods
Iron control	Citric acid	0.004	Prevents precipitation of metal oxides	Used as flavoring agent or preservative in foods
Surfactant	Lauryl sulfate	0.085	Increases the viscosity of the fluid	Used in soaps, shampoos, detergents, and foaming agents

pH adjusting agent	Sodium hydroxide, acetic acid	0.011	Adjusts pH of fluid to maintain the effectiveness of other components	Sodium hydroxide used in soaps, drain cleaners; acetic acid used as chemical reagent, main ingredient of vinegar
Scale inhibitor	Sodium polycarboxylate	0.043	Prevents scale deposits in the pipe	Used in dishwashing liquids and other cleaners
Winterizing agent	Ethanol, isopropyl alcohol, methanol	--	Added as necessary as stabilizer, drier, and anti-freezing agent	Various cosmetic, medicinal, and industrial uses
Total Additives		0.49		
Total Water and Sand		99.51		
*FracFocus Chemical Disclosure Registry, fracfocus.org/chemical-use/what-chemicals-are-used				
**USDOE 2009				

Although a variety of chemicals additives are used in hydraulic fracturing—the examples in Table 14 being drawn from a total of 59 listed on the FracFocus website—the vast bulk of fluid injected into the formation during the process is water mixed with sand, representing 99.51% of the total by volume in the typical mixture shown in Table 14. The sand listed in the table is used as a proppant to help keep the newly formed fractures from closing.

Following completion of fracturing activities, the pressure differential between the formation—a result of several thousand feet of overlying bedrock—and the borehole that connects with the surface causes most of the injected fluids to flow toward the borehole and then upward to the surface along with the hydrocarbon fluids released from the formation. The composition of this mixture, called flowback water, gradually shifts over a period of several days to a few months as injected fluids that have not yet migrated back to the wellbore or reacted with the native rock are carried out of the formation.

In 2011, the COGCC published an analysis of hydraulic fracturing technology use in the state and potential risks to human health and the environment. The introduction to that report included the following paragraph:

“Hydraulic fracturing has occurred in Colorado since 1947. Nearly all active wells in Colorado have been hydraulically fractured. The COGCC serves as first responder to incidents and complaints concerning oil and gas wells, including those related to hydraulic fracturing. To date, the COGCC has not verified any instances of groundwater contaminated by hydraulic fracturing.”

Based on the information summarized above, the CRVFO has concluded that properly implemented hydraulic fracturing of oil and gas wells drilled within its boundaries for the purpose of accessing Federal fluid minerals or for accessing private fluid minerals from BLM surface lands does not represent a significant adverse impact to human health and the environment.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Groundwater impacts would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

Wildlife

AQUATIC ORGANISMS

Affected Environment

Parachute Creek, a perennial stream and tributary of the Colorado River, is located approximately 0.5 miles from the proposed pad. Fish surveys in the upper reaches of Parachute Creek conducted by CPW and BLM have documented a small population of “Lineage CR” Colorado River cutthroat trout, a native trout listed as sensitive by the BLM and discussed in the section on Special Status Species. The brown trout (*Salmo trutta*), a non-native sportfish widely stocked throughout the region, also occupies the creek. This trout of eastern North America has been widely introduced in mountainous areas of Colorado because of its tolerance for slightly warmer waters than the cutthroat trout and its ability to reproduce successfully in streams with small flows.

Aquatic macroinvertebrates living in perennial streams such as Parachute Creek during a portion of their lifecycles include larvae of stoneflies, mayflies, and some caddisflies in fast-flowing reaches with rocky or detrital substrates. Both the aquatic larvae and winged adults of these insects are the primary prey for trout in Parachute Creek. Terrestrial invertebrates that land or fall onto the water surface or are carried into the stream in runoff from adjacent uplands provide a secondary prey base. Slow-flowing portions of Parachute Creek with fine substrates, aquatic macroinvertebrates are likely to support the larvae of midges, mosquitoes, and some caddisflies. These species are able to tolerate relatively warm, turbid, and poorly oxygenated waters, and their more abbreviated larval stages allow them to reproduce in intermittent streams and in seasonally inundated overbank areas. Amphibians, if present, would probably be limited to spadefoots and true toads, which are adapted to seasonal flow regimes in arid environments.

Environmental Consequences

Proposed Action

Implementation of the Proposed Action has the potential to result in increases in erosion and sedimentation into nearby drainages and eventually the Colorado River. Because the Proposed Action includes summer use of the project areas, it is likely that roads and pads would not be muddy for extended periods of time. Roads are generally drier and in better condition during the non-winter months and consequently are less prone to erosion. Vehicular use during muddy road conditions could contribute to increased erosion of sediments into nearby ephemeral washes and eventually the Colorado River. The potential increase of sedimentation into the Colorado River would probably be nominal given background sediment loads currently carried by the river. Sediment-intolerant aquatic wildlife could be negatively affected, as increased erosion potential would persist and impair water and habitat quality. Measures to minimize erosion and sedimentation of aquatic environments are included in the COAs (Appendix A).

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to aquatic wildlife would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

MIGRATORY BIRDS

Affected Environment

The project area consists of Wyoming sagebrush and rubber rabbitbrush shrublands on the valley floor, rimmed with Utah juniper and scattered pinyon pine along nearby slopes and ridgelines. Associated species on the adjacent slopes include mountain-mahogany (*Cercocarpus montanus*), Utah serviceberry (*Amelanchier utahensis*), black sagebrush (*Artemisia nova*), and a variety of native grasses and forbs. A weedy non-native annual grass, cheatgrass, is scattered and widespread throughout the project area.

Species on the U.S. Fish and Wildlife Service (2008) list of Birds of Conservation Concern (BCC) for the project region include two species associated with pinyon-juniper woodlands, the pinyon jay (*Gymnorhinus cyanocephalus*) and juniper titmouse (*Baeolophus griseus*). Another BCC species, Cassin's finch (*Haemorhous cassinii*), nests in higher elevation montane and subalpine conifer forests but commonly moves into pinyon-juniper woodlands following nesting and throughout winter. None of these species was observed during the most recent survey (WWE 2012). Non-BCC species associated with this habitat type include the broad-tailed hummingbird (*Selasphorus platycercus*), black-chinned hummingbird (*Archilochus alexandri*), western kingbird (*Tyrannus verticalis*), Say's phoebe (*Sayornis saya*), gray flycatcher (*Empidonax oberholseri*), Townsend's solitaire (*Myadestes townsendii*), American robin (*Turdus migratorius*), mountain bluebird (*Sialia sialis*), plumbeous vireo (*Vireo plumbeus*), blue-gray gnatcatcher (*Poliophtila caerulea*), black-throated gray warbler (*Dendroica nigrescens*), chipping sparrow (*Spizella passerina*), lark sparrow (*Chondestes grammacus*), and lesser goldfinch (*Spinus psaltria*).

Areas of mountain shrubs such as mountain-mahogany and serviceberry, although limited, have the potential to attract additional non-BCC species such as the black-headed grosbeak (*Pheucticus melanocephalus*) and spotted towhee (*Pipilo maculata*).

Sagebrush habitats may support one BCC species associated almost entirely with sagebrush steppe, the Brewer's sparrow (*Spizella breweri*), as well as other migrants such as the western meadowlark (*Sturnella neglecta*), vesper sparrow (*Pooecetes gramineus*), and lark sparrow. Based on the extent and quality of the sagebrush, the habitat is marginal for Brewer's sparrow and outside the normal range of the sage sparrow (*Amphispiza belli*), another obligate on sagebrush occurring in the Wyoming Basin of northwestern Colorado.

See the following subsection for a discussion of raptors, resident passerines, and upland fowl.

Environmental Consequences

Proposed Action

The Proposed Action would result in a loss of nesting, roosting, perching, and foraging habitat for migratory birds on disturbed areas and reduce habitat effectiveness adjacent to areas where disturbance-related effects could be expected. The expansion of the well pad and access road as well as construction of the frac pad would remove approximately 7.6 acres of pinyon-juniper woodlands and sagebrush vegetation that would result in reduced habitat patch size. These changes to the habitat could negatively affect bird species that require large expanses of intact habitat. Habitat fragmentation could result in increased competition, increased exposure to predators, and a higher likelihood of nest parasitism. It is also possible that individual nests could be destroyed if well pads, roads, and production facilities are constructed during the nesting season.

In addition to the physical loss of habitat and habitat fragmentation, it is possible that during construction activities, individual birds could be displaced to adjacent habitats due to noise and human presence. Effects of displacement could include increased risk of predation or failure to reproduce if adjacent habitat is at carrying capacity. Furthermore, impacts to birds at the species or local population level could include a change in abundance and composition as a result of cumulative habitat fragmentation from energy development in the larger area. Impacts to migratory bird species that nest in pinyon-juniper and sagebrush habitats can be minimized by avoiding surface-disturbing activities during the nesting season. take place outside the nesting season.

All migratory bird species are protected by the Migratory Bird Treaty Act (MBTA), which makes it unlawful to pursue, hunt, kill, capture, possess, buy, sell, purchase, or barter any migratory bird, including the feathers or other parts, nests, eggs, or migratory bird products. In addition to the MBTA, Executive Order 13186 sets forth the responsibilities of Federal agencies to further implement the provisions of the MBTA by integrating bird conservation principles and practices into agency activities and by ensuring that Federal actions evaluate the effects of actions and agency plans on migratory birds. Consistent with Executive Order 13186 and BLM Colorado guidelines, CRVFO has established as a COA (Appendix A) a Timing Limitation (TL) prohibiting initiation of vegetation removal or ground-disturbing activities during the period **May 1 to July 1**, the peak period for incubation and brood rearing among migratory birds in the project vicinity. The BLM may grant an exception to this COA if surveys by a qualified biologist during the nesting season of BCC species potentially present indicates no active nests within 30 meters (100 feet) of the disturbance area.

Also for the protection of migratory birds is a COA specifying that any pits containing fluids must be fitted with one or more devices to avoid or minimize exposure to the fluids by migratory birds (Appendix A). Such exposures could result in acute toxicity or compromised insulation or buoyancy due to dissolution of protective oil on the feathers.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to migratory birds would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

OTHER TERRESTRIAL SPECIES

Affected Environment

The project area would be located in medium density pinyon-juniper woodlands with openings of sagebrush, saltbush, and greasewood. Understory vegetation consists of mostly native grasses and forbs with some cheatgrass. Given these vegetation types, the area provides cover, forage, breeding, and nesting habitat for a variety of big game and small game species as well as nongame mammals, birds, and reptiles.

MAMMALS

The project area is within overall ranges of mule deer (*Odocoileus hemionus*) and Rocky Mountain elk (*Cervus elaphus nelsoni*). Because of its low elevation the project area is primarily winter range which means deer and elk populations increase during the winter months when animals migrate to lower elevations from the Battlements to the south. Winter densities of big game animals in a given area are

dependent on the type of habitat present and the severity of the winter. Deeper snows and colder temperatures result in increase in the number of big game animals using the area.

The project area contains winter range and severe winter range for mule deer (*Odocoileus hemionus*) and a smaller amount of winter range for Rocky Mountain elk (*Cervus elaphus nelsoni*) as mapped by the Colorado Parks and Wildlife (CPW) (CPW 2011). The mule deer is a recreationally important species that are common throughout suitable habitats in the region. Although most of the area is mapped as mule deer winter range, the project area also receives use by deer during the summer. Rocky Mountain elk are also recreationally important, but the project area contains relatively little suitable habitat for this species. Most winter use by elk north of I-70 in the project vicinity is along Parachute Creek and tributary canyons or along Piceance Creek, which the elk access by moving northward from summer range on the Roan Plateau.

Large carnivores potentially present in the project vicinity include the mountain lion (*Felis concolor*), which moves seasonally with its preferred prey, the mule deer, and the black bear (*Ursus americanus*). Black bears are uncommon in the lowlands north of I-70 due to the scarcity of sufficient forest cover and suitable foods (including acorns and berries). Two smaller carnivores, the coyote (*Canis latrans*) and bobcat (*Lynx rufus*), are also present throughout the region in open habitats and broken or wooded terrain, respectively, where they hunt for small mammals, reptiles, and ground-dwelling birds. Other small carnivores potentially present are the raccoon (*Procyon lotor*) and striped skunk (*Mephitis mephitis*) primarily along Parachute Creek and their close relatives the ringtail (*Bassariscus astutus*) and spotted skunk (*Spilogale gracilis*) the drier and more rugged, higher terrain on the valley sideslopes and along tributary drainages.

Small mammals present within the planning area include rodents such as the rock squirrel (*Otospermophilus variegatus*), golden-mantled ground squirrel (*Callospermophilus lateralis*), least chipmunk (*Tamias minimus*), and packrat (bushy-tailed woodrat) (*Neotoma cinerea*) and lagomorphs such as the desert cottontail (*Sylvilagus audubonii*) and black-tailed jackrabbit (*Lepus californicus*). Rodents and, to a lesser extent, lagomorphs are the primary prey base for a variety of avian and mammalian predators.

BIRDS

Raptors potentially nesting in the area include the red-tailed hawk (*Buteo jamaicensis*), Swainson's hawk (*B. swainsoni*), Cooper's hawk (*Accipiter cooperii*), sharp-shinned hawk (*A. striatus*), American kestrel (*Falco sparverius*), great horned owl (*Bubo virginiana*), and long-eared owl (*Asio otus*), the latter uncommonly. Two small owls potentially nesting in the area include a BCC species, the flammulated owl (*Otus flammeolus*), and a non-BCC species, the northern saw-whet owl (*Aegolius acadicus*). The latter was heard calling during biosurveys. Other raptors nesting in the vicinity and potentially visiting the project area during foraging include two BCC species, the golden eagle (*Aquila chrysaetos*) and prairie falcon (*Falco mexicanus*), both potential transients from suitable nesting sites on cliffs and rocky bluffs throughout the area. The carrion-feeding turkey vulture (*Cathartes aura*) is also likely to search the area for food. Two BCC species that nest in the general project region but are not expected to forage within or near the site are the bald eagle and prairie falcon (see the section on Special Status Species).

A raptor survey completed in June 2013 identified an occupied red-tailed hawk nest structure within 0.25 mile of the pad and access road. One additional nest that had been documented in previous surveys by WestWater was determined to have been destroyed. The juniper woodlands surrounding the proposed well pad are not of suitable tree height or canopy structure for raptor nesting. Cliffs and rocky outcroppings provide suitable nesting habitat, though no nests were detected. The riparian area along

Parachute Creek provides valuable tree nesting habitat and the occupied nest is located in a cottonwood tree along the creek (WestWater 2013).

Passerine (perching) birds commonly found in the area include year-round residents such as the common raven (*Corvus corax*), American crow (*C. brachyrhynchos*), black-billed magpie (*Pica hudsonia*), western scrub-jay (*Aphelocoma californica*), mountain chickadee (*Poecile gambeli*), and house finch (*Haemorhous mexicanus*) in addition to the migratory species and raptors described above under Migratory Birds and previously under Special-Status Species.

A non-native gallinaceous species widely introduced as a gamebird, the chukar (*Alectoris chukar*), is present in relatively low numbers on nearby slopes supporting grasses and low shrubs.

REPTILES AND AMPHIBIANS

The project area is within elevational range of most reptile species known to occur in Garfield County. Species most likely to occur include the short-horned lizard, (*Phrynosoma hernandesi*), western fence lizard (*Sceloporus undulatus*), tree lizard (*Urosaurus ornatus*), and gopher snake (bullsnake) (*Pituophis catenifer*) in pinyon-juniper woodlands, sagebrush shrublands, or grassy clearings. Other reptiles potentially present along riparian areas are the milk snake (*Lampropeltis triangulum*), western terrestrial garter snake (*Thamnophis elegans*), and smooth green snake (*Liochlorophis vernalis*).

The area is also within the known range of the Great Basin spadefoot [toad] (*Spea intermontana*), Woodhouse's toad (*Anaxyrus woodhousii*), and western chorus frog (*Pseudacris triseriata*). Within the CRVFO and vicinity, the spadefoot toad and the true toad occur primarily along ephemeral washes that do not support fish and contain pools of water for a period of at least a few weeks every spring. The chorus frog occurs primarily in cattail and bulrush wetlands and along the vegetated margins of seasonal or perennial ponds and slow-flowing streams.

Environmental Consequence

Proposed Action

Direct impacts to terrestrial wildlife from the Proposed Action may include mortality, disturbance, nest abandonment/nesting attempt failure, or site avoidance/displacement from otherwise suitable habitats. These effects could result from the 8.73 acres of habitat loss or modification, increased noise from vehicles and operation of equipment, increased human presence, and collisions between wildlife and vehicles. Impacts would be more substantial during critical seasons such as winter (deer and elk) or the spring/summer breeding season (raptors, songbirds, amphibians).

Deer and elk are often restricted to smaller areas during the winter months and may expend high amounts of energy to move through snow, locate food, and maintain body temperature. Disturbance during the winter can displace wildlife, depleting much-needed energy reserves and may lead to decreased over winter survival. Additional, indirect habitat loss may occur if increased human activity (e.g., traffic, noise) associated with infrastructure causes intolerant species to be displaced or alter their habitat use patterns. The extent of indirect habitat loss varies by species, the type and duration of the disturbance, and the amount of screening provided by vegetation and topography. In general, disturbance-related impacts are temporary, with patterns of distribution and habitat use returning to predisturbance conditions rather quickly when disturbance stops.

Because the raptor nest identified during project survey was active during the 2013 nesting season, a raptor nesting TL will be applied as a COA (Appendix A) to prohibit initiation of construction, drilling, or

completion activities at the GM 11-28 pad from the period March 15 to May 15 unless an updated survey documents that no nests are occupied during that breeding season.

No Action Alternative

Under this alternative, none of the 16 Federal wells would be approved or drilled, but the planned four fee wells would be developed, resulting in the same amount of surface disturbance as the Proposed Action. Impacts to terrestrial wildlife would be reduced with the drilling of four wells instead of the 20 wells in the Proposed Action.

SUMMARY OF CUMULATIVE IMPACTS

Historically, habitat loss or modification in the CRVFO areas was characteristic of agricultural, ranching lands, rural residential, with localized industrial impacts associated with the railroad and I-70 corridors and the small communities. More recently, the growth of residential and commercial uses, utility corridors, oil and gas developments, and other rural industrial uses (e.g., gravel mining along the Colorado River) has accelerated the accumulation of impacts in the area. Cumulative impacts have included (1) direct habitat loss, habitat fragmentation, and decreased habitat effectiveness; (2) increased potential for runoff, erosion, and sedimentation; (3) expansion of noxious weeds and other invasive species; (4) increased fugitive dust from construction of oil and gas pads, roads, and pipelines and associated truck travel; (5) increased noise, especially along access and haul roads; (6) increased potential for spills and other releases of chemical pollutants; and (7) decreased scenic quality.

Although none of the cumulative impacts was described in the 1999 FSEIS (BLM 1999a) as significant, and while new technologies and regulatory requirements have reduced the impacts of some land uses, it is clear that past, present, and reasonably foreseeable future actions have had and would continue to have adverse effects on various elements of the human environment. Anticipated impacts for existing and future actions range from negligible to locally major, and primarily negative, for specific resources.

The primary bases for this assessment are twofold: First, although the rate of development, including oil and gas development, has slowed in recent years due to the general economic downturn and depressed natural gas prices, some development continues to occur, adding to the previous residential, commercial, and industrial growth, the previous habitat loss, modification, and fragmentation, and the amount of vehicular traffic and equipment operations associated with long-term production and maintenance. Second, most of the oil and gas development has occurred on private lands where mitigation measures designed to protect and conserve resources may not be in effect to the same extent as on BLM lands. However, COGCC regulations enacted in recent years have closed considerably the former gap between the potential environmental impacts associated with development of private versus Federal fluid mineral resources.

It is clear that the Proposed Action would contribute to the collective adverse impact for some resources. Although the contribution would be minor, the Proposed Action would contribute incrementally to the collective impact to air quality, vegetation, migratory birds, terrestrial wildlife, and other resources.

PERSONS AND AGENCIES CONSULTED

Colorado Oil and Gas Conservation Commission – Dave Kubeczko

Colorado Parks and Wildlife – Jim Komatinsky

WPX Energy: April Mestas, Mike Reynolds, Kris Meil, Traci Van Loan, Wally Hammer, John Doose
Brandon Baker, Richard Jenkins, Jason Raley, Rob Raley, Porter Cooley, Wayne Gallahan

INTERDISCIPLINARY REVIEW

BLM staff from the CRVFO who participated in the preparation of this EA, including review of survey results submitted by the operator’s consultants, evaluation of impacts likely to occur from implementation of the Proposed Action, and identification of appropriate COAs to be attached and enforced by BLM, are listed in Table 15.

Table 15. BLM Interdisciplinary Team Authors and Reviewers		
<i>Name</i>	<i>Title</i>	<i>Areas of Participation</i>
John Brogan	Archaeologist	Cultural Resources, Native American Religious Concerns
Jim Byers	Natural Resource Specialist	Project Lead, Access and Transportation, Range Management, Recreation, Socioeconomics, Wastes
Allen Crockett, Ph.D., J.D.	Supervisory Natural Resource Specialist	Technical Review, NEPA Review
Shauna Kocman, Ph.D., P.E.	Petroleum Engineer	Air Quality, Noise, Soils, Surface Water, Downhole COAs
Julie McGrew	Natural Resource Specialist	Visual Resources
Judy Perkins, Ph.D.	Botanist	Invasive Non-Native Species, Special Status Plants, Vegetation
Sylvia Ringer	Wildlife Biologist	Migratory Birds, Special Status Animals, Aquatic and Terrestrial Wildlife
Todd Sieber	Geologist	Geology and Minerals, Groundwater, Fossil Resources

REFERENCES CITED

Angold, P.G. 1997. The impact of a road upon adjacent heathland vegetation: effects on plant species composition. *Journal of Applied Ecology*, 34:409-417.

Auerbach, N.A., M.D. Walker, and D.A. Walker. 1997. Effects of roadside disturbance on substrate and vegetation properties in arctic tundra. *Ecological Applications*, 7:218-235.

Bureau of Land Management (BLM). 1984. Glenwood Springs Resource Management Plan. Glenwood Springs Field Office, Colorado.

_____. 1986. BLM Manual Handbook 8410-1-Visual Resource Inventory.

_____. 1991. Record of Decision, Oil and Gas Plan Amendment. Glenwood Springs Field Office, Colorado.

_____. 1999a. Oil & Gas Leasing & Development – Final Supplemental Environmental Impact Statement. Glenwood Spring Field Office, Colorado.

_____. 1999b. Oil & Gas Leasing & Development – Record of Decision and Resource Management Plan Amendment. Glenwood Spring Field Office, Colorado.

_____. 2006. Final Roan Plateau Resource Management Plan Amendment & Environmental Impact Statement, Volume III, Appendix C. Glenwood Springs Field Office, Colorado.

_____. 2007a. Federal Mineral Leasing Act of 1920 as Amended. Oil and Gas Royalty Permittee Fees. www.blm.gov/pgdata/...minerals.../MineralLeasingAct1920.pdf

_____. 2007b. Final biological assessment, vegetation treatments on BLM lands in 17 western states. Reno, NV.

_____. 2011. Air Resources Technical Support Document. Colorado River Valley Field Office, CO <http://www.blm.gov/co/st/en/fo/crvfo.html>

Center for Climate Strategies (CCS). 2007. Colorado greenhouse gas inventory and reference case projections 1990-2020. Center for Climate Strategies (CCS). January. http://www.coloradoclimate.org/GHG_Inventory_Forecast_Report.cfm

City Data. 2012. Garfield County, Colorado. http://www.city-data.com/county/Garfield_County-CO.html.

Cole, R.D., G.J. Daub, and L.K. Weston. 1995. Review of geology, mineral resources, and ground-water hydrology of Green River Formation, north-central Piceance Creek Basin, Colorado. *In* W.R. Averett (Ed.), *The Green River Formation in Piceance Creek and Eastern Uinta Basins: Grand Junction, Colorado*, Grand Junction Geological Society, p. 63-81.

Colorado Department of Labor and Employment (CDLE). 2013. Colorado LMI Gateway. Summary area Profile for Garfield County, Colorado. <http://www.colmigateway.com/vosnet/lmi/area/areasummary.aspx?session=areadetail&geo=0804000045>

Colorado Department of Public Health and Environment (CDPHE). 2007. Water Quality Control Commission (WQCC), Regulation No. 37 Classifications and numeric standards for Lower Colorado River basin and tables. Amended February 8, 2010; effective June 3, 2010. Available online.

_____. 2010. Water Quality Control Commission (WQCC), Regulation No. 93, 2006 Section 303(d) List Water-Quality-Limited Segments Requiring TMDLs.

Colorado Department of Local Affairs (CDOLA). 2012. Population forecasts – years 2000 to 2040. Table III –C-1. Preliminary population forecasts for Colorado counties, 2000-2040. <http://www.colorado.gov/cs/Satellite?c=Page&childpagename=DOLA-Main%2FCBONLayout&cid=1251593346867&pagename=CBONWrapper>

_____. 2013a. State Demography Office, Profile System, Colorado County Profile System, Results Garfield County 2000 – 2011. https://dola.colorado.gov/demog_webapps/psc_parameters.jsf.

_____. 2013b. 2010 Census Data for Colorado, Race & Ethnicity (including 18+, % and Absolute Change from 2000 to 2010) by County. <http://dola.colorado.gov/dlg/demog/2010censusdata.html>

_____. 2013c. 2010 Census Data for Colorado, 2010 Hispanic or Latino (of any race) Population and Percent Change Change Colorado Counties – Total Population <http://dola.colorado.gov/dlg/demog/2010censusdata.html>.

Colorado Geological Survey (CGS). 2003. Ground Water Atlas of Colorado, Special Publication 53, pgs. 97-106.

- Colorado Oil and Gas Commission (COGCC). 2008. Amended Rules. 800 Series Aesthetic and Noise Control Regulations Regulation 801. <http://cogcc.state.co.us/>
- _____. 2013a. Colorado Oil and Gas Information System (COGIS) Production. <http://cogcc.state.co.us/cogis/ProductionSearch.asp>.
- _____. 2013b. Colorado Oil and Gas Drilling Permits. <http://cogcc.state.co.us/>.
- Colorado Parks and Wildlife (CPW). 2011. National Diversity Information Source (CPW-NDIS). Elk and mule deer habitat GIS data.
- Davies, R. J., S. Mathias, J. Moss, S. Hustoft, and L Newport. 2012. Hydraulic Fractures: How far can they go? *Marine and Petroleum Geology* 37(1):1-6. November.
- Donnell, J.R., W.E. Yeend, and M.C. Smith. Geologic Map of the Grand Valley Quadrangle, Garfield County, CO. 1:24,000 Scale. Map MF-1883.
- EnerMax, Inc. 2007. Hydraulic fracturing. <http://www.enermaxinc.com/hydraulic-fracturing>.
- Farmer, A.M. 1993. The effects of dust on vegetation – a review. *Environmental Pollution*, 79:63-75.
- Field, J.P., J. Belnap, D.D. Breshears, J.C. Neff, G.S. Okin, J.J. Whicker, T.H. Painter, S. Ravi, R.C. Reheis, and R.L. Reynolds. 2010. The ecology of dust. *Frontiers in Ecology and the Environment*, 8:423-430.
- Fenneman, N. M. 1946. Physical subdivisions of the United States (Map): U.S. Geological Survey, 1:700,000, 1 sheet.
- Fisher, K., and N. Warpinski. 2012. Hydraulic-Fracture-Height Growth: Real Data. *SPE Production & Operations Journal* 27(1):8-19. SPE-145949-PA. <http://dx.doi.org/10.2118/145949-PA>.
- Franczyk, K.J., J.K. Pitman, and D.J. Nichols. 1990. Sedimentology, mineralogy, and depositional history of some Uppermost Cretaceous Lowermost Tertiary rocks along the Utah Book and Roan Cliffs east of the Green River: U.S. Geological Survey Bulletin 1787:27 pp.
- Garfield County. 2013a. About Garfield County. <http://www.garfield-county.com/about-garfield-county/index.aspx>.
- _____. 2013b. Garfield County Administration, 2012 Abstract of Assessment. www.garfield-county.com/assessor/documents/2012-Abstract-brochure.pdf
- _____. 2013c. Garfield County Administration, Impacts of Oil and Gas Industry on Garfield County. www.garfield-county.com/.../Economic-Impacts-of-Oil-and-Gas-Industry-on-Garfield-County.pdf
- George, R.D. 1927. *Geology and Natural Resources of Colorado*. University of Colorado, Boulder.
- Gelbard, J.L., and J. Belnap. 2003. Roads as conduits for exotic plant invasions in a semiarid landscape. *Conservation Biology*, 17(2):420-432.
- Gieselman, T.M. 2010. Changes in grassland community composition at human-induced edges in the south Okanagan. Master of Science Dissertation. The University of British Columbia, Vancouver.

Green, C.A., R.D. Barree, and J.L. Miskimins. 2009. Hydraulic-Fracture-Model Sensitivity Analysis of a Massively Stacked, Lenticular, Tight Gas Reservoir. SPE Production & Operations Journal 24(1):66-73. SPE 106270-PA. February.

Harris, C.M. 1991. Handbook of acoustical measurements and noise control, McGraw-Hill, Inc., New York.

Hemborg, T.H. 2000. Gas production characteristics of the Rulison, Grand Valley, Mamm Creek, and Parachute Fields, Garfield County, Colorado: Turning marginally economic basin-centered tight-gas sands into profitable reservoirs in the Southern Piceance Basin. Colorado Geological Survey, Resource Series 39. Denver.

Hierro, J.L., D. Villarreal, O. Eren, J.M. Graham, and R.M. Callaway. 2006. Disturbance facilitates invasion: the effects are stronger abroad than at home. The American Naturalist, 168(2):144-156.

Johnson, R.C. 1985. Early Cenozoic history of the Uinta and Piceance Creek Basins, Utah and Colorado, with special reference to the development of Eocene Lake Uinta United States: Rocky Mountain Section, Society of Economic Paleontology and Mineralogy: Denver, Colo., p. 247–276.

Johnson, R.C. 1989. Geologic history and hydrocarbon potential of late Cretaceous-age, low-permeability reservoirs, Piceance Basin, western Colorado: U.S. Geological Survey Bulletin 1787, Evolution of sedimentary basins-Uinta and Piceance Basins, chapter E, 51 p.

Johnston, F.M., and S.W. Johnston. 2004. Impacts of road disturbance on soil properties and on exotic plant occurrence in subalpine areas of the Australian Alps. Arctic, Antarctic, and Alpine Research, 36:201-207.

Klironomos, J.N. 2002. Feedback with soil biota contributes to plant rarity and invasiveness in communities. Nature, 417:67-70.

Kuuskraa, V.A. 1997. Producing massively stacked lenticular sands of Colorado's Piceance Basin: Gas Tips – A Publication of Gas Research Institute GRI-97/0206:4-11.

Ladyman, J.A.R. 2003. *Phacelia scopulina* (A. Nels) J.T. Howell var. *submutica* (J.T. Howell) Halse (*Debeque phacelia*): A Technical Conservation Assessment. Centennial, CO.

La Plata County, Colorado. 2002. Final La Plata County Impact Report. October.

Larson, D.L. 2003. Native weeds and exotic plants: relationships to disturbance in mixed-grass prairie. Plant Ecology, 169:317-333.

Lorenz, J.C. 1989. Reservoir sedimentology of rocks of the Mesaverde Group, multiwall experiment site and east-central Piceance Basin, northwest Colorado. In B.E. Law and C.W. Spencer, C.W. (Eds.), Geology of tight gas reservoirs in the Pinedale Anticline area, Wyoming, and at the multiwall experiment site, Colorado: U.S. Geological Survey Bulletin 1886:K1-K24.

Maxwell, S.C. 2011. Hydraulic Fracture Height Growth. Canadian Society of Exploration Geophysicists (CSEG) Recorder. November.

Murphy, P.C., and D. Daitch, 2007. Paleontological overview of oil shale and tar sands areas in Colorado, Utah, and Wyoming, p. 58.

National Academy of Sciences (NAS). 2007. Weather and climate extremes in a changing climate. National Academies Press. <http://dels.nas.edu/globalchange/reportDetail.php?id=4288&c=clim&t=pubs>.

_____. 2012. Induced Seismicity Potential in Energy Technologies. National Academy Press, Washington, DC.

Palisch, T.T., M.A. Chapman, and J. Godwin. 2012. Hydraulic Fracture Design Optimization in Unconventional Reservoirs: A Case History. Paper SPE 160206 presented at the Annual Technical Conference and Exhibition, San Antonio, TX. October 8-10.

Parendes, L.A., and J.A. Jones. 2000. Role of light availability and dispersal in exotic plant invasion along roads and streams in the H.J. Andrews Experimental Forest, Oregon. *Conservation Biology*, 14(1):64-75.

Reinhart, K.O., and R.M. Callaway. 2006. Soil biota and invasive plants. *New Phytologist*, 170:445-447.

Robson, S.G., and G.J. Saulnier, Jr. 1981. Hydrogeochemistry and simulated solute transport, Piceance Basin, northwestern Colorado. U.S. Geological Survey Professional Paper 1196, 65 p.

Schmidt, W. 1989. Plant dispersal by motor cars. *Vegetatio*, 80:147-152.

Sharifi, M.R., A.C. Gibson, and P.W. Rundel. 1997. Surface dust impacts on gas exchange in Mojave Desert shrubs. *Journal of Applied Ecology*, 34(4):837-846.

Spencer, C.W., and R.J. Wilson. 1988. Petroleum geology and principal exploration plays in the Uinta-Piceance-Eagle Basins Province, Utah and Colorado: U.S. Geological Survey Open-File Report 88-450-G, 35 p.

Thompson, J.R., P.W. Mueller, W. Fluckiger, and A.J. Rutter. 1984. The effect of dust on photosynthesis and its significance for roadside plants. *Environmental Pollution (Series A)*, 34:171-190.

U.S. Department of Agriculture (USDA). 1985. Soil survey of Rifle area, Colorado: parts of Garfield and Mesa Counties. Soil Conservation Service [Natural Resources Conservation Service].

U.S. Department of Commerce (USDOC). 2012. Regional Economic Information System, Bureau of Economic Analysis (BEA). Table CA 1-3 Personal Income Summary. <http://www.bea.gov/iTable/iTable.cfm?ReqID=70&step=1.#reqid=70&step=30&isuri=1&7028=-1&7040=-1&7083=Levels&7031=08000&7022=20&7023=7&7024=Non-Industry&7025=4&7026=08045&7027=2011,2010,2009,2008,2007,2006,2005,2004,2003,2002,2001,2000&7001=720&7029=20&7090=70&7033=-1>

U.S. Department of Energy (DOE). 2009. Modern Shale Gas Development in the United States: A Primer. National Energy Technology Laboratory, Morgantown, WV, and Office of Fossil Energy, Washington, DC. April.

_____. 2013. U.S. Energy Information Administration U.S. Natural Gas Wellhead Price. <http://www.eia.gov/dnav/ng/hist/n9190us3a.htm>.

U.S. Department of the Interior (USDI). 2013. Payments in Lieu of Taxes (PILT) County Payments and Acres. USDI National Business Center <http://www.doi.gov/pilt/index.cfm>.

U.S. Department of the Interior and U.S. Department of Agriculture (USDI and USDA). 2007. Surface operating standards and guidelines for oil and gas exploration and development. The Gold Book. Fourth edition.

U.S. Environmental Protection Agency (EPA). 1974. Information on noise levels identified as requisite to protect public health and welfare with an adequate margin of safety. EPA-550/9-74-004, Arlington, VA.

_____. 2004. Evaluation of Impacts to Underground Sources of Drinking Water by Hydraulic Fracturing of Coalbed Methane Reservoirs. Document #EPA 816-R-04-003. Office of Ground Water and Drinking Water Drinking Water Protection, Washington, DC.

_____. 2006. Drinking water standards and health advisories, EPA 822-R-06-013, August 2006. Available online.

_____. 2013. Inventory of U.S. greenhouse gas emissions and sinks: 1990-2011. EPA 430-R-10-006. USEPA, Washington, DC. April. <http://www.epa.gov/climatechange/emissions/usinventoryreport.html>

U.S. Fish and Wildlife Service (USFWS). 2008a. Birds of Conservation Concern. United States

_____. 2008b. Endangered Species Consultation Handbook. U.S. Fish and Wildlife Service and National Marine Fisheries Service. Washington, DC.

_____. 2013. DRAFT Guidance for Section 7 Consultations that Include Plants within the State of Colorado. Grand Junction, CO.

Department of the Interior, Fish and Wildlife Service, Division of Migratory Bird Management, Arlington, Virginia. 85 pp. [Online version available at <<http://www.fws.gov/migratorybirds/>>]

U.S. Geological Survey (USGS). 2007. Water resources of the United States, NWISWeb. Water quality samples for the nation, Colorado River near DeBeque. Available online.

Vinton, M.A., and E.M. Goergen. 2006. Plant-soil feedbacks contribute to the persistence of *Bromus inermis* in tallgrass prairie. *Ecosystems*, 9:967-976.

Vogelsgang, K.M., and J.D. Bever. 2009. Mycorrhizal densities decline in association with nonnative plants and contribute to plant invasion. *Ecology*, 90 (2):399-407.

Warpinski, N.R. 2011. Fracture Growth in Layered and Discontinuous Media. Proceedings of the Technical Workshops for the Hydraulic Fracturing Study: Fate and Transport. U.S. Environmental Protection Agency, Washington, DC. May.

Warpinski, N.R., J. Du, and U. Zimmer. 2012. Measurements of Hydraulic-Fracture Induced Seismicity in Gas Shales. Paper SPE 151597 presented at the SPE Hydraulic Fracture Technology Conference, The Woodlands, TX. February 6-8.

Weiner, R.J., and J.D. Haun. 1960. Guide to the Geology of Colorado. Geological Society of America.

WestWater Engineering (WWE). 2013a. WPX Energy, GM 11-28 Well Pad, Frac Pad, Gas Line, and Frac Line Project, Biological Survey Report. Grand Junction, CO.

_____. 2013b. WPX Energy, GM 11-28 Surface Waterline Reroute, Biological Survey Report – Addendum. Grand Junction, CO.

_____. 2013c. Biological Assessment, WPX Energy GM 11-28 Well Pad, Frac Pad, Gas Line, And Frac Line, Garfield County, Colorado. Grand Junction, CO.

Zhai, Z., and M.M. Sharma. 2005. A New Approach to Modeling Hydraulic Fractures in Unconsolidated Sands. Paper SPE 96246 presented at the SPE Annual Technical Conference and Exhibition, Dallas, TX. October 9-12.

Zwaenepoel, A., P. Roovers, and M. Hermy. 2006. Motor vehicles as vectors of plant species from road verges in a suburban environment. *Basic and Applied Ecology*, 7:83-93.

Left blank for two-sided copying.

APPENDIX A

**GM 11-28 Pad
Surface-Use and Downhole Conditions of Approval**

Left blank for two-sided copying.

**SURFACE-USE CONDITIONS OF APPROVAL
DOI-BLM-CO-N040-2013-0103-EA**

GENERAL SURFACE-USE COAS

1. Administrative Notification. The operator shall notify the BLM representative at least 48 hours prior to initiation of construction. If requested by the BLM representative, the operator shall schedule a pre-construction meeting, including key operator and contractor personnel, to ensure that any unresolved issues are fully addressed prior to initiation of surface-disturbing activities or placement of production facilities. No construction activities shall commence without staking of pad construction limits, pad corners, and road/pipeline centerlines and disturbance corridors.
2. Road Construction and Maintenance. Roads shall be crowned, ditched, surfaced, drained with culverts and/or water dips, and constructed to BLM Gold Book standards. Initial gravel application shall be a minimum of 6 inches. The operator shall provide timely year-round road maintenance and cleanup on the access roads. A regular schedule for maintenance shall include, but not be limited to, blading, ditch and culvert cleaning, road surface replacement, and dust abatement. When rutting within the traveled way becomes greater than 6 inches, blading and/or gravelling shall be conducted as approved by the BLM.
3. Drill Cuttings Management. Cuttings generated from the numerous planned well bores shall be worked through a shaker system on the drill rig, mixed with a drying agent, if necessary, and deposited in the planned cuttings trench or piled on location against the cut slope for later burial during the interim reclamation earthwork. The cuttings shall be remediated per COGCC regulations (Table 910-1 standards) prior to earthwork reshaping related to well pad interim reclamation.
4. Dust Abatement. The operator shall implement dust abatement measures as needed to prevent fugitive dust from vehicular traffic, equipment operations, or wind events. The BLM may direct the operator to change the level and type of treatment (watering or application of various dust agents, surfactants, and road surfacing material) if dust abatement measures are observed to be insufficient to prevent fugitive dust.
5. Drainage Crossings and Culverts. Construction activities at perennial, intermittent, and ephemeral drainage crossings (e.g. burying pipelines, installing culverts) shall be timed to avoid high flow conditions. Construction that disturbs any flowing stream shall utilize either a piped stream diversion or a cofferdam and pump to divert flow around the disturbed area.

Culverts at drainage crossings shall be designed and installed to pass a 25-year or greater storm event. On perennial and intermittent streams, culverts shall be designed to allow for passage of aquatic biota. The minimum culvert diameter in any installation for a drainage crossing or road drainage shall be 24 inches. Crossings of drainages deemed to be jurisdictional Waters of the U.S. pursuant to Section 404 of the Clean Water Act may require additional culvert design capacity. Due to the flashy nature of area drainages and anticipated culvert maintenance, the U.S. Army Corps of Engineers (USACE) recommends designing drainage crossings for the 100-year event. Contact the USACE Colorado West Regulatory Branch at 970-243-1199 ext. 17.

Pipelines installed beneath stream crossings shall be buried at a minimum depth of 4 feet below the channel substrate to avoid exposure by channel scour and degradation. Following burial, the channel grade and substrate composition shall be returned to pre-construction conditions.

6. Jurisdictional Waters of the U.S. The operator shall obtain appropriate permits from the U.S. Army Corps of Engineers (USACE) prior to discharging fill material into Waters of the U.S. in accordance with Section 404 of the Clean Water Act. Waters of the U.S. are defined in 33 CFR Section 328.3 and may include wetlands as well as perennial, intermittent, and ephemeral streams. Permanent impacts to Waters of the U.S. may require mitigation. Contact the USACE Colorado West Regulatory Branch at 970-243-1199 ext. 17. Copies of any printed or emailed approved USACE permits or verification letters shall be forwarded to the BLM.
7. Reclamation. The goals, objectives, timelines, measures, and monitoring methods for final reclamation of oil and gas disturbances are described in Appendix I (Surface Reclamation) of the 1998 Draft Supplemental EIS (DSEIS). Specific measures to follow during interim reclamation are described below.
 - a. Reclamation Plans. In areas that have low reclamation potential or are especially challenging to restore, reclamation plans will be required prior to APD approval. The plan shall contain the following components: detailed reclamation plans, which include contours and indicate irregular rather than smooth contours as appropriate for visual and ecological benefit; timeline for drilling completion, interim reclamation earthwork, and seeding; soil test results and/or a soil profile description; amendments to be used; soil treatment techniques such as roughening, pocking, and terracing; erosion control techniques such as hydromulch, blankets/matting, and wattles; and visual mitigations if in a sensitive VRM area.
 - b. Deadline for Interim Reclamation Earthwork and Seeding. Interim reclamation to reduce a well pad to the maximum size needed for production, including earthwork and seeding of the interim reclaimed areas, shall be completed within 6 months following completion of the last well planned to be drilled on that pad as part of a continuous operation. If a period of greater than one year is expected to occur between drilling episodes, BLM may require implementation of all or part of the interim reclamation program.

Reclamation, including seeding, of temporarily disturbed areas along roads and pipelines, and of topsoil piles and berms, shall be completed within 30 days following completion of construction. Any such area on which construction is completed prior to December 1 shall be seeded during the remainder of the early winter season instead of during the following spring, unless BLM approves otherwise based on weather. If road or pipeline construction occurs discontinuously (e.g., new segments installed as new pads are built) or continuously but with a total duration greater than 30 days, reclamation, including seeding, shall be phased such that no portion of the temporarily disturbed area remains in an unreclaimed condition for longer than 30 days. BLM may authorize deviation from this requirement based on the season and the amount of work remaining on the entirety of the road or pipeline when the 30-day period has expired.

If requested by the project lead NRS for a specific pad or group of pads, the operator shall contact the NRS by telephone or email approximately 72 hours before reclamation and reseeding begin. This will allow the NRS to schedule a pre-reclamation field visit if needed to ensure that all parties are in agreement and provide time for adjustments to the plan before work is initiated.

The deadlines for seeding described above are subject to extension upon approval of the BLM based on season, timing limitations, or other constraints on a case-by-case basis. If the BLM approves an extension for seeding, the operator may be required to stabilize the reclaimed surfaces using hydromulch, erosion matting, or other method until seeding is implemented.

- c. Topsoil Stripping, Storage, and Replacement. All topsoil shall be stripped following removal of vegetation during construction of well pads, pipelines, roads, or other surface facilities. In areas of thin soil, a minimum of the upper 6 inches of surficial material shall be stripped. The BLM may specify a stripping depth during the onsite visit or based on subsequent information regarding soil thickness and suitability. The stripped topsoil shall be stored separately from subsoil or other excavated material and replaced prior to final seedbed preparation. The BLM best management practice (BMP) for the Windrowing of Topsoil (COA #17) shall be implemented for well pad construction whenever topography allows.
- d. Seedbed Preparation. For cut-and-fill slopes, initial seedbed preparation shall consist of backfilling and recontouring to achieve the configuration specified in the reclamation plan. For compacted areas, initial seedbed preparation shall include ripping to a minimum depth of 18 inches, with a maximum furrow spacing of 2 feet. Where practicable, ripping shall be conducted in two passes at perpendicular directions. Following final contouring, the backfilled or ripped surfaces shall be covered evenly with topsoil.

Final seedbed preparation shall consist of scarifying (raking or harrowing) the spread topsoil prior to seeding. If more than one season has elapsed between final seedbed preparation and seeding, and if the area is to be broadcast-seeded or hydroseeded, this step shall be repeated no more than 1 day prior to seeding to break up any crust that has formed.

If directed by the BLM, the operator shall implement measures following seedbed preparation (when broadcast-seeding or hydroseeding is to be used) to create small depressions to enhance capture of moisture and establishment of seeded species. Depressions shall be no deeper than 1 to 2 inches and shall not result in piles or mounds of displaced soil. Excavated depressions shall not be used unless approved by the BLM for the purpose of erosion control on slopes. Where excavated depressions are approved by the BLM, the excavated soil shall be placed only on the downslope side of the depression.

If directed by the BLM, the operator shall conduct soil testing prior to reseeding to identify if and what type of soil amendments may be required to enhance revegetation success. At a minimum, the soil tests shall include texture, pH, organic matter, sodium adsorption ratio (SAR), cation exchange capacity (CEC), alkalinity/salinity, and basic nutrients (nitrogen, phosphorus, potassium [NPK]). Depending on the outcome of the soil testing, the BLM may require the operator to submit a plan for soil amendment. Any requests to use soil amendments not directed by the BLM shall be submitted to the CRVFO for approval.

- e. Seed Mixes. A seed mix consistent with BLM standards in terms of species and seeding rate for the specific habitat type shall be used on all BLM lands affected by the project (see Attachments 1 and 2 of the letter provided to operators dated October 23, 2012).

For private surfaces, the menu-based seed mixes are recommended, but the surface landowner has ultimate authority over the seed mix to be used in reclamation. The seed shall contain no prohibited or restricted noxious weed seeds and shall contain no more than 0.5 percent by weight of other weed seeds. Seed may contain up to 2.0 percent of "other crop" seed by weight, including the seed of other agronomic crops and native plants; however, a lower percentage of other crop seed is recommended. Seed tags or other official documentation shall be submitted to BLM at least 14 days before the date of proposed seeding for acceptance. Seed that does not meet the above criteria shall not be applied to public lands.

- f. Seeding Procedures. Seeding shall be conducted no more than 24 hours following completion of final seedbed preparation.

Where practicable, seed shall be installed by drill-seeding to a depth of 0.25 to 0.5 inch. Where drill-seeding is impracticable, seed may be installed by broadcast-seeding at twice the drill-seeding rate, followed by raking or harrowing to provide 0.25 to 0.5 inch of soil cover or by hydroseeding and hydromulching. Hydroseeding and hydromulching shall be conducted in two separate applications to ensure adequate contact of seeds with the soil.

If interim revegetation is unsuccessful, the operator shall implement subsequent reseeding until interim reclamation standards are met.

- g. Mulch. Mulch shall be applied within 24 hours following completion of seeding. Mulch may consist of either hydromulch or of certified weed-free straw or certified weed-free native grass hay crimped into the soil.

NOTE: Mulch is not required in areas where erosion potential mandates use of a biodegradable erosion-control blanket (straw matting).

- h. Erosion Control. Cut-and-fill slopes shall be protected against erosion with the use of water bars, lateral furrows, or other BMPs approved by the BLM. Additional BMPs such as biodegradable wattles, weed-free straw bales, or silt fences shall have be employed as necessary to reduce transport of sediments into the drainages. The BLM may, in areas with high erosion potential, require use of hydromulch or biodegradable blankets/matting to ensure adequate protection from slope erosion and offsite transport of sediments and to improve reclamation success.
- i. Site Protection. The pad shall be fenced to BLM standards to exclude livestock grazing for the first two growing seasons or until seeded species are firmly established, whichever comes later. The seeded species will be considered firmly established when at least 50 percent of the new plants are producing seed. The BLM will approve the type of fencing.
- j. Monitoring. The operator shall conduct annual monitoring surveys of all sites categorized as “operator reclamation in progress” and shall submit an annual monitoring report of these sites, including a description of the monitoring methods used, to the BLM by **December 31** of each year. The monitoring program shall use the four Reclamation Categories defined in Appendix I of the 1998 DSEIS to assess progress toward reclamation objectives. The annual report shall document whether attainment of reclamation objectives appears likely. If one or more objectives appear unlikely to be achieved, the report shall identify appropriate corrective actions. Upon review and approval of the report by the BLM, the operator shall be responsible for implementing the corrective actions or other measures specified by the BLM.
8. Weed Control. The operator shall regularly monitor and promptly control noxious weeds or other undesirable plant species as set forth in the Glenwood Springs Field Office *Noxious and Invasive Weed Management Plan for Oil and Gas Operators*, dated March 2007. A Pesticide Use Proposal (PUP) must be approved by the BLM prior to the use of herbicides. Annual weed monitoring reports and Pesticide Application Records (PARs) shall be submitted to BLM by **December 1**.
9. Big Game Winter Range Timing Limitation. To minimize impacts to wintering big game, no construction, drilling or completion activities shall occur during a Timing Limitation (TL) period from **January 1 through March 1 annually**.

10. Raptor Nesting. Raptor nest surveys in the project vicinity resulted in the location of one or more raptor nest structures within 0.25 mile of a well pad or 0.125 mile of an access road, pipeline, or other surface facility. To protect nesting raptors, a 60-day Timing Limitation (TL) shall be applied to prohibit initiation of construction, drilling, or completion activities within the buffer widths specified from **March 1 to May 1**. The same 60-day TL shall also apply to prohibit initiation of construction, drilling, or completion activities during subsequent nesting seasons unless subsequent surveys determine that no nests are unoccupied during the normal breeding period for the particular species. The BLM may grant an exception to the TL in subsequent nesting seasons without requiring a follow-up survey if the nest was severely dilapidated when identified, indicating protracted disuse and low likelihood of reuse.

If project-related activities are initiated within the specified buffer distance of any active nest, even if outside the 60-day TL period specified in this COA, the operator remains responsible for compliance with the MBTA with respect to a “take” of birds or of active nests (those containing eggs or young), including nest failure caused by human activity (see COA for Migratory Birds).

11. Migratory Birds – Birds of Conservation Concern. Pursuant to BLM Instruction Memorandum 2008-050, all vegetation removal or surface disturbance in previously undisturbed lands providing potential nesting habitat for Birds of Conservation Concern (BCC) is prohibited from **May 1 to July 1**. An exception to this TL may be granted if nesting surveys conducted no more than one week prior to surface-disturbing activities indicate that no BCC species are nesting within 30 meters (100 feet) of the area to be disturbed. Nesting shall be deemed to be occurring if a territorial (singing) male is present within the distance specified above. Nesting surveys shall include an aural survey for diagnostic vocalizations in conjunction with a visual survey for adults and nests. Surveys shall be conducted by a qualified breeding bird surveyor between sunrise and 10:00 AM under favorable conditions for detecting and identifying a BCC species. This provision does not apply to ongoing construction, drilling, or completion activities that are initiated prior to May 1 and continue into the 60-day period at the same location.
12. Migratory Birds – General. It shall be the responsibility of the operator to comply with the Migratory Bird Treaty Act (MBTA) with respect to “take” of migratory bird species, which includes injury and direct mortality resulting from human actions not intended to have such result. To minimize the potential for the take of a migratory bird, the operator shall take reasonable steps to prevent use by birds of fluid-containing pits associated with oil or gas operations, including but not limited to reserve pits, produced-water pits, hydraulic fracturing flowback pits, evaporation pits, and cuttings trenches. Liquids in these pits—whether placed or accumulating from precipitation—may pose a risk to birds as a result of ingestion, absorption through the skin, or interference with buoyancy and temperature regulation.

Based on low effectiveness of brightly colored flagging or spheres suspended over a pit, the operator shall install netting with a mesh size of 1 to 1.5 inches, and suspended at least 4 feet above the fluid surface, on all pits into which fluids are placed, except for storage of fresh water in a pit that contains no other material. The netting shall be installed within 24 hours of placement of fluids into a pit. The requirement for netting does not apply to pits during periods of continuous, intensive human activity at the pad, such as drilling and hydraulic fracturing phases or, as pertains to cuttings trenches, during periods of active manipulation for cuttings management, remediation of contaminated materials, or other purposes.

In addition to netting of pits, oil slicks and oil sheens shall be promptly skimmed off the fluid surface. The requirement for prompt skimming of oil slicks and oil sheens also applies to cuttings trenches in which precipitation has accumulated. All mortality or injury to birds shall be reported immediately to

the BLM project lead and to the USFWS representative to the BLM Field Office at 970-243-2778 x28 and visit <http://www.fws.gov/mountain-prairie/contaminants/oilpits.htm>.

13. Range Management. Range improvements (fences, gates, reservoirs, pipelines, etc.) shall be avoided during development of natural gas resources to the maximum extent possible. If range improvements are damaged during exploration and development, the operator will be responsible for repairing or replacing the damaged range improvements. If a new or improved access road bisects an existing livestock fence, steel frame gate(s) or a cattleguard with associated bypass gate shall be installed across the roadway to control grazing livestock.
14. Fossil Resources. All persons associated with operations under this authorization shall be informed that any objects or sites of paleontological or scientific value, such as vertebrate or scientifically important invertebrate fossils, shall not be damaged, destroyed, removed, moved, or disturbed. If in connection with operations under this authorization any of the above resources are encountered the operator shall immediately suspend all activities in the immediate vicinity of the discovery that might further disturb such materials and notify the BLM of the findings. The discovery must be protected until notified to proceed by the BLM.

Where feasible, the operator shall suspend ground-disturbing activities at the discovery site and immediately notify the BLM of any finds. The BLM would, as soon as feasible, have a BLM-permitted paleontologist check out the find and record and collect it if warranted. If ground-disturbing activities cannot be immediately suspended, the operator shall work around or set the discovery aside in a safe place to be accessed by the BLM-permitted paleontologist.

15. Cultural Education/Discovery. All persons in the area who are associated with this project shall be informed that if anyone is found disturbing historic, archaeological, or scientific resources, including collecting artifacts, the person or persons would be subject to prosecution.

Pursuant to 43 CFR 10.4(g), the BLM shall be notified by telephone, with written confirmation, immediately upon the discovery of human remains, funerary items, sacred objects, or objects of cultural patrimony. Further, pursuant to 43 CFR 10.4 (c) and (d), activities shall stop in the vicinity of the discovery, and the discovery shall be protected for 30 days or until notified by the BLM to proceed.

If in connection with operations under this contract, the operator, its contractors, their subcontractors, or the employees of any of them discovers, encounters, or becomes aware of any objects or sites of cultural value or scientific interest such as historic ruins or prehistoric ruins, graves or grave markers, fossils, or artifacts, the operator shall immediately suspend all operations in the vicinity of the cultural resource and shall notify the BLM of the findings (16 USC 470h-3, 36 CFR 800.112). Operations may resume at the discovery site upon receipt of written instructions and authorization by the BLM. Approval to proceed would be based upon evaluation of the resource. Evaluation shall be by a qualified professional selected by the BLM from a Federal agency insofar as practicable. When not practicable, the operator shall bear the cost of the services of a non-Federal professional.

Within five working days, the BLM would inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places
- what mitigation measures the holder would likely have to undertake before the site can be used (assuming that *in-situ* preservation is not necessary)

- the timeframe for the BLM to complete an expedited review under 36 CFR 800.11, or any agreements in lieu thereof, to confirm through the SHPO State Historic Preservation Officer that the findings of the BLM are correct and that mitigation is appropriate

The operator may relocate activities to avoid the expense of mitigation and delays associated with this process, as long as the new area has been appropriately cleared of resources and the exposed materials are recorded and stabilized. Otherwise, the operator shall be responsible for mitigation costs. The BLM would provide technical and procedural guidelines for relocation and/or to conduct mitigation. Upon verification from the BLM that the required mitigation has been completed, the operator would be allowed to resume construction.

Antiquities, historic ruins, prehistoric ruins, and other cultural or paleontological objects of scientific interest that are outside the authorization boundaries but potentially affected, either directly or indirectly, by the Proposed Action shall also be included in this evaluation or mitigation. Impacts that occur to such resources as a result of the authorized activities shall be mitigated at the operator's cost, including the cost of consultation with Native American groups.

Any person who, without a permit, injures, destroys, excavates, appropriates or removes any historic or prehistoric ruin, artifact, object of antiquity, Native American remains, Native American cultural item, or archaeological resources on public lands is subject to arrest and penalty of law (16 USC 433, 16 USC 470, 18 USC 641, 18 USC 1170, and 18 USC 1361).

16. Visual Resources. Production facilities shall be placed to avoid or minimize visibility from travel corridors, residential areas, and other sensitive observation points—unless directed otherwise by the BLM due to other resource concerns—and shall be placed to maximize reshaping of cut-and-fill slopes and interim reclamation of the pad.

To the extent practicable, existing vegetation shall be preserved when clearing and grading for pads, roads, and pipelines. The BLM may direct that cleared trees and rocks be salvaged and redistributed over reshaped cut-and-fill slopes or along linear features.

Above-ground facilities shall be painted **Shadow Gray** to minimize contrast with existing surrounding vegetation or rock outcrops.

17. Windrowing of Topsoil. Topsoil shall be windrowed around the pad perimeter to create a berm that limits and redirects stormwater runoff and extends the viability of the topsoil per BLM Topsoil Best Management Practices (BLM 2009 PowerPoint presentation available upon request from Glenwood Springs Field Office). Topsoil shall also be windrowed, segregated, and stored along pipelines and roads for later spreading across the disturbed corridor during final reclamation. Topsoil berms shall be promptly seeded to maintain soil microbial activity, reduce erosion, and minimize weed establishment.

18. Interim Reclamation Related to Drilling Phases. Within 1 year of completion of all exploratory wells proposed on a pad or within one year of completion of all development wells on a pad (whichever the situation may be), the operator would stabilize the disturbed area by recontouring, mulching, providing run-off and erosion control, replacing topsoil as directed, and seeding with BLM-prescribed native seed mixes (or landowner requested seed mix on Fee surface), and conducting weed control, as necessary. In cases where the exploratory drilling and development drilling on a single pad occur more than 1 year apart, slopes shall be recontoured to the extent necessary to accommodate seeding, and seed mixes required by BLM or requested by the private landowner shall be applied to stabilize the soil between visits per direction of the BLM.

SITE-SPECIFIC COAS APPLICABLE TO THE GM 11-28 PROJECT

The following site-specific surface use COAs are in addition to the standard COAs listed above and all relevant stipulations attached to the respective Federal leases.

1. Project Construction Details

Project Drilling Schedules: The operator shall drill one horizontal exploratory Niobrara well (GM 701-28-HN1) during a fall 2013 visit and up to 15 Federal Williams Fork wells and four fee wells in a follow-up visit in summer 2014 or later.

Topsoil Management:

Place topsoil windrow along upper (eastern) and lower (western) edges of the pad perimeter where space allows. The topsoil windrow on the eastern side of pad shall run from Corner 8 to Corner 10 to create a diversion structure to divert any debris generated from debris flows or runoff in the nearby drainage back into the channel course and away from the cutslope of the pad. The topsoil windrow shall be placed in a manner that allows the sediment basin to be installed near Corner 10 to drain north into the nearby drainage. Where possible given the location of the existing Encana buried pipeline along the northern edge of the pad and Encana access road, topsoil shall be windrowed on top of the pipeline along this side of the pad between Corners 8 and 4 leaving space for the pad access road at Corner 6. Topsoil shall be placed in a stockpile near Corner 2 as shown on Plat #2, Location Layout.

Pad Construction Items:

- Sidecasting fill off the south side of pad between Corners 1 and 11 shall be avoided. Installing a rock wall structure is recommended between Corners 1 and 11 to contain the planned fill material and achieve a straight-line pad edge.
- Divert the outlet of the planned sediment basin shown on Plan of Development away from the pad cutslope and toward the existing ephemeral drainage near Corner 8.
- Plat #2 identifies the installation of 60-inch diameter culvert across the existing Encana access road near Corner 8. Coordination with Encana is necessary to ensure that Encana's recent installation of low water structure in the roadway will be sufficient for the long-term drainage of the ephemeral channel.

Road Construction Details:

Prior to the construction of the proposed road spur onto the pad and the entire north edge of the pad perimeter, the existing Encana buried gas pipeline shall be located and "pot-holed" to determine the line location and depth and avoid construction conflicts.

Pad Containment Berm-spill Prevention Measures:

With the pad being in direct proximity to drainages on the north and south sides, there shall be special attention to installing a solid containment berm system around the perimeter of the pad working area. Sediment basins shall be located and designed to readily accept pad drainage with focus of locating these basins near the cut/fill balance line of the pad surface. Using windrowed topsoil as sediment controls and/or basin catchments shall be incorporated into the storm water control plan. Sediment basin outlets with drop-down black piping are discouraged and, if used, such piping shall not feed directly into the nearby drainages. As a minimum, a hand-drawn schematic on Plat #2 shall provide the details for the

storm water control plan for this pad. This plan shall be presented to the BLM and approved prior to completion of pad construction earthwork.

Interim Reclamation – Earthwork Reshaping Considerations:

Diversion ditches shall be constructed to direct and contain surface flow around the pad perimeter. Pad grading and surfacing with gravel shall be accomplished to direct runoff to the diversion ditches and avoid water ponding on the pad surface.

During interim reclamation earthwork, the cuttings stockpiled against the cutslope at the eastern edge of the pad shall be covered with a minimum 3-foot cap of native material, prior to topsoil application.

2. Gas and Water Pipeline Construction Details

The various buried and surface pipelines and special pipeline boring projects related to the GM 11-28 project shall be installed per alignments depicted on Plan of Development shown in APD including the following details:

- In support of the well completions for the horizontal Niobrara well, delivering recycled water to the GM 11-28 pad for the frac operations from the existing Grand Valley water line infrastructure via two temporary 10-inch diameter poly surface pipelines (6,600 feet and 7,000 feet in length) installed within existing pipeline corridor that parallels CR 215 and in two separate culverts underneath CR 215.
 - Laying 1,680 feet of temporary 4½-inch diameter steel surface frac lines between the MV 53-28 pad and the GM 11-28 pad during the second drilling visit to support Williams Fork well completion operations.
 - Rerouting the two 10-inch diameter poly surface pipelines (6,300 feet in length) installed within an existing pipeline corridor to the MV 53-28 pad to support remote fracturing for the second visit;
 - Boring fluid production pipelines underneath CR 215 to deliver condensate and produced water generated from the GM 11-28 wells to storage tanks staged on the nearby MV 53-28 pad.
 - Boring a new gas sales pipeline from MV 53-28 pad east underneath existing pipelines and CR 215 to the GM 11-28 pad for a length of 690 feet.
 - Burying a new 8-inch diameter gas pipeline (4,200 feet) for the Niobrara well, one 6-inch diameter gas line (4,200 feet) for the Williams Fork wells, and one 4-inch production water line (3,600 feet) from the MV 53-28 pad south requiring a pipeline bore underneath Parachute Creek to connect with existing pipeline infrastructure .
- a. Administrative Notification. The operator shall notify the BLM representative at least 48 hours prior to initiation of construction. If requested by the BLM representative, the operator shall schedule a pre-construction meeting, including key operator and contractor personnel, to ensure that any unresolved issues are fully addressed prior to initiation of surface-disturbing activities.
- b. Pipeline Construction and Maintenance. The pipelines (natural gas, condensate, and water for production) shall be installed to industry and BLM “Gold Book” standards.

All pipeline(s) shall be buried with a minimum depth of 48 inches from the top of the pipe to the surface. Where the alignments are shared, the gas gathering line and the water collection line

shall be installed concurrently in the same trench. The centerline and disturbance limits of the proposed pipeline(s) shall be clearly staked and/or flagged prior to any commencement of operations. No equipment or vehicle use shall be allowed outside the staked disturbance corridor of the pipeline ROW unless authorized by BLM personnel.

Approved permitting shall be obtained by the operator for the planned pipeline boring under County Road 215 and the boring project under Parachute Creek.

- c. Welding of Pipeline. Visual inspections shall be performed on 100% of all pipeline welds. All welders shall be appropriately certified. (43CFR109.227) *Qualification of welders*. 49CFR192.241) *Inspection and test of welds*.

Welding must be performed by a qualified welder in accordance with welding procedures qualified under section 5 of API 1104 (incorporated by reference, *see* §192.7) or section IX of the ASME Boiler and Pressure Vessel Code “Welding and Brazing Qualifications” (incorporated by reference, *see* §192.7) to produce welds meeting the requirements of this subpart. The quality of the test welds used to qualify welding procedures shall be determined by destructive testing in accordance with the applicable welding standard(s).

- d. Pipeline Testing. The entire pipeline shall be tested in compliance with United States Department of Transportation (DOT) Code of Federal Regulations (CFR) (49 CFR Part 192). (Ref. 49 CFR 192.500.Subpart J entitled “Test Requirements”). (49 CFR 192.225, Welding Procedures.)
- e. Fire Suppression. Welding with acetylene or other open-flame torch shall be operated in an area barren or cleared of all flammable materials at least ten feet on all sides of equipment. Internal combustion engines must be equipped with approved spark arrestors which meet either (a) Department of Agriculture, Forest Service Standard 5100-1a, or (b) Society of Automotive Engineers (SAE) recommended practices J335(b) and J350(a).
- f. Saturated Soil Conditions. When saturated soil conditions exist on or along the proposed right-of-way, construction shall be halted until soil material dries out or is frozen sufficiently for construction to proceed without undue damage and erosion to soils.
- g. Warning Signs. Pipeline warning signs shall be installed within 5 days of completion of construction and prior to use of the pipeline for transportation of product. Pipeline warning shall be installed at all road crossings and shall be visible from sign to sign along the ROW. For safety purposes each sign shall be permanently marked with the operator’s name and shall clearly identify the owner (emergency contact) and purpose (product) of the pipeline.

3. Special Status Plants Protections

The following specific conservation and mitigation measures shall be implemented for this project:

a. *For DeBeque Phacelia*:

- i. No new surface disturbing activities shall occur within 20 meters of the edge of delineated suitable habitat.
- ii. The potential habitat areas located between 20 and 100 meters of the proposed project development shall be segregated from the project site with high visibility plastic fencing or flagging and disturbance will not progress any further than the surveyed boundary of construction.

- iii. WPX shall restrict all personnel associated with the project to areas within the boundary of project disturbance. Exceptions may be made as requested to BLM botanist or designated botany monitor.
 - iv. The proposed construction within a 100-meter buffer of mapped potential habitat shall only occur outside of the April through June plant growth period (Spackman et al. 1997) for DeBeque phacelia during flowering years. Determination of a non-flowering year shall be made by the BLM botanist, in conjunction with the USFWS.
 - v. Surface disturbing activities located within 100 meters of mapped delineated potential habitats shall have dust control measures implemented. Dust abatement applications shall be limited to water only to prevent negative impacts from additives.
 - vi. No herbicide treatment associated with the GM 11-28 project or its associated features shall be allowed within 20 meters of the suitable or marginally suitable habitat areas, and weed treatment in this buffer area shall be limited to manual treatments only. Treatments within the 20- to 100-meter buffer shall be limited to spot spraying or wicking, or manual treatment. No broadcast spraying shall be permitted.
 - vii. If botany surveys are conducted at the appropriate time of year, in a year when DeBeque phacelia plants are reliably present at known sites of similar elevation and moisture conditions, and no DeBeque phacelia plants are found within the mapped habitat areas, the protections listed above shall no longer be necessary.
- b. *For Ute lady's-tresses Orchid:*
- i. No new surface disturbing activities shall occur within 30 meters of the edge of delineated suitable habitat, which is the same buffer disturbance for the new pipeline bore as for the existing pipeline bore under Parachute Creek.
 - ii. Dust abatement applications applied within 100 meters of mapped suitable habitat shall be limited to water only to prevent negative impacts from additives.
 - iii. Herbicide treatment of noxious weeds associated with the pipeline installation across Parachute Creek, and within 100 meters of the identified suitable habitat for Ute lady's-tresses, shall be limited to spot spraying or wicking, or manual treatment. No broadcast spraying shall be permitted within this buffer area.
 - iv. If additional botany surveys are conducted at the appropriate time of year for Ute lady's-tresses and no plants are found, the protections listed above shall no longer be necessary.

BUREAU OF LAND MANAGEMENT

Colorado River Valley Field Office
2300 River Frontage Road
Silt, CO 81652

DOWNHOLE CONDITIONS OF APPROVAL Applications for Permit to Drill

Operator: WPX Energy Rocky Mountain LLC
Lease Number: COC24099
Pad(s): GM 11-28
Engineer: Peter Cowan
Surface Location: Garfield County; Lot 4 Sec. 28 T6S R96W

See list of wells following the COAs.

1. Twenty-four hours *prior* to (a) spudding, (b) conducting BOPE tests, (c) cementing/running casing strings, and (d) within 24 hours *after* spudding, the CRVFO shall be notified. One of the following CRVFO inspectors shall be notified by phone. The contact number for all notifications is: 970-876-9064. The BLM CRVFO inspectors are Julie King, Lead PET; David Giboo, PET; Greg Rios, PET; Tim Barrett, PET; Alex Provstgaard, PET; Brandon Jamison, PET.
2. A CRVFO petroleum engineer shall be contacted for a verbal approval prior to commencing remedial work, plugging operations on newly drilled boreholes, changes within the drilling plan, sidetracks, changes or variances to the BOPE, deviating from conditions of approval, and conducting other operations not specified within the APD. Contact Shauna Kocman or Peter Cowan for verbal approvals (contact information below).
3. If a well control issue or failed test (e.g. kick, blowout, water flow, casing failure, or a bradenhead pressure increase) arises during drilling or completions operations, Shauna Kocman or Peter Cowan shall be notified within 24 hours from the time of the event. IADC/Driller's Logs and Pason Logs (mud logs) shall be forwarded to CRVFO – Petroleum Engineer, 2300 River Frontage Road, Silt, CO 81652 within 24 hours of a well control event.
4. The BOPE shall be tested and conform to Onshore Order No. 2 for a **10M** system and recorded in the IADC/Driller's log. A casing head rated to 10,000 psi or greater shall be utilized.
5. Flexible choke lines shall meet or exceed the API SPEC 16C requirements. Flexible choke lines shall be effectively anchored, have flanged connections, and configured to the manufacturer's specifications. Manufacturer specifications shall be kept with the drilling rig at all times and immediately supplied to the authorized officer/inspector upon request. Specifications at a minimum shall include acceptable bend radius, heat range, anchoring, and the working pressure. All flexible choke lines shall be free of gouges, deformations, and as straight/short as possible.
6. An electrical/mechanical mud monitoring equipment shall be function tested prior to drilling out the surface casing shoe. As a minimum, this equipment shall include a trip tank, pit volume totalizer, stroke counter, and flow sensor.
7. Prior to drilling out the surface casing shoe, gas detecting equipment shall be installed in the mud return system. The mud system shall be monitored for hydrocarbon gas/pore pressure changes, rate of penetration, and fluid loss.

8. A gas buster shall be functional and all flare lines effectively anchored in place, prior to drilling out the surface casing shoe. The discharge of the flare lines shall be a minimum of 100 feet from the wellhead and targeted at bends. The panic line shall be a separate line (not open inside the buffer tank) and effectively anchored. All lines shall be downwind of the prevailing wind direction and directed into a flare pit, which cannot be the reserve pit. The flare system shall use an automatic ignition. Where noncombustible gas is likely or expected to be vented, the system shall be provided supplemental fuel for ignition and maintain a continuous flare.
9. After the surface/intermediate casing is cemented, a Pressure Integrity Test/Mud Equivalency Test/FIT shall be performed on the first well drilled in accordance with OOGO No. 2; Sec. III, B.1.i. to ensure that the surface/intermediate casing is set in a competent formation. This is not a Leak-off Test, but a formation competency test, insuring the formation at the shoe is tested to the highest anticipated mud weight equivalent necessary to control the formation pressure to the next casing shoe depth or TD. Submit the results from the test via email (picowan@blm.gov) on the first well drilled on the pad or any horizontal well and record results in the IADC log. Report failed test to Shauna Kocman or Peter Cowan. A failed pressure integrity test is more than 10% pressure bleed off in 15 minutes.
10. As a minimum, cement shall be brought to 200 feet above the Mesaverde. After WOC for the production casing, a CBL shall be run to verify the TOC and an electronic copy in .las and .pdf format shall be submitted to CRVFO – Petroleum Engineer, 2300 River Frontage Road, Silt, CO 81652 within 48 hours. If the TOC is lower than required or the cement sheath of poor quality, a CRVFO petroleum engineer shall be notified for remedial operations within 48 hours from running the CBL and prior to commencing fracturing operations.

A greater volume of cement may be required to meet the 200-foot cement coverage requirement for the Williams Fork Formation/Mesaverde Group. Evaluate the top of cement on the first cement job on the pad (Temperature Log). If cement is below 200-foot cement coverage requirement, adjust cement volume to compensate for low TOC/cement coverage.
11. On the first well drilled on this pad, a triple combo open-hole log shall be run from the base of the surface borehole to surface and from TD to bottom of surface casing shoe. This log shall be in submitted within 48 hours in .las and .pdf format to: CRVFO – Todd Sieber, 2300 River Frontage Road, Silt, CO 81652. Contact Todd Sieber at 970-876-9000 or asieber@blm.gov for clarification.
12. Submit the (a) mud/drilling log (e.g. Pason disc), (b) driller's event log/operations summary report, (c) production test volumes, (d) directional survey, and (e) Pressure Integrity Test results within 30 days of completed operations (i.e. landing tubing) per 43 CFR 3160-9 (a).
13. Prior to commencing fracturing operations, the production casing shall be tested to the maximum anticipated surface treating/fracture pressure and held for 15 minutes without a 2% leak-off. If leak-off is found, Shauna Kocman or Peter Cowan shall be notified within 24 hours of the failed test, but prior to proceeding with fracturing operations. The test shall be charted and set to a time increment as to take up no less than a quarter of the chart per test. The chart shall be submitted with the well completion report.
14. During hydraulic frac operations, monitor the bradenhead/casing head pressures throughout the frac job. Frac operations shall be terminated upon any sharp rise in annular pressure (+/- 40 psi or greater) in order to determine well/wellbore integrity. Notify Shauna Kocman or Peter Cowan immediately.
15. Per 43 CFR 3162.4-1(c), no later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in a case of a well which has been off production for more than 90 days, the operator shall notify the authorized

officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed.

Contact Information

Shauna Kocman, PhD, PE
Petroleum/ Environmental Engineer

Office: (970) 876-9061
Mobile: (970) 456-5602
skocman@blm.gov

Peter Cowan
Petroleum Engineer

Office: (970) 876-9049
Mobile: (970) 309-8548
picowan@blm.gov

List of Wells			
Proposed Pads	Proposed Wells	Surface Locations	Bottom Hole Locations
GM 11-28 (Fee Surface)	Puckett GM 701-28-HN1	T6S R96W, Sect. 28 Lot 4	T6S R95W, Sect. 21 Lot 1

FONSI

DOI-BLM-CO-N040-2013-0103-EA

The Environmental Assessment (EA) analyzing the environmental effects of the Proposed Action has been reviewed. The project design and approved mitigation measures result in a Finding of No Significant Impact (FONSI) on the human environment. Therefore, an Environmental Impact Statement (EIS) is not necessary to further analyze the environmental effects of the Proposed Action.

DECISION RECORD

DECISION: It is my decision to approve the Proposed Action as described and analyzed in this EA. This decision would provide for the orderly, economical, and environmentally sound exploration and development of oil and gas resources on a valid Federal oil and gas lease.

RATIONALE: The bases for this decision are as follows:

1. Approval of the Proposed Action is validating the rights granted with the Federal oil and gas leases to develop the leasehold to provide commercial commodities of oil and gas.
2. The environmental impacts would be avoided, minimized, or offset with the mitigation measures incorporated into the Proposed Action or attached and enforced by BLM as Conditions of Approval (COAs).
3. This Decision does not authorize the initiation of surface-disturbing activities on BLM lands or of drilling activities associated with any Federal oil and gas well. Initiation of activities related to additional Federal oil and gas wells to be drilled from the existing well pad shall commence only upon approval by BLM of the Application for Permit to Drill (APD).

MITIGATION MEASURES: The COAs presented in Appendix A of this project EA would be attached to the APD for the initial Puckett GM 701-28-HN1 horizontal well on the GM 11-28 well pad as identified in the Proposed Action. Because no APDs have yet been submitted by WPX for additional, directional wells planned for later drilling on the GM 11-28 pad, this EA has analyzed impacts associated with the additional wells based on information provided with the Notice of Staking (NOS) and does not include Downhole COAs for the additional, directional wells. Surface Use and Downhole COAs consistent with CRVFO Appendix A of this EA, revised as necessary based on new information or requirements and circumstances, would be attached to APDs for the additional, directional wells in conjunction with BLM's review and approval process.

NAME OF PREPARER: Jim Byers, Natural Resource Specialist

SIGNATURE OF AUTHORIZED OFFICIAL:



Allen B. Crockett, Ph.D., J.D.
Supervisory Natural Resource Specialist

DATE: Aug. 28, 2013