

NOV 25 1915

NOV 22 1915

4-683.

Mineral Survey No. 3240

Lot No.

ARIZONA Land District.

FIELD NOTES

OF THE SURVEY OF THE MINING CLAIM OF

HEYWARD M. GIBBES

KNOWN AS THE

FRACTION, MONSTER, BEAUTY, VICTORY, MINT, SUNRISE

VERDE Mining District,

YAVAPAI County, ARIZONA

Sections 21-22-28, ^{unsur.} / Township 16 N., Range 2 E.

Surveyed under instructions dated September 9, 1915

by J. WILLIAM WAARA, U. S. Deputy Mineral Surveyor

Claim located See Location notices, 1

Survey commenced September 16, 1915, 1

Survey completed September 23, 1915, 1

o 6-169

Address Attorney, John J. Hawkins, Prescott Arizona.

MINERAL SURVEY NO. 3240

MONSTER

Beginning at Cor.No.1, identical with Cor. No.4 Beauty lode of this survey, on line 1-2 Spring Lode Sur.No.1147 at N.36°-01'W. 811.3 feet from Cor. No.1, a limestone 8 x 10 x 22 inches long set twelve inches in the ground with a substantial mound of stone alongside; chiseled M-1-3240, B-4 with cross on top for exact corner point, wfrom which point;

The corner to sections 22-23-26-27; T.16 N.R.2 E. of the Gila and Salt River Base and Meridian, brs. S.61°-51'E. 6103.7 feet.

A lime stone reef six feet high and chiseled B x R, M-1-3240, brs. N.44°-50'E. 16.4 feet.

A limestone reef six feet high, and chiseled BxR, B-4-3240, brs. S.38°-23'E. 47.3 feet.

Thence S.54°-31'W.

1473.4 Witness corner to Cor.No.2, identical with ^{witness cor. for/} Cor.No.3 Beauty lode of this survey; a limestone rock in place 2 x 1 x 1 ft. exposed and chiseled W.C.M-2, B-3-3240 with cross for exact corner point.

1500.00 TO POINT FOR COR:NO.2, identical with Cor.No.3 Beauty lode of this survey, where it was impracticable to set a stone due to bed rock being close to the surface, so I establish-
ed a witness ^{heretofore described} corner at N.54°-31'E. 26.6 feet, and built substantial mounds of stone at the point for corner, from which corner point;

A limestone rock in place 1 x 1 x 0.6 feet exposed and chiseled B X R, M-2-3240, brs. N.36°-01'W. 18.9 feet.

A limestone rock in place 3 x 2 x 0.5 feet exposed and chiseled BxR, B-3-3240, brs. S.36°-01'E. 40.6 feet.

Thence N.36°-01'W.

290.0 WEST CENTER END, a mound of stone.

590.0 TO COR.NO.3, a sandstone 7 x 14 x 18 inches long set twelve inches in the ground with a substantial mound of stone

alongside; chiseled M-3-3240 with cross on top for exact corner point, from which point;

A rock in place (sandstone reef) six feet high, and chiseled B x R, M-3-3240, brs. N.29°-28'E. 100.1 feet.

No other bearings available.

Thence N.54°-29'E.

960.5 Cor.No.1 Stonewall Lode Sur.No.2443, a post 4 x 4 x 4.5 feet long set in a mound of stone, properly marked.

1407.0 In creek bed, flows northeasterly.

1500.00 TO COR.NO.4, on line 1-2 Stonewall Lode Sur.No.2443, at S.54°-29'W. 55.3 feet from Cor.No.2., a limestone 9 x 18 x 27 inches long set fifteen inches in the ground with a substantial mound of stone alongside; chiseled M-4-3240 with cross on top for exact corner point, from which point,

A rock in place being face of sandstone quarry, chiseled BxR, M-4-3240, brs. S.66°-00'W. 18.9 feet.

A rock in place sandstone reef 6 x 3 x 1^{ft.}/_{exposed} and chiseled BxR-M-4-3240, brs. S.14°-37'W. 63.2 feet.

Thence S.36°-01'E.

15.9 point for Cor.No.2 Spring Lode Sur.No.1147 at S.53°-45'W. 600 feet from Cor. No.3 of said lode.

30.0 In creek bed, flows northeasterly.

300.0 EAST CENTER END, a mound of stone.

590.9 TO THE PLACE OF BEGINNING. All corners are identical with their respective locations. Variation at all corners 15°-00'E.

BEAUTY

Beginning at Cor.No.1, on line 3-4 Mint lode of this survey, at S.54°-31'W. 53.4 feet from Cor. No.4/ and 1-2 Spring lode Sur. No. 1147, at N.36°-01'W.

211.5 feet from Cor. No.1, a limestone 4 x 9 x 22 inches long set twelve inches in the ground with a substantial mound of stone alongside; chiseled B-1-3240 with cross on top for exact corner point, from which point;

A sandstone boulder 4 x 4 x 3 feet exposed and chiseled BxR B-1, M-4, 3240, brs. N.54°-31'E. 81.9 feet.

The corner to sections 22-23-26-27, T.16 N.R.2 E.

of the Gila and Salt River Base and Meridian, brs. S.64°-33'E. 5569.9 feet.

No other bearings available.

Thence S.54°-31'W.

1435.3 Witness Corner to Cor.No.3 Mint lode of this survey, here-in-after described.

1446.6 Point for Cor.No.3 Mint lode of this survey.

1498.5 Witness corner to cor.No.2 Beauty Lode, a limestone reef four feet high, chiseled W.C.B-2-3240 with cross for exact corner point.

1500.0 TO POINT FOR COR.NO.2, where it was impracticable to set a stone due bed rock being close to the surface, so I established a witness ^{heretofore described} corner at N.54°-31'E. 1.5 feet, and built a substantial mound of stone at the point for corner, from which corner point,

A rock in place being limestone reef three feet high and chiseled ^{M-3/}BxR/B-2-3240, brs. N.54°-31'E. 35.5 feet.

A rock in place being a limestone 3 x 2 x 1 foot exposed and chiseled BxR,B-2-3240, brs. S.50°-29'W. 11.25 ft.

Thence N.36°-01'W.

300.0 WEST CENTER END, a mound of stone.

600.0 TO POINT FOR COR.NO.3, identical with Cor.No.2 Monster lode of this survey, previously described.

Thence N.54°-31'E.

26.6 Witness Cor. to cor.No.3 Beauty and Cor.No.2 Monster Lodes of this survey, previously described.

1500.0 TO COR. NO.4, identical with Cor. No.1 Monster Lode of this survey, previously described.

Thence S.36°-01'E.

300.0 EAST CENTER END, a mound of stone.

461.0 Cross wash, flows northeasterly.

600.0 TO THE PLACE OF BEGINNING. All corners are identical with their respective locations. Variation at all corners 15°-00'E.

MINT

Beginning at the point for corner No.1 on line 2-3

- 448.8 Fraction lode of this survey, at S.6°-44'W. 747.3 feet from Cor. No.3, where it was impracticable to set stone for corner due to point falling in small water course, so I established a witness corner at S.54°-26'W. 52.2 feet, it being a limestone rock in place 6 x 4 x 1 foot exposed and chiseled W.C.M-1-3240 with cross for exact corner point. From the true point for corner;
- A rock in place, limestone 4 x 3 x 1 foot exposed and chiseled B x R, M-1-3240, brs. S.41°-49'W. 44.6 ft.
- The corner to sections 22-23-26-27, T.16 N.R.2 E. of the Gila and Salt River Base and Meridian, brs. S.72°-17'E. 5333.3 feet.
- No other bearings available.
- Thence S.54°-26'W.
- 52.2 Witness Corner to Cor. No.1
- 745.0 Cross road brs. east and west.
- 882.5 Intersect line 3-4 Victory Lode of this survey at S.46°-35'W. 1018.1 feet from Cor. No.4.
- 1501.9 TO COR. NO.2, a limestone 4 x 9 x 20 inches long set twelve inches in the ground with a substantial mound of stone alongside; chiseled M-2-3240 with cross on top for exact corner point, from which point:
- A rock in place 2 x 3 x 1 foot exposed and chiseled BxR M-2-3240 brs. S.9°-07'E. 44.6 feet.
- A limestone boulder 3 x 2 x 1 foot exposed and chiseled BxR M-2-3240, brs. S.54°-39'W. 10.7 feet.
- Thence N.6°-44'E.
- 405.05 WEST CENTER END, a mound of stone.
- 420.0 Cross road, brs. east and west.
- 810.1 TO POINT FOR COR.NO.3, on line 1-2 Beauty lode of this survey, where it was impracticable to set stone corner, due to bed rock being close to the surface, so I established a witness corner at N.54°-31'E. 11.3 feet, it being a limestone rock in place 2 x 1.5 x 1 foot exposed and chiseled W.C.M-3-3240 with cross for exact corner point. At the point for corner I built a substantial mound of stone, from which point,

A rock in place being limestone reef three feet high, and chiseled BxR M-3, B-2-3240, brs. S.54°-31'W. 17.7 feet.

No other bearings available.

Thence N.54°-31'E. (from true cor. pt)

- 11.3 Witness Corner to cor. No.3
- 1446.6 Cor.No.1 Beauty lode of this survey, and intersect line 1-2 Spring lode Sur. No. 1147 at N.36°-01'W. 211.5 feet from Cor. No.1.
- 1482.7 Witness Corner to Cor.No.4 of this lode, a limestone 12 x 12 x 2 inches exposed and chiseled W C-M-4-3240 with cross for exact corner point, from which point,
- A rock in place being sandstone reef four feet high and chiseled BxR M-4, F-3, 3240, brs. S.20°-13'E. 57.6 feet.
- 1500.00 TO POINT FOR CORNER NO.4, where it was impracticable to set a stone corner due to point falling in water course, so I established a witness corner at S.54°-31'W. 17.3 ft. and built a substantial mound of stone at the point for corner, from which point,
- A sandstone boulder 4 x 4 x 3 feet exposed and chiseled BxR B-1, M-4-3240, brs. N.54°-31'E. 28.5 feet.
- Thence S.6°-44'W. (from true Cor. Pt.)
- 60.0 Point for Cor.No.3 Fraction Lode of this survey.
- 65.2 Witness corner to Cor.No.3 Fraction lode.
- 78.7 Intersect line 1-2 Spring Lode Sur. No.1147 at N.36°-01'W. 153.2 feet from Cor. No.1, and S.36°-01'E. 58.3 feet from its intersection with line 3-4 of this lode.
- 405.05 EAST CENTER END, a mound of stone.
- 619.2 Cor.No.4 Victory lode of this survey, hereinafter described.
- 807.3 TO THE PLACE OF BEGINNING. All corners are identical with their respective locations. Variation at all corners 15°-00'E.

VICTORY

Beginning at the point for Cor. No.1, identical with

Cor.No.2 Fraction Lode of this survey, and located on line
 at S.46°-35'W. 341.8 ft. from Cor.No.2 /
 2-3 Humboldt lode Sur. No.2463, where it was impracticable
 to set stone for corner due to the point falling in the center
 center of a wagon road, so I established a witness corner
 at N.6°-44'E. 30.2 feet, it being a limestone reef 10 x 1
 x 2 feet exposed and chiseled W.C. V-1, F-2, 3240 with cross
 for exact corner point, From the true point for corner;

A rock in place being limestone reef 10 x 2 x 3
 feet exposed and chiseled BxR V-1-3240, brs. N.23°-49'W.
 46.0 feet.

The corner to sections 22-23-26-27, T.16 N.R.2 E.
 of the Gila and Salt River Base and meridian, brs. S.80°-
 20'E. 5242.3 feet.

No other bearings available.

Thence S.46°-35'W.

1158.2 Cor.No.3 Humboldt Lode, ^{and Cor. No. 2 Vernon lode,} Sur.No.2463.

1500.0 TO COR. NO.2, a limestone 7 x 12 x 22 inches long set
 twelve inches in the ground with a substantial mound of
 stone alongside, chiseled V-2-3240 with cross on top for
 exact corner point, from which point,

A rock in place being a limestone 2 x 2 x 2 feet
 exposed and chiseled BxR V-2-3240, brs. S.63°-14'W. 40.3 ft.

No other bearings available.

On line 2-3 Vernon lode, Sur. No. 2463, 341.8 ft. from Cor. No.2.

Thence N.6°-44'E.

468.15 WEST CENTER END, a mound of stone.

936.3 TO COR. NO.3, a sand stone reef six feet high, chiseled
 V-3-3240, with cross for exact corner point and substantial
 mound of stone alongside, from which cor.

A sandstone reef six feet high and chiseled BxR V-3
 -3240, brs. N.43°-19'W. 10.1 feet.

A sandstone reef six feet high and chiseled BxR V-3
 -3240, brs. N.69°-30'E. 16.7 feet.

Thence N.46°-35'E.

481.9 Intersect line 1-2 Mint lode of this survey, at S.54°-
 26'W. 882.5 feet from Cor. No.1.

550.0 Cross road, brs. east and west.

1479.2 Witness Corner to Cor.No.4, a limestone reef 6 x 10 x 1 ft.

exposed and chiseled W.C.-V-4-3240, with cross for exact corner point.

1500.0 TO POINT FOR COR.NO.4, on line 2-3 Fraction lode of this survey at S.6°-44'E. 559.2 feet from Cor. No.3, where it was impracticable to set stone for corner as point fell in water course, so I established a witness corner^{heretofore described,} at S. 46°-35'W. 20.8 feet. From the true point for corner,

A rock in place, being a limestone reef three chiseled BxR V-4-3240/ feet high, brs. N.8°-32'E. 17.3 feet.

No other bearings available.

Thence S.6°-44'W.

188.1 Cor.No.1 Mint lode of this survey.

319.0 Cross road, brs. northeast to southwest.

468.15 EAST CENTER END, a mound of stone.

906.1 Witness corner to corner No. 1 of this lode and Cor.No.2 Fraction lode of this survey.

936.3 TO THE PLACE OF BEGINNING. All corners are identical with their respective locations. Variation at all corners, 15°-00'E.

FRACTION

Beginning at the point for corner No.1, located on line 3-4 Red Line Lode Sur.No. 1154 at N.6°-22'E. 60.4 feet from the point for Cor. No.3, and on line 3-4 Sunrise lode of this survey at N.47°-43'E. 577.1 feet from Cor.No. 3, where it was impracticable to set a stone for corner due to bed rock being close to the surface, so I established a witness corner at S.47°-43'W. 20.9 feet, it being a limestone reef 10 x 2 x 2 feet exposed and chiseled W.C.-F-1-3240 with cross for exact corner point, from which point;

A limestone reef six feet high and chiseled B x R R L-3 _ _ _ , F-1-3240, brs. N.23°-01'E. 39.3 feet.

A limestone reef three feet high and chiseled BxR F-1-3240, brs. S.88°-21'E. 72.6 feet.

The Cor. to Secs. 22, 23, 26 & 27, T16N, R2E, G & S.R. B & M, brs. S 71° 35' E 4733.8 ft

Thence S.47°-43'W.(From true cor.Pt)

20.9 Witness corner to cor.No.1 Fraction lode, heretofore described.

457.4 SOUTH CENTER END, a mound of stone.

- 577.1 Cor.No.3 Sunrise lode of this survey and the intersection with line 1-2 Humboldt lode Sur. No. 2463 at S.11°-33'E. 7.9 feet from Cor. No.2.
- 914.8 TO THE POINT FOR COR.NO.2, identical with Cor.No.1 Victory lode of this survey, previously described.
On line 2-3 Humboldt lode, Sur. No. 2463, S 46° 35' W, 341.8 ft. from Cor. No. 2;
Thence N.6°-44'E.
- 30.2 Witness corner to cor.No.3 ~~fraction lode~~ and Cor.No.1 Victory lode of this survey, previously described.
- 468.15 East Center end Victory lode of this survey.
- 617.3 Cross road, brs. northeast to southwest.
- 748.2 Cor.No.1 Mint Lode of this survey.
- 936.3 Cor.No.4 Victory lode of this survey.
- 1150.45 East Center End Mint Lode of this survey.
- 1476.8 Intersect line 1-2 Spring lode Sur.No. 1147 at N.36°-01'W. 153.2 feet from Cor. No.1
- 1490.4 Witness Corner to Cor.No.3 of this lode, a limestone 6 x 8 x 22 inches long set twelve inches in the ground with a substantial mound of stone alongside; chiseled W.C.-F-3-3240 with crosson top for exact corner point,
A rock in place being sandstone reef four feet high and chiseled BxR M-4,F-3-3240, brs. N.88°-25'E. 12.3ft.
- 1495.5 TO THE POINT FOR COR.NO.3, on line 4-1 Mint lode of this survey at S.6°-44'W. 60.0 feet from Cor. No.4, where it was impracticable to set stone for corner due to steep slope, so I established a witness corner at S.6°-44'W. 5.2 feet, and built a substantial mound of stone alongside.
No bearings available.
Thence N.47°-43'E.
- 411.4 Intersect line 3-4 Railroad lode Sur.No.1418 at N.25°-39'W. 62.2 feet from Cor. No.4.
- 457.4 NORTH CENTER END, a mound of stone.
- 582.3 Intersect line 3-4 Spring lode Sur. No.1147, at N.35°-49'W. 231.3 feet from Cor. No.4 and 138.8 feet from its intersection with line 1-4 railroad lode Sur.No.1418. Cor.No.1 Spring lode brs. S. 54° 05' W, 590.7 ft. from Cor. No. 4 said lode.
- 844.5 Intersect line 1-2 Railroad Lode Sur.No. 1418, identical with line 1-2 Warrior Lode Sur.No.1074A, at N.17°-56'W.

239.5 feet from Cor. No.1 Railroad Lode and 89.4 feet from Cor.No.2 Warrior Lode,

900.2 TO COR. NO.4, a sandstone 5 x 9 x 27 inches long set fifteen inches in the ground with a substantial mound of stone alongside; chiseled F-4-3240 with cross on top for exact corner point, from which point,

A rock in place 1 x 1 x 0.3 ft. exposed and chiseled BxR-F-4-3240, brs. N.87°-13'W. 31.4 feet.

Cor.No.2 Warrior Lode Sur.No. 1074A, a sandstone 5 x 12 x 12 inches exposed and chiseled W-No.1-1074A ; brs. S.6°-22'W. 123.3 feet.

Thence S.6°-22'W.

123.3 Cor.No.2 Warrior Lode Sur.No.1074A, identical with Cor. No.4 Red Line Lode Sur.No. 1154, and point of intersection with line -1-2 Railroad Lode Sur.No.1418, at N.17°-56'W. 150.1 feet from Cor.No.1.

245.0 Cross road, brs. northeast to southwest.

288.7 Intersect line 1-4 Railroad Lode Sur.No.1418 at N.72°-05'E. 318.3 feet from Cor. No.4, and 128.3 feet from its intersection with line 3-4 Spring Lode Sur.No.1147, at N.35°-49'W. 92.5 feet from Cor.No.4 of said Spring Lode.

1484.3 TO THE PLACE OF BEGINNING. All corners are identical with their respective locations variation at all corners N.15°-00'E.

SUNRISE

Beginning at Cor.No.1, identical with point for cor. No.1 Lucky Boy Lode Sur.No.1416, and Cor.No.3 Granny Lode Sur.No.3239, where it was impracticable to set stone for corner due to bed rock being close to the surface, so I established a witness corner at N.11°-33'W. 4.8 feet, it being a limestone reef six feet exposed and chiseled W.C.

S-1-3240 with cross for exact corner point. From the point for corner, Cor. No. 2 Lucky Boy lode, Survey No. 1416 brs. N.87°W. 591.3 ft, and intersection line 1-2 Said Lucky Boy lode with line 1-2 Lucky Boy lode, Sur.No. 1359, brs. N.87°W. 67.64 ft.

A rock in place (limestone reef) five feet high and chiseled BxR S-1-3240 brs. S.7°-22'W. 8.7 feet.

- 4.88 A rock in place (limestone reef) five feet high and chiseled BxR L B _____ brs. S.41°-43'W. 12.8 ft.
- The bearing rock for cor.No.1 Lucky Boy Lode Sur. No. 1350, and chiseled B X R, L B _____ brs. S.88°-36'E. 93.5 feet.
- The corner to sections 22-23-26-27, T.16 N.R.2 E. of the Gila and Salt River Base and Meridian, brs. S.73°-31'E. 4127.1 feet.
- Thence S.47°-43'W.
- 594.5 Intersect line 2-3 Lucky Boy Lode Sur.No.1350 at S.11°-27'E. 408.1 feet from the point for Cor.No.2
- 605.5 Cor.No.4 Harold Lode Sur.No.2463.
- 1109.9 TO COR. NO.2, identical with Cor.No.1 Humboldt Lode Sur.No.2463 and located on line 3-4 Harold Lode Sur.No.2463 at S.47°-43'W. 504.4 feet from Cor.No.4, a limestone 5 x 9 x 22 inches long set twelve inches in the ground with a substantial mound of stone alongside, chiseled S-2-3240, H.1-2463, with a cross on top for exact corner point, from which point,
- A limestone rock in place 1 x 1.5 x 0.5 feet exposed and chiseled BxR S-2-3240, H-1-2463, brs. N.79°-11'E. 13.5 feet.
- No other bearing available.
- Thence N.11°-33'W.
- 106.0 Cross road, brs. southwest to northeast.
- 312.0 Cross same road, brs. southeast to northwest.
- 348.55 WEST CENTER END, a mound of stone.
- 352.0 East Center End Humboldt, Lode Sur.No.2463.
- 685.2 Witness Corner to Cor.No.3 of this lode, a limestone reef 2 x 2 x 0.5 feet exposed and chiseled W.C.-S-3-3240 with cross for exact corner point.
- 697.1 TO POINT FOR COR.NO.3, on line 1-2 Humboldt Lode Sur. No.2463 at S.11°-33'E. 7.9 feet from Cor. No.2, and line 1-2 Fraction Lode of this survey at S.47°-43'W. 577.1 feet from Cor.No.1, where it was impracticable to set stone for corner due to bed rock being close to the surface, so I established a witness corner at S.11°-33'E. 11.9 feet.

From the true point for corner;

A limestone rock in place 2 x 0.6 x 1 foot exposed and chiseled B x R S-3-3240, H-No.2-2463, brs. N.62°-53'W. 5.6 feet.

No other bearings available.

Thence N.47°-43'E.

- 119.7 South Center End Fraction Lode of this survey.
- 556.2 Witness corner to Cor.No.1 Fraction Lode of this survey.
- 577.1 Point for Cor.No.1 Fraction Lode of this survey, and point of intersection with line 3-4 Red Line Lode Sur.No.1154, at N.6°-22'E. 60.4 feet from the point for Cor. No.3 of said lode.
- 1109.9 TO COR. NO.4, a limestone 8 x 9 x 27 inches long set fifteen inches in the ground with a substantial mound of stone alongside, chiseled S-4-3240 with cross on top for exact corner point, from which point;
- A boulder 10 x 6 x 3 feet exposed and chiseled BxR S-4-3240, brs. S.28°-46'W. 43.5 feet
- A rock in place limestone reef four feet high and chiseled BxR S-4-3240, brs. N.38°-21'E. 20.4 feet.
- Thence S.11°-33'E.
- 348.55 EAST CENTER END, a mound of stone.
- 450.7 Intersect line 2-3 Red Line Lode Sur.No.1154, and identical with line 3-4 Lucky Boy Lode Sur. No.1416, at S.87°-18'E. 491.6 feet from Cor.Nos 3 respectively, and N.87°-18'W. 78.7 feet from Cor.Nos.2 and 4 respectively. Cor. No. 3 said Lucky Boy lode brs. N. 12° 6' E. 238.9 ft. from Cor. No.2 thereof.
- 692.3 Witness Corner to cor.No.1
- 693.5 Intersect line 1-2 Lucky Boy Lode Sur.No.1350 at east 520.8 feet from the point for Cor.No.2 and 66.82 feet from its intersection with line 1-2 Lucky Boy Lode Sur.No.1416, and West 79.2 feet from the point for Cor.No.1.
- 697.1 TO THE PLACE OF BEGINNING.All corners are identical with their respective locations. Variation at all corners N.15°-00'E.

LODE LINES

As near as can be determined from the present developments, the veins on the respective lodes extend as follows from their discoveries;

MONSTER Lode.

S. 54° - 29' W. 1409 feet and N. 54° - 29' E. 91 feet.

BEAUTY Lode

S. 54° - 31' W. 1448 feet and N. 54° - 31' E. 52 ft.

MINT Lode

S. 54° - 31' W. 750 feet and N. 54° - 31' E. 750 feet.

VICTORY Lode

S. 46° - 35' W. 1456.6 feet and N. 46° - 35' E. 43.4 feet.

FRACTION Lode.

S. 6° - 44' W. 1102.6 feet and N. 6° - 44' E. 393 feet.

SUNRISE Lode

S. 47° - 43' W. 485 feet and N. 47° - 43' E. 624.9 feet.

AREAS

MONSTER Lode

Total area	-----	Acres	Acres
			20.331

BEAUTY Lode

Total area	-----	Acres	Acres
			20.660

MINT Lode

Total area	-----	Acres	Acres
			20.623

Area in conflict with

Spring Lode Sur.No.1147	0.035
-------------------------	-------

Victory Lode this survey	1.409
--------------------------	-------

VICTORY Lode

Total area	-----	Acres	Acres
			20.660

FRACTION Lode

Total area	-----	Acres	Acres
			20.431

Area in conflict with

Railroad Lode Sur.No.1418	1.243
---------------------------	-------

Warrior Lode Sur.No.1074A	0.052
---------------------------	-------

Humboldt lode Sur.No.2463	0.028
---------------------------	-------

Spring Lode Sur.No.1147	2.690
-------------------------	-------

Common conflict of Spring and Railroad Lodes.	0.404
---	-------

SUNRISE Lode

Total area	-----	Acres	Acres
			15.267

Area in conflict with

Red Line Lode Sur.No.1154	2.709
---------------------------	-------

Lucky Boy Lode Sur.No.1416	2.948
----------------------------	-------

Lucky Boy lode Sur.No.1350	2.391
----------------------------	-------

Common conflict of Lucky Boy Sur.	
-----------------------------------	--

No.1350 & Lucky Boy Sur.No.1416	0.002
---------------------------------	-------

14

LOCATION

This survey is located upon unsurveyed land in Sections 21 - 22- and 28, T.16 N.R.2 E. of the Gila and Salt River Base and Meridian, within the Prescott National Forest, Verde Mining District, Yavapai County, State of Arizona.

EXPENDITURE OF FIVE HUNDRED DOLLARS

I hereby certify that the value of the labor and improvements made upon, or for the benefit of each location embraced in said mining claims, by the claimant or his grantors is not less than five hundred dollars, and that said improvements consists of:

MONSTER

No.1, Discovery cut, the center of which brs. S.54°-29'W. 91.0 feet from East center end, 5 x 16 x 11 foot face.

Value \$150.00

No.2, cut the mouth of which brs. S.88°-40'W. 96 ft. from the east center end, 4 x 22 x 8 foot face.

Value \$125.00

To be credited to this claim is an equal undivided one half interest in workings of improvement No.3 of Beauty Lode, as set forth under heading "Common Improvements"

Value \$270.00

To be credited to this claim is an equal undivided one sixth interest in workings of improvement No.3 of Mint Lode, as set forth under heading "Common Improvements"

Value \$622.00

BEAUTY

No.1, Discovery cut and shaft, the center of shaft brs. S.54°-31'W. 52 feet from east center end, cut 4 x 6 x 6 foot face, and shaft 4 x 6 x 11 feet deep.

Value Cut &
shaft \$175.00

No.2 , cut, the mouth of which brs. N.71°-27'W. 82

feet from the east center end, 5 x 15 x 10 foot face.

Value \$150.00

No.3, Cut and tunnel, the mouth of cut brs. S.68° - 50'W. 173 feet from Cor.No.1, cut 4 x 13 x 11 foot face, brs. N.80°W.to mouth of tunnel, 4 x 6[#] running thence N.80°W. 13 feet, thence N.60°W. 31 feet to face, having a total length of tunnel of 44 feet.

Value Cut \$100.00
Tunnel 440.00

To be credited to this claim is an equal undivided one half interest in workings of above improvement No.3, as set forth under heading "Common Improvements"

Value \$270.00

To be credited to this claim is an equal undivided one sixth interest in workings of improvement No.3 Mint lode, as set forth under heading "common improvements"

Value \$622.00

MINT

No.1 Discovery Cut, the center of which brs. S.54° - 31'W. 750 feet from the east center end, 4 x 19 x 12 foot face.

Value \$150.00

No.2, cut, the mouth of which brs. S.53° - 40'W. 745 feet from the east center end, 5 x 16 x 10 foot face, caved.

Value \$ 150.00

No.3, Tunnel, and cut, the mouth of cut brs. S.49° - 10' W. 177 feet from Cor. No.4, 4 x 6^{ft.} running S.53° - 02'E. 72.9 feet to sta. 1, thence S.59° - 32'E. 150.7 feet to sta.2, thence S.71° - 47'E. 74.0 feet to sta. 3, thence S.75° - 47'E. 35.6 feet to face, also from sta. 3 S.6° - 28'W. 40.0 feet to face, having a total length of 373.20 feet.

Value \$3732.00

To be credited to this claim is an equal undivided one sixth interest in workings of above improvement No.3, as set forth under heading "Common Improvements".

Value \$622.00

VICTORY

No.1 Discovery cut, the center of which brs. S.46° -

35'W. 43.4 feet from East Center End, 4 x 24 x 12 foot face.

Value \$225.00

To be credited to this claim is an equal undivided one sixth interest in workings of improvement No.3 Mint lode, as set forth under heading "Common Improvements".

value \$622.00

FRACTION

No.1 Discovery cut and shaft, the center of shaft brs. S.6°-44'W. 393 feet from North center end, cut 5 x 6 x 4 foot face and shaft 5 x 6 x 10 feet deep.

value \$150.00

No.2 Cut, the center of which brs. N.8°-55'E. 563 feet from Cor. No.2, 4 x 15 x 10 foot face, caved.

Value \$100.00

No.3, cut, the mouth of which brs. S.13°-50'W. 502 feet from Cor. No.4, 4 x 16 x 10 foot face, caved.

value \$100.00

To be credited to this claim is an equal undivided one sixth interest in workings of improvement No.3 Mint lode, as set forth under heading "Common Improvements"

value \$622.00

SUNRISE.

No.1 Discovery cut, the center of which brs. N.47°-43'E. 485 feet from West center end, 4 x 16 x 11 foot face, caved.

value \$125.00

No.2, Cut, the mouth of which brs. N.54°-20'E. 333 feet from Cor. No.3, 4 x 18 x 10 foot face, caved.

Value \$125.00

To be credited to this claim is an equal undivided one sixth interest in workings of improvement No.3 Mint lode, as set forth under heading "Common Improvements"

Value \$622.00

COMMON IMPROVEMENTS

Improvement No.3 Beauty Lode a tunnel was run as a deep level tunnel to develop the Beauty and Monster lodes

An old cut 4 x 16 x 9 foot face, brs. N.63°-17'W.
107 feet, from east center end.

Mint lode

An old cut, 5 x 16 x 10 foot face, brs. S.57°-50'W.
755 feet, from east center end.

Fraction Lode

An old cut, 4 x 15 x 10 foot face, brs. N.10°-55'E.
558 feet from Cor. No.2.

An old cut, 4 x 10 x 10 foot face, brs. S.16°-20'W.
492 feet from Cor. No.4

Sunrise lode

An old cut, 4 x 16 x 10 foot face caved, brs, N.57°-
25'E. 363 feet from Cor. No.3.

ADJOINING CLAIMS.

MONSTER

On the northwest by the Stonewall Lode Sur.No.
2443, Haynes Copper Company, claimant, on the northeast
by the Spring Lode Sur.No.1147, G.W.Hull claimant, and
on the west and southwest by Public Domain.

BEAUTY

On the northeast by the Spring Lode Sur.No.1147,
G.W.Hull claimant, and on the southwest by Public Domain.

MINT

On the north by Spring Lode Sur.No.1147, G.W.
Hull claimant, and on the west by Public Domain.

VICTORY

On the south by Humboldt^{and Vernon} Lode Sur.No.2463, Verde
Grande Copper Company, claimant, and on the west by Public
Domain.

FRACTION

On the north by Spring Lode Sur.No.1147, G.W.Hull
claimant, Rail Road Lode Sur.No.1418 and Warrior Lode Sur.
No.1074A, G.W.Hull, claimant, on the east by Red Line Lode^{Sur.No.1154}
Hull Copper Company, claimant, and on the south by Humboldt
lode Sur.^{No.}2463, Verde Grande Copper Company, claimant.

1951-52. SUNRISE

On the east by Red Line Sur.No.1154, Lucky Boy lode Sur.No.1416, and Lucky Boy lode Sur.No.1350, Hull Copper Company, claimant, on the south by Harold Lode Sur.No.2463 and west by Humboldt Lode Sur.No. 2463, Verde grande Copper Company claimant.

INSTRUMENT

This survey was made with a Lietz Light Mountain transit-theodolite, No.13-5929. The courses were deflected from the true meridian, as determined by observation by the use of Saegmuller Solar Attachment. The distances were measured with a 500 and 300 foot steel tape.

REPORT

The corner to sections 22-23-26-27 is an iron post properly set and marked with the number of sections, as described in the field notes of said section. This is the nearest corner of the public survey, to any claim of the survey, that could be found and identified

Survey No.1147

Spring Lode. Cors No. 1-3-4 are stones properly set and chiseled (some marks obliterated) with number of survey and corner. Cor.No.2 is missing as also its bearings so the point for corner was established from the calls in the official records for Sur.No. 1147. I do not agree with courses and distances of lines 1-2, 1-4 and 3-4 of this lode

Survey No. 2443

Stonewall Lode. Corners 1 and 2 are post properly set and scribed with number of corner and survey. I do not agree with course and distance of line - 1-2 of this lode.

Survey No. 1418

Railroad Lode. All corners are properly set but markings on corners 1 and 4 are obliterated, while corners 2 and 3 are legible. I do not agree with the courses and distances of this lode.

Survey No. 1074A.

Warrior lode. Corners 1 and 2 are stones properly

set and chiseled with the number of corner and survey.

Survey No. 1154

Red Line Lode. Cor.No.3 is out of place but point for corner was determined from the calls in the official records giving connection to bearing rock. Cor.No.4 is identical with Cor. No.2 Warrior lode and is properly set and chiseled. Cor. No.2 is in place properly set and chiseled with number of corner and survey. I do not agree with courses and distances of lines of this survey,

Survey No. 1416

Lucky Boy Lode, All corners are missing with the exception of corner No.4 identical with cor,No.2 Red Line Lode Sur. No. 1154. Corners 1 and 3 were established from the calls in the official records of said survey giving connection to bearing rocks, and corner No.2 was established from the calls in the official records for end line of said survey.

Survey no. 1350

Lucky Boy Lode. Corners 1 and 2 were missing, and were established from the calls in the official records of said survey, by connection with bearing rock, and course and distance of end line.

Survey No. 2463

Harold and Humboldt lodes and All corners of above survey/ adjoining this survey are stones properly set and chiseled with number of corner and survey. Cor. No.3 Humboldt is missing but monument is in place. I do not agree with courses of this survey.

The discrepancies found existing between the claims as marked by the location monuments and as described in the location notices are due to errors in the location notices.

The discrepancies between the lines of this survey and of other prior surveys are due to errors in the latter.

J. William W. W. W.
U.S. MINERAL SURVEYOR

FINAL OATHS FOR SURVEYS.

LIST OF NAMES.

A list of the names of the individuals employed by J. WILLIAM WAARA

United States ~~Deputy~~ Mineral Surveyor, to assist in running, measuring, and marking the lines, corners, and boundaries described in the foregoing field notes of the survey of the mining claim of

HEYWARD M. GIBBES

known as the MONSTER, BEAUTY, MINT, SUNRISE, VICTORY, FRACTION

and showing the respective capacities in which they acted.

James M. SULLIVAN, Chainman.

....., Chainman.

....., Axman.

....., Flagman.

FINAL OATHS OF ASSISTANTS.

~~Was~~ I, James M. Sullivan

and, do solemnly swear that we assisted J. WILLIAM

WAARA, United States ~~Deputy~~ Mineral Surveyor, in marking the corners and surveying

the boundaries of the mining claim of HEYWARD M. GIBBES

known as the MONSTER, BEAUTY, MINT, SUNRISE, VICTORY, FRACTION

represented in the foregoing field notes as having been surveyed by said ~~deputy~~ mineral surveyor and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, faithfully and correctly executed, and the corner and boundary monuments established according to law and the instructions furnished by the United States Surveyor-General for ARIZONA

James M. Sullivan, Chainman.

....., Chainman.

....., Axman.

....., Flagman.

Subscribed and sworn to by the above-named persons before me this 24 th

day of September 1915

[Handwritten Signature]
Notary Public

My Commission Expires May 7, 1918.

FINAL OATH OF U. S. ~~DEPUTY~~ MINERAL SURVEYOR

I, J. WILLIAM WAARA, U. S. ~~Deputy~~ Mineral Surveyor, do solemnly swear that, in pursuance of instructions received from the United States Surveyor General for ARIZONA, dated SEPTEMBER 9, 1915

, I have, in strict conformity to the laws of the United States, the official regulations and instructions thereunder, and the instructions of said Surveyor General, faithfully and correctly executed the survey of the Mining Claim of HEYWARD M. GIBBES

known as the FRACTION, MONSTER, BEAUTY, VICTORY, MINT, SUNRISE

situate in VERDE Mining District,

YAVAPAI County, ARIZONA

in Sections 21, 22, 28 / unsur. Township No. 16 N., Range No. 2 E.

and designated as Survey No. 3240, as represented

in the foregoing field notes, which accurately show the boundaries of said mining claim as distinctly marked by monuments on the ground, and described in the attached copy of the location certificate, which was received by me from the Surveyor General with said instructions, and that all the corners of said survey have been established and perpetuated in strict accordance with the law, official regulations and instructions thereunder; and I do further solemnly swear that the foregoing are the true and original field notes of said survey and my report therein, and that the labor expended and improvements made upon said mining claim by claimant or his grantors are as therein fully stated, and that the character, extent, location and itemized value thereof are specified therein with particularity and full detail, and that no portion of said labor or improvements so credited to this claim has been included in the estimate of expenditures upon any other claim.

J. William Waara
U. S. ~~Deputy~~ Mineral Surveyor.

Subscribed and sworn to by the said J. WILLIAM WAARA

U. S. ~~Deputy~~ Mineral Surveyor, before me

this 5th day of October, 1915,

Daisy D. Jones
Notary Public

My commission expires
August 23d. 1917.

AMENDED
Notice of Mining Location
LODE CLAIM

23
SEP. 7 1915

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Fraction,
Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable
mineral deposits, was entered upon and located for the purposes of exploration and purchase by
H.M.Gibbes and F.S.Stephen, both citizens of the United States,

Locator must insert either "a citizen of the United States," or "who has declared his intention to become a citizen of the United States."
the undersigned, on the 6, day of Aug., 1915.

The length of this claim is 1493.9 feet,
and 394.0 claim 394.0 feet,
in a northerly direction and 1099.9

300 feet in a southerly direction from
the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with
300 feet in width of the surface grounds, on each
side of the center of said claim. The general course of the lode deposit and premises is from the
north to the south

The claim is situated and located in the Verde Mining District, in
Yavapai County, in the State of Arizona, about 1500 feet
in a westerly direction from the United Verde mine and
smelter,

The surface boundaries of the claim are marked upon the ground as follows: Beginning at
a monument of stone,

at a point in a northerly direction 394.0 feet from
the discovery shaft (at which this notice is posted,) being in the center of the northerly
end line of said claim; thence N.48°-00' E. 457.4 feet to a mon.,
of stone, being the N.E. corner of said claim;
thence S.7°-01' W. 1493.9 feet to a mon., of stone, being at the
S.E. corner of said claim; thence S.48°-00' W.457.4 feet
to a mon., of stone at the center of the southerly end of said claim;
thence S.48°-00' W. 457.4 feet to a mon., of stone, being at the
S.W. corner of said claim; thence N.7°-01' E. 1493.9
feet to a mon., of stone at the N.W. corner of said claim;
thence N.48°-00' E. 457.4 feet to the place of the beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United
States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws
of the Territory of Arizona," approved March 16, 1901.

This is an Amended Location Notice of the Fraction
Mining Claim, located by Thomas Fryer,
on the 8, day of
January, 1912, and recorded in Book 92, of Records of Mines, at
page 26, in the office of the County Recorder of the aforesaid County of Yavapai
to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors
in the description in the said Original Location Notice.

Dated and posted on the ground this 6, day of Aug., 1915.

H.M.Gibbes.

F.S.Stephen.

ss.

County of

I, County Recorder in and for the County and State aforesaid, do hereby certify that the within instrument was filed for record ato'clock.....M., on this day of, 191....., and duly recorded in Book No..... of Records of County, Arizona, at pages.....

Witness my hand and official seal the day and year first above written.

..... County Recorder.

AMENDED

Notice of Location

LODE CLAIM

Fraction.

Dated Aug. 6, 1915.

Filed and Recorded at request of

Jno. J. Hawkins,

Aug., 7th., A. D. 1915.

at 3:05- 0'clock P.M.


Book 86 of Mines,

Page 482; Records of Yavapai County, Arizona.

(SEAL) I. S. Colwell,
County Recorder.

By James W. Coyne,
Deputy Recorder.

Printed and for sale by the Prescott Courier

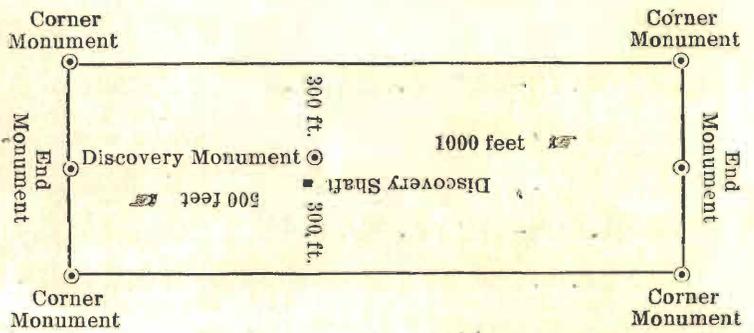

This diagram is to give locator a general idea of plan of location under the new law. The Discovery Shaft can be in the center of claim or any distance from either end desired. In the diagram it is placed 500 feet from one end and 1000 feet from the other. Commence description of claim at a center end monument, giving its distance and direction from center of Discovery Shaft; thence bound the claim in either direction. In description be careful to state locality of claim with reference to some natural object, or permanent monument, as will identify the claim.

Notice of Mining Location

LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Monster,
Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by H.M.Gibbes and F.S.Stephen, both citizens of the United States.

Locator must insert either "a citizen of the United States," or "who has declared his intention to become a citizen of the United States."

the undersigned, on the 6th., day of Aug., 1915.

The length of this claim is 1500 feet,
and We claim 1489 feet,
in a southwesterly direction and 91

feet in a northeasterly direction from
the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with
300 feet in width of the surface grounds, on each
side of the center of said claim. The general course of the lode deposit and premises is from the
southwest to the northeast

The claim is situated and located in the Verde Mining District, in
Yavapai County, in the State of Arizona, about 3000 feet
in a northwesterly direction from the United Verde mine and smelter,

The surface boundaries of the claim are marked upon the ground as follows: Beginning at
a monument of stone,

at a point in a northeasterly direction 91.0 feet from
the discovery shaft (at which this notice is posted,) being in the center of the northerly
end line of said claim; thence S.35°-44' E. 300 feet to a mon., of
stone, being the northeast corner of said claim;
thence S.54°-56' W. 1500 feet to a mon., of stone, being at the
southeast corner of said claim; thence N.35°-44' W. 300 feet
to a mon., of stone at the center of the southerly end of said claim;
thence N.35°-44' W. 300 feet to a mon., of stone, being at the
southwest corner of said claim; thence N.54°-56' W. 1500
feet to a mon., of stone at the northwest corner of said claim;
thence S.35°-44' E. 300 feet to the place of the beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901.

This is an Amended Location Notice of the Monster,
Mining Claim, located by Thomas Fryer,
on the 8, day of
January, 1912., and recorded in Book 92, of Records of Mines, at
page 23, in the office of the County Recorder of the aforesaid County of Yavapai
to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors
in the description in the said Original Location Notice.

Dated and posted on the ground this 6, day of Aug., 1915.

H.M.Gibbes.

F.S.Stephen.

I, _____, County Recorder in and for the County and State aforesaid, do hereby certify that the within instrument was filed for record ato'clock.....M., on this day of, 191....., and duly recorded in Book No..... of Records of County, Arizona, at pages.....

Witness my hand and official seal the day and year first above written.

County Recorder.

AMENDED
Notice of Location
LODE CLAIM

Monster.

Dated Aug. 6. 1915.

Filed and Recorded at request of

Jno. J. Hawkins,

August 7th. A. D. 1915.

at 3:05-O'clock P. M.


Book 86 of Mines.

Page 483:Records of Yavapai
County, Arizona.

(SMAL) L.S. Colwell,
County Recorder.

By James W. Coyne,
Deputy Recorder.

Printed and for sale by the Prescott Courier

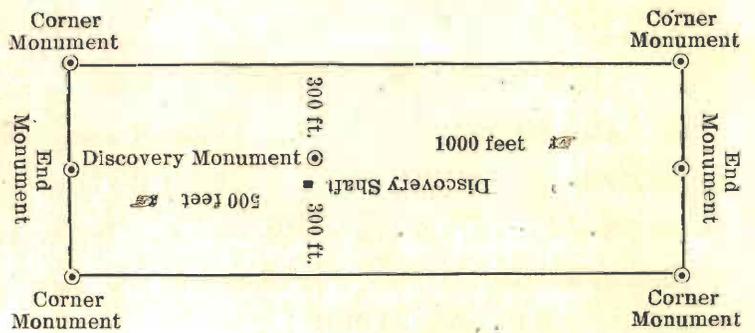

This diagram is to give locator a general idea of plan of location under the new law. The Discovery Shaft can be in the center of claim or any distance from either end desired. In the diagram it is placed 500 feet from one end and 1000 feet from the other. Commence description of claim at a center end monument, giving its distance and direction from center of Discovery Shaft; thence bound the claim in either direction. In description be careful to state locality of claim with reference to some natural object, or permanent monument, as will identify the claim.

27

AMENDED
Notice of Mining Location
LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Beauty,
Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable
mineral deposits, was entered upon and located for the purposes of exploration and purchase by
H.M.Gibbes and F.S.Stephen, both citizens of the United States,

Locator must insert either "a citizen of the United States," or "who has declared his intention to become a citizen of the United States."
the undersigned, on the 6. day of Aug., 1915.

The length of this claim is 1500 feet,
and 1433 claim 1433 feet,
in a southwesterly direction and 67

feet in a northeasterly direction from
the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with
300 feet in width of the surface grounds, on each
side of the center of said claim. The general course of the lode deposit and premises is from the
southwest to the northeast.

The claim is situated and located in the Verde Mining District, in
Yavapai County, in the State of Arizona, about 2500 feet
in a northwesterly direction from the United Verde mine and
smelter,

The surface boundaries of the claim are marked upon the ground as follows: Beginning at
a monument of stone,

at a point in a northeasterly direction 67 feet from
the discovery shaft (at which this notice is posted,) being in the center of the northerly
end line of said claim; thence S.35°-44' E. 300 feet to a mon., of stone
being the N.E. corner of said claim;
thence S.54°-56' W. 1500 feet to a mon., of stone, being at the
S.E. corner of said claim; thence N.35°-44' W. 300 feet
to a mon., of stone, at the center of the southerly end of said claim;
thence N.35°-44' W. 300 feet to a mon., of stone, being at the
S.W. corner of said claim; thence N.54°-56' E. 1500
feet to a mon., of stone, at the N.W. corner of said claim;
thence S.35°-44' E. 300 feet to the place of the beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United
States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws
of the Territory of Arizona," approved March 16, 1901.

This is an Amended Location Notice of the Beauty,
Mining Claim, located by Thomas Fryer,

on the 8, day of
January, 1912., and recorded in Book 92, of Records of Mines, at
page 24, in the office of the County Recorder of the aforesaid County of Yavapai,
to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors
in the description in the said Original Location Notice.

Dated and posted on the ground this 6. day of Aug., 1915.

H.M.Gibbes.

F.S.Stephen.

I, County Recorder in and for the County and State aforesaid, do hereby certify that the within instrument was filed for record ato'clock.....M., on this day of, 191....., and duly recorded in Book No..... of Records of County, Arizona, at pages.....

Witness my hand and official seal the day and year first above written.

..... County Recorder.

AMENDED
Notice of Location
LODE CLAIM

Beauty.

Dated Aug. 6, 1915.

Filed and Recorded at request of

Jno. J. Hawkins,

Aug. 7th., A. D. 1915.

at 3:05 - O'clock P. M.


Book 86 of Mines.

Page 484; Records of Yavapai County, Arizona.

(SEAL.) I. S. Colwell,
County Recorder.

By James W. Coyne,
Deputy Recorder.

Printed and for sale by the Prescott Courier

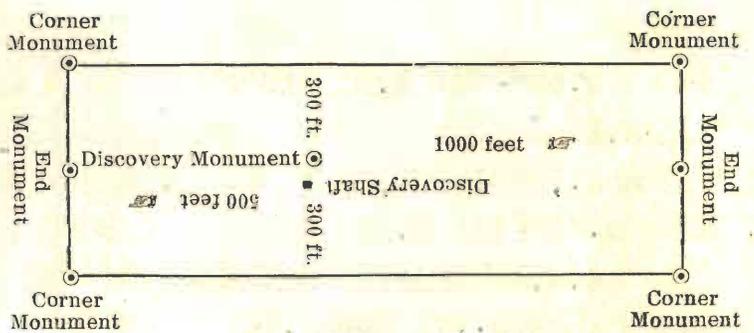

This diagram is to give locator a general idea of plan of location under the new law. The Discovery Shaft can be in the center of claim or any distance from either end desired. In the diagram it is placed 500 feet from one end and 1000 feet from the other. Commence description of claim at a center end monument, giving its distance and direction from center of Discovery Shaft; thence bound the claim in either direction. In description be careful to state locality of claim with reference to some natural object, or permanent monument, as will identify the claim.

AMENDED
Notice of Mining Location
LODE CLAIM

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Victory,
Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable
mineral deposits, was entered upon and located for the purposes of exploration and purchase by
H.M.Gibbes and F.S.Stephen, both citizens of the United States.

Locator must insert either "a citizen of the United States," or "who has declared his intention to become a citizen of the United States."

the undersigned, on the 6, day of Aug., 1915.

The length of this claim is 1500 feet,
and 1457 claim 1457 feet,
in a southwesterly direction and

43 feet in a northeasterly direction from
the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with
300 feet in width of the surface grounds, on each
side of the center of said claim. The general course of the lode deposit and premises is from the
southwest to the northeast.

The claim is situated and located in the Verde Mining District, in
Yavapai County, in the State of Arizona, about 2000 feet
in a northwesterly direction from the United Verde mine and
smelter.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at
a monument of stone,

at a point in a northeasterly direction 43 feet from
the discovery shaft (at which this notice is posted,) being in the center of the northerly
end line of said claim; thence S.7°-01' W. 468.2 feet to a mon., of
stone, being the most easterly corner of said claim;
thence S.46°-52' W. 1500 feet to a mon., of stone, being at the
most southerly corner of said claim; thence N.7°-01' E. 468.2 feet
to a mon., of stone, at the center of the southerly end of said claim;
thence N.7°-01' E. 468.2 feet to a mon., of stone, being at the
most westerly corner of said claim; thence N.46°-52' E. 1500
feet to a mon., of stone, at the most northerly corner of said claim;
thence S.7°-01' W. 468.2 feet to the place of the beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United
States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws
of the Territory of Arizona." approved March 16, 1901.

This is an Amended Location Notice of the Victory,
Mining Claim, located by Thomas Fryer,
on the 8, day of
January, 1912., and recorded in Book 92, of Records of Mines, at
page 28, in the office of the County Recorder of the aforesaid County of Yavapai
to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors
in the description in the said Original Location Notice.

Dated and posted on the ground this 6, day of Aug., 1915.

H.M.Gibbes.

F.S.Stephen.

AMENDED
Notice of Mining Location
LODE CLAIM

31

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Mint,
Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable
mineral deposits, was entered upon and located for the purposes of exploration and purchase by
H.M.Gibbes and F.S.Stephen, both citizens of the United States,

Locator must insert either "a citizen of the United States," or "who has declared his intention to become a citizen of the United States."

the undersigned, on the 6, day of Aug., 1915.

The length of this claim is 1500 feet,
and 730 claim 730 feet,
in a northeasterly direction and 770

feet in a southwesterly direction from
the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with
300 feet in width of the surface grounds, on each
side of the center of said claim. The general course of the lode deposit and premises is from the
southwest to the northeast

The claim is situated and located in the Verde Mining District, in
Yavapai County, in the State of Arizona, about 2000 feet,
in a northwesterly direction from the United Verde mine and
smelter.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at
a monument of stone,

at a point in a northeasterly direction 730 feet from
the discovery shaft (at which this notice is posted,) being in the center of the northerly
end line of said claim; thence S.7°-01' W. 405.3 feet to a mon., of
stone, being the most easterly corner of said claim;
thence S.54°-56' W. 1500 feet to a mon., of stone, being at the
most southerly corner of said claim; thence N.7°-01' E. 405.3 feet
to a mon., of stone, at the center of the southerly end of said claim;
thence N.7°-01' E. 405.3 feet to a mon., of stone, being at the
most westerly corner of said claim; thence N.54°-56' E. 1500
feet to a mon., of stone, at the most northerly corner of said claim;
thence S.7°-01' W. 405.3 feet to the place of the beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United
States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws
of the Territory of Arizona." approved March 16, 1901.

This is an Amended Location Notice of the Mint,
Mining Claim, located by Thomas Fryer,
on the 8, day of
January, 1912., and recorded in Book 92, of Records of Mines, at
page 25, in the office of the County Recorder of the aforesaid County of Yavapai
to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors
in the description in the said Original Location Notice.

Dated and posted on the ground this 6, day of Aug., 1915.

H.M.Gibbes.

F.S.Stephen.

County of _____

I, _____, County Recorder in and for the County and State aforesaid, do hereby certify that the within instrument was filed for record at _____ o'clock _____ M., on this _____ day of _____, 191____, and duly recorded in Book No. _____ of _____ Records of _____ County, Arizona, at pages _____

Witness my hand and official seal the day and year first above written.

County Recorder.

AMENDED
Notice of Location
LODE CLAIM

_____ Mint.

Dated _____ **Aug. 6,** _____ 191**5.**

Filed and Recorded at request of

Jno. J. Hawkins,

Aug. 7th., _____ A. D. 191**5.**

at **3:05,** _____ O'clock _____ **P.M.**

Book **86** of **Mines;**


Page **486;** Records of **Yavapai**

County, Arizona.

(SEAL.) **L. S. Colwell,**
County Recorder.

By _____ **James W. Coyne,**
Deputy Recorder.

Printed and for sale by the Prescott Courier

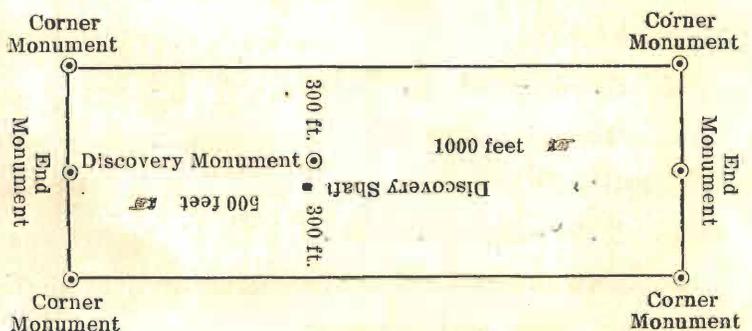

This diagram is to give locator a general idea of plan of location under the new law. The Discovery Shaft can be in the center of claim or any distance from either end desired. In the diagram it is placed 500 feet from one end and 1000 feet from the other. Commence description of claim at a center end monument, giving its distance and direction from center of Discovery Shaft; thence bound the claim in either direction. In description be careful to state locality of claim with reference to some natural object, or permanent monument, as will identify the claim.

AMENDED
Notice of Mining Location
LODE CLAIM

33

TO ALL WHOM IT MAY CONCERN:

This Mining Claim, the name of which is the Sunrise.
Mining Claim, situate on lands belonging to the United States of America, and in which there are valuable mineral deposits, was entered upon and located for the purposes of exploration and purchase by H.M.Gibbes and F.S.Stephen, both citizens of the United States.

Locator must insert either "a citizen of the United States," or "who has declared his intention to become a citizen of the United States."

the undersigned, on the 6 day of Aug., 1915.

The length of this claim is 1109.9 feet,
and 514.5 claim 514.5 feet,
in a southwesterly direction and

595.4 feet in a northeasterly direction from
the center of the discovery shaft, at which this notice is posted, lengthwise of the claim, together with
300 feet in width of the surface grounds, on each
side of the center of said claim. The general course of the lode deposit and premises is from the
southwest to the northeast

The claim is situated and located in the Verde Mining District, in
Yavapai County, in the State of Arizona, about 1500 feet
in a westerly direction from the United Verde mine and
smelter.

The surface boundaries of the claim are marked upon the ground as follows: Beginning at
a monument of stone,

at a point in a southwesterly direction 514.5 feet from
the discovery shaft (at which this notice is posted,) being in the center of the southerly
end line of said claim; thence N.11°-16' W. 348.5 feet to a mon., of
stone, being the N.W. corner of said claim;
thence N.48°-00' E. 1109.9 feet to a mon., of stone, being at the
N.E. corner of said claim; thence S.11°-16' E. 348.5 feet
to a mon., of stone, at the center of the northerly end of said claim;
thence S.11°-16' E. 348.5 feet to a mon., of stone, being at the
S.E. corner of said claim; thence S.48°-00' W. 1109.9
feet to a mon., of stone, at the S.W. corner of said claim;
thence N.11°-16' W. 348.5 feet to the place of the beginning.

All done under the provisions of Chapter Six, of Title XXXII, of the Revised Statutes of the United States, and of an Act of the General Assembly of Arizona, entitled "An Act to Revise and Codify the Laws of the Territory of Arizona," approved March 16, 1901.

This is an Amended Location Notice of the Sunrise.
Mining Claim, located by Thomas Fryer.

on the 8, day of
January, 1912., and recorded in Book 92, of Records of Mines, at
page 27., in the office of the County Recorder of the aforesaid County of Yavapai,
to which reference is hereby made, and this Amended Location Notice is made and posted to correct errors
in the description in the said Original Location Notice.

Dated and posted on the ground this 6. day of Aug., 1915.

H.M.Gibbes.

F.S.Stephen.

I, County Recorder in and for the County and State aforesaid, do hereby certify that the within instrument was filed for record at o'clock M., on this day of, 191....., and duly recorded in Book No..... of Records of County, Arizona, at pages.....

Witness my hand and official seal the day and year first above written.

..... County Recorder.

AMENDED
Notice of Location
LODE CLAIM

Sunrise.

Dated Aug., 6, 1915.

Filed and Recorded at request of

Jno. J. Hawkins.

Aug., 7th., A. D. 1915.

at 3:05- 0'clock, P. M.


Book 86 of Mines;

Page 487; Records of Yavapai County, Arizona.

(STAT.) L.S. Colwell,
County Recorder.

By James W. Coyne,
Deputy Recorder.

Printed and for sale by the Prescott Courier

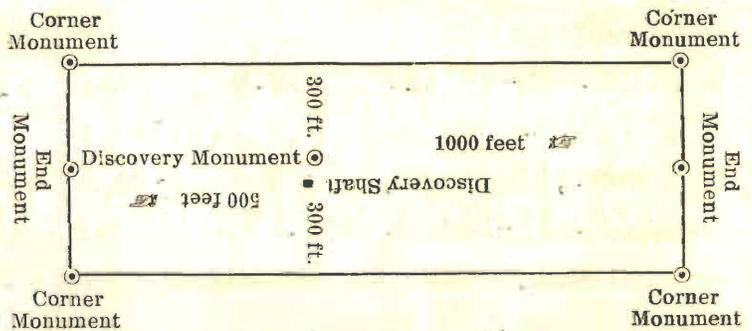

This diagram is to give locator a general idea of plan of location under the new law. The Discovery Shaft can be in the center of claim or any distance from either end desired. In the diagram it is placed 500 feet from one end and 1000 feet from the other. Commence description of claim at a center end monument, giving its distance and direction from center of Discovery Shaft; thence bound the claim in either direction. In description be careful to state locality of claim with reference to some natural object, or permanent monument, as will identify the claim.

4-688.

U. S. SURVEYOR-GENERAL'S FINAL CERTIFICATE ON FIELD NOTES.

Department of the Interior,

OFFICE OF U. S. SURVEYOR-GENERAL,

Phoenix, Arizona,

January 21, 1916

I, U. S. Surveyor-General for District of Arizona

do hereby certify that the foregoing transcript of the Field Notes, return and approval of the survey of the mining claim of

Heyward M. Gibbes

known as the FRACTION, MONSTER, BEAUTY, VICTORY, MINT, SUNRISE.

situate in VERDE

Mining District, YAVAPAI County, ARIZONA.

unsur.

in Sections 21-22-28, Township No. 16 N., Range No. 2 E., and

designated as Survey No. 3240, has been correctly copied from the originals on file in this office; that said Field Notes furnish such an accurate description of said mining claim as will, if incorporated into a patent, serve fully to identify the premises, and that such reference is made therein to natural objects or permanent monuments as will perpetuate and fix the *locus* thereof.

And I further certify that five hundred dollars' worth of labor has been expended or improvements made upon said mining claim^s by claimant or his grantors, and that said improvements consist of 14 cuts, 2 tunnels and 2 shafts, total value \$5997.

Improvement No. 3 on the Beauty lode being a common improvement for the benefit and development of the Beauty and Monster lodes of this survey, and only such lodes, an undivided one-half interest therein, value \$270, is properly credited to each of said lodes. Improvement No. 3 on the Mint lode being a common improvement for the benefit and development of all of the claims in this survey, an undivided one-sixth interest therein, value \$622, is properly credited to each of the claims in this survey.

and that no portion of said labor or improvements has been included in the estimate of expenditures upon any other claim.

I further certify that the plat thereof, filed in the U. S. Land Office at Phoenix,

Arizona, is correct and in conformity with the foregoing Field Notes.

Frank S. Ingalls,

United States Surveyor-General for Arizona.

4-687.

SURVEYOR-GENERAL'S CERTIFICATE OF APPROVAL OF FIELD NOTES AND SURVEY OF MINING CLAIM.

Department of the Interior,

Office of U. S. Surveyor-General,

Phoenix, Arizona,

January 21, 1916.

I, U. S. Surveyor-General for District of Arizona

do hereby certify that the foregoing and hereto attached Field Notes and Return of the Survey of the Mining Claim of

Heyward M. Gibbes

, known as the

FRACTION, MONSTER, BEAUTY, VICTORY, MINT, SUNRISE.

situate in VERDE Mining District,

YAVAPAI County, ARIZONA.

in Sections 21-22-28, un.s., Township No. 16 N., Range No. 2 E.

, designated as Survey No. 3240

executed by J. William Waara, U. S. Deputy Mineral

Surveyor, September 16-22, 1915, under my instructions dated

September 9, 1915, have been critically examined and the necessary cor-

rections and explanations made, and the said Field Notes and Return, and the Survey they describe,

are hereby approved. A true copy of the copy of the location certificate filed by the applicant for

survey is included in the field notes.

Frank S. Ingalls

U. S. Surveyor-General for Arizona.